



Dwell 1-DH1 2480MHz One Burst




Dwell 1-DH1 2480MHz Accumulated

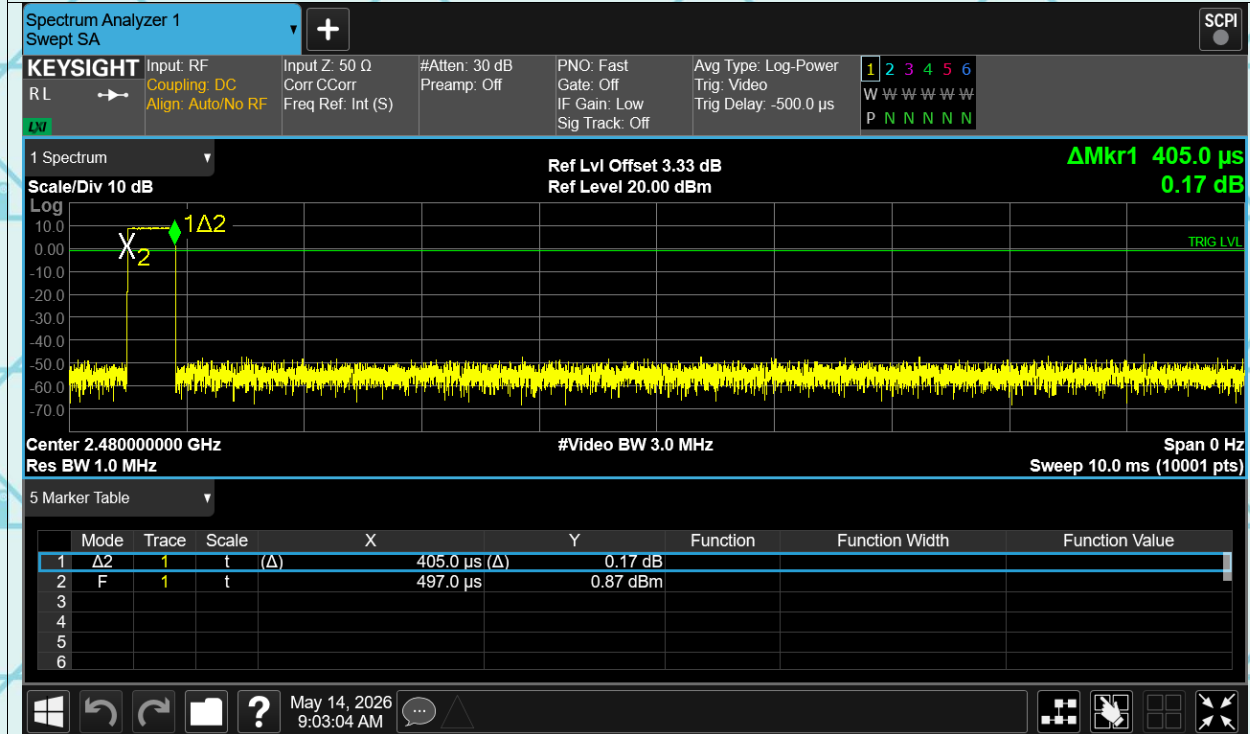


Dwell 1-DH3 2402MHz One Burst

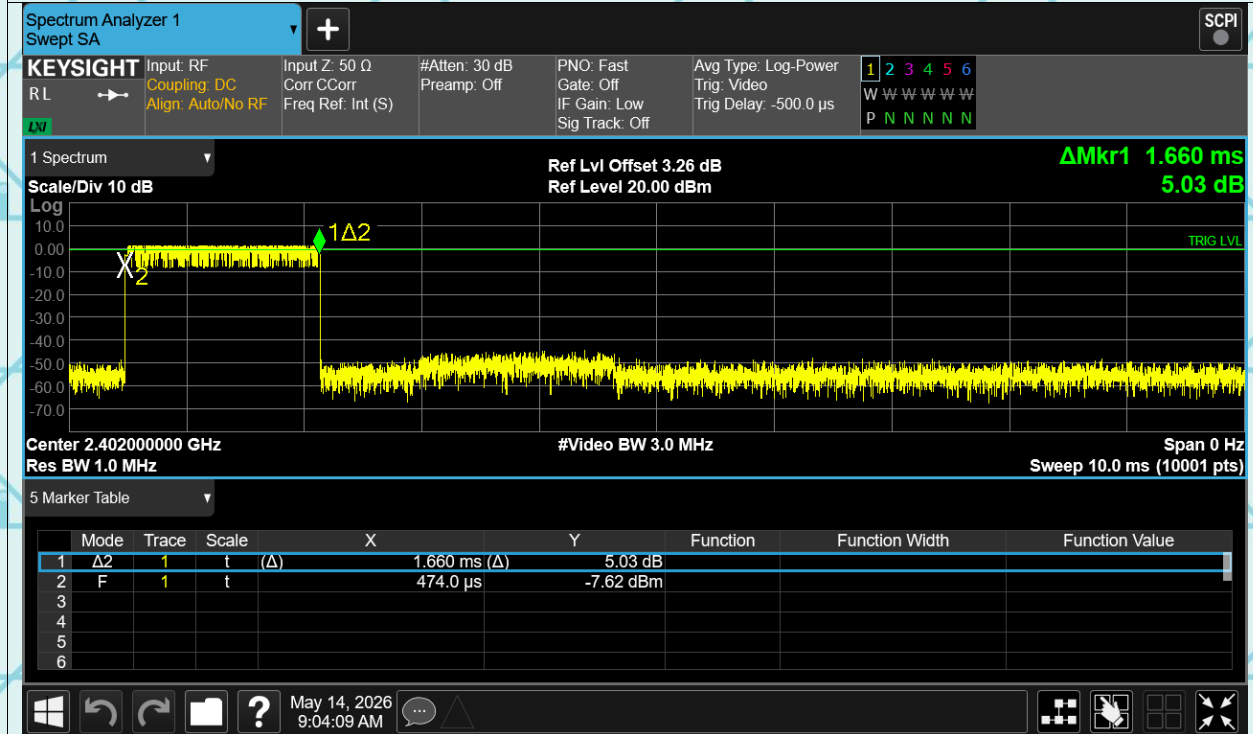


Dwell 1-DH3 2402MHz Accumulated

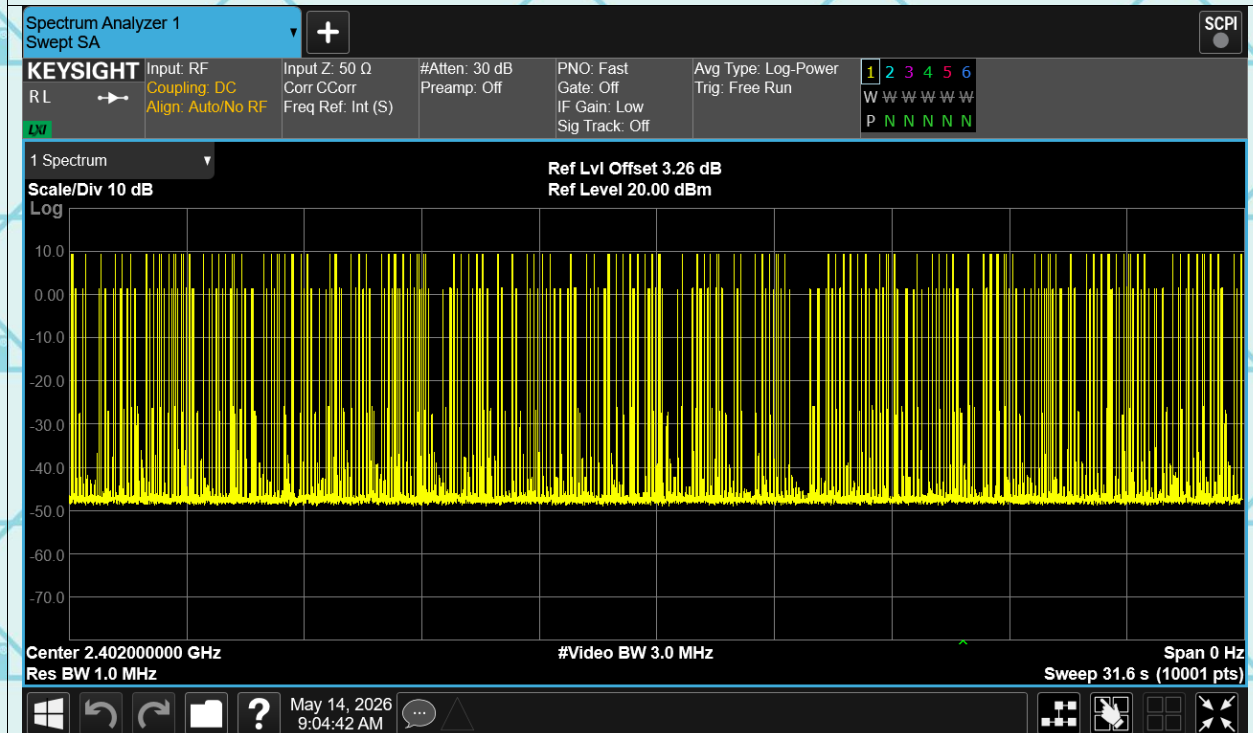


Dwell 1-DH3 2441MHz One Burst

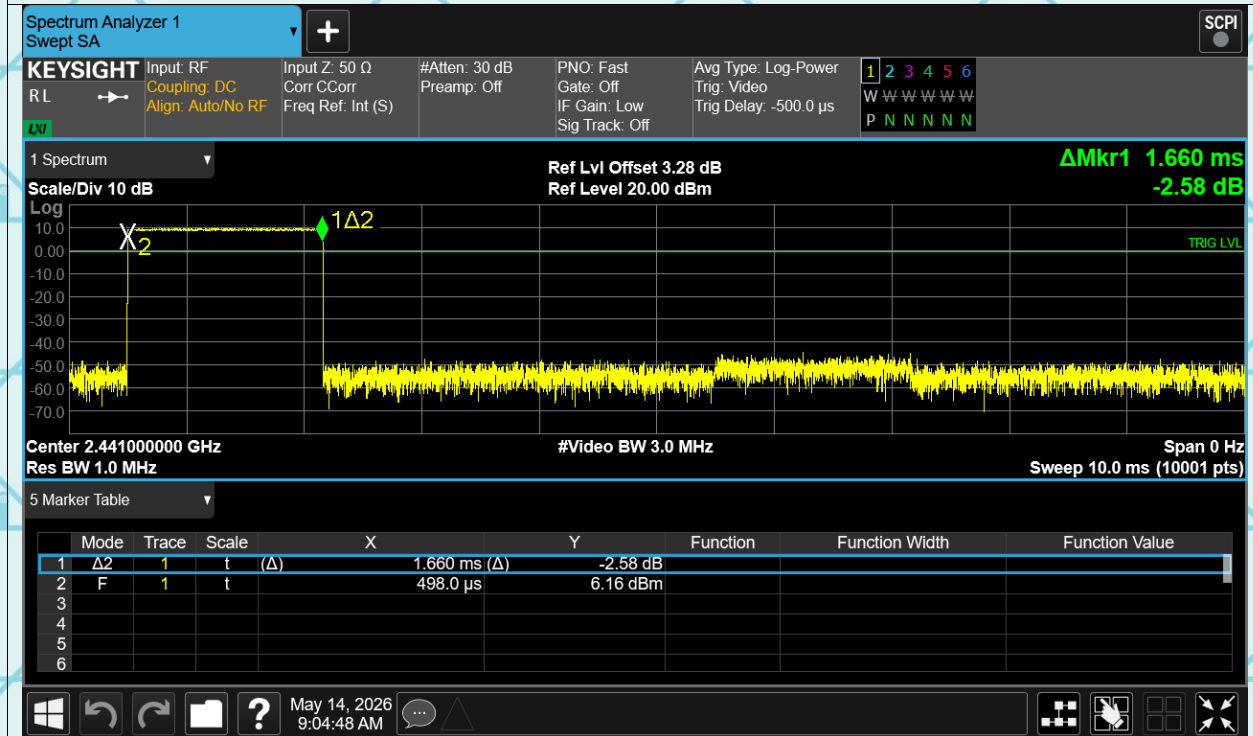


Dwell 1-DH3 2441MHz Accumulated

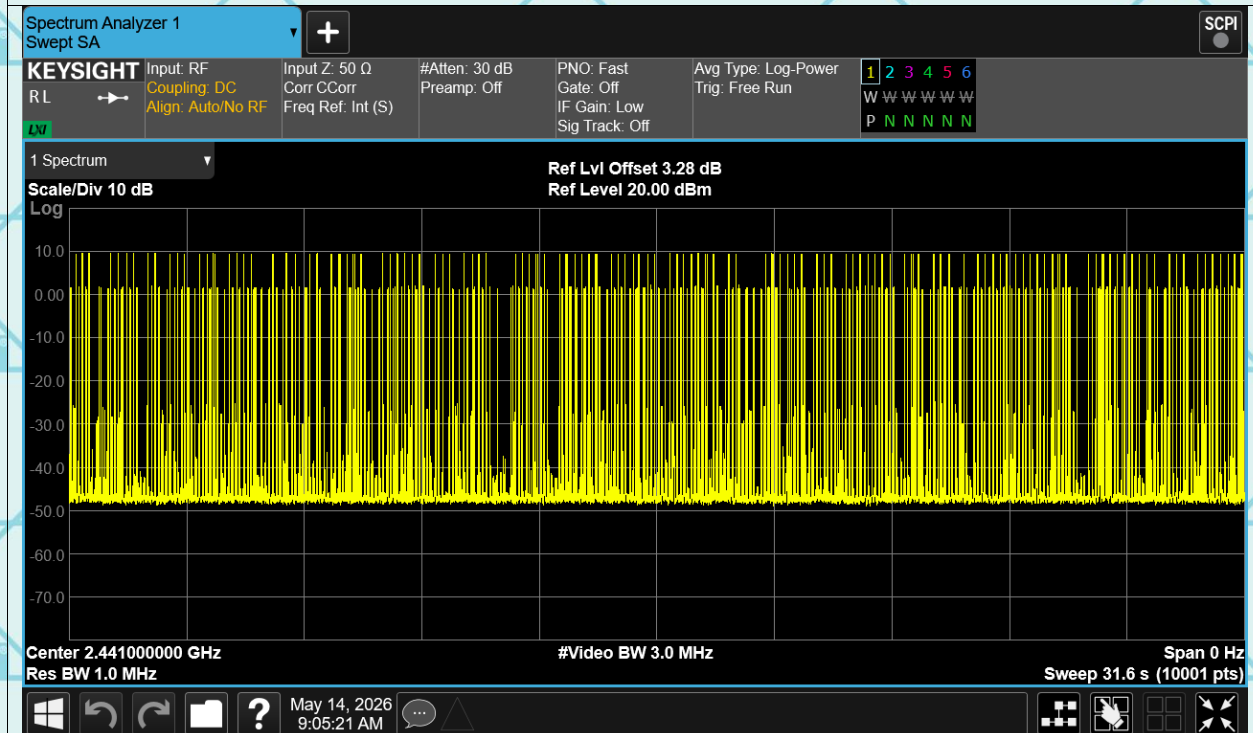


Dwell 1-DH3 2480MHz One Burst

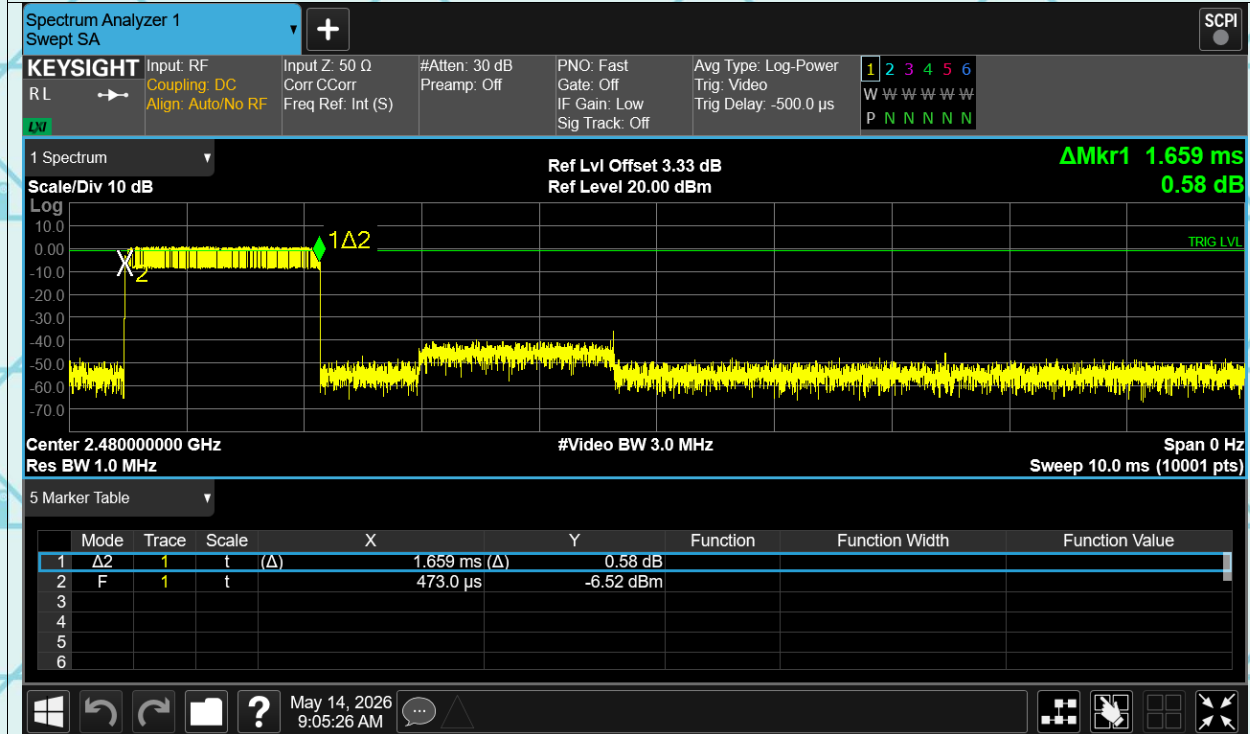


Dwell 1-DH3 2480MHz Accumulated

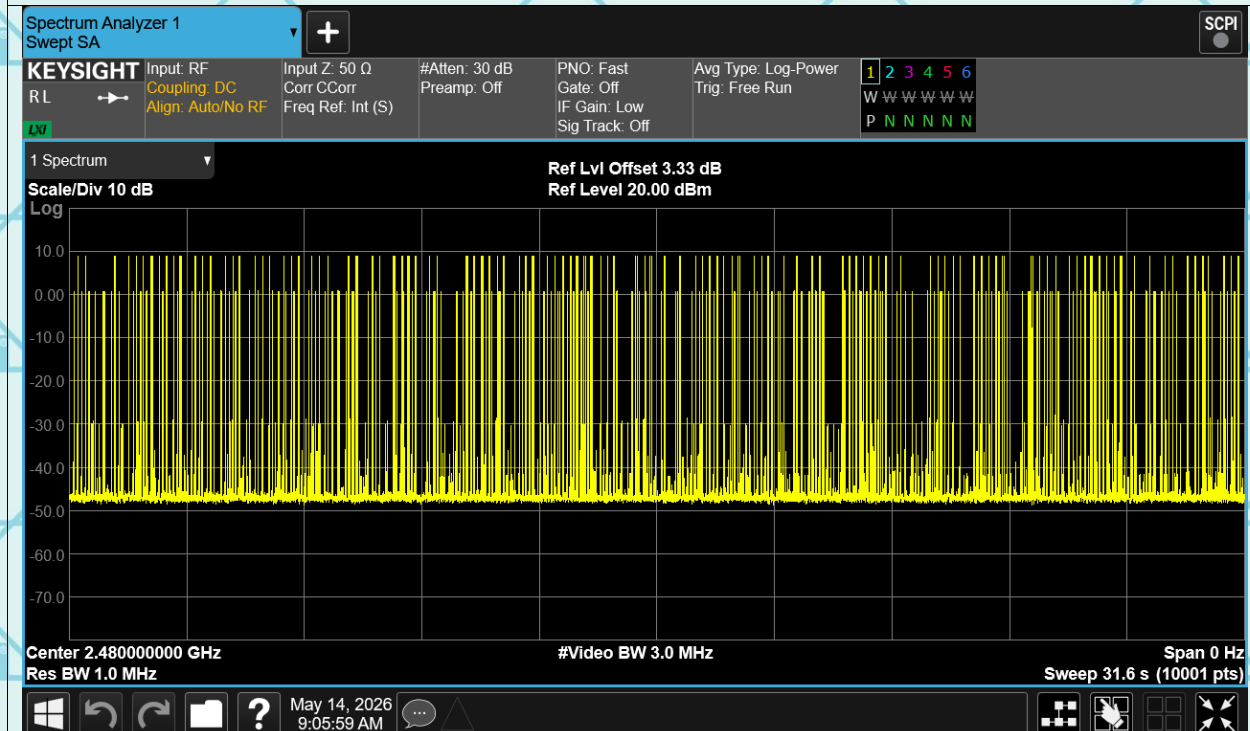


Dwell 1-DH5 2402MHz One Burst

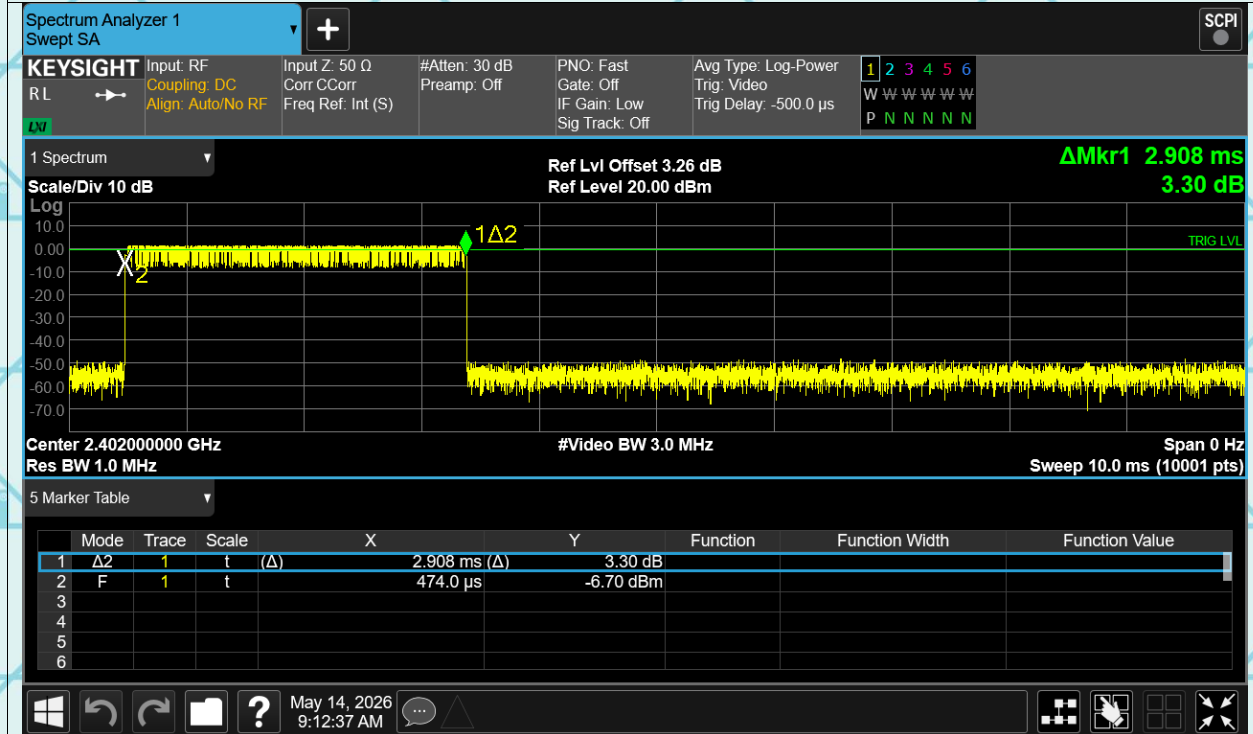


Dwell 1-DH5 2402MHz Accumulated

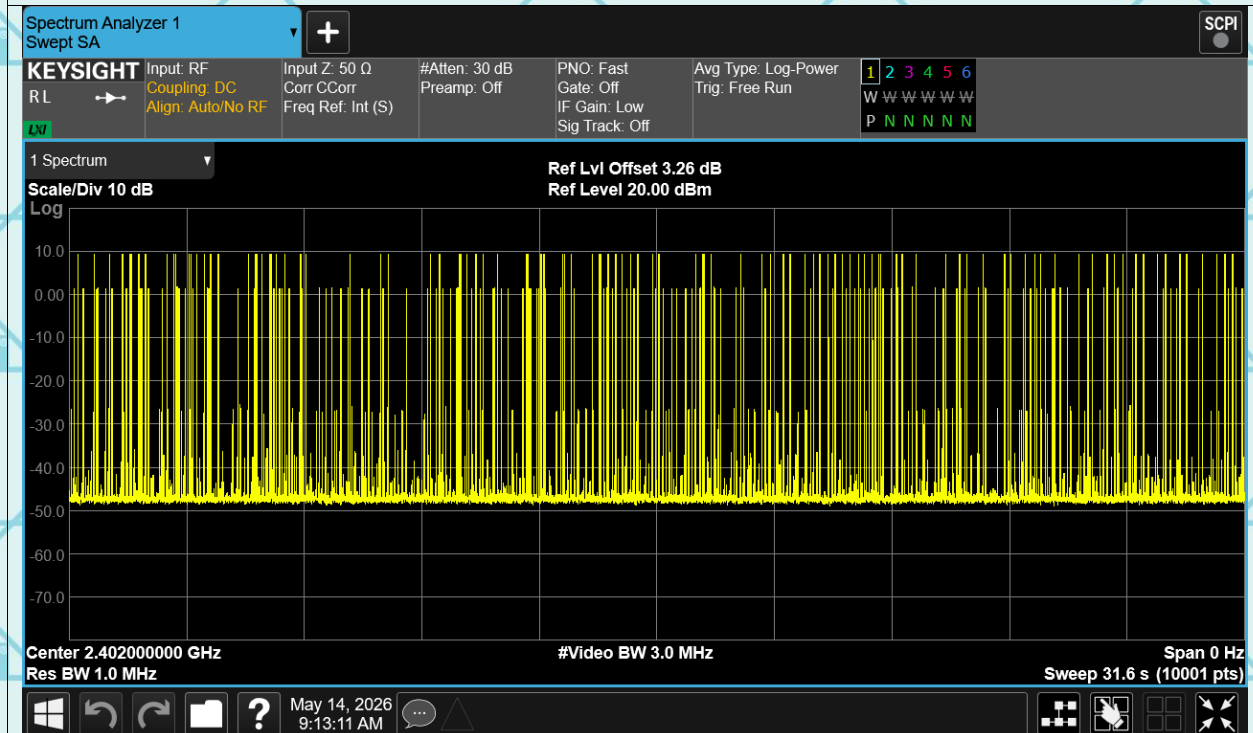


Dwell 1-DH5 2441MHz One Burst

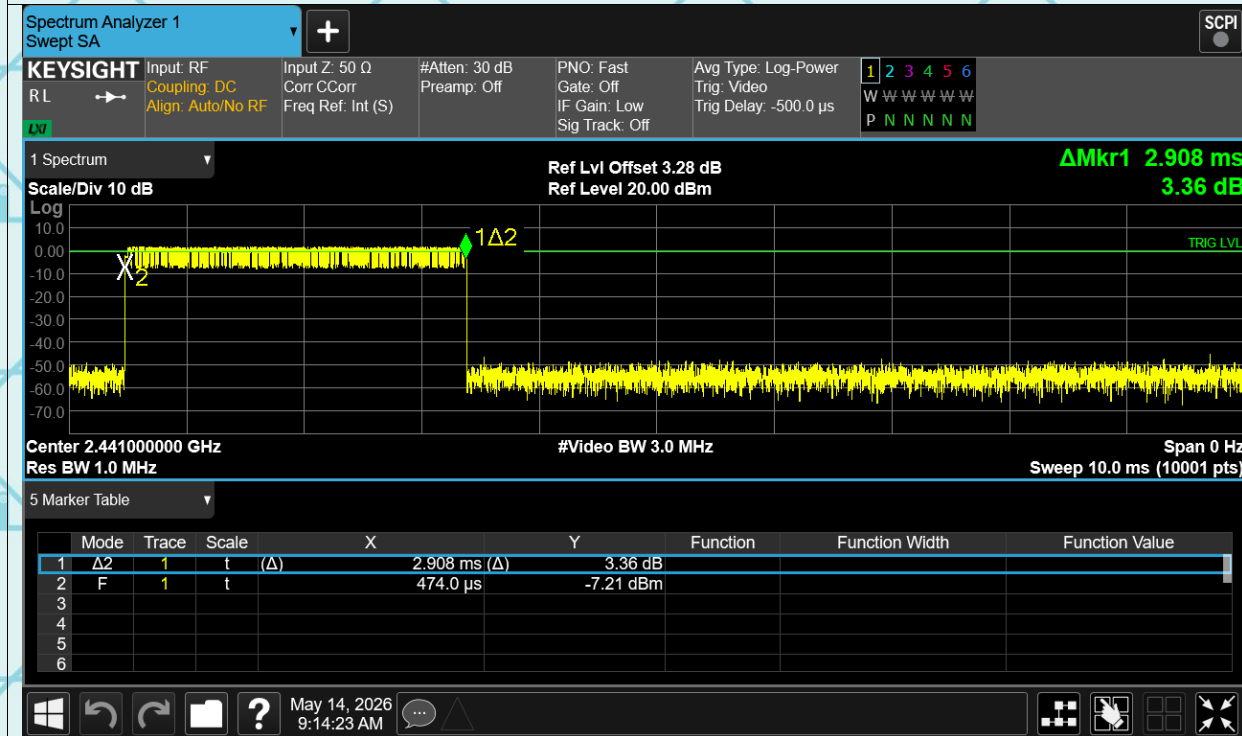


Dwell 1-DH5 2441MHz Accumulated

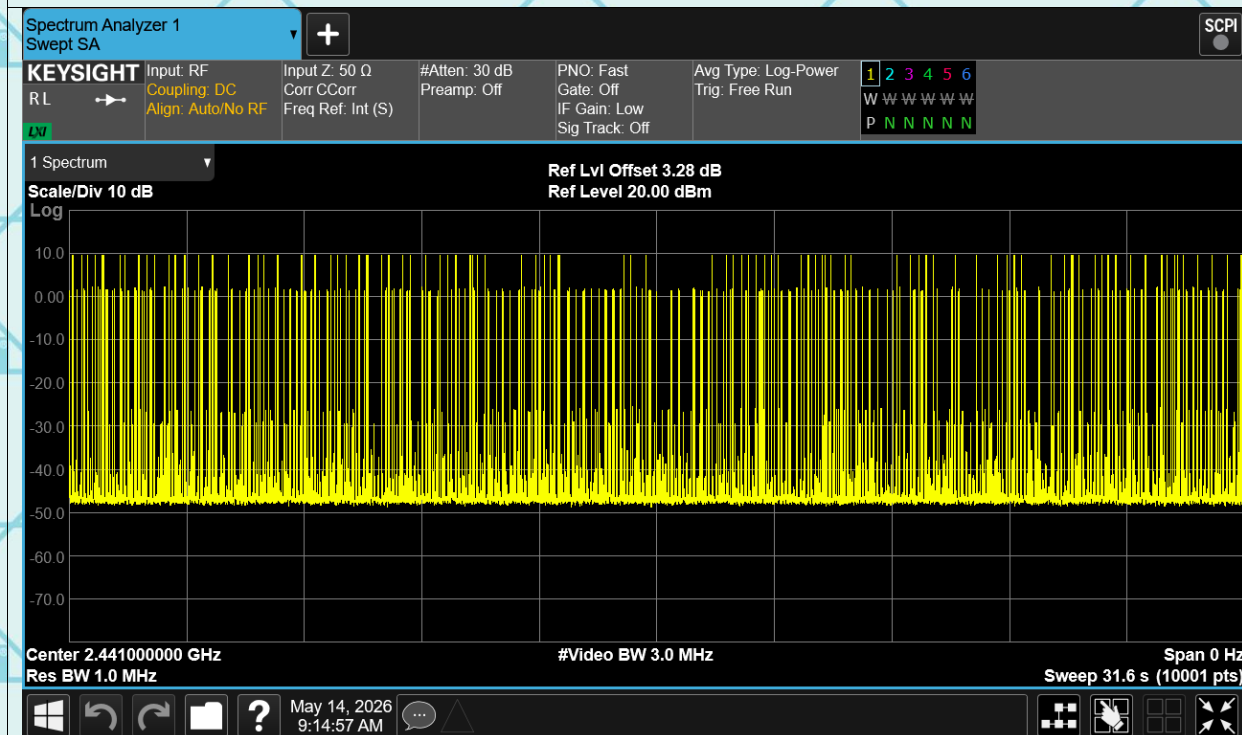

Dwell 1-DH5 2480MHz One Burst

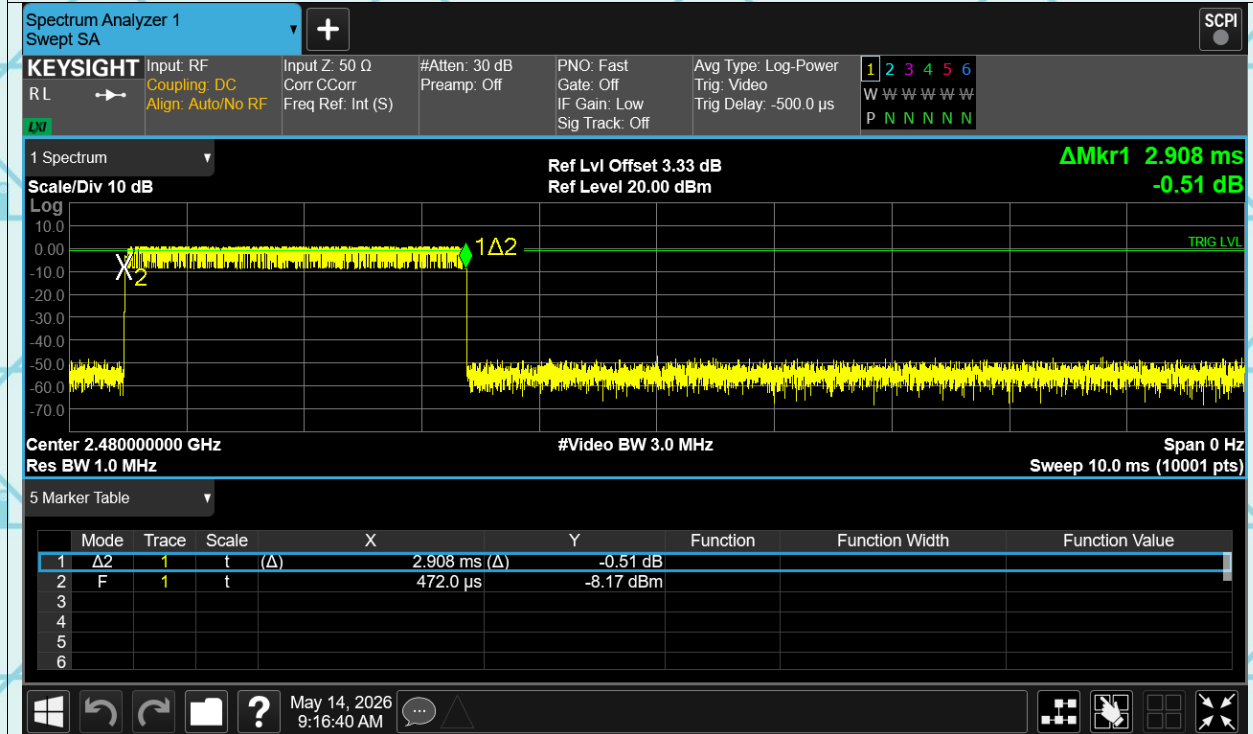

Dwell 1-DH5 2480MHz Accumulated

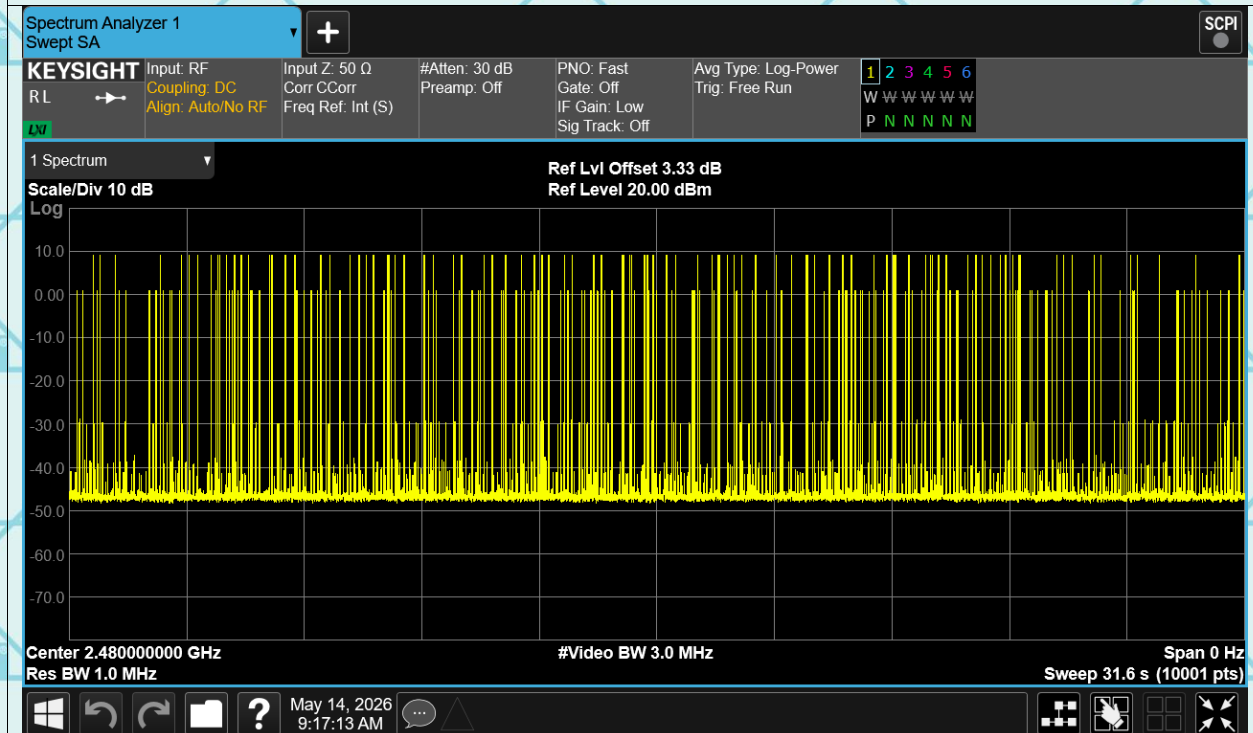

6.8. Pseudorandom Frequency Hopping Sequence

Test Requirement: FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

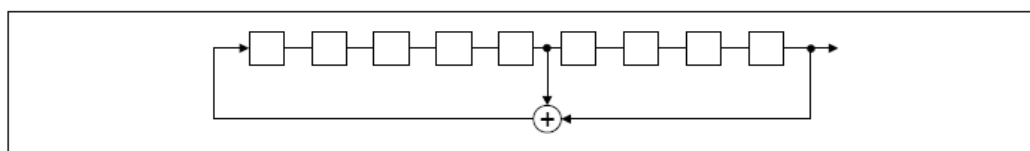

Linear Feedback Shift Register for Generation of the PRBS sequence


An example of Pseudorandom Frequency Hopping Sequence as follow:

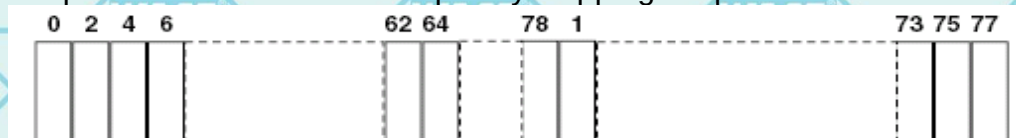

Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

6.9. Conducted Band Edge Measurement



6.9.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2020
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	 The diagram shows a Spectrum Analyzer (green box) connected via a cable to an EUT (yellow box). Below the Spectrum Analyzer is the label 'Spectrum Analyzer' and below the EUT is the label 'EUT'.
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of ANSI C63.10:2020 Measurement Guidelines. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Set RBW = 100 kHz ($\geq 1\%$ span=10MHz), VBW = 300 kHz ($\geq$RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used. 4. Enable hopping function of the EUT and then repeat step 2 and 3. 5. Measure and record the results in the test report.
Test Result:	PASS

6.9.2. Test Data

GFSK Modulation (the worst case)



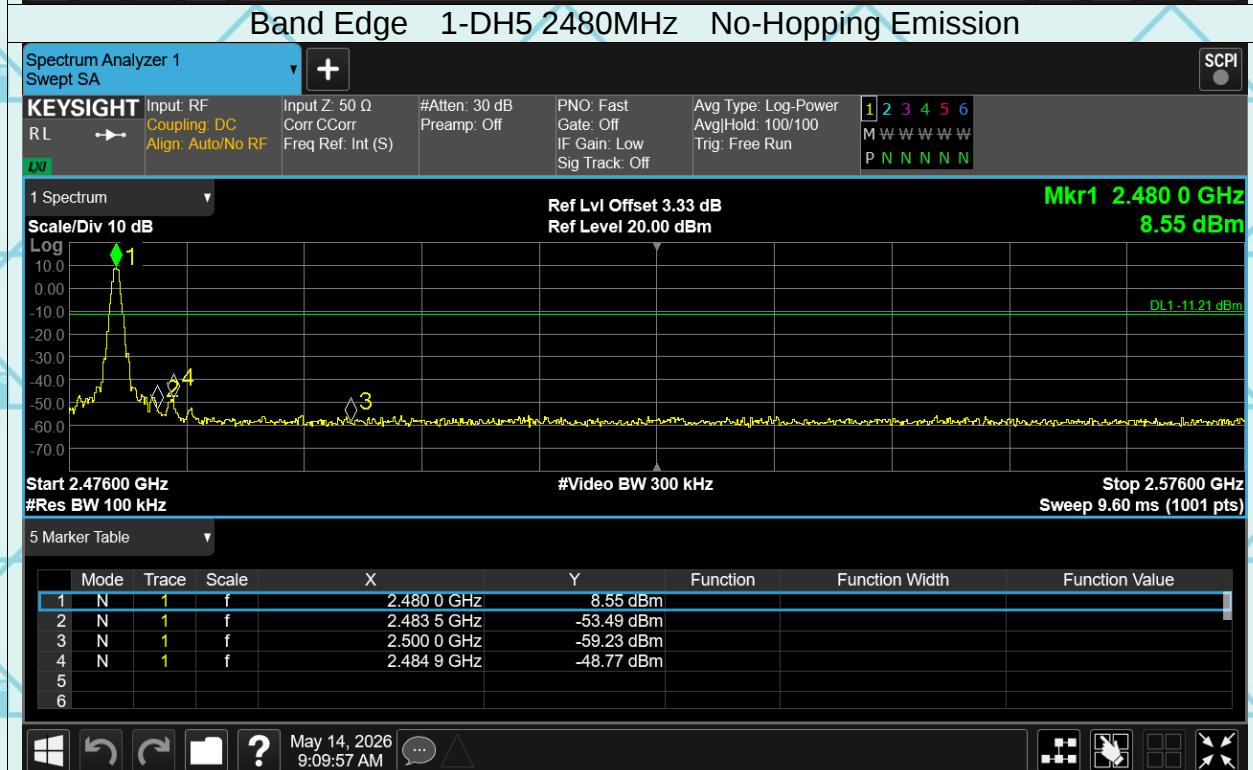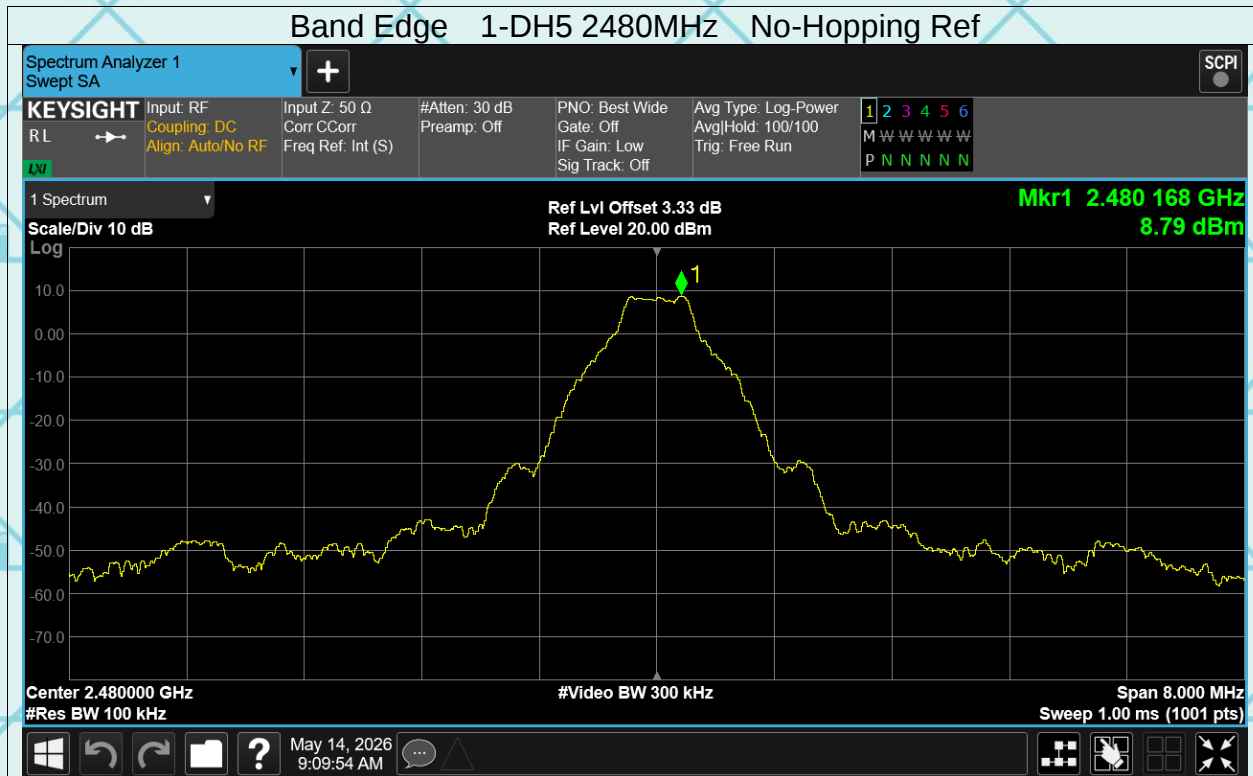


Test Graphs

Band Edge(Hopping) 1-DH5 2402MHz Hopping Ref






Report No.: WSCT-ANAB-R&E260500036A-BT Issued 01 June 2026

Revised: None

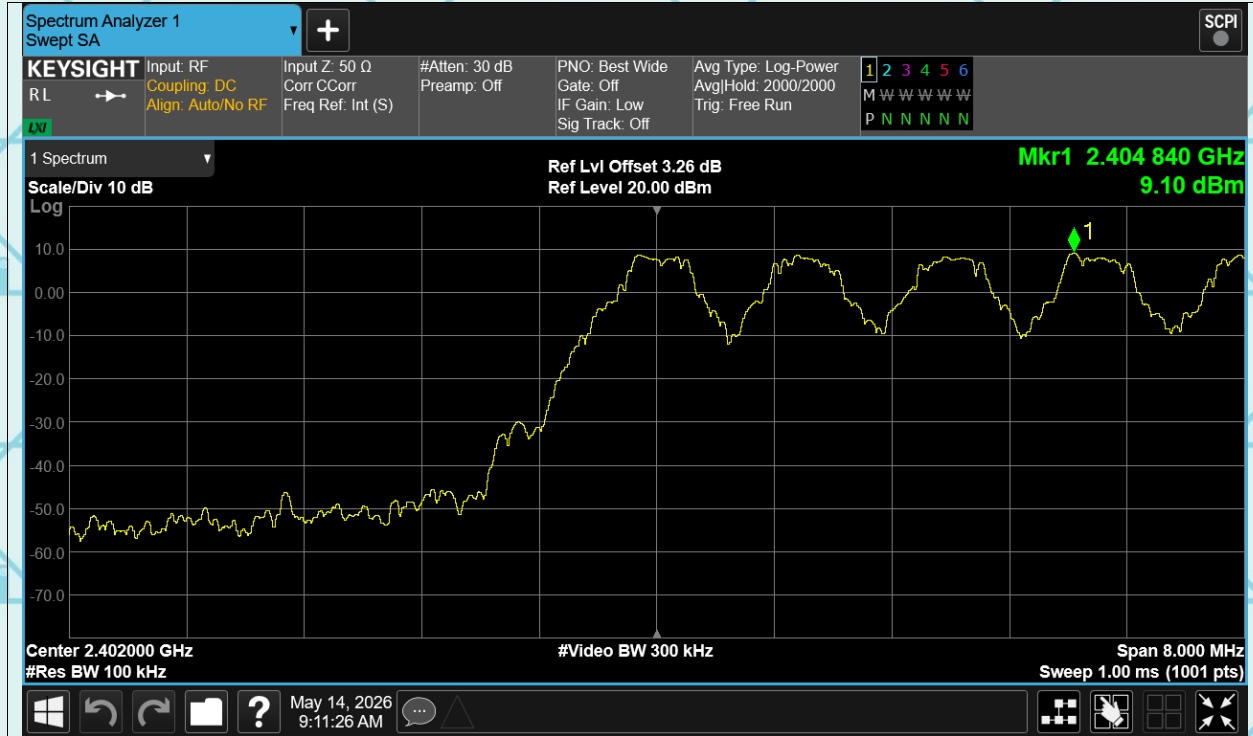

Band Edge(Hopping) 1-DH5 2402MHz Hopping Emission

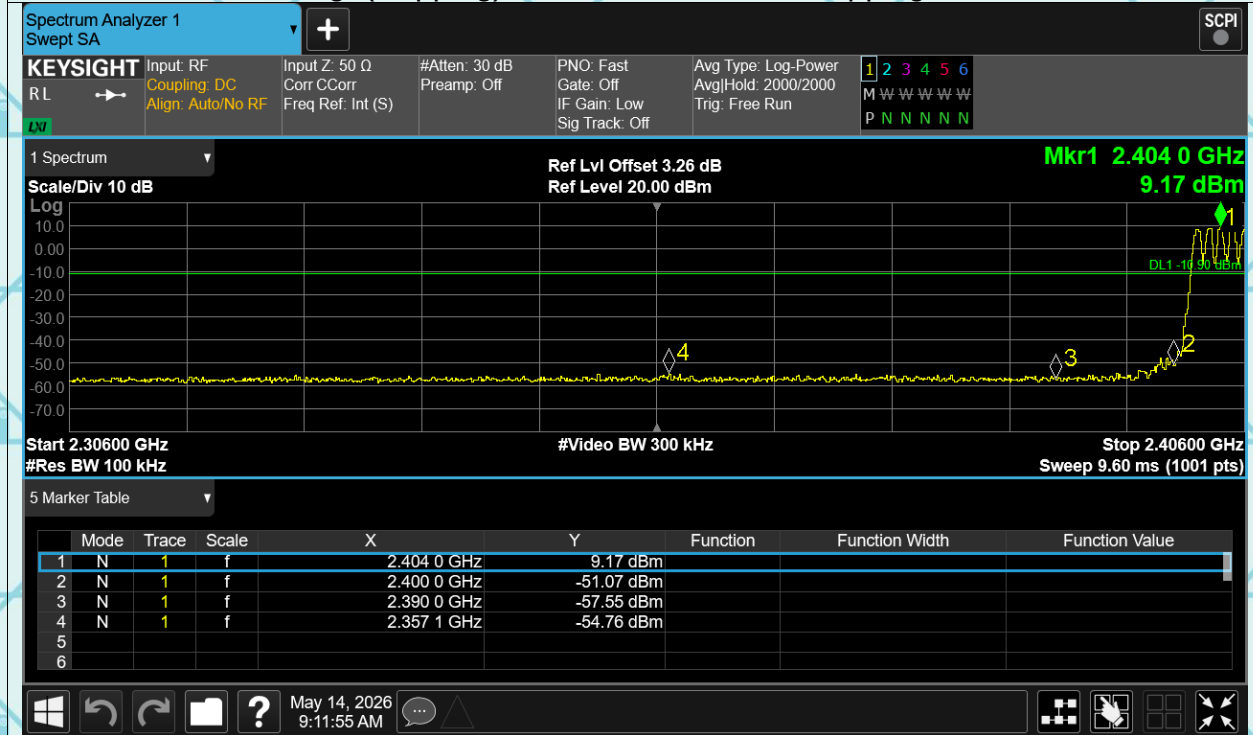

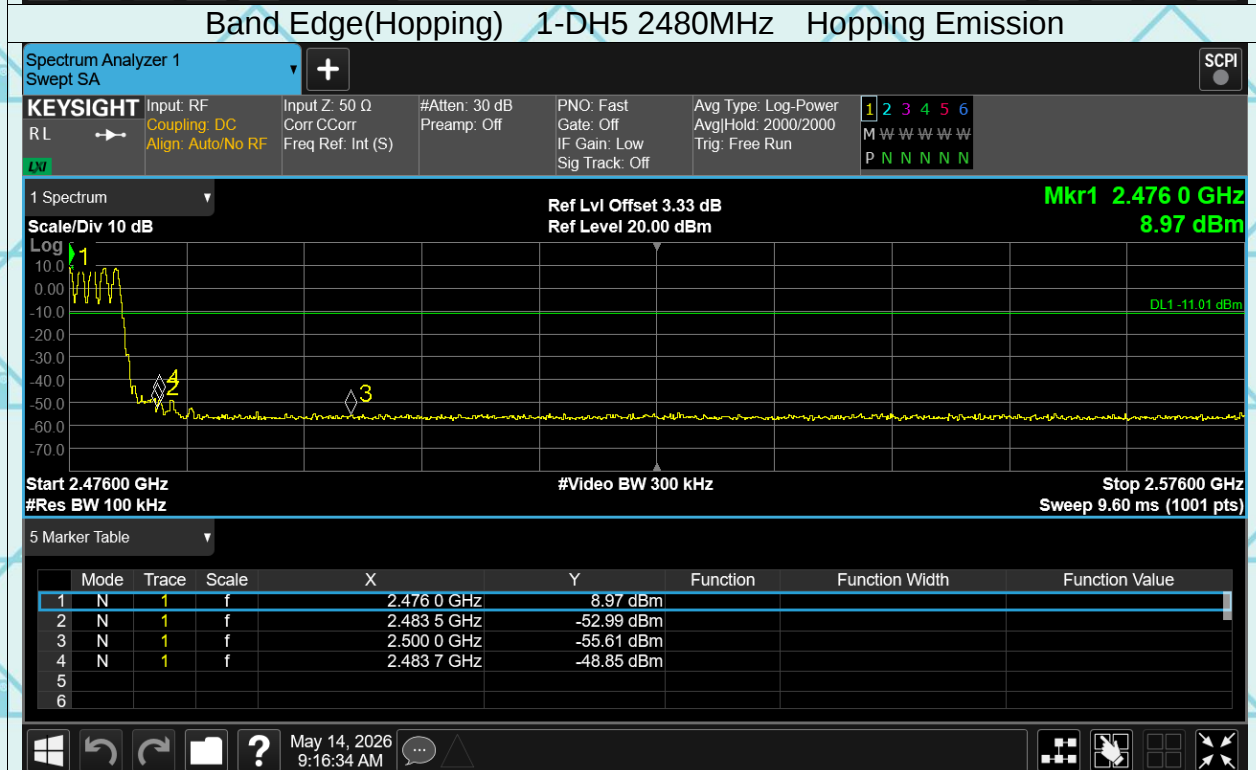
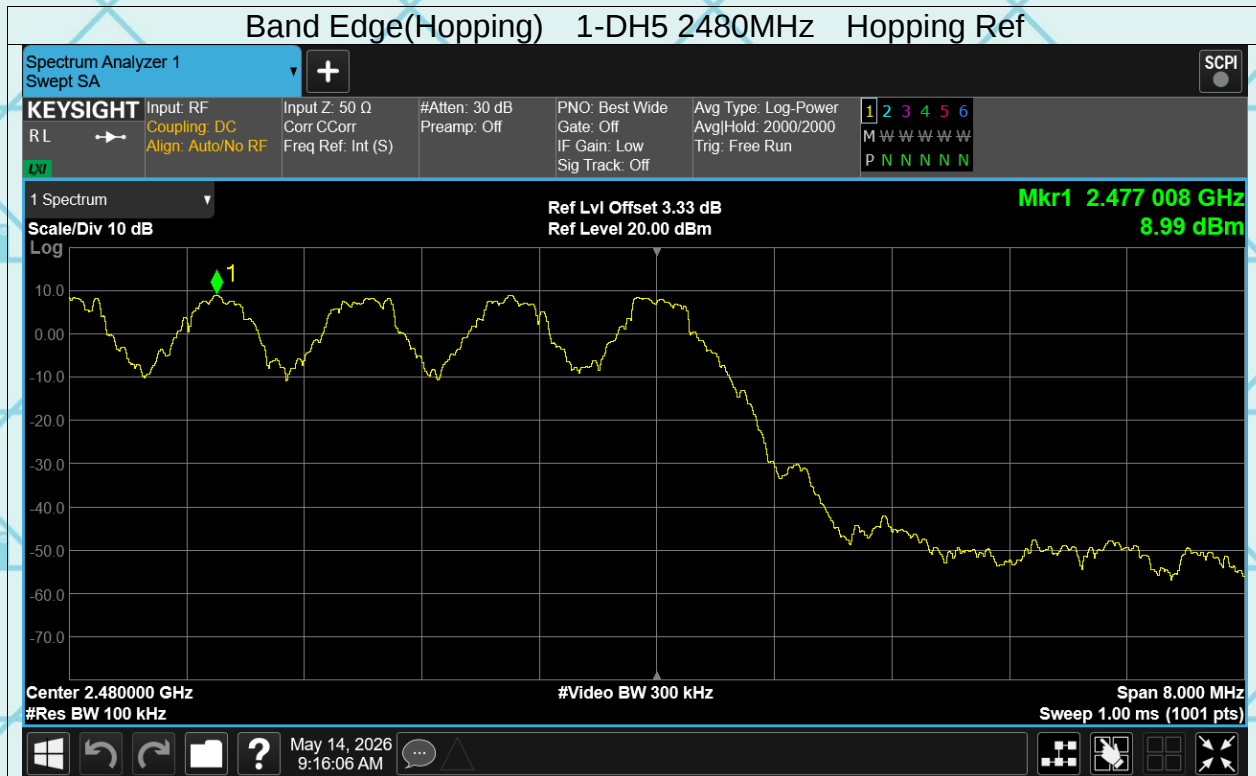


6.10. Conducted Spurious Emission Measurement


6.10.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2020
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows the guidelines in Spurious RF Conducted Emissions of ANSI C63.10:2020 Measurement Guidelines 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. 5. Measure and record the results in the test report. 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS


Test Data

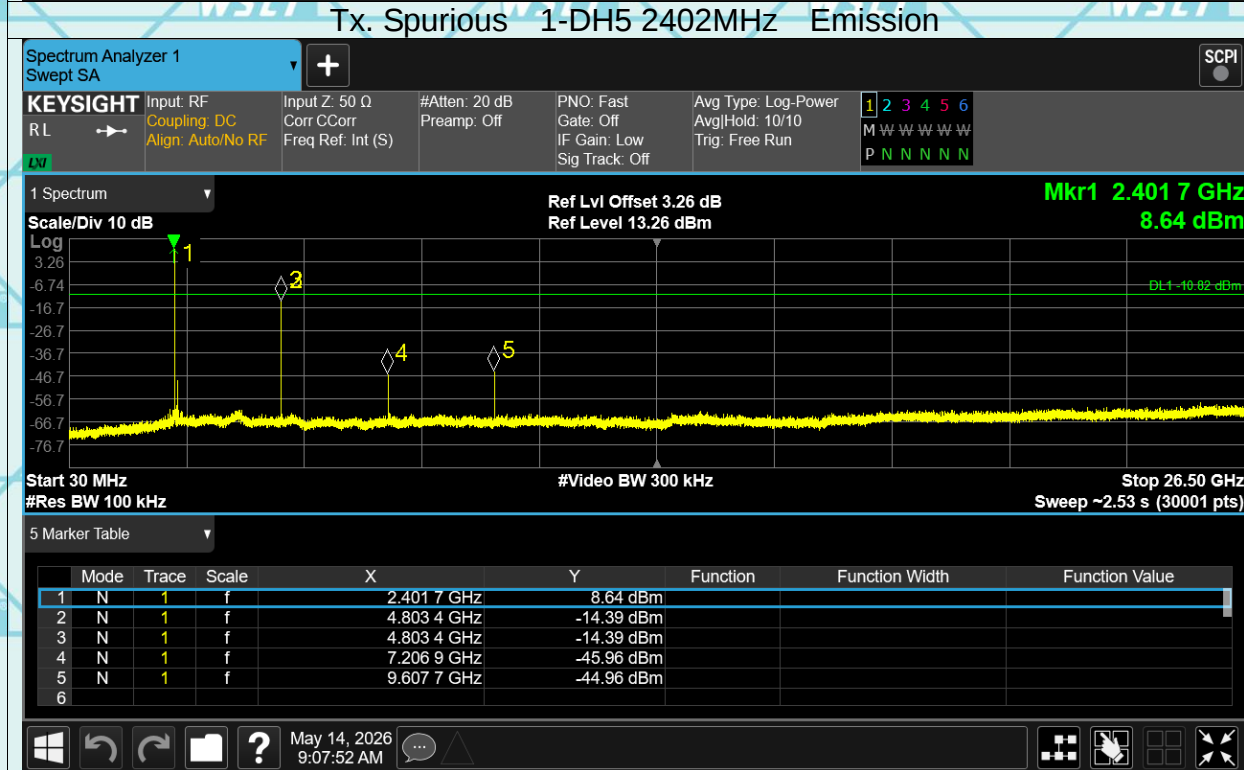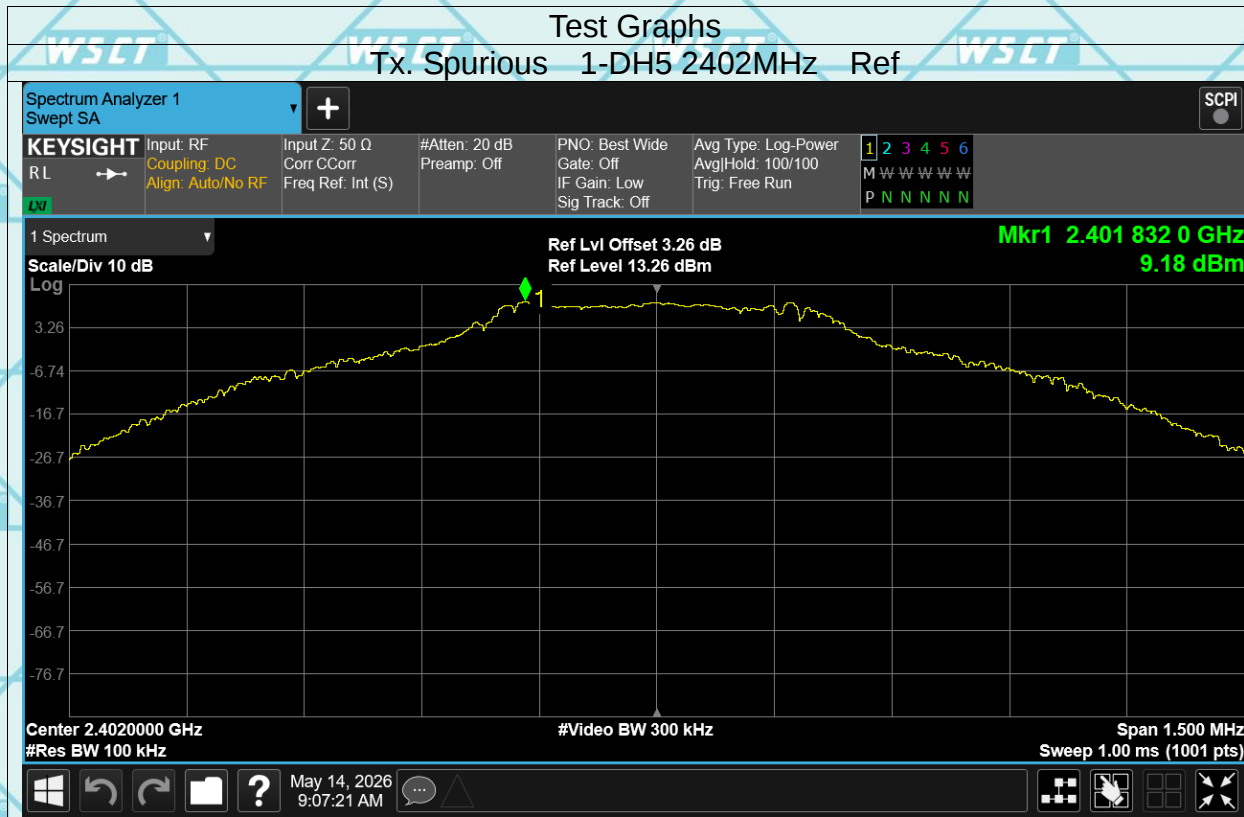


Tx. Spurious 1-DH5 2441MHz Ref

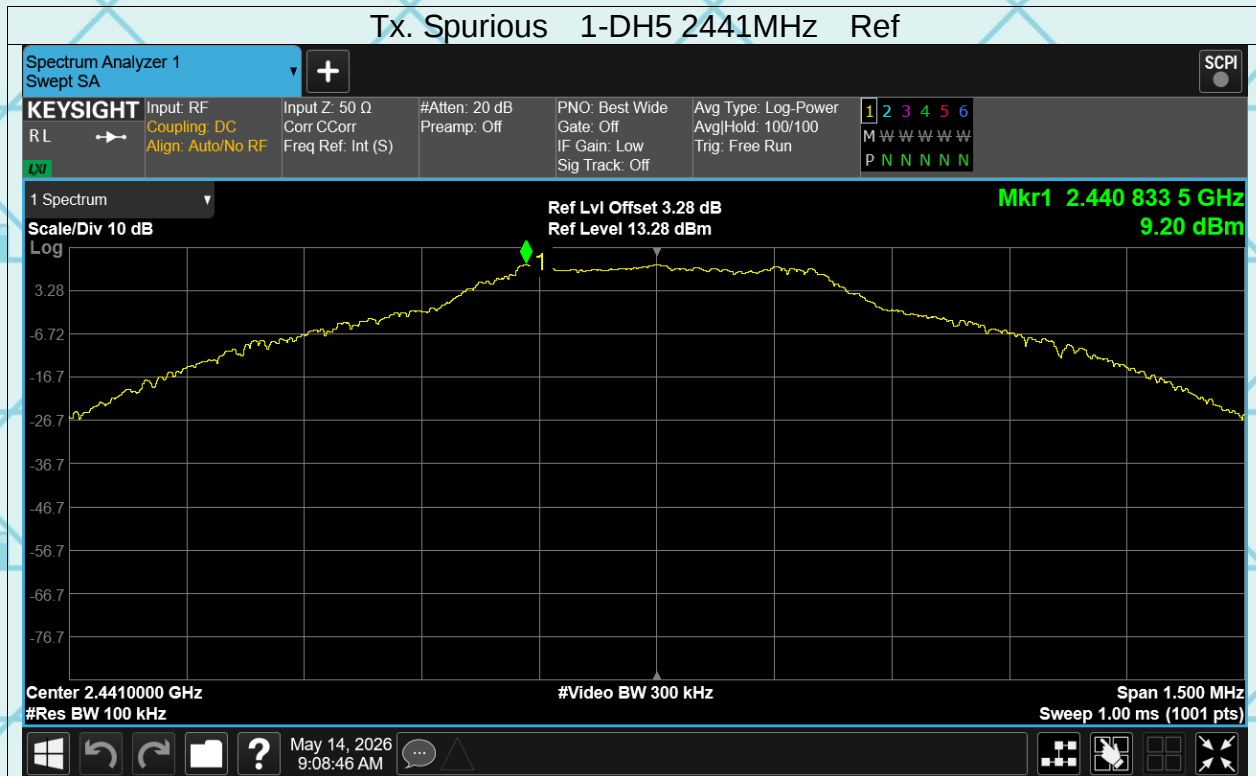


Tx. Spurious 1-DH5 2441MHz Emission


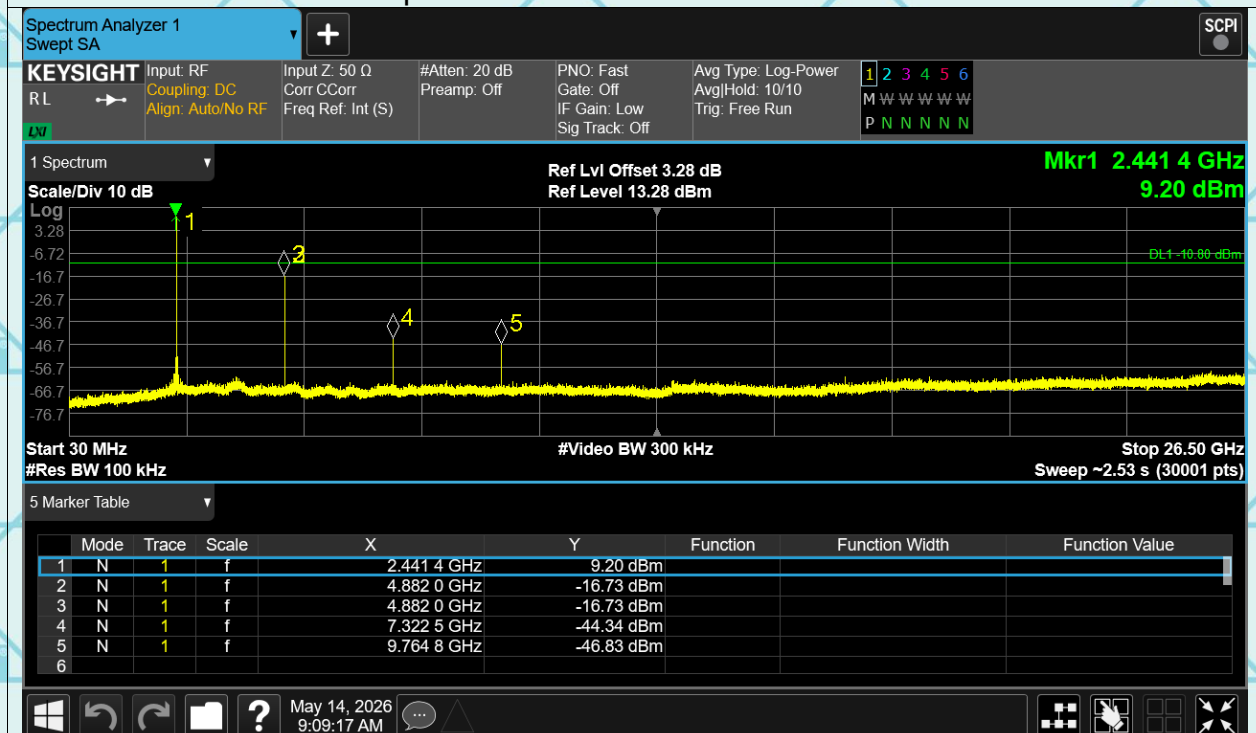


Tx. Spurious 1-DH5 2480MHz Ref

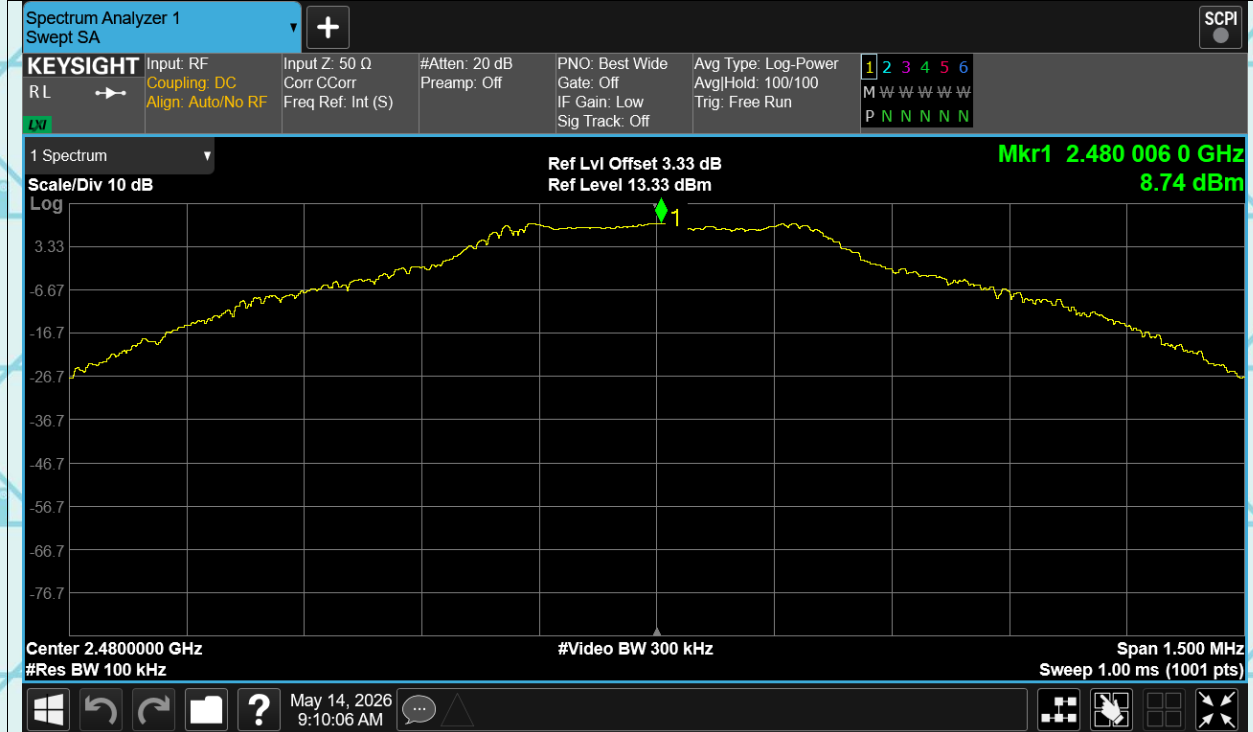


Tx. Spurious 1-DH5 2480MHz Emission

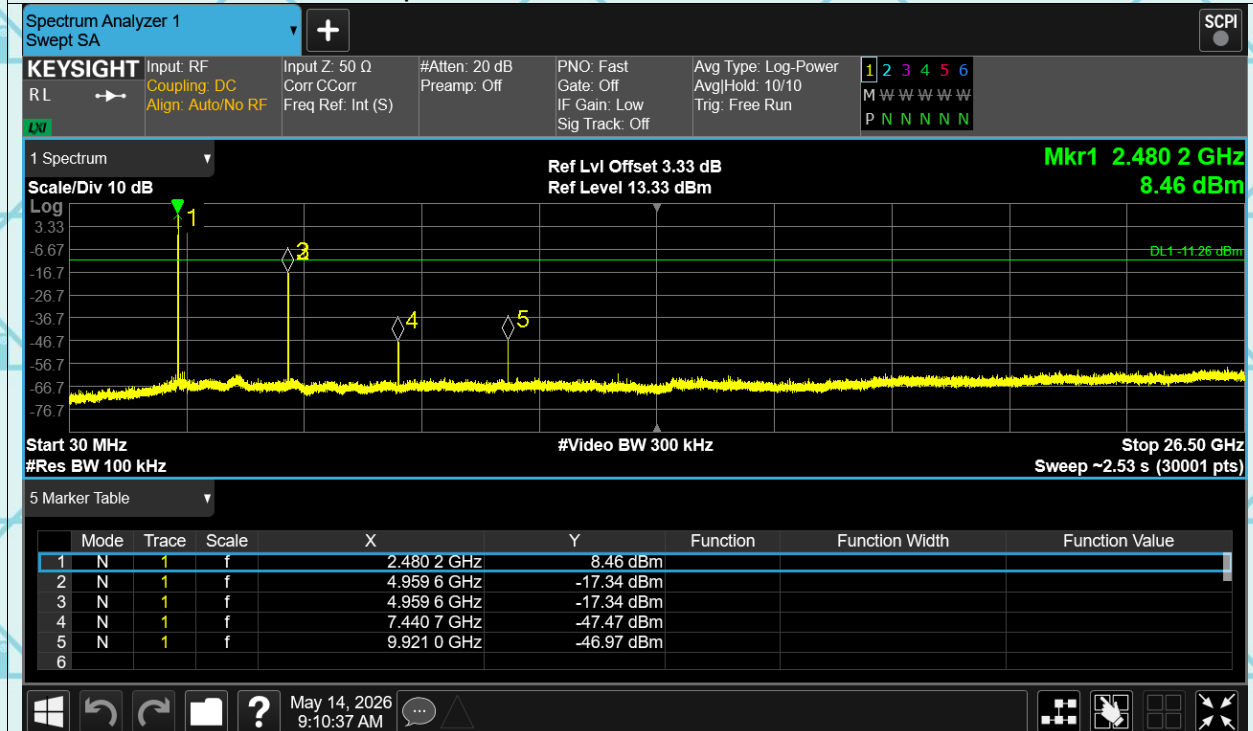


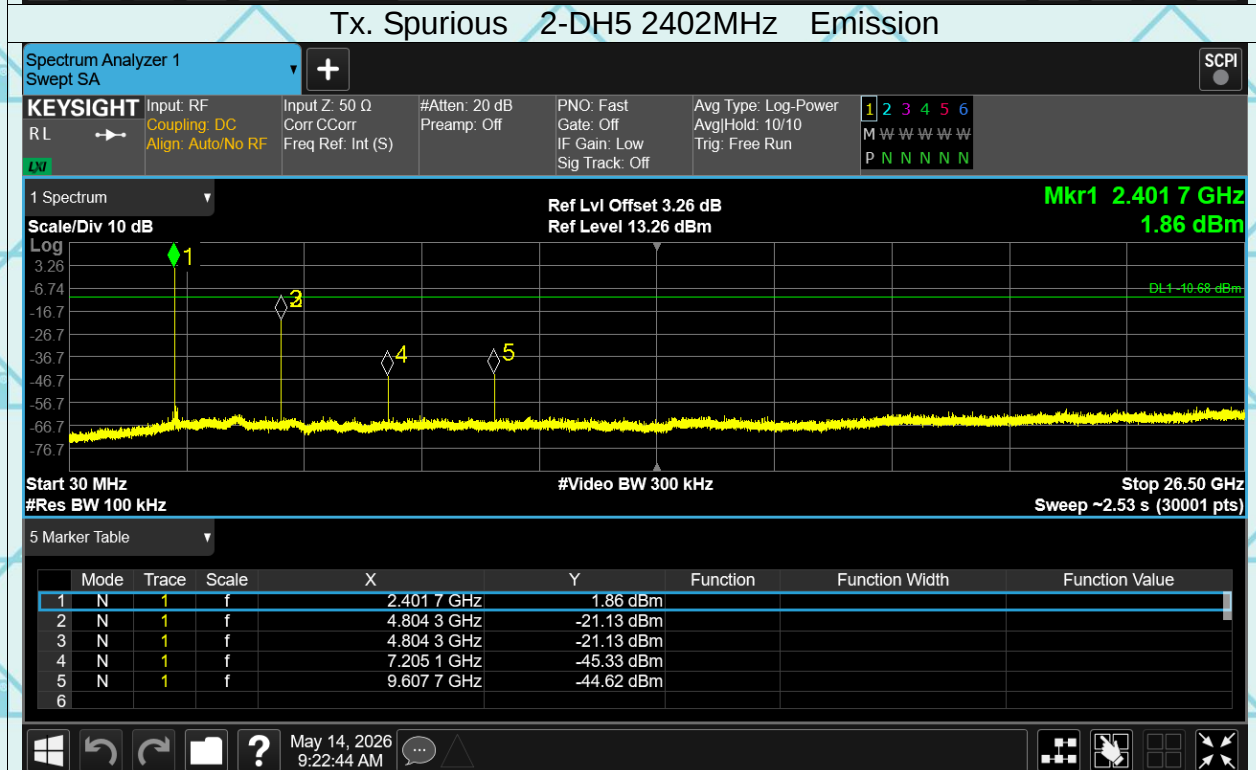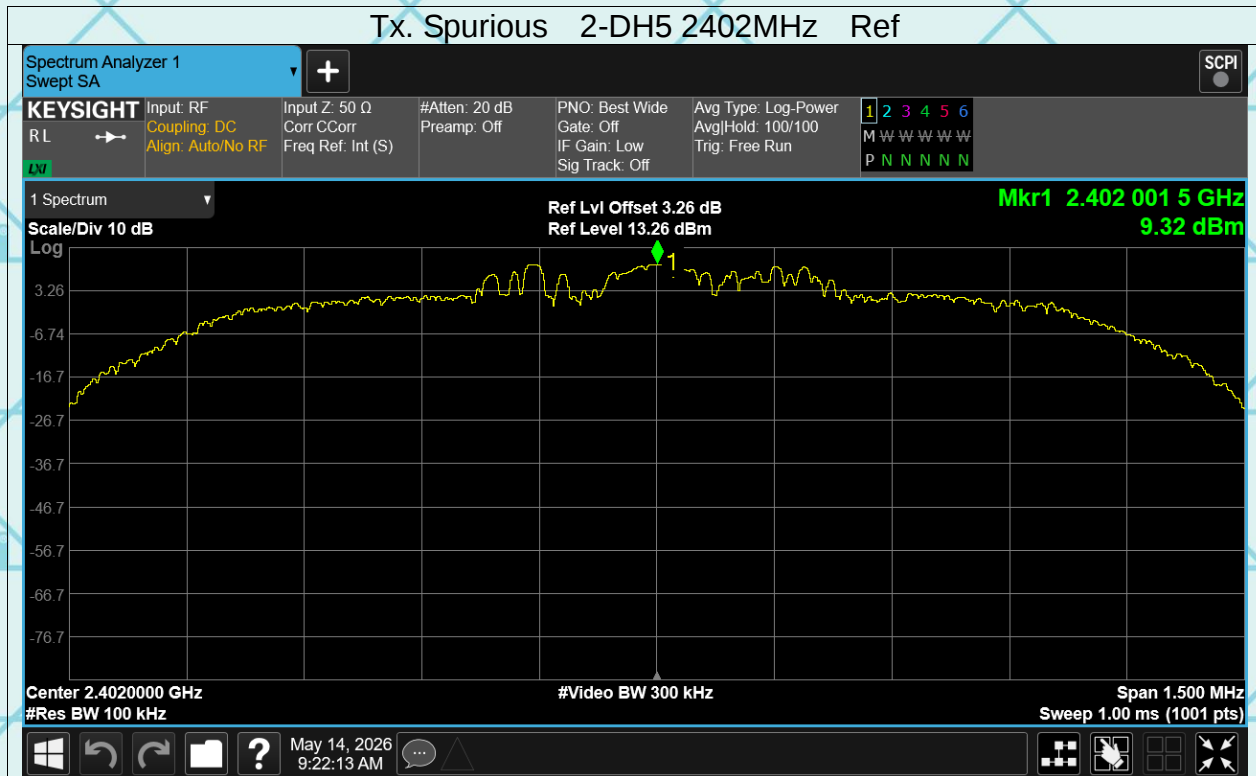


Tx. Spurious 2-DH5 2441MHz Ref

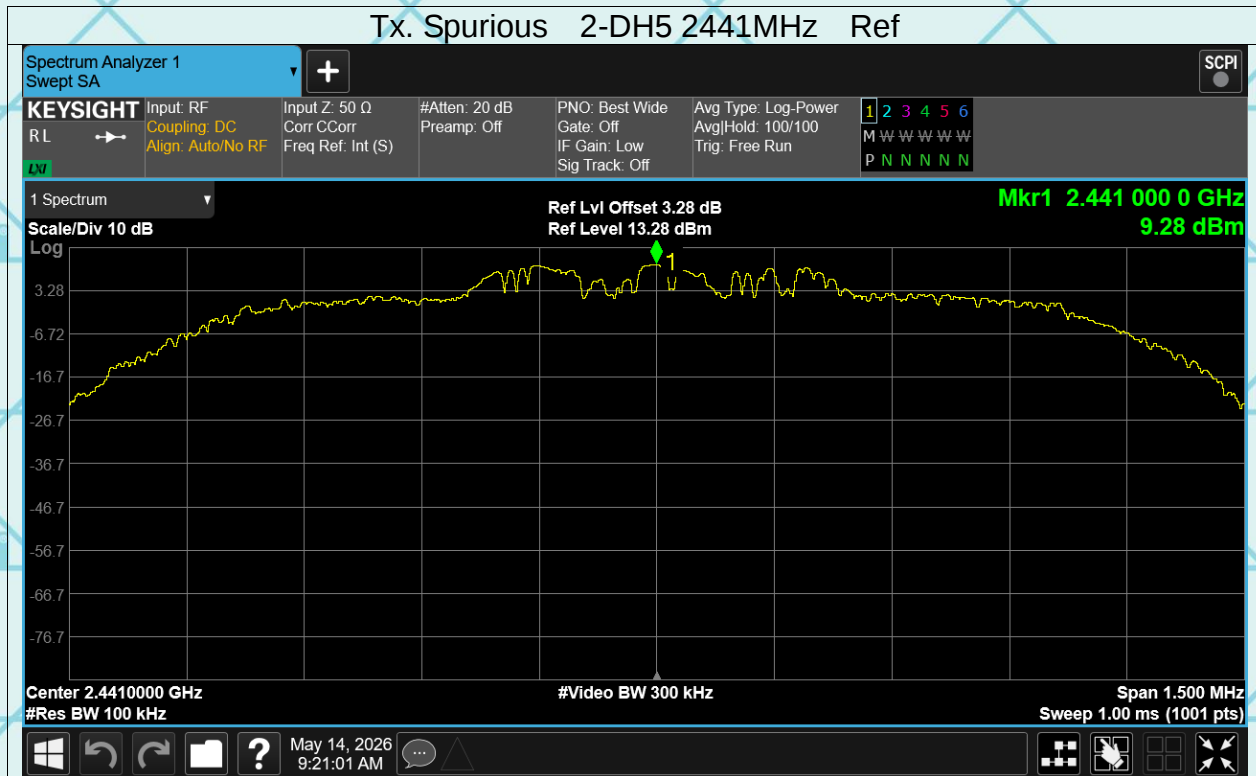


Tx. Spurious 2-DH5 2441MHz Emission

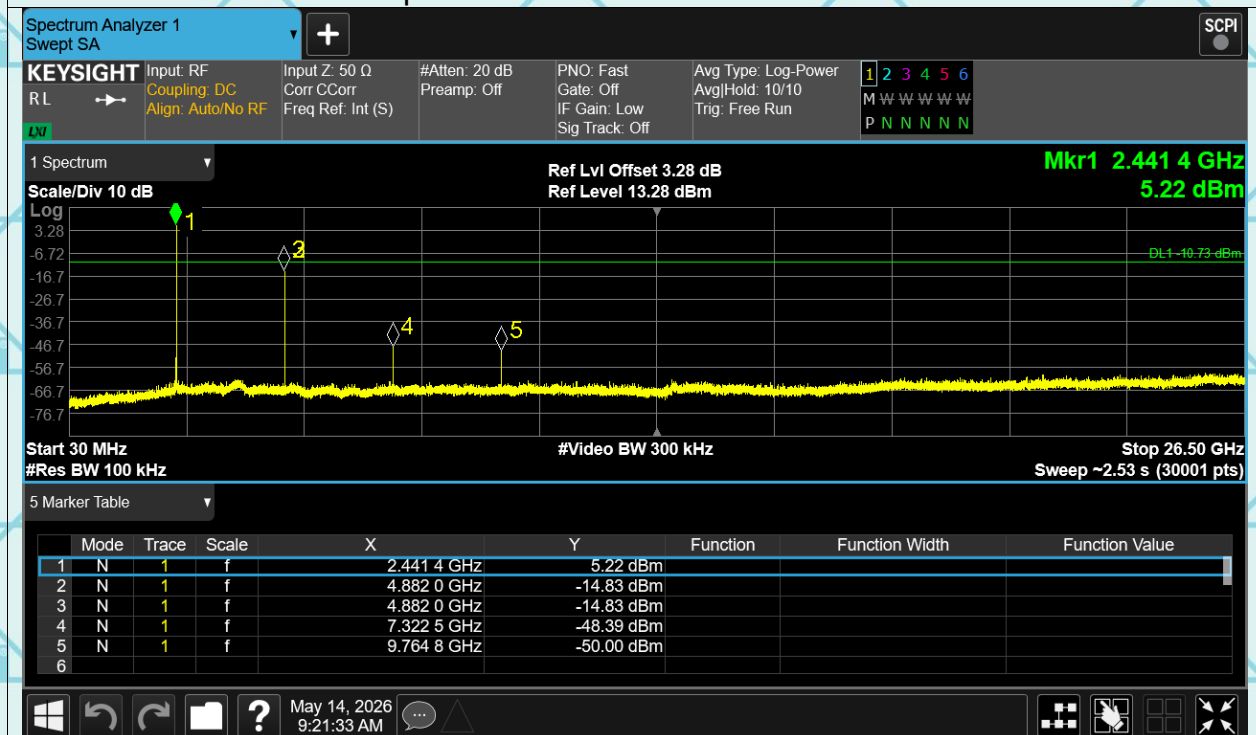


Tx. Spurious 2-DH5 2480MHz Ref

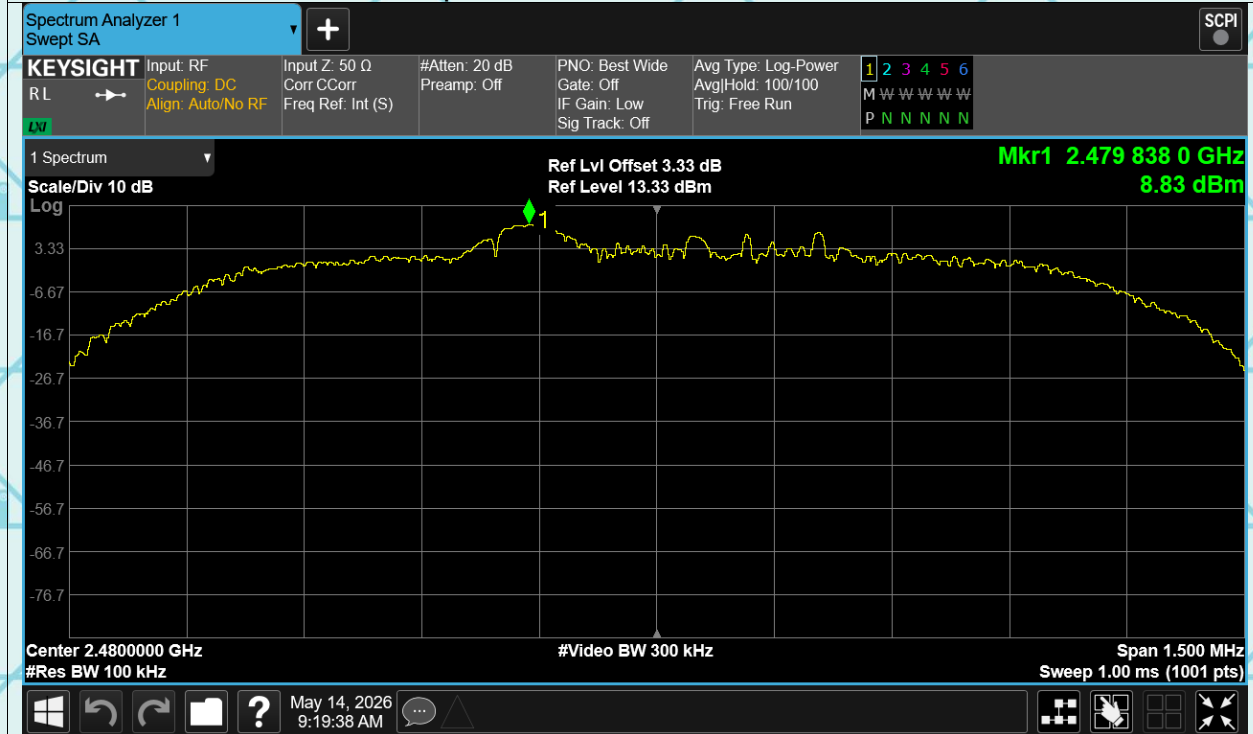


Tx. Spurious 2-DH5 2480MHz Emission

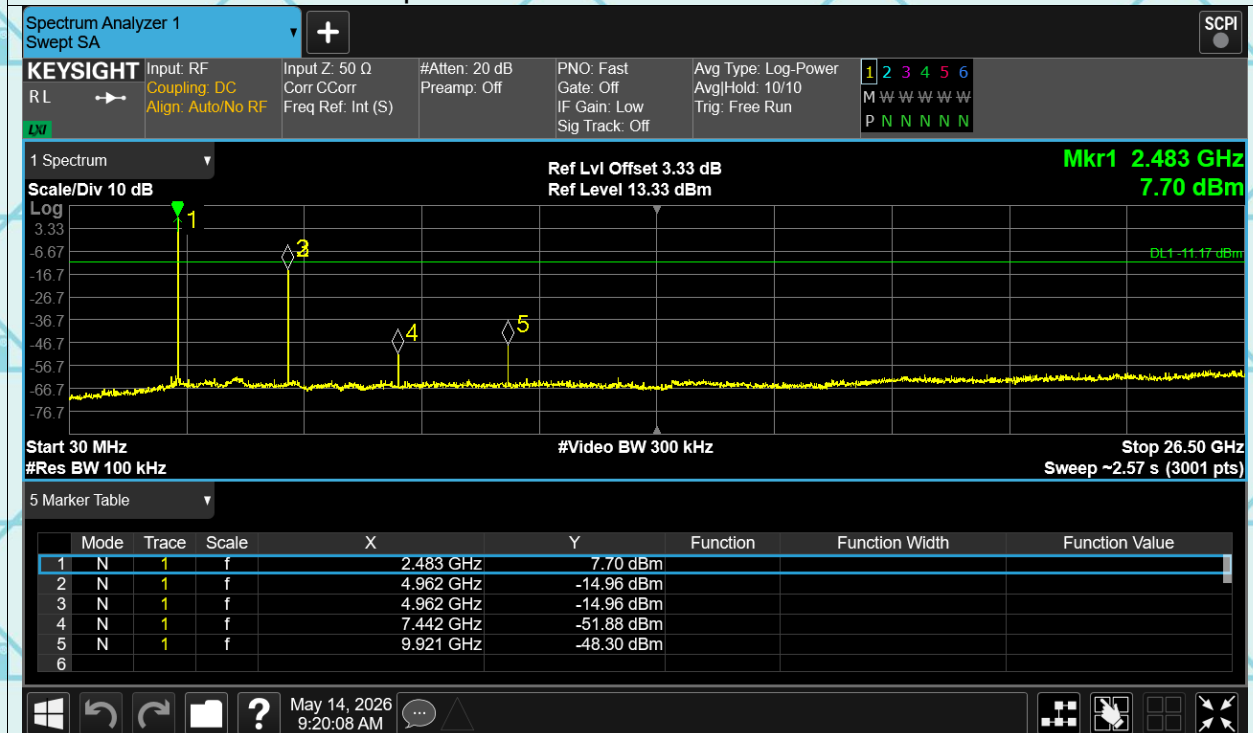


Tx. Spurious 3-DH5 2402MHz Ref

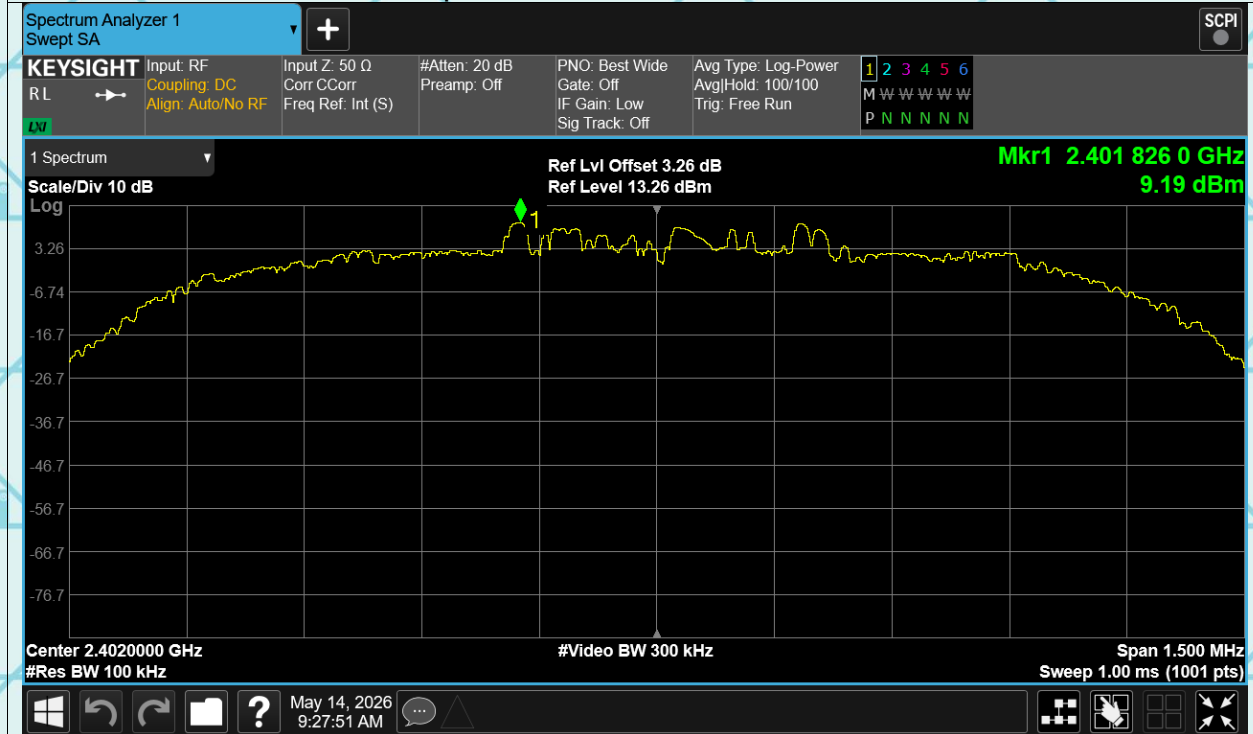


Tx. Spurious 3-DH5 2402MHz Emission

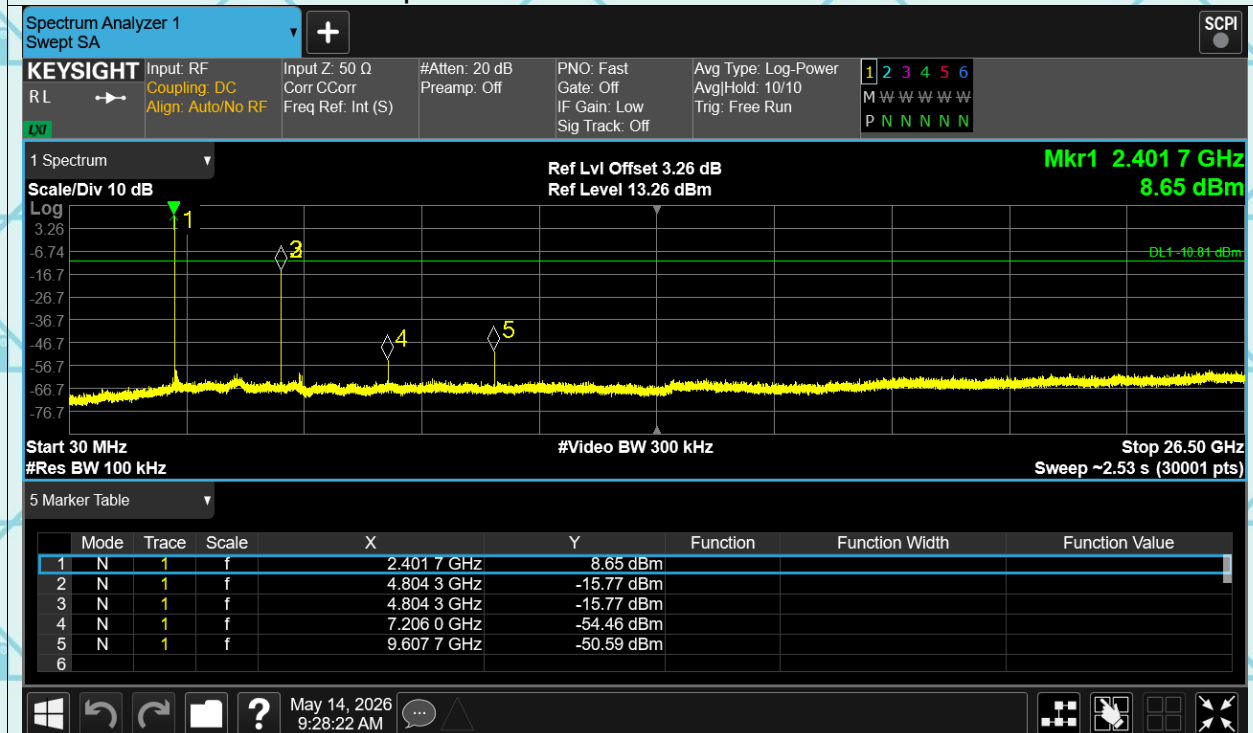


Tx. Spurious 3-DH5 2441MHz Ref

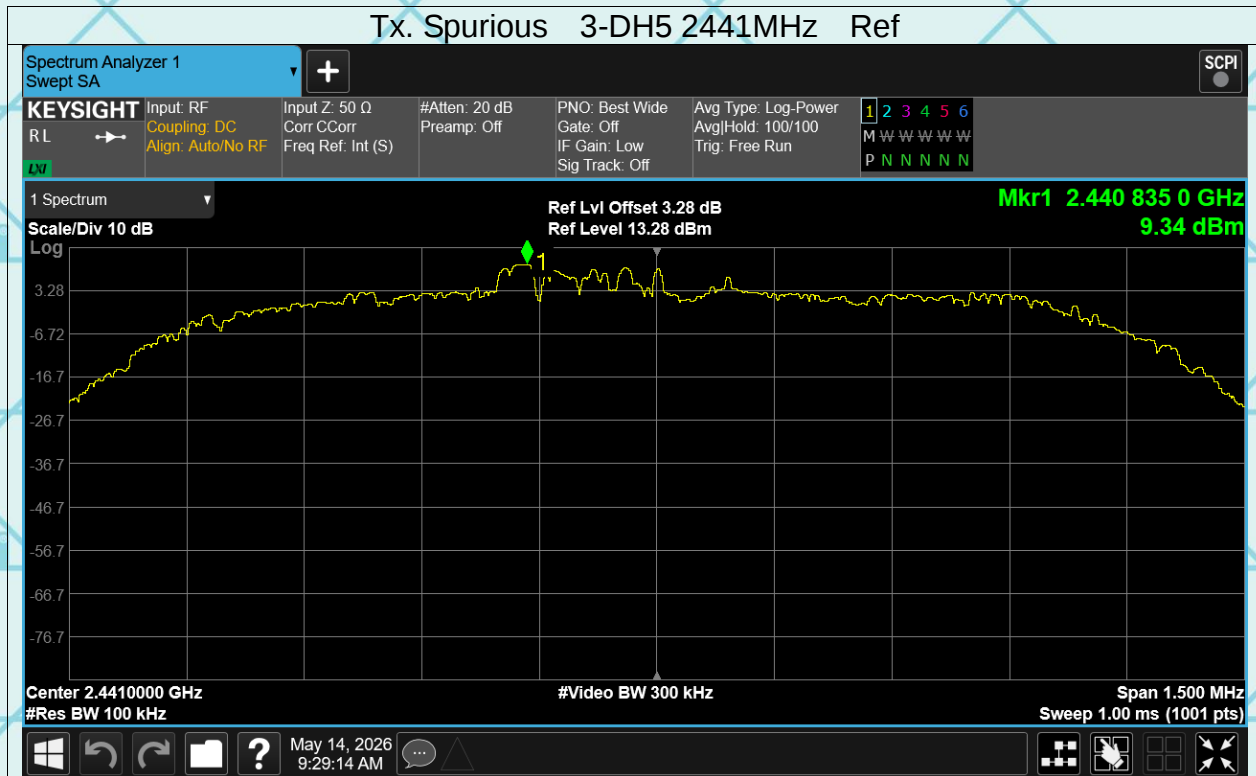


Tx. Spurious 3-DH5 2441MHz Emission

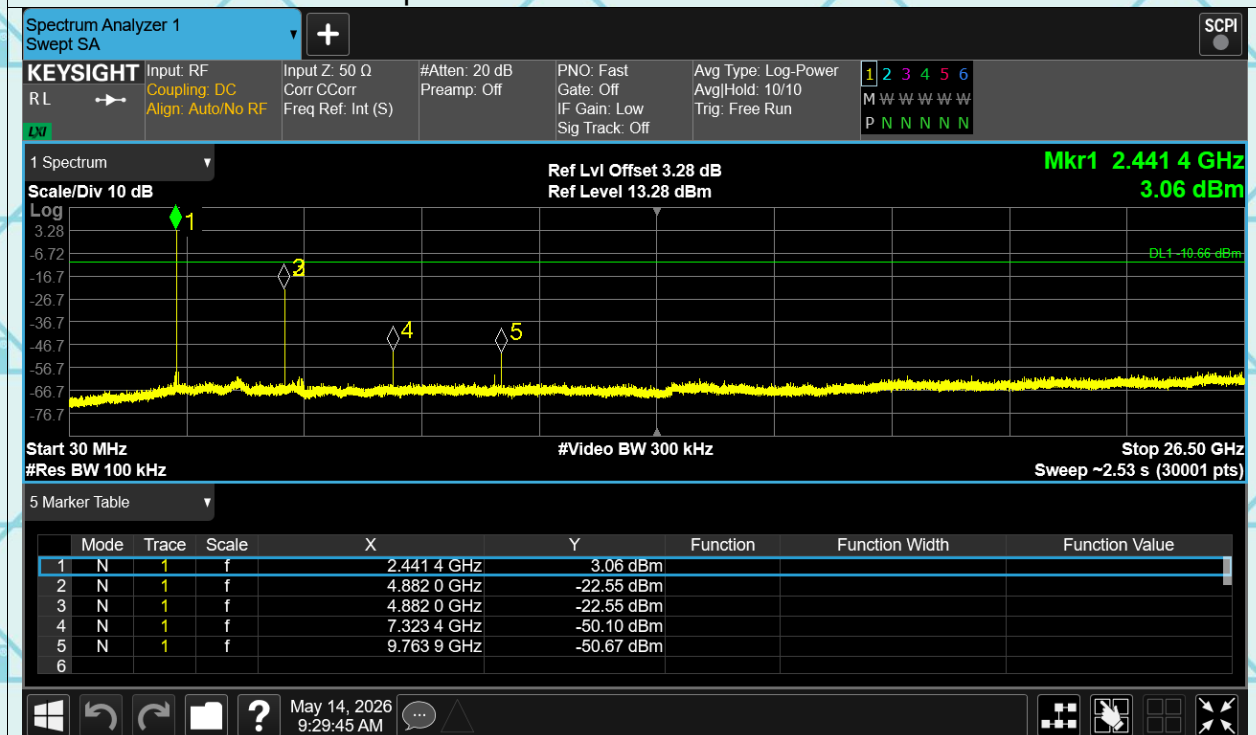

Tx. Spurious 3-DH5 2480MHz Ref

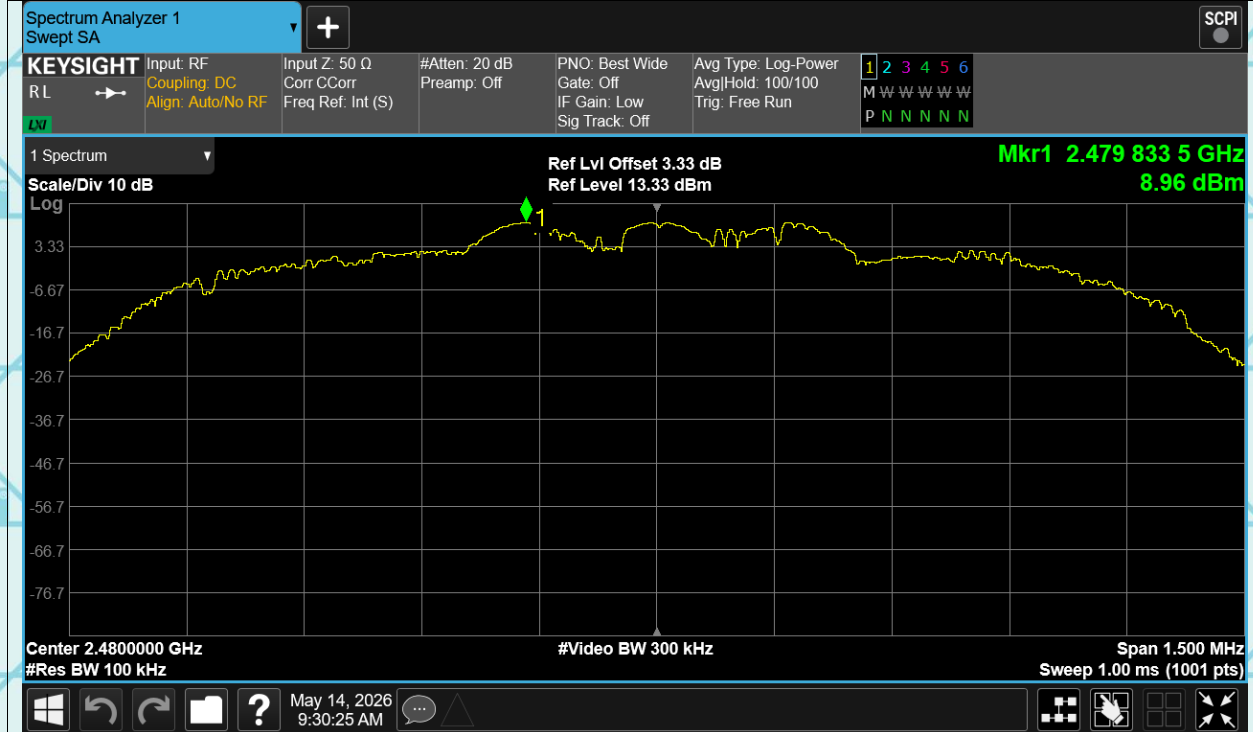




Tx. Spurious 3-DH5 2480MHz Emission

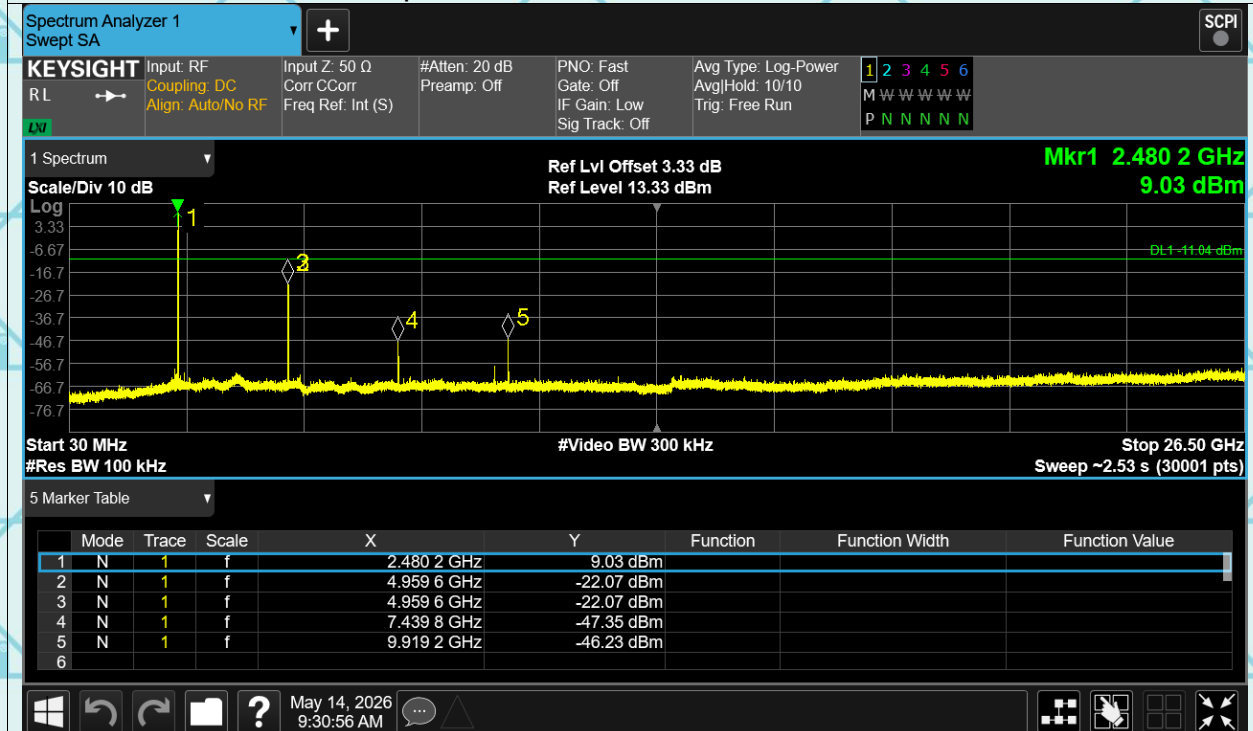

6.11. Radiated Spurious Emission Measurement

6.11.1. Test Specification

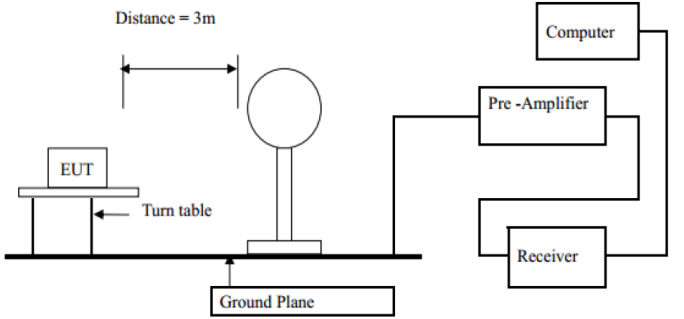Test Requirement:	FCC Part15 C Section 15.209			
Test Method:	ANSI C63.10:2020			
Frequency Range:	9 kHz to 25 GHz			
Measurement Distance:	3 m			
Antenna Polarization:	Horizontal & Vertical			
Receiver Setup:	Frequency	Detector	RBW	VBW
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz
	30MHz-1GHz	Quasi-peak	100KHz	300KHz
	Above 1GHz	Peak	1MHz	3MHz
Limit:	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Remark
	0.009-0.490	2400/F(KHz)	300	Quasi-peak Value
	0.490-1.705	24000/F(KHz)	30	Quasi-peak Value
	1.705-30	30	30	Quasi-peak Value
	30-88	100	3	Quasi-peak Value
Test setup:	88-216	150	3	Peak Value
	216-960	200	3	Peak Value
	Above 960	500	3	Average Value
	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector
	Above 1GHz	500	3	Average
		5000	3	Peak
	For radiated emissions below 30MHz			
				
	30MHz to 1GHz			

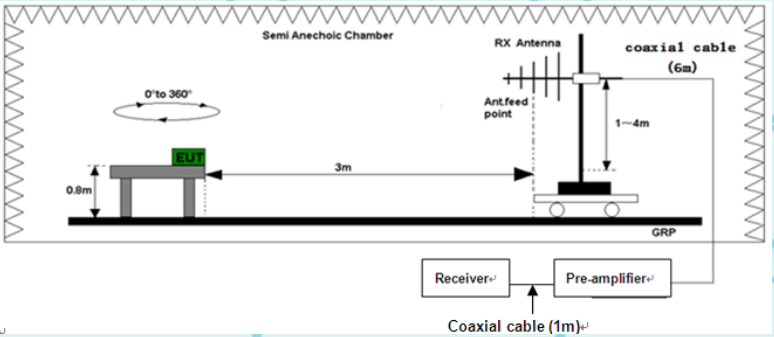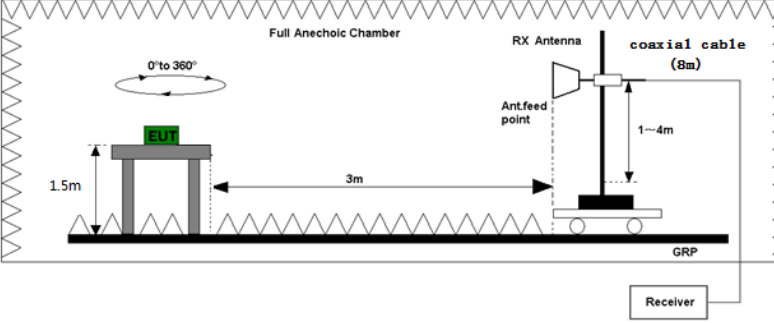	 Above 1GHz 
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10:2020 Measurement Guidelines. 2. For the radiated emission test below 1GHz: The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level. For the radiated emission test above 1GHz: Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which

	maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$GHz ; VBW$\geq$RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak (3) For average measurement: use duty cycle correction factor method per 15.35(c). Duty cycle = On time/100 milliseconds On time = $N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{n-1} \cdot L_{n-1} + N_n \cdot L_n$ Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc Average Emission Level = Peak Emission Level + $20 \cdot \log(\text{Duty cycle})$ Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
Test results:	PASS

Report No.: WSCT-ANAB-R&E260500036A -BT Issued 01 June 2026

Revised: None

6.11.2. Test Data

Please refer to following diagram for individual

Below 1GHz

The worst mode is GFSK

Horizontal:

80.0 dBuV/m




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		53.2800	30.02	-7.45	22.57	40.00	-17.43	QP
2		106.6300	32.77	-10.51	22.26	43.50	-21.24	QP
3		146.4000	26.79	-6.82	19.97	43.50	-23.53	QP
4		304.5100	28.55	-6.46	22.09	46.00	-23.91	QP
5		825.4000	25.64	5.32	30.96	46.00	-15.04	QP
6	*	916.5800	25.55	6.70	32.25	46.00	-13.75	QP

Report No.: WSCT-ANAB-R&E260500036A-BT Issued 01 June 2026

Revised: None

Vertical:

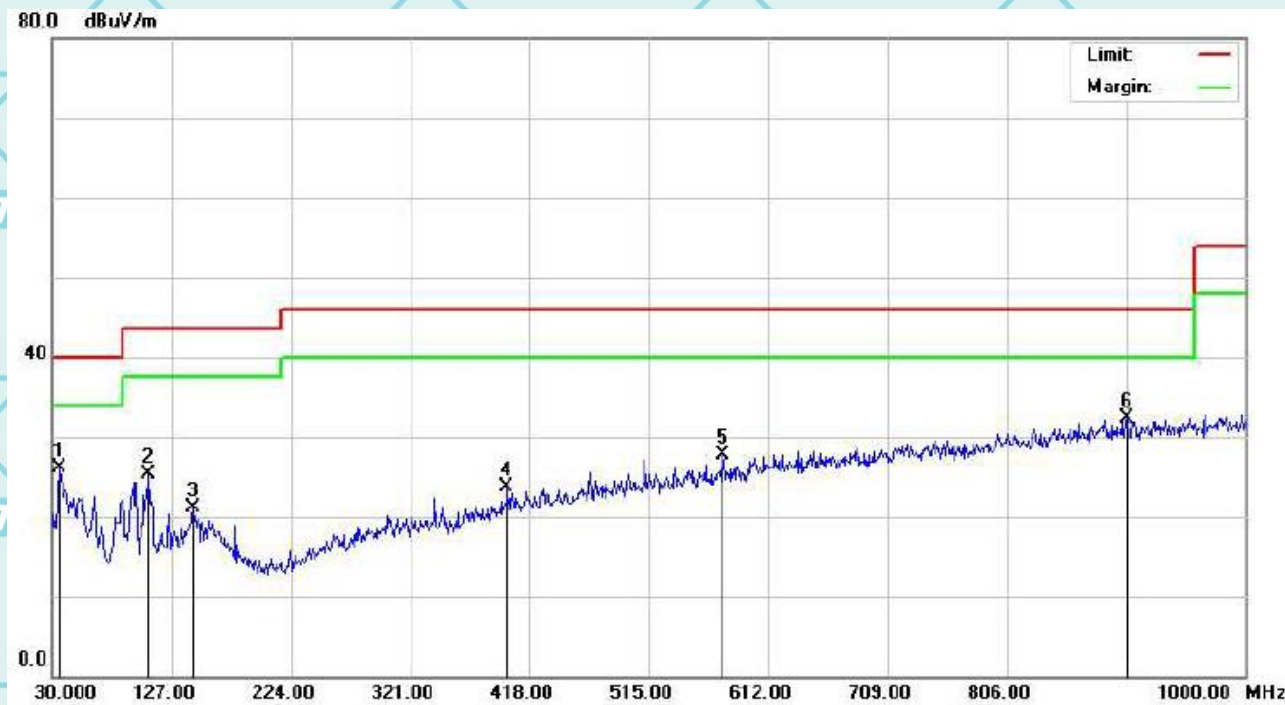

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		35.8200	46.58	-20.53	26.05	40.00	-13.95	QP
2		108.5700	45.53	-20.16	25.37	43.50	-18.13	QP
3		144.4600	41.08	-19.97	21.11	43.50	-22.39	QP
4		399.5700	42.41	-18.77	23.64	46.00	-22.36	QP
5		575.1400	45.58	-17.86	27.72	46.00	-18.28	QP
6	*	903.0000	48.19	-15.94	32.25	46.00	-13.75	QP

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) - Limits (dBuV)

Above 1GHz


Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

The worst mode is GFSK

Low channel: 2402MHz

Horizontal:

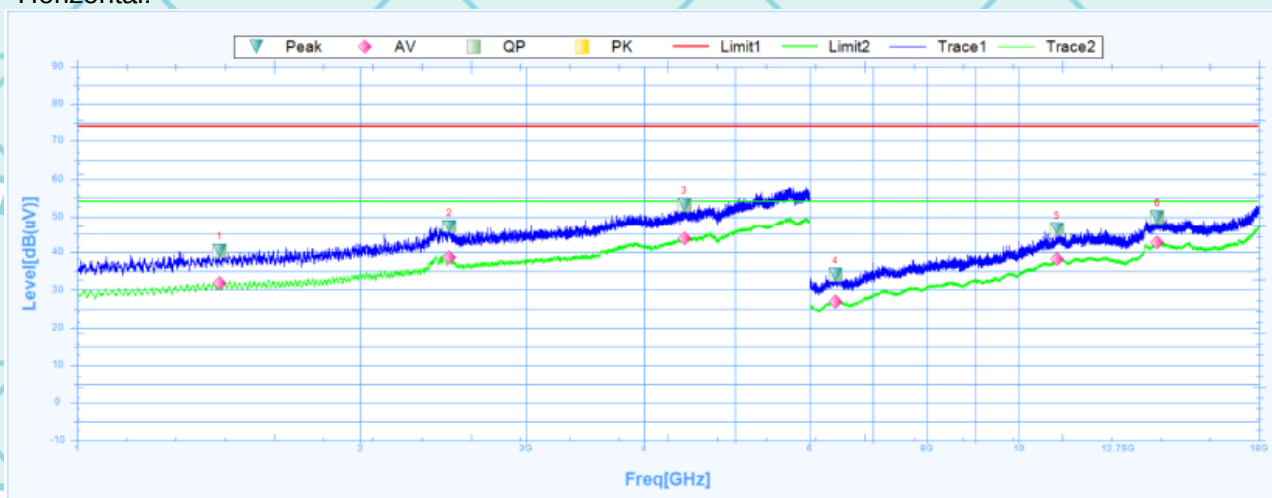


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1416.8750	40.35	25.08	15.27	74	-33.65	47.2	Horizontal	PK	Pass
1	1416.8750	31.82	25.08	6.74	54	-22.18	47.2	Horizontal	AV	Pass
2	2486.2500	47.15	27.55	19.6	74	-26.85	63.9	Horizontal	PK	Pass
2	2486.2500	38.68	27.55	11.13	54	-15.32	63.9	Horizontal	AV	Pass
3	4416.2500	53.09	30.45	22.64	74	-20.91	114.2	Horizontal	PK	Pass
3	4416.2500	43.65	30.45	13.2	54	-10.35	114.2	Horizontal	AV	Pass
4	6390.0000	34.04	4.54	29.5	74	-39.96	47.5	Horizontal	PK	Pass
4	6390.0000	26.98	4.54	22.44	54	-27.02	47.5	Horizontal	AV	Pass
5	10984.5000	46.51	15.53	30.98	74	-27.49	358.6	Horizontal	PK	Pass
5	10984.5000	38.12	15.53	22.59	54	-15.88	358.6	Horizontal	AV	Pass
6	14041.5000	49.85	19.09	30.76	74	-24.15	277	Horizontal	PK	Pass
6	14041.5000	42.52	19.09	23.43	54	-11.48	277	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260500036A -BT Issued 01 June 2026
Vertical:

Revised: None

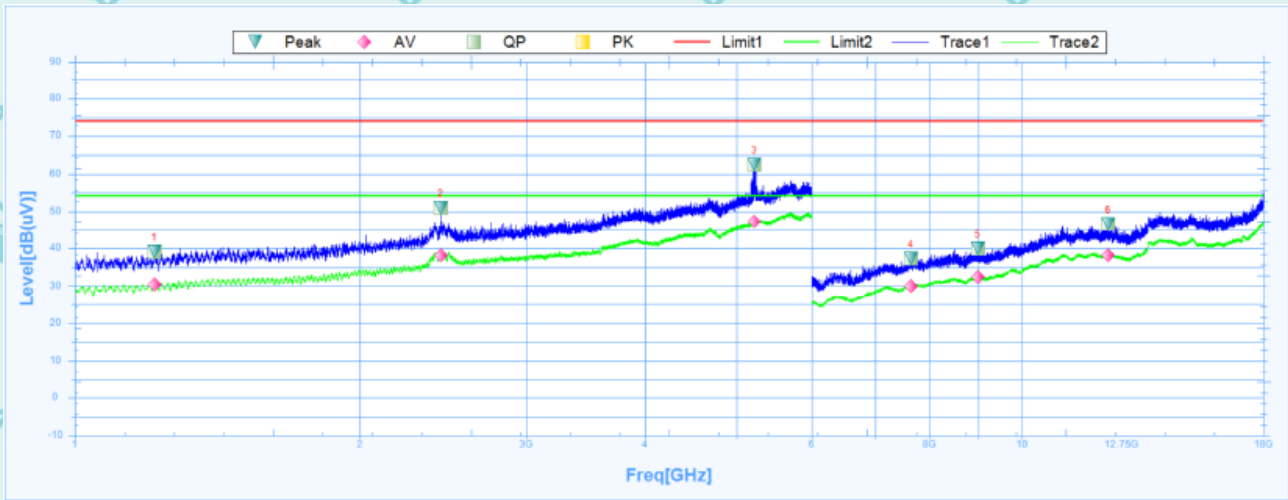

Susputed Data List


NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1213.1250	39.09	24.45	14.64	74	-34.91	73.3	Vertical	PK	Pass
1	1213.1250	30.53	24.45	6.08	54	-23.47	73.3	Vertical	AV	Pass
2	2435.0000	51.02	27.38	23.64	74	-22.98	36.2	Vertical	PK	Pass
2	2435.0000	38.14	27.38	10.76	54	-15.86	36.2	Vertical	AV	Pass
3	5222.5000	62.47	31.78	30.69	74	-11.53	157	Vertical	PK	Pass
3	5222.5000	47.26	31.78	15.48	54	-6.74	157	Vertical	AV	Pass
4	7636.5000	37.19	7.95	29.24	74	-36.81	347.2	Vertical	PK	Pass
4	7636.5000	30.04	7.95	22.09	54	-23.96	347.2	Vertical	AV	Pass
5	8983.5000	39.95	9.83	30.12	74	-34.05	30.7	Vertical	PK	Pass
5	8983.5000	32.4	9.83	22.57	54	-21.6	30.7	Vertical	AV	Pass
6	12337.5000	46.57	16.47	30.1	74	-27.43	271	Vertical	PK	Pass
6	12337.5000	38.2	16.47	21.73	54	-15.8	271	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260500036A -BT Issued 01 June 2026

Revised: None

Middle channel: 2440MHz

Horizontal:

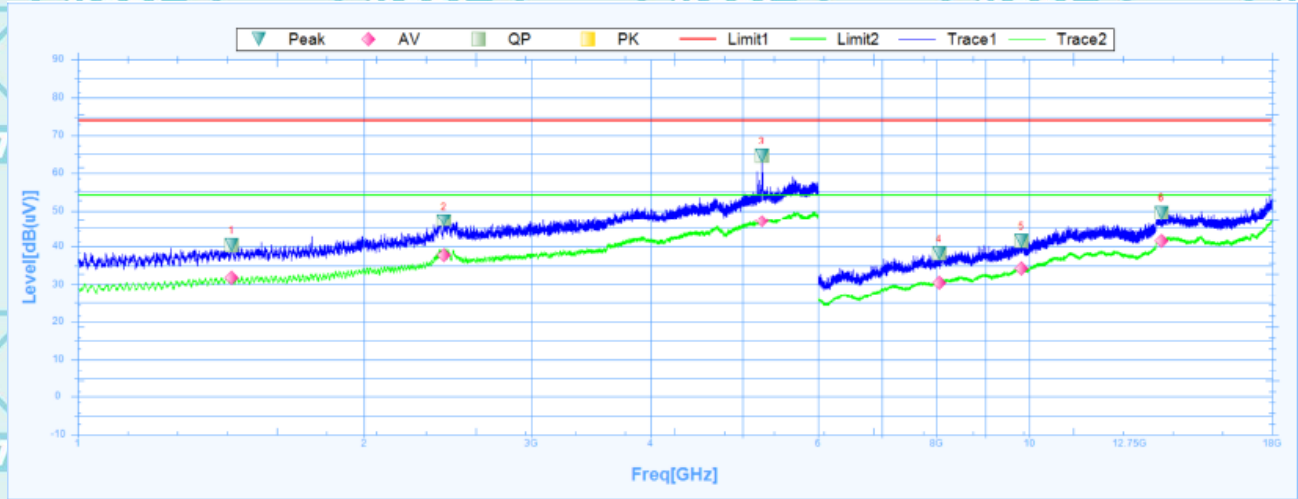


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1450.6250	40.38	25.05	15.33	74	-33.62	35.2	Horizontal	PK	Pass
1	1450.6250	31.76	25.05	6.71	54	-22.24	35.2	Horizontal	AV	Pass
2	2426.2500	47.22	27.35	19.87	74	-26.78	28.1	Horizontal	PK	Pass
2	2426.2500	37.78	27.35	10.43	54	-16.22	28.1	Horizontal	AV	Pass
3	5237.5000	64.56	31.79	32.77	74	-9.44	2.2	Horizontal	PK	Pass
3	5237.5000	46.92	31.79	15.13	54	-7.08	2.2	Horizontal	AV	Pass
4	8043.0000	38.26	8.36	29.9	74	-35.74	88.2	Horizontal	PK	Pass
4	8043.0000	30.52	8.36	22.16	54	-23.48	88.2	Horizontal	AV	Pass
5	9817.5000	41.43	11.94	29.49	74	-32.57	342.6	Horizontal	PK	Pass
5	9817.5000	34.23	11.94	22.29	54	-19.77	342.6	Horizontal	AV	Pass
6	13767.0000	49.53	18.45	31.08	74	-24.47	348.5	Horizontal	PK	Pass
6	13767.0000	41.47	18.45	23.02	54	-12.53	348.5	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260500036A -BT Issued 01 June 2026

Revised: None

Vertical:

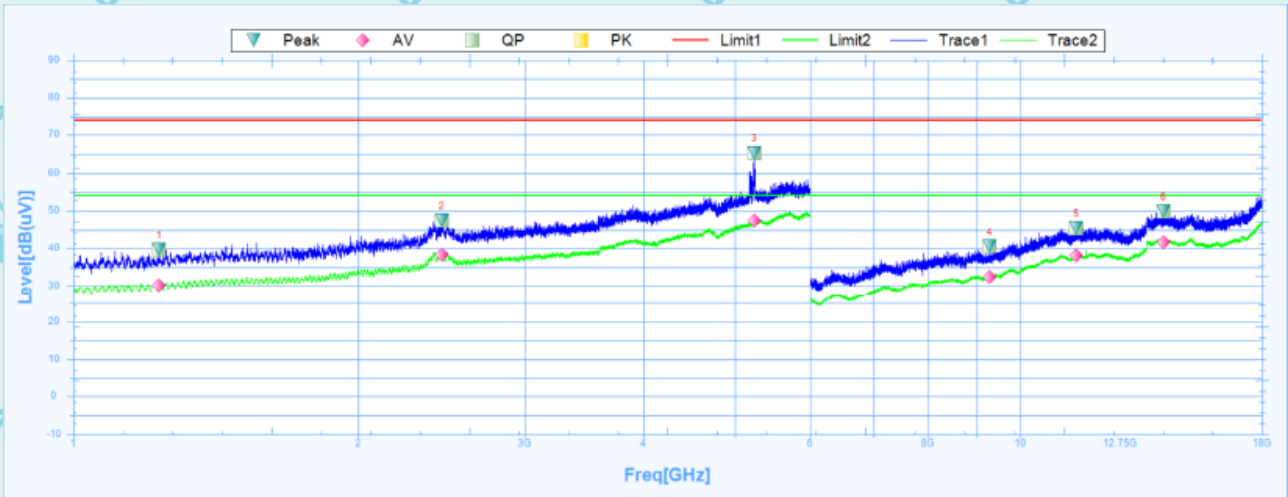

Susputed Data List


NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1232.5000	39.71	24.51	15.2	74	-34.29	251.6	Vertical	PK	Pass
1	1232.5000	30.24	24.51	5.73	54	-23.76	251.6	Vertical	AV	Pass
2	2450.0000	47.53	27.43	20.1	74	-26.47	0.6	Vertical	PK	Pass
2	2450.0000	38.39	27.43	10.96	54	-15.61	0.6	Vertical	AV	Pass
3	5241.8750	65.34	31.79	33.55	74	-8.66	349.2	Vertical	PK	Pass
3	5241.8750	47.47	31.79	15.68	54	-6.53	349.2	Vertical	AV	Pass
4	9285.0000	40.52	10.33	30.19	74	-33.48	359.5	Vertical	PK	Pass
4	9285.0000	32.34	10.33	22.01	54	-21.66	359.5	Vertical	AV	Pass
5	11466.0000	45.5	16.03	29.47	74	-28.5	359.1	Vertical	PK	Pass
5	11466.0000	38.18	16.03	22.15	54	-15.82	359.1	Vertical	AV	Pass
6	14172.0000	49.96	18.96	31	74	-24.04	28.4	Vertical	PK	Pass
6	14172.0000	41.74	18.96	22.78	54	-12.26	28.4	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260500036A -BT Issued 01 June 2026

Revised: None

High channel: 2480MHz

Horizontal:

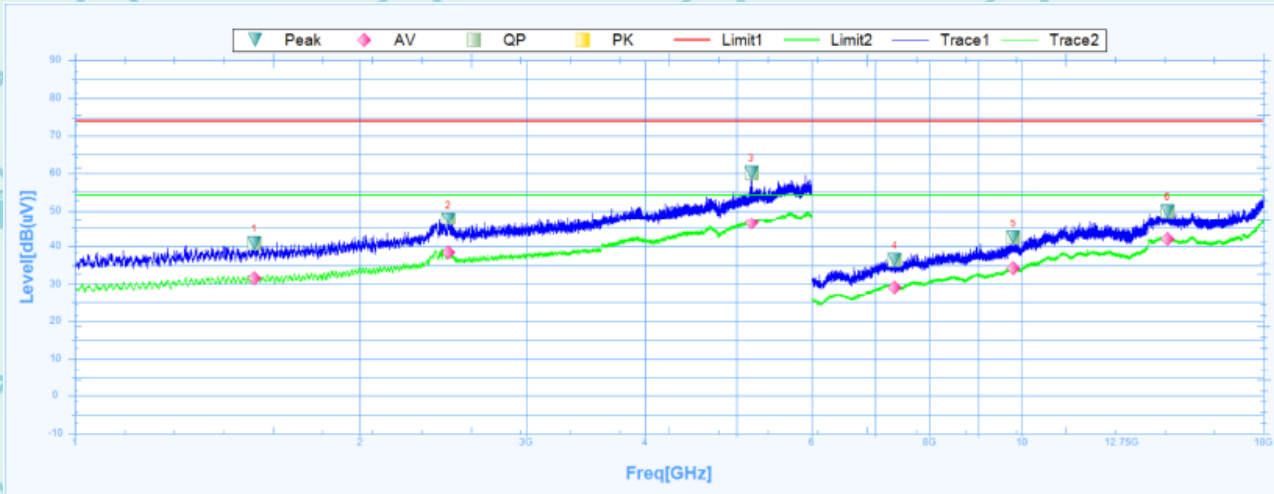


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1547.5000	40.82	24.95	15.87	74	-33.18	45.9	Horizontal	PK	Pass
1	1547.5000	31.61	24.95	6.66	54	-22.39	45.9	Horizontal	AV	Pass
2	2480.0000	47.74	27.53	20.21	74	-26.26	300.6	Horizontal	PK	Pass
2	2480.0000	38.37	27.53	10.84	54	-15.63	300.6	Horizontal	AV	Pass
3	5183.7500	59.96	31.75	28.21	74	-14.04	22.2	Horizontal	PK	Pass
3	5183.7500	46.4	31.75	14.65	54	-7.6	22.2	Horizontal	AV	Pass
4	7345.5000	36.4	6.96	29.44	74	-37.6	-0.1	Horizontal	PK	Pass
4	7345.5000	29.17	6.96	22.21	54	-24.83	-0.1	Horizontal	AV	Pass
5	9804.0000	42.37	11.9	30.47	74	-31.63	357.4	Horizontal	PK	Pass
5	9804.0000	34.17	11.9	22.27	54	-19.83	357.4	Horizontal	AV	Pass
6	14245.5000	49.81	18.87	30.94	74	-24.19	358.7	Horizontal	PK	Pass
6	14245.5000	41.95	18.87	23.08	54	-12.05	358.7	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260500036A -BT Issued 01 June 2026

Revised: None

Vertical:

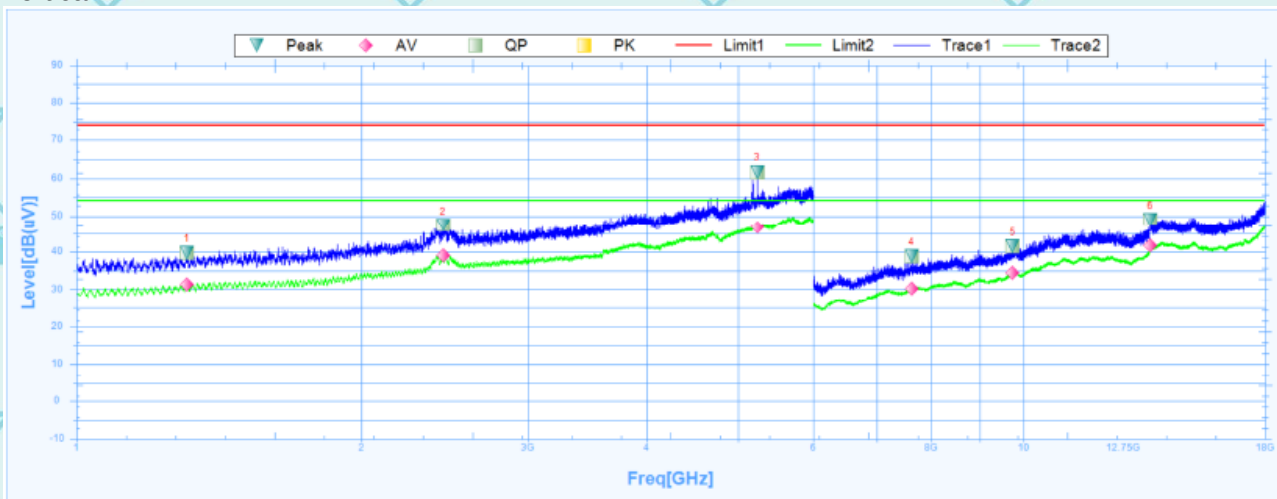

Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1307.5000	39.8	24.78	15.02	74	-34.2	360	Vertical	PK	Pass
1	1307.5000	31.25	24.78	6.47	54	-22.75	360	Vertical	AV	Pass
2	2438.1250	47.45	27.39	20.06	74	-26.55	322.1	Vertical	PK	Pass
2	2438.1250	39.08	27.39	11.69	54	-14.92	322.1	Vertical	AV	Pass
3	5236.8750	61.69	31.79	29.9	74	-12.31	175	Vertical	PK	Pass
3	5236.8750	46.82	31.79	15.03	54	-7.18	175	Vertical	AV	Pass
4	7620.0000	38.8	7.95	30.85	74	-35.2	207.7	Vertical	PK	Pass
4	7620.0000	30.25	7.95	22.3	54	-23.75	207.7	Vertical	AV	Pass
5	9747.0000	41.55	11.75	29.8	74	-32.45	150.3	Vertical	PK	Pass
5	9747.0000	34.32	11.75	22.57	54	-19.68	150.3	Vertical	AV	Pass
6	13615.5000	48.98	18.01	30.97	74	-25.02	2.4	Vertical	PK	Pass
6	13615.5000	41.71	18.01	23.7	54	-12.29	2.4	Vertical	AV	Pass

Note:

- The emission levels of other frequencies are very lower than the limit and not show in test report.
- Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Data of measurement shown "---" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
- Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (GFSK) was submitted only.


6.11.3. Restricted Bands Requirements

Bluetooth (GFSK, Pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result 8DPSK model was report as below

8DPSK


Low channel

Horizontal:

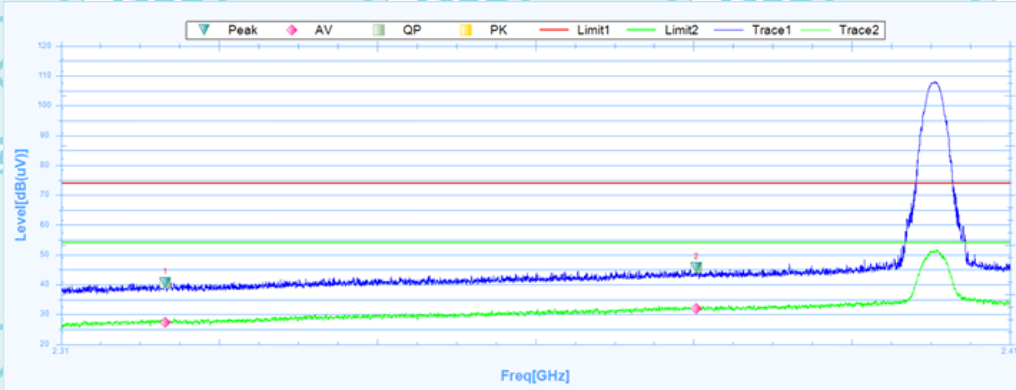

Suspected Data List											
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict	
1	2320.9875	40.64	13.47	27.17	74	-33.36	133.6	Horizontal	PK	Pass	
1	2320.9875	27.21	13.47	13.74	54	-26.79	133.6	Horizontal	AV	Pass	
2	2376.9875	45.7	17.75	27.95	74	-28.3	278.2	Horizontal	PK	Pass	
2	2376.9875	31.84	17.75	14.09	54	-22.16	278.2	Horizontal	AV	Pass	

Vertical:

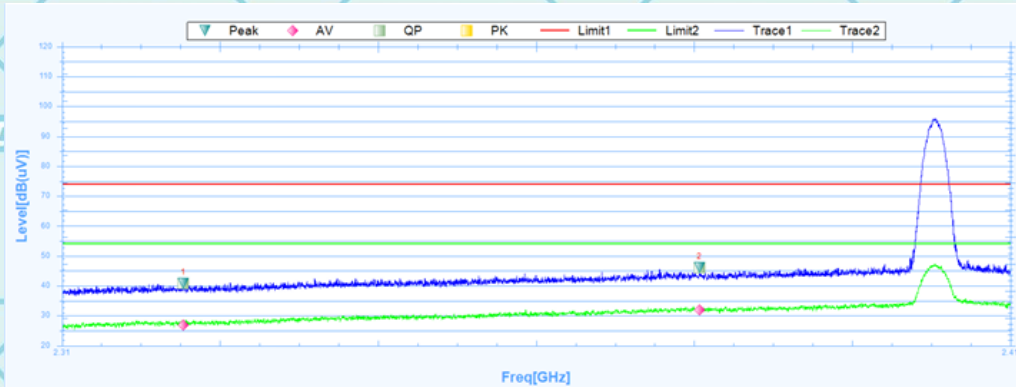


Suspected Data List											
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict	
1	2322.7875	40.76	13.61	27.15	74	-33.24	360.1	Vertical	PK	Pass	
1	2322.7875	26.81	13.61	13.2	54	-27.19	360.1	Vertical	AV	Pass	
2	2377.2250	46.05	17.77	28.28	74	-27.95	1.7	Vertical	PK	Pass	
2	2377.2250	32.02	17.77	14.25	54	-21.98	1.7	Vertical	AV	Pass	

Report No.: WSCT-ANAB-R&E260500036A -BT Issued 01 June 2026


Revised: None

High channel
Horizontal:

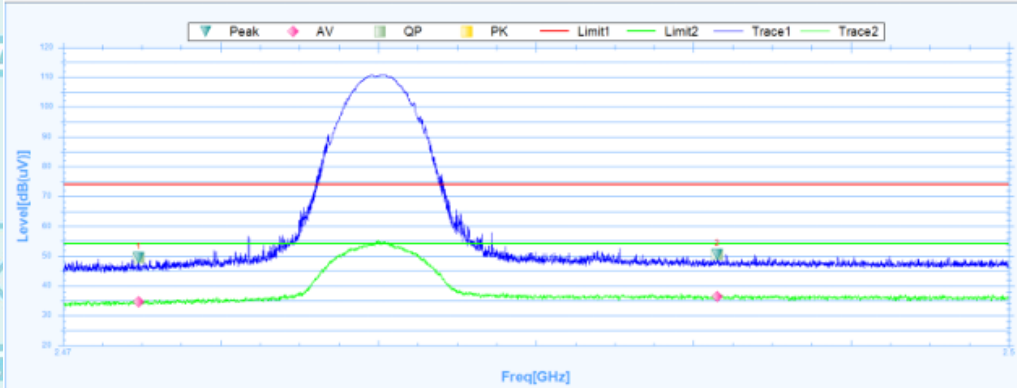

Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2472.3925	49.45	19.42	30.03	74	-24.55	95.3	Horizontal	PK	Pass
1	2472.3925	34.57	19.42	15.15	54	-19.43	95.3	Horizontal	AV	Pass
2	2490.7600	50.43	21.46	28.97	74	-23.57	100.1	Horizontal	PK	Pass
2	2490.7600	36.45	21.46	14.99	54	-17.55	100.1	Horizontal	AV	Pass

Vertical:

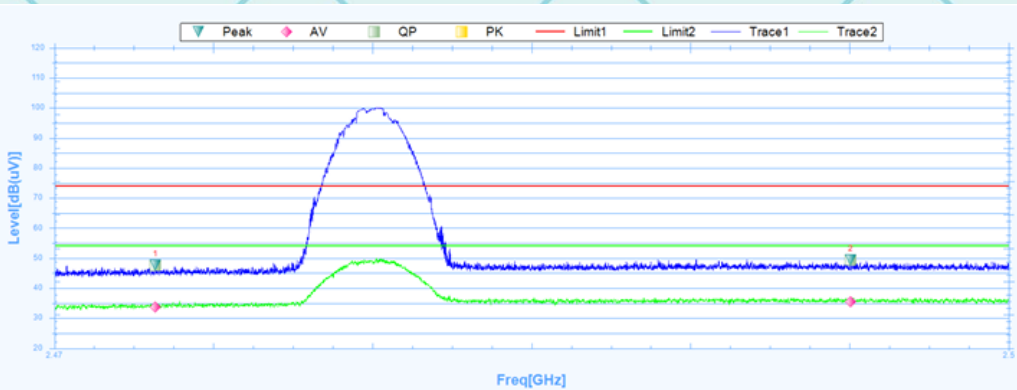

Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2473.1762	47.58	19.47	28.11	74	-26.42	191.8	Vertical	PK	Pass
1	2473.1762	33.76	19.47	14.29	54	-20.24	191.8	Vertical	AV	Pass
2	2495.0388	49.32	21.48	27.84	74	-24.68	360.1	Vertical	PK	Pass
2	2495.0388	35.54	21.48	14.06	54	-18.46	360.1	Vertical	AV	Pass

Note: Freq. = Emission frequency in MHz
 Reading level (dBμV) = Receiver reading
 Corr. Factor (dB) = Attenuation factor + Cable loss
 Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)
 Limit (dBμV) = Limit stated in standard
 Margin (dB) = Level (dBμV) - Limits (dBμV)

*****END OF REPORT*****