


Report No.: WSCT-ANAB-R&E251100087A -BT Issued 18 November 2025

Revised: None

Vertical:

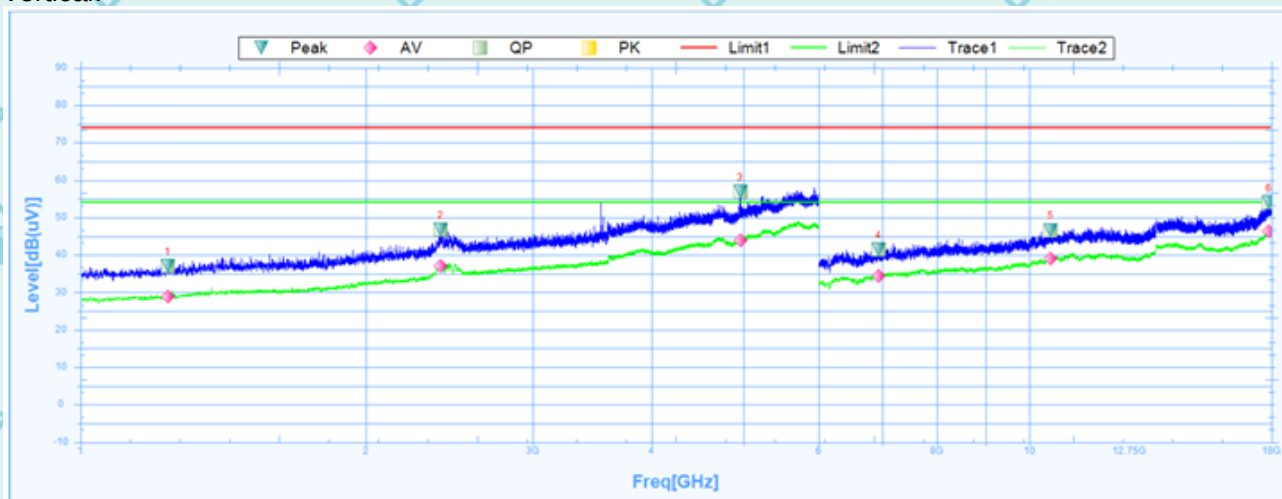

Suspected Data List


NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1235.6250	36.99	24.52	12.47	74	-37.01	186.2	Vertical	PK	Pass
1	1235.6250	28.97	24.52	4.45	54	-25.03	186.2	Vertical	AV	Pass
2	2398.7500	46.79	27.26	19.53	74	-27.21	94.2	Vertical	PK	Pass
2	2398.7500	37.04	27.26	9.78	54	-16.96	94.2	Vertical	AV	Pass
3	4959.3750	56.93	31.52	25.41	74	-17.07	150.4	Vertical	PK	Pass
3	4959.3750	44.01	31.52	12.49	54	-9.99	150.4	Vertical	AV	Pass
4	6937.5000	41.5	6.15	35.35	74	-32.5	147.5	Vertical	PK	Pass
4	6937.5000	34.44	6.15	28.29	54	-19.56	147.5	Vertical	AV	Pass
5	10534.5000	46.66	14.07	32.59	74	-27.34	135.5	Vertical	PK	Pass
5	10534.5000	39.09	14.07	25.02	54	-14.91	135.5	Vertical	AV	Pass
6	17890.5000	53.97	23.2	30.77	74	-20.03	351.1	Vertical	PK	Pass
6	17890.5000	46.29	23.2	23.09	54	-7.71	351.1	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E251100087A -BT Issued 18 November 2025

Revised: None

High channel: 2480MHz

Horizontal:

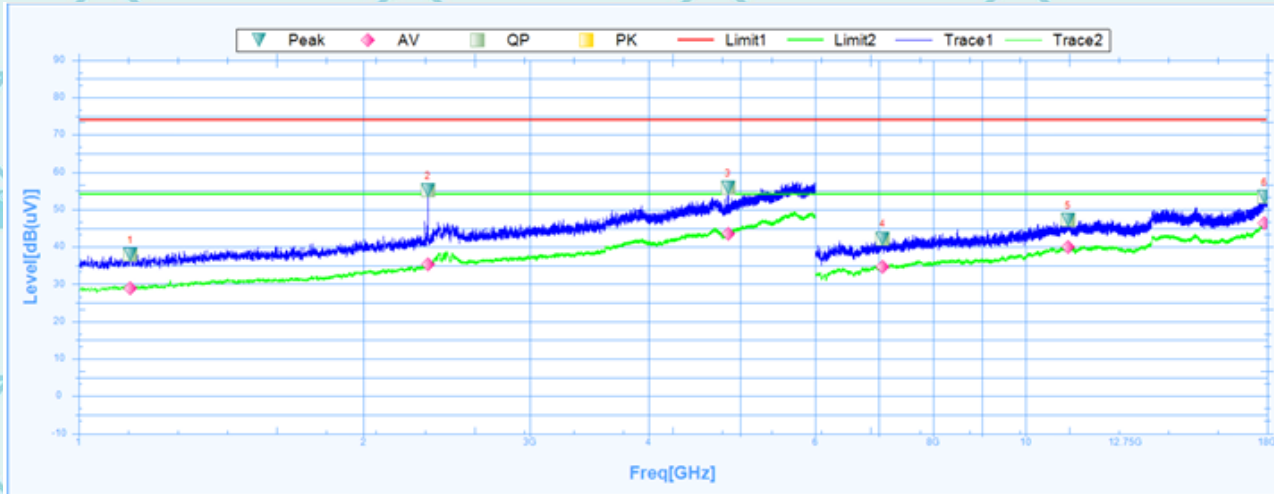


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1133.7500	38.02	24.37	13.65	74	-35.98	112	Horizontal	PK	Pass
1	1133.7500	28.85	24.37	4.48	54	-25.15	112	Horizontal	AV	Pass
2	2338.7500	55.15	27.05	28.1	74	-18.85	316.5	Horizontal	PK	Pass
2	2338.7500	35.39	27.05	8.34	54	-18.61	316.5	Horizontal	AV	Pass
3	4852.5000	55.86	31.3	24.56	74	-18.14	129.9	Horizontal	PK	Pass
3	4852.5000	43.46	31.3	12.16	54	-10.54	129.9	Horizontal	AV	Pass
4	7066.5000	42.24	6.59	35.65	74	-31.76	26.9	Horizontal	PK	Pass
4	7066.5000	34.73	6.59	28.14	54	-19.27	26.9	Horizontal	AV	Pass
5	11092.5000	47.26	15.89	31.37	74	-26.74	360.1	Horizontal	PK	Pass
5	11092.5000	39.97	15.89	24.08	54	-14.03	360.1	Horizontal	AV	Pass
6	17889.0000	53.41	23.19	30.22	74	-20.59	153.5	Horizontal	PK	Pass
6	17889.0000	46.27	23.19	23.08	54	-7.73	153.5	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E251100087A-BT Issued 18 November 2025

Revised: None

Vertical:

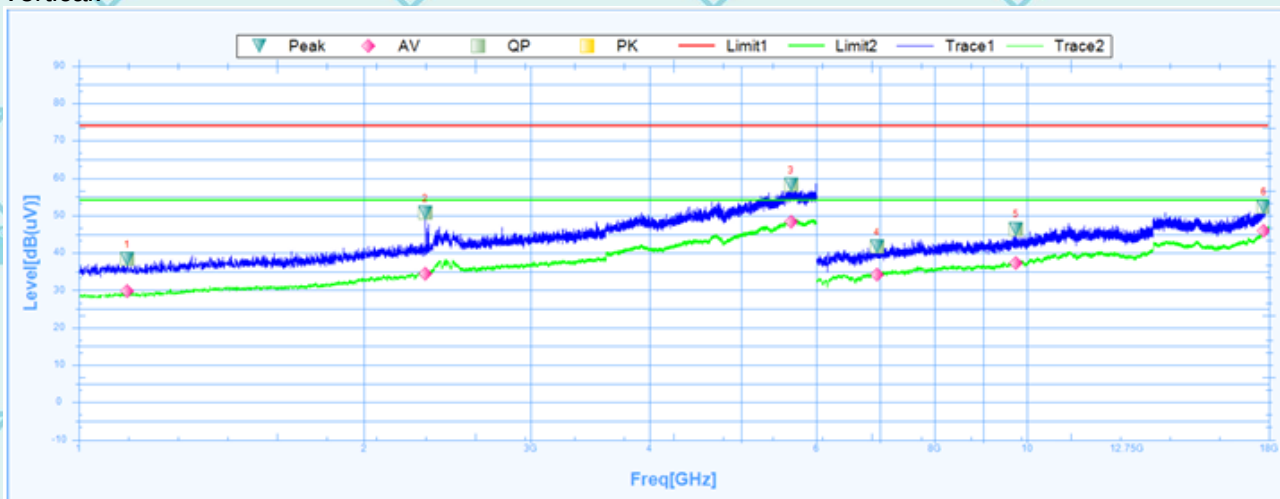

Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1125.0000	38.32	24.36	13.96	74	-35.68	121.7	Vertical	PK	Pass
1	1125.0000	29.78	24.36	5.42	54	-24.22	121.7	Vertical	AV	Pass
2	2321.2500	50.65	26.99	23.66	74	-23.35	112.1	Vertical	PK	Pass
2	2321.2500	34.35	26.99	7.36	54	-19.65	112.1	Vertical	AV	Pass
3	5641.8750	58.28	32.23	26.05	74	-15.72	0	Vertical	PK	Pass
3	5641.8750	48.32	32.23	16.09	54	-5.68	0	Vertical	AV	Pass
4	6951.0000	41.7	6.2	35.5	74	-32.3	0.7	Vertical	PK	Pass
4	6951.0000	34.19	6.2	27.99	54	-19.81	0.7	Vertical	AV	Pass
5	9741.0000	46.45	11.74	34.71	74	-27.55	218.1	Vertical	PK	Pass
5	9741.0000	37.38	11.74	25.64	54	-16.62	218.1	Vertical	AV	Pass
6	17787.0000	52.4	22.54	29.86	74	-21.6	184.6	Vertical	PK	Pass
6	17787.0000	45.8	22.54	23.26	54	-8.2	184.6	Vertical	AV	Pass

Note:

- The emission levels of other frequencies are very lower than the limit and not show in test report.
- Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Data of measurement shown "---" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
- Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (GFSK) was submitted only.

6.11.3. Restricted Bands Requirements

Bluetooth (GFSK, Pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result GFSK model was report as below

Frequency	Reading	Correct Factor	Emission Level	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel							
2387	69.86	-8.76	61.10	74	12.90	H	PK
2387	53.96	-8.76	45.20	54	8.80	H	AV
2387	68.58	-8.73	59.85	74	14.15	V	PK
2387	57.48	-8.73	48.75	54	5.25	V	AV
2390	68.92	-8.76	60.16	74	13.84	H	PK
2390	55.82	-8.76	47.06	54	6.94	H	AV
2390	69.76	-8.73	61.03	74	12.97	V	PK
2390	57.09	-8.73	48.36	54	5.64	V	AV
High Channel							
2483.5	65.30	-8.76	56.54	74	17.46	H	PK
2483.5	55.46	-8.76	46.70	54	7.30	H	AV
2483.5	69.69	-8.73	60.96	74	13.04	V	PK
2483.5	56.69	-8.73	47.96	54	6.04	V	AV

Note: Freq. = Emission frequency in MHz
Reading level (dBμV) = Receiver reading
Corr. Factor (dB) = Attenuation factor + Cable loss
Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)
Limit (dBμV) = Limit stated in standard
Margin (dB) = Level (dBμV) – Limits (dBμV)

*****END OF REPORT*****