

Report No.: WSCT-ANAB-R&E260800073A-BLE

Issued: 11 September 2026

Revised: None

High channel: 2480MHz

Horizontal:



Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1355.0000	39.67	24.94	14.73	74	-34.33	283.8	Horizontal	PK	Pass
1	1355.0000	30.77	24.94	5.83	54	-23.23	283.8	Horizontal	AV	Pass
2	2439.3750	48.04	27.39	20.65	74	-25.96	169	Horizontal	PK	Pass
2	2439.3750	38.72	27.39	11.33	54	-15.28	169	Horizontal	AV	Pass
3	5250.6250	56.57	31.8	24.77	74	-17.43	0.5	Horizontal	PK	Pass
3	5250.6250	46.6	31.8	14.8	54	-7.4	0.5	Horizontal	AV	Pass
4	7102.5000	41.13	6.74	34.39	74	-32.87	8.8	Horizontal	PK	Pass
4	7102.5000	33.01	6.74	26.27	54	-20.99	8.8	Horizontal	AV	Pass
5	10087.5000	44.02	12.61	31.41	74	-29.98	95.4	Horizontal	PK	Pass
5	10087.5000	36.67	12.61	24.06	54	-17.33	95.4	Horizontal	AV	Pass
6	14136.0000	50.18	18.99	31.19	74	-23.82	311.7	Horizontal	PK	Pass
6	14136.0000	42.35	18.99	23.36	54	-11.65	311.7	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260800073A-BLE

Issued: 11 September 2026

Revised: None

Vertical:



Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1438.7500	39.84	25.06	14.78	74	-34.16	53.1	Vertical	PK	Pass
1	1438.7500	31.09	25.06	6.03	54	-22.91	53.1	Vertical	AV	Pass
2	2401.8750	48.44	27.27	21.17	74	-25.56	305.4	Vertical	PK	Pass
2	2401.8750	38.76	27.27	11.49	54	-15.24	305.4	Vertical	AV	Pass
3	5234.3750	60.22	31.79	28.43	74	-13.78	311.4	Vertical	PK	Pass
3	5234.3750	47.1	31.79	15.31	54	-6.9	311.4	Vertical	AV	Pass
4	6976.5000	39.46	6.29	33.17	74	-34.54	6.2	Vertical	PK	Pass
4	6976.5000	32.09	6.29	25.8	54	-21.91	6.2	Vertical	AV	Pass
5	9969.0000	43.96	12.28	31.68	74	-30.04	-0.1	Vertical	PK	Pass
5	9969.0000	35.58	12.28	23.3	54	-18.42	-0.1	Vertical	AV	Pass
6	12025.5000	46.7	16.79	29.91	74	-27.3	60.6	Vertical	PK	Pass
6	12025.5000	39.3	16.79	22.51	54	-14.7	60.6	Vertical	AV	Pass

Note:


1. All emissions not reported were more than 20dB below the specified limit or in the noise floor.
2. Emission Level= Reading Level+Probe Factor +Cable Loss.
3. Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

6.7.3. Restricted Bands Requirements

Test result for GFSK Mode (BLE 1M the worst case)


Low channel

Horizontal:

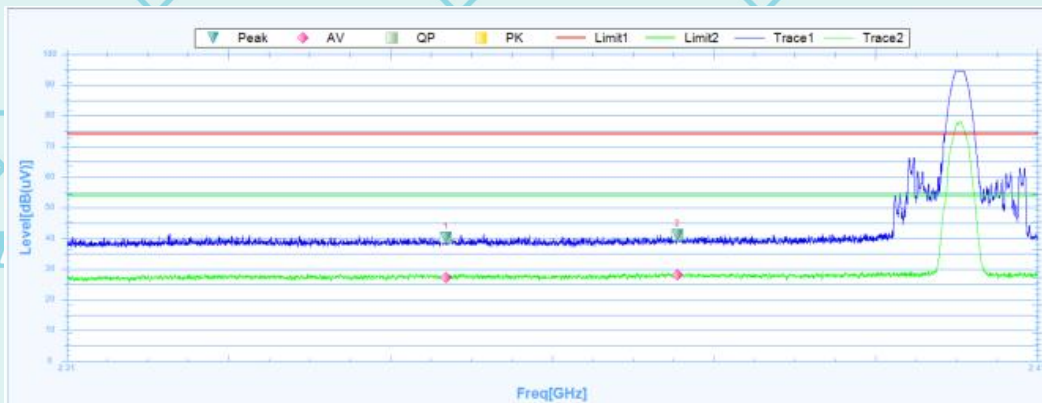

Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2349.0500	40.22	0.63	39.59	74	-33.78	16.4	Horizontal	PK	Pass
1	2349.0500	27.11	0.63	26.48	54	-26.89	16.4	Horizontal	AV	Pass
2	2372.9250	41.17	0.74	40.43	74	-32.83	358.3	Horizontal	PK	Pass
2	2372.9250	28.15	0.74	27.41	54	-25.85	358.3	Horizontal	AV	Pass

Vertical:

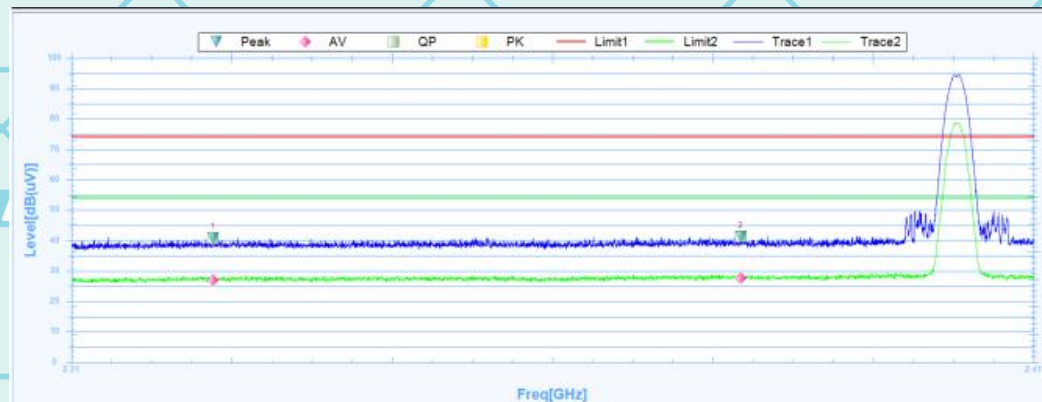


Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2324.7375	40.88	0.51	40.37	74	-33.12	343.5	Vertical	PK	Pass
1	2324.7375	27.02	0.51	26.51	54	-26.98	343.5	Vertical	AV	Pass
2	2379.5750	41.3	0.77	40.53	74	-32.7	255.1	Vertical	PK	Pass
2	2379.5750	27.72	0.77	26.95	54	-26.28	255.1	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260800073A-BLE

Issued: 11 September 2026


Revised: None

High channel
Horizontal:

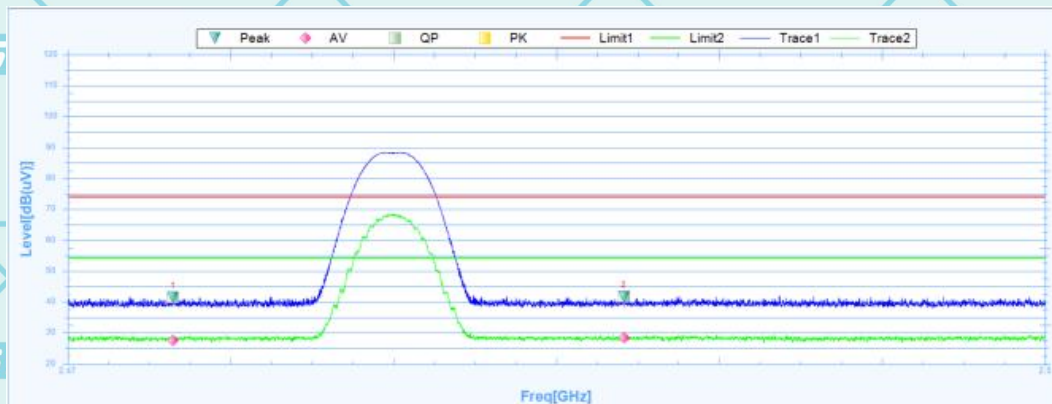

Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2473.2288	41.39	1.32	40.07	74	-32.61	11.4	Horizontal	PK	Pass
1	2473.2288	27.45	1.32	26.13	54	-26.55	11.4	Horizontal	AV	Pass
2	2487.0738	41.59	1.41	40.18	74	-32.41	298.2	Horizontal	PK	Pass
2	2487.0738	28.34	1.41	26.93	54	-25.66	298.2	Horizontal	AV	Pass

Vertical:

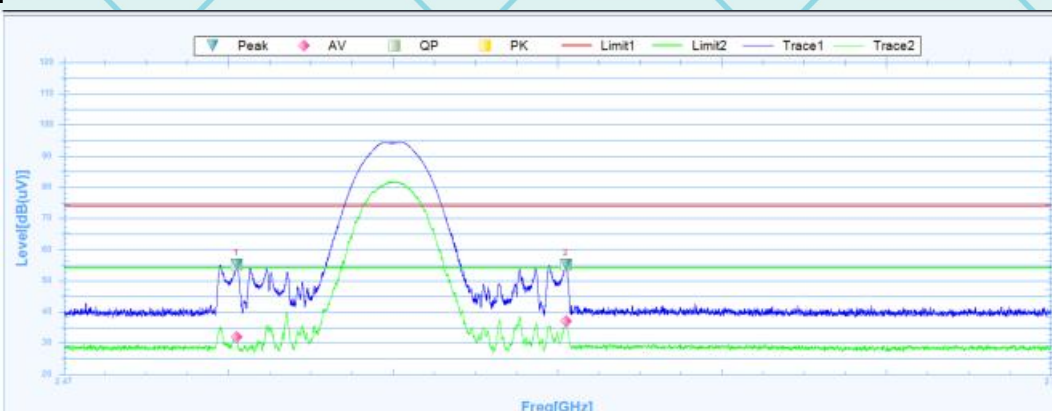

Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2475.2462	55.12	1.34	53.78	74	-18.88	298.1	Vertical	PK	Pass
1	2475.2462	31.88	1.34	30.54	54	-22.12	298.1	Vertical	AV	Pass
2	2485.2625	55.07	1.4	53.67	74	-18.93	259.9	Vertical	PK	Pass
2	2485.2625	37.07	1.4	35.67	54	-16.93	259.9	Vertical	AV	Pass

Note: Freq. = Emission frequency in MHz
Reading level (dB μ V) = Receiver reading
Corr. Factor (dB) = Attenuation factor + Cable loss
Level (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)
Limit (dB μ V) = Limit stated in standard
Margin (dB) = Level (dB μ V) – Limits (dB μ V)

*****END OF REPORT*****