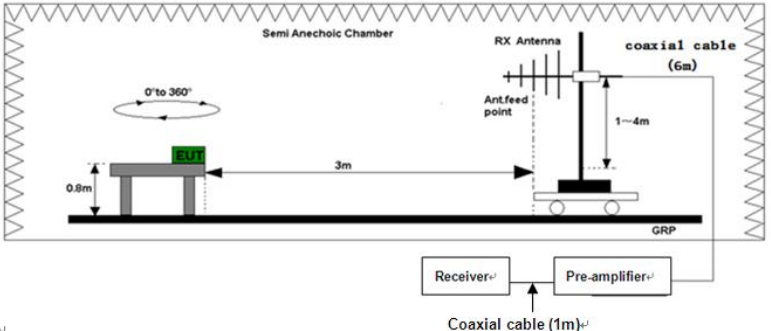
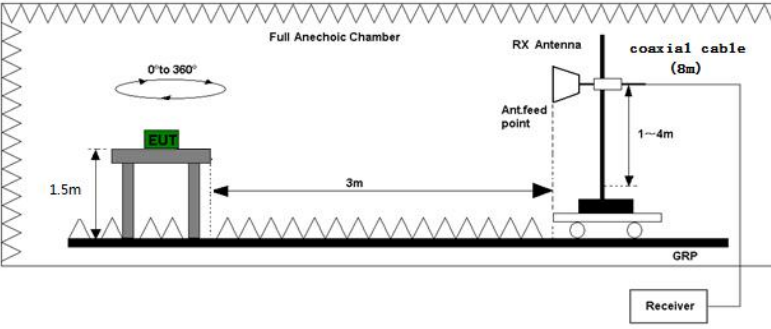


	 Above 1GHz
	
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10:2020 Measurement Guidelines. 2. For the radiated emission test below 1GHz: The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level. For the radiated emission test above 1GHz: Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which

	maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$GHz ; VBW$\geq$RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak (3) For average measurement: use duty cycle correction factor method per 15.35(c). Duty cycle = On time/100 milliseconds On time = $N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{n-1} \cdot L_{n-1} + N_n \cdot L_n$ Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc Average Emission Level = Peak Emission Level + $20 \cdot \log(\text{Duty cycle})$ Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
Test results:	PASS

Report No.: WSCT-ANAB-R&E260800073A -BT Issued 11 September 2026

Revised: None

6.11.2. Test Data

Please refer to following diagram for individual

Below 1GHz

The worst mode is GFSK

Horizontal:




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		49.4000	30.85	-7.51	23.34	40.00	16.66	QP
2		150.2800	25.80	-6.64	19.16	43.50	24.34	QP
3		305.4800	30.34	-6.43	23.91	46.00	22.09	QP
4		532.4600	26.92	-0.29	26.63	46.00	19.37	QP
5		713.8500	26.22	3.35	29.57	46.00	16.43	QP
6	*	825.4000	29.31	5.32	34.63	46.00	11.37	QP

Report No.: WSCT-ANAB-R&E260800073A -BT Issued 11 September 2026

Revised: None

Vertical:

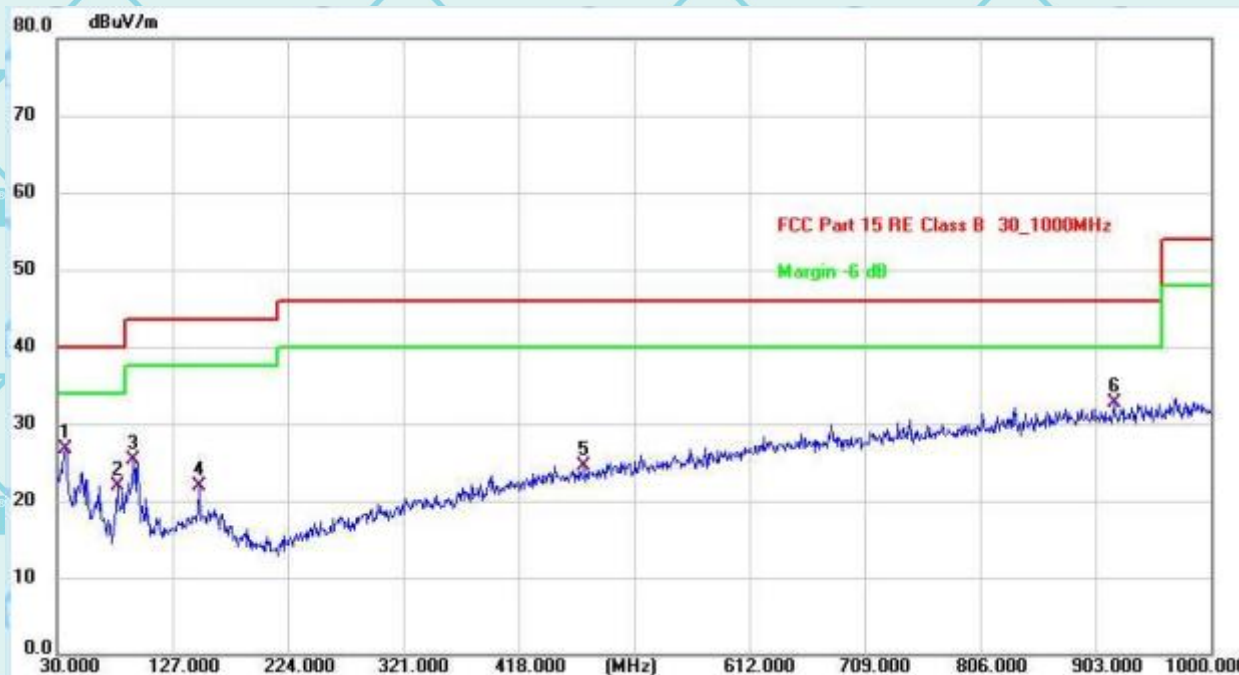

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	36.7900	47.29	-20.52	26.77	40.00	13.23	QP
2		80.4400	42.09	-20.19	21.90	40.00	18.10	QP
3		94.0199	45.53	-20.21	25.32	43.50	18.18	QP
4		149.3100	41.93	-19.94	21.99	43.50	21.51	QP
5		473.2900	42.93	-18.39	24.54	46.00	21.46	QP
6		918.5200	48.59	-15.84	32.75	46.00	13.25	QP

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) - Limits (dBuV)

Above 1GHz

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

The worst mode is GFSK

Low channel: 2402MHz

Horizontal:



Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1421.8750	40.73	25.08	15.65	74	-33.27	127.3	Horizontal	PK	Pass
1	1421.8750	31.02	25.08	5.94	54	-22.98	127.3	Horizontal	AV	Pass
2	2450.6250	46.74	27.43	19.31	74	-27.26	2.1	Horizontal	PK	Pass
2	2450.6250	38.47	27.43	11.04	54	-15.53	2.1	Horizontal	AV	Pass
3	5184.3750	66.83	31.75	35.08	74	-7.17	110.6	Horizontal	PK	Pass
3	5184.3750	46.29	31.75	14.54	54	-7.71	110.6	Horizontal	AV	Pass
4	7635.0000	41.28	7.95	33.33	74	-32.72	52.3	Horizontal	PK	Pass
4	7635.0000	33.72	7.95	25.77	54	-20.28	52.3	Horizontal	AV	Pass
5	10110.0000	43.61	12.68	30.93	74	-30.39	0	Horizontal	PK	Pass
5	10110.0000	36.63	12.68	23.95	54	-17.37	0	Horizontal	AV	Pass
6	13651.5000	48.68	18.12	30.56	74	-25.32	316.5	Horizontal	PK	Pass
6	13651.5000	42.03	18.12	23.91	54	-11.97	316.5	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260800073A -BT Issued 11 September 2026

Revised: None

Vertical:



Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1106.2500	38.85	24.35	14.5	74	-35.15	360	Vertical	PK	Pass
1	1106.2500	29.22	24.35	4.87	54	-24.78	360	Vertical	AV	Pass
2	2398.1250	46.85	27.25	19.6	74	-27.15	265.8	Vertical	PK	Pass
2	2398.1250	38.15	27.25	10.9	54	-15.85	265.8	Vertical	AV	Pass
3	5746.8750	60.93	32.39	28.54	74	-13.07	301.8	Vertical	PK	Pass
3	5746.8750	48.9	32.39	16.51	54	-5.1	301.8	Vertical	AV	Pass
4	7747.5000	41.35	7.96	33.39	74	-32.65	-0.1	Vertical	PK	Pass
4	7747.5000	33.9	7.96	25.94	54	-20.1	-0.1	Vertical	AV	Pass
5	10369.5000	44.74	13.5	31.24	74	-29.26	-0.1	Vertical	PK	Pass
5	10369.5000	36.73	13.5	23.23	54	-17.27	-0.1	Vertical	AV	Pass
6	13927.5000	50.01	18.91	31.1	74	-23.99	355	Vertical	PK	Pass
6	13927.5000	42.2	18.91	23.29	54	-11.8	355	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260800073A -BT Issued 11 September 2026

Revised: None

Middle channel: 2440MHz

Horizontal:



Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1441.8750	40.99	25.06	15.93	74	-33.01	345.8	Horizontal	PK	Pass
1	1441.8750	30.5	25.06	5.44	54	-23.5	345.8	Horizontal	AV	Pass
2	2508.7500	46.95	27.61	19.34	74	-27.05	138.3	Horizontal	PK	Pass
2	2508.7500	36.94	27.61	9.33	54	-17.06	138.3	Horizontal	AV	Pass
3	3700.0000	48.86	28.98	19.88	74	-25.14	90.6	Horizontal	PK	Pass
3	3700.0000	40.13	28.98	11.15	54	-13.87	90.6	Horizontal	AV	Pass
4	7215.0000	35.78	6.98	28.8	74	-38.22	118	Horizontal	PK	Pass
4	7215.0000	28.52	6.98	21.54	54	-25.48	118	Horizontal	AV	Pass
5	11017.5000	44.52	15.67	28.85	74	-29.48	133.5	Horizontal	PK	Pass
5	11017.5000	37.23	15.67	21.56	54	-16.77	133.5	Horizontal	AV	Pass
6	13924.5000	48.49	18.9	29.59	74	-25.51	352	Horizontal	PK	Pass
6	13924.5000	41.28	18.9	22.38	54	-12.72	352	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260800073A -BT Issued 11 September 2026

Revised: None

Vertical:



Suspected Data List


NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1368.1250	39.62	24.99	14.63	74	-34.38	289.8	Vertical	PK	Pass
1	1368.1250	30.54	24.99	5.55	54	-23.46	289.8	Vertical	AV	Pass
2	2438.1250	46.58	27.39	19.19	74	-27.42	292.2	Vertical	PK	Pass
2	2438.1250	38.43	27.39	11.04	54	-15.57	292.2	Vertical	AV	Pass
3	5176.8750	61	31.74	29.26	74	-13	35.2	Vertical	PK	Pass
3	5176.8750	45.68	31.74	13.94	54	-8.32	35.2	Vertical	AV	Pass
4	7716.0000	41.81	7.96	33.85	74	-32.19	329.3	Vertical	PK	Pass
4	7716.0000	34.38	7.96	26.42	54	-19.62	329.3	Vertical	AV	Pass
5	11614.5000	47.15	16.18	30.97	74	-26.85	232.4	Vertical	PK	Pass
5	11614.5000	38.84	16.18	22.66	54	-15.16	232.4	Vertical	AV	Pass
6	17955.0000	53.26	23.61	29.65	74	-20.74	47.1	Vertical	PK	Pass
6	17955.0000	46.7	23.61	23.09	54	-7.3	47.1	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260800073A -BT Issued 11 September 2026

Revised: None

High channel: 2480MHz

Horizontal:

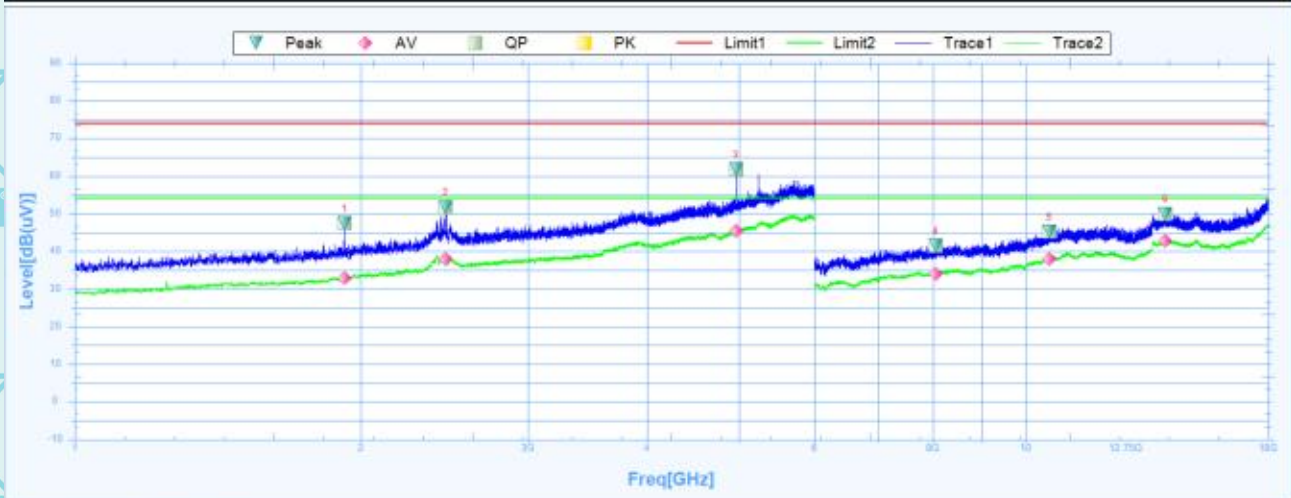

Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1921.2500	47.51	25.55	21.96	74	-26.49	360.1	Horizontal	PK	Pass
1	1921.2500	32.93	25.55	7.38	54	-21.07	360.1	Horizontal	AV	Pass
2	2456.8750	51.74	27.45	24.29	74	-22.26	232.5	Horizontal	PK	Pass
2	2456.8750	38.03	27.45	10.58	54	-15.97	232.5	Horizontal	AV	Pass
3	4960.0000	61.82	31.52	30.3	74	-12.18	54.3	Horizontal	PK	Pass
3	4960.0000	45.36	31.52	13.84	54	-8.64	54.3	Horizontal	AV	Pass
4	8046.0000	41.38	8.37	33.01	74	-32.62	247.2	Horizontal	PK	Pass
4	8046.0000	33.99	8.37	25.62	54	-20.01	247.2	Horizontal	AV	Pass
5	10599.0000	45.15	14.32	30.83	74	-28.85	33.2	Horizontal	PK	Pass
5	10599.0000	38	14.32	23.68	54	-16	33.2	Horizontal	AV	Pass
6	14038.5000	49.98	19.09	30.89	74	-24.02	81	Horizontal	PK	Pass
6	14038.5000	42.85	19.09	23.76	54	-11.15	81	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260800073A -BT Issued 11 September 2026

Revised: None

Vertical:



Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1386.2500	40.59	25.05	15.54	74	-33.41	360	Vertical	PK	Pass
1	1386.2500	31.19	25.05	6.14	54	-22.81	360	Vertical	AV	Pass
2	2457.5000	49.27	27.46	21.81	74	-24.73	3.9	Vertical	PK	Pass
2	2457.5000	38.07	27.46	10.61	54	-15.93	3.9	Vertical	AV	Pass
3	5188.7500	64.4	31.75	32.65	74	-9.6	77	Vertical	PK	Pass
3	5188.7500	46.44	31.75	14.69	54	-7.56	77	Vertical	AV	Pass
4	7951.5000	41.32	8.14	33.18	74	-32.68	0.1	Vertical	PK	Pass
4	7951.5000	33.72	8.14	25.58	54	-20.28	0.1	Vertical	AV	Pass
5	10323.0000	44.66	13.36	31.3	74	-29.34	358.6	Vertical	PK	Pass
5	10323.0000	37.24	13.36	23.88	54	-16.76	358.6	Vertical	AV	Pass
6	14406.0000	49.78	18.71	31.07	74	-24.22	313.1	Vertical	PK	Pass
6	14406.0000	42.08	18.71	23.37	54	-11.92	313.1	Vertical	AV	Pass

Note:

- The emission levels of other frequencies are very lower than the limit and not show in test report.
- Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Data of measurement shown "----" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
- Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (GFSK) was submitted only.


6.11.3. Restricted Bands Requirements

Bluetooth (GFSK, Pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result GFSK model was report as below


GFSK

Low channel

Horizontal:

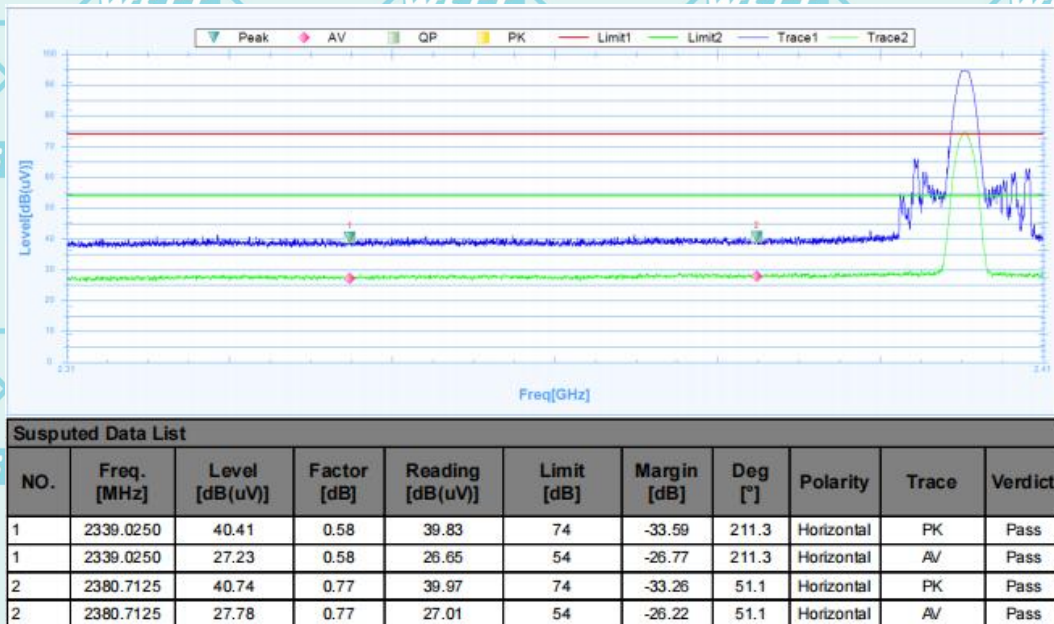

Vertical:

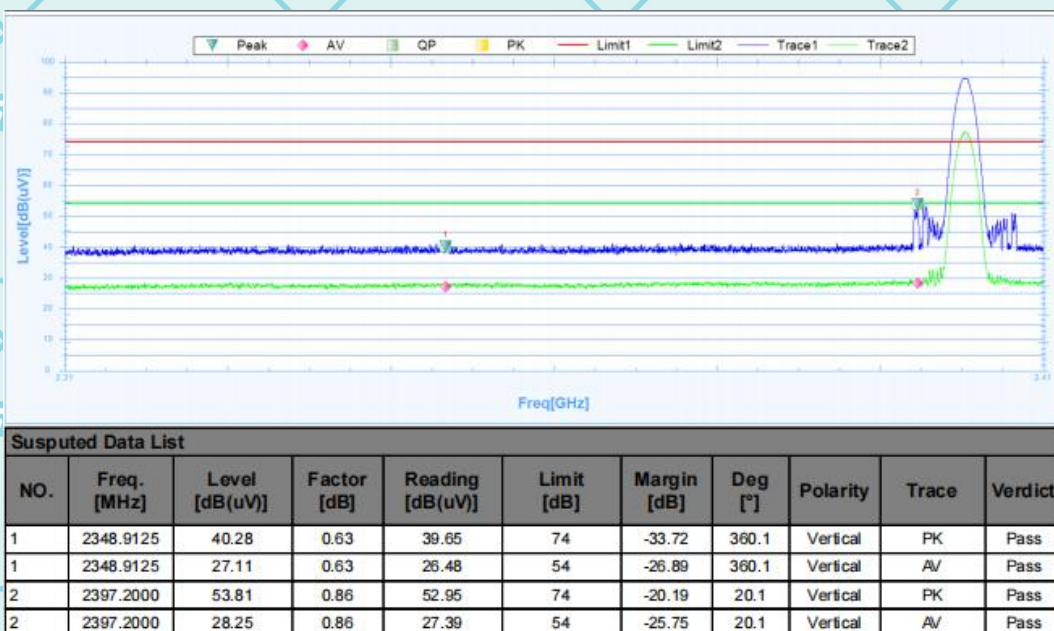

Report No.: WSCT-ANAB-R&E260800073A-BT Issued 11 September 2026


Revised: None

High channel
Horizontal:



Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2472.1525	65.18	1.32	63.86	74	-8.82	193.6	Horizontal	PK	Pass
1	2472.1525	29.17	1.32	27.85	54	-24.83	193.6	Horizontal	AV	Pass
2	2482.1650	60.66	1.38	59.28	74	-13.34	172.1	Horizontal	PK	Pass
2	2482.1650	29	1.38	27.62	54	-25	172.1	Horizontal	AV	Pass

Vertical:

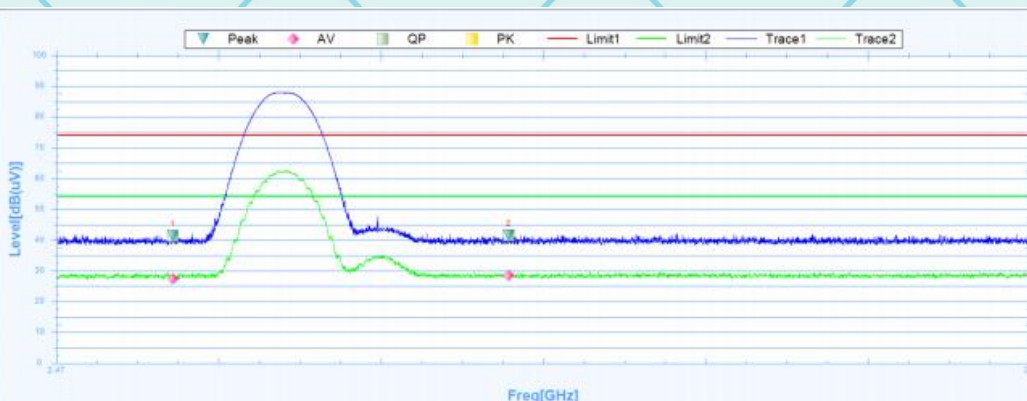

Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2473.5888	41.39	1.32	40.07	74	-32.61	98.6	Vertical	PK	Pass
1	2473.5888	27.4	1.32	26.08	54	-26.6	98.6	Vertical	AV	Pass
2	2483.9312	41.61	1.39	40.22	74	-32.39	42.3	Vertical	PK	Pass
2	2483.9312	28.59	1.39	27.2	54	-25.41	42.3	Vertical	AV	Pass

Note: Freq. = Emission frequency in MHz
 Reading level (dBμV) = Receiver reading
 Corr. Factor (dB) = Attenuation factor + Cable loss
 Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)
 Limit (dBμV) = Limit stated in standard
 Margin (dB) = Level (dBμV) - Limits (dBμV)

*****END OF REPORT*****