


Report No.: WSCT-ANAB-R&E260800070A -BT Issued 04 September 2026

Revised: None

Middle channel: 2440MHz

Horizontal:

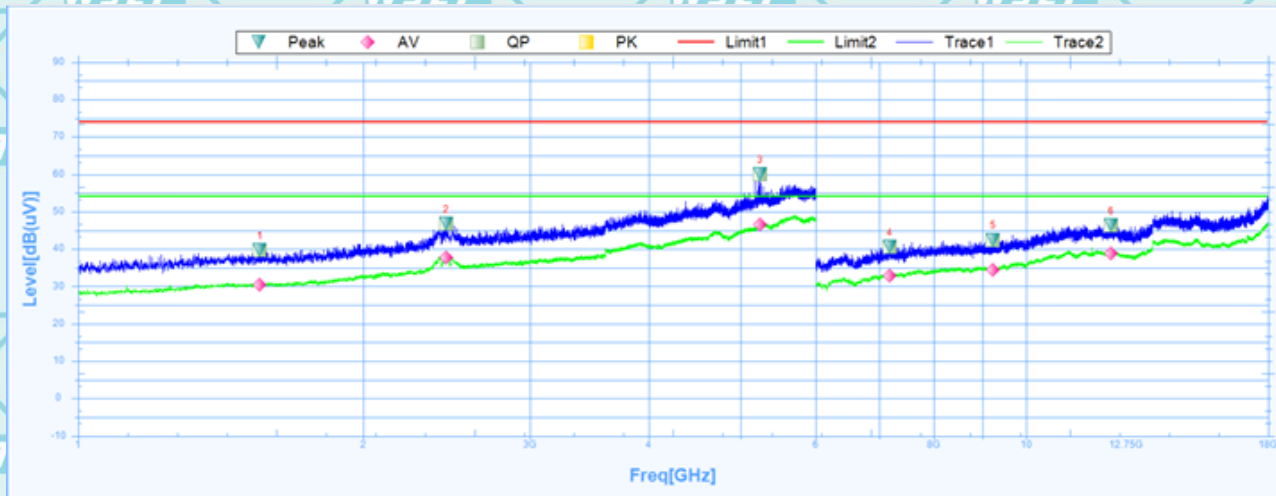


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1555.6250	39.64	24.94	14.7	74	-34.36	85.4	Horizontal	PK	Pass
1	1555.6250	30.39	24.94	5.45	54	-23.61	85.4	Horizontal	AV	Pass
2	2446.8750	46.75	27.42	19.33	74	-27.25	299.4	Horizontal	PK	Pass
2	2446.8750	37.71	27.42	10.29	54	-16.29	299.4	Horizontal	AV	Pass
3	5245.0000	60.13	31.8	28.33	74	-13.87	193	Horizontal	PK	Pass
3	5245.0000	46.52	31.8	14.72	54	-7.48	193	Horizontal	AV	Pass
4	7182.0000	40.59	7.03	33.56	74	-33.41	144.3	Horizontal	PK	Pass
4	7182.0000	32.96	7.03	25.93	54	-21.04	144.3	Horizontal	AV	Pass
5	9234.0000	42.46	10.2	32.26	74	-31.54	322.5	Horizontal	PK	Pass
5	9234.0000	34.52	10.2	24.32	54	-19.48	322.5	Horizontal	AV	Pass
6	12297.0000	46.38	16.48	29.9	74	-27.62	120.4	Horizontal	PK	Pass
6	12297.0000	38.78	16.48	22.3	54	-15.22	120.4	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260800070A-BT Issued 04 September 2026

Revised: None

Vertical:

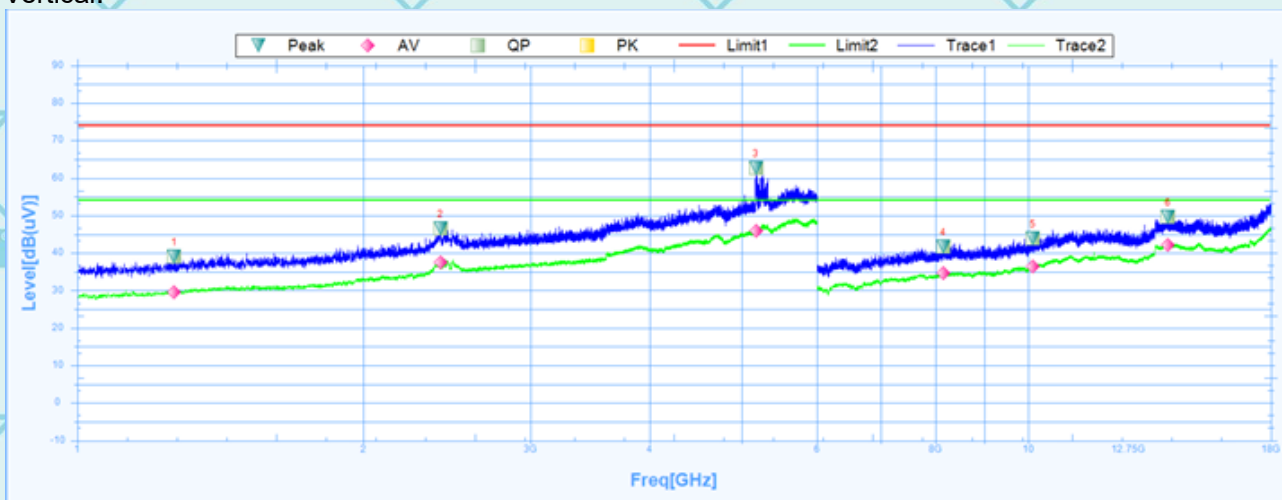

Suspected Data List


NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1265.0000	38.95	24.63	14.32	74	-35.05	132	Vertical	PK	Pass
1	1265.0000	29.49	24.63	4.86	54	-24.51	132	Vertical	AV	Pass
2	2410.6250	46.52	27.3	19.22	74	-27.48	25.7	Vertical	PK	Pass
2	2410.6250	37.55	27.3	10.25	54	-16.45	25.7	Vertical	AV	Pass
3	5173.1250	62.68	31.74	30.94	74	-11.32	264.7	Vertical	PK	Pass
3	5173.1250	46	31.74	14.26	54	-8	264.7	Vertical	AV	Pass
4	8145.0000	41.73	8.61	33.12	74	-32.27	35.6	Vertical	PK	Pass
4	8145.0000	34.53	8.61	25.92	54	-19.47	35.6	Vertical	AV	Pass
5	10119.0000	43.88	12.72	31.16	74	-30.12	238.9	Vertical	PK	Pass
5	10119.0000	36.33	12.72	23.61	54	-17.67	238.9	Vertical	AV	Pass
6	14034.0000	49.7	19.09	30.61	74	-24.3	144.4	Vertical	PK	Pass
6	14034.0000	42.23	19.09	23.14	54	-11.77	144.4	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260800070A-BT Issued 04 September 2026

Revised: None

High channel: 2480MHz

Horizontal:

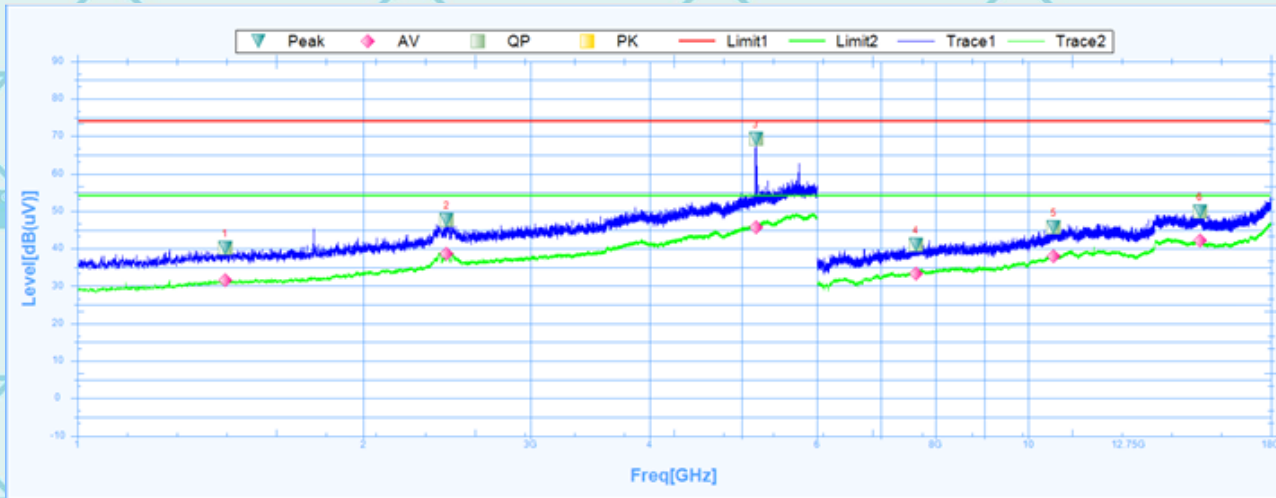


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1430.0000	40.18	25.07	15.11	74	-33.82	20.1	Horizontal	PK	Pass
1	1430.0000	31.54	25.07	6.47	54	-22.46	20.1	Horizontal	AV	Pass
2	2447.5000	47.72	27.42	20.3	74	-26.28	8	Horizontal	PK	Pass
2	2447.5000	38.72	27.42	11.3	54	-15.28	8	Horizontal	AV	Pass
3	5173.1250	69.33	31.74	37.59	74	-4.67	360.1	Horizontal	PK	Pass
3	5173.1250	45.78	31.74	14.04	54	-8.22	360.1	Horizontal	AV	Pass
4	7620.0000	40.96	7.95	33.01	74	-33.04	163.5	Horizontal	PK	Pass
4	7620.0000	33.42	7.95	25.47	54	-20.58	163.5	Horizontal	AV	Pass
5	10644.0000	45.6	14.48	31.12	74	-28.4	180.2	Horizontal	PK	Pass
5	10644.0000	37.89	14.48	23.41	54	-16.11	180.2	Horizontal	AV	Pass
6	15157.5000	49.88	19.47	30.41	74	-24.12	65.4	Horizontal	PK	Pass
6	15157.5000	42.23	19.47	22.76	54	-11.77	65.4	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260800070A -BT Issued 04 September 2026

Revised: None

Vertical:

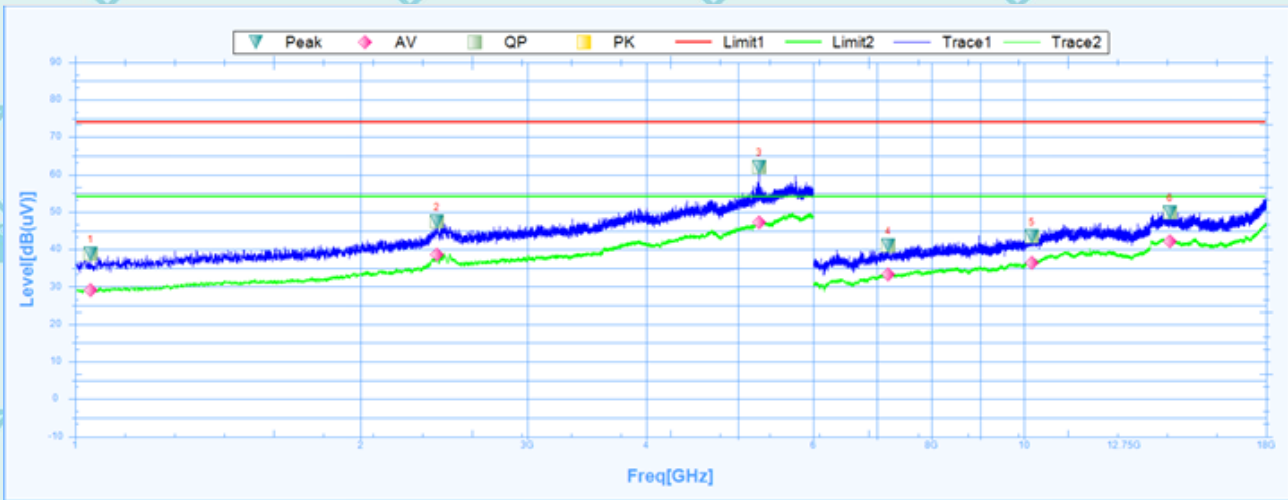

Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1038.1250	38.75	24.32	14.43	74	-35.25	88.9	Vertical	PK	Pass
1	1038.1250	29.12	24.32	4.8	54	-24.88	88.9	Vertical	AV	Pass
2	2407.5000	47.47	27.29	20.18	74	-26.53	94.9	Vertical	PK	Pass
2	2407.5000	38.61	27.29	11.32	54	-15.39	94.9	Vertical	AV	Pass
3	5262.5000	61.93	31.81	30.12	74	-12.07	359.9	Vertical	PK	Pass
3	5262.5000	47.26	31.81	15.45	54	-6.74	359.9	Vertical	AV	Pass
4	7195.5000	40.94	7.01	33.93	74	-33.06	16.5	Vertical	PK	Pass
4	7195.5000	33.31	7.01	26.3	54	-20.69	16.5	Vertical	AV	Pass
5	10201.5000	43.51	12.98	30.53	74	-30.49	147.9	Vertical	PK	Pass
5	10201.5000	36.48	12.98	23.5	54	-17.52	147.9	Vertical	AV	Pass
6	14256.0000	49.9	18.87	31.03	74	-24.1	211.3	Vertical	PK	Pass
6	14256.0000	42.13	18.87	23.26	54	-11.87	211.3	Vertical	AV	Pass

Note:

- The emission levels of other frequencies are very lower than the limit and not show in test report.
- Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Data of measurement shown "---" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
- Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (GFSK) was submitted only.


6.11.3. Restricted Bands Requirements

Bluetooth (GFSK, Pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result GFSK model was report as below

GFSK


Low channel

Horizontal:

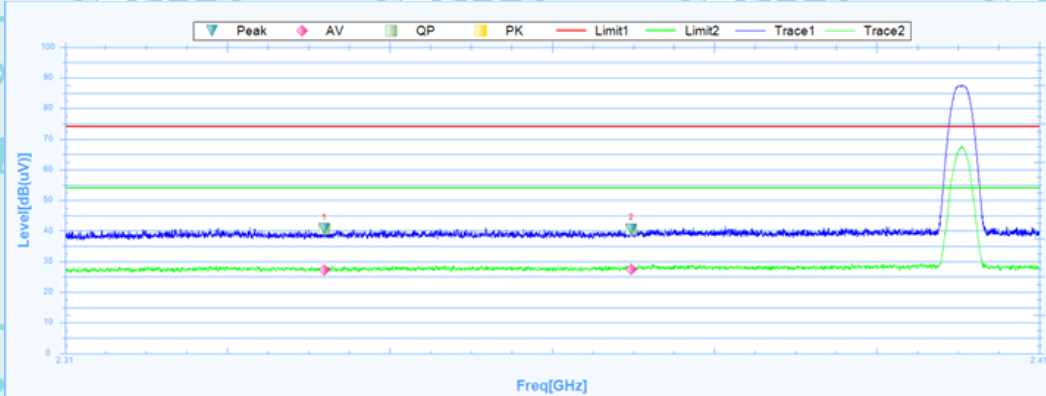

Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2336.6125	40.59	0.56	40.03	74	-33.41	350.7	Horizontal	PK	Pass
1	2336.6125	27.18	0.56	26.62	54	-26.82	350.7	Horizontal	AV	Pass
2	2368.1500	40.54	0.72	39.82	74	-33.46	232.8	Horizontal	PK	Pass
2	2368.1500	27.37	0.72	26.65	54	-26.63	232.8	Horizontal	AV	Pass

Vertical:

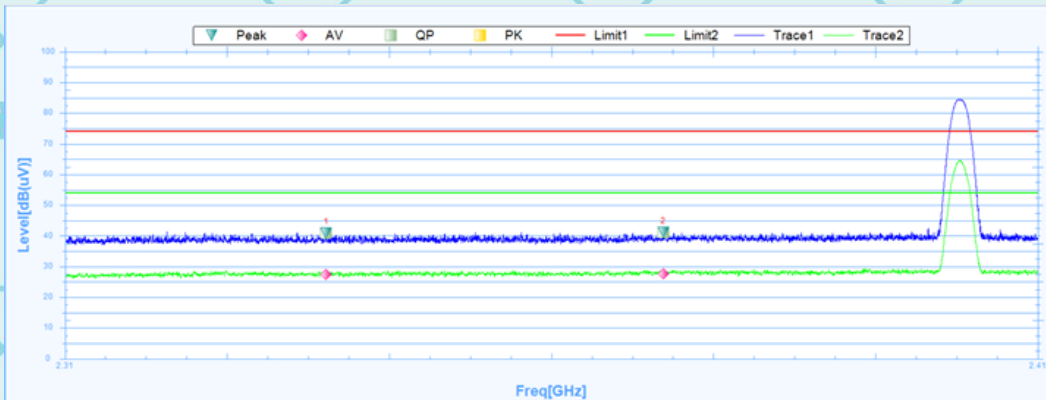


Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2336.8625	40.9	0.57	40.33	74	-33.1	34.3	Vertical	PK	Pass
1	2336.8625	27.36	0.57	26.79	54	-26.64	34.3	Vertical	AV	Pass
2	2371.5125	41.13	0.73	40.4	74	-32.87	245.9	Vertical	PK	Pass
2	2371.5125	27.72	0.73	26.99	54	-26.28	245.9	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260800070A-BT Issued 04 September 2026


Revised: None

High channel
Horizontal:

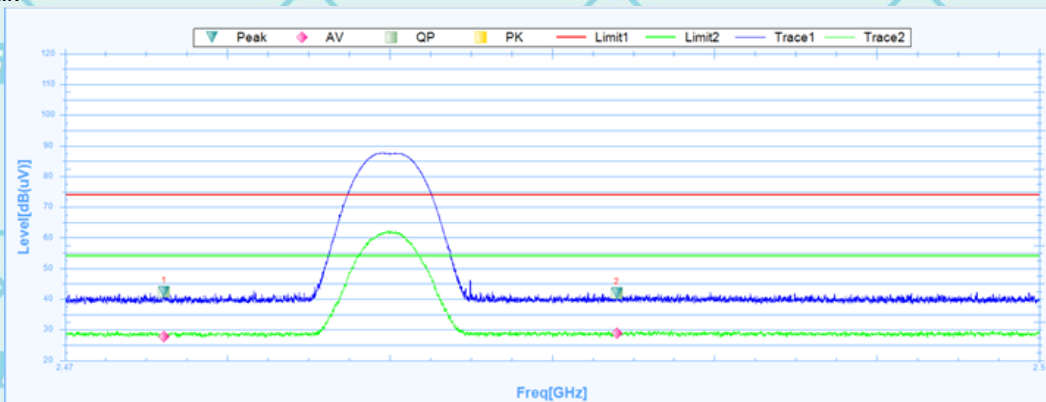

Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2473.0488	42.24	1.32	40.92	74	-31.76	328.1	Horizontal	PK	Pass
1	2473.0488	27.72	1.32	26.4	54	-26.28	328.1	Horizontal	AV	Pass
2	2486.9950	41.82	1.41	40.41	74	-32.18	300.6	Horizontal	PK	Pass
2	2486.9950	28.79	1.41	27.38	54	-25.21	300.6	Horizontal	AV	Pass

Vertical:

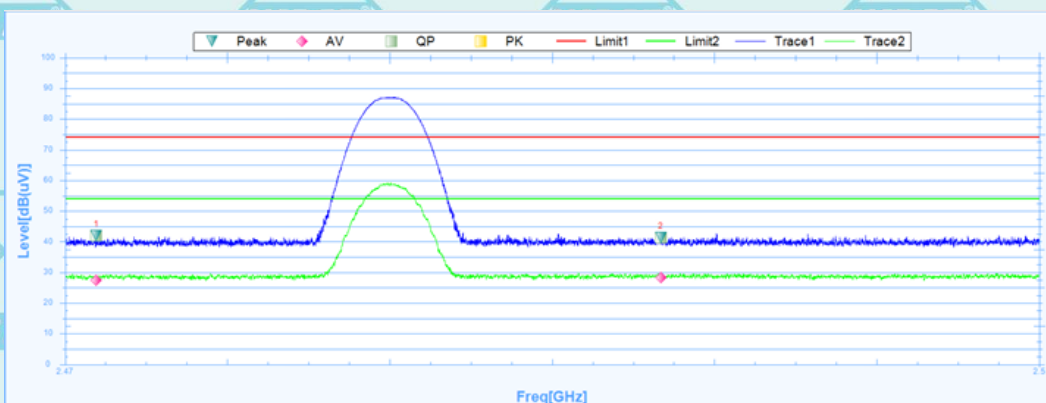

Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2470.9638	42.02	1.31	40.71	74	-31.98	6.3	Vertical	PK	Pass
1	2470.9638	27.42	1.31	26.11	54	-26.58	6.3	Vertical	AV	Pass
2	2488.3525	41.37	1.42	39.95	74	-32.63	283	Vertical	PK	Pass
2	2488.3525	28.18	1.42	26.76	54	-25.82	283	Vertical	AV	Pass

Note: Freq. = Emission frequency in MHz
 Reading level (dBμV) = Receiver reading
 Corr. Factor (dB) = Attenuation factor + Cable loss
 Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)
 Limit (dBμV) = Limit stated in standard
 Margin (dB) = Level (dBμV) – Limits (dBμV)

*****END OF REPORT*****