

TEST REPORT

FCC ID: 2AXYP-OSW-825N**Product: Smart Watch****Model No.: OSW-825N****Trade Mark: oraimo****Report No.: WSCT-ANAB-R&E260500047A-LE****Issued Date: 03 June 2026**

Issued for:

**ORAIMO TECHNOLOGY LIMITED
FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI
STREET, FOTAN NT HONGKONG**

Issued By:

**World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.
Building A-B, Baoli'an Industrial Park, No. 58 and 60, Tangtuo Avenue, Shiyan
Street, Bao'an District, Shenzhen City, Guangdong Province, China**

TEL: +86-755-26996192**FAX: +86-755-86376605**

Note: This report shall not be reproduced except in full, without the written approval of World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. This document may be altered or revised by World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. Test Certification	3
2. Test Result Summary	4
3. EUT Description	5
4. Genera Information	7
4.1. TEST ENVIRONMENT AND MODE	7
4.2. DESCRIPTION OF SUPPORT UNITS	7
5. Facilities and Accreditations	8
5.1. FACILITIES	8
5.2. ACCREDITATIONS	8
5.3. MEASUREMENT UNCERTAINTY	9
5.4. MEASUREMENT INSTRUMENTS	10
6. Test Results and Measurement Data	11
6.1. ANTENNA REQUIREMENT	11
6.2. CONDUCTED EMISSION	12
6.3. CONDUCTED OUTPUT POWER	16
6.4. EMISSION BANDWIDTH	21
6.5. POWER SPECTRAL DENSITY	26
6.6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT	31
6.7. RADIATED SPURIOUS EMISSION MEASUREMENT	42
7. Test Setup Photographs	55

Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

1. Test Certification

Product:	Smart Watch
Model No.:	OSW-825N
Trade Mark:	oraimo
Applicant:	ORAIMO TECHNOLOGY LIMITED FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Manufacturer:	ORAIMO TECHNOLOGY LIMITED FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Date of receipt:	22 May 2026
Date of Test:	22 May 2026 to 02 June 2026
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.247 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested by World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:



(Wang Xiang)

Checked By:



(Qin Shuiquan)

Approved By:



(Li Huaibi)

Date:



2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Maximum conducted output power	§15.247 (b)(3) §2.1046	PASS
6dB Emission Bandwidth	§15.247 (a)(2) §2.1049	PASS
Power Spectral Density	§15.247 (e)	PASS
Band Edge	§15.247(d) §2.1051, §2.1057	PASS
Spurious Emission	§15.205/§15.209 §2.1053, §2.1057	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. EUT Description

Product Name:	Smart Watch
Model :	OSW-825N
Trade Mark:	oraimo
Software version:	v1.0.4
Hardware version:	AB281-V03
Operation Frequency:	2402MHz~2480MHz
Channel Separation:	2MHz
Number of Channel:	40
Modulation Technology:	GFSK
Antenna Type:	Integral Antenna
Antenna Gain:	-6.40dBi
Operating Voltage	Rechargeable Li-ion Polymer Battery: 552123 Nominal Voltage: 3.7V Rated Capacity: 330mAh/1.11Wh
Remark:	N/A.

Note: 1. N/A stands for no applicable.
2. The antenna gain is provided by the customer. For any reported data issues caused by the antenna gain, World Standardization Certification&Testing Group (Shenzhen) Co., Ltd assumes no responsibility.

Operation Frequency each of channel

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
...	...	...	...	...	...	...	...
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz
Remark: 1 Mbps: 0 (2402 MHz), 19 (2440 MHz), 39 (2480 MHz)							
2 Mbps: 1 (2404 MHz), 19 (2440 MHz), 38 (2478 MHz)							

4. General Information

4.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 98.46%) with Fully-charged battery.
The sample was placed (0.1m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

5. Facilities and Accreditations

5.1. Facilities

All measurement facilities used to collect the measurement data are located at **Building A-B, Baoli'an Industrial Park, No.58 and 60, Tangtou Avenue, Shiyao Street, Bao'an District, Shenzhen City, Guangdong Province, China** of the World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 32. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:2017.

USA	ANAB - Certificate Number: AT-3951
China	CNAS (Registration Number: L3732)
Canada	ISED (CAB identifier: CN0178)

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.wsct-cert.com>

5.3.Measurement Uncertainty

No.	Item	MU
1	Power Spectral Density	±3.2dB
2	Duty Cycle and Tx-Sequence and Tx-Gap	±1%
3	Medium Utilisation Factor	±1.3%
4	Occupied Channel Bandwidth	±2.4%
5	Transmitter Unwanted Emission in the out-of Band	±1.3%
6	Transmitter Unwanted Emissions in the Spurious Domain	±2.5%
7	Receiver Spurious Emissions	±2.5%
8	Conducted Emission Test	±3.2dB
9	RF power, conducted	±0.16dB
10	Spurious emissions, conducted	±0.21dB
11	All emissions, radiated(<1GHz)	±4.7dB
12	All emissions, radiated(>1GHz)	±4.7dB
13	Temperature	±0.5°C
14	Humidity	±2.0%

NOTE:1.The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

2. The U_{lab} is less than U_{cispr} , compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

3. For conducted emission test of laboratory have a measurement uncertainty greater than that specified in harmonized standard, this equipment can still be used provided that an adjustment is made follows : any additional uncertainty in the test system over and above that specified in harmonized standard should be used to tighten the test requirements-making the test harder to pass. This procedure will ensure that a test system not compliant with harmonized standard does not increase the probability of passing a EUT that would otherwise have failed a test if a test system compliant with harmonized standard had been used.

5.4.MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Calibration Date	Calibration Due.
Test software	--	EZ-EMC	CON-03A	-	-
Test software	--	MTS8310	--	-	--
EMI Test Receiver	R&S	ESCI	100005	11/05/2025	11/04/2026
LISN	AFJ	LS16	16010222119	11/05/2025	11/04/2026
LISN(EUT)	Mestec	AN3016	04/10040	11/05/2025	11/04/2026
Universal Radio Communication Tester	R&S	CMU 200	1100.0008.02	11/05/2025	11/04/2026
Coaxial cable	Megalon	LMR400	N/A	11/05/2025	11/04/2026
GPIO cable	Megalon	GPIO	N/A	11/05/2025	11/04/2026
Spectrum Analyzer	R&S	FSU	100114	11/05/2025	11/04/2026
Pre Amplifier	H.P.	HP8447E	2945A02715	11/05/2025	11/04/2026
Pre-Amplifier	CDSI	PAP-1G18-38	--	11/05/2025	11/04/2026
Bi-log Antenna	SCHWARZBECK	VULB9168	01488	7/29/2025	7/28/2026
9*6*6 Anechoic	--	--	--	11/05/2025	11/04/2026
Horn Antenna	COMPLIANCE ENGINEERING	CE18000	--	11/05/2025	11/04/2026
Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-631	11/05/2025	11/04/2026
Cable	TIME MICROWAVE	LMR-400	N-TYPE04	11/05/2025	11/04/2026
System-Controller	CCS	N/A	N/A	N.C.R	N.C.R
Turn Table	CCS	N/A	N/A	N.C.R	N.C.R
Antenna Tower	CCS	N/A	N/A	N.C.R	N.C.R
RF cable	Murata	MXHQ87WA3000	-	11/05/2025	11/04/2026
Loop Antenna	EMCO	6502	00042960	11/05/2025	11/04/2026
Horn Antenna	SCHWARZBECK	BBHA 9170	1123	11/05/2025	11/04/2026
Power meter	Anritsu	ML2487A	6K00003613	11/05/2025	11/04/2026
Power sensor	Anritsu	MX248XD	--	11/05/2025	11/04/2026
Spectrum Analyzer	Keysight	N9010B	MY60241089	11/05/2025	11/04/2026


6. Test Results and Measurement Data

6.1. Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
E.U.T Antenna:	
The Bluetooth antenna is a Integral Antenna. it meets the standards, and the best case gain of the antenna is -6.40dBi. Please refer to the attached "OSW-825N Internal Photo" for the antenna location	

6.2. Conducted Emission

6.2.1. Test Specification

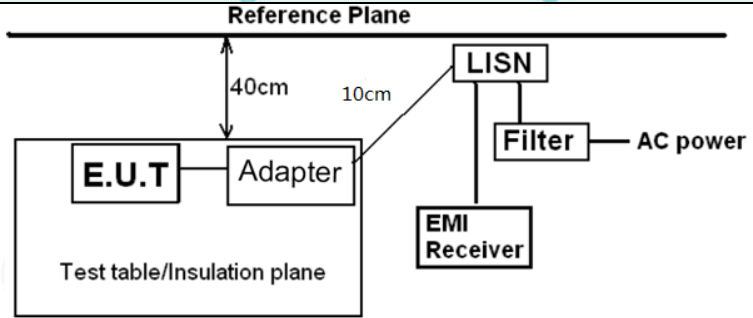Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2020														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	Reference Plane  Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m														
Test Mode:	Charging + Transmitting Mode														
Test Procedure:	1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2020 on conducted measurement.														
Test Result:	PASS														


6.2.2. EUT OPERATING CONDITIONS

The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Test data(Record only the worst-case mode: mid-channel of GFSK 1M modulation mode)


Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

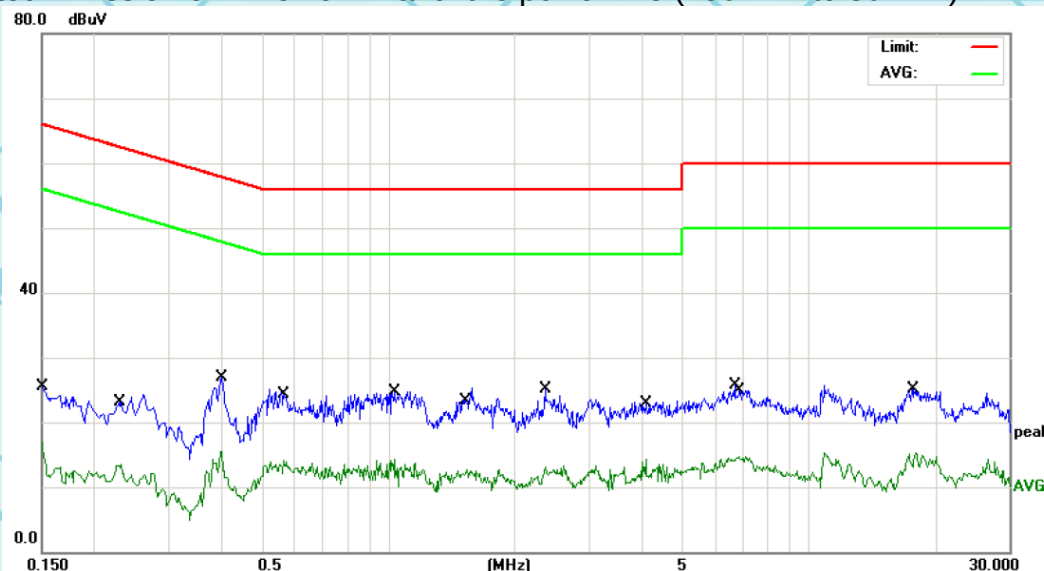

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1499	13.23	12.34	25.57	66.00	-40.43	QP
2		0.2316	1.10	12.45	13.55	52.39	-38.84	AVG
3	*	0.4018	14.35	12.54	26.89	57.82	-30.93	QP
4		0.5641	1.43	12.61	14.04	46.00	-31.96	AVG
5		1.0320	11.92	12.81	24.73	56.00	-31.27	QP
6		1.5355	-0.18	12.80	12.62	46.00	-33.38	AVG
7		2.3584	12.26	12.81	25.07	56.00	-30.93	QP
8		4.0918	1.44	12.90	14.34	46.00	-31.66	AVG
9		6.6623	12.53	13.25	25.78	60.00	-34.22	QP
10		6.8410	1.44	13.28	14.72	50.00	-35.28	AVG
11		17.7547	10.67	14.44	25.11	60.00	-34.89	QP
12		17.9440	0.76	14.48	15.24	50.00	-34.76	AVG

Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

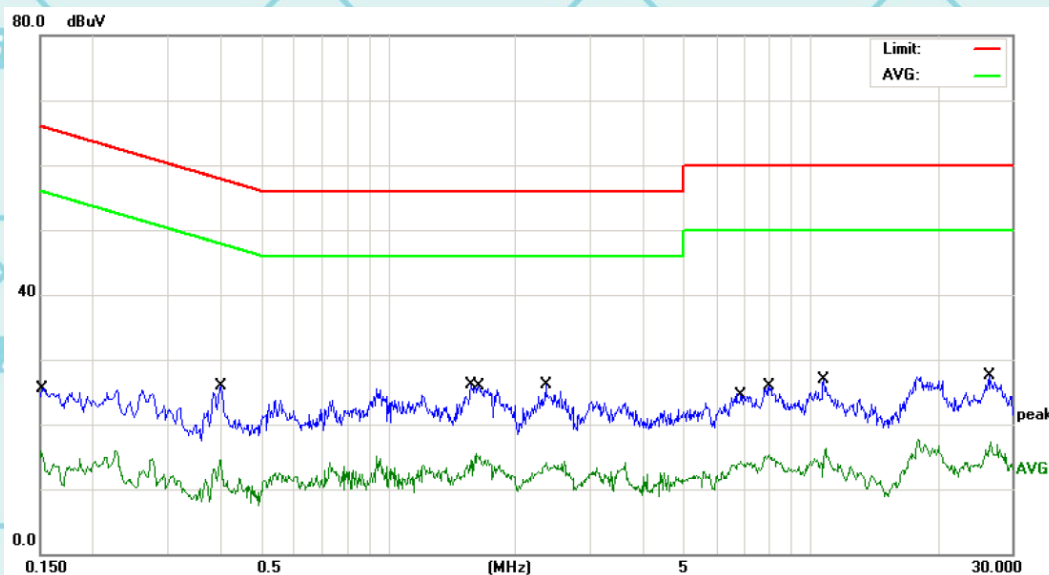

No.	Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB	Measure- ment dBμV	Limit dBμV	Over dB	Detector
1		0.1499	3.55	12.34	15.89	56.00	-40.11	AVG
2		0.1516	13.20	12.34	25.54	65.91	-40.37	QP
3		0.3976	1.87	12.54	14.41	47.90	-33.49	AVG
4		0.4018	13.35	12.54	25.89	57.82	-31.93	QP
5	*	1.5684	13.37	12.80	26.17	56.00	-29.83	QP
6		1.6189	2.67	12.80	15.47	46.00	-30.53	AVG
7		2.3584	13.26	12.81	26.07	56.00	-29.93	QP
8		6.8410	0.94	13.28	14.22	50.00	-35.78	AVG
9		7.9774	12.42	13.47	25.89	60.00	-34.11	QP
10		10.8473	2.41	13.81	16.22	50.00	-33.78	AVG
11		26.4176	11.92	15.50	27.42	60.00	-32.58	QP
12		26.6992	1.66	15.59	17.25	50.00	-32.75	AVG

Note1:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = LISN Factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Measurement (dBμV) – Limits (dBμV)

Q.P. =Quasi-Peak AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

6.3. Conducted Output Power

6.3.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2020
Limit:	30dBm
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Refer to item 4.1
Test Procedure:	- The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 15.247 Meas Guidance v05r02. - Set spectrum analyzer as following: - Set the RBW $\geq$ DTS bandwidth. - Set VBW $\geq 3 \times$ RBW. - Set span $\geq 3 \times$ RBW - Sweep time = auto couple. - Detector = peak. - Trace mode = max hold. - Allow trace to fully stabilize. - Use peak marker function to determine the peak amplitude level.
Test Result:	PASS


6.3.2. Test Data

BLE 1M			
Test channel	Maximum conducted output power (dBm)	Limit (dBm)	Result
Lowest	2.45	30.00	PASS
Middle	3.72	30.00	PASS
Highest	4.17	30.00	PASS



BLE 2M			
Test channel	Maximum Conducted Output Power (dBm)	Limit (dBm)	Result
Lowest	2.79	30.00	PASS
Middle	3.41	30.00	PASS
Highest	4.03	30.00	PASS

Test plots as follows:



Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

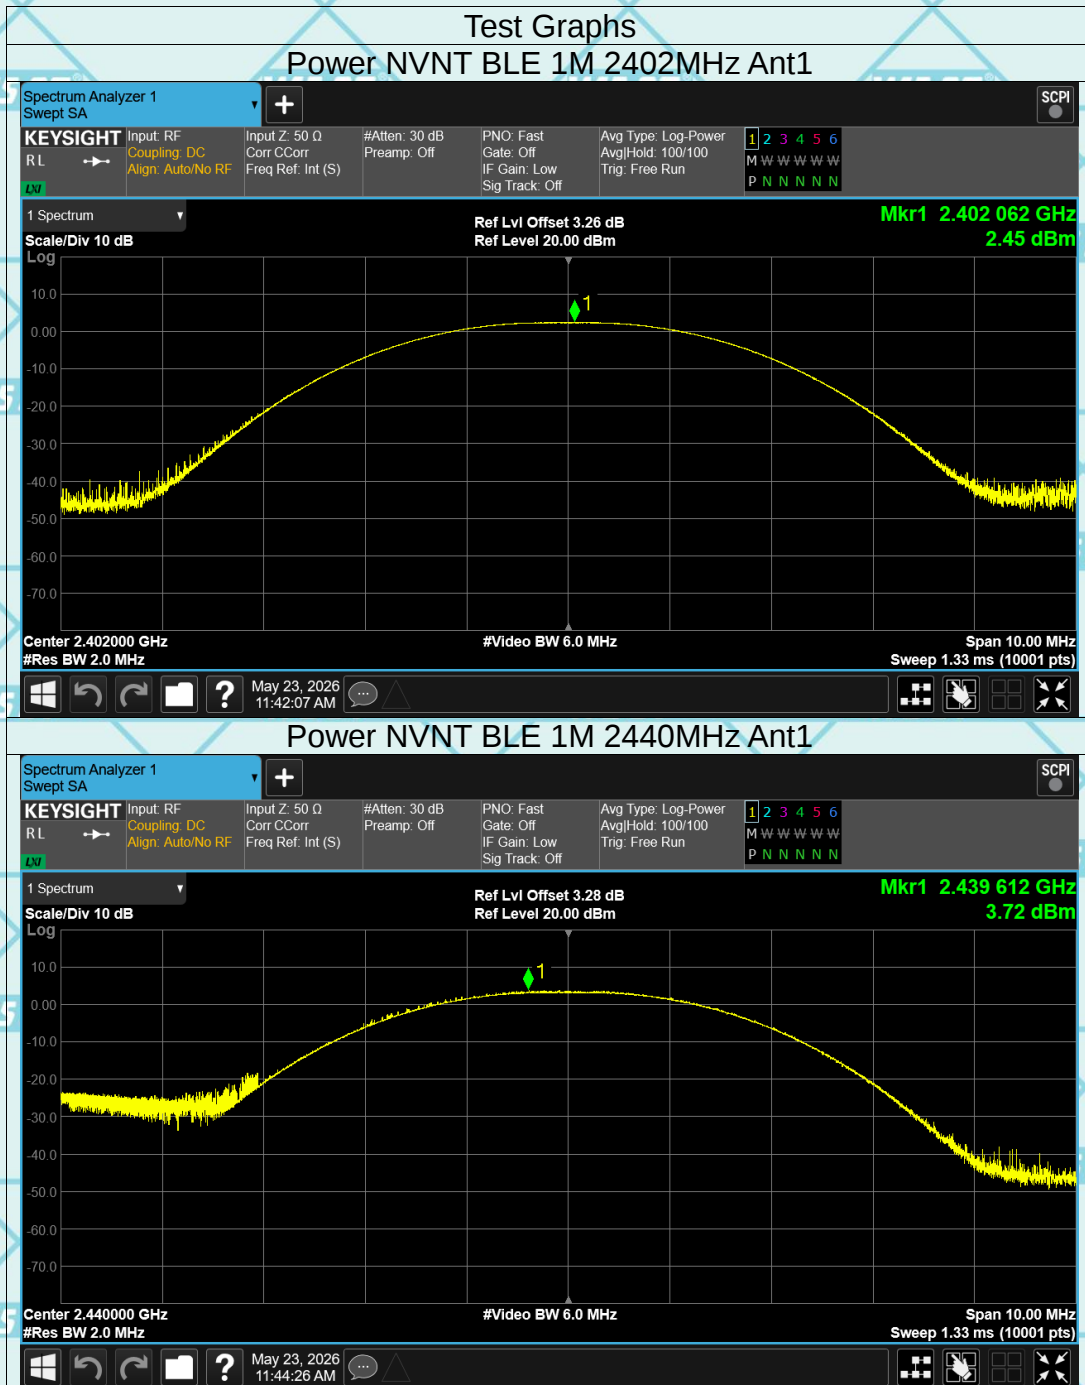

Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

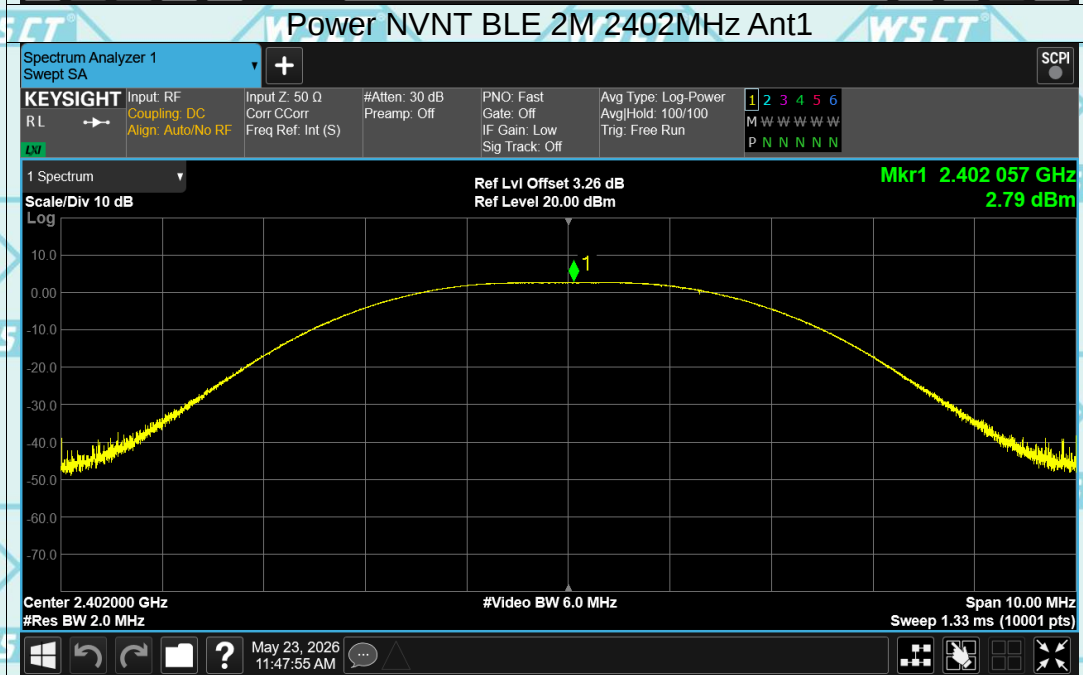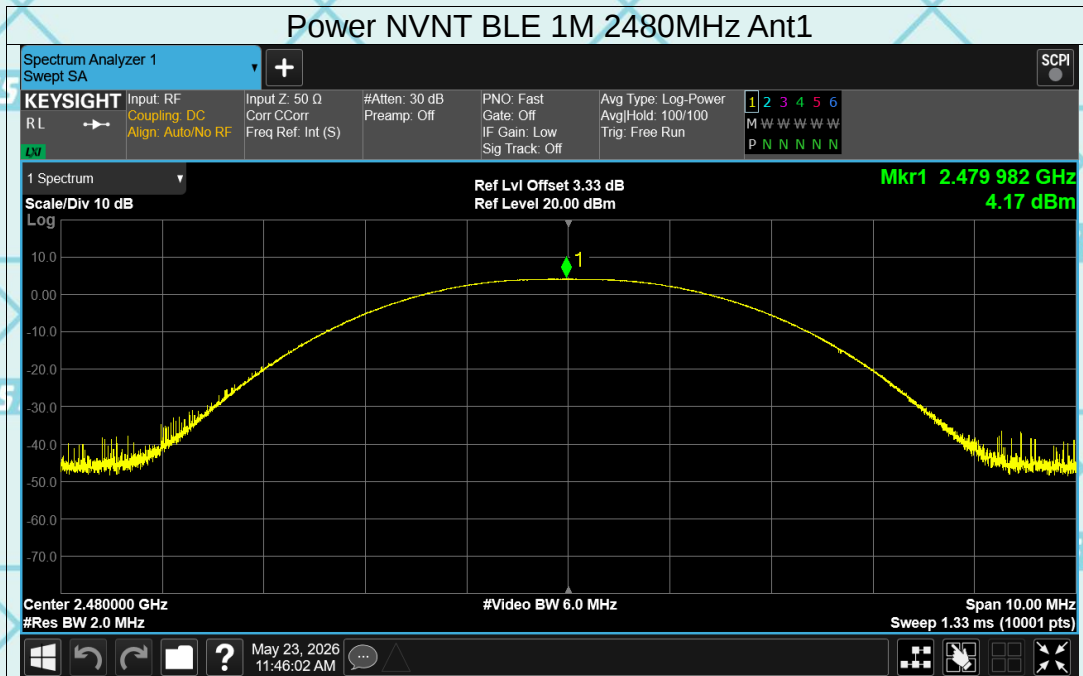

Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

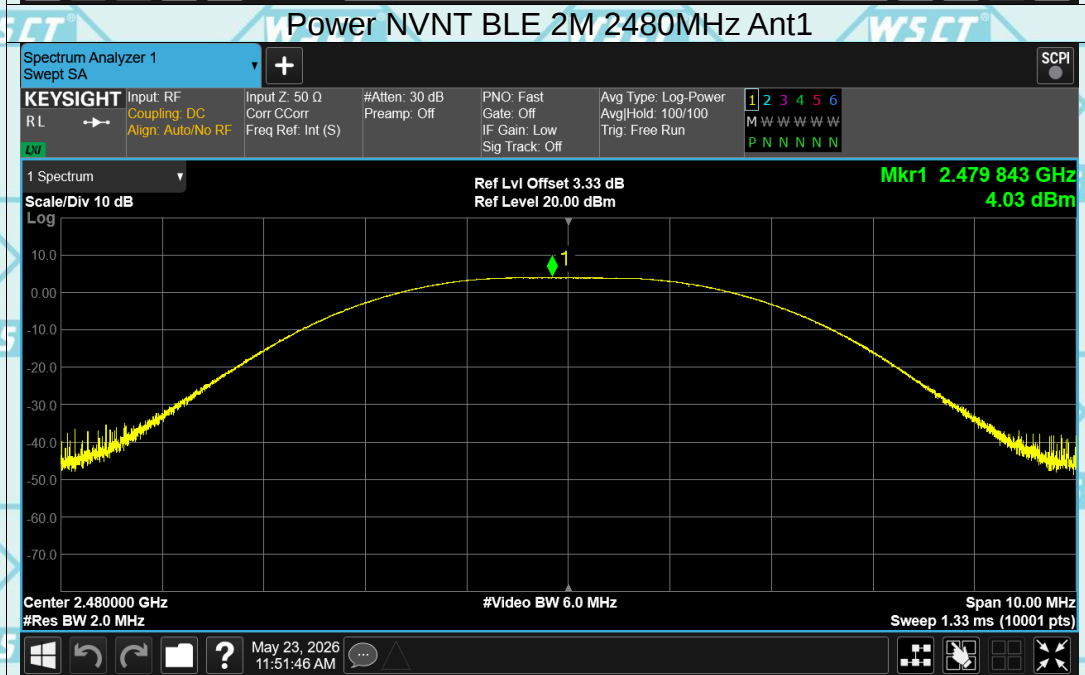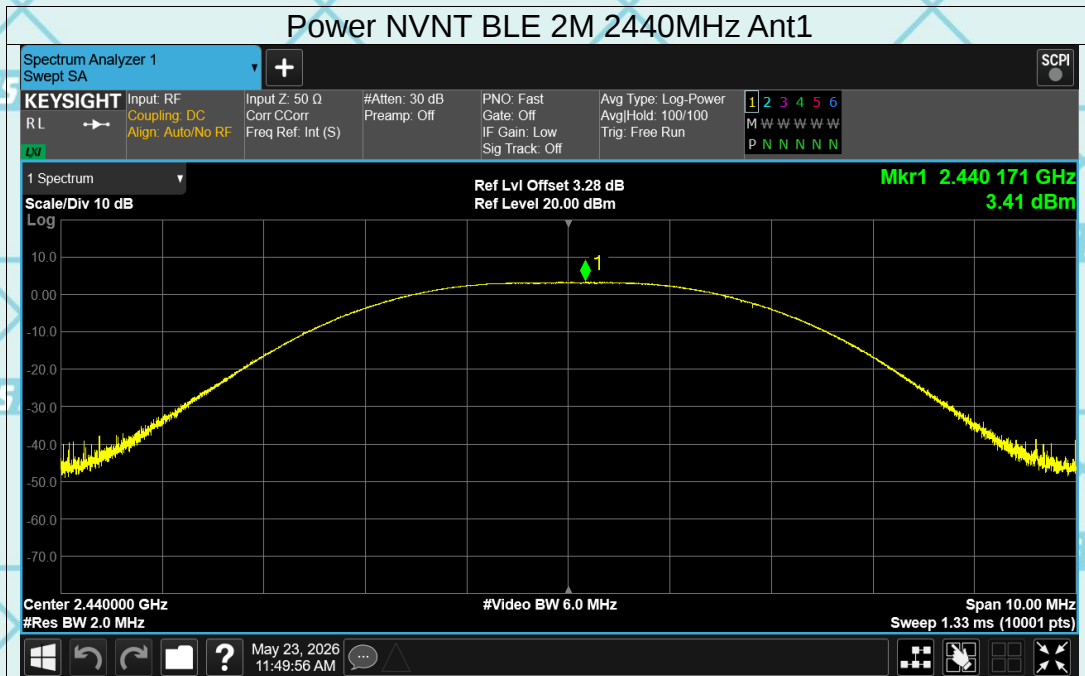

6.4. Emission Bandwidth

6.4.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2020
Limit:	>500kHz
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Refer to item 4.1
Test Procedure:	1. The testing follows FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement The 6dB bandwidth must be greater than 500 kHz. 4. Measure and record the results in the test report.
Test Result:	PASS

6.4.2. Test data

BLE 1M

Test channel	6dB Emission Bandwidth (MHz)		
	BT LE mode	Limit	Result
Lowest	0.6523	>0.5M	PASS
Middle	0.6606	>0.5M	
Highest	0.6465	>0.5M	

BLE 2M


Test channel	6dB Emission Bandwidth (MHz)		
	BT LE mode	Limit	Result
Lowest	1.109	>0.5M	PASS
Middle	1.138	>0.5M	
Highest	1.142	>0.5M	

Test plots as follows:

Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

Test Graphs



-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

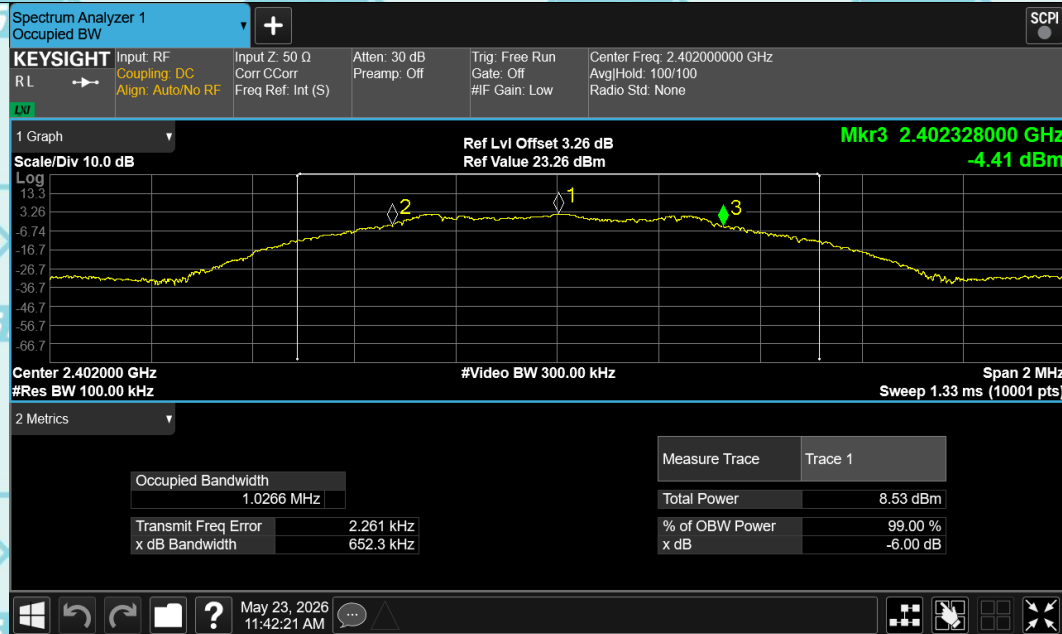



-6dB Bandwidth NVNT BLE 1M 2440MHz Ant1



Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

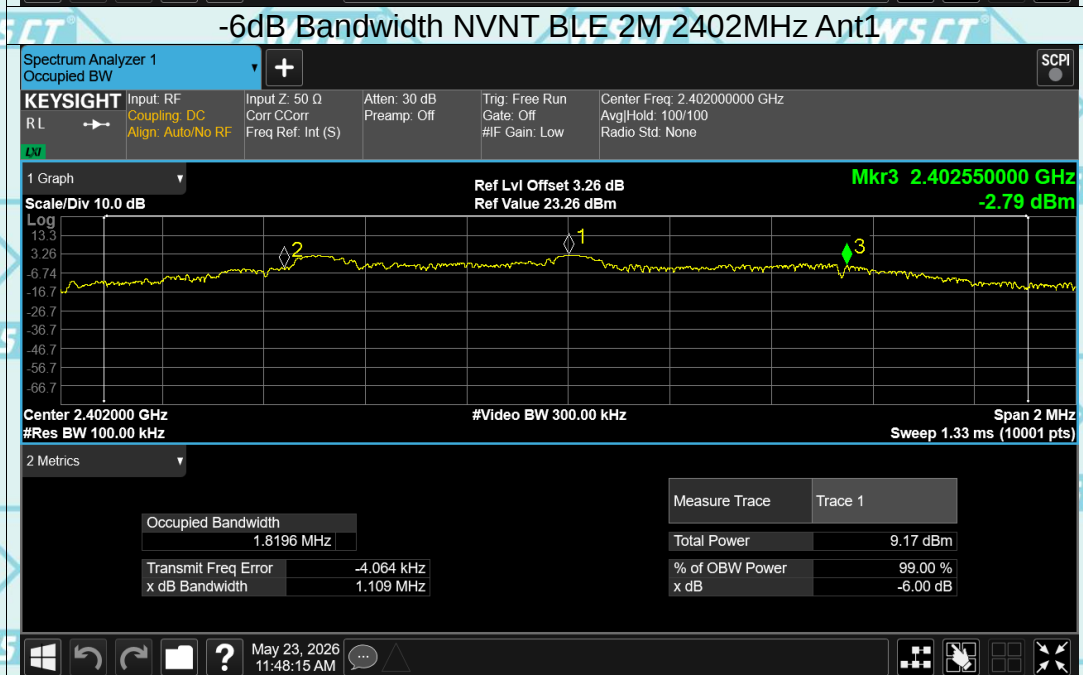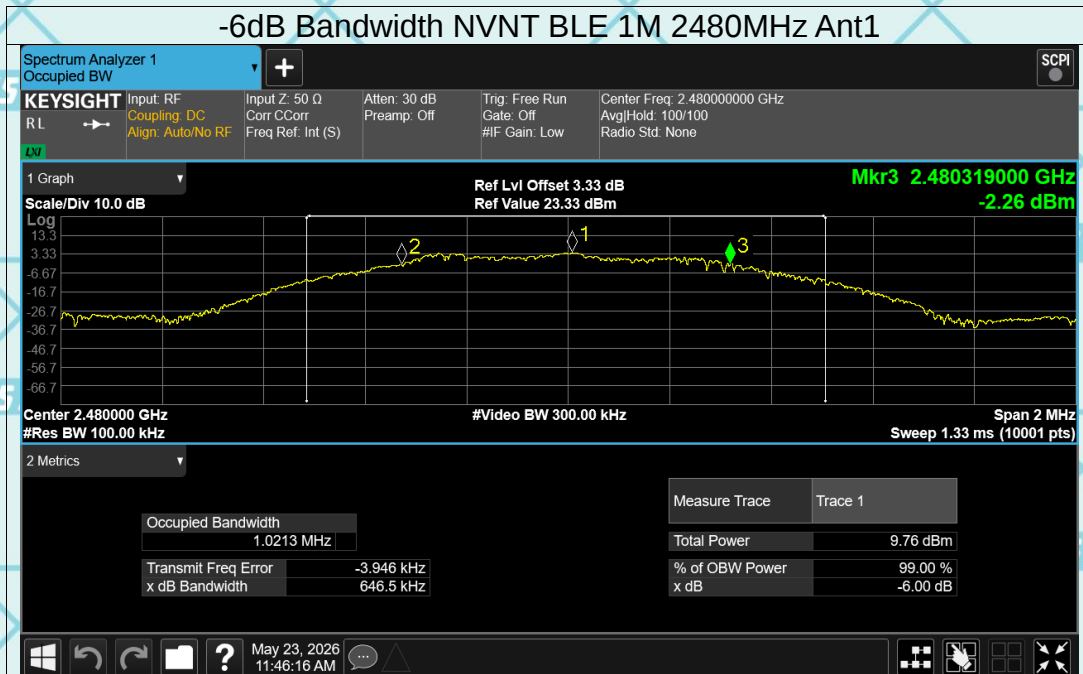

Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

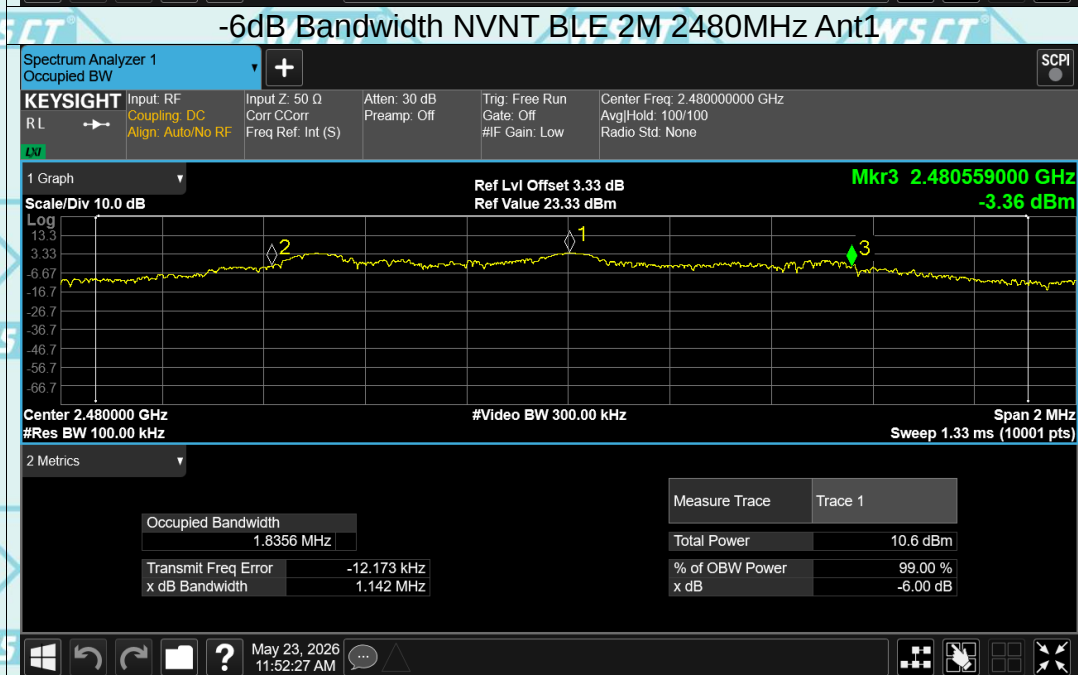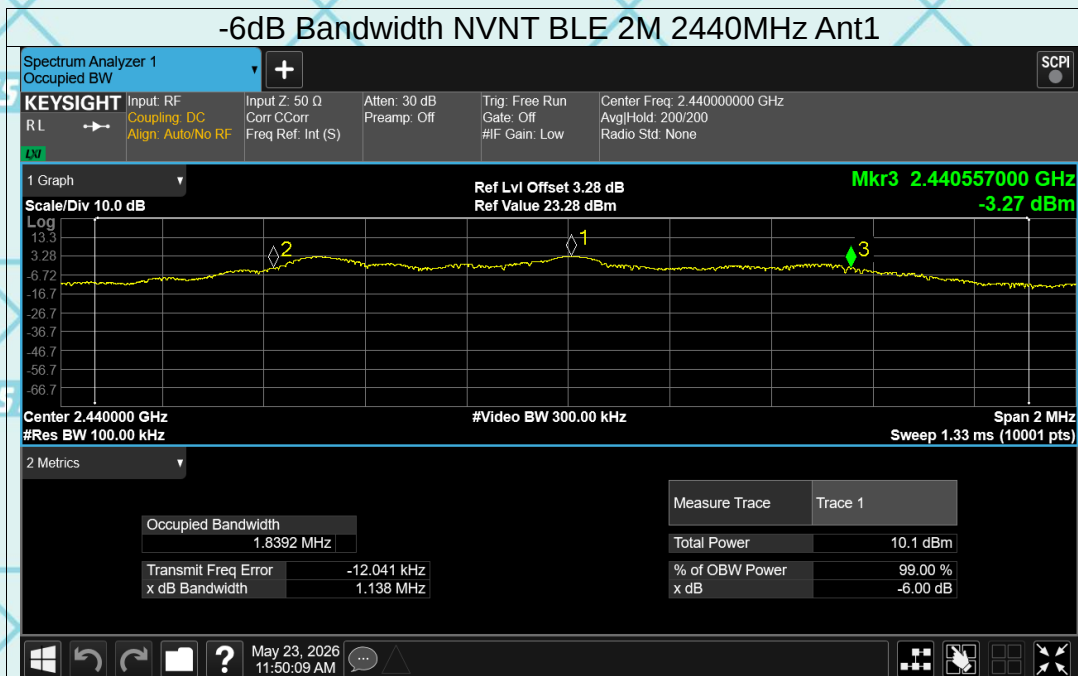

6.5. Power Spectral Density

6.5.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.10:2020
Limit:	The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Refer to item 4.1
Test Procedure:	1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW): $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$. Video bandwidth VBW $\geq 3 \times \text{RBW}$. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW) 5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level. 6. Measure and record the results in the test report.
Test Result:	PASS

6.5.2. Test data

Test channel	Power Spectral Density (dBm/3kHz)		
	BLE 1M	Limit	Result
Lowest	-13.15	8 dBm/3kHz	PASS
Middle	-12.97	8 dBm/3kHz	
Highest	-11.92	8 dBm/3kHz	


Test channel	Power Spectral Density (dBm/3kHz)		
	BLE 2M	Limit	Result
Lowest	-14.78	8 dBm/3kHz	PASS
Middle	-14.21	8 dBm/3kHz	
Highest	-13.33	8 dBm/3kHz	

Test plots as follows:


Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

Test Graphs

PSD NVNT BLE 1M 2402MHz Ant1

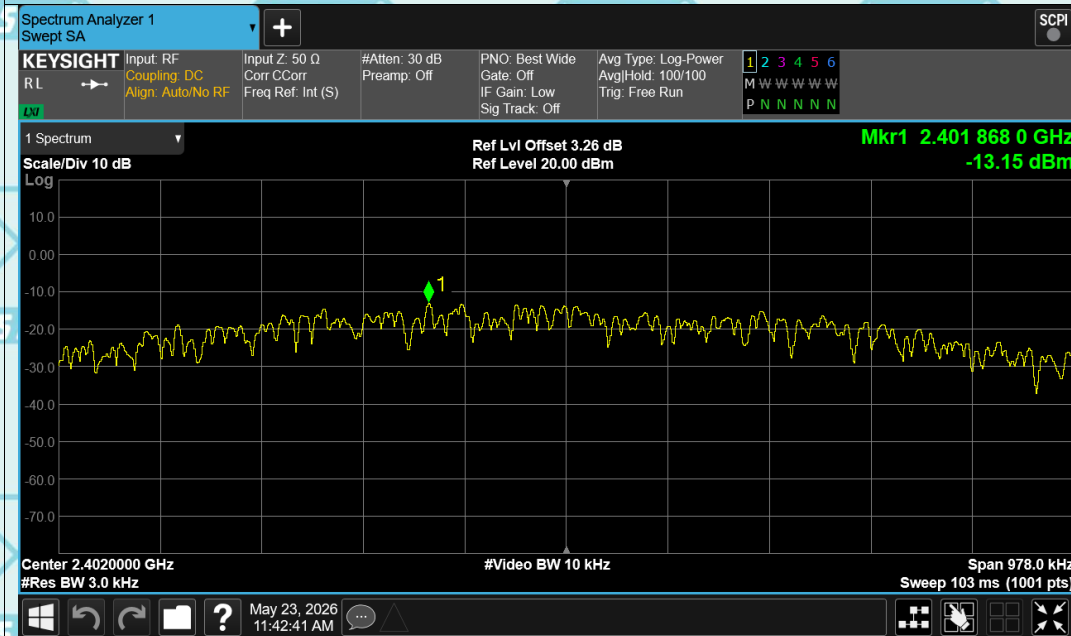

PSD NVNT BLE 1M 2440MHz Ant1

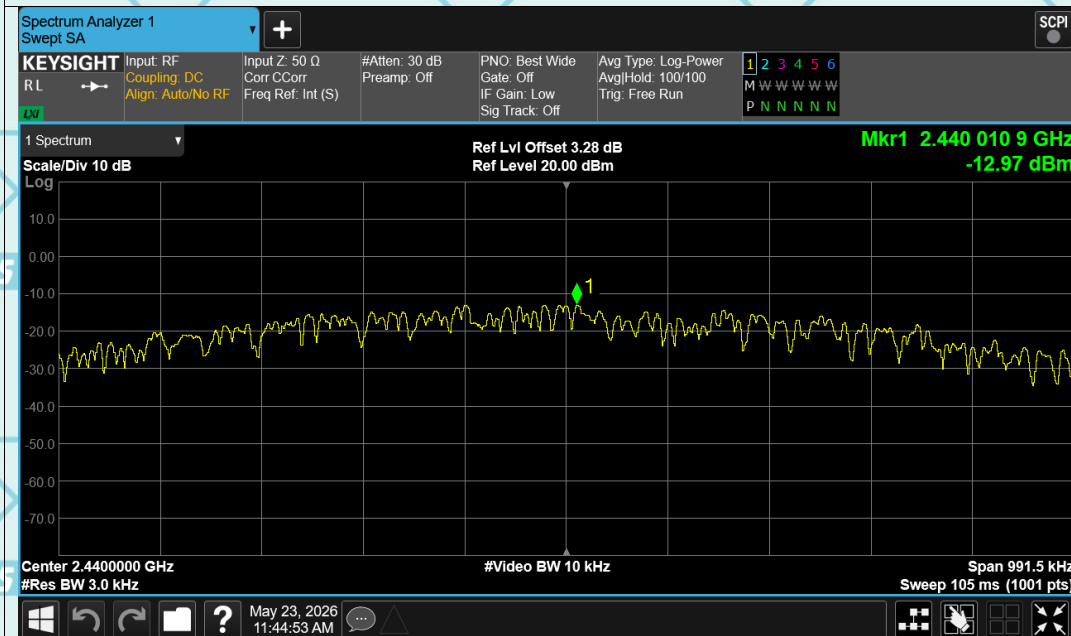

Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

PSD NVNT BLE 1M 2480MHz Ant1




PSD NVNT BLE 2M 2402MHz Ant1




Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

PSD NVNT BLE 2M 2440MHz Ant1

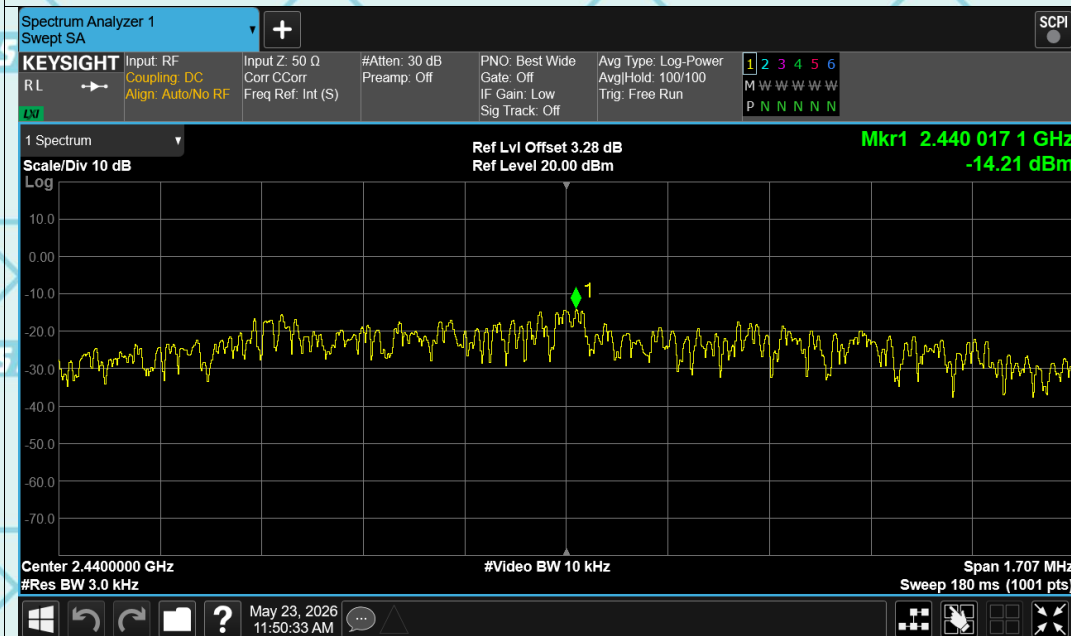


PSD NVNT BLE 2M 2480MHz Ant1

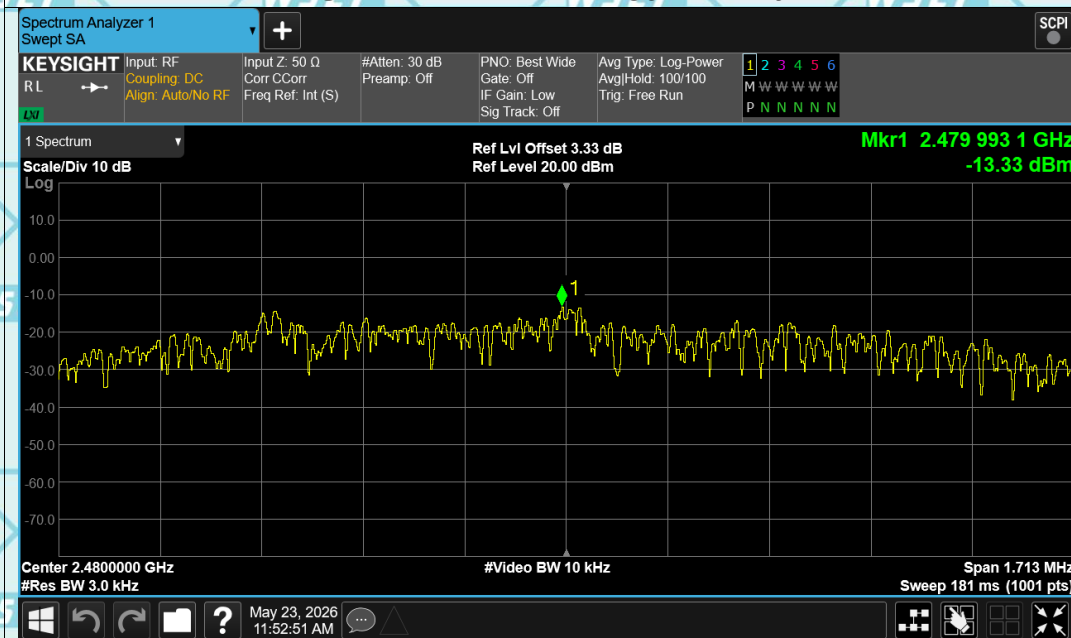


6.6. Conducted Band Edge and Spurious Emission Measurement



6.6.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2020
Limit:	In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Refer to item 4.1
Test Procedure:	1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d). 4. Measure and record the results in the test report. 5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS



Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

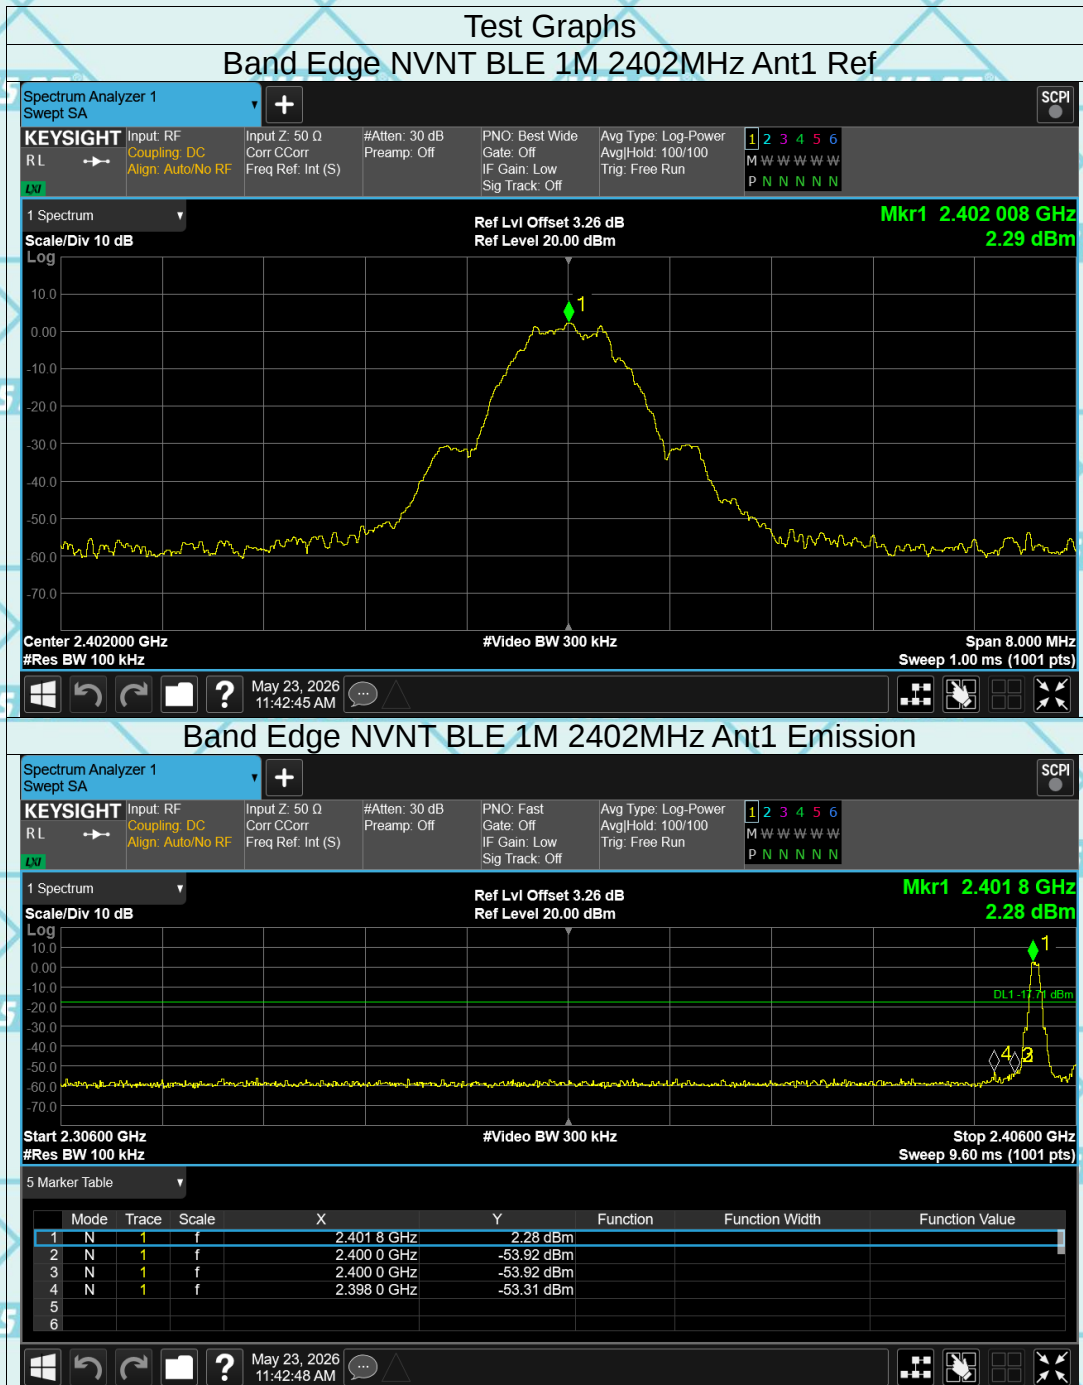



Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

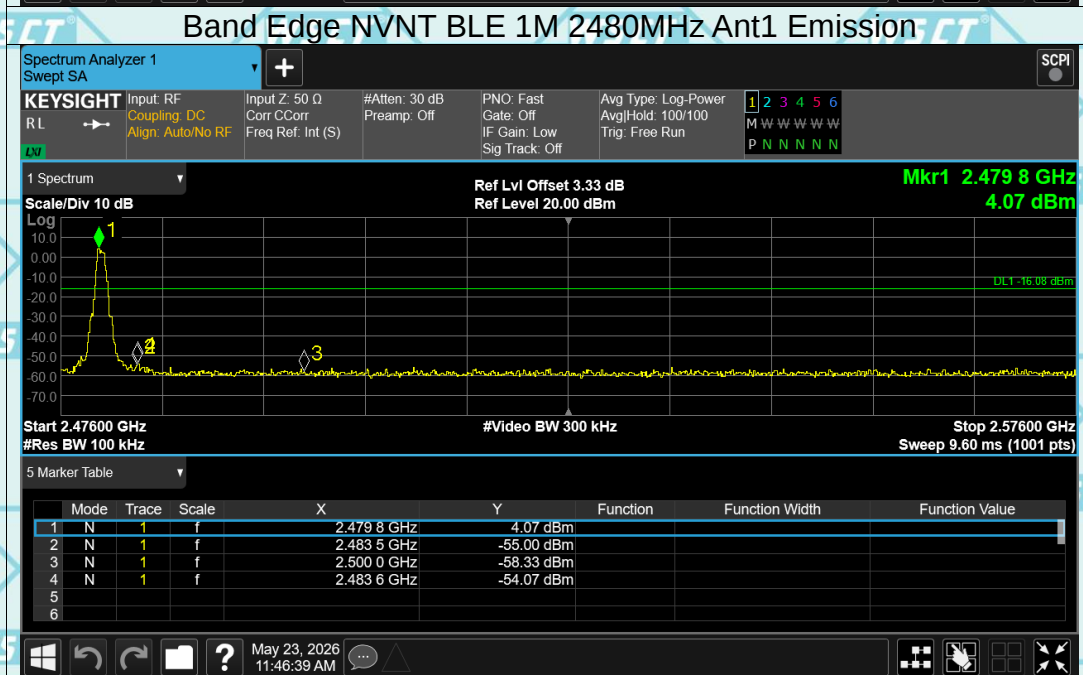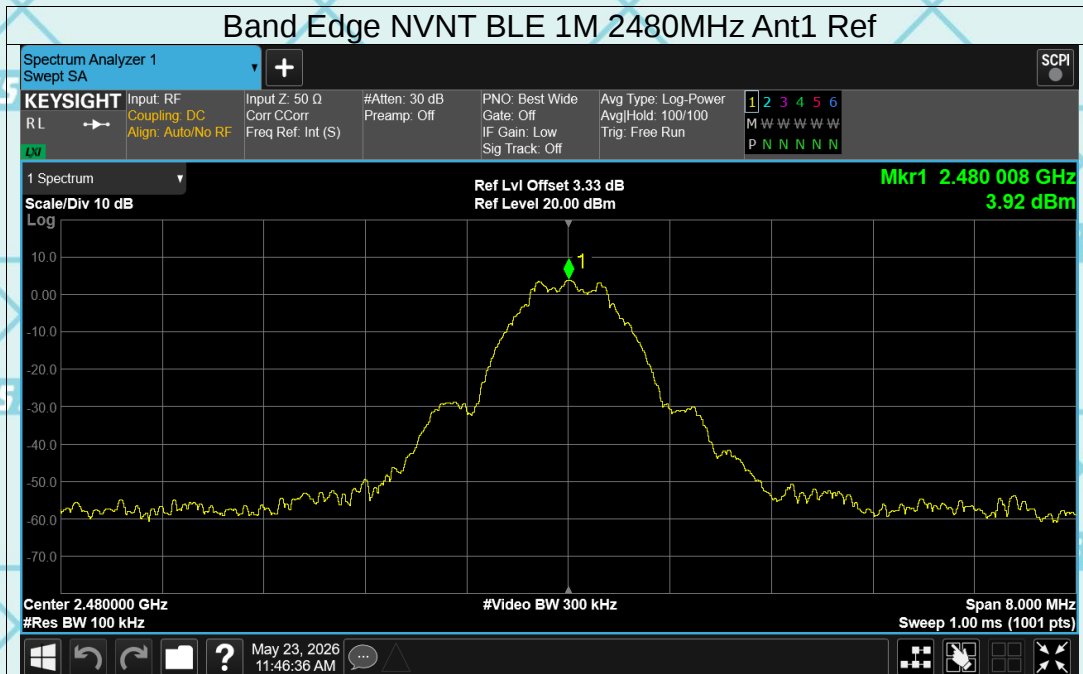

Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

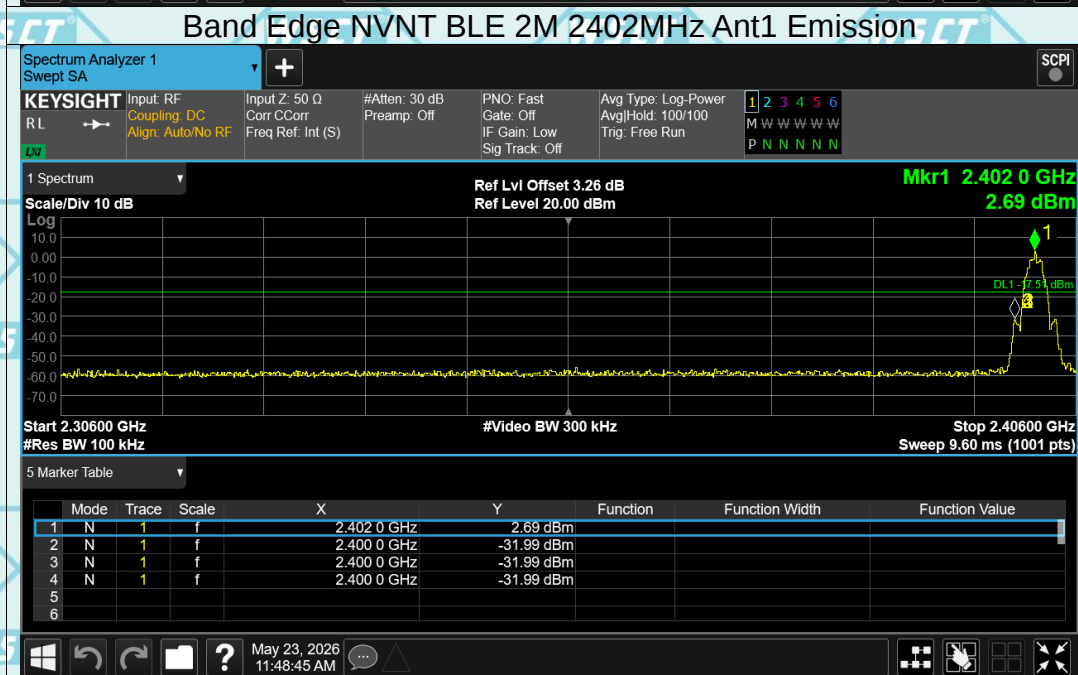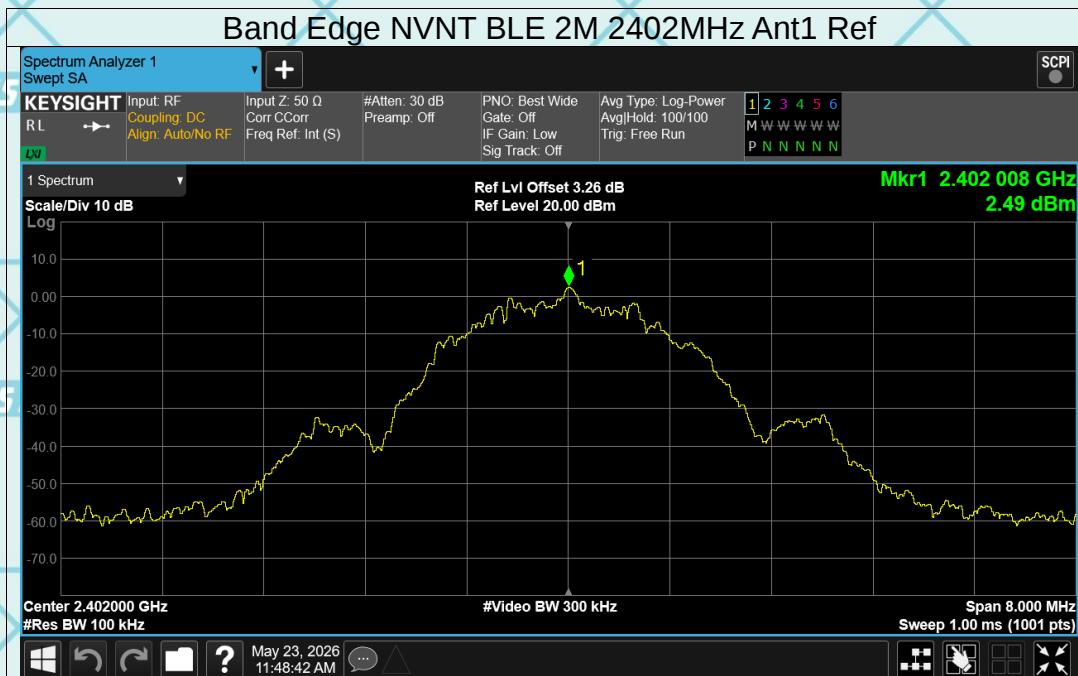



Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

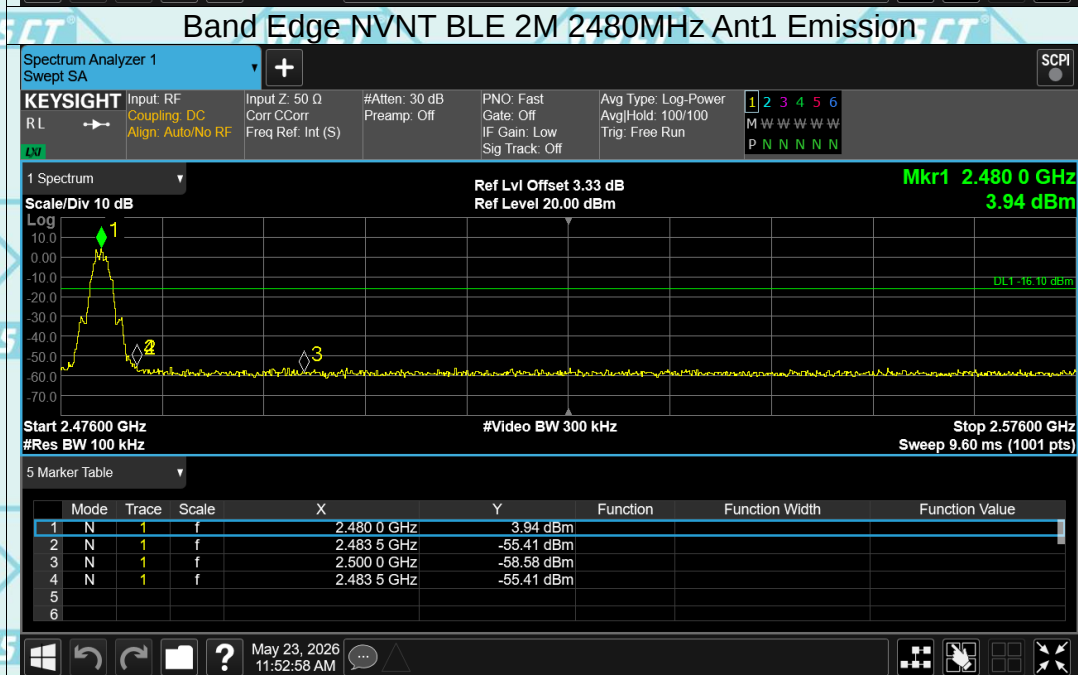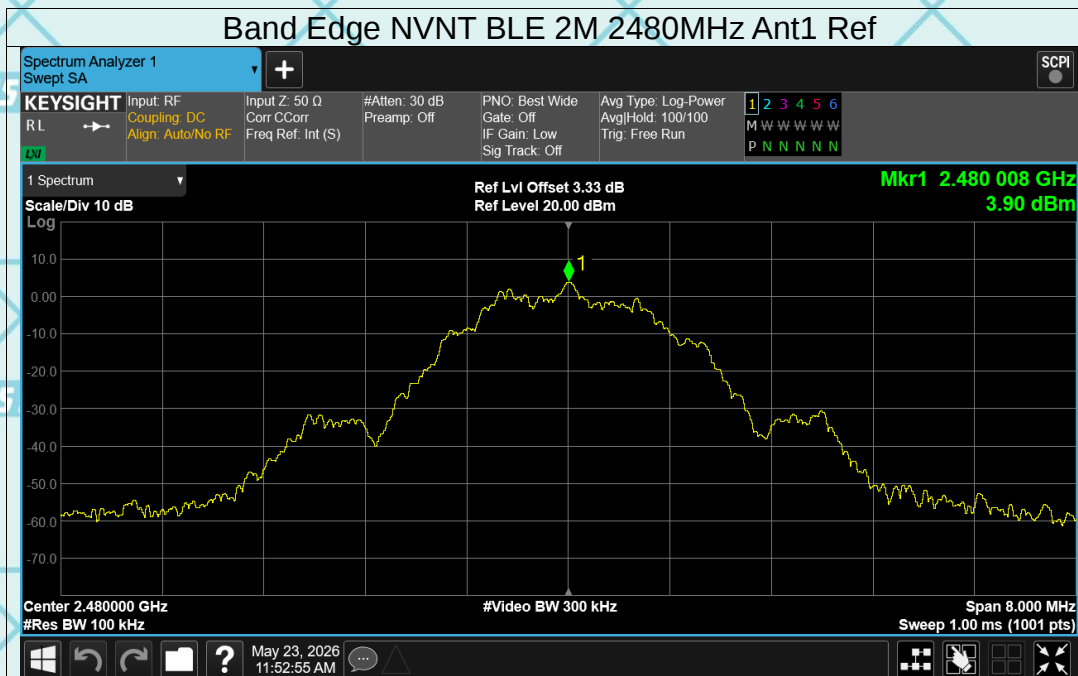



Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026
Conducted RF Spurious Emission





Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

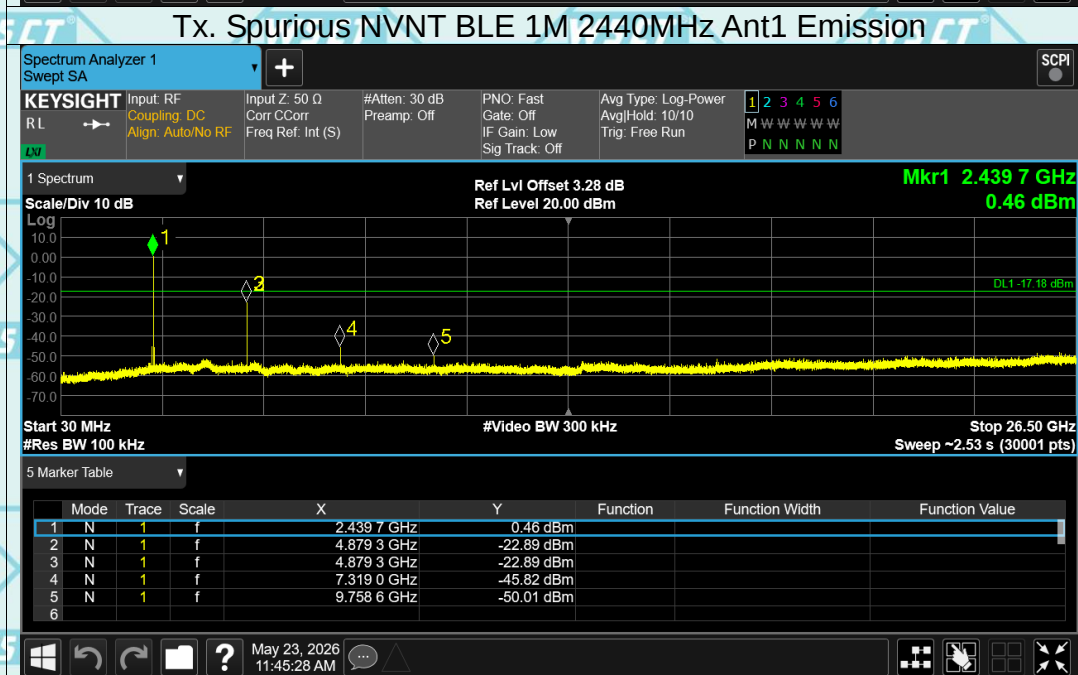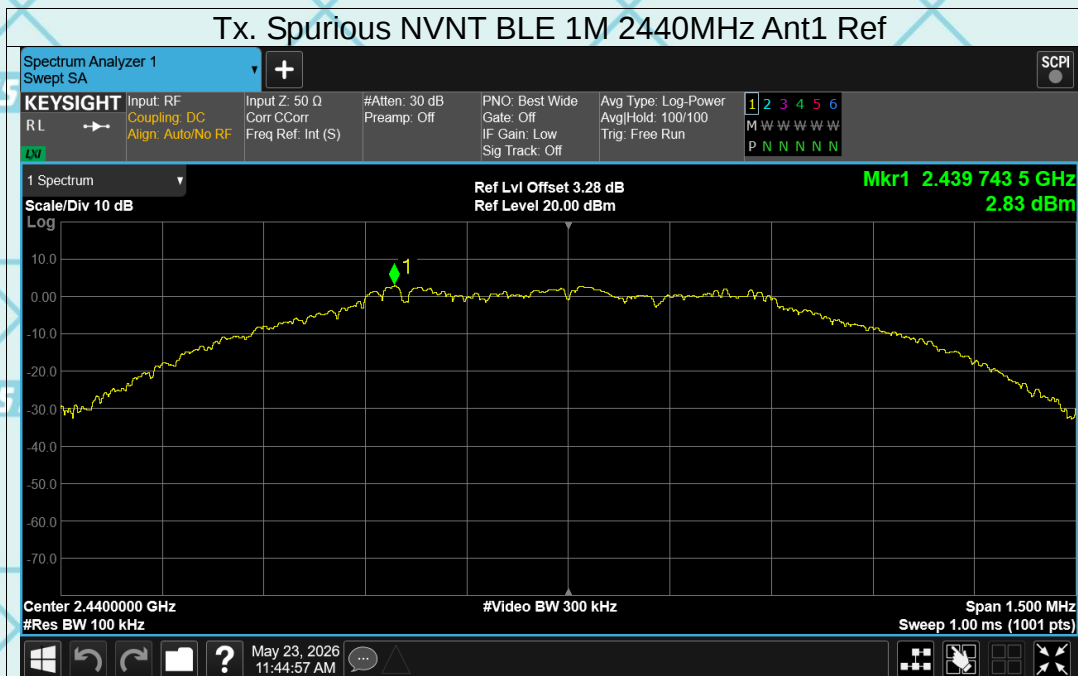



Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

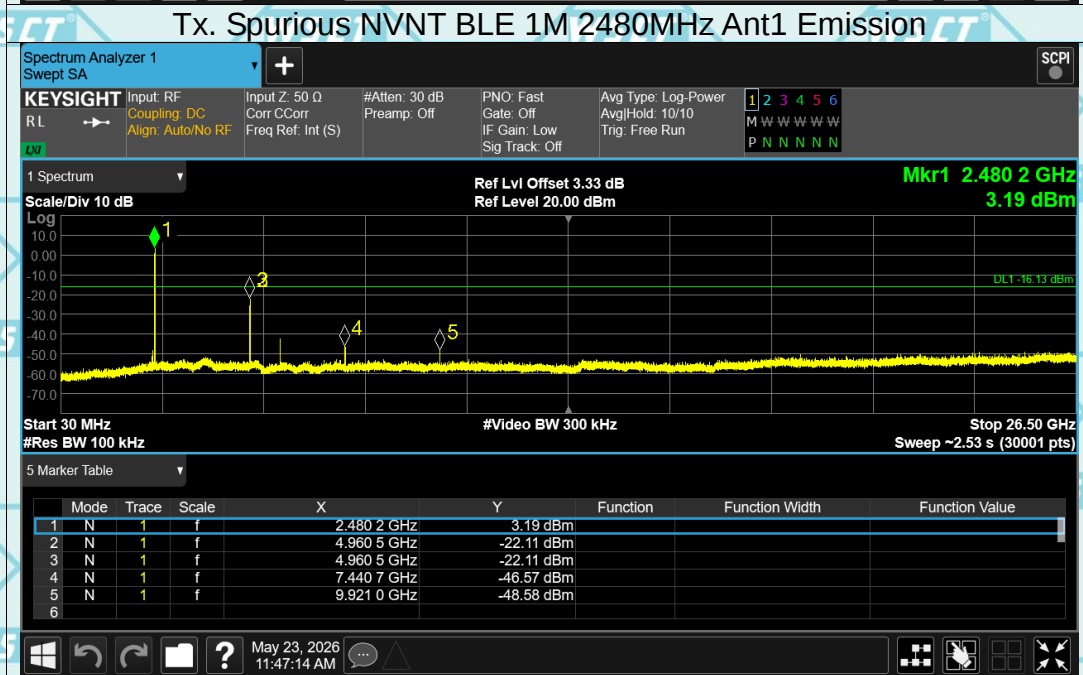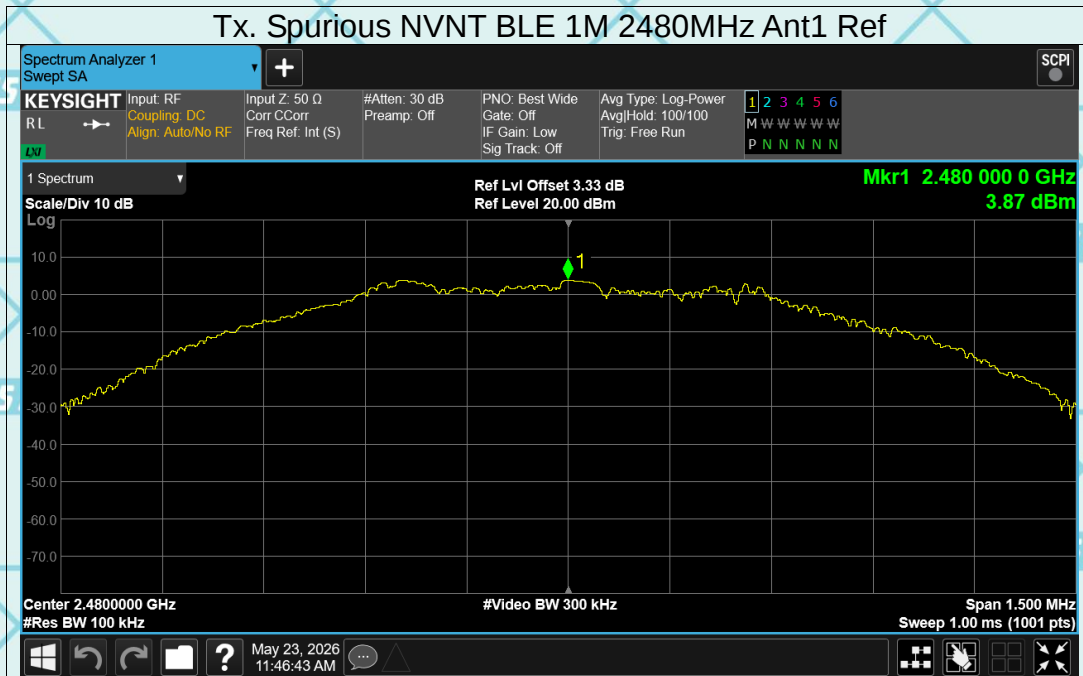



Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

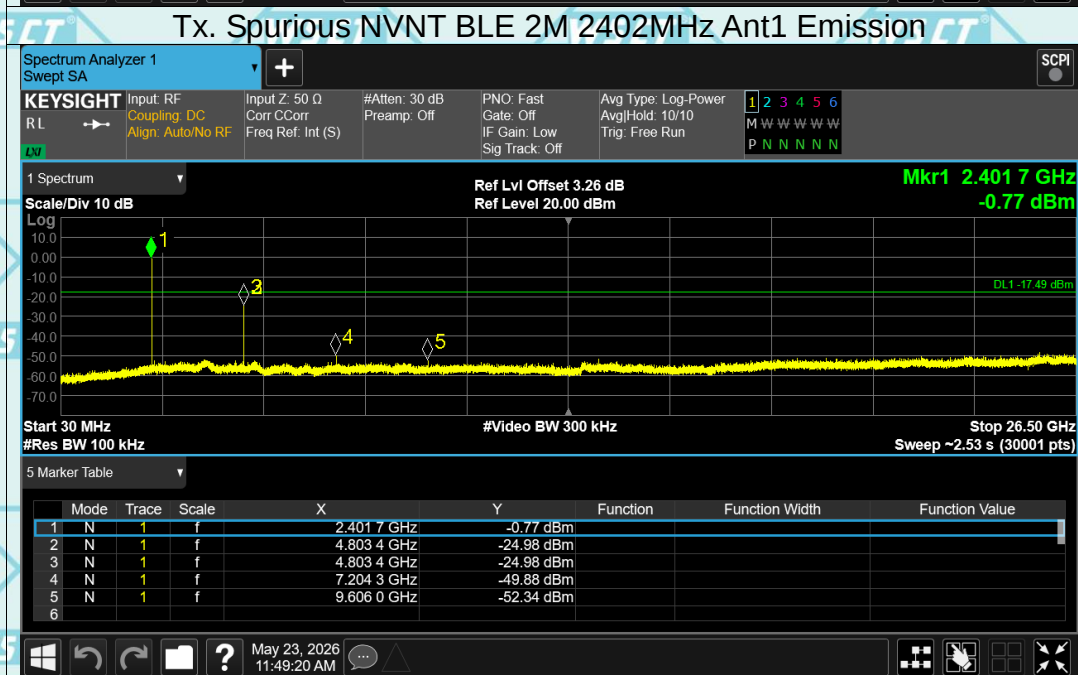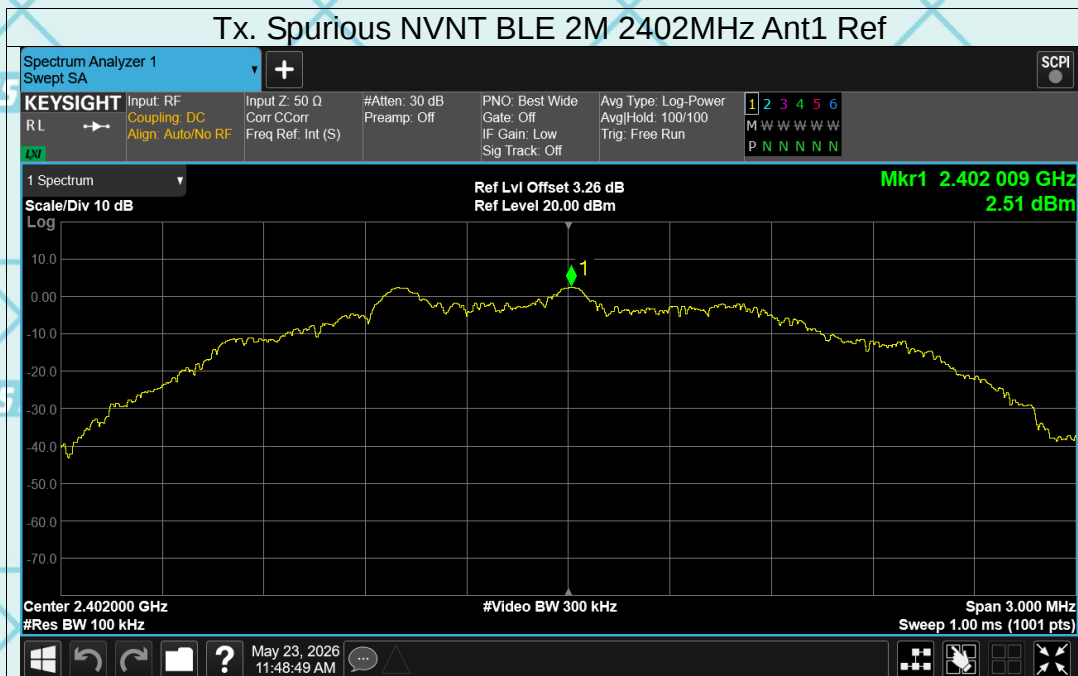

Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

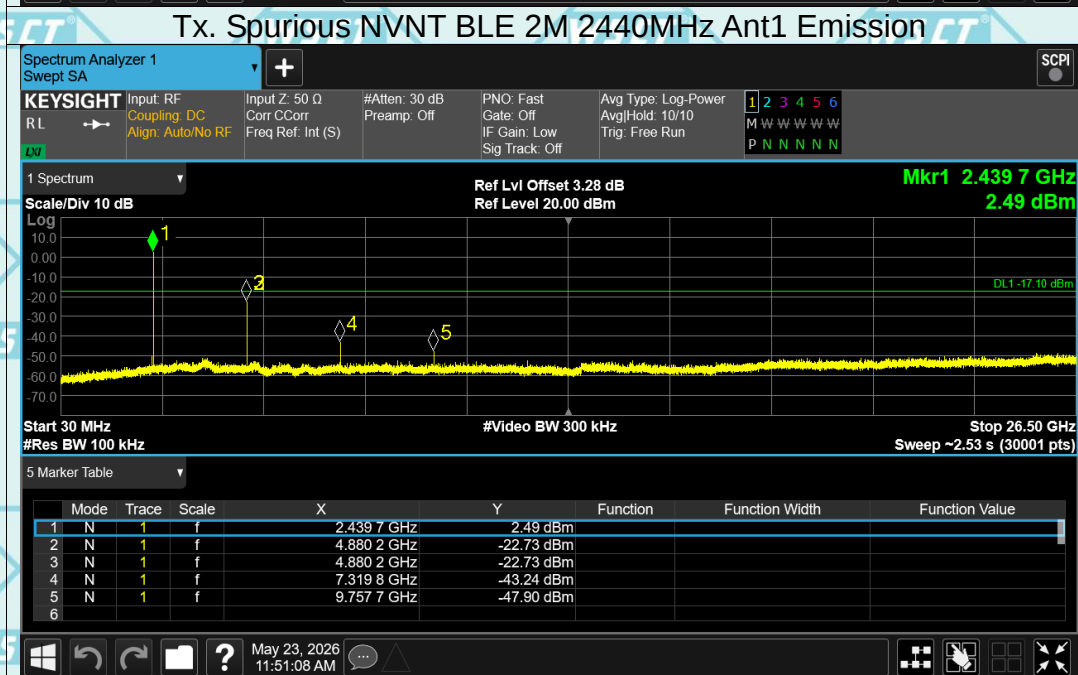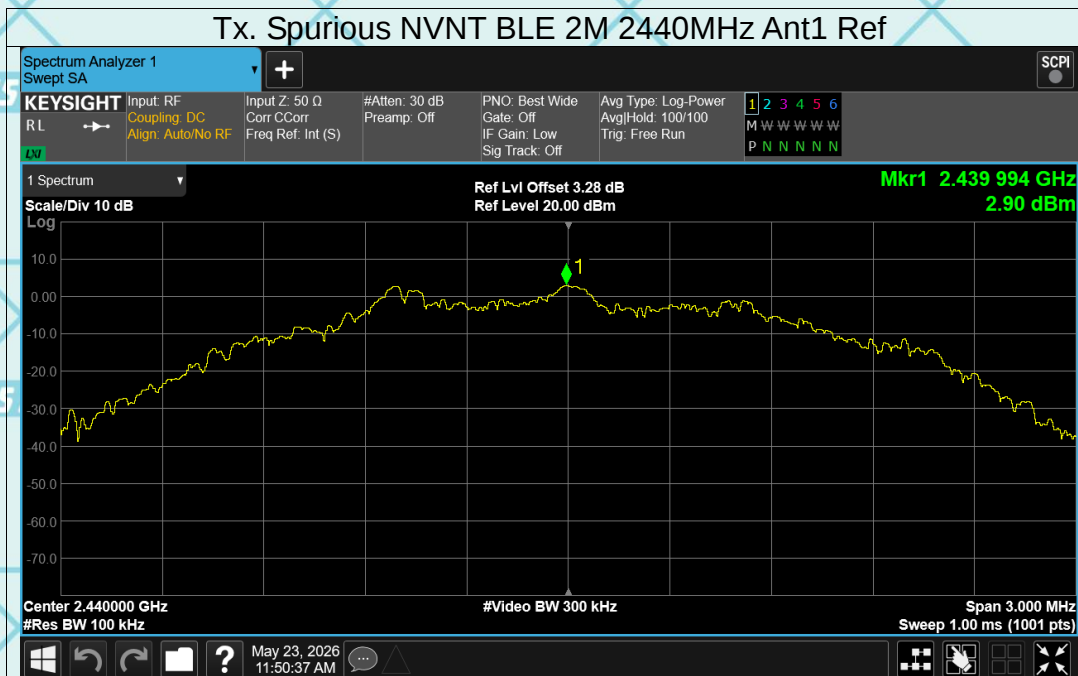



Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

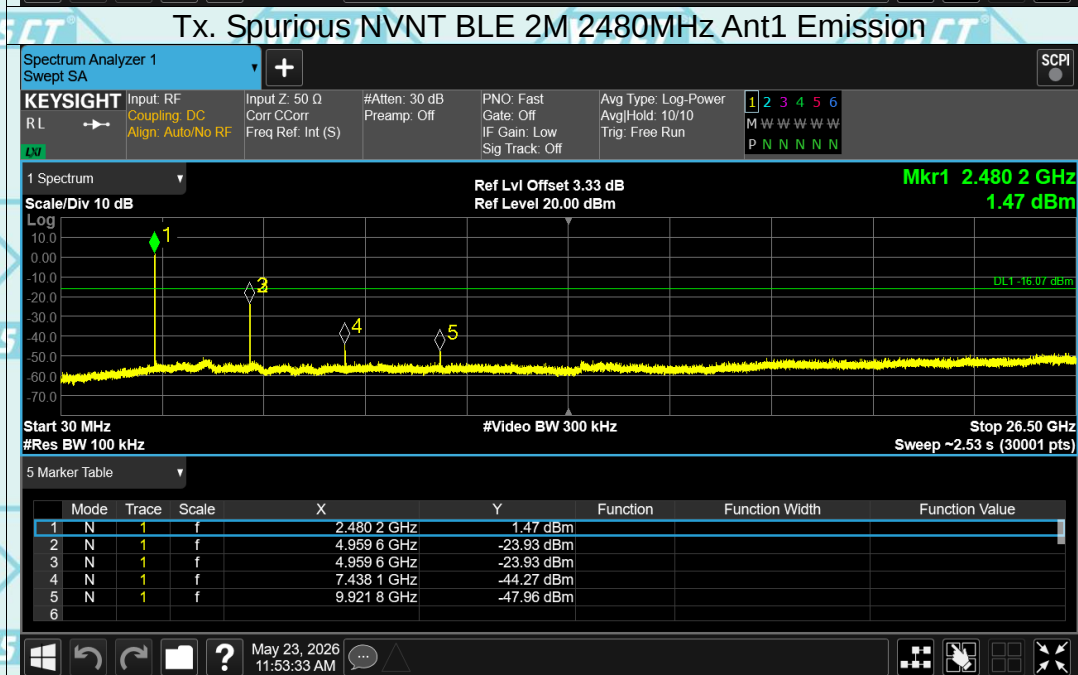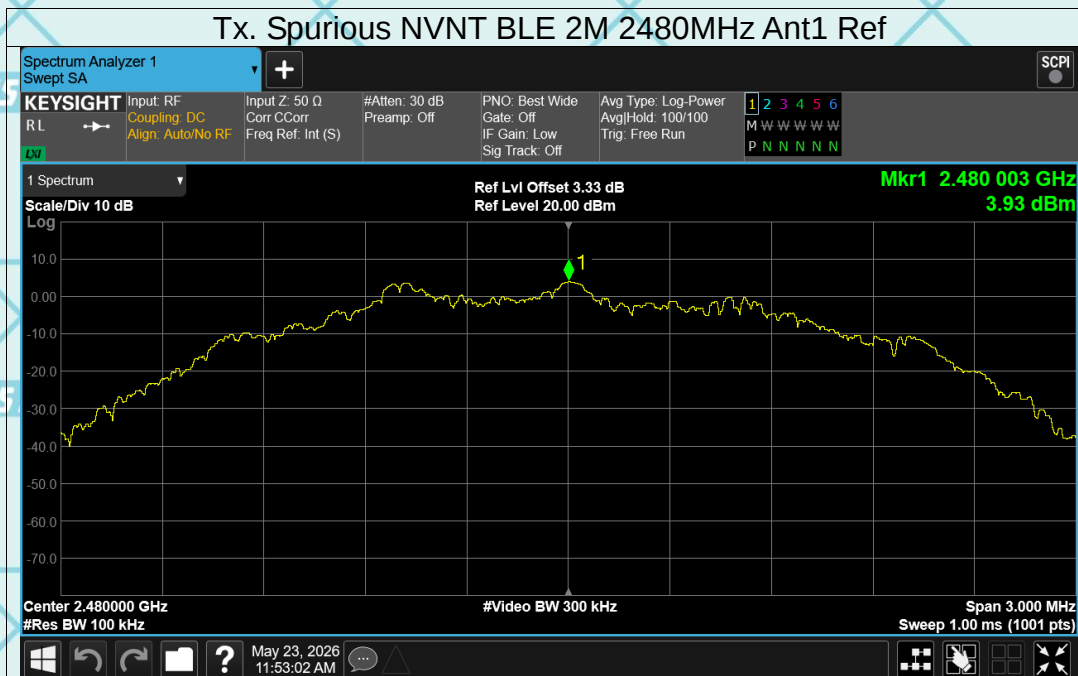


6.7. Radiated Spurious Emission Measurement

6.7.1. Test Specification

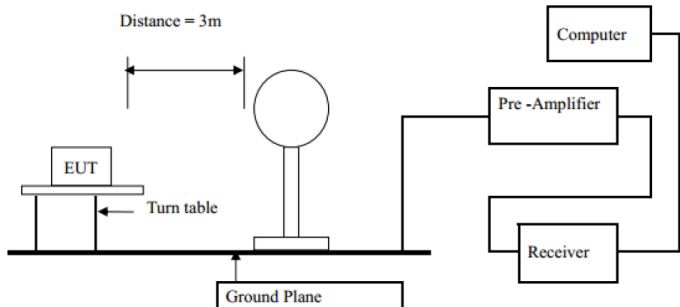Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2020				
Frequency Range:	9 kHz to 25 GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Operation mode:	Refer to item 4.1				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Limit:		Peak	1MHz	10Hz	Average Value
	Frequency	Field Strength (microvolts/meter)		Measurement Distance (meters)	
	0.009-0.490	2400/F(KHz)		300	
	0.490-1.705	24000/F(KHz)		30	
	1.705-30	30		30	
	30-88	100		3	
	88-216	150		3	
	216-960	200		3	
	Above 960	500		3	
		Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector
	Above 1GHz	500	3	Average	
		5000	3	Peak	
Test setup:	For radiated emissions below 30MHz				
					
Test setup:	30MHz to 1GHz				

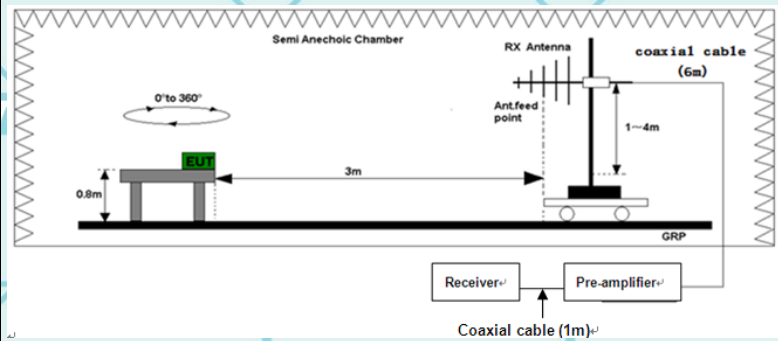

Above 1GHz

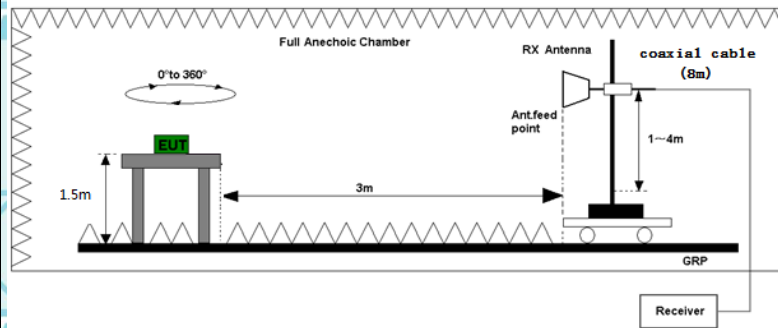

Test Procedure:

- For the radiated emission test below 1GHz:
The EUT was placed on a turntable with 0.1 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.
For the radiated emission test above 1GHz:
Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- Corrected Reading: Antenna Factor + Cable Loss +

	Read Level - Preamplifier Factor = Level 3. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported. 4. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold; (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Test mode:	Refer to section 4.1 for details
Test results:	PASS

Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz, According the ANSI C63.10-2020, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note 4: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.

Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

6.7.2. Test Data

Please refer to following diagram for individual
Below 1GHz


Horizontal:



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		50.3700	30.69	-7.51	23.18	40.00	-16.82	QP
2		159.0100	26.03	-6.69	19.34	43.50	-24.16	QP
3		383.0799	25.56	-4.29	21.27	46.00	-24.73	QP
4		520.8200	25.02	-0.52	24.50	46.00	-21.50	QP
5		697.3600	25.27	3.14	28.41	46.00	-17.59	QP
6	*	808.9099	25.75	5.16	30.91	46.00	-15.09	QP

Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

Vertical:

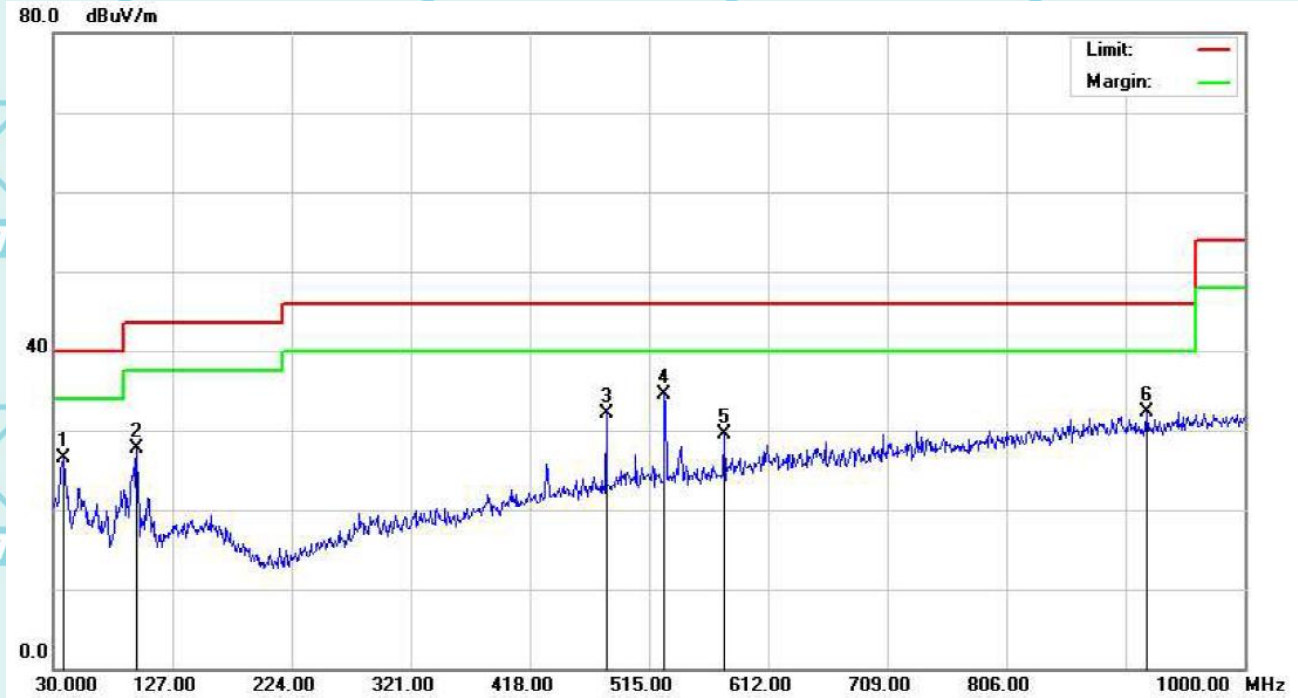

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		37.7599	47.04	-20.52	26.52	40.00	-13.48	QP
2		97.9000	47.82	-20.21	27.61	43.50	-15.89	QP
3		480.0800	50.47	-18.36	32.11	46.00	-13.89	QP
4	*	527.6100	52.63	-18.11	34.52	46.00	-11.48	QP
5		576.1100	47.41	-17.85	29.56	46.00	-16.44	QP
6		920.4600	48.14	-15.83	32.31	46.00	-13.69	QP

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

Above 1GHz


Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

Note 3 BLE 1M and 2M both tested the report and only recorded the worst-case scenario 1M:

Low channel: 2402MHz


Horizontal:

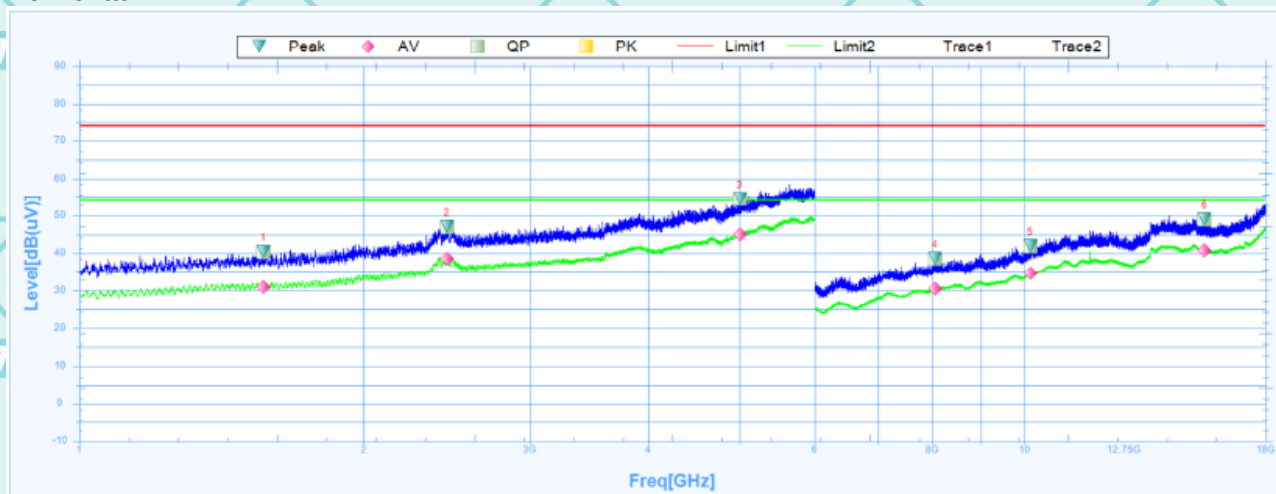**Susputed Data List**

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1566.2500	40.4	24.93	15.47	74	-33.6	218.1	Horizontal	PK	Pass
1	1566.2500	30.95	24.93	6.02	54	-23.05	218.1	Horizontal	AV	Pass
2	2449.3750	46.91	27.43	19.48	74	-27.09	1.3	Horizontal	PK	Pass
2	2449.3750	38.53	27.43	11.1	54	-15.47	1.3	Horizontal	AV	Pass
3	5001.2500	54.59	31.6	22.99	74	-19.41	190.6	Horizontal	PK	Pass
3	5001.2500	44.97	31.6	13.37	54	-9.03	190.6	Horizontal	AV	Pass
4	8044.5000	38.51	8.37	30.14	74	-35.49	335.2	Horizontal	PK	Pass
4	8044.5000	30.4	8.37	22.03	54	-23.6	335.2	Horizontal	AV	Pass
5	10152.0000	41.87	12.82	29.05	74	-32.13	247.9	Horizontal	PK	Pass
5	10152.0000	34.61	12.82	21.79	54	-19.39	247.9	Horizontal	AV	Pass
6	15517.5000	49.04	18.63	30.41	74	-24.96	111.7	Horizontal	PK	Pass
6	15517.5000	40.87	18.63	22.24	54	-13.13	111.7	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

Vertical:

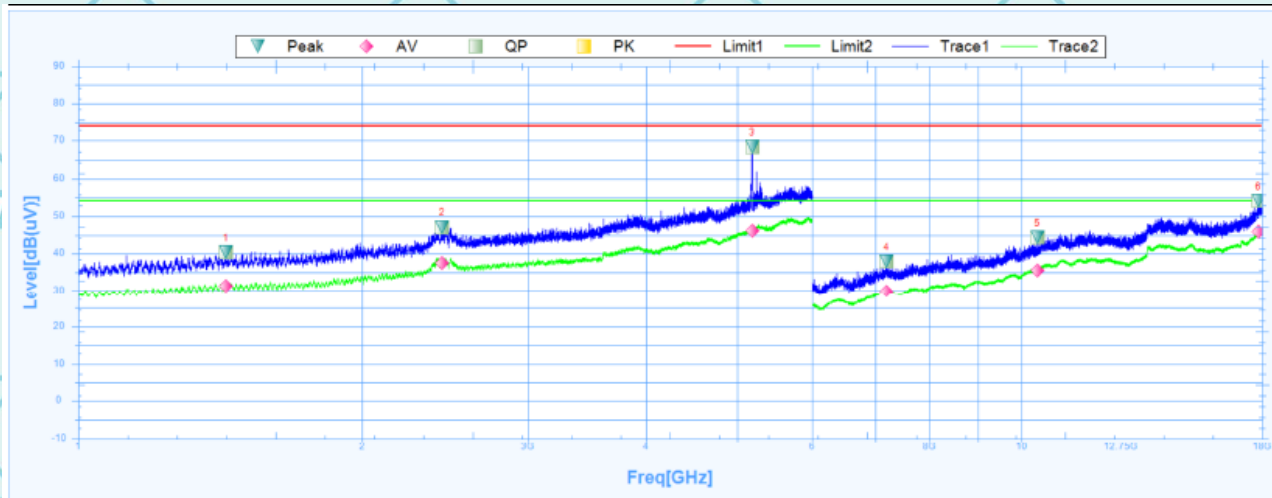


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1433.1250	40.41	25.07	15.34	74	-33.59	298.6	Vertical	PK	Pass
1	1433.1250	31.4	25.07	6.33	54	-22.6	298.6	Vertical	AV	Pass
2	2431.2500	47.11	27.37	19.74	74	-26.89	269.8	Vertical	PK	Pass
2	2431.2500	37.55	27.37	10.18	54	-16.45	269.8	Vertical	AV	Pass
3	5185.6250	68.44	31.75	36.69	74	-5.56	0	Vertical	PK	Pass
3	5185.6250	46.07	31.75	14.32	54	-7.93	0	Vertical	AV	Pass
4	7195.5000	37.84	7.01	30.83	74	-36.16	244.4	Vertical	PK	Pass
4	7195.5000	29.74	7.01	22.73	54	-24.26	244.4	Vertical	AV	Pass
5	10404.0000	44.32	13.61	30.71	74	-29.68	351.1	Vertical	PK	Pass
5	10404.0000	35.57	13.61	21.96	54	-18.43	351.1	Vertical	AV	Pass
6	17836.5000	54.08	22.85	31.23	74	-19.92	360	Vertical	PK	Pass
6	17836.5000	45.8	22.85	22.95	54	-8.2	360	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

Middle channel: 2440MHz

Horizontal:

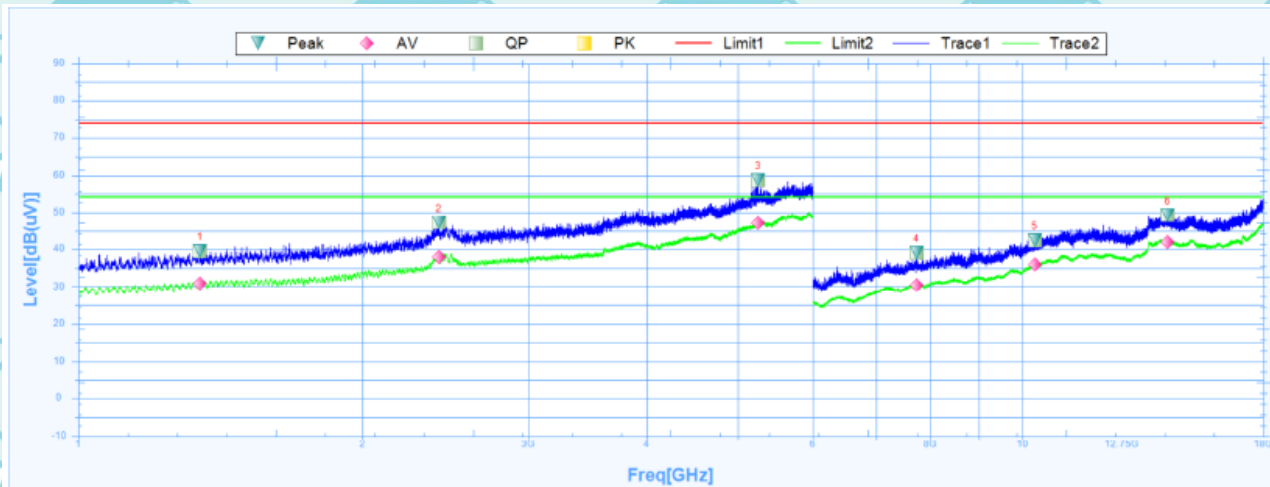


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1345.0000	39.55	24.91	14.64	74	-34.45	0.5	Horizontal	PK	Pass
1	1345.0000	30.92	24.91	6.01	54	-23.08	0.5	Horizontal	AV	Pass
2	2410.6250	47.24	27.3	19.94	74	-26.76	114	Horizontal	PK	Pass
2	2410.6250	38.04	27.3	10.74	54	-15.96	114	Horizontal	AV	Pass
3	5253.7500	58.66	31.8	26.86	74	-15.34	197.7	Horizontal	PK	Pass
3	5253.7500	46.91	31.8	15.11	54	-7.09	197.7	Horizontal	AV	Pass
4	7725.0000	39.06	7.96	31.1	74	-34.94	340	Horizontal	PK	Pass
4	7725.0000	30.35	7.96	22.39	54	-23.65	340	Horizontal	AV	Pass
5	10312.5000	42.4	13.33	29.07	74	-31.6	151.7	Horizontal	PK	Pass
5	10312.5000	35.88	13.33	22.55	54	-18.12	151.7	Horizontal	AV	Pass
6	14259.0000	49.27	18.86	30.41	74	-24.73	331	Horizontal	PK	Pass
6	14259.0000	41.91	18.86	23.05	54	-12.09	331	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

Vertical:

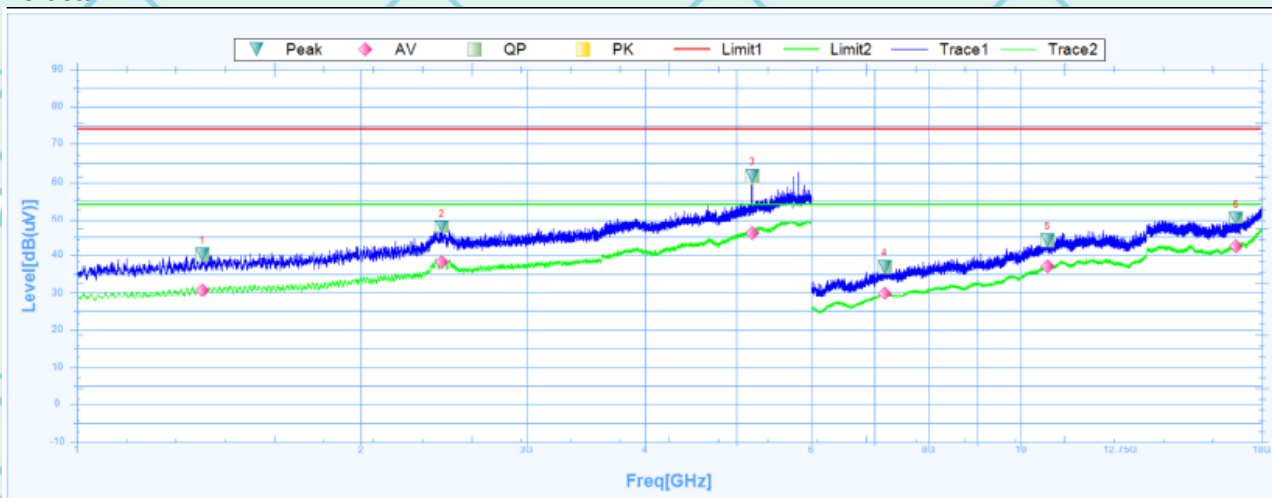


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1358.1250	40.22	24.95	15.27	74	-33.78	38.8	Vertical	PK	Pass
1	1358.1250	30.71	24.95	5.76	54	-23.29	38.8	Vertical	AV	Pass
2	2436.2500	47.9	27.38	20.52	74	-26.1	331.7	Vertical	PK	Pass
2	2436.2500	38.15	27.38	10.77	54	-15.85	331.7	Vertical	AV	Pass
3	5197.5000	61.53	31.76	29.77	74	-12.47	1.3	Vertical	PK	Pass
3	5197.5000	45.93	31.76	14.17	54	-8.07	1.3	Vertical	AV	Pass
4	7173.0000	36.83	7.04	29.79	74	-37.17	-0.1	Vertical	PK	Pass
4	7173.0000	29.81	7.04	22.77	54	-24.19	-0.1	Vertical	AV	Pass
5	10674.0000	43.95	14.56	29.39	74	-30.05	59.4	Vertical	PK	Pass
5	10674.0000	37.1	14.56	22.54	54	-16.9	59.4	Vertical	AV	Pass
6	16915.5000	50.38	20.07	30.31	74	-23.62	358.6	Vertical	PK	Pass
6	16915.5000	42.31	20.07	22.24	54	-11.69	358.6	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

High channel: 2480MHz

Horizontal:

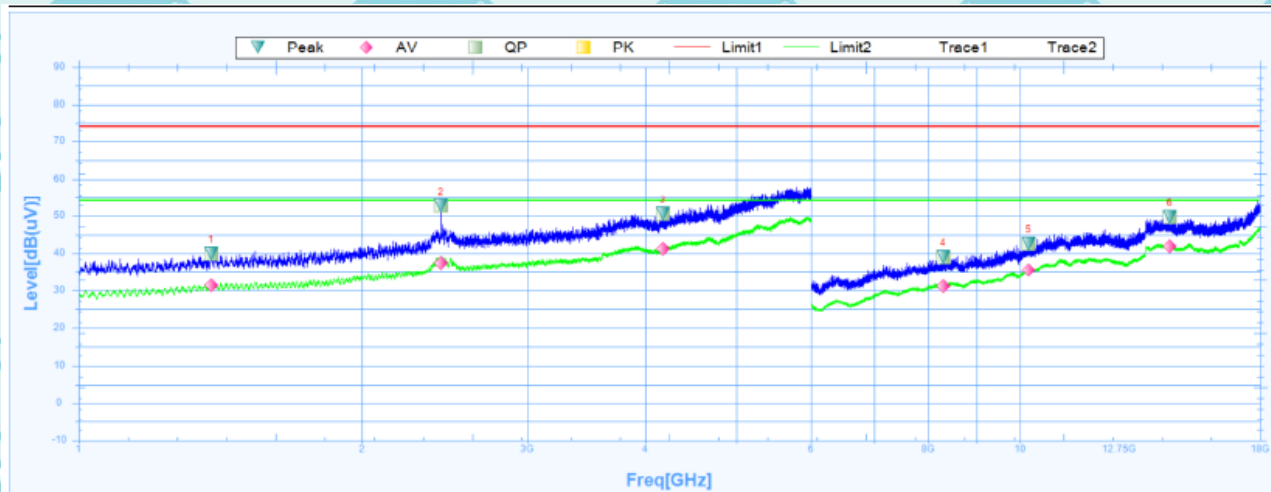


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1382.5000	39.99	25.04	14.95	74	-34.01	359	Horizontal	PK	Pass
1	1382.5000	31.34	25.04	6.3	54	-22.66	359	Horizontal	AV	Pass
2	2426.2500	52.69	27.35	25.34	74	-21.31	-0.1	Horizontal	PK	Pass
2	2426.2500	37.5	27.35	10.15	54	-16.5	-0.1	Horizontal	AV	Pass
3	4178.7500	50.57	30.02	20.55	74	-23.43	183.8	Horizontal	PK	Pass
3	4178.7500	41.36	30.02	11.34	54	-12.64	183.8	Horizontal	AV	Pass
4	8293.5000	39.09	8.93	30.16	74	-34.91	40	Horizontal	PK	Pass
4	8293.5000	31.2	8.93	22.27	54	-22.8	40	Horizontal	AV	Pass
5	10219.5000	42.61	13.04	29.57	74	-31.39	114.2	Horizontal	PK	Pass
5	10219.5000	35.42	13.04	22.38	54	-18.58	114.2	Horizontal	AV	Pass
6	14428.5000	49.7	18.69	31.01	74	-24.3	0.5	Horizontal	PK	Pass
6	14428.5000	42.02	18.69	23.33	54	-11.98	0.5	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026

Vertical:

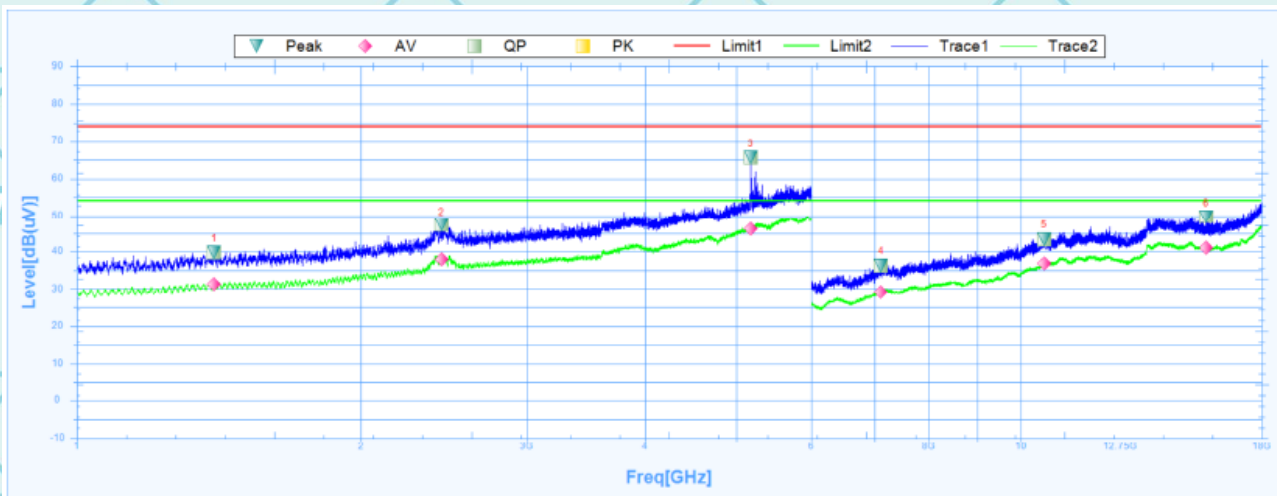

Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1398.1250	39.79	25.09	14.7	74	-34.21	65.5	Vertical	PK	Pass
1	1398.1250	31.3	25.09	6.21	54	-22.7	65.5	Vertical	AV	Pass
2	2435.0000	47.3	27.38	19.92	74	-26.7	224.5	Vertical	PK	Pass
2	2435.0000	37.89	27.38	10.51	54	-16.11	224.5	Vertical	AV	Pass
3	5181.2500	65.49	31.74	33.75	74	-8.51	159.9	Vertical	PK	Pass
3	5181.2500	46.19	31.74	14.45	54	-7.81	159.9	Vertical	AV	Pass
4	7114.5000	36.28	6.8	29.48	74	-37.72	348.2	Vertical	PK	Pass
4	7114.5000	29.07	6.8	22.27	54	-24.93	348.2	Vertical	AV	Pass
5	10590.0000	43.36	14.28	29.08	74	-30.64	191.8	Vertical	PK	Pass
5	10590.0000	36.86	14.28	22.58	54	-17.14	191.8	Vertical	AV	Pass
6	15721.5000	49.62	18.09	31.53	74	-24.38	51.9	Vertical	PK	Pass
6	15721.5000	40.97	18.09	22.88	54	-13.03	51.9	Vertical	AV	Pass

Note:

1. All emissions not reported were more than 20dB below the specified limit or in the noise floor.
2. Emission Level= Reading Level + Probe Factor +Cable Loss.
3. Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. EUT has been tested in unfolded states, and the report only reflects data in the unfolded state (worst-case scenario)

Note: Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard


Margin (dB) = Level (dBμV) – Limits (dBμV)

6.7.3. Restricted Bands Requirements

Test result for GFSK Mode (BLE 1M the worst case)


Low channel

Horizontal:

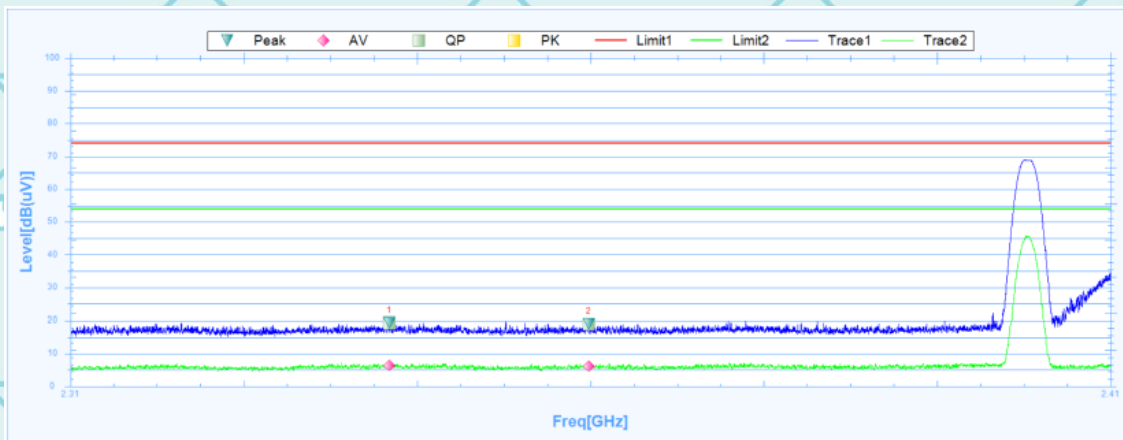

Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2340.6375	19.3	-9.41	28.71	74	-54.7	296.2	Horizontal	PK	Pass
1	2340.6375	6.42	-9.41	15.83	54	-47.58	296.2	Horizontal	AV	Pass
2	2359.8375	18.92	-9.33	28.25	74	-55.08	347.9	Horizontal	PK	Pass
2	2359.8375	6.22	-9.33	15.55	54	-47.78	347.9	Horizontal	AV	Pass

Vertical:

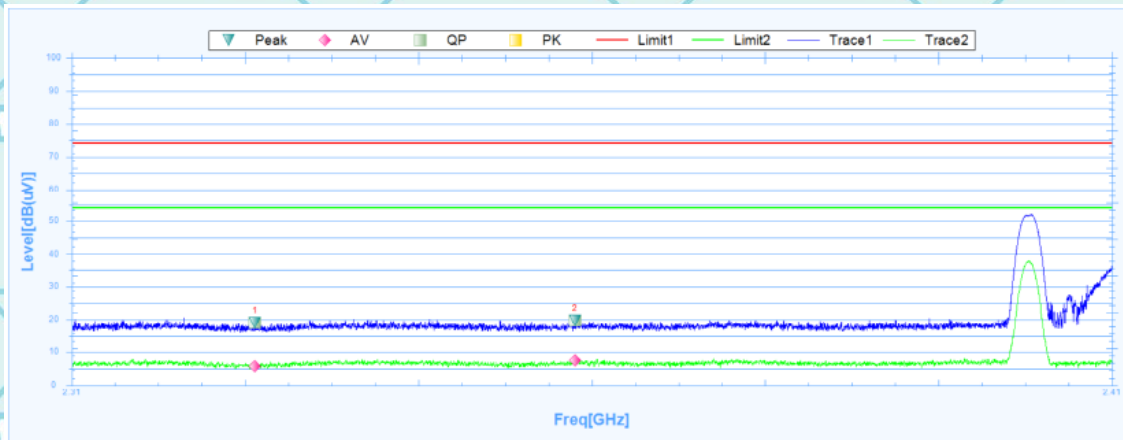


Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2327.6125	18.93	-9.48	28.41	74	-55.07	259.9	Vertical	PK	Pass
1	2327.6125	5.7	-9.48	15.18	54	-48.3	259.9	Vertical	AV	Pass
2	2358.3750	19.69	-9.33	29.02	74	-54.31	360.1	Vertical	PK	Pass
2	2358.3750	7.47	-9.33	16.8	54	-46.53	360.1	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260500047A-LE Issued Date: 03 June 2026


High channel

Horizontal:

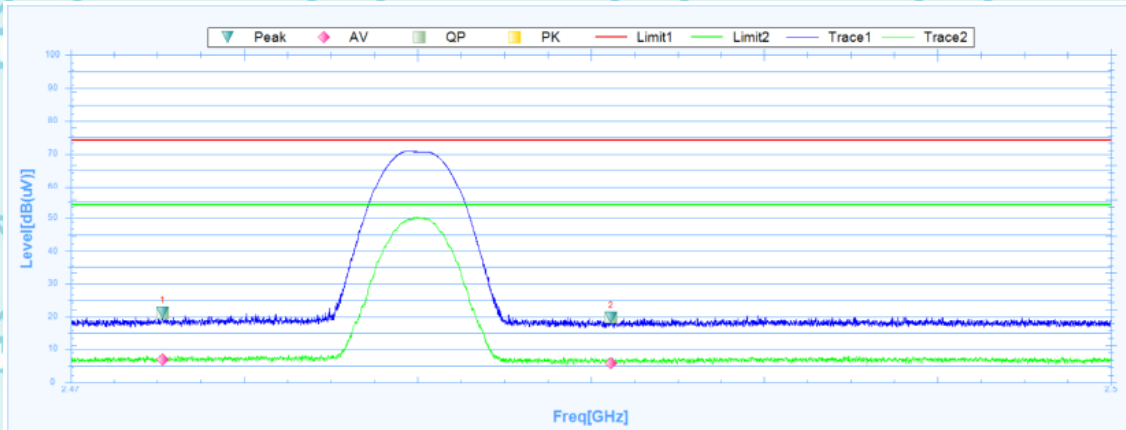

Susputed Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2472.6438	21.11	-8.68	29.79	74	-52.89	226.4	Horizontal	PK	Pass
1	2472.6438	6.9	-8.68	15.58	54	-47.1	226.4	Horizontal	AV	Pass
2	2485.5888	19.72	-8.6	28.32	74	-54.28	183.4	Horizontal	PK	Pass
2	2485.5888	5.7	-8.6	14.3	54	-48.3	183.4	Horizontal	AV	Pass

Vertical:

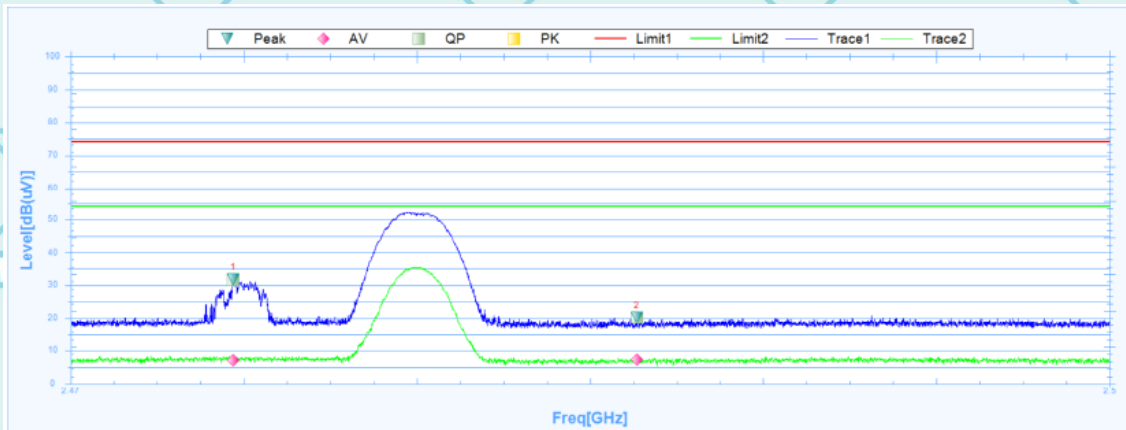

Susputed Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2474.6912	31.51	-8.67	40.18	74	-42.49	0	Vertical	PK	Pass
1	2474.6912	7.09	-8.67	15.76	54	-46.91	0	Vertical	AV	Pass
2	2486.3462	20.08	-8.6	28.68	74	-53.92	208.9	Vertical	PK	Pass
2	2486.3462	7.28	-8.6	15.88	54	-46.72	208.9	Vertical	AV	Pass

Note: Freq. = Emission frequency in MHz
 Reading level (dBμV) = Receiver reading
 Corr. Factor (dB) = Attenuation factor + Cable loss
 Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)
 Limit (dBμV) = Limit stated in standard
 Margin (dB) = Level (dBμV) – Limits (dBμV)

7. Test Setup Photographs

Please refer to Annex "Test Setup photos-15C" for test setup photos

*******END OF REPORT*******