



FCC TEST REPORT

FCC ID: 2AXZU-BRIDGE2

On Behalf of

ERM Electronic Systems Ltd

TagLINK Bridge

Model No.: TagLINK Bridge II, TagLINK Bridge II Slim

Prepared for : ERM Electronic Systems Ltd
Address : 16 Hasar Shapira St, Rishon Le'Zion, Israel

Prepared By : Shenzhen PSI Testing Co., Ltd.
Address : 1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road,
Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Report Number : psi2602073G1-C01-R06
Date of Receipt : June 24, 2026
Date of Test : June 24, 2026–July 24, 2026
Date of Report : July 24, 2026
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. Summary Of Standards And Results-----	5
1.1. Description of Standards and Results -----	5
2. General Information-----	6
2.1. Description of Device (EUT)-----	6
2.2. Accessories of Device (EUT) -----	7
2.3. Tested Supporting System Details -----	7
2.4. Block Diagram of Connection Between EUT and Simulators -----	7
2.5. Test Mode Description -----	8
2.6. Software test version and power setting information -----	8
2.7. Test Conditions -----	9
2.8. Test Facility-----	9
2.9. Measurement Uncertainty -----	9
2.10. Test Equipment List -----	10
3. Spurious Emission -----	11
3.1. Test Limits -----	11
3.2. Block Diagram of Test setup -----	12
3.3. Test Procedure -----	13
3.4. Test Results -----	14
4. Power Line Conducted Emission -----	24
4.1. Test Limits -----	24
4.2. Test Procedure -----	24
4.3. Test Setup -----	24
4.4. Test Results -----	25
5. Out-of-band Emissions -----	30
5.1. Test Limits -----	30
5.2. Test Procedure -----	30
5.3. Test Setup -----	30
5.4. Test Results -----	30
6. Conducted Maximum Output Power -----	41
6.1. Test limits -----	41
6.2. Test Procedure -----	41
6.3. Test Setup -----	41
6.4. Test Results -----	41
7. Band Edge Test-----	50
7.1. Test Limit -----	50
7.2. Block Diagram of Test Setup -----	50
7.3. Test Procedure -----	50
7.4. Test Results -----	51
8. Antenna Requirement -----	55
8.1. Standard Requirement-----	55
8.2. Results -----	55
9. Photos of test setup -----	56
10. Photos of EUT -----	56

TEST REPORT DECLARATION

Applicant : ERM Electronic Systems Ltd
Address : 16 Hasar Shapira St, Rishon Le'Zion, Israel
Manufacturer : ERM Electronic Systems Ltd
Address : 16 Hasar Shapira St, Rishon Le'Zion, Israel
EUT Description : TagLINK Bridge
(A) Model No. : TagLINK Bridge II, TagLINK Bridge II Slim
(B) Trademark : N/A

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247


Test Result: PASS

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC Part 15C requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....:

Felix Pang
Test Engineer



Approved by (name + signature).....:

Simple Guan
Project Manager



Date of issue.....:

July 24, 2026

Revision History

Revision	Issue Date	Revisions	Revised By
V0	July 24, 2026	Initial released Issue	Felix Pang

1. Summary Of Standards And Results

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Conducted Emission	FCC Part 15: 15.207 ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	P
Output Power	FCC Part 15: 15.247(b)(3), ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	P
Radiated Spurious Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d), ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	P
Conducted Spurious & Band Edge Emission	FCC Part 15: 15.247(d), ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	P
Radiated Band Edge Emission	FCC Part 15: 15.247(d), ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	P
Antenna Requirement	FCC Part 15: 15.203	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable. 4. Conclusion determination rules of this report: Unless there are clear provisions on measurement uncertainty in the standard or customer requirements, decision by actual test data without considering measurement uncertainty. 5. Measurement method usage KDB 558074 D01 15.247 Meas Guidance v05r02.		

2. General Information

2.1. Description of Device (EUT)

Product Name	:	TagLINK Bridge
Model	:	TagLINK Bridge II, TagLINK Bridge II Slim
Diff	:	The circuit boards for both products are identical, with the main difference being that the TagLINK Bridge II product has a thick casing and is powered by a blue battery, while the TagLINK Bridge II Slim product has a thin casing and is powered by a silver battery.
Test Voltage	:	DC 9V-32V power supply, DC 5V from adapter, DC 3.7V from battery
Radio Technology	:	Bluetooth V4.2 LE
Operation frequency	:	2402MHz-2480MHz
Modulation type	:	GFSK
Rate	:	1Mbps
Channel No.	:	40 Channels
Antenna Type	:	Internal antenna 1, Maximum Gain is 0.45dBi. Internal antenna 2, Maximum Gain is 0.45dBi. Two antennas cannot transmit simultaneously and do not support MIMO function.
Software version	:	N/A
Hardware version/FVIN	:	N/A
Note	:	1. Antenna information is provided by applicant. Testing lab is not responsible for the accuracy of the information. 2. The model "TagLINK Bridge" has been renamed "TagLINK Bridge II", with the addition of a new model "TagLINK Bridge II Slim". 3. The motherboards for the "TagLINK Bridge II" and "TagLINK Bridge II Slim" products have had four capacitors removed from their circuits compared to previous versions. 4. The two prototype models feature additional batteries. The "TagLINK Bridge II" product has a thick casing and is powered by a blue battery, while the "TagLINK Bridge II Slim" product has a lightweight casing and is powered by a silver battery.

2.2. Accessories of Device (EUT)

Accessories 1 : USB Cable
 Manufacturer : N/A
 Model : N/A
 Rating : N/A

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number
1	Adapter	Baseus	CCXFK65CC	N/A
2	N/A	N/A	N/A	N/A

2.4. Block Diagram of Connection Between EUT and Simulators


Spurious Emission



Power Line Conducted Emission



RF



2.5. Test Mode Description

Keeping TX		
Mode	Channel	Frequency (MHz)
GFSK Tx Mode 1Mbps	CH0	2402
	CH24	2450
	CH39	2480

Note: According exploratory test, EUT will have maximum output power in those data rate. So those data rate were used for all test.

Channel list:					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH0	2402	CH14	2430	CH28	2458
CH1	2404	CH15	2432	CH29	2460
CH2	2406	CH16	2434	CH30	2462
CH3	2408	CH17	2436	CH31	2464
CH4	2410	CH18	2438	CH32	2466
CH5	2412	CH19	2440	CH33	2468
CH6	2414	CH20	2442	CH34	2470
CH7	2416	CH21	2444	CH35	2472
CH8	2418	CH22	2446	CH36	2474
CH9	2420	CH23	2448	CH37	2476
CH10	2422	CH24	2450	CH38	2478
CH11	2424	CH25	2452	CH39	2480
CH12	2426	CH26	2454	--	--
CH13	2428	CH27	2456	--	--

2.6. Software test version and power setting information

Software testing version	TagBridgeTester.exe V1.25.5.1		
Mode	The client 's preset testing software is used to control the operation of EUT in continuous transmission mode and select the testing channel, wireless mode:		
Power level setup by client			
Mode	Channel	Frequency (MHz)	Soft Set
GFSK Tx Mode 1Mbps	CH0	2402	TX level is set as defaults value.
	CH24	2450	TX level is set as defaults value.
	CH39	2480	TX level is set as defaults value.

2.7. Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	26℃
Humidity range:	25-75%	54%
Pressure range:	86-106kPa	101kPa

2.8. Test Facility

Shenzhen PSI Testing Co., Ltd.

1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 13, 2023 File on Federal Communication Commission

Registration Number: 916281

Designation Number: CN1362

September 21, 2023 Certificated by IC

Registration Number: 31123

CAB identifier: CN0158

2.9. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Power Line Conducted Emissions Test	2.13dB
Radiation Emission test in 3m chamber(below 30MHz)	4.07dB
Radiation Emission test in 3m chamber(30MHz to 1GHz)	4.51dB
Radiation Emission test in 3m chamber(1GHz to 18GHz)	5.07dB
Radiation Emission test in 3m chamber(18GHz to 40GHz)	5.21dB
Radio Frequency	48.24KHz
Conducted RF Power	0.41dB
Power Spectral Density	0.39 dB
Occupied-Bandwidth	968Hz
Duty Cycle	1%
Conducted-Spurious Emission	1.26dB

2.10. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Last Cal.	Cal. Interval
1.	9*6*6 anechoic chamber	SKET	9*6*6	N/A	/	2025.12.18	3 Year
2.	Test Receiver	Rohde&Schwarz	ESCI 7	101032/003	4.42 SP3	2025.12.18	1 Year
3.	L.I.S.N.#1	Rohde&Schwarz	ENV 216	102282	/	2025.12.18	1 Year
4.	L.I.S.N.#2	EMCO	3810-2	00094944	/	2025.12.18	1 Year
5.	Loop Antenna	Schwarz beck	FMZB 1519B	00128	/	2025.01.02	2 Year
6.	Bilog Antenna	Schwarz beck	VULB 9168	01448	/	2025.01.02	2 Year
7.	Spectrum Analyzer	Rohde&Schwarz	FSV40-N	101648	3.70	2025.12.18	1 Year
8.	Horn Antenna	Schwarz beck	BBHA 9120 D	02706	/	2025.01.02	2 Year
9.	Amplifier	SKET	LNPA_0118 G-50	SK20220329 01	/	2025.12.18	1 Year
10.	Horn Antenna	Schwarz beck	BBHA 9170	00946	/	2024.12.31	2 Year
11.	Amplifier	SKET	LNPA_1840 G-50	SK20190403 02	/	2025.12.18	1 Year
12.	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.0 2-1111533-F Z	/	2025.12.18	1 Year
13.	RF Sensor Unit	Tachoy	TR1029-2	20220428P0 08	/	2025.12.18	1 Year
14.	Spectrum Analyzer	Agilent	N9020A	MY51281067	A.14.03	2025.12.18	1 Year
15.	Temp. & Humid Chamber	Auchno	9606	/	/	2025.12.18	1 Year
16.	Regulated DC Power Supply	Xinouhua	ADC120V10 A	2022112516 38	/	2025.12.18	1 Year
17.	Cable	SKET	Cable-RE-1	#02/#03	/	2025.12.18	1 Year
18.	Cable	SKET	Cable-RE-2	#01	/	2025.12.18	1 Year
19.	Cable	SKET	Cable-RE-3	#04	/	2025.12.18	1 Year
20.	Cable	SKET	Cable-CE-1	A-E-24	/	2025.12.18	1 Year
21.	6dB Attenuator	Schwarzbeck	DGA 9552N 6dB	CK4186	/	2025.12.18	1 Year
22.	Power meter	Agilent	E4419B	GB40202121	/	2025.12.18	1 Year
23.	Comprehensive Test Instrument	Rohde&Schwarz	CMW 500	145266	/	2025.12.18	1 Year
For Test Software Information							
Item	Software Name	Manufacturer		Version			
RE	EZ EMC	Farad		PSI-3A1			
CE	EZ EMC	Farad		PSI-3A1			
RF	RTS	TACHOY		V1.0.0			

3. Spurious Emission

3.1. Test Limits

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100 **	3
88-216	150 **	3
216-960	200 **	3
Above 960	500	3

Note: The peak limit is 20 dB higher than the average limit.


All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

3.2. Block Diagram of Test setup


a. In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

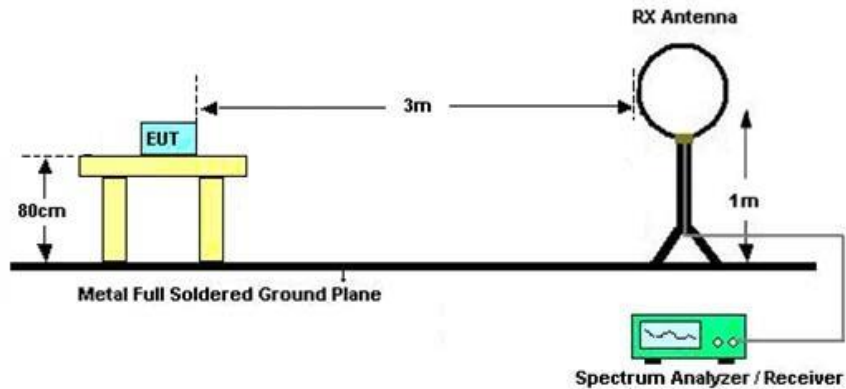

b. In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

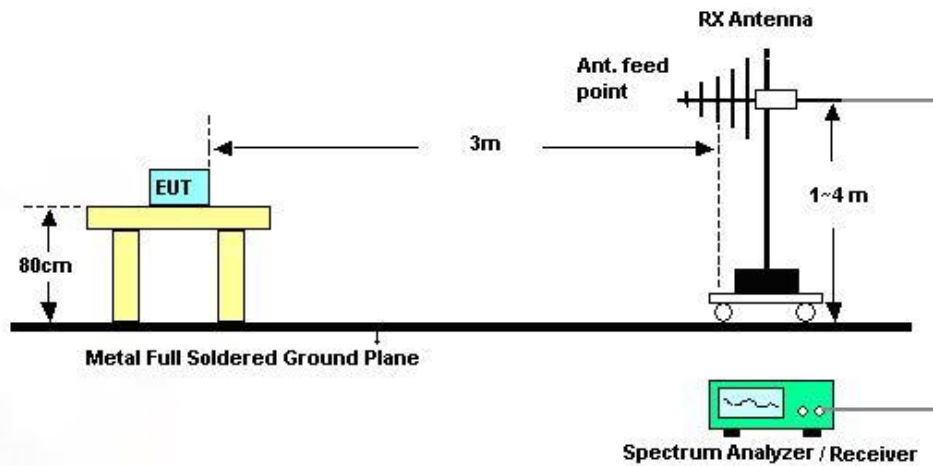

c. In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

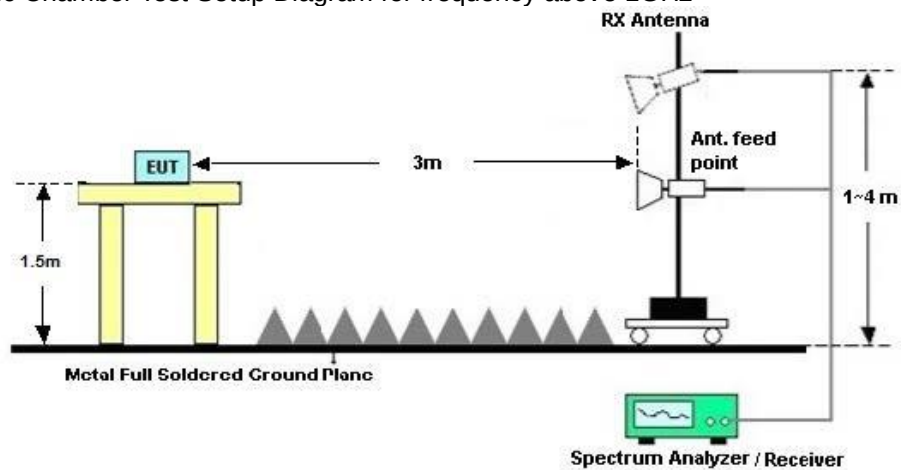

3.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
- (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

Test setup information:

9KHz~150KHz	RBW200Hz	VBW1KHz
150KHz~30MHz	RBW9KHz	VBW 30KHz
30MHz~1GHz	RBW120KHz	VBW 300KHz
Above1GHz	RBW1MHz	VBW 3MHz


3.4. Test Results

We have scanned from 9kHz to the 10th harmonic of the EUT's highest frequency.
Detailed information please see the following page.

From 9KHz to 30MHz:	
Test Date : 2026.07.14	Temperature : 26℃
Test Engineer : Felix Pang	Humidity : 54%
Test Mode : GFSK mode	
Test Voltage : AC 120V/60Hz	
Test Results : PASS	
Note:	The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


From 30MHz to 1000MHz:	
Test Date : 2026.07.14	Temperature : 26℃
Test Engineer : Felix Pang	Humidity : 54%
Test Mode : GFSK mode	
Test Voltage : AC 120V/60Hz	
Test Results : PASS	
Note:	1. The test results are listed in next pages. 2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out. 3. All modes have been tested, and only worst data of 1Mbps GFSK 2402MHz mode was listed in this report.

TagLINK Brigde
Polarization: Vertical

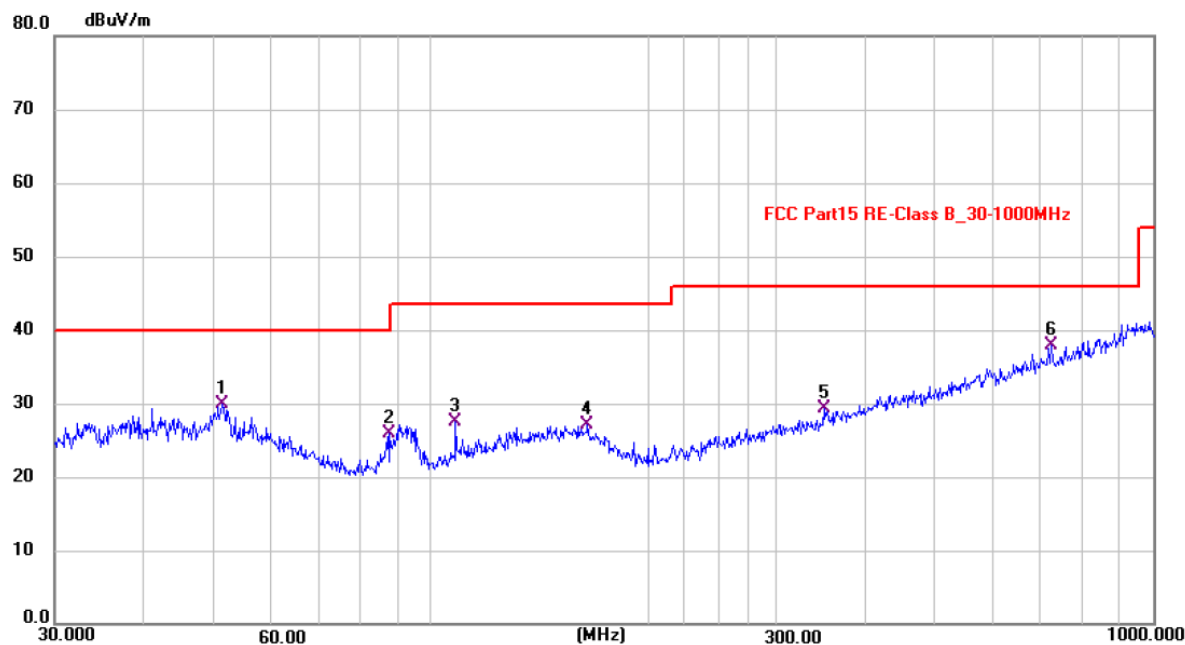

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	51.4130	16.30	13.68	29.98	40.00	-10.02	QP
2	87.7248	15.67	10.19	25.86	40.00	-14.14	QP
3	108.0297	15.66	11.80	27.46	43.50	-16.04	QP
4	164.5465	12.33	14.79	27.12	43.50	-16.38	QP
5	349.5563	12.74	16.56	29.30	46.00	-16.70	QP
6 *	722.0423	13.71	24.12	37.83	46.00	-8.17	QP

Note: Level = Reading + Factor Margin = Level - Limit

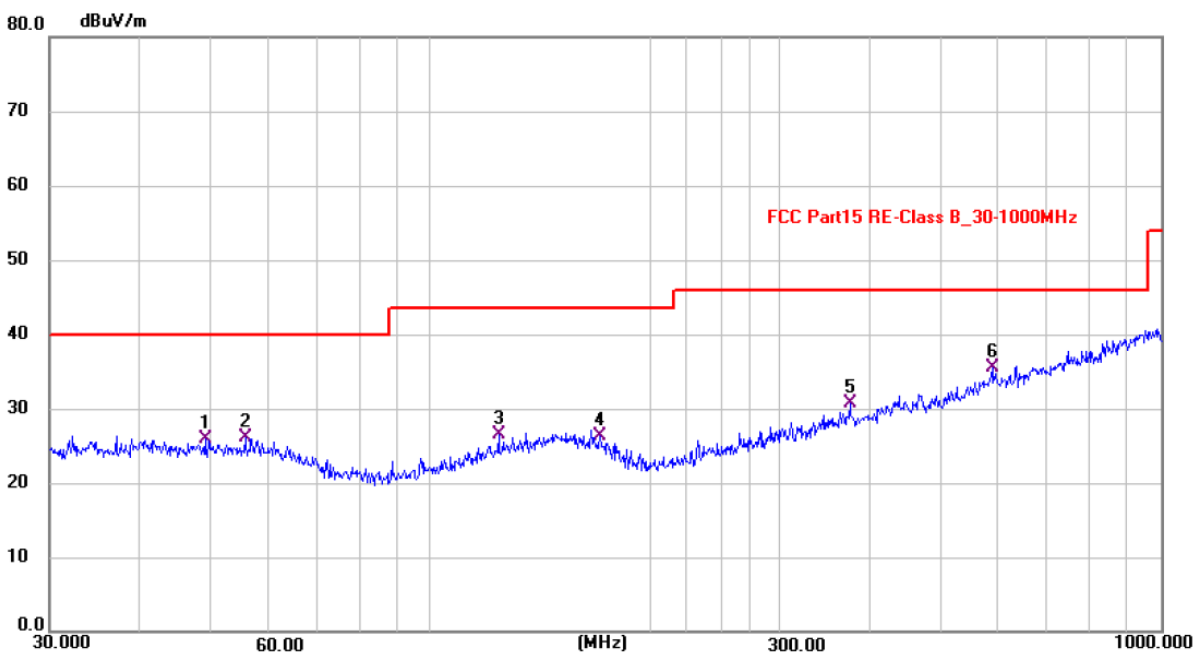
Polarization: Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	49.1005	12.16	13.77	25.93	40.00	-14.07	QP
2	55.7314	12.58	13.47	26.05	40.00	-13.95	QP
3	124.0242	13.03	13.42	26.45	43.50	-17.05	QP
4	170.4934	11.96	14.26	26.22	43.50	-17.28	QP
5	375.1155	13.58	17.06	30.64	46.00	-15.36	QP
6 *	587.8735	13.68	21.82	35.50	46.00	-10.50	QP

Note: Level = Reading + Factor Margin = Level – Limit


TagLINK Bridge Slim

Polarization: Vertical

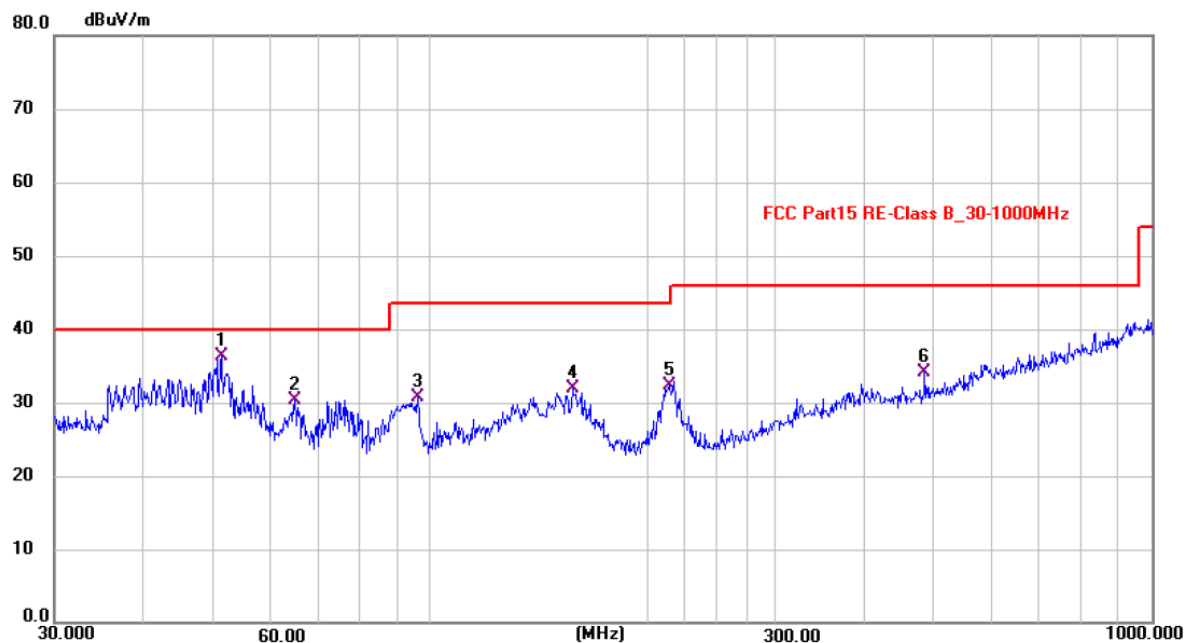

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	51.1658	22.57	13.68	36.25	40.00	-3.75	QP
2	64.6878	17.92	12.37	30.29	40.00	-9.71	QP
3	95.9723	19.99	10.68	30.67	43.50	-12.83	QP
4	157.1451	16.67	15.19	31.86	43.50	-11.64	QP
5	214.4203	20.26	12.08	32.34	43.50	-11.16	QP
6	484.3338	14.48	19.57	34.05	46.00	-11.95	QP

Note: Level = Reading + Factor Margin = Level - Limit

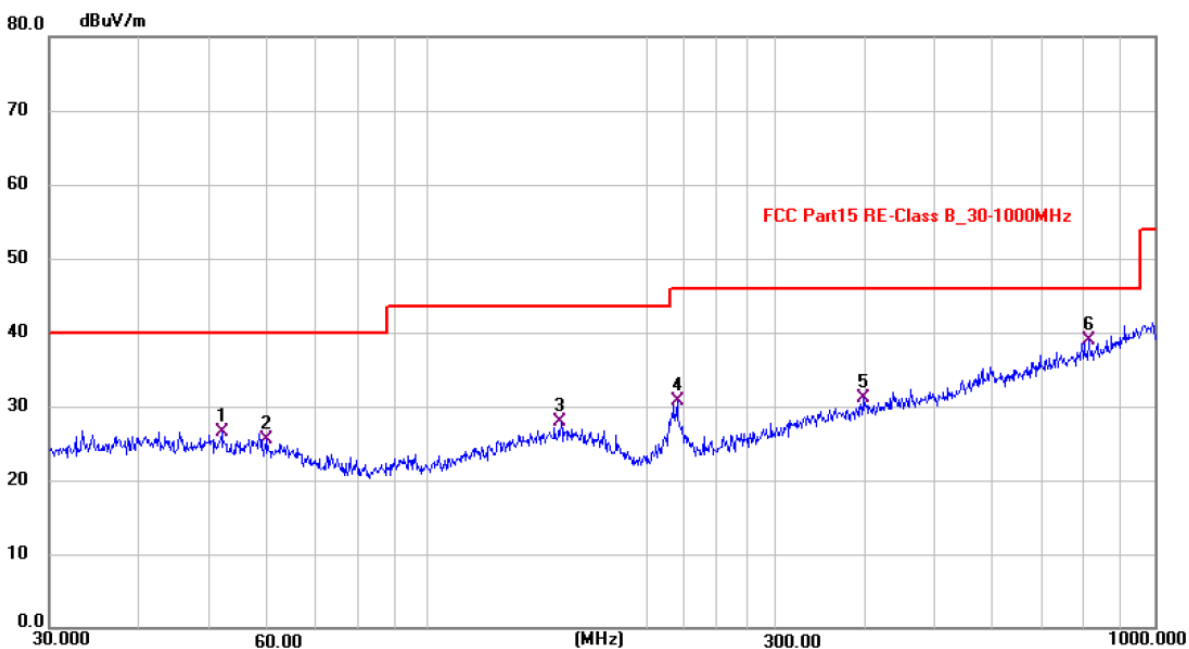Polarization: Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	51.8430	12.77	13.65	26.42	40.00	-13.58	QP
2	59.9902	12.23	13.25	25.48	40.00	-14.52	QP
3	152.3299	12.73	15.21	27.94	43.50	-15.56	QP
4	220.1342	18.35	12.32	30.67	46.00	-15.33	QP
5	396.2415	13.59	17.48	31.07	46.00	-14.93	QP
6 *	811.3315	13.73	25.25	38.98	46.00	-7.02	QP

Note: Level = Reading + Factor Margin = Level - Limit

From 1GHz to 25GHz:	
Test Date : 2026.07.14	Temperature : 26℃
Test Engineer : Felix Pang	Humidity : 54%
Test Mode : GFSK mode	
Test Voltage : AC 120V/60Hz	
Test Results : PASS	
Note:	1. The test results are listed in next pages. 2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out. 3. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.

TagLINK Bridge ANT 1:

1Mbps:

Test Mode : GFSK TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4804	V	59.54	-13.25	46.29	74.00	-27.71	Peak
2	4804	V	50.03	-13.25	36.78	54.00	-17.22	Avg
3	7206	--	--	--	--	--	--	--
4	9608	--	--	--	--	--	--	--
5	4804	H	57.32	-13.25	44.07	74.00	-29.93	Peak
6	4804	H	47.58	-13.25	34.33	54.00	-19.67	Avg
7	7206	--	--	--	--	--	--	--
8	9608	--	--	--	--	--	--	--
Test Mode : GFSK TX Mid								
1	4900	V	59.14	-12.98	46.16	74.00	-27.84	Peak
2	4900	V	49.35	-12.98	36.37	54.00	-17.63	Avg
3	7350	--	--	--	--	--	--	--
4	9800	--	--	--	--	--	--	--
5	4900	H	56.60	-12.98	43.62	74.00	-30.38	Peak
6	4900	H	46.76	-12.98	33.78	54.00	-20.22	Avg
7	7350	--	--	--	--	--	--	--
8	9800	--	--	--	--	--	--	--
Test Mode : GFSK TX High								
1	4960	V	59.85	-12.70	47.15	74.00	-26.85	Peak
2	4960	V	47.67	-12.70	34.97	54.00	-19.03	Avg
3	7440	--	--	--	--	--	--	--
4	9920	--	--	--	--	--	--	--
5	4960	H	55.57	-12.70	42.87	74.00	-31.13	Peak
6	4960	H	44.76	-12.70	32.06	54.00	-21.94	Avg
7	7440	--	--	--	--	--	--	--
8	9920	--	--	--	--	--	--	--
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor, Margin= Result-Limit.								

TagLINK Bridge ANT 2:

1Mbps:

Test Mode : GFSK TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4804	V	56.41	-13.25	43.16	74.00	-30.84	Peak
2	4804	V	49.82	-13.25	36.57	54.00	-17.43	Avg
3	7206	--	--	--	--	--	--	--
4	9608	--	--	--	--	--	--	--
5	4804	H	57.77	-13.25	44.52	74.00	-29.48	Peak
6	4804	H	48.07	-13.25	34.82	54.00	-19.18	Avg
7	7206	--	--	--	--	--	--	--
8	9608	--	--	--	--	--	--	--
Test Mode : GFSK TX Mid								
1	4900	V	58.88	-12.98	45.90	74.00	-28.10	Peak
2	4900	V	48.31	-12.98	35.33	54.00	-18.67	Avg
3	7350	--	--	--	--	--	--	--
4	9800	--	--	--	--	--	--	--
5	4900	H	56.06	-12.98	43.08	74.00	-30.92	Peak
6	4900	H	46.52	-12.98	33.54	54.00	-20.46	Avg
7	7350	--	--	--	--	--	--	--
8	9800	--	--	--	--	--	--	--
Test Mode : GFSK TX High								
1	4960	V	56.39	-12.70	43.69	74.00	-30.31	Peak
2	4960	V	50.46	-12.70	37.76	54.00	-16.24	Avg
3	7440	--	--	--	--	--	--	--
4	9920	--	--	--	--	--	--	--
5	4960	H	55.76	-12.70	43.06	74.00	-30.94	Peak
6	4960	H	48.34	-12.70	35.64	54.00	-18.36	Avg
7	7440	--	--	--	--	--	--	--
8	9920	--	--	--	--	--	--	--
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor, Margin= Result-Limit.								

TagLINK Bridge Slim ANT 1:

1Mbps:

Test Mode : GFSK TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4804	V	56.53	-13.25	43.28	74.00	-30.72	Peak
2	4804	V	48.31	-13.25	35.06	54.00	-18.94	Avg
3	7206	--	--	--	--	--	--	--
4	9608	--	--	--	--	--	--	--
5	4804	H	55.24	-13.25	41.99	74.00	-32.01	Peak
6	4804	H	45.74	-13.25	32.49	54.00	-21.51	Avg
7	7206	--	--	--	--	--	--	--
8	9608	--	--	--	--	--	--	--
Test Mode : GFSK TX Mid								
1	4900	V	59.24	-12.98	46.26	74.00	-27.74	Peak
2	4900	V	50.16	-12.98	37.18	54.00	-16.82	Avg
3	7350	--	--	--	--	--	--	--
4	9800	--	--	--	--	--	--	--
5	4900	H	58.16	-12.98	45.18	74.00	-28.82	Peak
6	4900	H	47.36	-12.98	34.38	54.00	-19.62	Avg
7	7350	--	--	--	--	--	--	--
8	9800	--	--	--	--	--	--	--
Test Mode : GFSK TX High								
1	4960	V	60.21	-12.70	47.51	74.00	-26.49	Peak
2	4960	V	47.04	-12.70	34.34	54.00	-19.66	Avg
3	7440	--	--	--	--	--	--	--
4	9920	--	--	--	--	--	--	--
5	4960	H	58.17	-12.70	45.47	74.00	-28.53	Peak
6	4960	H	45.89	-12.70	33.19	54.00	-20.81	Avg
7	7440	--	--	--	--	--	--	--
8	9920	--	--	--	--	--	--	--
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor, Margin= Result-Limit.								

TagLINK Bridge Slim ANT 2:

1Mbps:

Test Mode : GFSK TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4804	V	59.08	-13.25	45.83	74.00	-28.17	Peak
2	4804	V	49.44	-13.25	36.19	54.00	-17.81	Avg
3	7206	--	--	--	--	--	--	--
4	9608	--	--	--	--	--	--	--
5	4804	H	56.28	-13.25	43.03	74.00	-30.97	Peak
6	4804	H	45.28	-13.25	32.03	54.00	-21.97	Avg
7	7206	--	--	--	--	--	--	--
8	9608	--	--	--	--	--	--	--
Test Mode : GFSK TX Mid								
1	4900	V	59.93	-12.98	46.95	74.00	-27.05	Peak
2	4900	V	46.77	-12.98	33.79	54.00	-20.21	Avg
3	7350	--	--	--	--	--	--	--
4	9800	--	--	--	--	--	--	--
5	4900	H	58.36	-12.98	45.38	74.00	-28.62	Peak
6	4900	H	45.34	-12.98	32.36	54.00	-21.64	Avg
7	7350	--	--	--	--	--	--	--
8	9800	--	--	--	--	--	--	--
Test Mode : GFSK TX High								
1	4960	V	58.92	-12.70	46.22	74.00	-27.78	Peak
2	4960	V	49.66	-12.70	36.96	54.00	-17.04	Avg
3	7440	--	--	--	--	--	--	--
4	9920	--	--	--	--	--	--	--
5	4960	H	56.68	-12.70	43.98	74.00	-30.02	Peak
6	4960	H	45.20	-12.70	32.50	54.00	-21.50	Avg
7	7440	--	--	--	--	--	--	--
8	9920	--	--	--	--	--	--	--
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor, Margin= Result-Limit.								

4. Power Line Conducted Emission

4.1. Test Limits

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50


Notes: 1. *Decreasing linearly with logarithm of frequency.
 2. The lower limit shall apply at the transition frequencies.
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.2. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 on Conducted Emission Measurement.

The bandwidth of test receiver is set at 9 kHz.

4.3. Test Setup

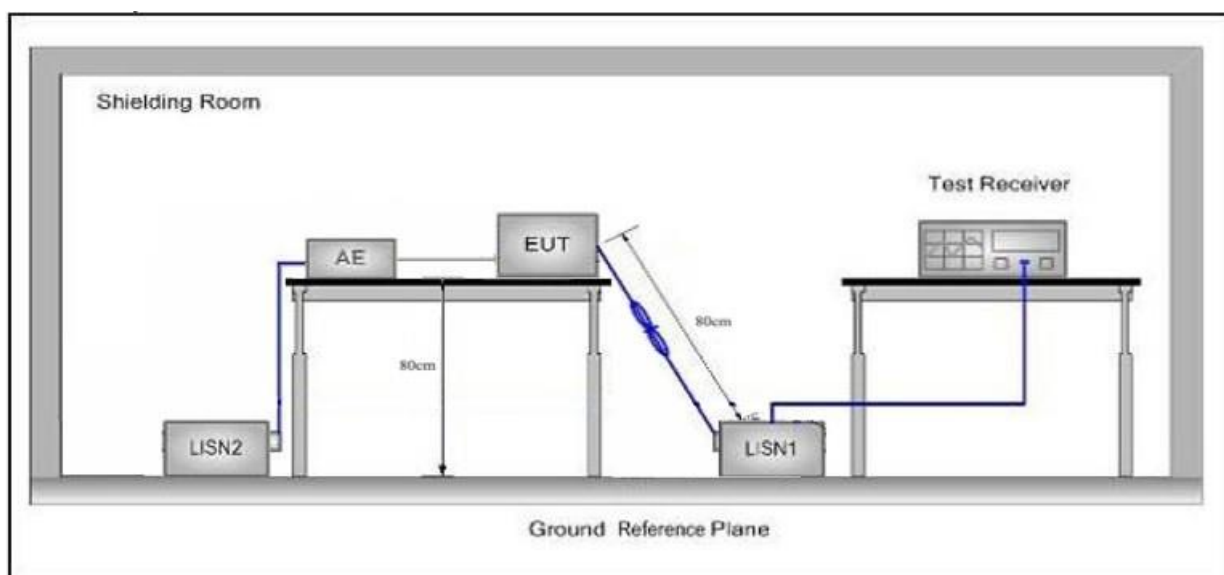


4.4. Test Results

Test Date	: 2026.07.10	Temperature	: 26℃
Test Engineer	: Felix Pang	Humidity	: 54%
Test Mode	: GFSK mode		
Test Voltage	: AC 120V/60Hz		
Test Results	: PASS		
Note:	1. The test results are listed in next pages.		
	2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out.		
	3. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.		

TagLINK Bridge


Polarization: L

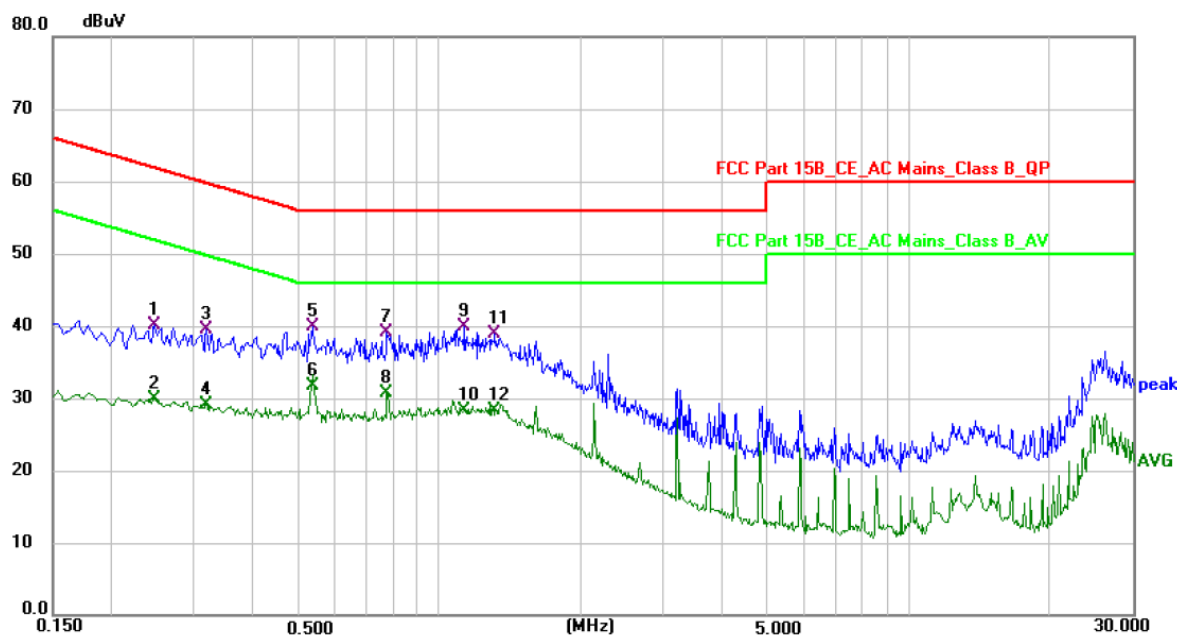

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2460	30.70	9.42	40.12	61.89	-21.77	QP
2	0.2460	20.52	9.42	29.94	51.89	-21.95	AVG
3	0.3180	30.05	9.42	39.47	59.76	-20.29	QP
4	0.3180	19.62	9.42	29.04	49.76	-20.72	AVG
5	0.5340	30.30	9.67	39.97	56.00	-16.03	QP
6 *	0.5340	22.09	9.67	31.76	46.00	-14.24	AVG
7	0.7740	29.51	9.53	39.04	56.00	-16.96	QP
8	0.7740	21.24	9.53	30.77	46.00	-15.23	AVG
9	1.1340	29.98	9.84	39.82	56.00	-16.18	QP
10	1.1340	18.50	9.84	28.34	46.00	-17.66	AVG
11	1.3099	29.04	9.86	38.90	56.00	-17.10	QP
12	1.3099	18.52	9.86	28.38	46.00	-17.62	AVG

Note: Level = Reading + Factor Margin = Level - Limit

Polarization: N

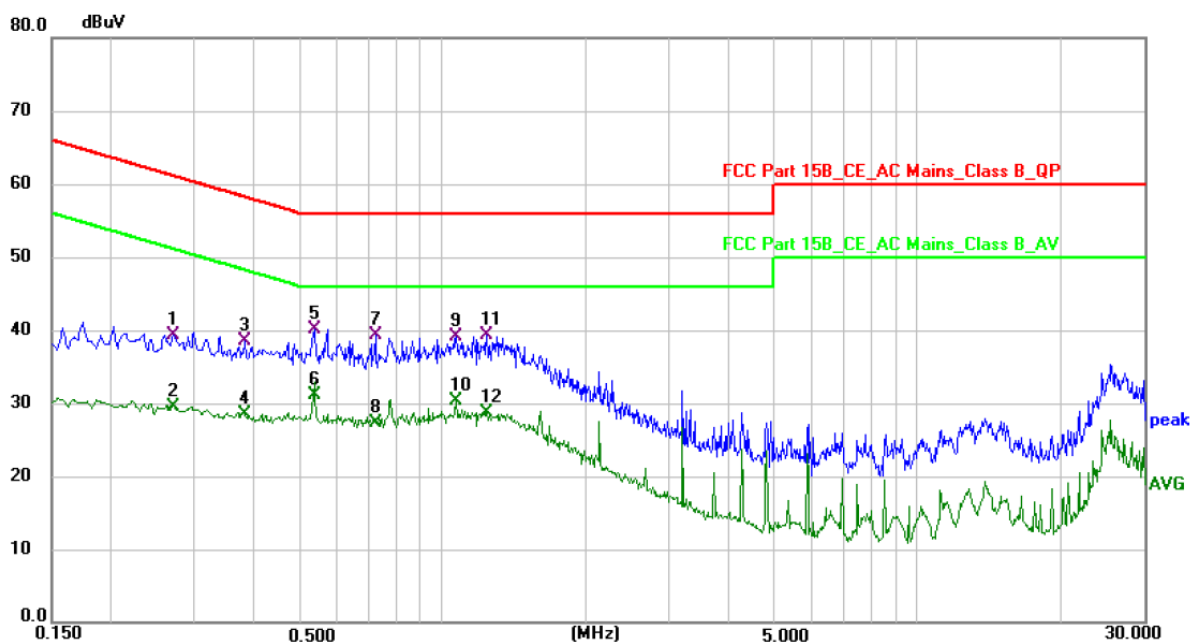


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2700	29.97	9.42	39.39	61.12	-21.73	QP
2	0.2700	20.17	9.42	29.59	51.12	-21.53	AVG
3	0.3820	29.06	9.42	38.48	58.24	-19.76	QP
4	0.3820	19.04	9.42	28.46	48.24	-19.78	AVG
5	0.5340	30.46	9.67	40.13	56.00	-15.87	QP
6 *	0.5340	21.52	9.67	31.19	46.00	-14.81	AVG
7	0.7220	29.75	9.46	39.21	56.00	-16.79	QP
8	0.7220	17.91	9.46	27.37	46.00	-18.63	AVG
9	1.0660	29.26	9.84	39.10	56.00	-16.90	QP
10	1.0660	20.46	9.84	30.30	46.00	-15.70	AVG
11	1.2420	29.48	9.85	39.33	56.00	-16.67	QP
12	1.2420	18.95	9.85	28.80	46.00	-17.20	AVG

Note: Level = Reading + Factor Margin = Level - Limit

TagLINK Bridge Slim


Polarization: L

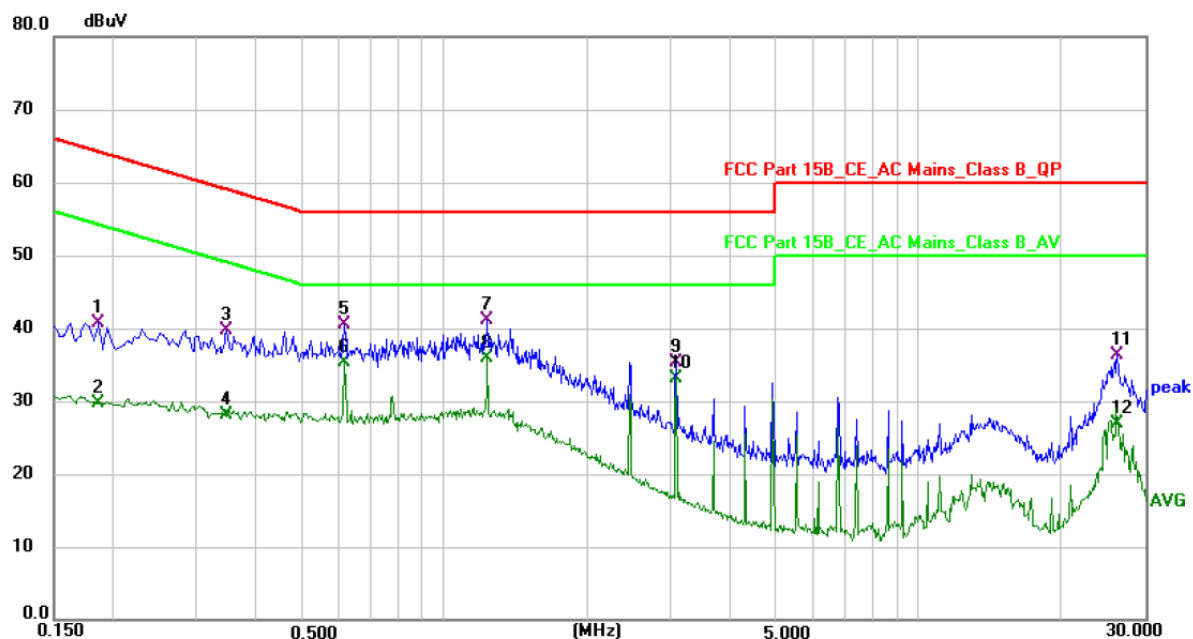

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1860	31.14	9.50	40.64	64.21	-23.57	QP
2	0.1860	20.24	9.50	29.74	54.21	-24.47	AVG
3	0.3460	30.22	9.42	39.64	59.06	-19.42	QP
4	0.3460	18.74	9.42	28.16	49.06	-20.90	AVG
5	0.6140	30.87	9.56	40.43	56.00	-15.57	QP
6	0.6140	25.67	9.56	35.23	46.00	-10.77	AVG
7	1.2300	31.29	9.85	41.14	56.00	-14.86	QP
8 *	1.2300	26.09	9.85	35.94	46.00	-10.06	AVG
9	3.0740	25.39	9.94	35.33	56.00	-20.67	QP
10	3.0740	23.26	9.94	33.20	46.00	-12.80	AVG
11	26.1860	26.64	9.72	36.36	60.00	-23.64	QP
12	26.1860	17.22	9.72	26.94	50.00	-23.06	AVG

Note: Level = Reading + Factor Margin = Level - Limit

Polarization: N

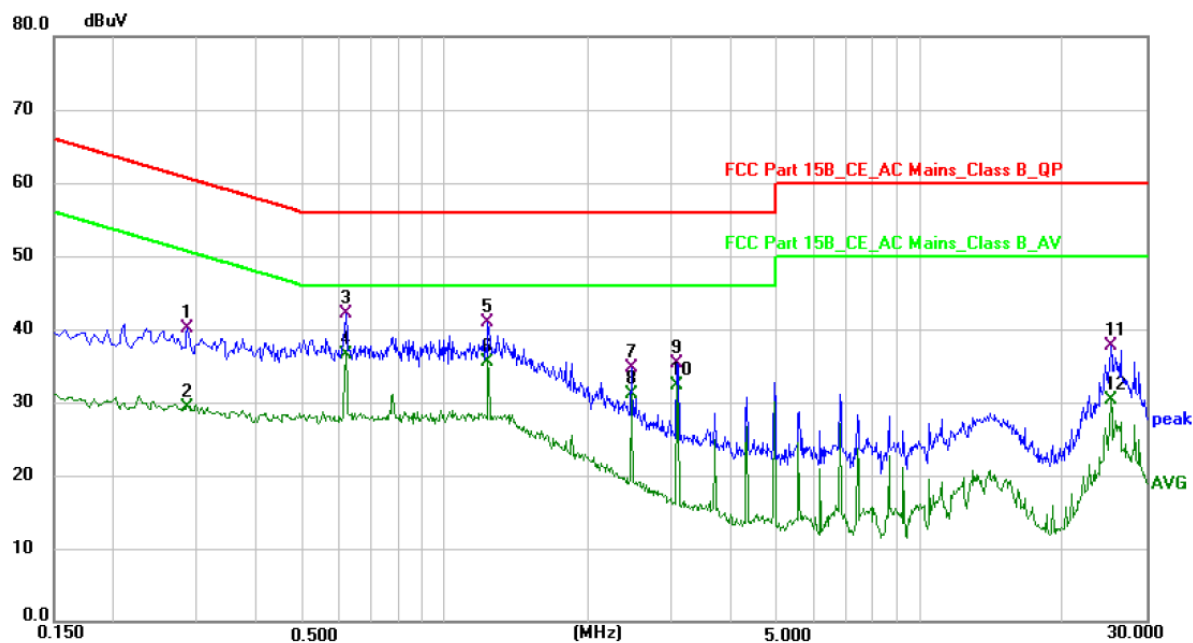

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2860	30.62	9.42	40.04	60.64	-20.60	QP
2	0.2860	19.94	9.42	29.36	50.64	-21.28	AVG
3	0.6180	32.18	9.85	42.03	56.00	-13.97	QP
4 *	0.6180	26.59	9.85	36.44	46.00	-9.56	AVG
5	1.2340	31.32	9.58	40.90	56.00	-15.10	QP
6	1.2340	26.02	9.58	35.60	46.00	-10.40	AVG
7	2.4660	25.36	9.44	34.80	56.00	-21.20	QP
8	2.4660	21.74	9.44	31.18	46.00	-14.82	AVG
9	3.0900	25.91	9.46	35.37	56.00	-20.63	QP
10	3.0900	22.94	9.46	32.40	46.00	-13.60	AVG
11	25.2420	27.69	9.94	37.63	60.00	-22.37	QP
12	25.2420	20.32	9.94	30.26	50.00	-19.74	AVG

Note: Level = Reading + Factor Margin = Level - Limit

5. Out-of-band Emissions


5.1. Test Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.

5.2. Test Procedure

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Section 11.11.1, Section 11.11.2, Section 11.11.3 Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

5.3. Test Setup

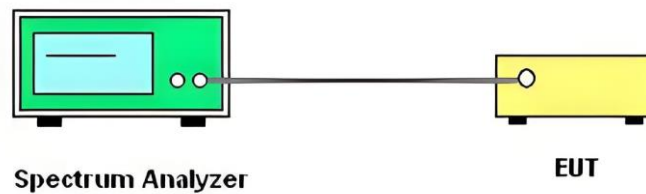


5.4. Test Results

PASS.


The test results are listed in next pages.

Bandedge: Pass


Condition	Antenna	Modulation	TX_Frequency (MHz)	Max. Mark_freq(MHz)	Ref_level(dBm)	Spurious level(dBm)	limit(dBm)	Result
NVNT	ANT1	1Mbps	2402.00	2399.870	2.695	-44.816	-17.305	Pass
NVNT	ANT1	1Mbps	2480.00	2483.575	-0.493	-50.512	-20.493	Pass

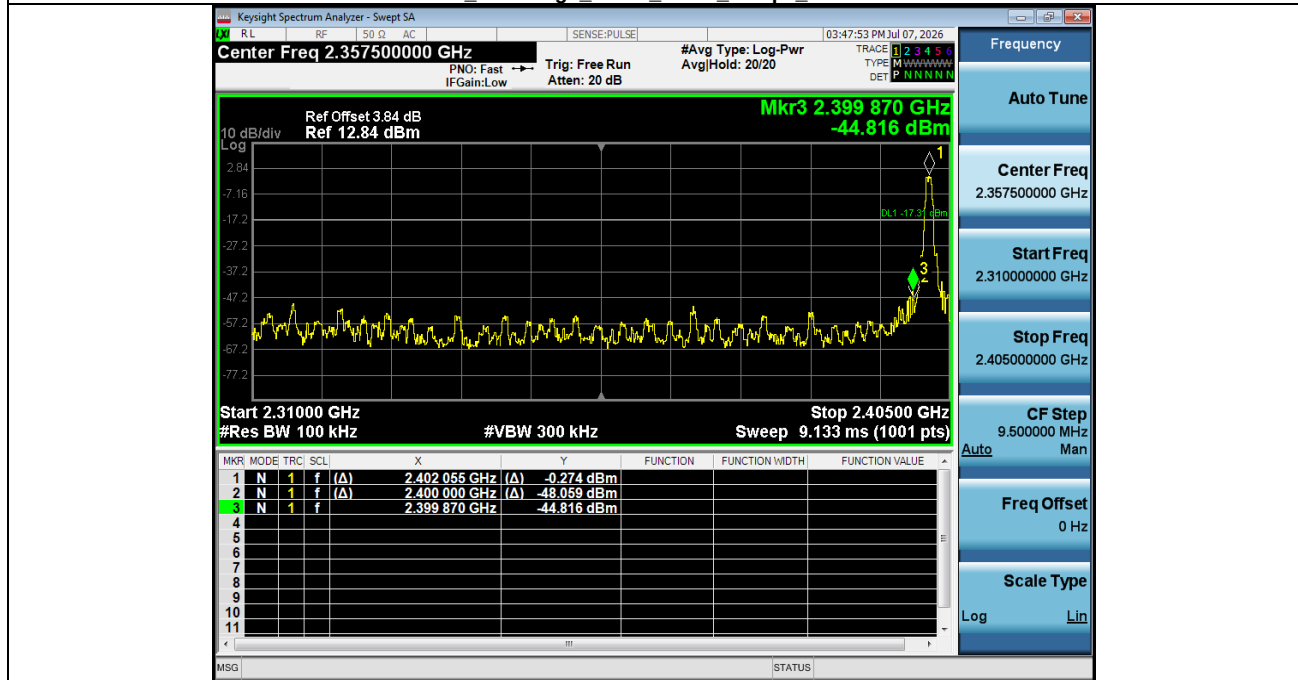1 Reference Level_NVNT_ANT1_1Mbps_2402**2 Bandedge_NVNT_ANT1_1Mbps_2402**

1_Reference_Level_NVNT_ANT1_1Mbps_2480

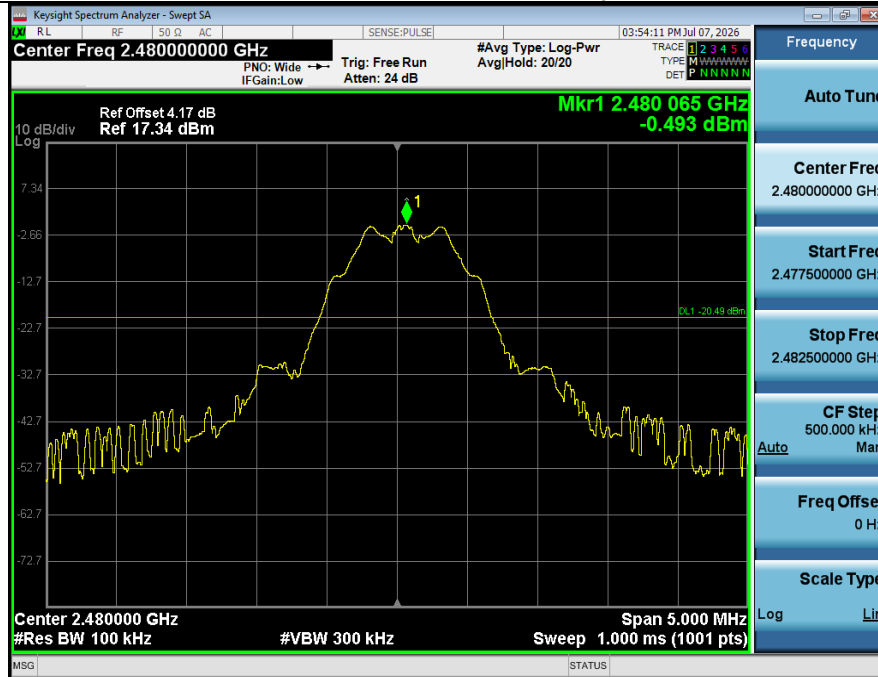


2_Bandedge_NVNT_ANT1_1Mbps_2480

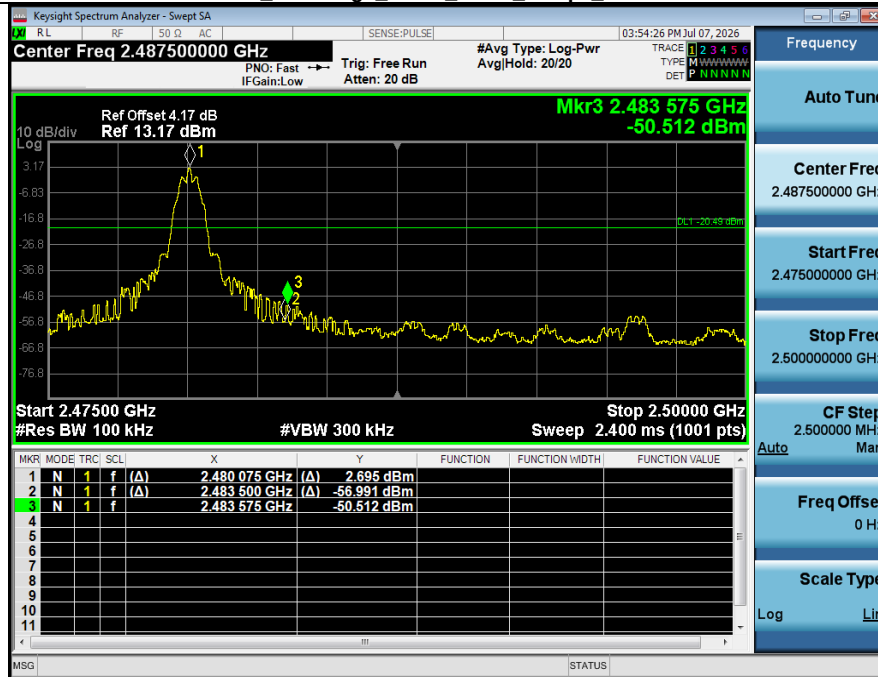


Condition	Antenna	Modulation	TX_Frequency (MHz)	Max. Mark_freq(MHz)	Ref_level(dBm)	Spurious level(dBm)	limit(dBm)	Result
NVNT	ANT2	1Mbps	2402.00	2399.680	2.374	-44.190	-17.626	Pass
NVNT	ANT2	1Mbps	2480.00	2483.875	2.468	-50.500	-17.532	Pass

1 Reference_Level_NVNT_ANT2_1Mbps_2402

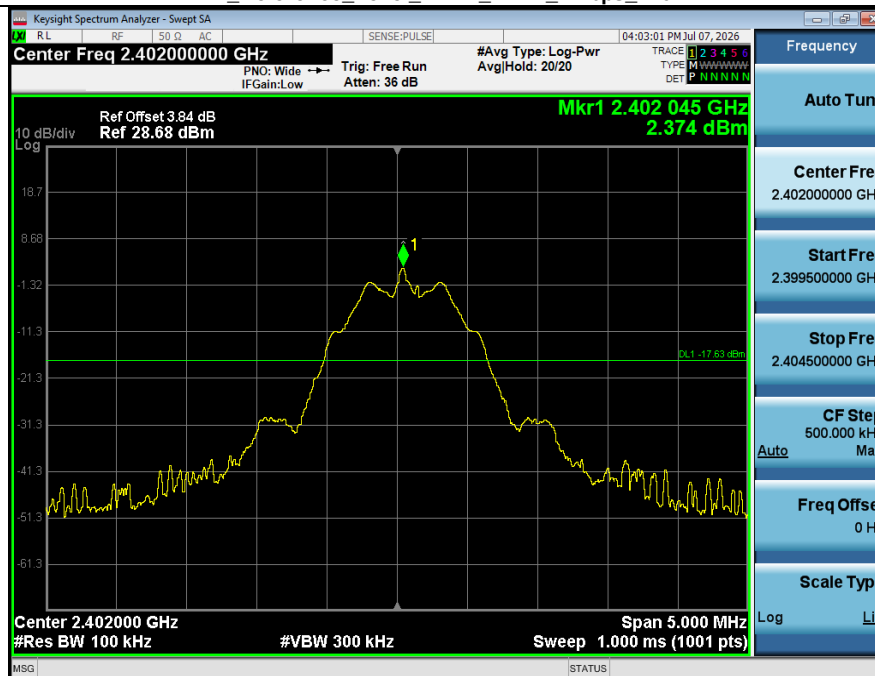



2 Bandedge_NVNT_ANT2_1Mbps_2402


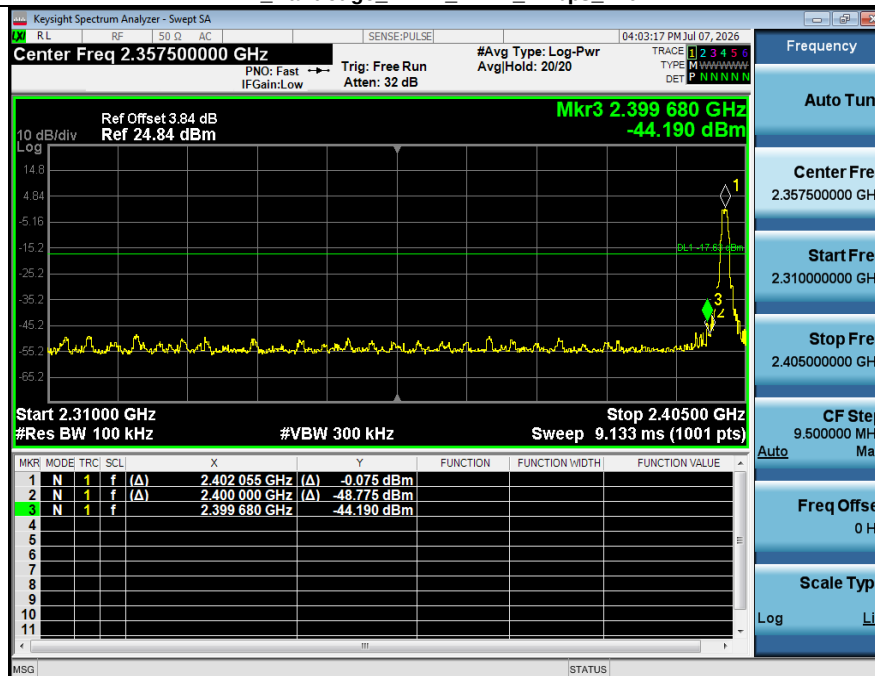




1 Reference_Level_NVNT_ANT2_1Mbps_2480**2 Bandedge_NVNT_ANT2_1Mbps_2480**

Spurious Emission: Pass

Condition	Antenna	Modulation	TX_Frequency (MHz)	Ref_level(dBm)	Spurious level(dBm)	limit(dBm)	Result
NVNT	ANT1	1Mbps	2402.00	2.695	-49.562	-17.305	Pass
NVNT	ANT1	1Mbps	2450.00	2.588	-46.423	-17.412	Pass
NVNT	ANT1	1Mbps	2480.00	-0.493	-49.018	-20.493	Pass

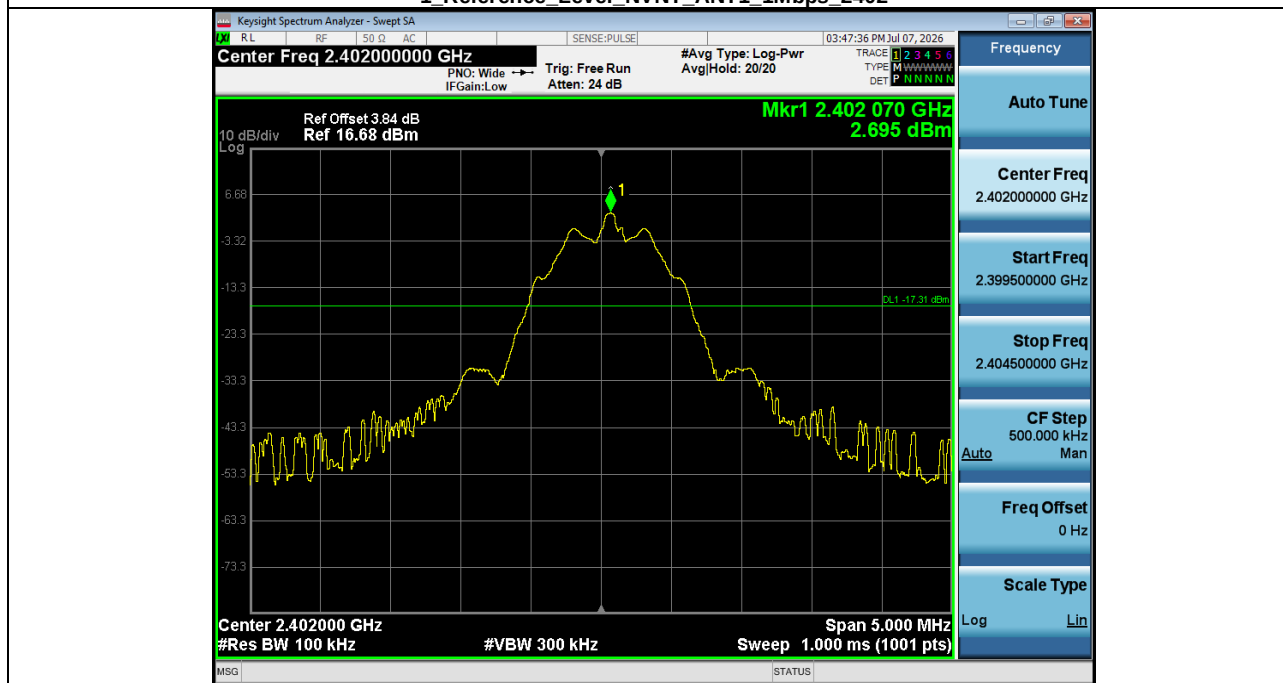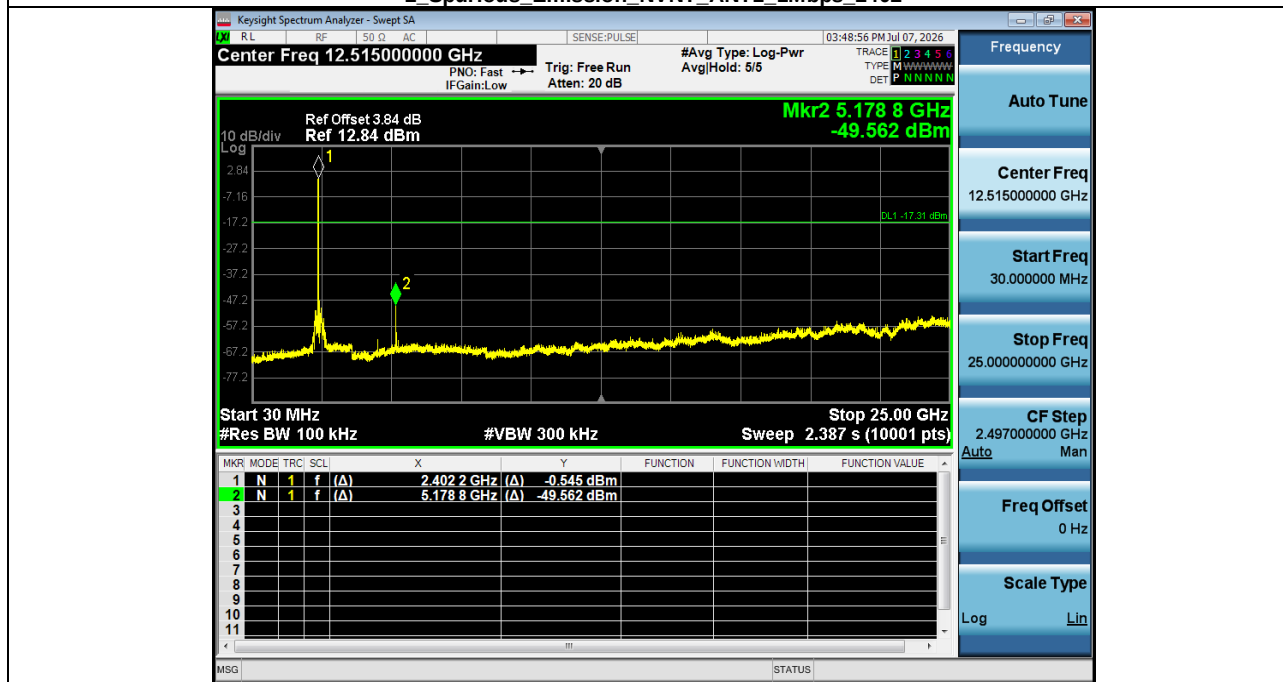
1 Reference Level NVNT ANT1 1Mbps 2402**2 Spurious Emission NVNT ANT1 1Mbps 2402**

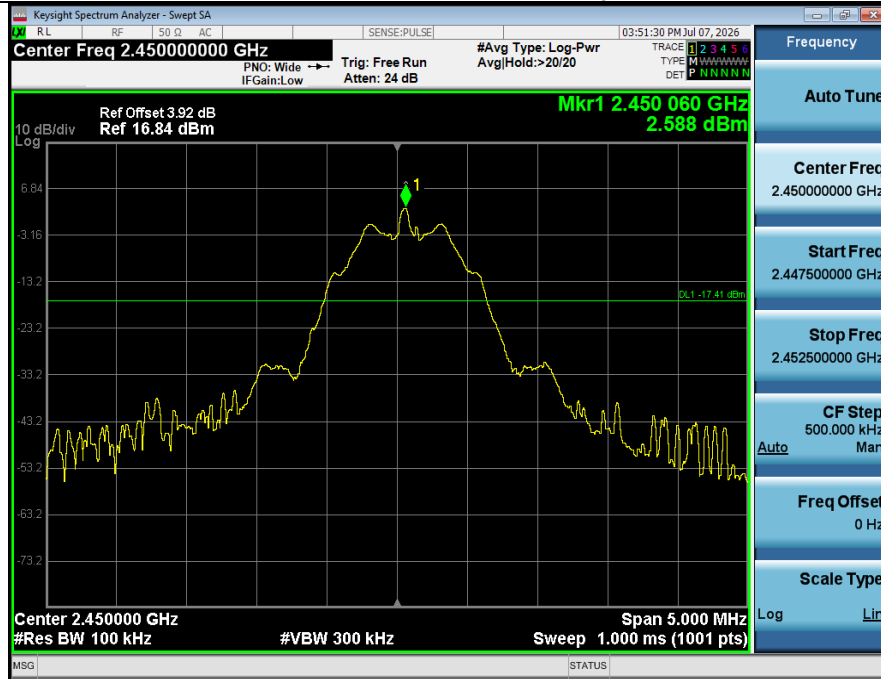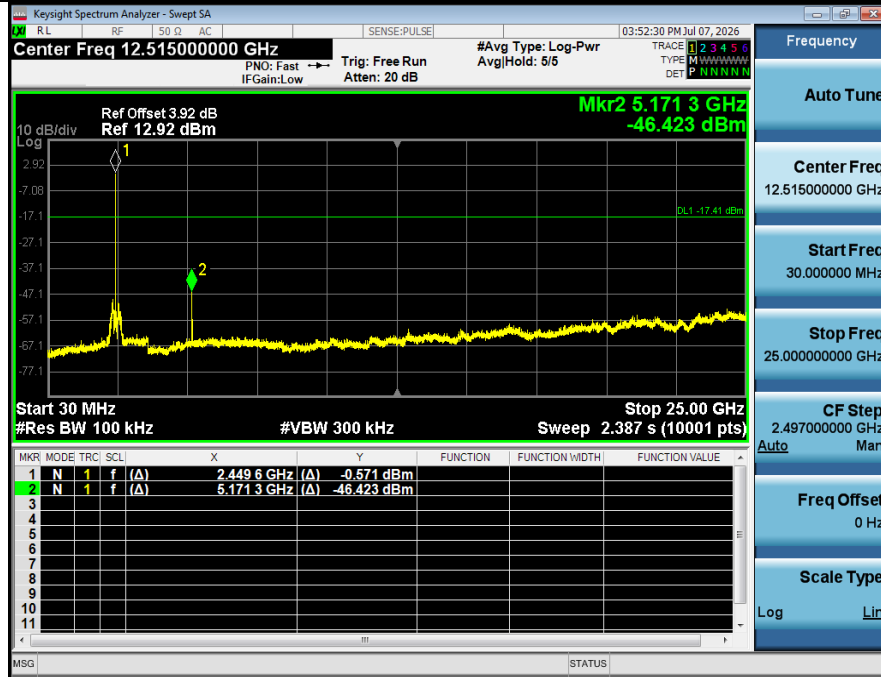1 Reference_Level_NVNT_ANT1_1Mbps_2450**2 Spurious Emission_NVNT_ANT1_1Mbps_2450**

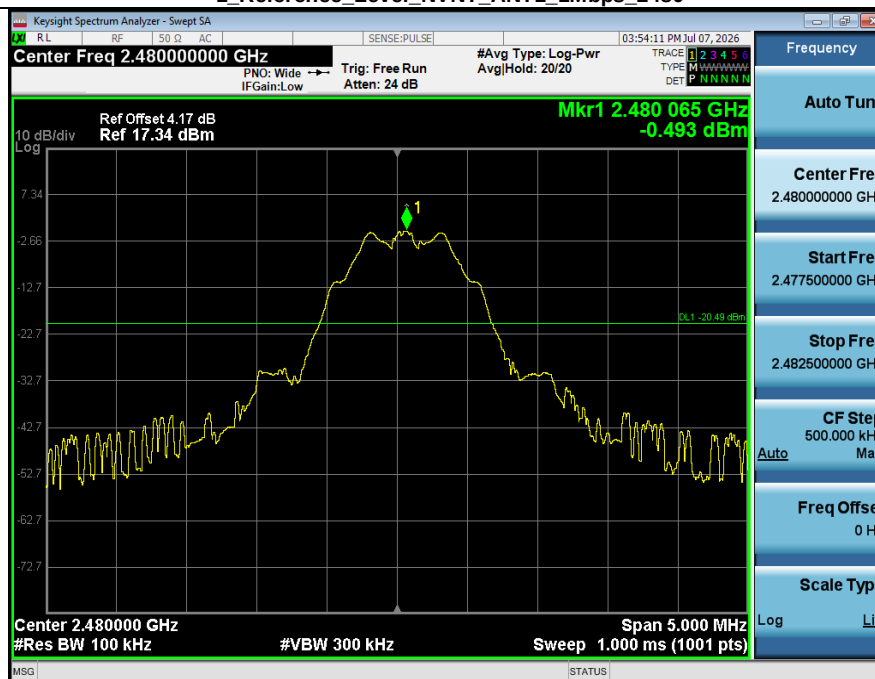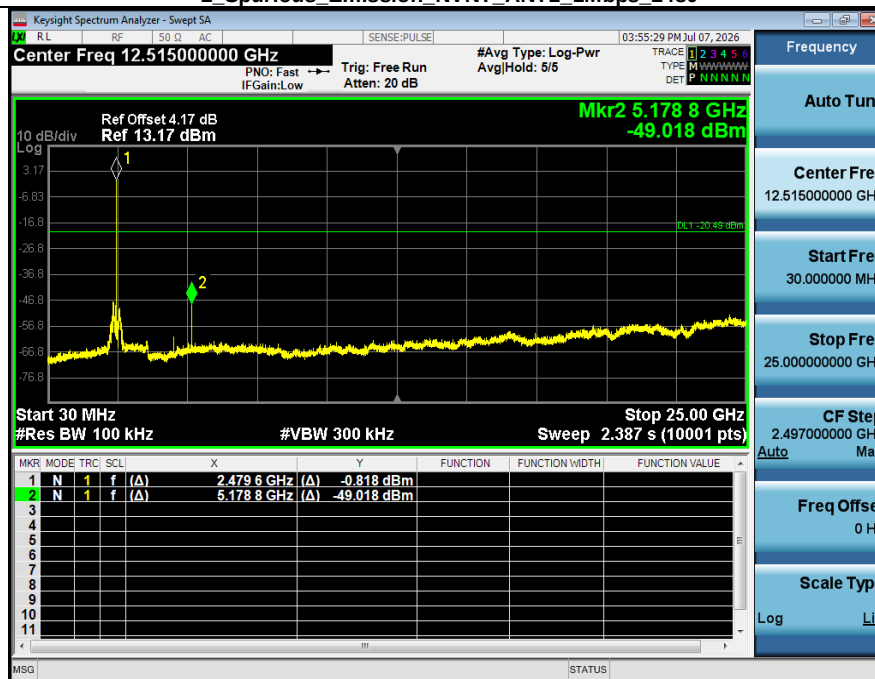
1 Reference_Level_NVNT_ANT1_1Mbps_2480**2 Spurious Emission_NVNT_ANT1_1Mbps_2480**



Condition	Antenna	Modulation	TX_Frequency (MHz)	Ref_level(dBm)	Spurious level(dBm)	limit(dBm)	Result
NVNT	ANT2	1Mbps	2402.00	2.374	-41.858	-17.626	Pass
NVNT	ANT2	1Mbps	2450.00	-0.434	-45.209	-20.434	Pass
NVNT	ANT2	1Mbps	2480.00	2.468	-45.857	-17.532	Pass


1 Reference Level_NVNT_ANT2_1Mbps_2402

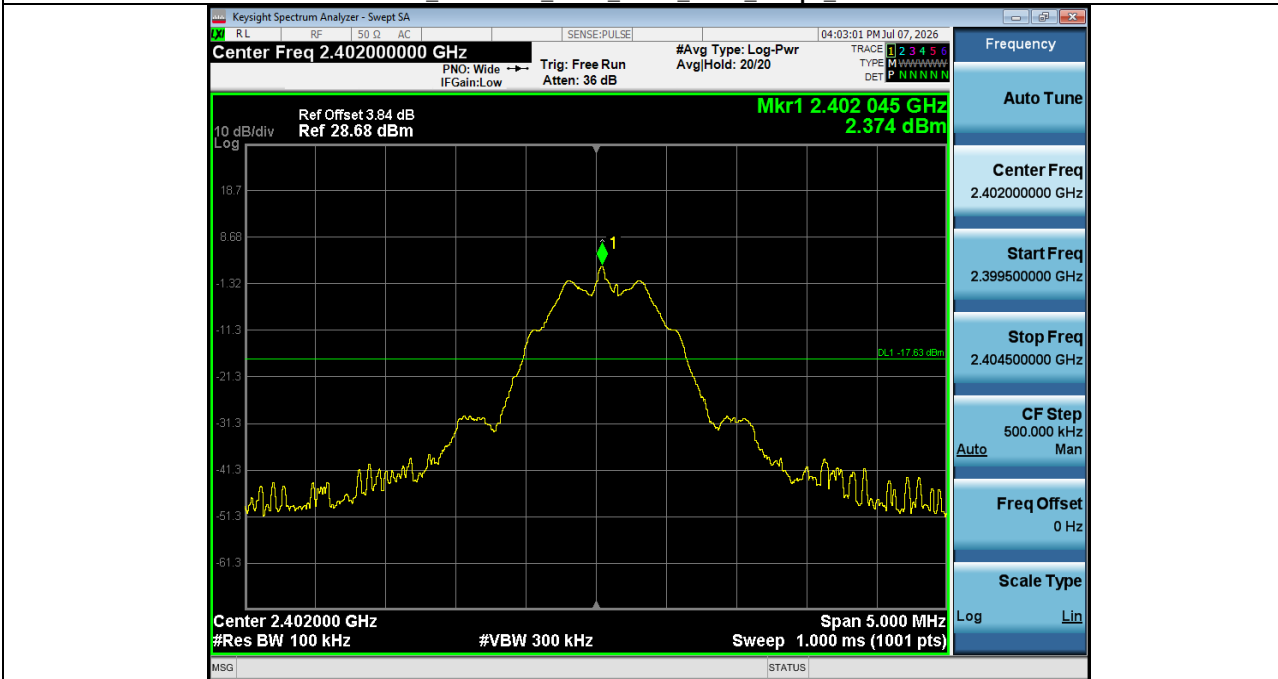

2 Spurious Emission_NVNT_ANT2_1Mbps_2402

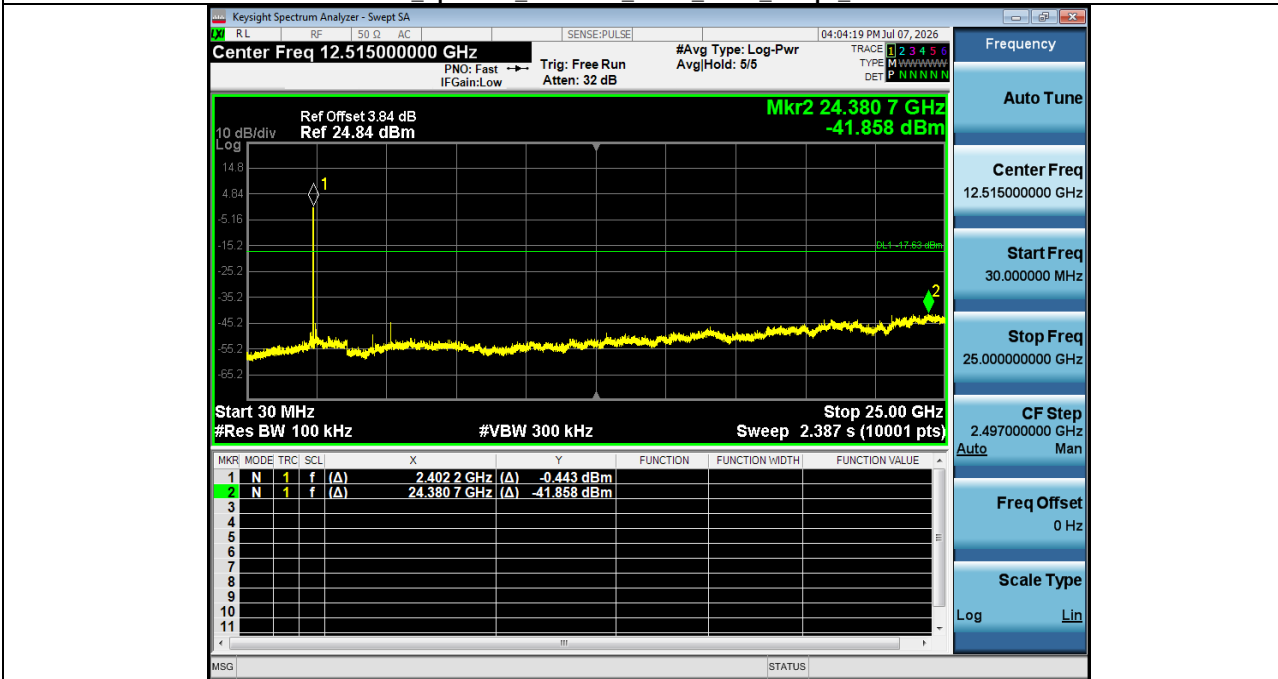

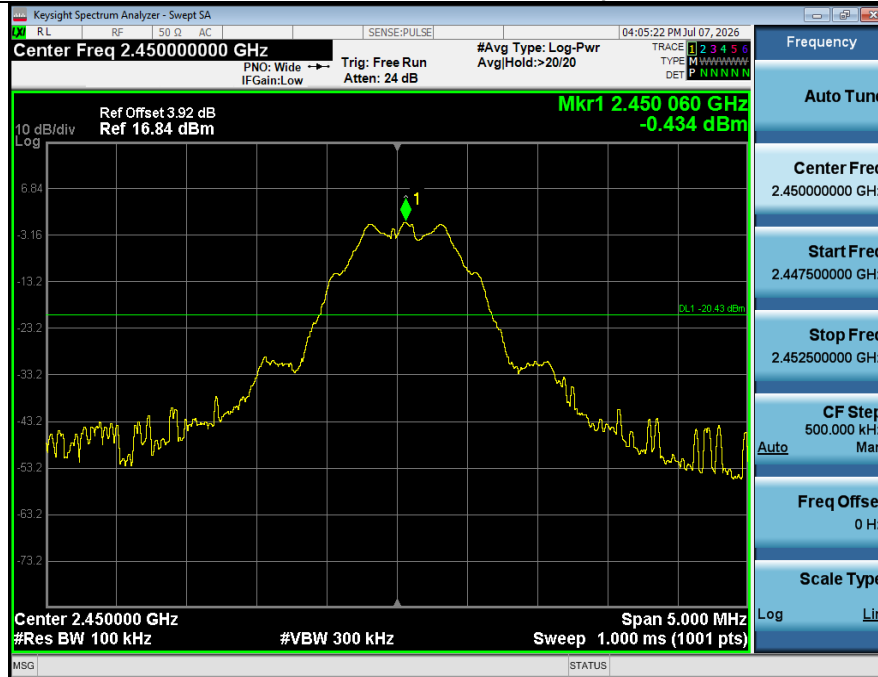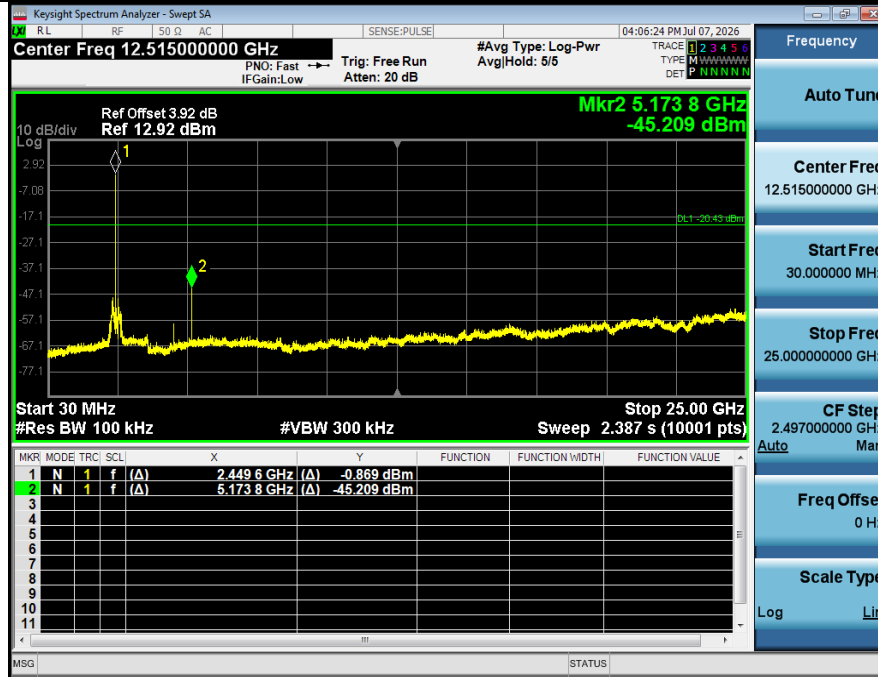1 Reference_Level_NVNT_ANT2_1Mbps_2450**2 Spurious Emission_NVNT_ANT2_1Mbps_2450**

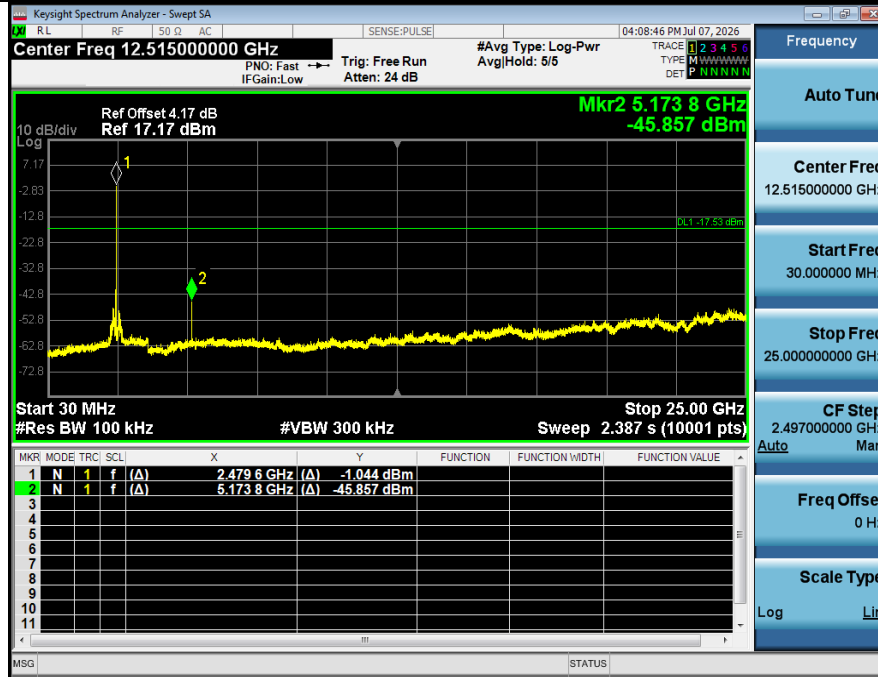1 Reference_Level_NVNT_ANT2_1Mbps_2480**2 Spurious Emission_NVNT_ANT2_1Mbps_2480**

6. Conducted Maximum Output Power

6.1. Test limits

Please refer RSS-247 & FCC PART 15.247.

Regulation 15.247(b) The limit of Maximum Peak Output Power Measurement is 1 W(30dBm).


6.2. Test Procedure

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, section 11.9.1 Maximum peak conducted output power.

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:



- Set the RBW $\geq$ DTS bandwidth.
- Set VBW $\geq [3 \times \text{RBW}]$.
- Set span $\geq [3 \times \text{RBW}]$.
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.


6.3. Test Setup

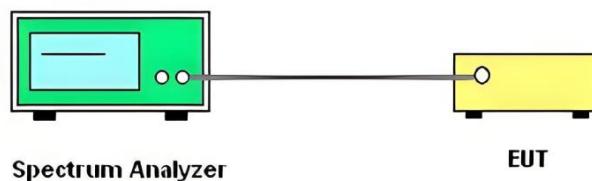


6.4. Test Results



Condition	Antenna	Rate	Frequency (MHz)	Max. Conducted Power(dBm)	Max. Conducted Power(mW)	Limit(mW)	Result
NVNT	ANT1	1Mbps	2402.00	3.06	2.02	1000	Pass
NVNT	ANT1	1Mbps	2450.00	3.01	2.00	1000	Pass
NVNT	ANT1	1Mbps	2480.00	2.88	1.94	1000	Pass

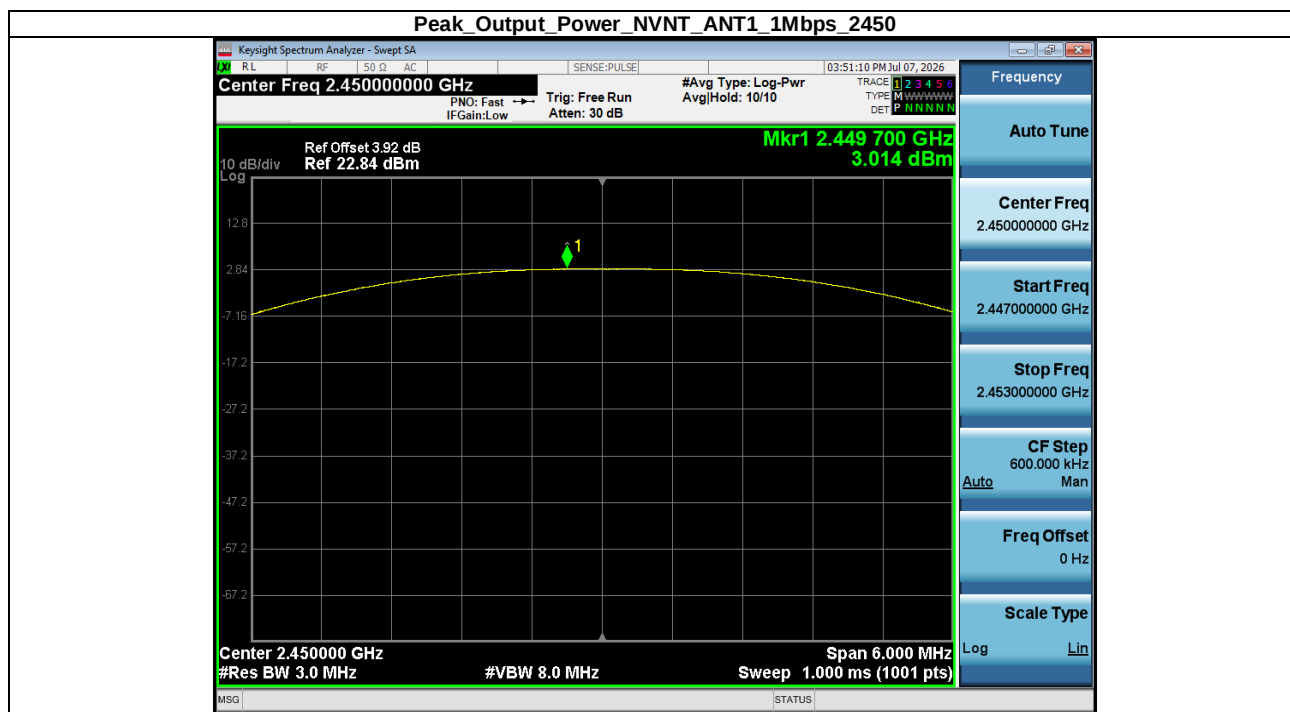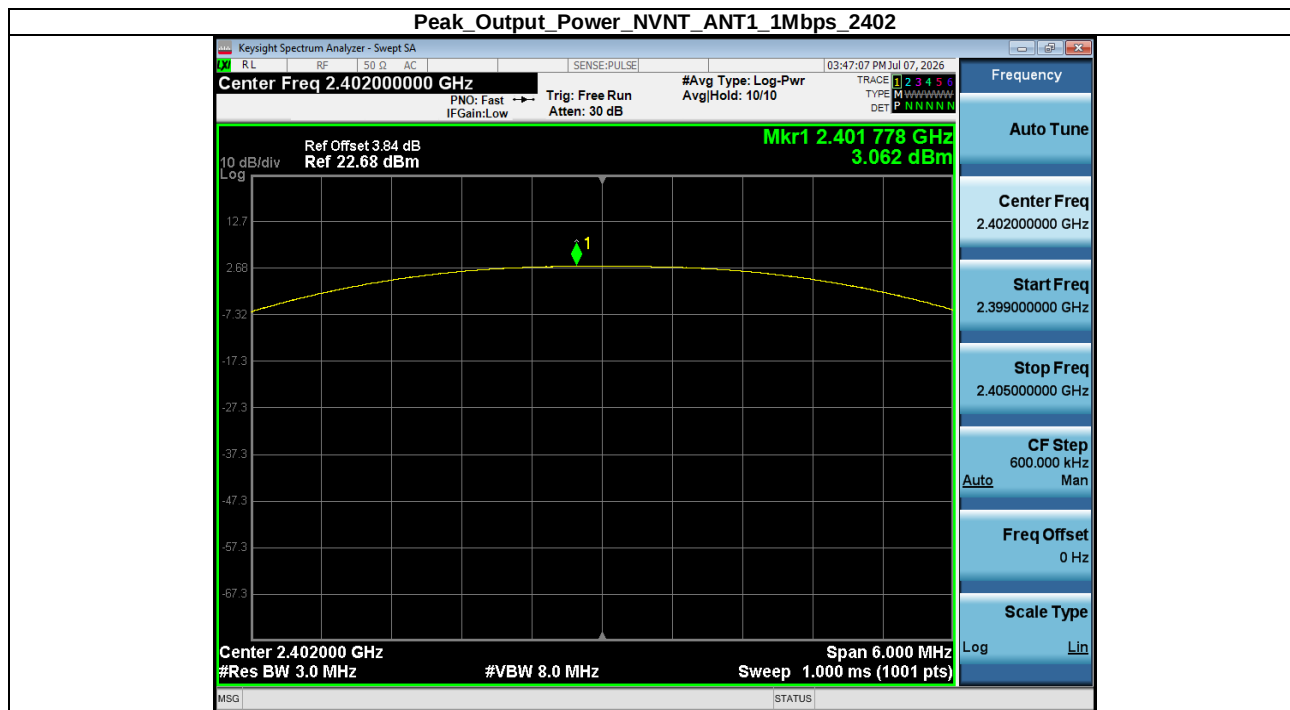

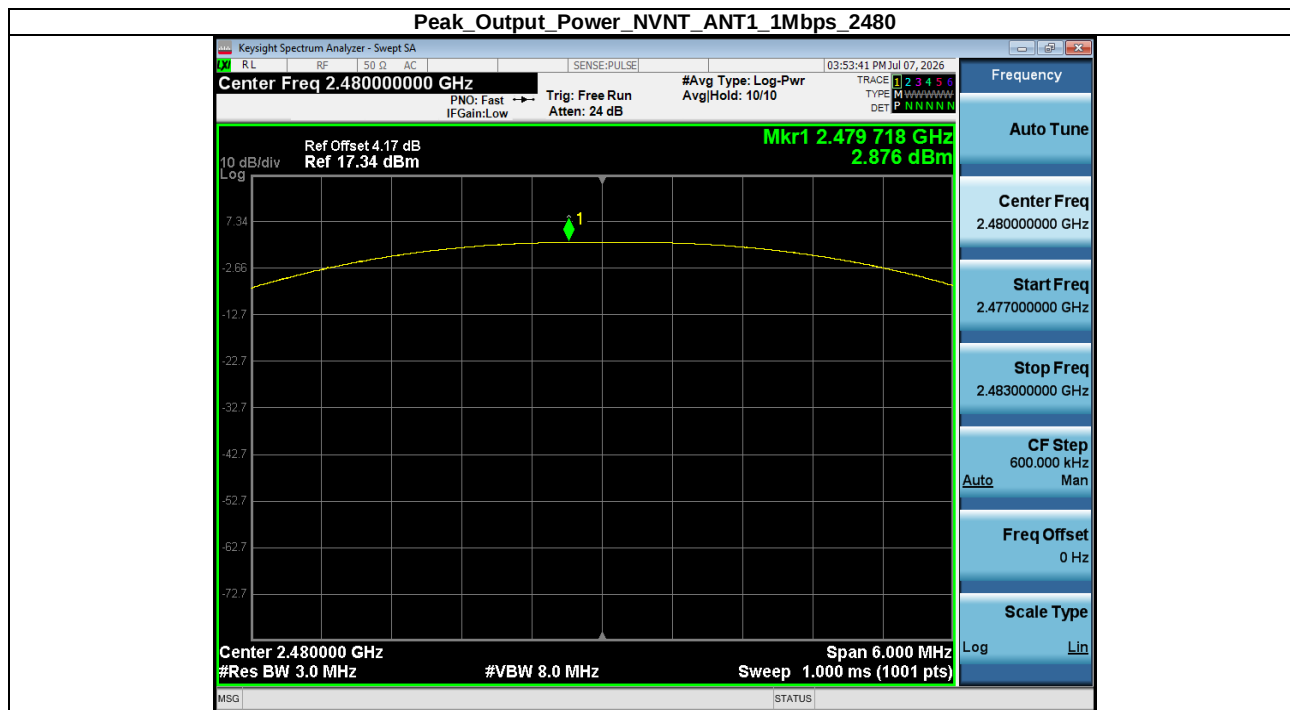


Condition	Antenna	Rate	Frequency (MHz)	Dutycycle(%)	Duty_factor
NVNT	ANT1	1Mbps	2402.00	71.98	1.43
NVNT	ANT1	1Mbps	2450.00	65.04	1.87
NVNT	ANT1	1Mbps	2480.00	68.37	1.65

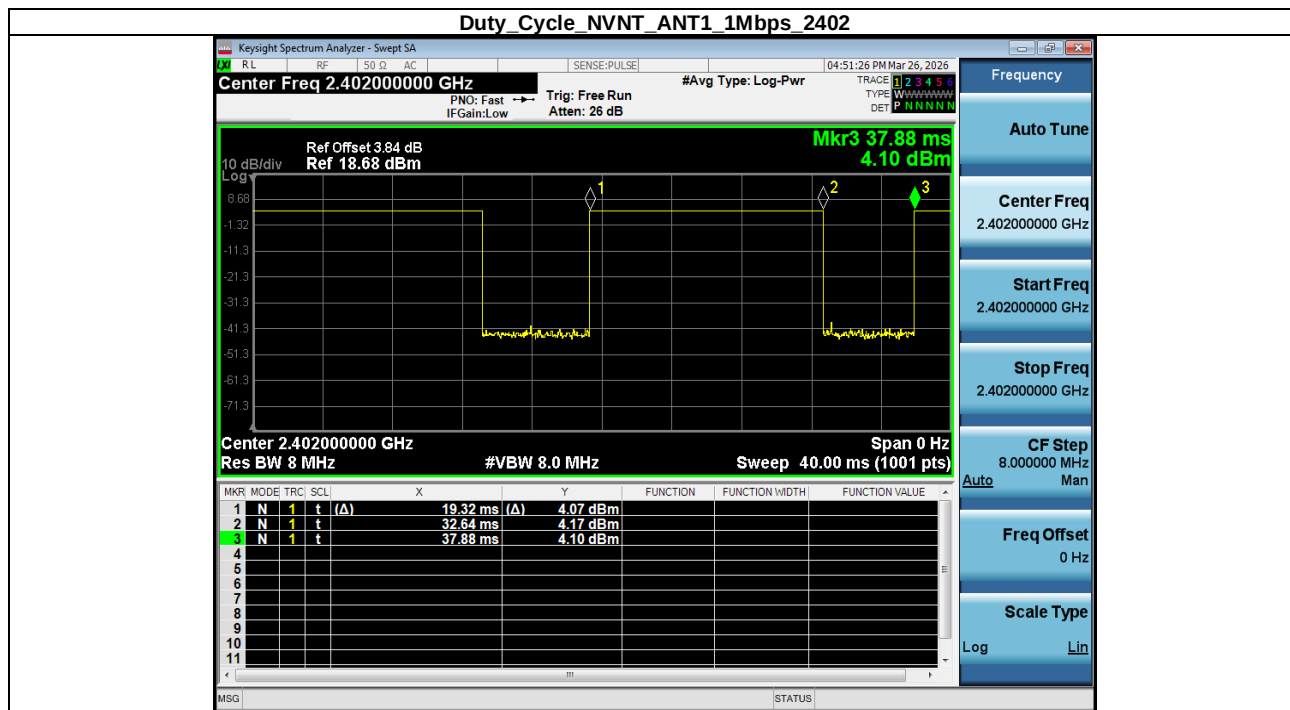

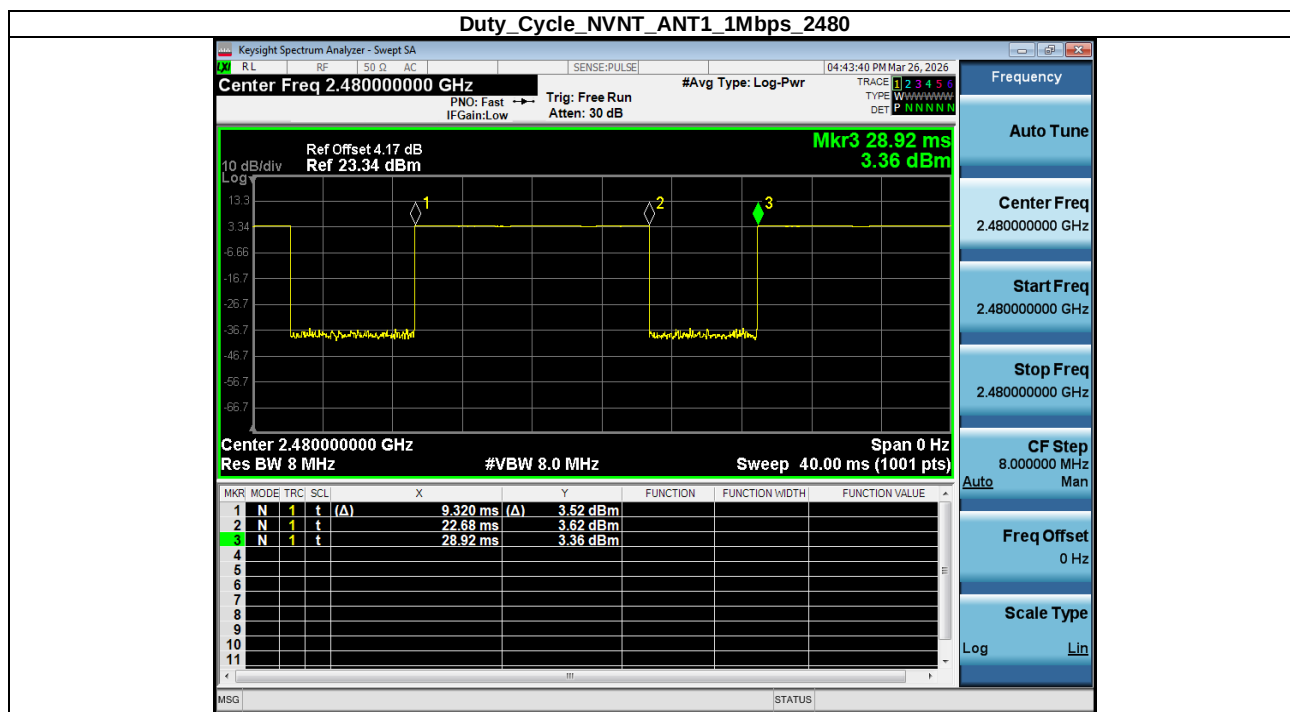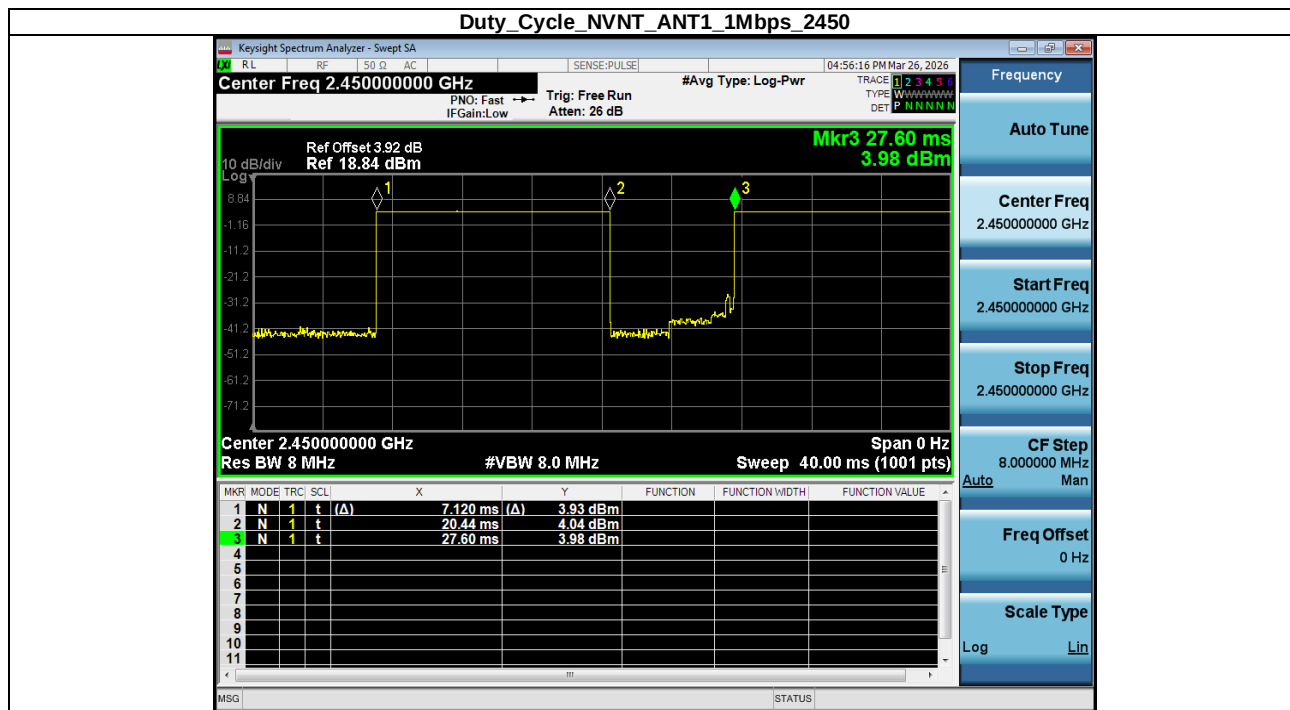



Condition	Antenna	Rate	Frequency (MHz)	Max. Conducted Power(dBm)	Max. Conducted Power(mW)	Limit(mW)	Result
NVNT	ANT2	1Mbps	2402.00	3.03	2.01	1000	Pass
NVNT	ANT2	1Mbps	2450.00	2.89	1.95	1000	Pass
NVNT	ANT2	1Mbps	2480.00	2.68	1.85	1000	Pass

Peak Output Power_NVNT_ANT2_1Mbps_2402

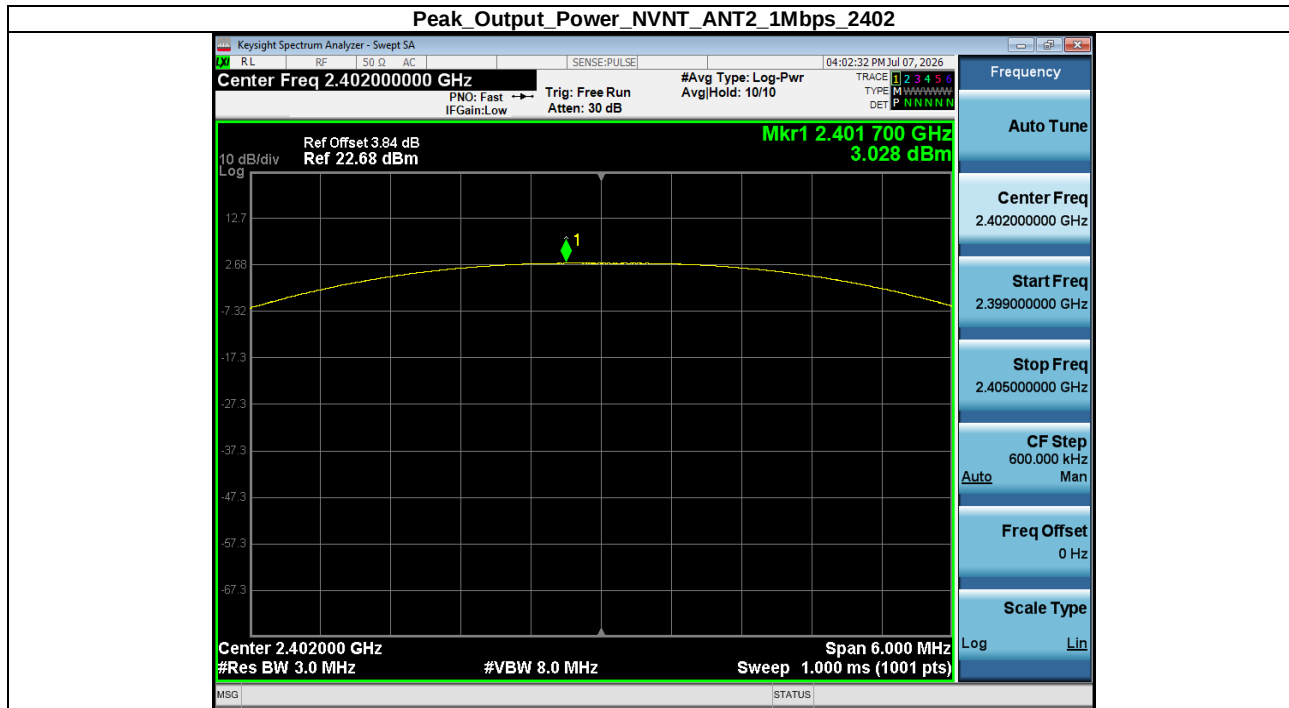




Peak Output Power_NVNT_ANT2_1Mbps_2450

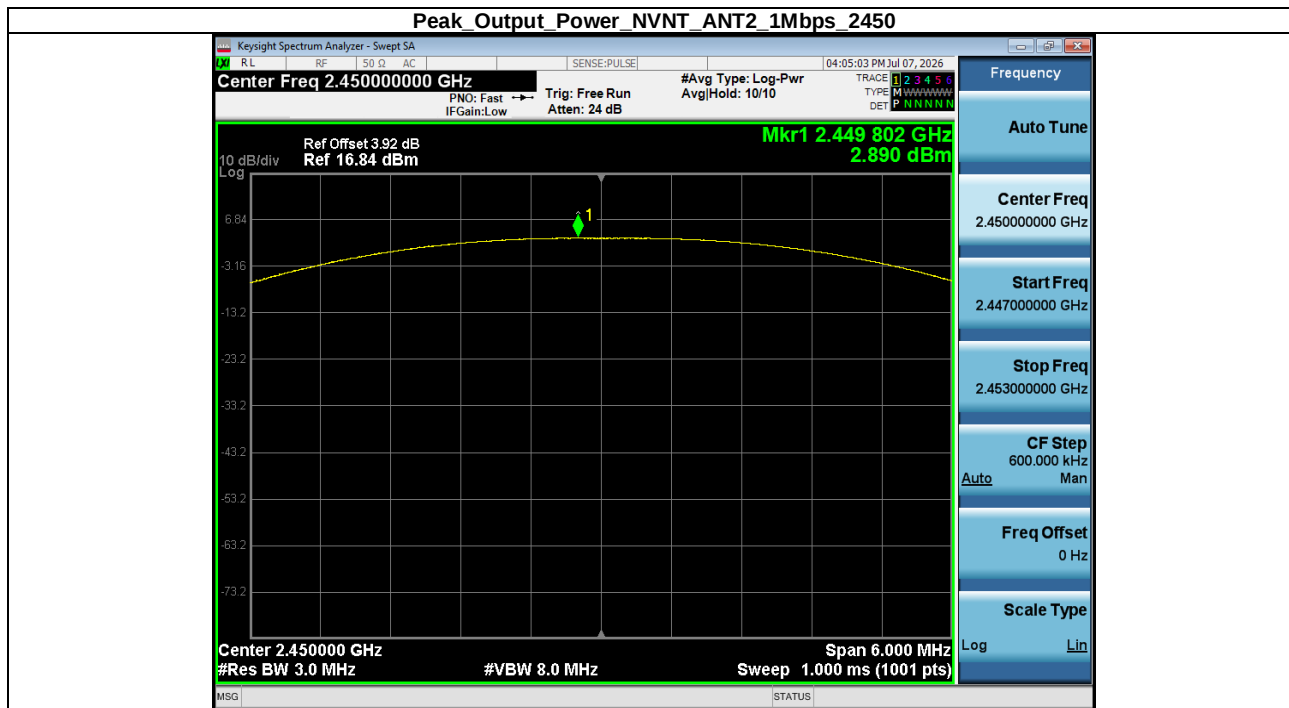

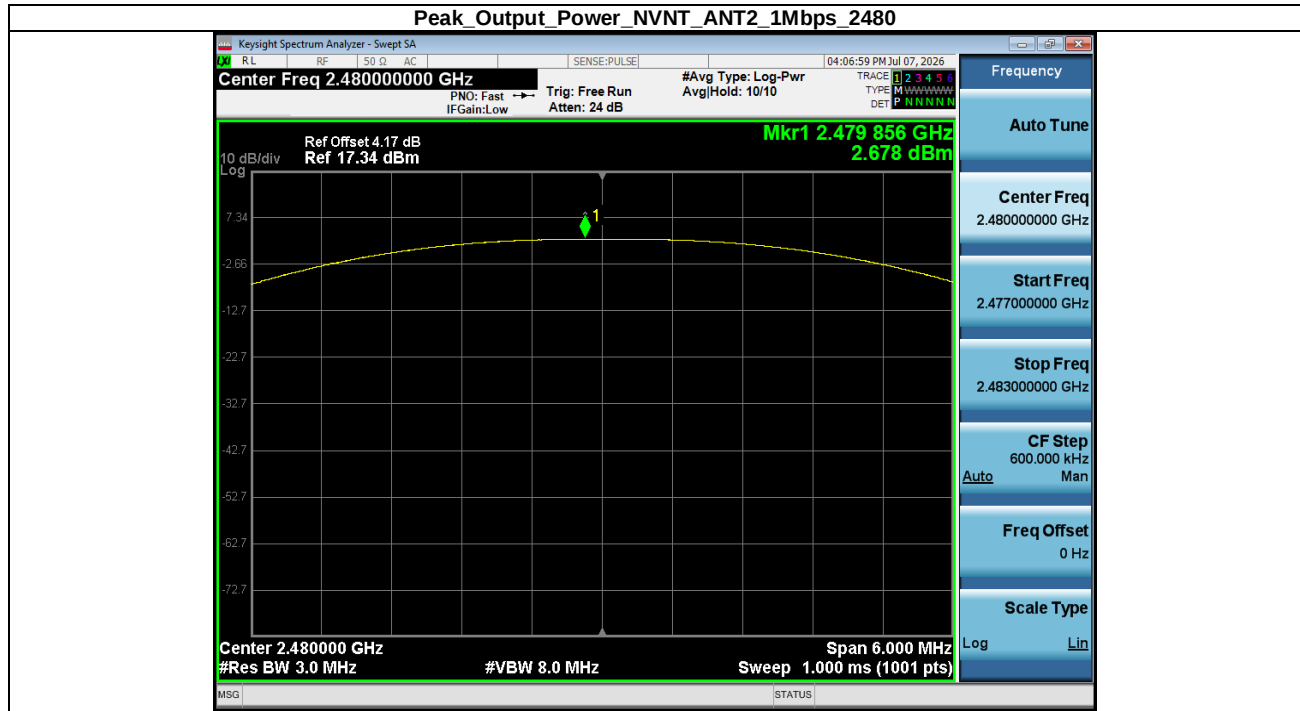

Condition	Antenna	Rate	Frequency (MHz)	Dutycycle(%)	Duty_factor
NVNT	ANT2	1Mbps	2402.00	68.51	1.64
NVNT	ANT2	1Mbps	2450.00	72.08	1.42
NVNT	ANT2	1Mbps	2480.00	64.79	1.89

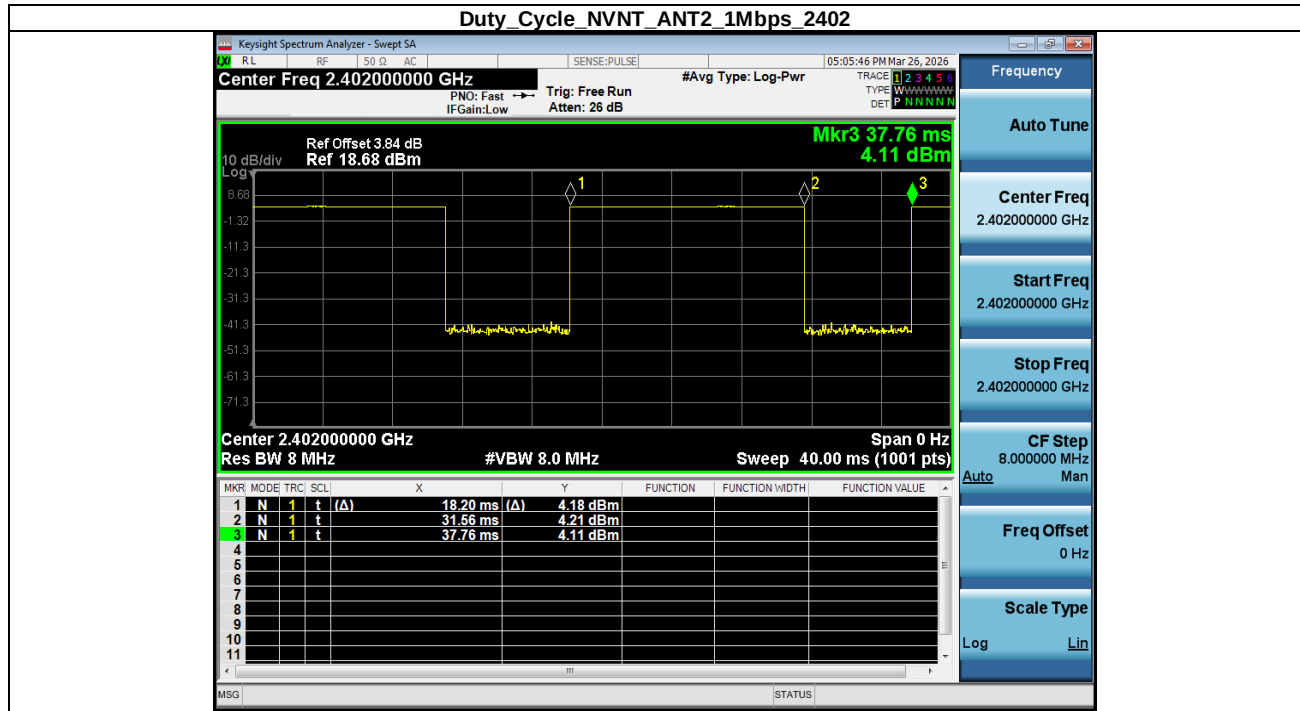

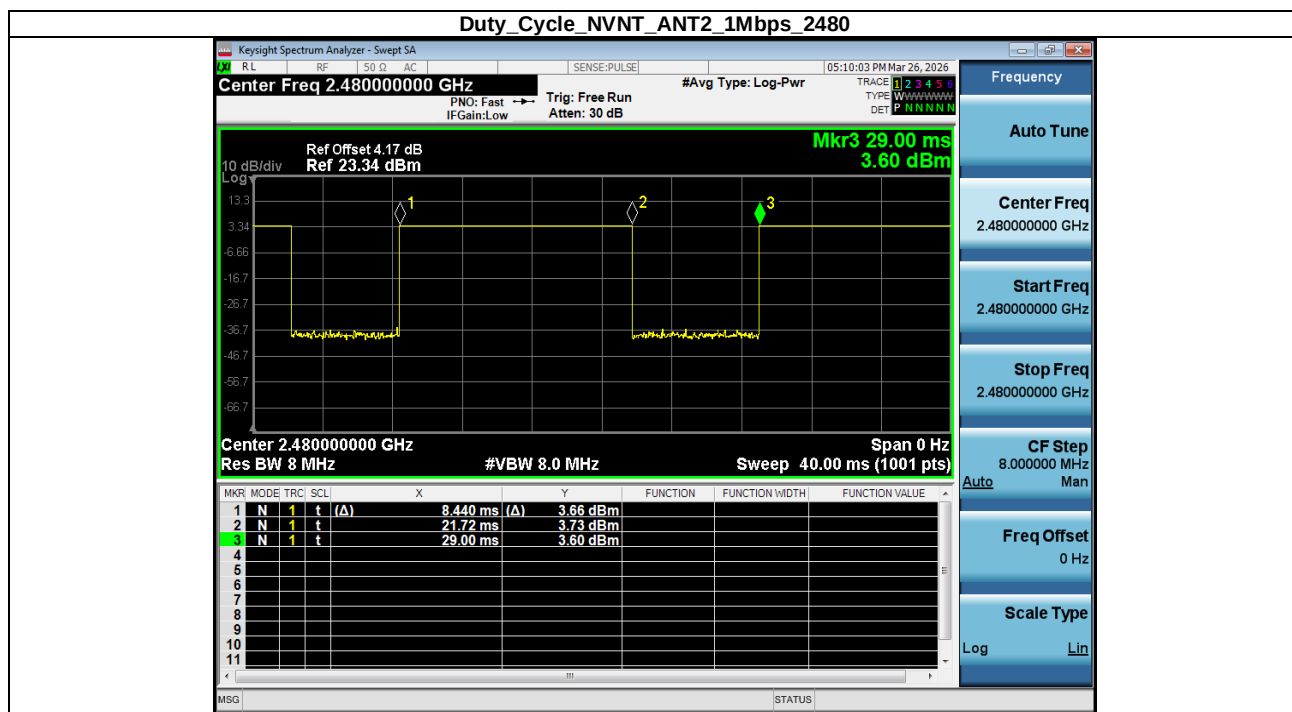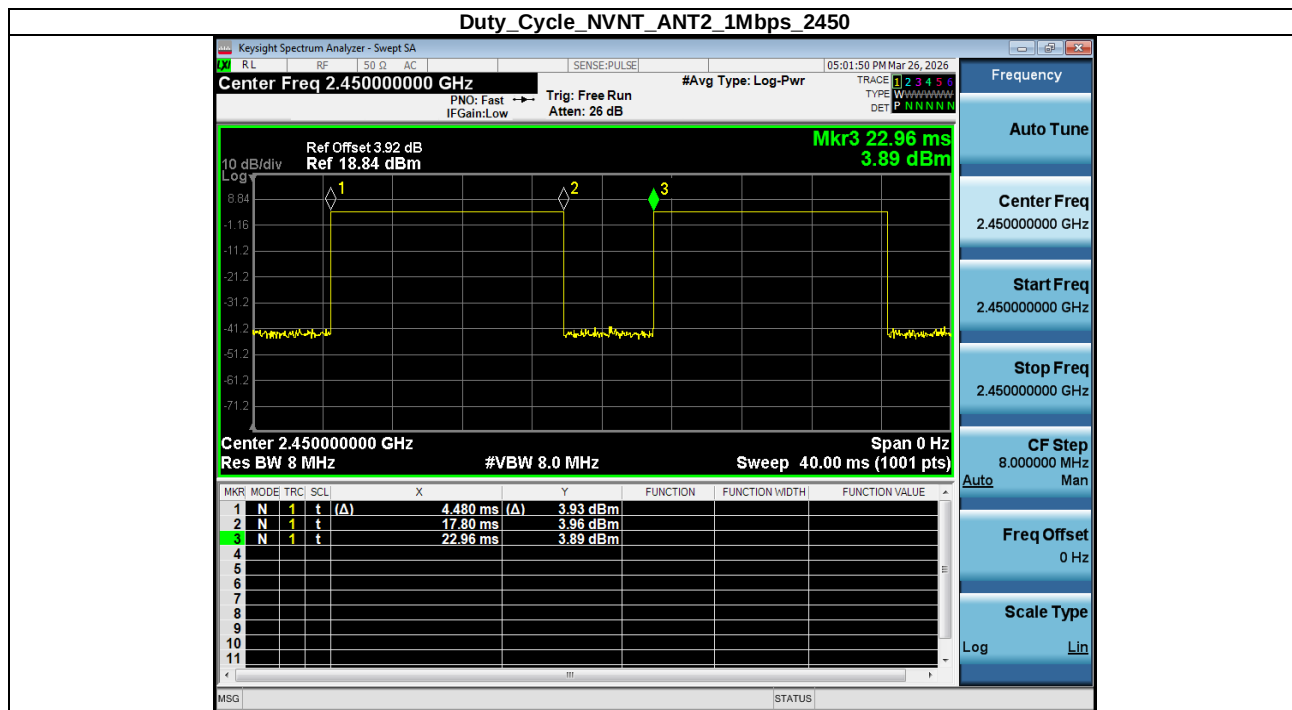

7. Band Edge Test


7.1. Test Limit

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100 **	3
88-216	150 **	3
216-960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.

7.2. Block Diagram of Test Setup

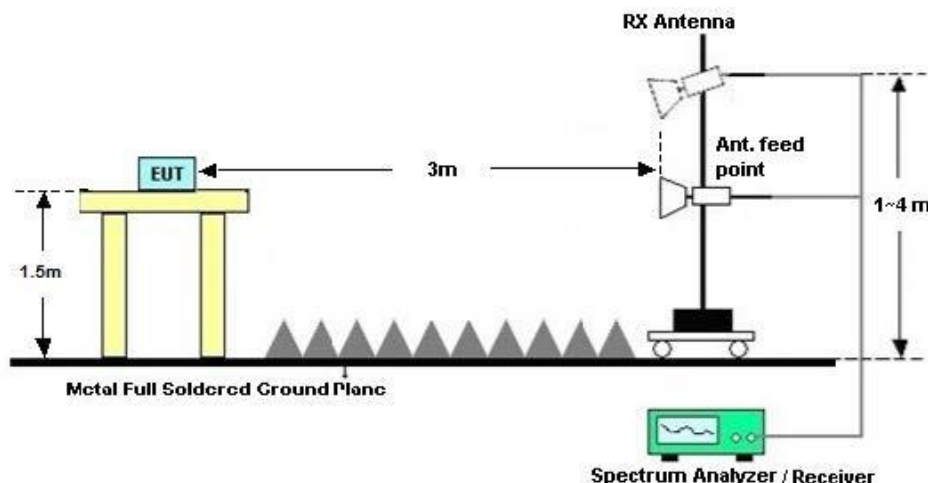

7.3. Test Procedure

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 6.10.5.2

All restriction band and non- restriction band have been tested, only worse case is reported.

Details see the KDB558074 D01 Meas Guidance v05r02

1. Put the EUT on a 1.5m high table, power on the EUT. Emissions were scanned and measured rotating the EUT to 360 degrees, Find the maximum Emission
2. Check the spurious emissions out of band.
3. RBW 1MHz, VBW 3MHz, peak detector for peak value, RBW 1MHz, VBW 10Hz, RMS detector for AV value.

7.4. Test Results

Test Date	: 2026.07.14	Temperature	: 26°C
Test Engineer	: Felix Pang	Humidity	: 54%
Test Results	: PASS		

TagLINK Bridge ANT 1:

Frequency Range : 2310MHz~2410MHz								
Test Mode : 1Mbps: GFSK TX 2402MHz								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	59.88	-20.45	39.43	74.00	-34.57	Peak
2	2390	H	--	-20.45	--	54.00	--	Avg
3	2400	H	63.32	-20.41	42.91	74.00	-31.09	Peak
4	2400	H	--	-20.41	--	54.00	--	Avg
1	2390	V	60.49	-20.45	40.04	74.00	-33.96	Peak
2	2390	V	--	-20.45	--	54.00	--	Avg
3	2400	V	64.19	-20.41	43.78	74.00	-30.22	Peak
4	2400	V	--	-20.41	--	54.00	--	Avg
Frequency Range : 2450MHz~2550MHz								
Test Mode : 1Mbps: GFSK TX 2480MHz								
1	2483.5	H	62.98	-20.15	42.83	74.00	-31.17	Peak
2	2483.5	H	--	-20.15	--	54.00	--	Avg
1	2483.5	V	63.60	-20.15	43.45	74.00	-30.55	Peak
2	2483.5	V	--	-20.15	--	54.00	--	Avg
Note:	1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor, Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.							

TagLINK Bridge ANT 2:

Frequency Range : 2310MHz~2410MHz								
Test Mode : 1Mbps: GFSK TX 2402MHz								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	62.38	-20.45	41.93	74.00	-32.07	Peak
2	2390	H	--	-20.45	--	54.00	--	Avg
3	2400	H	64.67	-20.41	44.26	74.00	-29.74	Peak
4	2400	H	--	-20.41	--	54.00	--	Avg
1	2390	V	62.30	-20.45	41.85	74.00	-32.15	Peak
2	2390	V	--	-20.45	--	54.00	--	Avg
3	2400	V	63.80	-20.41	43.39	74.00	-30.61	Peak
4	2400	V	--	-20.41	--	54.00	--	Avg
Frequency Range : 2450MHz~2550MHz								
Test Mode : 1Mbps: GFSK TX 2480MHz								
1	2483.5	H	61.85	-20.15	41.70	74.00	-32.30	Peak
2	2483.5	H	--	-20.15	--	54.00	--	Avg
1	2483.5	V	62.97	-20.15	42.82	74.00	-31.18	Peak
2	2483.5	V	--	-20.15	--	54.00	--	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor, Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

TagLINK Bridge Slim ANT 1:

Frequency Range : 2310MHz~2410MHz								
Test Mode : 1Mbps: GFSK TX 2402MHz								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	60.31	-20.45	39.86	74.00	-34.14	Peak
2	2390	H	--	-20.45	--	54.00	--	Avg
3	2400	H	64.88	-20.41	44.47	74.00	-29.53	Peak
4	2400	H	--	-20.41	--	54.00	--	Avg
1	2390	V	60.76	-20.45	40.31	74.00	-33.69	Peak
2	2390	V	--	-20.45	--	54.00	--	Avg
3	2400	V	63.81	-20.41	43.40	74.00	-30.60	Peak
4	2400	V	--	-20.41	--	54.00	--	Avg
Frequency Range : 2450MHz~2550MHz								
Test Mode : 1Mbps: GFSK TX 2480MHz								
1	2483.5	H	62.76	-20.15	42.61	74.00	-31.39	Peak
2	2483.5	H	--	-20.15	--	54.00	--	Avg
1	2483.5	V	65.11	-20.15	44.96	74.00	-29.04	Peak
2	2483.5	V	--	-20.15	--	54.00	--	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor, Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

TagLINK Bridge Slim ANT 2:

Frequency Range : 2310MHz~2410MHz								
Test Mode : 1Mbps: GFSK TX 2402MHz								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	61.00	-20.45	40.55	74.00	-33.45	Peak
2	2390	H	--	-20.45	--	54.00	--	Avg
3	2400	H	63.39	-20.41	42.98	74.00	-31.02	Peak
4	2400	H	--	-20.41	--	54.00	--	Avg
1	2390	V	61.68	-20.45	41.23	74.00	-32.77	Peak
2	2390	V	--	-20.45	--	54.00	--	Avg
3	2400	V	64.35	-20.41	43.94	74.00	-30.06	Peak
4	2400	V	--	-20.41	--	54.00	--	Avg
Frequency Range : 2450MHz~2550MHz								
Test Mode : 1Mbps: GFSK TX 2480MHz								
1	2483.5	H	62.11	-20.15	41.96	74.00	-32.04	Peak
2	2483.5	H	--	-20.15	--	54.00	--	Avg
1	2483.5	V	65.86	-20.15	45.71	74.00	-28.29	Peak
2	2483.5	V	--	-20.15	--	54.00	--	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor, Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

8. Antenna Requirement

8.1. Standard Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

8.2. Results

The EUT antenna is internal antenna. It complies with the standard requirement.

9. Photos of test setup

Reference to the **psi2602073G1-C01-R06 appendix I Test Setup Photo** for details.

10. Photos of EUT

Reference to the **psi2602073G1-C01-R06 appendix II external photos** and **appendix III internal photos** for details.

----- END OF REPORT-----