

TEST REPORT

Product Name : WIRELESS ACCESS POINT
Brand Mark : N/A
Model No. : GFX-AP-NA
FCC ID : 2AY2C-APNA01
Report Number : BLA-EMC-202204-A8103
Date of Sample Receipt : 2022/4/21
Date of Test : 2022/4/21 to 2022/9/14
Date of Issue : 2022/9/14
Test Standard : 47 CFR Part 15, Subpart C 15.249
Test Result : Pass

Prepared for:

GrowFlux, Inc.

3401 Market St STE 200 Philadelphia Pennsylvania United States

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.

**Building C, No. 107, Shihuan Road, Shiyao Sub-District, Baoan District,
Shenzhen, Guangdong Province, China**

TEL: +86-755-23059481

Compiled by:

Jozu

Approved by:

Blue Zhong

Review by:

Sueels

Date:

2022/9/14



REPORT REVISE RECORD

Version No.	Date	Description
00	2022/9/14	Original

BlueAsia

TABLE OF CONTENTS

1	TEST SUMMARY	5
2	GENERAL INFORMATION	6
3	GENERAL DESCRIPTION OF E.U.T.	6
4	TEST ENVIRONMENT	7
5	TEST MODE	7
6	MEASUREMENT UNCERTAINTY	7
7	DESCRIPTION OF SUPPORT UNIT	8
8	LABORATORY LOCATION	8
9	TEST INSTRUMENTS LIST	9
10	RADIATED EMISSIONS	12
10.1	LIMITS	12
10.2	BLOCK DIAGRAM OF TEST SETUP	13
10.3	PROCEDURE	13
10.4	TEST DATA	14
11	RESTRICTED BAND AROUND FUNDAMENTAL FREQUENCY	18
11.1	LIMITS	18
11.2	BLOCK DIAGRAM OF TEST SETUP	19
11.3	PROCEDURE	19
11.4	TEST DATA	21
12	FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL (15.249(A))	23
12.1	LIMITS	23
12.2	BLOCK DIAGRAM OF TEST SETUP	24
12.3	PROCEDURE	24
12.4	TEST DATA	26
13	20DB BANDWIDTH	27
13.1	LIMITS	27
13.2	BLOCK DIAGRAM OF TEST SETUP	27
1.1	TEST DATA	27
1.2	TEST PLOTS	28
14	CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)	29

14.1	LIMITS	29
14.2	BLOCK DIAGRAM OF TEST SETUP	29
14.3	PROCEDURE	29
14.4	TEST DATA	31
15	ANTENNA REQUIREMENT	33
15.1	CONCLUSION	33
APPENDIX A: PHOTOGRAPHS OF TEST SETUP		34
APPENDIX B: PHOTOGRAPHS OF EUT		36

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Radiated Emissions	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.4&6.5&6.6	47 CFR Part 15, Subpart C 15.209 & 15.249 (a),(d)	Pass
Restricted Band Around Fundamental Frequency	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.4&6.5&6.6	47 CFR Part 15, Subpart C 15.205 & 15.249(d) & 15.209	Pass
Field Strength of the Fundamental Signal (15.249(a))	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.5&6.6	47 CFR Part 15, Subpart C 15.249(a)	Pass
20dB Bandwidth	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.9	47 CFR Part 15, Subpart C 15.215	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.249	N/A	47 CFR Part 15, Subpart C 15.203	Pass

2 GENERAL INFORMATION

Applicant	GrowFlux, Inc.
Address	3401 Market St STE 200 Philadelphia Pennsylvania United States
Manufacturer	Shenzhen RF-star Technology Co., Ltd.
Address	C601, Skyworth Building, High-tech Park, Nanshan District, Shenzhen, China, 518057
Factory	Shenzhen RF-star Technology Co., Ltd.
Address	C601, Skyworth Building, High-tech Park, Nanshan District, Shenzhen, China, 518057
Product Name	WIRELESS ACCESS POINT
Test Model No.	GFX-AP-NA

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	2.4
Software Version	GFX-AP-V2
Operation Frequency:	915MHz
Channel numbers:	1
Modulation type:	2-GFSK
Antenna Type:	PCB antenna
Antenna gain:	3.4dBi (Provided by customer)
Power supply:	DC 5.0V

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	DC5V

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in transmitting mode

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
N/A	N/A	N/A	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:
BlueAsia of Technical Services(Shenzhen) Co., Ltd.
Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	10/11/2020	9/11/2023
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Receiver	R&S	ESR7	101199	24/9/2021	23/9/2022
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	26/9/2020	25/9/2022
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	26/9/2020	25/9/2022
Amplifier	SKET	LNPA-0118-45	N/A	24/9/2021	23/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	26/9/2020	25/9/2022

Test Equipment Of Restricted Band Around Fundamental Frequency					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	10/11/2020	9/11/2023
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Receiver	R&S	ESR7	101199	24/9/2021	23/9/2022
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	26/9/2020	25/9/2022
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	26/9/2020	25/9/2022
Amplifier	SKET	LNPA-0118-45	N/A	24/9/2021	23/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	26/9/2020	25/9/2022

Test Equipment Of Field Strength of the Fundamental Signal (15.249(a))

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	10/11/2020	9/11/2023
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Receiver	R&S	ESR7	101199	24/9/2021	23/9/2022
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	26/9/2020	25/9/2022
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	26/9/2020	25/9/2022
Amplifier	SKET	LNPA-0118-45	N/A	24/9/2021	23/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	26/9/2020	25/9/2022

Test Equipment Of 20dB Bandwidth

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	25/11/2020	24/11/2023
Receiver	R&S	ESPI3	101082	24/9/2021	23/9/2022
LISN	R&S	ENV216	3560.6550.15	24/9/2021	23/9/2022
LISN	AT	AT166-2	AKK1806000003	26/9/2021	25/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	25/11/2020	24/11/2023
Receiver	R&S	ESPI3	101082	24/9/2021	23/9/2022

LISN	R&S	ENV216	3560.6550.15	24/9/2021	23/9/2022
LISN	AT	AT166-2	AKK1806000003	26/9/2021	25/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A

BlueAsia


10 RADIATED EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.249
Test Method	ANSI C63.10 (2013) Section 6.4&6.5&6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

10.1 LIMITS

Frequency(MHz)	Field strength (microvolts/meter)	Limit (dBuV/m)	Detector	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	-	300
0.490-1.705	24000/F(kHz)	-	-	30
1.705-30	30	-	-	30
30-88	100	40.0	QP	3
88-216	150	43.5	QP	3
216-960	200	46.0	QP	3
960-1000	500	54.0	QP	3
Above 1000	500	54.0	AV	3

10.2 BLOCK DIAGRAM OF TEST SETUP

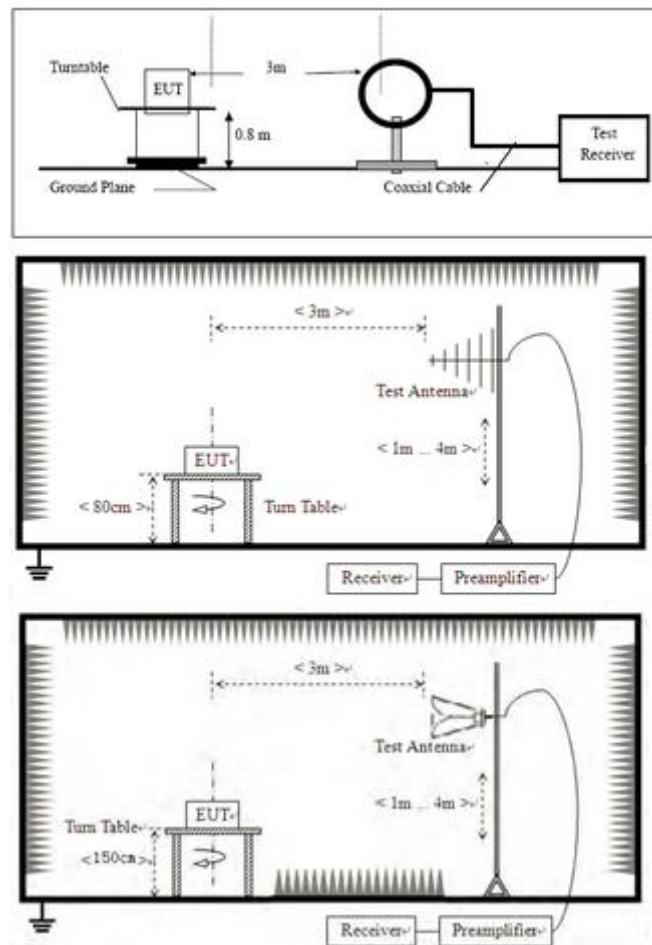

10.3 PROCEDURE

For testing performed with the loop antenna, the center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane. Only the worst position of vertical was shown in the report.


Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

10.4 TEST DATA


[TestMode: TX below 1G]; [Polarity: Vertical]

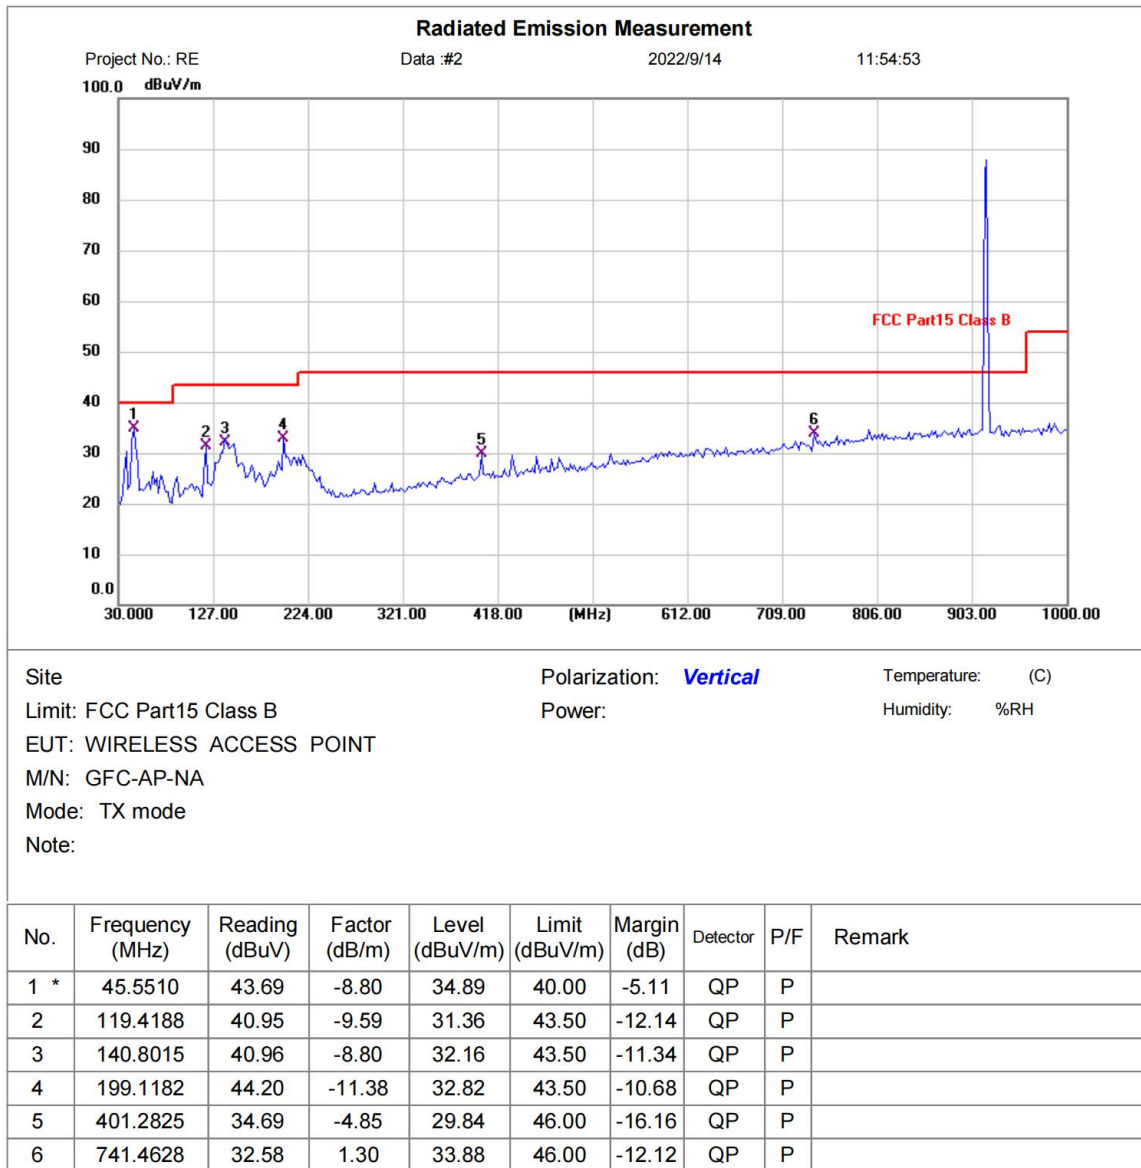

*:Maximum data x:Over limit !:over margin

Test Result: Pass

[TestMode: TX below 1G]; [Polarity: Horizontal]

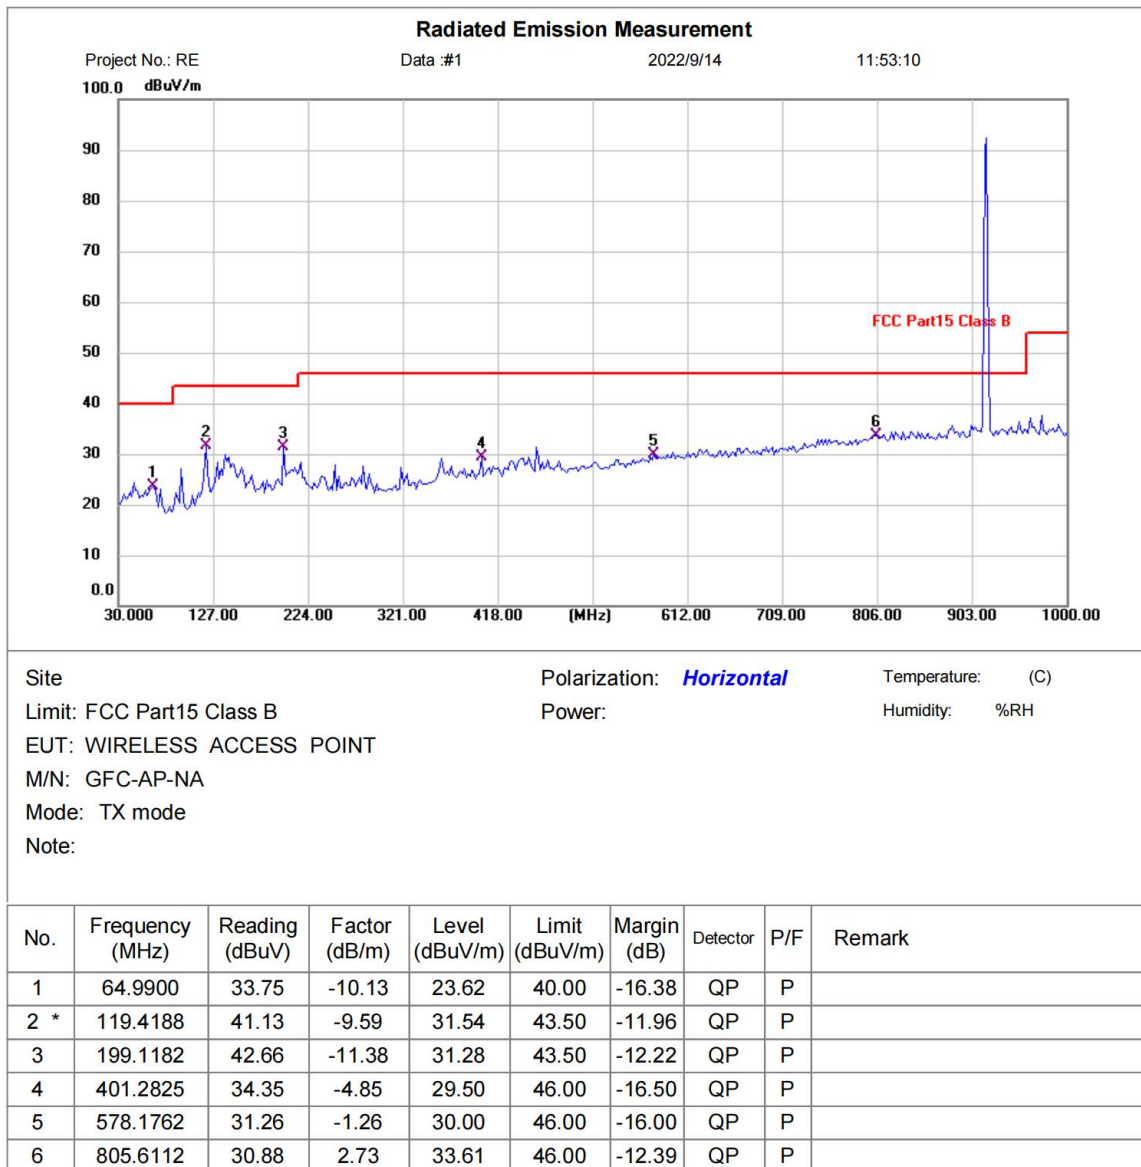

*:Maximum data x:Over limit !:over margin

Test Result: Pass

[TestMode: TX about 1G]; [Polarity: Vertical]



Site: Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: WIRELESS ACCESS POINT
M/N: GF-AP-NA
Mode: TX
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		1893.000	49.25	-6.01	43.24	74.00	-30.76	peak	
2		3185.500	46.58	-0.69	45.89	74.00	-28.11	peak	
3		6792.750	40.08	5.75	45.83	74.00	-28.17	peak	
4		8191.000	41.72	9.35	51.07	74.00	-22.93	peak	
5		9389.500	40.90	10.13	51.03	74.00	-22.97	peak	
6	*	11328.250	38.99	12.97	51.96	74.00	-22.04	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX about 1G]; [Polarity: Horizontal]



Site: Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: WIRELESS ACCESS POINT
M/N: GF-AP-NA
Mode: TX
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2621.500	46.08	-1.00	45.08	74.00	-28.92	peak	
2		3843.500	43.22	7.12	50.34	74.00	-23.66	peak	
3		5770.500	40.82	3.91	44.73	74.00	-29.27	peak	
4		7180.500	41.33	5.86	47.19	74.00	-26.81	peak	
5		9413.000	40.92	8.86	49.78	74.00	-24.22	peak	
6	*	11304.750	40.01	11.89	51.90	74.00	-22.10	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass


11 RESTRICTED BAND AROUND FUNDAMENTAL FREQUENCY

Test Standard	47 CFR Part 15, Subpart C 15.249
Test Method	ANSI C63.10 (2013) Section 6.4&6.5&6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

11.1 LIMITS

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.0	Quasi-peak Value
88MHz-216MHz	43.5	Quasi-peak Value
216MHz-960MHz	46.0	Quasi-peak Value
960MHz-1GHz	54.0	Quasi-peak Value
Above 1GHz	54.0	Average Value
Above 1GHz	74.0	Peak Value
Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.		

11.2 BLOCK DIAGRAM OF TEST SETUP

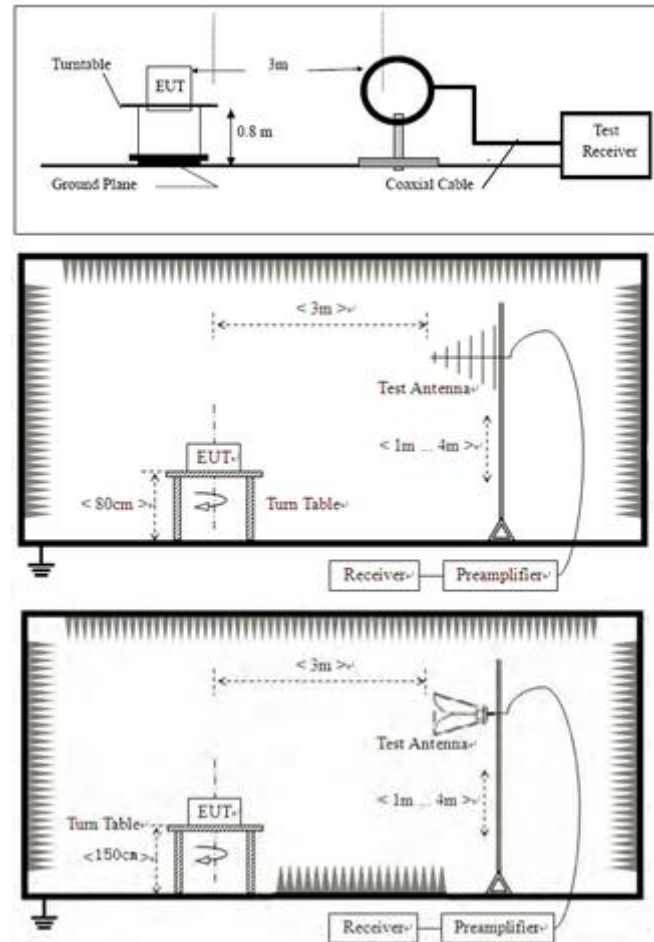


11.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
 - i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
 - j. Repeat above procedures until all frequencies measured was complete.
- Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor


11.4 TEST DATA

[TestMode: TX]; [Polarity: Horizontal]

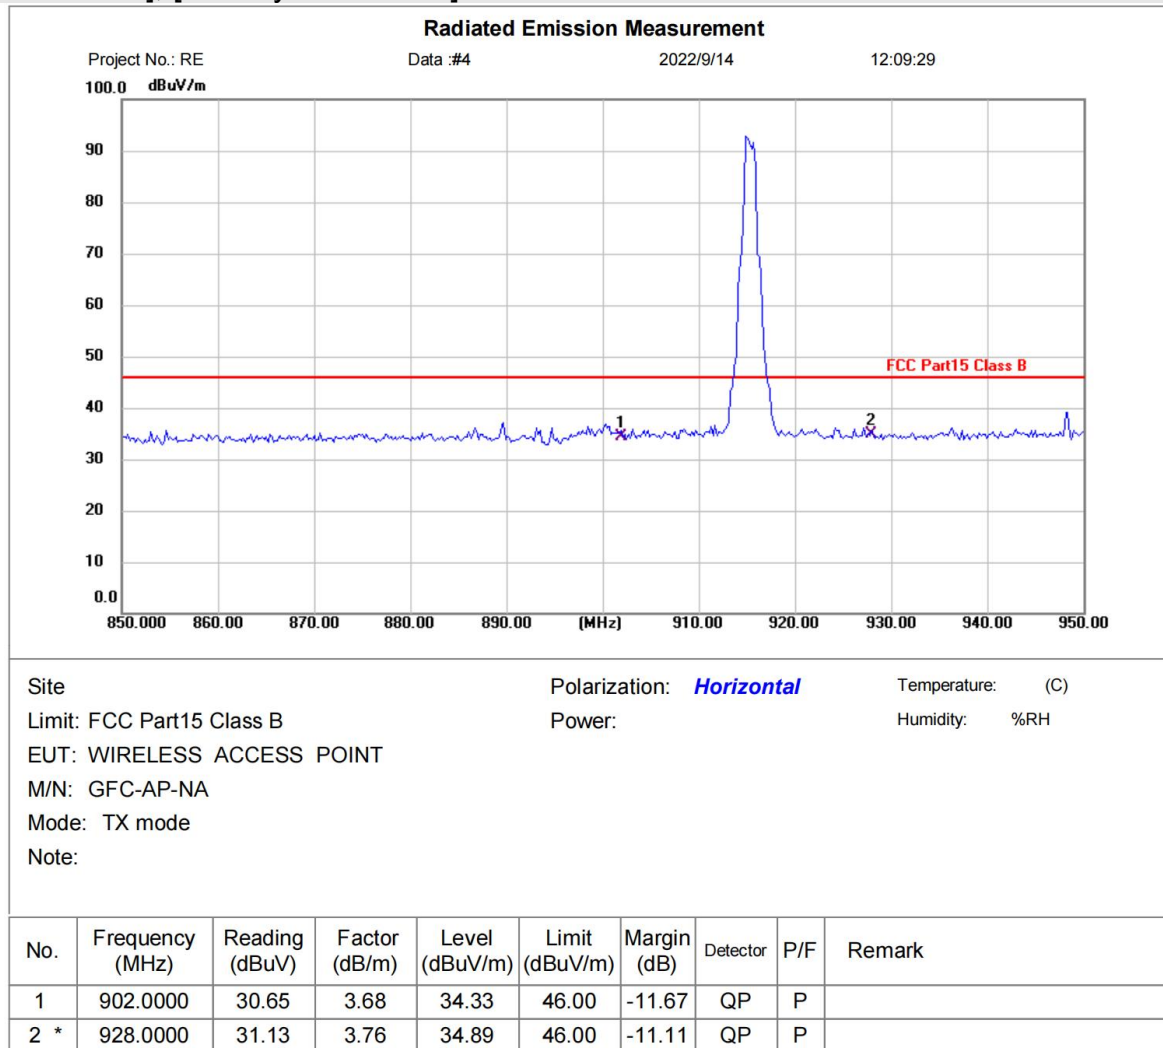

Test Result: Pass

[TestMode: TX]; [Polarity: Vertical]

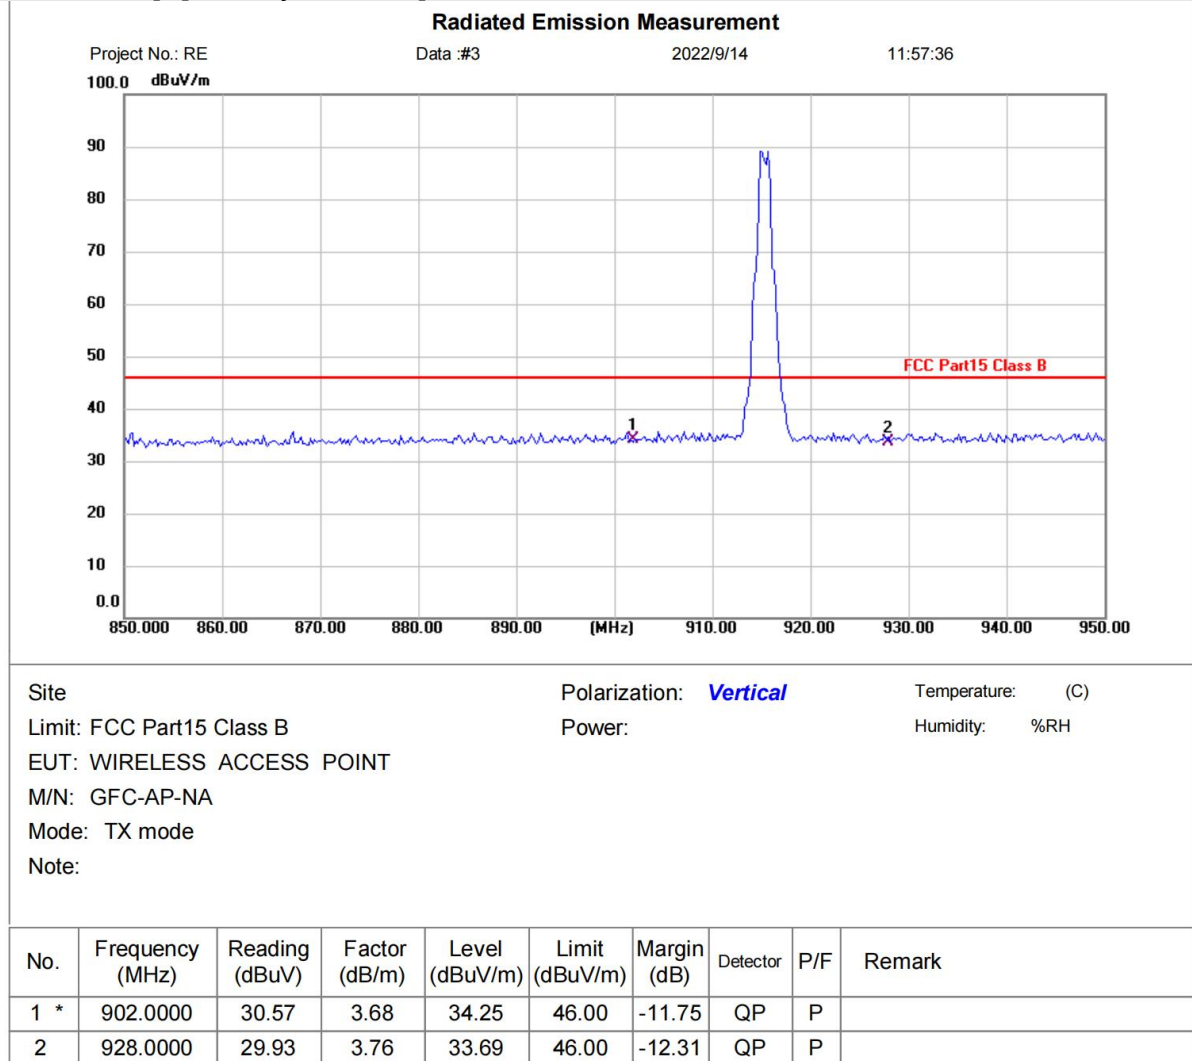

Test Result: Pass

12 FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL (15.249(A))


Test Standard	47 CFR Part 15, Subpart C 15.249
Test Method	ANSI C63.10 (2013) Section 6.5&6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

12.1 LIMITS

Fundamental frequency(MHz)	Field strength of fundamental(microvolts/meter)	Field strength of harmonics(microvolts/meter)
902-928	50	500
2400-2483.5	50	500
5725-5875	50	500
24000-24250	250	2500

Remark: The frequencies above 1000MHz are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

12.2 BLOCK DIAGRAM OF TEST SETUP

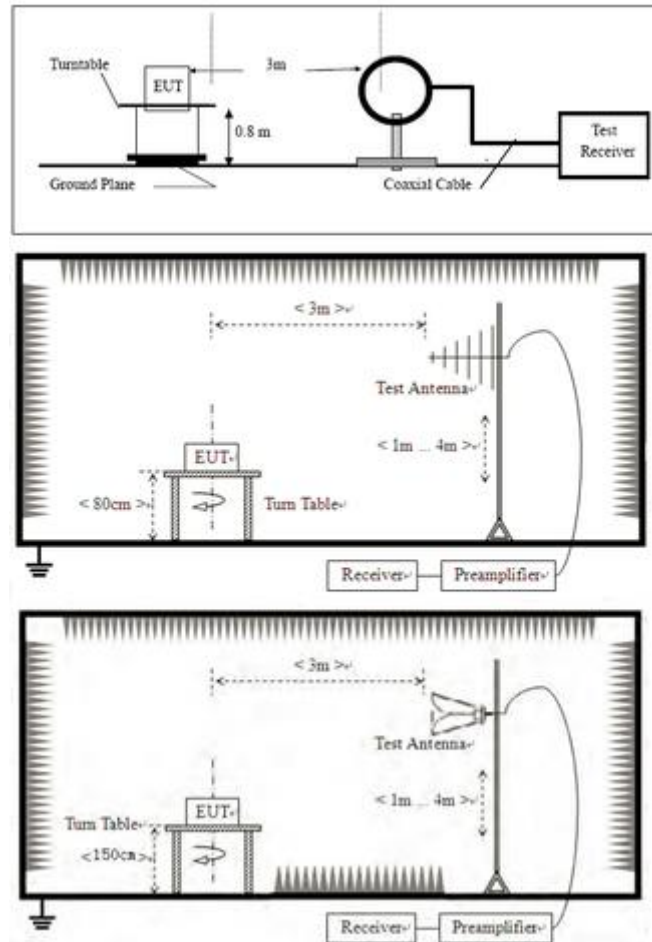

12.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
 - i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
 - j. Repeat above procedures until all frequencies measured was complete.
- Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

BlueAsia

12.4 TEST DATA

QP value:

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Antenna Polaxis
915	89.09	3.76	92.85	94.00	-1.15	H
915	85.37	3.76	89.13	94.00	-4.87	V


13 20DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.249
Test Method	ANSI C63.10 (2013) Section 6.9
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

13.1 LIMITS

Limit:	N/A
--------	-----

13.2 BLOCK DIAGRAM OF TEST SETUP

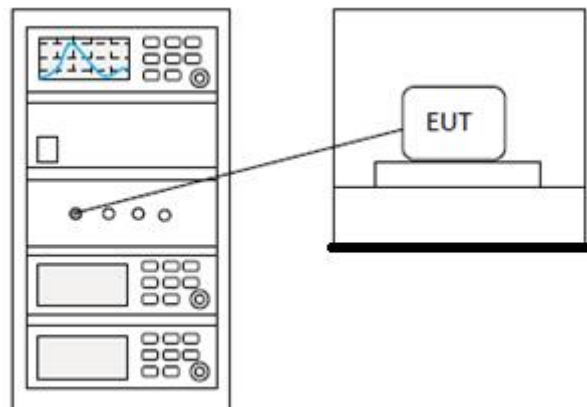

1.1 TEST DATA

Test Frequency MHz	20dB Bandwidth kHz	Result
915	124.5	Pass

1.2 TEST PLOTS



14 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.249
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

14.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

14.2 BLOCK DIAGRAM OF TEST SETUP

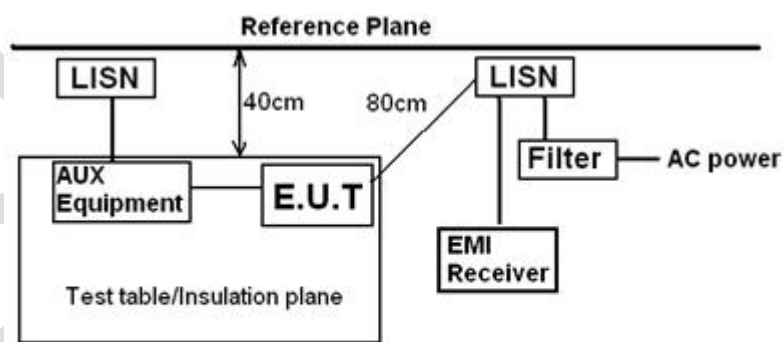

Remark:
E.U.T: Equipment Under Test
LISN: Line Impedance Stabilization Network
Test table height=0.8m

14.3 PROCEDURE


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: $LISN = Read\ Level + Cable\ Loss + LISN\ Factor$


14.4 TEST DATA

[TestMode: TX]; [Line: Nutral] ;[Power:AC120V/60Hz]

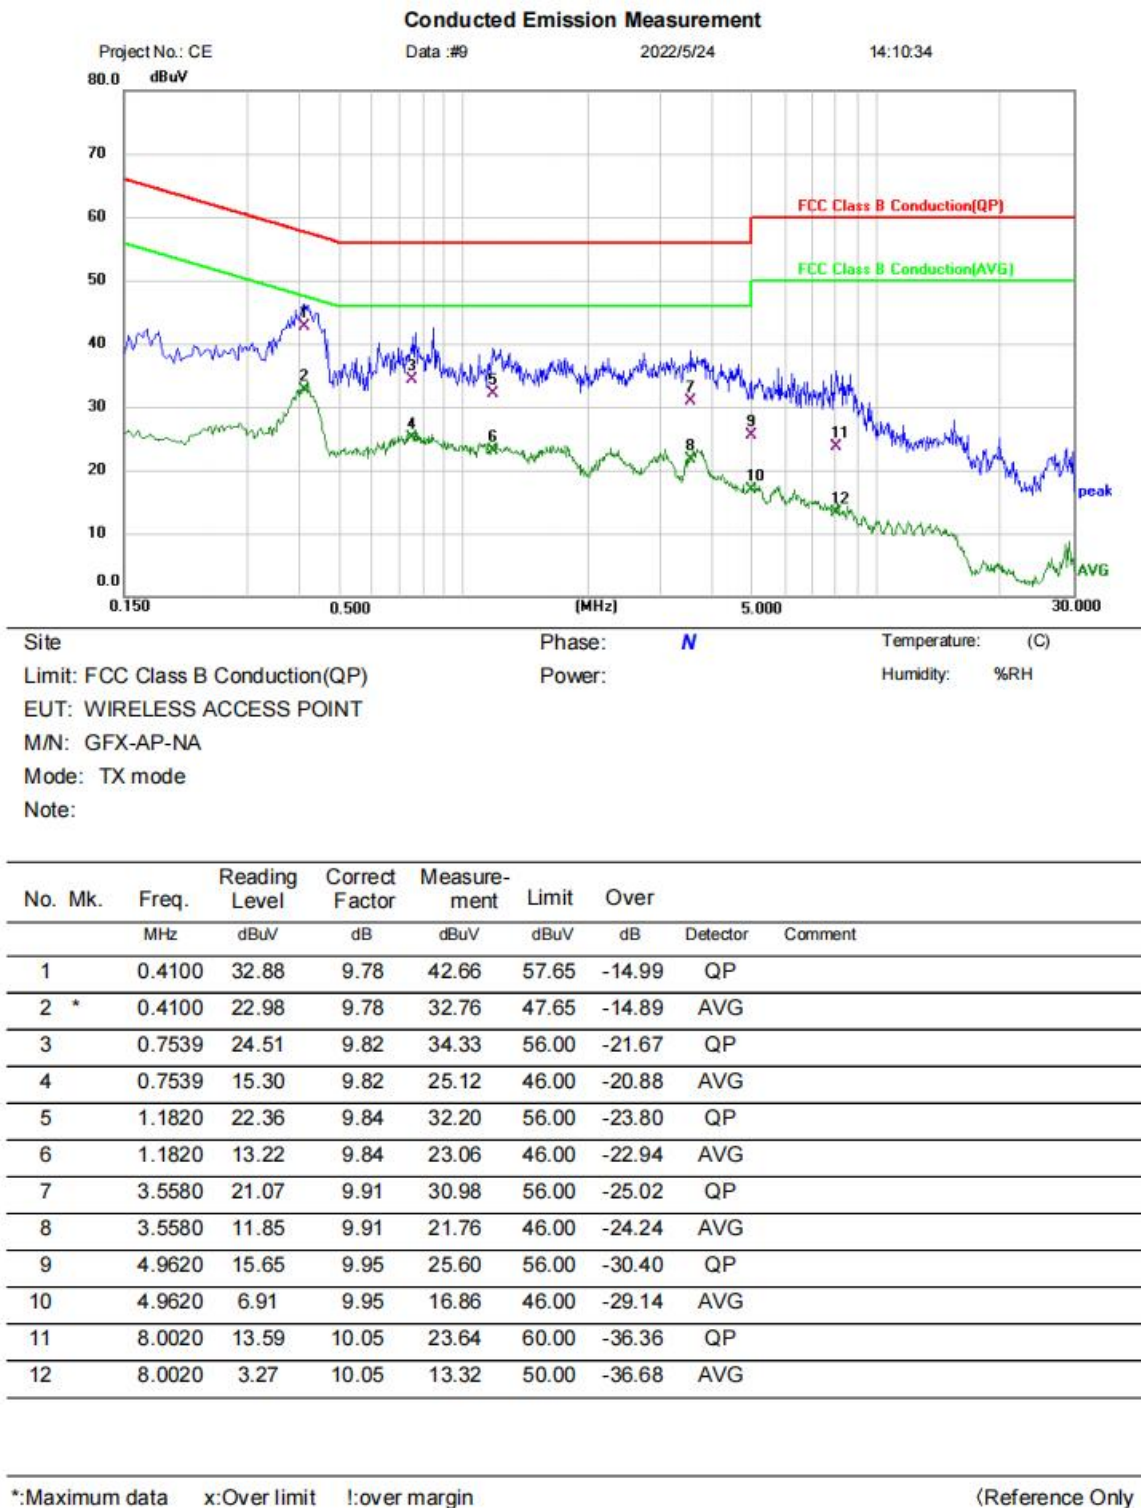

Test Result: Pass

[TestMode: TX]; [Line: Line] ;[Power:AC120V/60Hz]

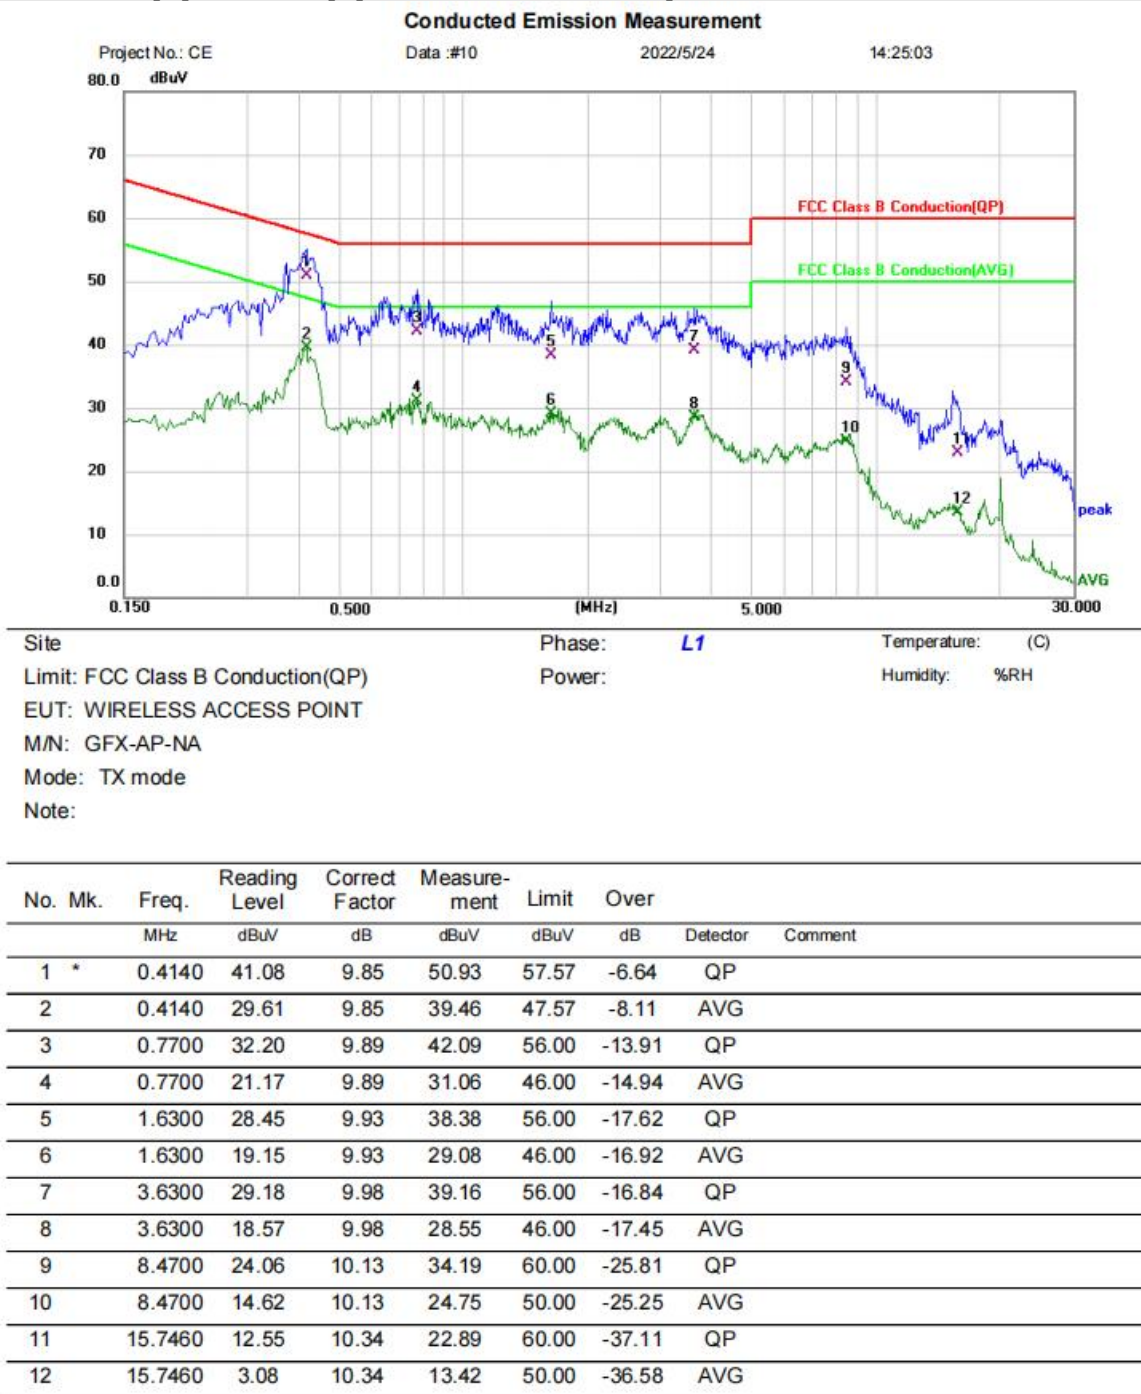

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

15 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.249
Test Method	N/A


15.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.


EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 3.4dBi..

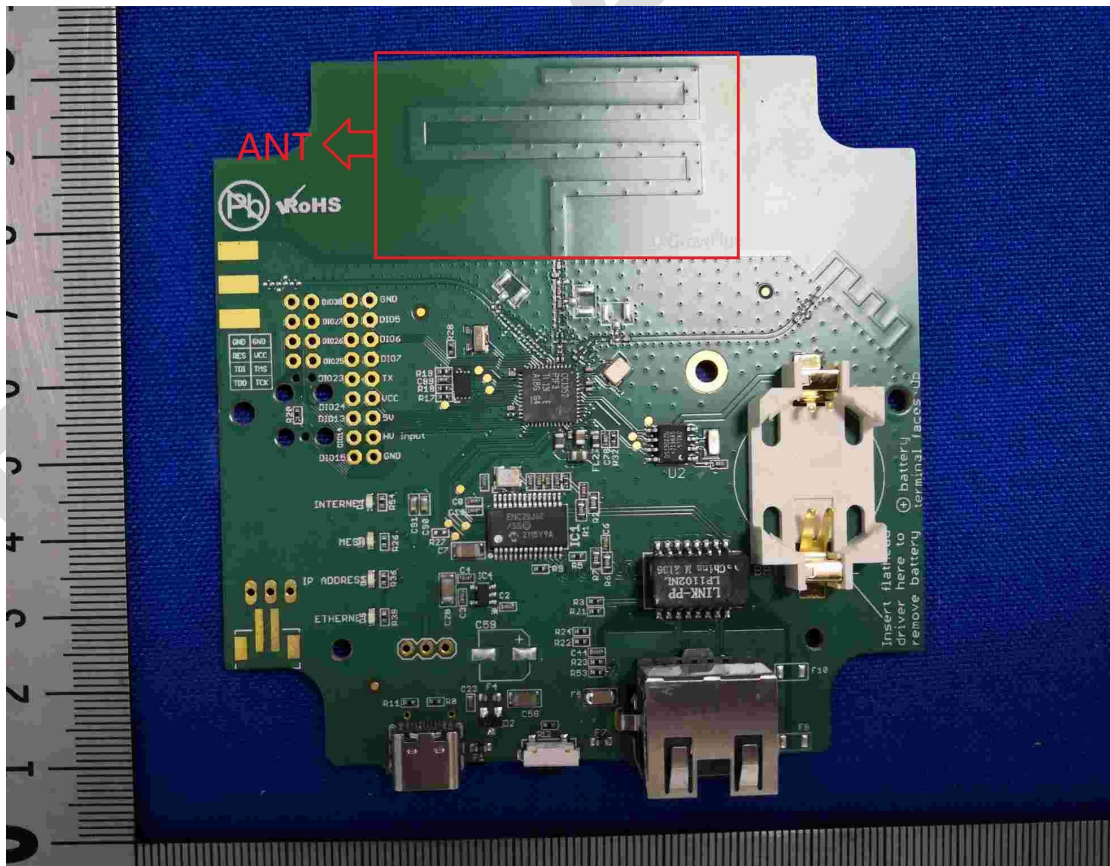

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Radiated Emissions

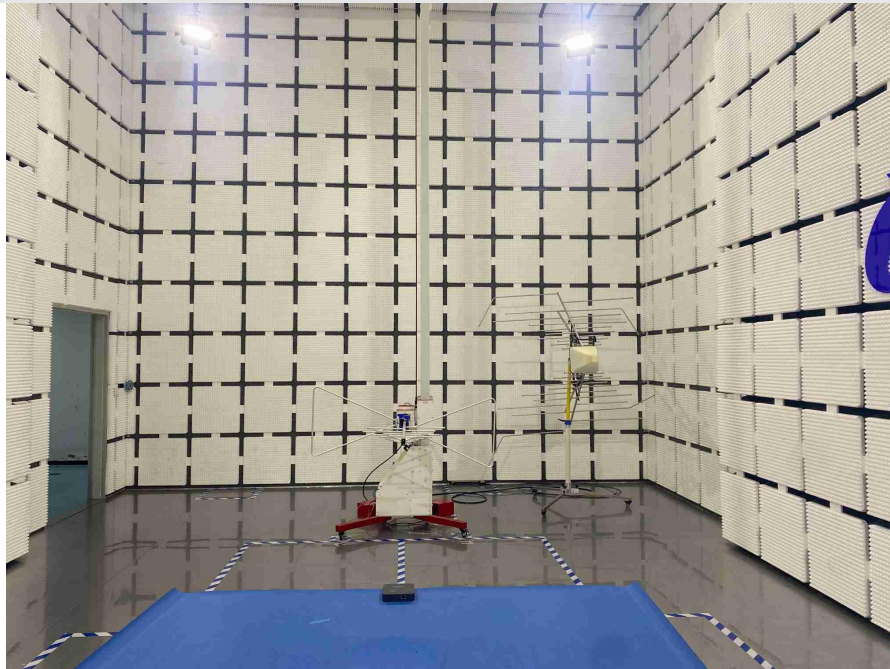

Conducted Emissions at AC Power Line (150kHz-30MHz)



APPENDIX B: PHOTOGRAPHS OF EUT

Reference to the test report No. BLA-EMC-202204-A8101

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.