

# SPECIFICATION FOR APPROVAL

CUSTOMER: 

hang chai

CUST P/N:

YUYAO P/N:

D E S T: 

G25-2.3-7.5UH-3200GS-180MM

DATE: 

2025.04.30

VERSION: 

V0


| PREPARED BY | CHECKED BY | APPROVED BY | CUSTOMER APPROVE |
|-------------|------------|-------------|------------------|
|             |            |             |                  |

Dongguan Jetris Technology Co., Ltd.

# Version Change History

| Rev | Before Change | After Change | Change Date | Approved By |
|-----|---------------|--------------|-------------|-------------|
| V0  |               |              | 2025.04.30  |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |

SPECIFICATION APPROVAL
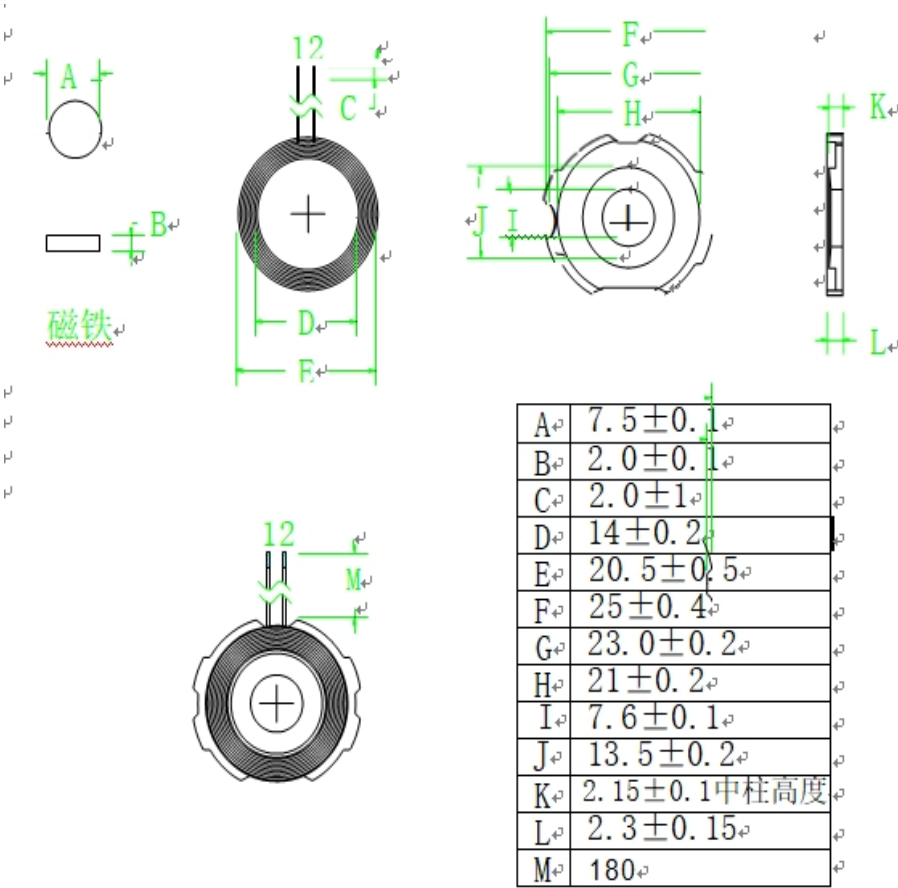
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                            |          |    |            |           |                 |          |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|----|------------|-----------|-----------------|----------|---|---------|---|-------|---|--------|---|----------|---|--------|---|----------|---|--------|---|---------|---|----------|---|----------|---|----------|---|-----|---|---------|
| D E S T:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | G25-2.3-7.5UH-3200GS-180MM | VERSION: | V0 | CUSTOMER:  | hang chai |                 |          |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                            |          |    | CUST P/N:  | 0         |                 |          |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                            |          |    | YUYAO P/N: | 0         |                 |          |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
| 一、尺寸 DIMENSION:(mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                            |          |    |            |           | A               | 7.5±0.1  |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
|  <table><tr><td>A</td><td>7.5±0.1</td></tr><tr><td>B</td><td>2.0±0.1</td></tr><tr><td>C</td><td>2.0±1</td></tr><tr><td>D</td><td>14±0.2</td></tr><tr><td>E</td><td>20.5±0.5</td></tr><tr><td>F</td><td>25±0.4</td></tr><tr><td>G</td><td>23.0±0.2</td></tr><tr><td>H</td><td>21±0.2</td></tr><tr><td>I</td><td>7.6±0.1</td></tr><tr><td>J</td><td>13.5±0.2</td></tr><tr><td>K</td><td>2.15±0.1</td></tr><tr><td>L</td><td>2.3±0.15</td></tr><tr><td>M</td><td>180</td></tr></table> |                            |          |    |            |           | A               | 7.5±0.1  | B | 2.0±0.1 | C | 2.0±1 | D | 14±0.2 | E | 20.5±0.5 | F | 25±0.4 | G | 23.0±0.2 | H | 21±0.2 | I | 7.6±0.1 | J | 13.5±0.2 | K | 2.15±0.1 | L | 2.3±0.15 | M | 180 | B | 2.0±0.1 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                            |          |    |            |           | A               | 7.5±0.1  |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                            |          |    |            |           | B               | 2.0±0.1  |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                            |          |    |            |           | C               | 2.0±1    |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                            |          |    |            |           | D               | 14±0.2   |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                            |          |    |            |           | E               | 20.5±0.5 |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                            |          |    |            |           | F               | 25±0.4   |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                            |          |    |            |           | G               | 23.0±0.2 |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                            |          |    |            |           | H               | 21±0.2   |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                            |          |    |            |           | I               | 7.6±0.1  |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                            |          |    |            |           | J               | 13.5±0.2 |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                            |          |    |            |           | K               | 2.15±0.1 |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                            |          |    |            |           | L               | 2.3±0.15 |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
| M                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 180                        |          |    |            |           |                 |          |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
| C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 2.0±1                      |          |    |            |           |                 |          |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
| D                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 14±0.2                     |          |    |            |           |                 |          |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
| E                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 20.5±0.5                   |          |    |            |           |                 |          |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
| F                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 25±0.4                     |          |    |            |           |                 |          |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
| G                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 23.0±0.2                   |          |    |            |           |                 |          |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
| H                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 21±0.2                     |          |    |            |           |                 |          |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
| I                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 7.6±0.1                    |          |    |            |           |                 |          |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
| J                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 13.5±0.2                   |          |    |            |           |                 |          |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
| K                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 2.15±0.1                   |          |    |            |           |                 |          |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
| L                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 2.3±0.15                   |          |    |            |           |                 |          |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
| M                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 180                        |          |    |            |           |                 |          |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
| PREPARED BY/DATE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                            |          |    |            |           | CHECKED BY/DATE |          |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                            |          |    |            |           |                 |          |   |         |   |       |   |        |   |          |   |        |   |          |   |        |   |         |   |          |   |          |   |          |   |     |   |         |

## SPECIFICATION APPROVAL

|          |                            |          |    |            |           |
|----------|----------------------------|----------|----|------------|-----------|
| D E S T: | G25-2.3-7.5UH-3200GS-180MM | VERSION: | V0 | CUSTOMER:  | hang chai |
|          |                            |          |    | CUST P/N:  | 0         |
|          |                            |          |    | YUYAO P/N: | 0         |

### 二、SCHEMATIC DIAGRAM:



### 三、WINDING SPECIFICATION:

| NO | TERMINAL |   | WIRE    | TURNS | WINDING DIRECTION |
|----|----------|---|---------|-------|-------------------|
| 1  | S        | F | 0.08*24 | 12TS  |                   |

### 四、ELECTRICAL CHARACTERISTICS:

TEMPERATURE:25°C±10°C, RELATIVE HUMIDITY:65±20%

| NO | ITEM | TERMINAL | SPECIFICATION | TEST FREQUENCY | TEST EQUIPMENTS |
|----|------|----------|---------------|----------------|-----------------|
| 1  | IND  | S-F      | 3.8UH±10%     | 100KHZ/1V      | ET4410 LCR      |
| 2  | IND  | S-F      | 7.5UH±10%     | 100KHZ/1V      | ET4410 LCR      |
| 3  |      |          |               |                |                 |
| 4  | Q    | S-F      | ≥35           | 100KHZ/1V      | ET4410 LCR      |

|                  |  |  |                 |  |  |
|------------------|--|--|-----------------|--|--|
| PREPARED BY/DATE |  |  | CHECKED BY/DATE |  |  |
| 0                |  |  | 0               |  |  |

Dongguan Jetris Technology Co., Ltd.

SPECIFICATION APPROVAL

|          |                            |          |    |            |           |
|----------|----------------------------|----------|----|------------|-----------|
| D E S T: | G25-2.3-7.5UH-3200GS-180MM | VERSION: | V0 | CUSTOMER:  | hang chai |
|          |                            |          |    | CUST P/N:  | 0         |
|          |                            |          |    | YUYAO P/N: | 0         |

## 五、 PRODUCT PICTURE



## 六、 MATERIAL LIST

| NO | MATERIAL NAME  | DESCRIPTION                                 | MANUFACTURER |
|----|----------------|---------------------------------------------|--------------|
| 1  | wire stock     | 0.08*24                                     | RH           |
| 2  | magnetic sheet | φ25*1.0mm                                   | LZ           |
| 3  | tin bar        | High temperature environmental friendly tin | DB           |
| 4  | glue           | BE885-9007                                  | BR           |
| 5  | tape           | 8mm High-temperature tape                   |              |
| 5  | Adhesive tape  | Hole-punched white double-sided tape        |              |
| 6  | Packaging      | Bubble wrap and cardboard box               |              |
|    |                |                                             |              |

REMARK: OHS 2.0+REACH

|                  |                 |
|------------------|-----------------|
| PREPARED BY/DATE | CHECKED BY/DATE |
| 0                | 0               |

Dongguan Jetris Technology Co., Ltd.

# SPECIFICATION FOR APPROVAL

CUSTOMER: YONG FONG WANG

CUST P/N:

YUYAO P/N:

DEST: Ø17\*0.08\*24P\*2P\*11TS-6.8UH-12mm  
Ø42.5\*5.3\*0.8

DATE: 2025.04.30

VERSION: V0

| PREPARED BY | CHECKED BY | APPROVED BY | CUSTOMER APPROVE |
|-------------|------------|-------------|------------------|
|             |            |             |                  |



DONGGUAN YUYAO ELECTRONIC TECHNOLOGY CO.,LTD

TEL: 13717089408

FAX: 0769-82866409


---

DONGGUAN YUYAO ELECTRONIC TECHNOLOGY CO.,LTD

# Version Change History

| Rev | Before Change | After Change | Change Date | Approved By |
|-----|---------------|--------------|-------------|-------------|
| V0  |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |
|     |               |              |             |             |

SPECIFICATION APPROVAL
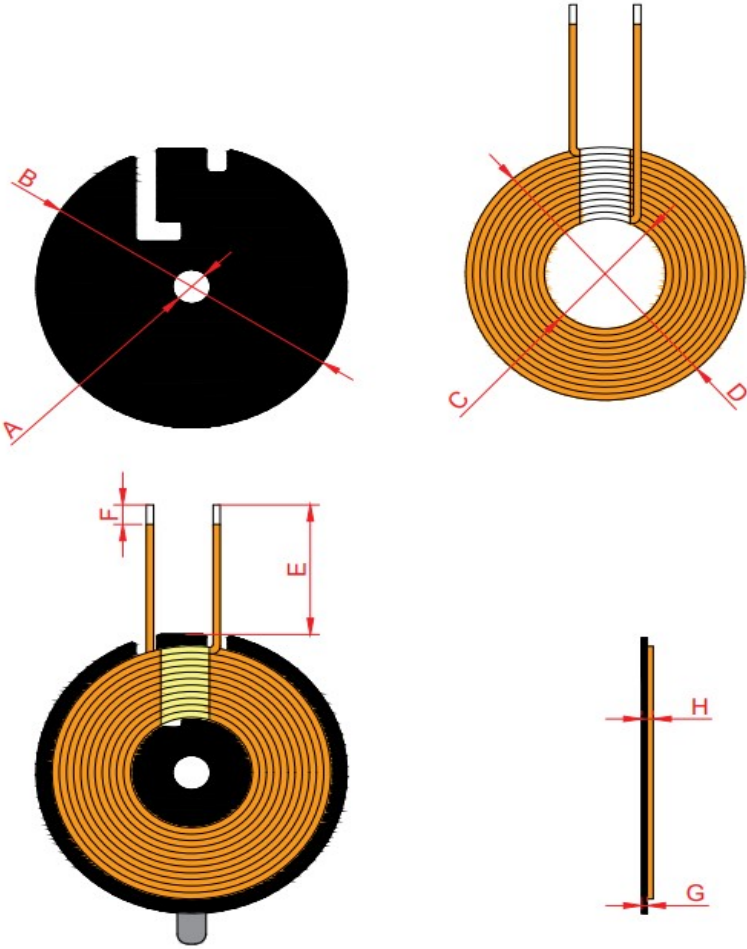
|                                                                                     |                                                      |          |    |            |                |                 |              |
|-------------------------------------------------------------------------------------|------------------------------------------------------|----------|----|------------|----------------|-----------------|--------------|
| D E S T:                                                                            | Ø17*0.08*24P*2P*11TS-<br>6.8UH-12mm<br>Ø42.5*5.3*0.8 | VERSION: | V0 | CUSTOMER:  | YONG FONG WANG |                 |              |
|                                                                                     |                                                      |          |    | CUST P/N:  | 0              |                 |              |
|                                                                                     |                                                      |          |    | YUYAO P/N: | 0              |                 |              |
| 一、 DIMENSION:(mm)                                                                   |                                                      |          |    |            |                | A               | 5.3±0.5      |
|  |                                                      |          |    |            |                | B               | 42.5±0.5     |
|                                                                                     |                                                      |          |    |            |                | C               | 17±0.5       |
|                                                                                     |                                                      |          |    |            |                | D               | 38.5±1       |
|                                                                                     |                                                      |          |    |            |                | E               | 12 -1/ + 2.5 |
|                                                                                     |                                                      |          |    |            |                | F               | 3±1          |
|                                                                                     |                                                      |          |    |            |                | G               | 0.8±0.1      |
|                                                                                     |                                                      |          |    |            |                | H               | 1.9MAX       |
|                                                                                     |                                                      |          |    |            |                | I               |              |
|                                                                                     |                                                      |          |    |            |                | J               |              |
|                                                                                     |                                                      |          |    |            |                | K               |              |
| L                                                                                   |                                                      |          |    |            |                |                 |              |
| PREPARED BY/DATE                                                                    |                                                      |          |    |            |                | CHECKED BY/DATE |              |
|                                                                                     |                                                      |          |    |            |                |                 |              |

## SPECIFICATION APPROVAL

|          |                                                      |          |    |            |                |
|----------|------------------------------------------------------|----------|----|------------|----------------|
| D E S T: | Ø17*0.08*24P*2P*11TS-<br>6.8UH-12mm<br>Ø42.5*5.3*0.8 | VERSION: | V0 | CUSTOMER:  | YONG FONG WANG |
|          |                                                      |          |    | CUST P/N:  | 0              |
|          |                                                      |          |    | YUYAO P/N: | 0              |

### 二、SCHEMATIC DIAGRAM:



### 三、WINDING SPECIFICATION:

| NO | TERMINAL |   | WIRE        | TURNS | WINDING DIRECTION |
|----|----------|---|-------------|-------|-------------------|
| 1  | S        | F | 0.08*24P*2P | 11TS  |                   |

### 四、ELECTRICAL CHARACTERISTICS:

TEMPERATURE:25°C±10°C, RELATIVE HUMIDITY:65±20%

| NO | ITEM | TERMINAL | SPECIFICATION | TEST FREQUENCY | TEST EQUIPMENTS |
|----|------|----------|---------------|----------------|-----------------|
| 1  | IND  | S-F      | 3.8UH±10%     | 100KHZ/1V      | ET4410 LCR      |
| 2  | IND  | S-F      | 6.8UH±10%     | 100KHZ/1V      | ET4410 LCR      |
| 3  | DCR  | S-F      | 81mΩ MAX      | 1KHZ/1V        | ET4410 LCR      |
| 4  | Q    | S-F      | 34MIN         | 100KHZ/1V      | ET4410 LCR      |


|                  |  |                 |  |
|------------------|--|-----------------|--|
| PREPARED BY/DATE |  | CHECKED BY/DATE |  |
| 0                |  | 0               |  |

DONGGUAN YUYAO ELECTRONIC TECHNOLOGY CO.,LTD

SPECIFICATION APPROVAL

|          |                                                      |          |    |            |                |
|----------|------------------------------------------------------|----------|----|------------|----------------|
| D E S T: | Ø17*0.08*24P*2P*11TS-<br>6.8UH-12mm<br>Ø42.5*5.3*0.8 | VERSION: | V0 | CUSTOMER:  | YONG FONG WANG |
|          |                                                      |          |    | CUST P/N:  | 0              |
|          |                                                      |          |    | YUYAO P/N: | 0              |

## 五、 PRODUCT PICTURE

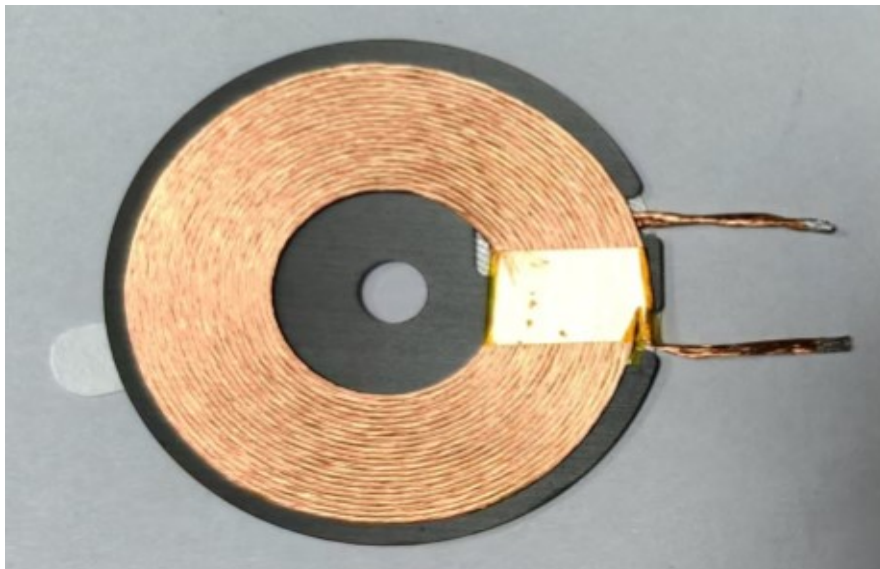

## 六、 MATERIAL LIST

| NO | MATERIAL NAME  | DESCRIPTION                                 | MANUFACTURER |
|----|----------------|---------------------------------------------|--------------|
| 1  | wire stock     | 0.08*24P*2P                                 | RH           |
| 2  | magnetic sheet | Ø42.5*5.3*0.65mm                            | LZ           |
| 3  | tin bar        | High temperature environmental friendly tin | DB           |
| 4  | glue           | BE885-9007                                  | BR           |
| 5  | tape           | 8mm High-temperature tape                   |              |
| 6  | Adhesive tape  | Hole-punched white double-sided tape        |              |
| 7  | Packaging      | Bubble wrap and cardboard box               |              |
|    |                |                                             |              |

REMARK:ROHS 2.0+REACH

|                  |                 |
|------------------|-----------------|
| PREPARED BY/DATE | CHECKED BY/DATE |
| 0                | 0               |

DONGGUAN YUYAO ELECTRONIC TECHNOLOGY CO.,LTD

# SPECIFICATION FOR APPROVAL

CUSTOMER: yong fong wang

CUST P/N: \_\_\_\_\_

YUYAO P/N: \_\_\_\_\_

DEST:  $\phi 18*0.08*105P*11TS-6.5UH-130mm$   
 $\phi 43.5*1.0mm$

DATE: 2025.04.30

VERSION: V0

| PREPARED BY | CHECKED BY | APPROVED BY | CUSTOMER APPROVE |
|-------------|------------|-------------|------------------|
|             |            |             |                  |



**DONGGUAN YUYAO ELECTRONIC TECHNOLOGY CO.,LTD**

## Version Change History

[illegible]

SPECIFICATION APPROVAL

|                     |                                                   |          |    |            |                |                  |               |
|---------------------|---------------------------------------------------|----------|----|------------|----------------|------------------|---------------|
| D E S T:            | φ18*0.08*105P*11TS-6.5UH-<br>130mm<br>φ43.5*1.0mm | VERSION: | V0 | CUSTOMER:  | yong fong wang |                  |               |
|                     |                                                   |          |    | CUST P/N:  | 0              |                  |               |
|                     |                                                   |          |    | YUYAO P/N: | 0              |                  |               |
| 一、尺寸 DIMENSION:(mm) |                                                   |          |    |            |                | A                | 5.3±0.5       |
|                     |                                                   |          |    |            |                | B                | 43.5±0.5      |
|                     |                                                   |          |    |            |                | C                | 18±0.5        |
|                     |                                                   |          |    |            |                | D                | 40.8±1        |
|                     |                                                   |          |    |            |                | E                | 130 -1/ + 2.5 |
|                     |                                                   |          |    |            |                | F                | 3±1           |
|                     |                                                   |          |    |            |                | G                | 1.0±0.1       |
|                     |                                                   |          |    |            |                | H                | 2.5MAX        |
|                     |                                                   |          |    |            |                | I                |               |
|                     |                                                   |          |    |            |                | J                |               |
|                     |                                                   |          |    |            |                | K                |               |
|                     |                                                   |          |    |            |                | L                |               |
|                     |                                                   |          |    |            |                | PREPARED BY/DATE |               |
|                     |                                                   |          |    |            |                |                  |               |

## SPECIFICATION APPROVAL

|          |                                                                                                                                   |          |    |            |                |
|----------|-----------------------------------------------------------------------------------------------------------------------------------|----------|----|------------|----------------|
| D E S T: | $\phi 18 \times 0.08 \times 105 \text{P} \times 11 \text{TS} - 6.5 \text{UH} - 130 \text{mm}$<br>$\phi 43.5 \times 1.0 \text{mm}$ | VERSION: | V0 | CUSTOMER:  | yong fong wang |
|          |                                                                                                                                   |          |    | CUST P/N:  | 0              |
|          |                                                                                                                                   |          |    | YUYAO P/N: | 0              |

### 二、SCHEMATIC DIAGRAM:



### 三、WINDING SPECIFICATION:

| NO | TERMINAL |   | WIRE      | TURNS | WINDING DIRECTION |
|----|----------|---|-----------|-------|-------------------|
| 1  | S        | F | 0.08*105P | 11TS  |                   |

### 四、ELECTRICAL CHARACTERISTICS:

TEMPERATURE:  $25^{\circ}\text{C} \pm 10^{\circ}\text{C}$ , RELATIVE HUMIDITY:  $65 \pm 20\%$

| NO | ITEM | TERMINAL | SPECIFICATION            | TEST FREQUENCY | TEST EQUIPMENTS |
|----|------|----------|--------------------------|----------------|-----------------|
| 1  | IND  | S-F      | $3.8 \text{UH} \pm 10\%$ | 100KHZ/1V      | ET4410 LCR      |
| 2  | IND  | S-F      | $6.5 \text{UH} \pm 10\%$ | 100KHZ/1V      | ET4410 LCR      |
| 3  | DCR  | S-F      | 78m $\Omega$ MAX         | 1KHZ/1V        | ET4410 LCR      |
| 4  | Q    | S-F      | 56MIN                    | 100KHZ/1V      | ET4410 LCR      |


|                  |  |                 |  |
|------------------|--|-----------------|--|
| PREPARED BY/DATE |  | CHECKED BY/DATE |  |
| 0                |  | 0               |  |

DONGGUAN YUYAO ELECTRONIC TECHNOLOGY CO.,LTD

SPECIFICATION APPROVAL

|          |                                                   |          |    |            |                |
|----------|---------------------------------------------------|----------|----|------------|----------------|
| D E S T: | φ18*0.08*105P*11TS-6.5UH-<br>130mm<br>φ43.5*1.0mm | VERSION: | V0 | CUSTOMER:  | yong fong wang |
|          |                                                   |          |    | CUST P/N:  | 0              |
|          |                                                   |          |    | YUYAO P/N: | 0              |

## 五、PRODUCT PICTURE

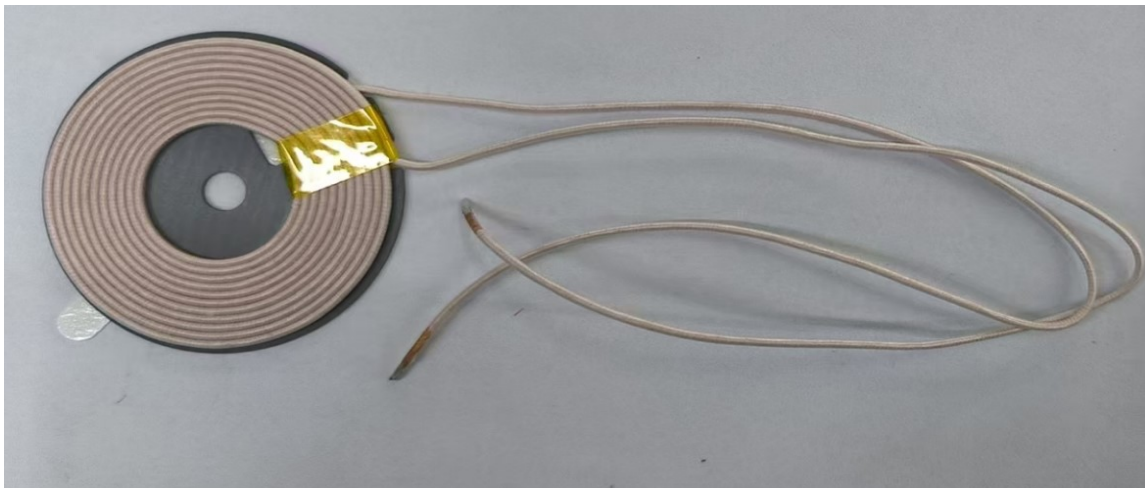

## 六、MATERIAL LIST

| NO | MATERIAL NAME  | DESCRIPTION                                 | MANUFACTURER |
|----|----------------|---------------------------------------------|--------------|
| 1  | wire stock     | 0.08*105P                                   | RH           |
| 2  | magnetic sheet | φ43.5*1.0mm                                 | LZ           |
| 3  | tin bar        | High temperature environmental friendly tin | DB           |
| 4  | glue           | BE885-9007                                  | BR           |
| 5  | tape           | 8mm High-temperature tape                   |              |
| 5  | Adhesive tape  | Hole-punched white double-sided tape        |              |
| 6  | Packaging      | Bubble wrap and cardboard box               |              |
|    |                |                                             |              |

REMARK: OHS 2.0+REACH

|                  |                 |
|------------------|-----------------|
| PREPARED BY/DATE | CHECKED BY/DATE |
| 0                | 0               |

DONGGUAN YUYAO ELECTRONIC TECHNOLOGY CO.,LTD