


Test Mode :	802.11n HT40 CH134 5670MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.685GHz~5.765GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH134(5670MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

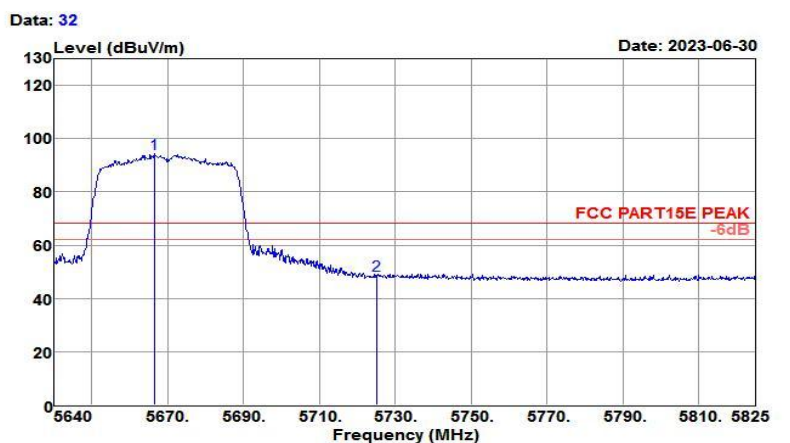

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5666.455	89.93	31.87	7.76	35.23	94.33	68.20	26.13	Peak
5725.000	44.49	31.96	7.29	35.18	48.56	68.20	-19.64	Peak

Test Mode :	802.11n HT40 CH134 5670MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.685GHz~5.765GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH134(5670MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

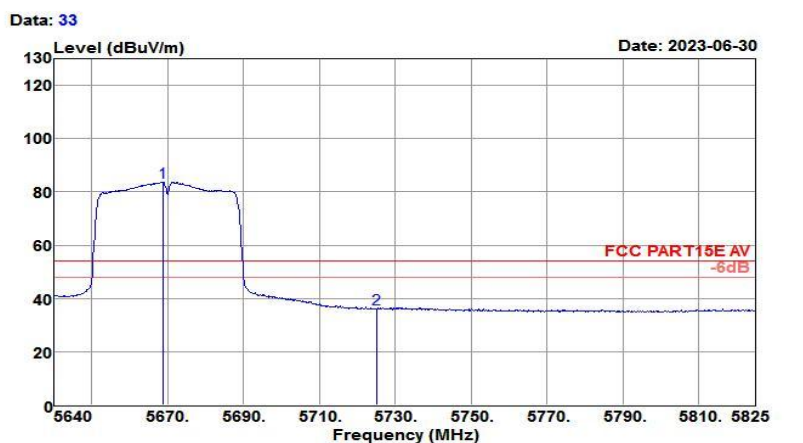


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5668.675	79.30	31.87	7.74	35.23	83.68	54.00	29.68	Average
5725.000	32.07	31.96	7.29	35.18	36.14	54.00	-17.86	Average

Test Mode :	802.11n HT40 CH142 5710MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.685GHz~5.765GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40 CH142 (5710MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

Data: 24

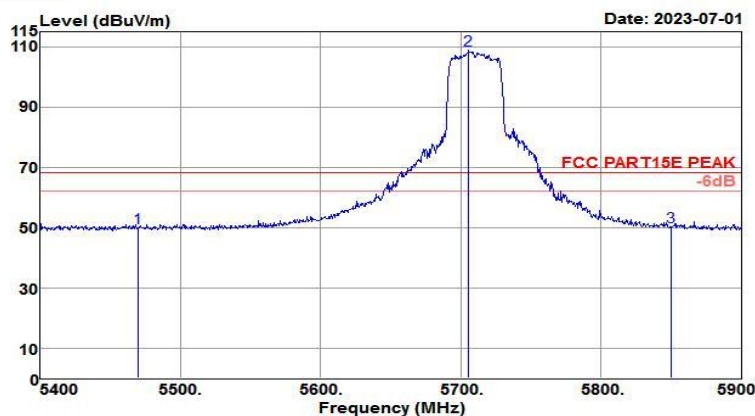


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5470.000	44.97	31.58	8.67	35.43	49.79	68.20	-18.41	Peak
5705.500	104.63	31.93	7.45	35.19	108.82	68.20	40.62	Peak
5850.000	46.06	32.16	7.10	35.05	50.27	68.20	-17.93	Peak

Test Mode :	802.11n HT40 CH142 5710MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.685GHz~5.765GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40 CH142 (5710MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

Data: 25

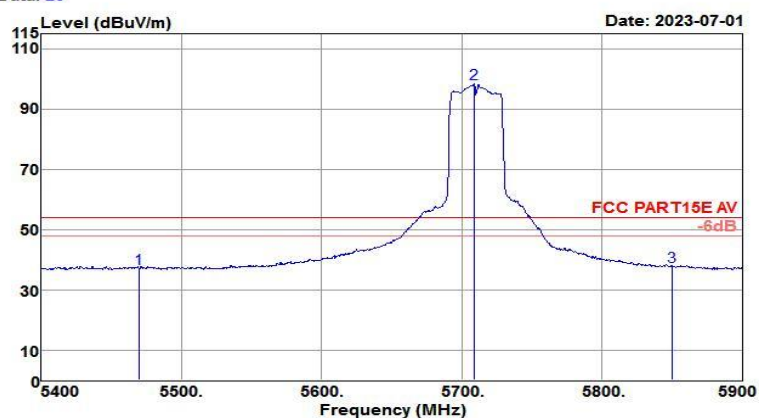


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5470.000	32.31	31.58	8.67	35.43	37.13	54.00	-16.87	Average
5708.500	94.07	31.93	7.42	35.19	98.23	54.00	44.23	Average
5850.000	33.51	32.16	7.10	35.05	37.72	54.00	-16.28	Average

Test Mode :	802.11n HT40 CH142 5710MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.685GHz~5.765GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH142 (5710MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

Data: 21

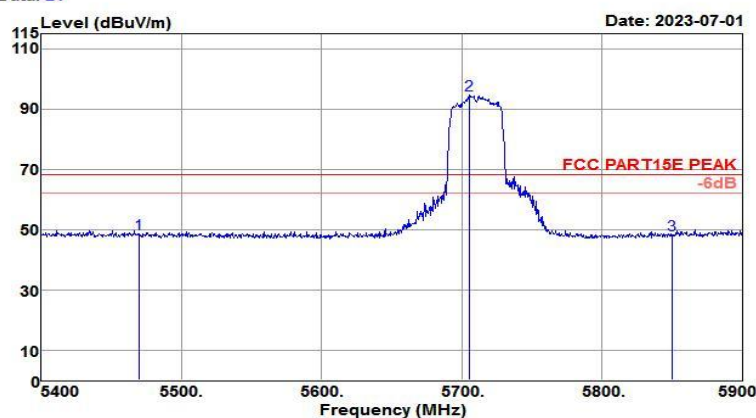


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5470.000	43.56	31.58	8.67	35.43	48.38	68.20	-19.82	Peak
5705.000	90.37	31.93	7.45	35.19	94.56	68.20	26.36	Peak
5850.000	43.92	32.16	7.10	35.05	48.13	68.20	-20.07	Peak

Test Mode :	802.11n HT40 CH142 5710MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.685GHz~5.765GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH142 (5710MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		


Data: 22

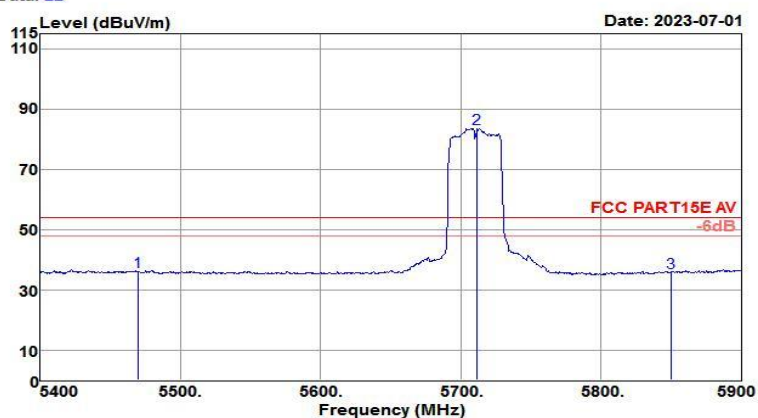

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5470.000	31.12	31.58	8.67	35.43	35.94	54.00	-18.06	Average
5711.500	79.46	31.94	7.40	35.19	83.61	54.00	29.61	Average
5850.000	31.59	32.16	7.10	35.05	35.80	54.00	-18.20	Average

Test Mode :	802.11n HT40 CH151 5755MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.6GHz~5.85GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40 CH151 (5755MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

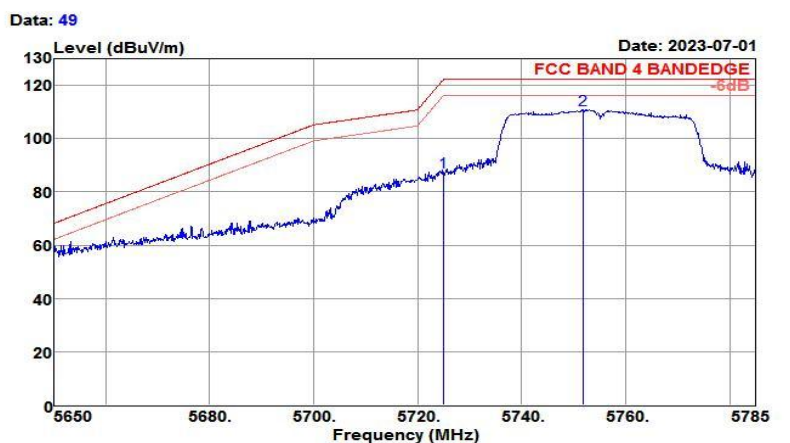

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5725.000	83.53	31.96	7.29	35.18	87.60	122.20	-34.60	Peak
5751.790	106.89	32.00	7.08	35.15	110.82	122.20	-11.38	Peak

Test Mode :	802.11n HT40 CH151 5755MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.6GHz~5.85GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40 CH151 (5755MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

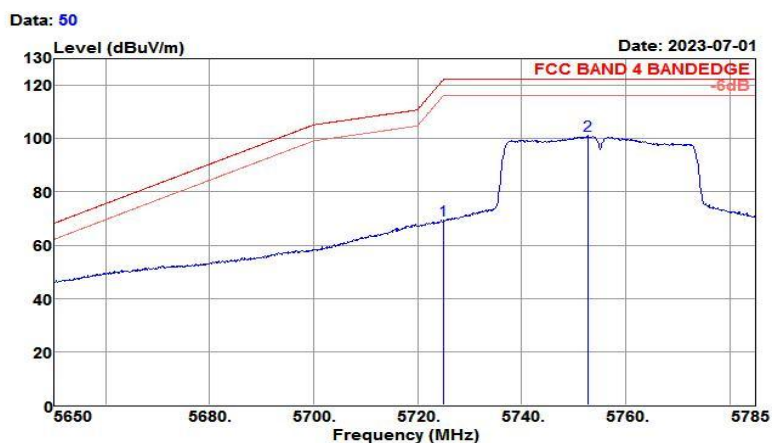

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5725.000	65.24	31.96	7.29	35.18	69.31	122.20	-52.89	Average
5752.735	97.25	32.00	7.07	35.15	101.17	122.20	-21.03	Average


Test Mode :	802.11n HT40 CH151 5755MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.6GHz~5.85GHz	Polarization :	Vertical

Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : 802.11n HT40 CH151 (5755MHz)
 Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

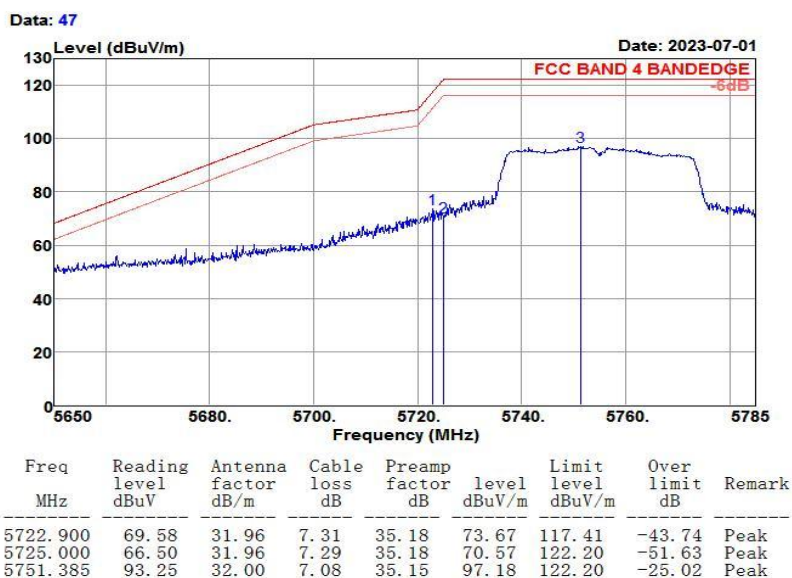

Test Mode :	802.11n HT40 CH151 5755MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.6GHz~5.85GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH151 (5755MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

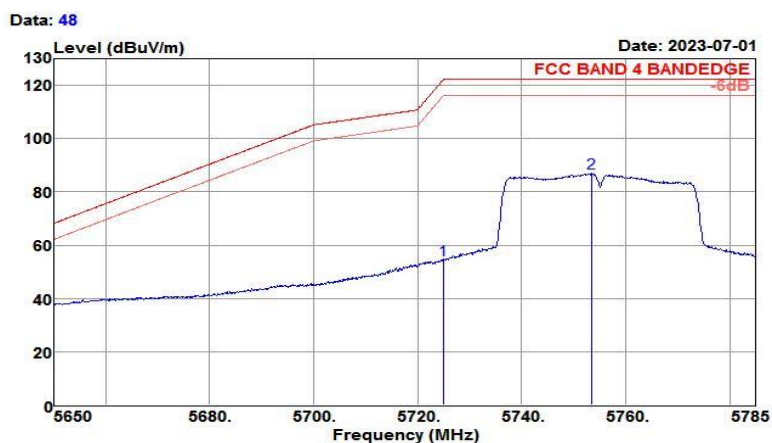

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5725.000	50.53	31.96	7.29	35.18	54.60	122.20	-67.60	Average
5753.410	82.96	32.01	7.07	35.15	86.89	122.20	-35.31	Average


Test Mode :	802.11n HT40 CH159 5795MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.75GHz~5.95GHz	Polarization :	Horizontal

Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11n HT40 CH159 (5795MHz)
 Power rating: DC 15V
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

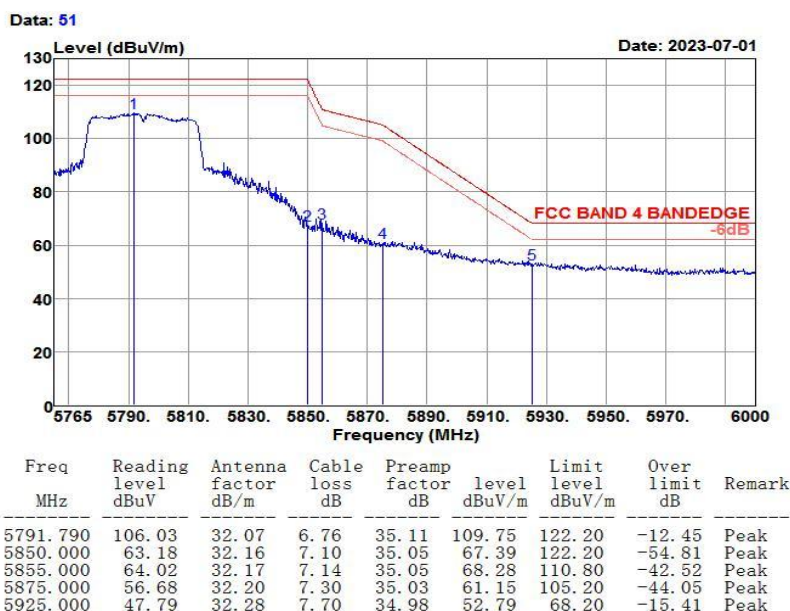

Test Mode :	802.11n HT40 CH159 5795MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.75GHz~5.95GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40 CH159 (5795MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

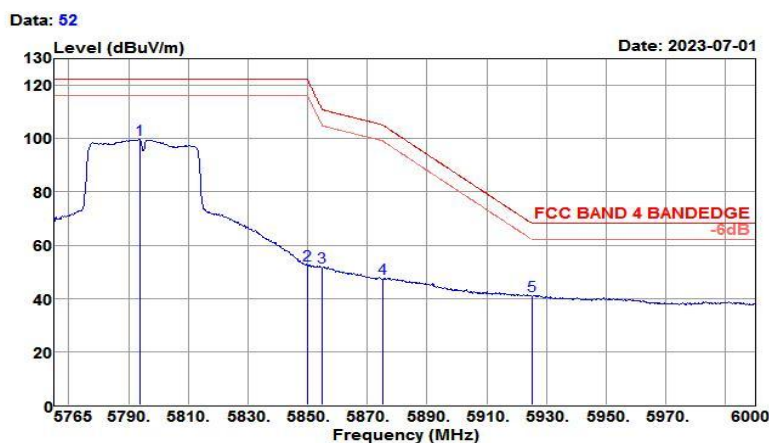

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5793.670	95.87	32.07	6.75	35.11	99.58	122.20	-22.62	Average
5850.000	48.19	32.16	7.10	35.05	52.40	122.20	-69.80	Average
5855.000	47.47	32.17	7.14	35.05	51.73	110.80	-59.07	Average
5875.000	42.92	32.20	7.30	35.03	47.39	105.20	-57.81	Average
5925.000	36.14	32.28	7.70	34.98	41.14	68.20	-27.06	Average


Test Mode :	802.11n HT40 CH159 5795MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.75GHz~5.95GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH159 (5795MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

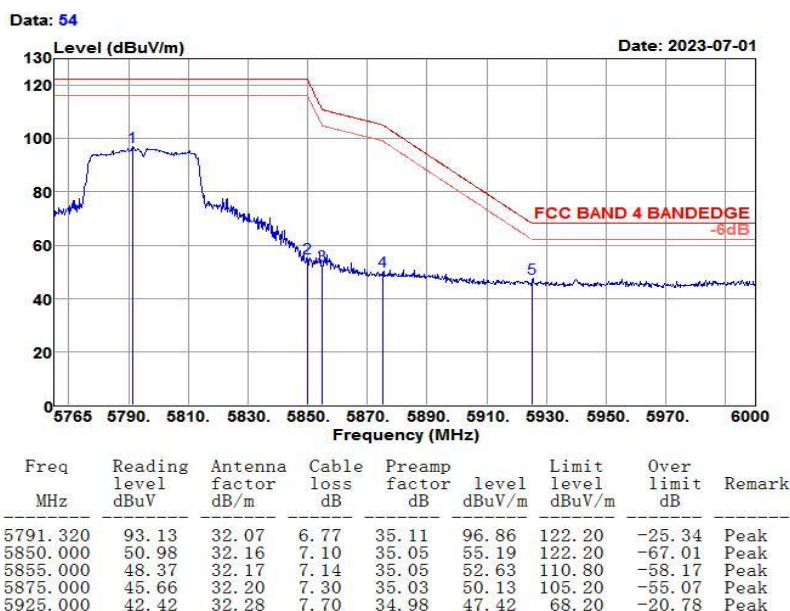

Test Mode :	802.11n HT40 CH159 5795MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.75GHz~5.95GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH159 (5795MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

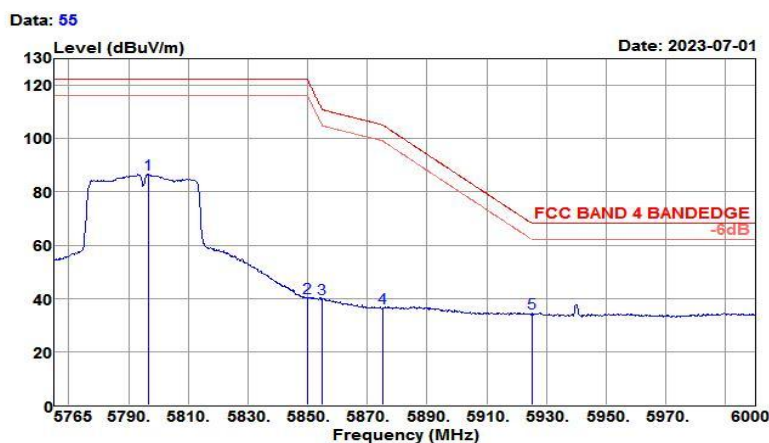

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5796.725	82.89	32.07	6.73	35.10	86.59	122.20	-35.61	Average
5850.000	36.23	32.16	7.10	35.05	40.44	122.20	-81.76	Average
5855.000	35.67	32.17	7.14	35.05	39.93	110.80	-70.87	Average
5875.000	32.08	32.20	7.30	35.03	36.55	105.20	-68.65	Average
5925.000	29.71	32.28	7.70	34.98	34.71	68.20	-33.49	Average

Test Mode :	802.11ac VHT80 CH42 5210MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.0GHz~5.28GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11ac VHT80 CH42(5210MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

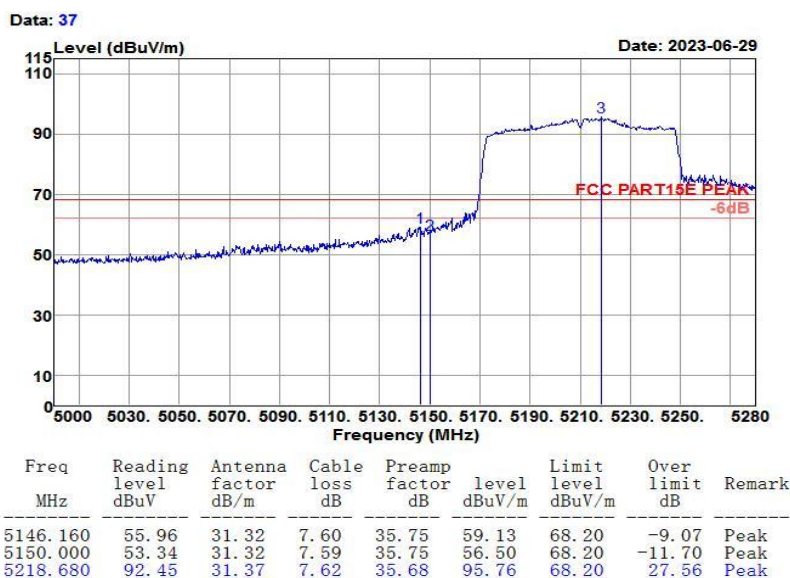

Test Mode :	802.11ac VHT80 CH42 5210MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.0GHz~5.28GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11ac VHT80 CH42(5210MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		


Data: 38

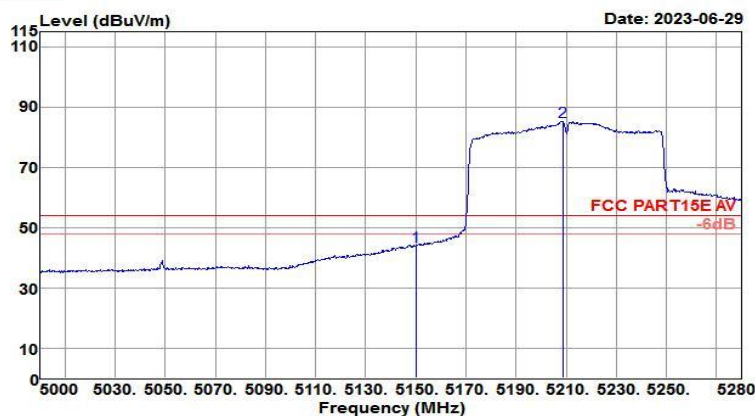

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5150.000	40.48	31.32	7.59	35.75	43.64	54.00	-10.36	Average
5208.600	81.96	31.37	7.55	35.69	85.19	54.00	31.19	Average


Test Mode :	802.11ac VHT80 CH42 5210MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.0GHz~5.26GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11ac VHT80 CH42(5210MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

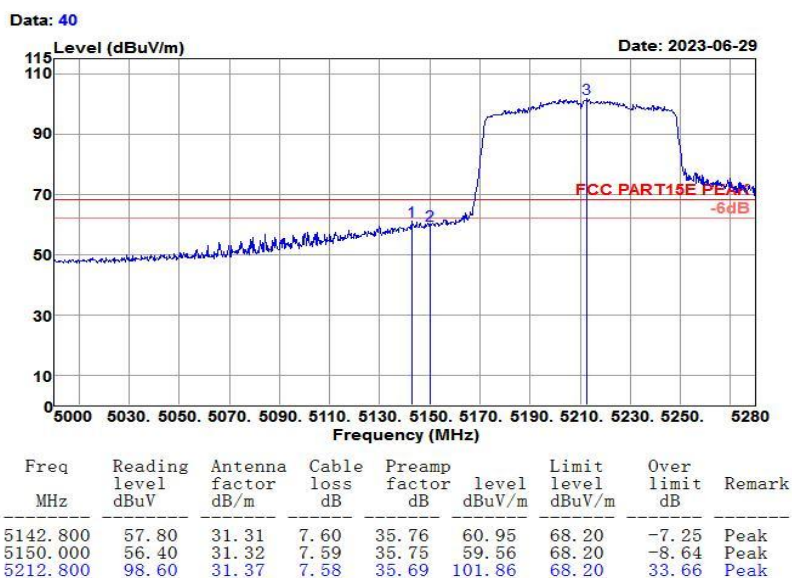

Test Mode :	802.11ac VHT80 CH42 5210MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.0GHz~5.26GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11ac VHT80 CH42(5210MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

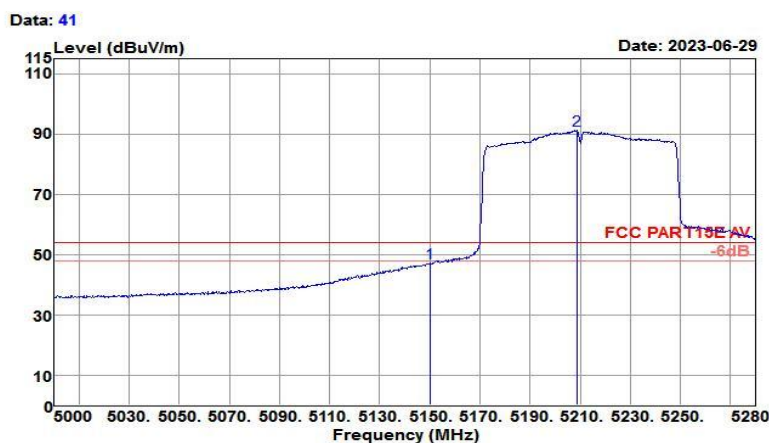

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5150.000	43.85	31.32	7.59	35.75	47.01	54.00	-6.99	Average
5208.600	88.01	31.37	7.55	35.69	91.24	54.00	37.24	Average


Test Mode :	802.11ac VHT80 CH58 5290MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.0GHz~5.26GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11ac VHT80 CH58(5290MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

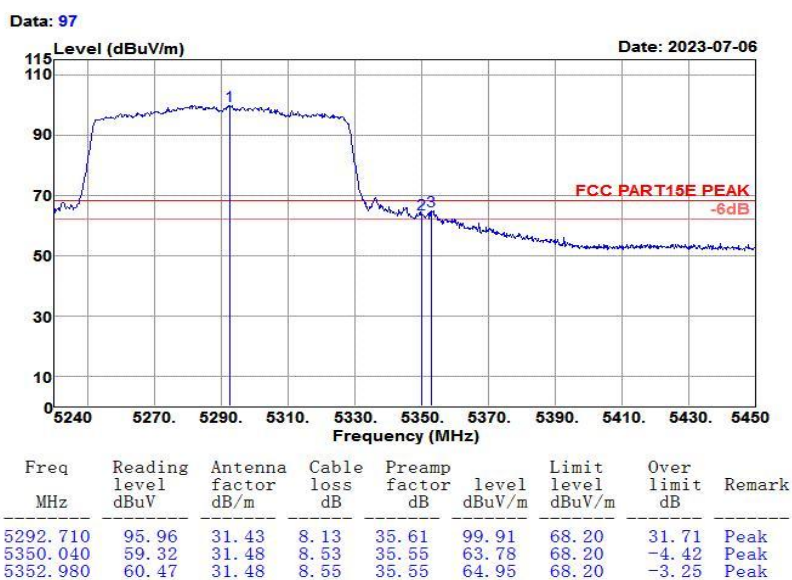

Test Mode :	802.11ac VHT80 CH58 5290MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.0GHz~5.26GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11ac VHT80 CH58(5290MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

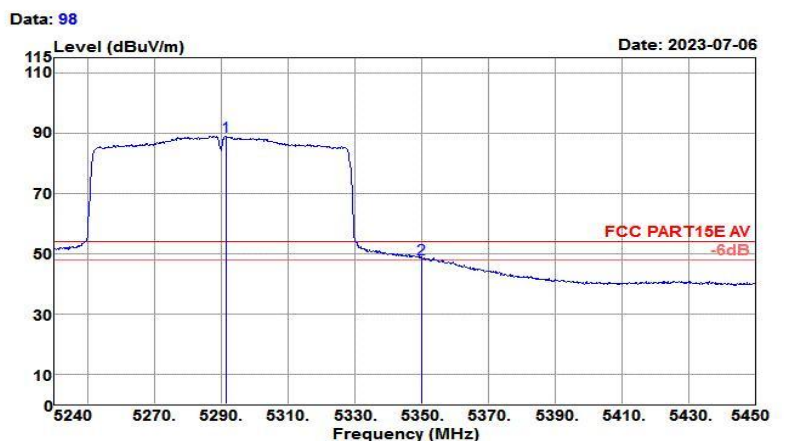

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5291.450	85.04	31.43	8.13	35.61	88.99	54.00	34.99	Average
5350.000	43.87	31.48	8.53	35.55	48.33	54.00	-5.67	Average

Test Mode :	802.11ac VHT80 CH58 5290MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.0GHz~5.26GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11ac VHT80 CH58(5290MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

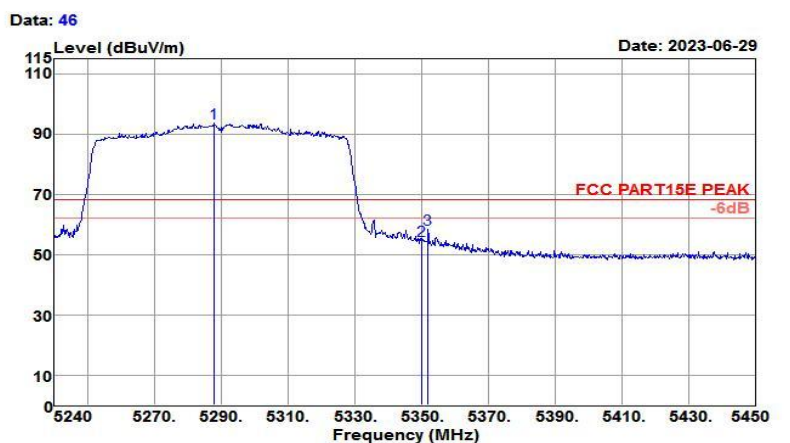


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5288.090	89.68	31.43	8.10	35.61	93.60	68.20	25.40	Peak
5350.000	50.08	31.48	8.53	35.55	54.54	68.20	-13.66	Peak
5351.930	53.78	31.48	8.55	35.55	58.26	68.20	-9.94	Peak

Test Mode :	802.11ac VHT80 CH58 5290MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.0GHz~5.26GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11ac VHT80 CH58(5290MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		


Data: 47

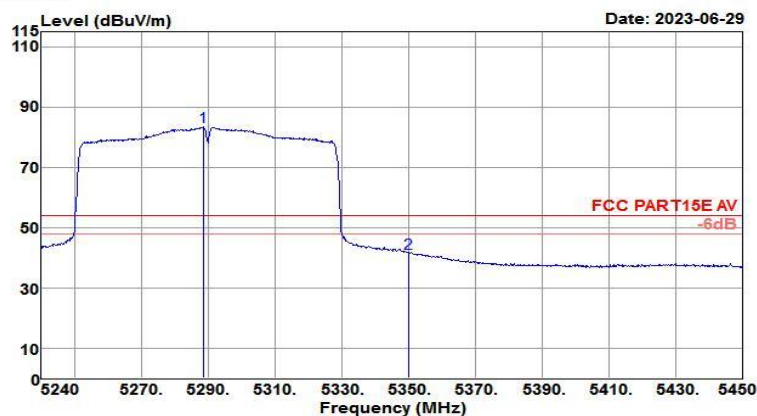

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5288.720	79.42	31.43	8.11	35.61	83.35	54.00	29.35	Average
5350.000	37.11	31.48	8.53	35.55	41.57	54.00	-12.43	Average


Test Mode :	802.11ac VHT80 CH106 5530MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.35GHz~5.59GHz	Polarization :	Horizontal

Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11ac VHT80 CH106(5530MHz) Power rating: DC 15V
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

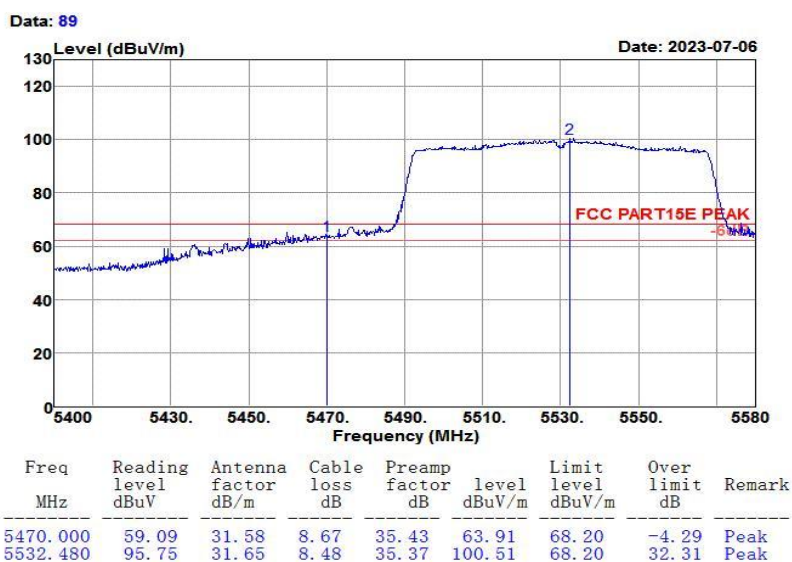


Test Mode :	802.11ac VHT80 CH106 5530MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.35GHz~5.59GHz	Polarization :	Horizontal

Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11ac VHT80 CH106(5530MHz) Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

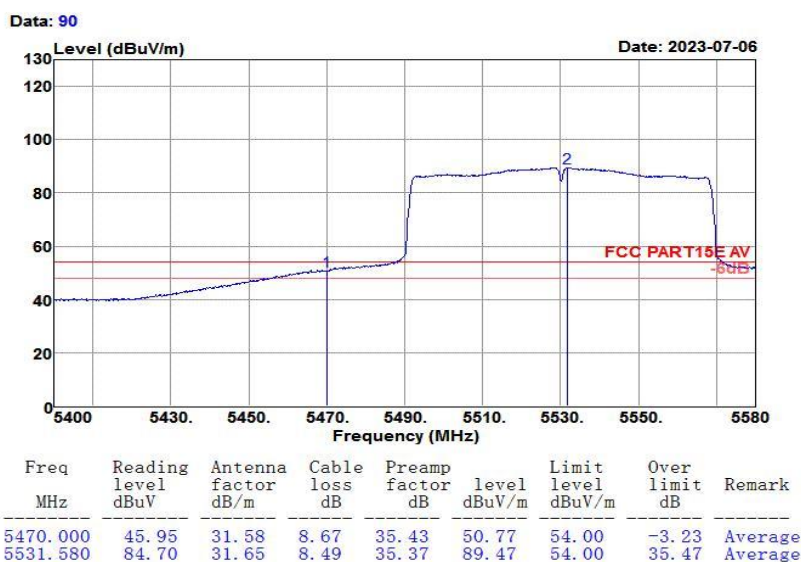


Test Mode :	802.11ac VHT80 CH106 5530MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.35GHz~5.59GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11ac VHT80 CH106(5530MHz)	Power rating:	DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

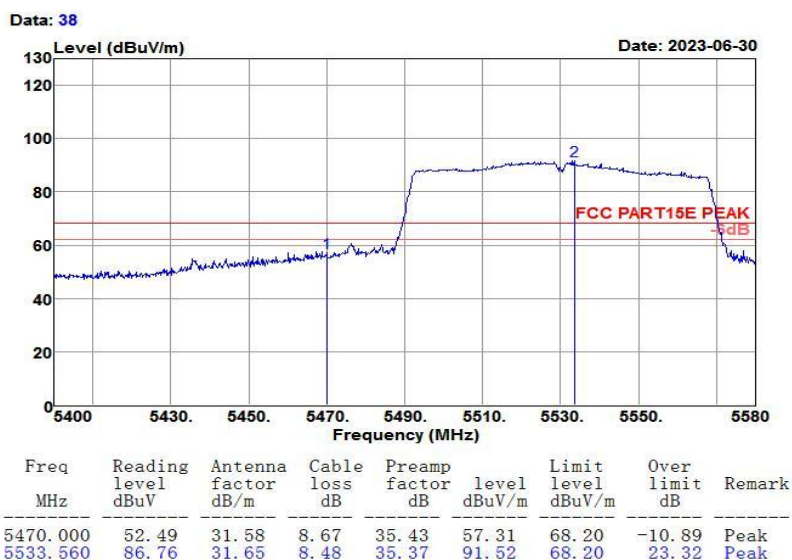

Test Mode :	802.11ac VHT80 CH106 5530MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.35GHz~5.59GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11ac VHT80 CH106(5530MHz)	Power rating:	DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

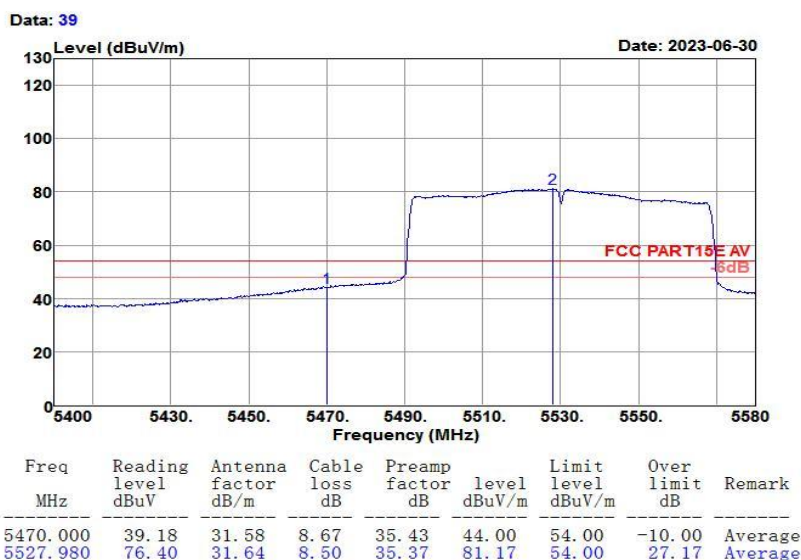

Test Mode :	802.11ac VHT80 CH122 5610MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.35GHz~5.765GHz	Polarization :	Horizontal

Test Site : 3m Chamber Temp/Humi : 23℃/61%
 Tested by : Jack Pol/Phase : HORIZONTAL
 Test Mode : 802.11ac VHT80 CH122(5610MHz) Power rating: DC 15V
 EUT : Digital Video Monitor Comment :
 Model No. : DVM-D1


Data: 41

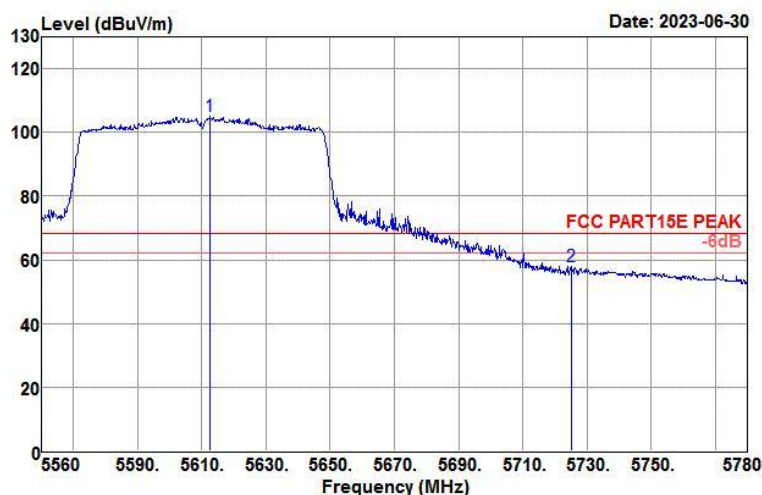

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5612.580	100.43	31.78	8.18	35.29	105.10	68.20	36.90	Peak
5725.000	53.82	31.96	7.29	35.18	57.89	68.20	-10.31	Peak


Test Mode :	802.11ac VHT80 CH122 5610MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.35GHz~5.765GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11ac VHT80 CH122(5610MHz)	Power rating:	DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

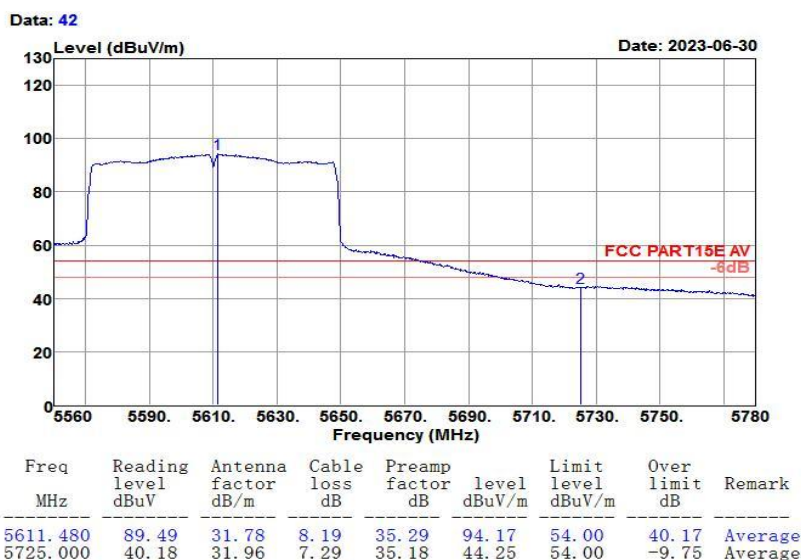

Test Mode :	802.11ac VHT80 CH122 5610MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.35GHz~5.765GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11ac VHT80 CH122(5610MHz)	Power rating:	DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

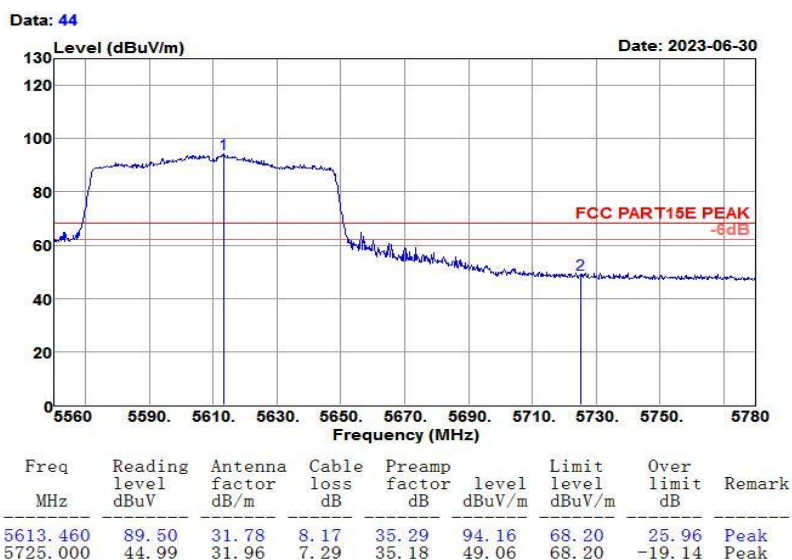

Test Mode :	802.11ac VHT80 CH122 5610MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.35GHz~5.765GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11ac VHT80 CH122(5610MHz)	Power rating:	DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

Data: 45

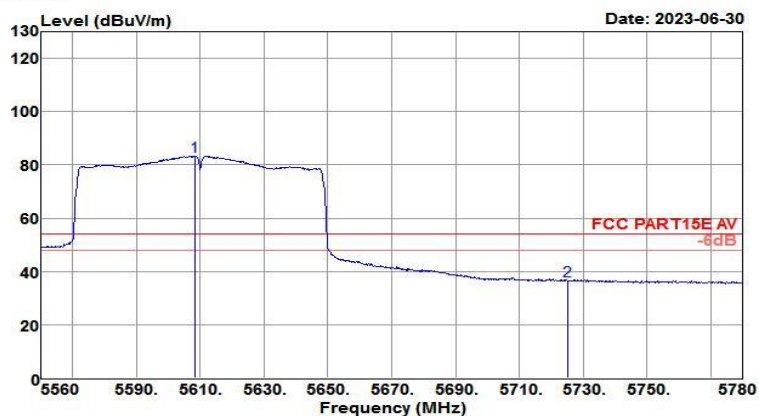


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5608.180	78.64	31.77	8.22	35.29	83.34	54.00	29.34	Average
5725.000	32.53	31.96	7.29	35.18	36.60	54.00	-17.40	Average

Test Mode :	802.11ac VHT80 CH138 5690MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.35GHz~5.765GHz	Polarization :	Horizontal

Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11ac VHT80 CH138(5690MHz) Power rating: DC 15V
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

Data: 27

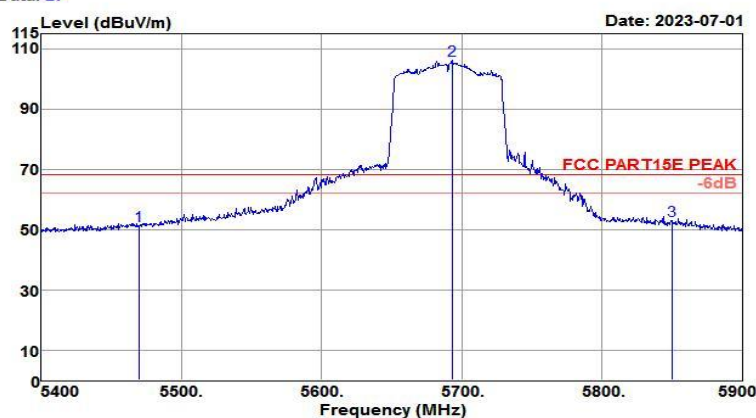


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5470.000	46.45	31.58	8.67	35.43	51.27	68.20	-16.93	Peak
5693.500	101.97	31.91	7.54	35.21	106.21	68.20	38.01	Peak
5850.000	48.69	32.16	7.10	35.05	52.90	68.20	-15.30	Peak

Test Mode :	802.11ac VHT80 CH138 5690MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.35GHz~5.765GHz	Polarization :	Horizontal

Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11ac VHT80 CH138(5690MHz) Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1


Data: 28

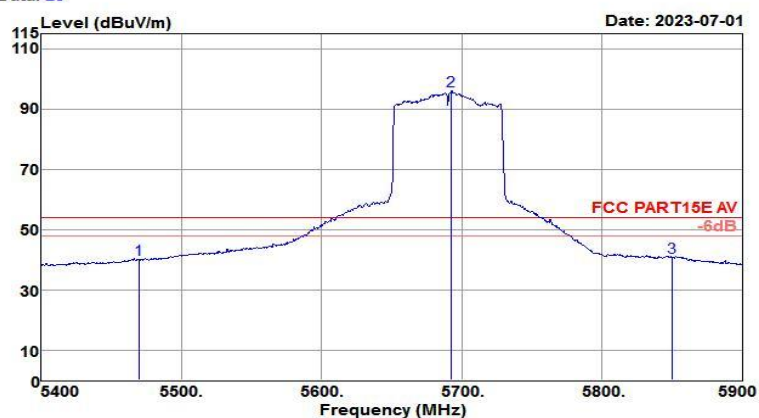

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5470.000	35.18	31.58	8.67	35.43	40.00	54.00	-14.00	Average
5692.500	91.85	31.91	7.55	35.21	96.10	54.00	42.10	Average
5850.000	36.39	32.16	7.10	35.05	40.60	54.00	-13.40	Average

Test Mode :	802.11ac VHT80 CH138 5690MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.35GHz~5.765GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11ac VHT80 CH138(5690MHz)	Power rating:	DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

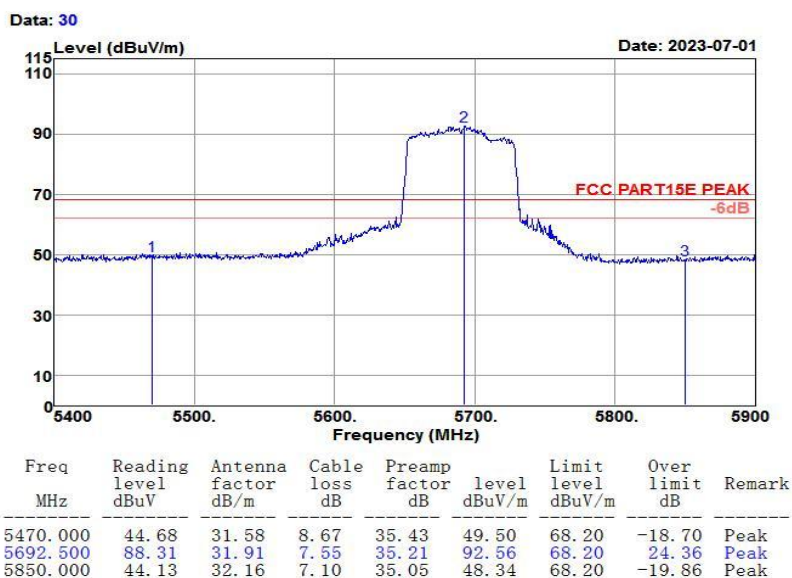

Test Mode :	802.11ac VHT80 CH138 5690MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.35GHz~5.765GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11ac VHT80 CH138(5690MHz)	Power rating:	DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		


Data: 31

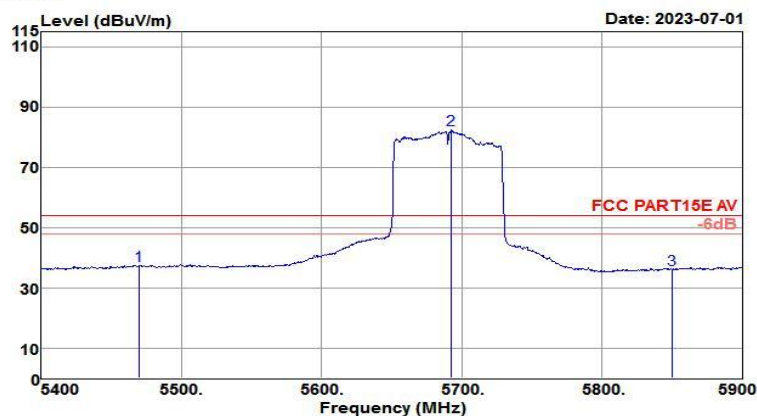

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5470.000	32.50	31.58	8.67	35.43	37.32	54.00	-16.68	Average
5692.500	78.11	31.91	7.55	35.21	82.36	54.00	28.36	Average
5850.000	31.91	32.16	7.10	35.05	36.12	54.00	-17.88	Average

Test Mode :	802.11ac VHT80 CH155 5775MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.6GHz~5.80GHz	Polarization :	Horizontal


Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11ac VHT80 CH155(5775MHz) Power rating: DC 15V
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

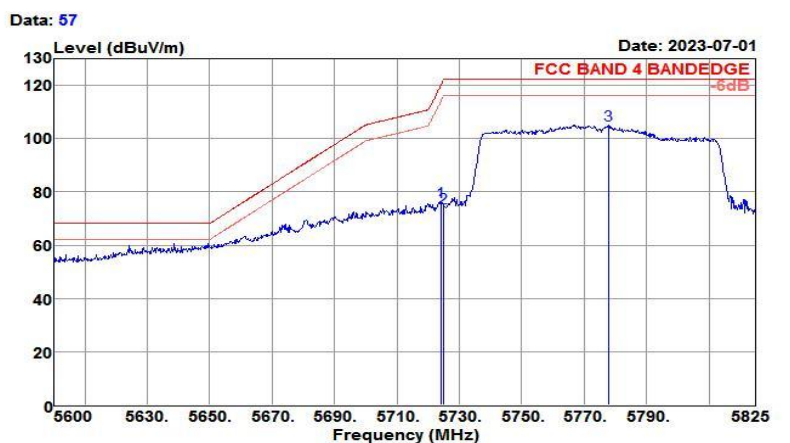

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5723.975	72.39	31.96	7.30	35.18	76.47	119.86	-43.39	Peak
5725.000	69.94	31.96	7.29	35.18	74.01	122.20	-48.19	Peak
5777.750	101.31	32.04	6.88	35.12	105.11	122.20	-17.09	Peak

Test Mode :	802.11ac VHT80 CH155 5775MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.6GHz~5.80GHz	Polarization :	Horizontal


Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11ac VHT80 CH155(5775MHz) Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

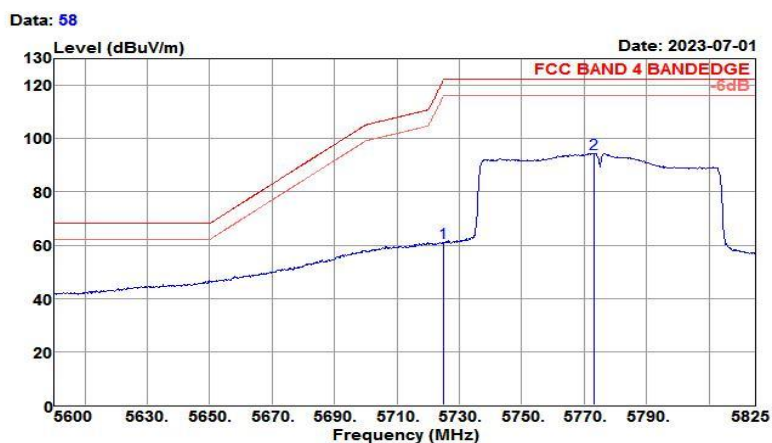

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5725.000	56.73	31.96	7.29	35.18	60.80	122.20	-61.40	Average
5773.025	90.65	32.04	6.91	35.13	94.47	122.20	-27.73	Average

Test Mode :	802.11ac VHT80 CH155 5775MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.6GHz~5.80GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11ac VHT80 CH155(5775MHz)	Power rating:	DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

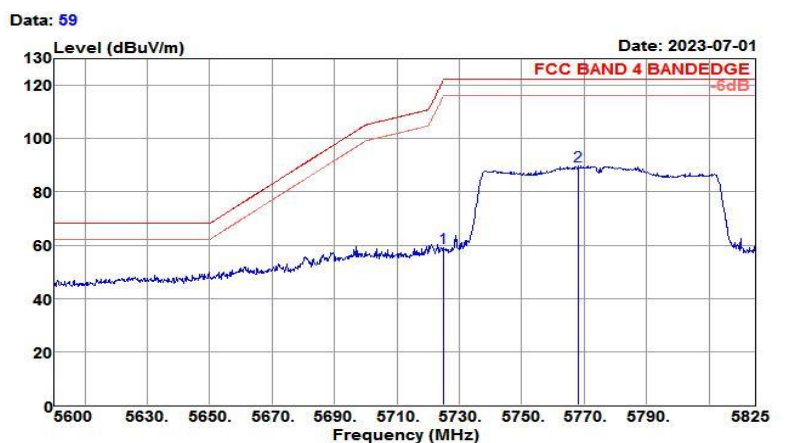

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5725.000	54.89	31.96	7.29	35.18	58.96	122.20	-63.24	Peak
5768.300	86.09	32.03	6.95	35.13	89.94	122.20	-32.26	Peak

Test Mode :	802.11ac VHT80 CH155 5775MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.6GHz~5.80GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11ac VHT80 CH155(5775MHz)	Power rating:	DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

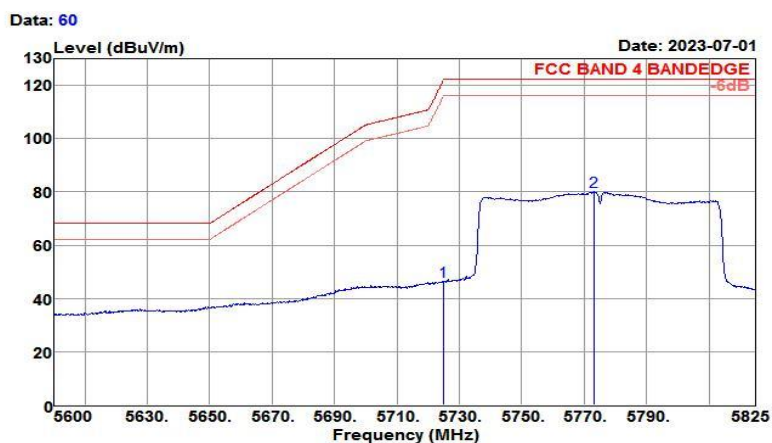

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5725.000	42.20	31.96	7.29	35.18	46.27	122.20	-75.93	Average
5773.025	76.19	32.04	6.91	35.13	80.01	122.20	-42.19	Average


Test Mode :	802.11ac VHT80 CH155 5775MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.75GHz~5.95GHz	Polarization :	Horizontal

Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11ac VHT80 CH155(5775MHz) Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

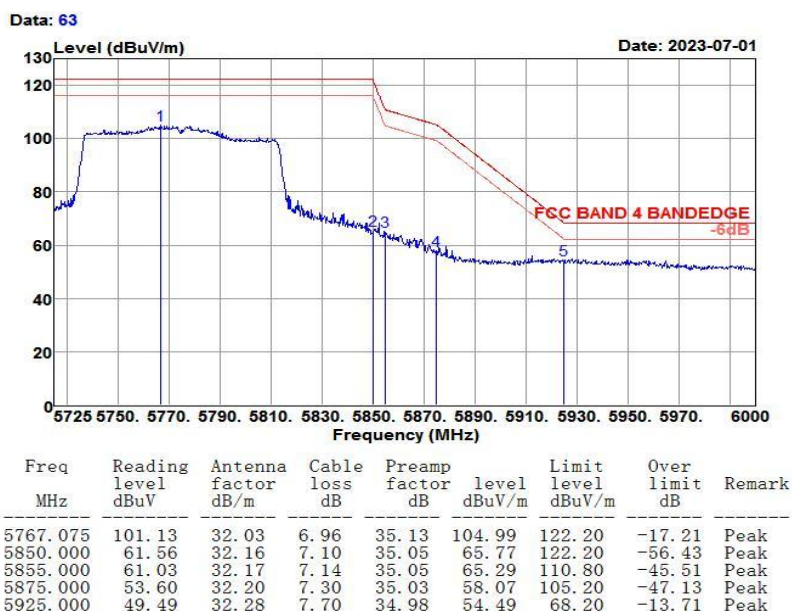

Test Mode :	802.11ac VHT80 CH155 5775MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.75GHz~5.95GHz	Polarization :	Horizontal


Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11ac VHT80 CH155(5775MHz) Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

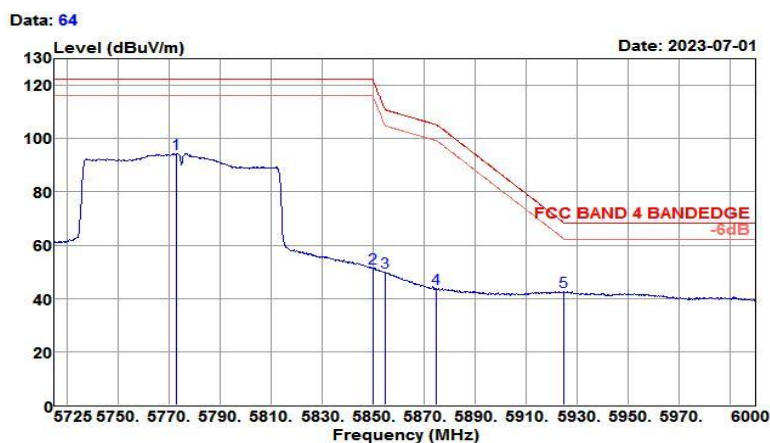

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5773.125	90.70	32.04	6.91	35.13	94.52	122.20	-27.68	Average
5850.000	47.28	32.16	7.10	35.05	51.49	122.20	-70.71	Average
5855.000	45.69	32.17	7.14	35.05	49.95	110.80	-60.85	Average
5875.000	39.34	32.20	7.30	35.03	43.81	105.20	-61.39	Average
5925.000	37.69	32.28	7.70	34.98	42.69	68.20	-25.51	Average


Test Mode :	802.11ac VHT80 CH155 5775MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.75GHz~5.95GHz	Polarization :	Vertical

Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : 802.11ac VHT80 CH155(5775MHz) Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

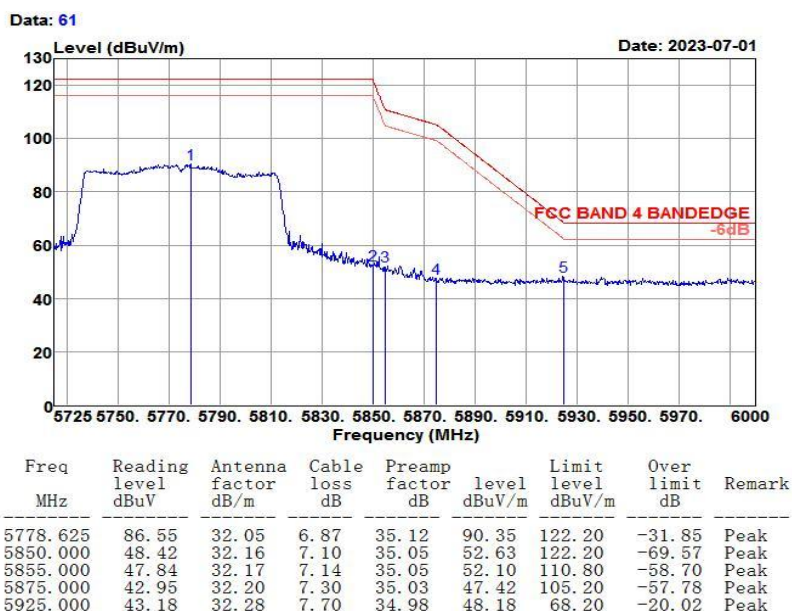

Test Mode :	802.11ac VHT80 CH155 5775MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.75GHz~5.95GHz	Polarization :	Vertical

Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : 802.11ac VHT80 CH155(5775MHz) Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

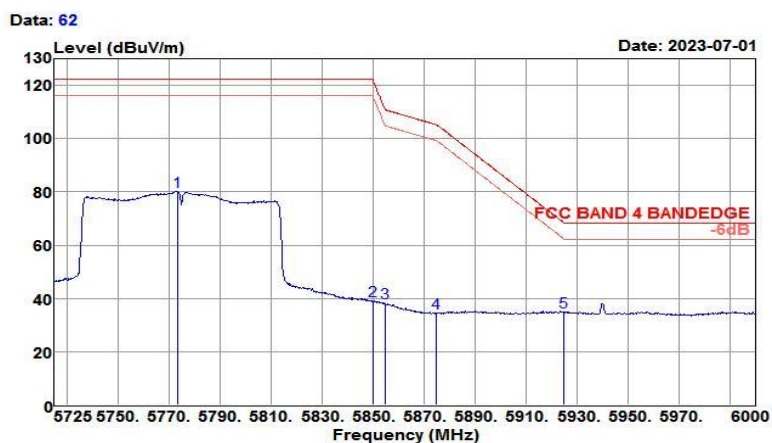


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5773.400	76.31	32.04	6.91	35.13	80.13	122.20	-42.07	Average
5850.000	35.10	32.16	7.10	35.05	39.31	122.20	-82.89	Average
5855.000	33.94	32.17	7.14	35.05	38.20	110.80	-72.60	Average
5875.000	30.17	32.20	7.30	35.03	34.64	105.20	-70.56	Average
5925.000	29.82	32.28	7.70	34.98	34.82	68.20	-33.38	Average

3.4.5 Test Result of Radiated Spurious Emission (1GHz ~ 10th Harmonic)


Test Mode :	802.11a CH36 5180MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 24℃/62%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH36 (5180MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

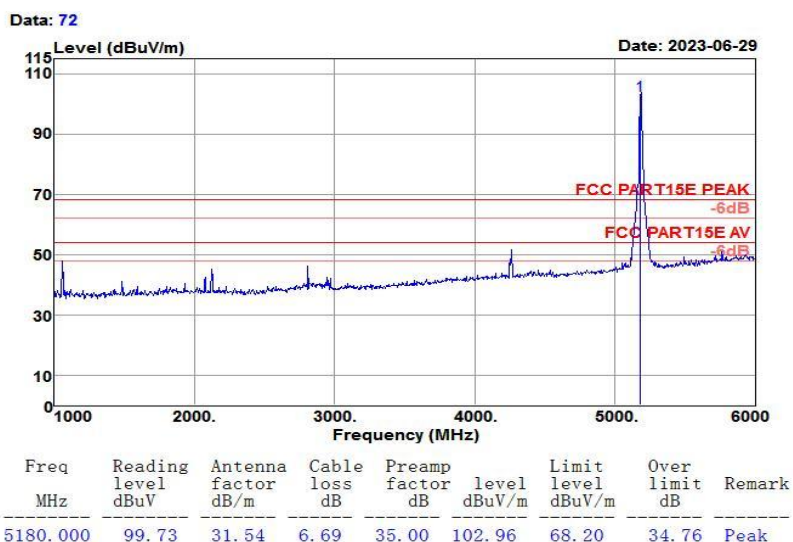

Test Mode :	802.11a CH36 5180MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH36 (5180MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

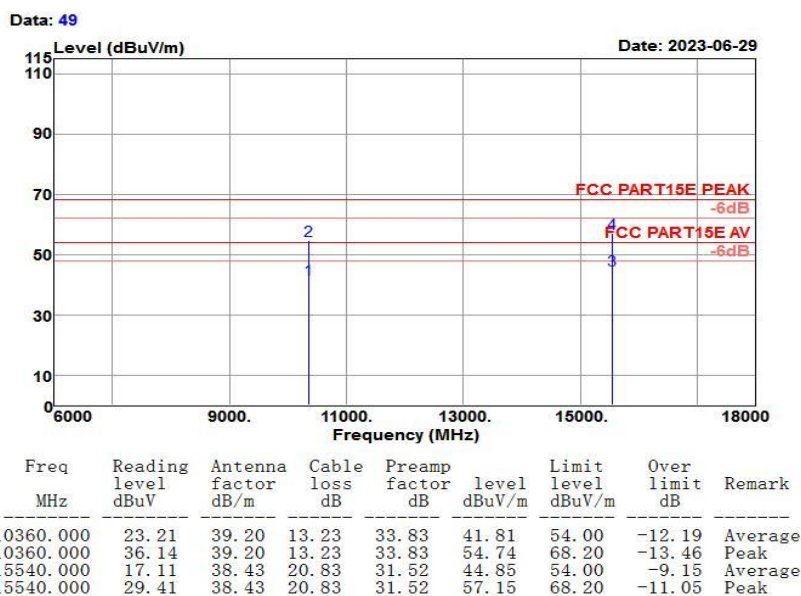

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11a CH36 5180MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 24℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH36 (5180MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

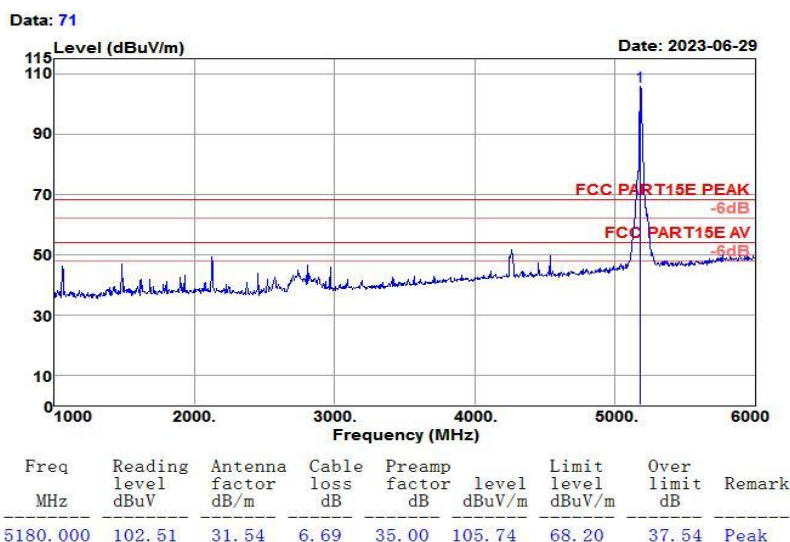

Test Mode :	802.11a CH36 5180MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH36 (5180MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

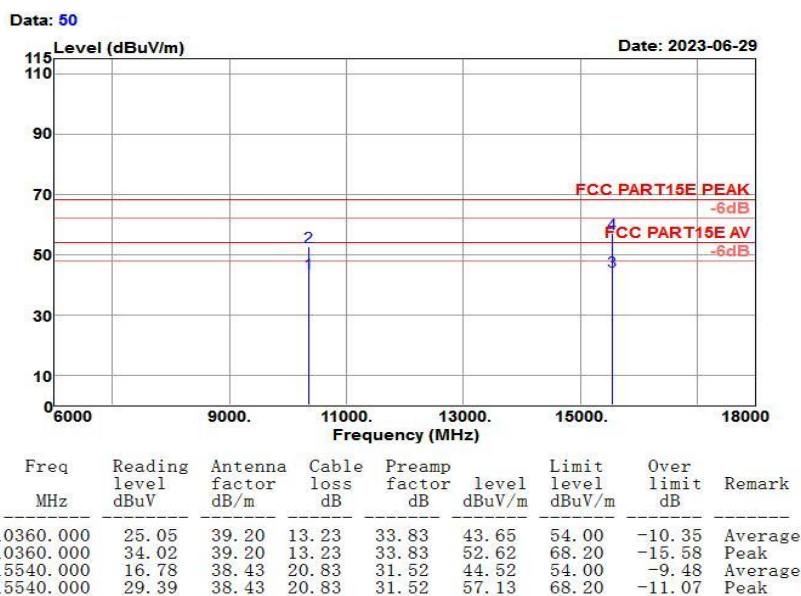

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11a CH48 5240MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 24℃/62%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH48 (5240MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

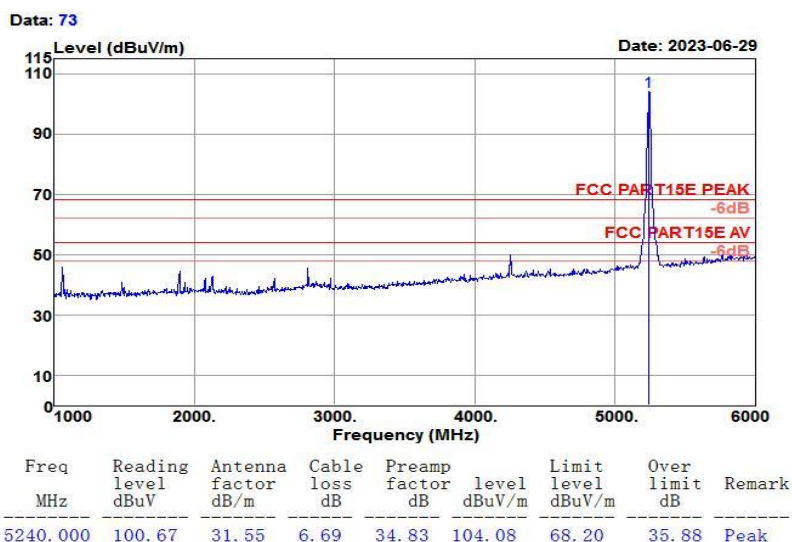

Test Mode :	802.11a CH48 5240MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH48 (5240MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

Data: 52

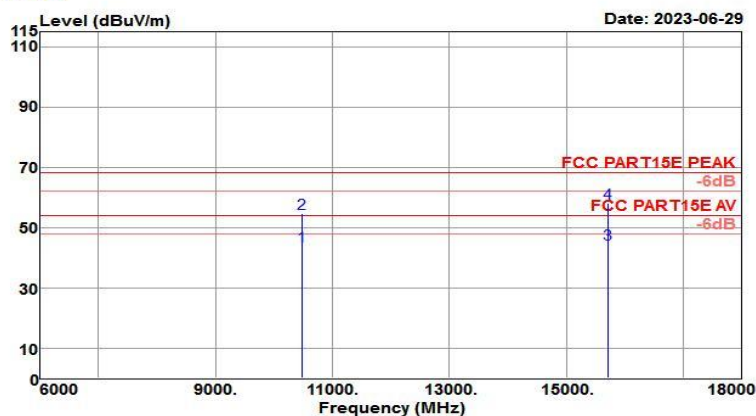


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
10480.000	24.71	39.37	13.32	33.68	43.72	54.00	-10.28	Average
10480.000	35.79	39.37	13.32	33.68	54.80	68.20	-13.40	Peak
15720.000	17.65	38.10	20.24	31.40	44.59	54.00	-9.41	Average
15720.000	31.22	38.10	20.24	31.40	58.16	68.20	-10.04	Peak

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11a CH48 5240MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 24℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH48 (5240MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

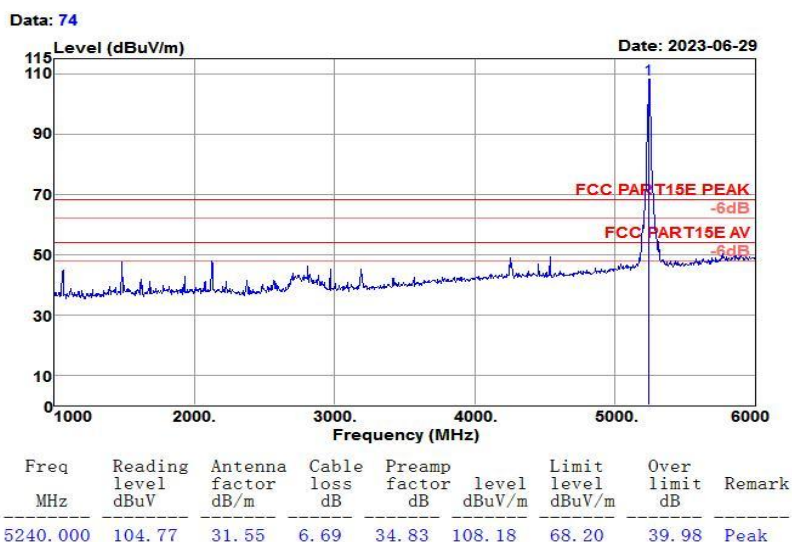

Test Mode :	802.11a CH48 5240MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH48 (5240MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

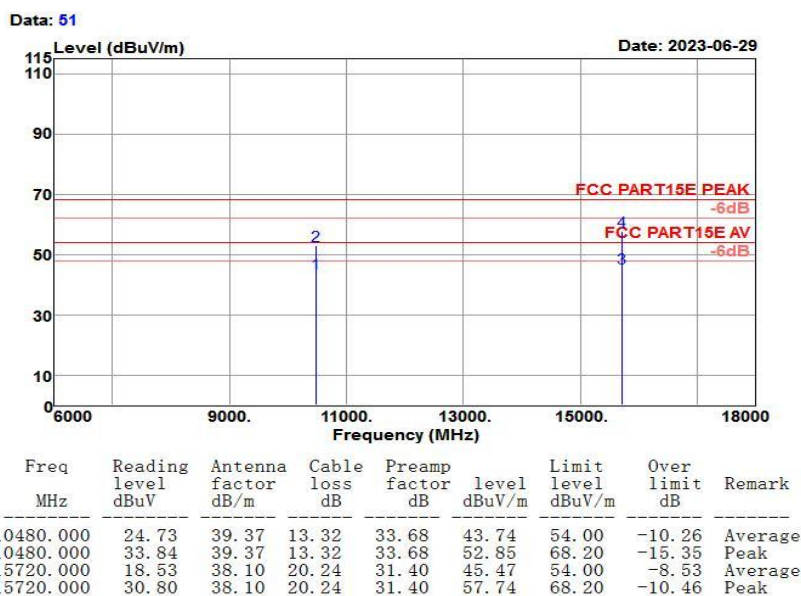

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11a CH64 5320MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 24℃/62%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH64 (5320MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

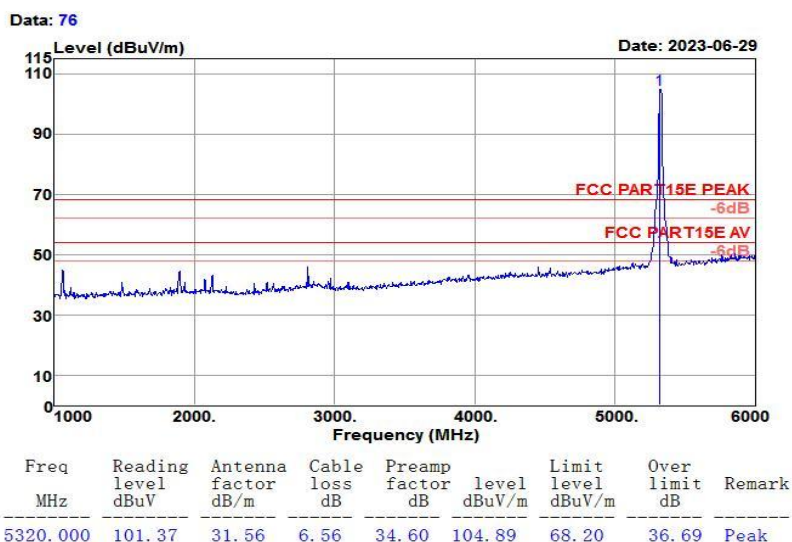

Test Mode :	802.11a CH64 5320MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH64 (5320MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

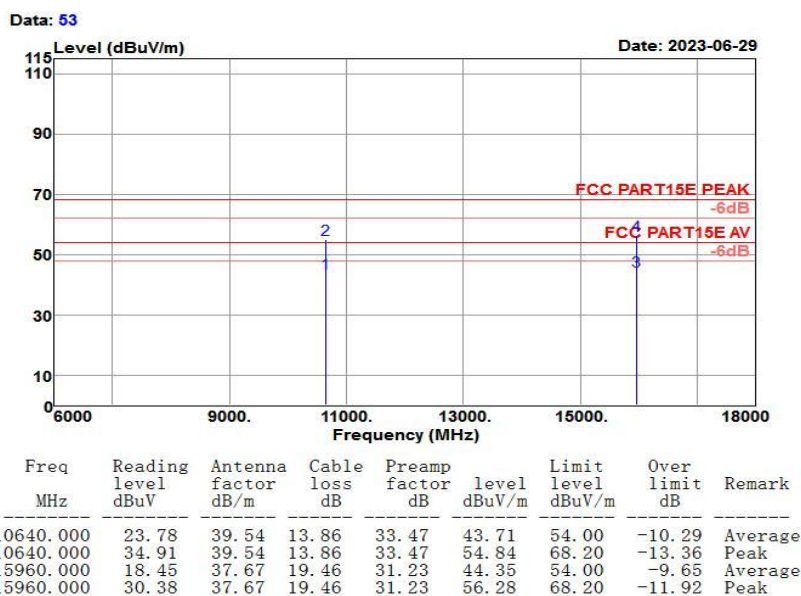

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11a CH64 5320MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 24℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH64 (5320MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

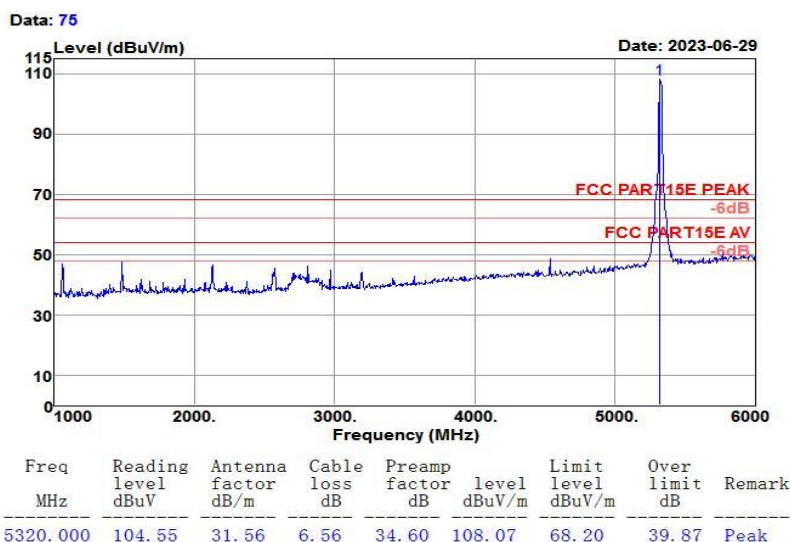

Test Mode :	802.11a CH64 5320MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH64 (5320MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

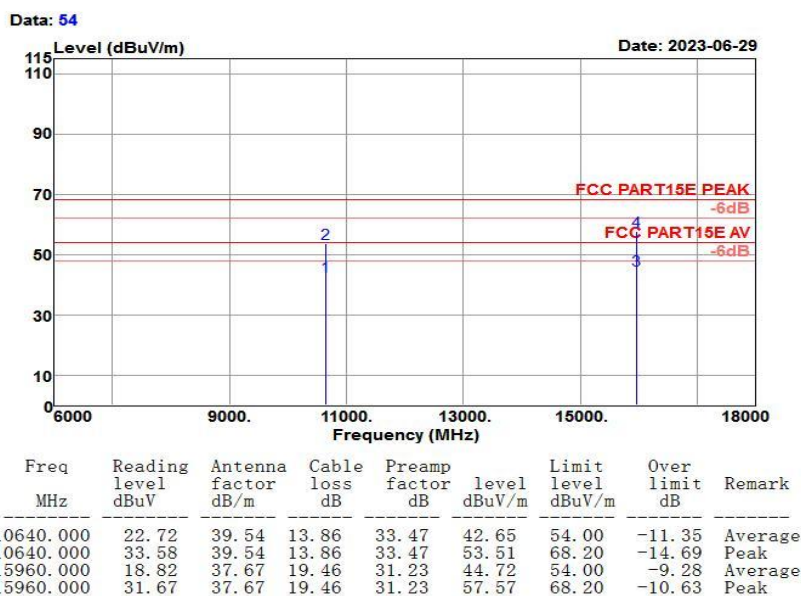

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11a CH100 5500MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH100 (5500MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

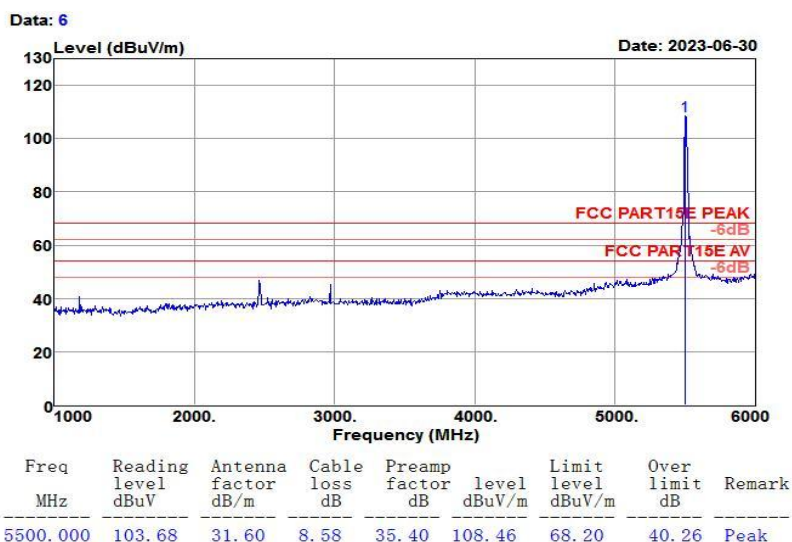

Test Mode :	802.11a CH100 5500MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH100 (5500MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

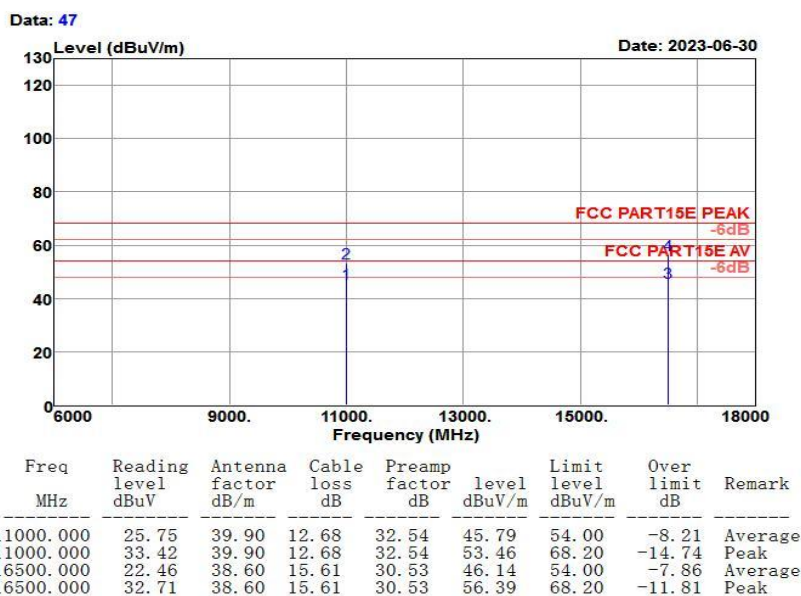

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11a CH100 5500MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH100 (5500MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

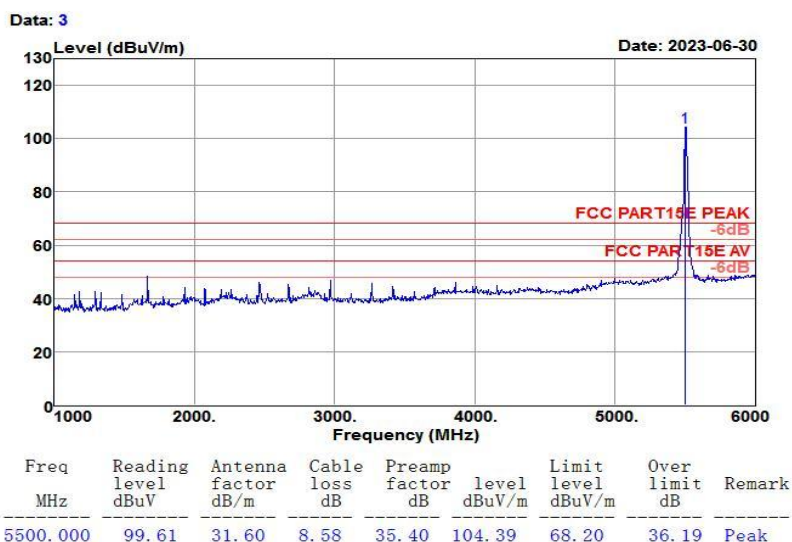

Test Mode :	802.11a CH100 5500MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH100 (5500MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

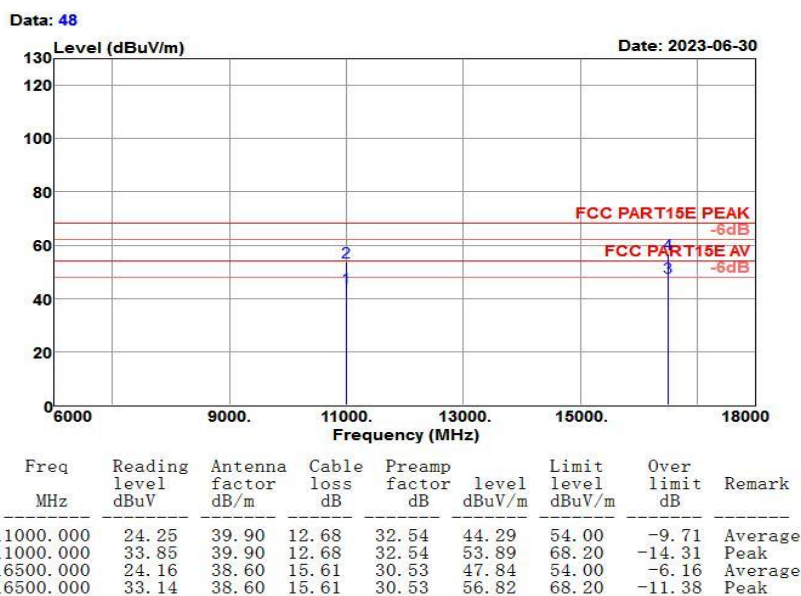

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11a CH116 5580MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH100 (5500MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

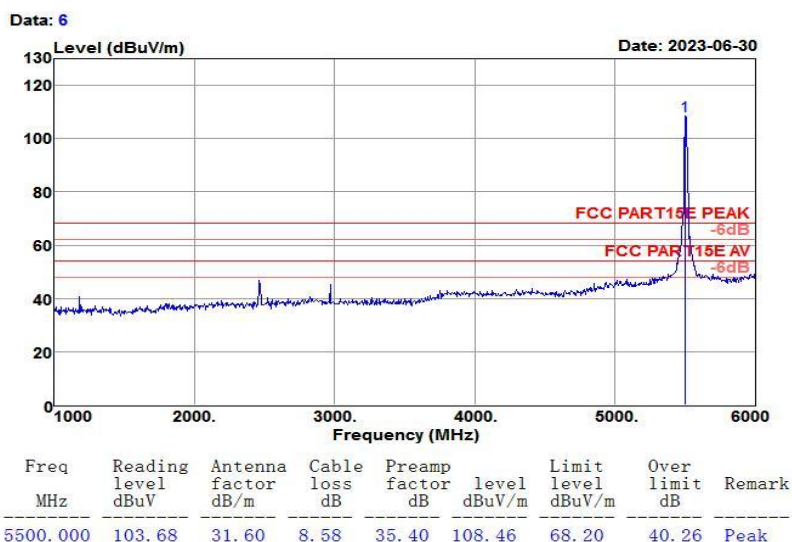

Test Mode :	802.11a CH116 5580MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH116 (5580MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

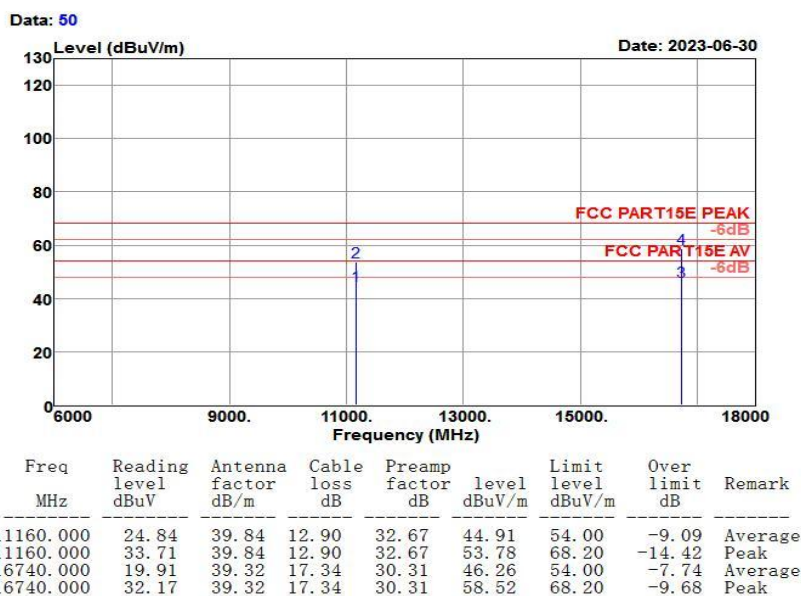

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11a CH116 5580MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH116 (5580MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

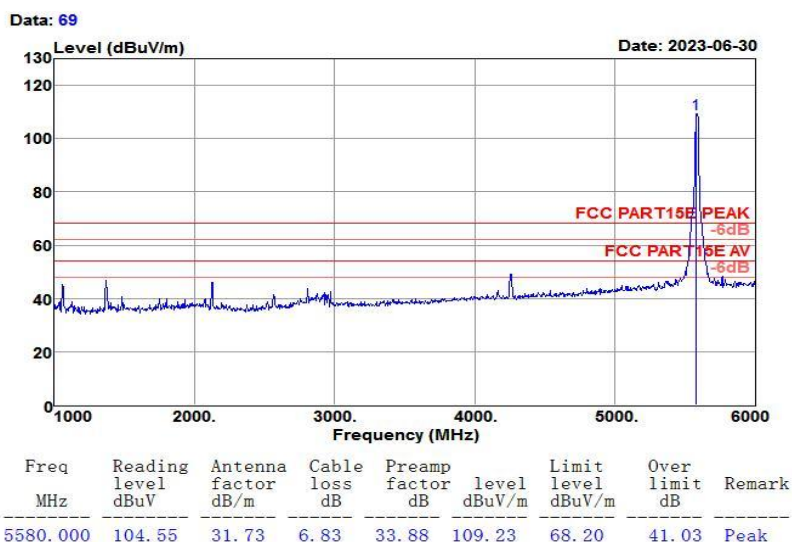

Test Mode :	802.11a CH116 5580MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH116 (5580MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

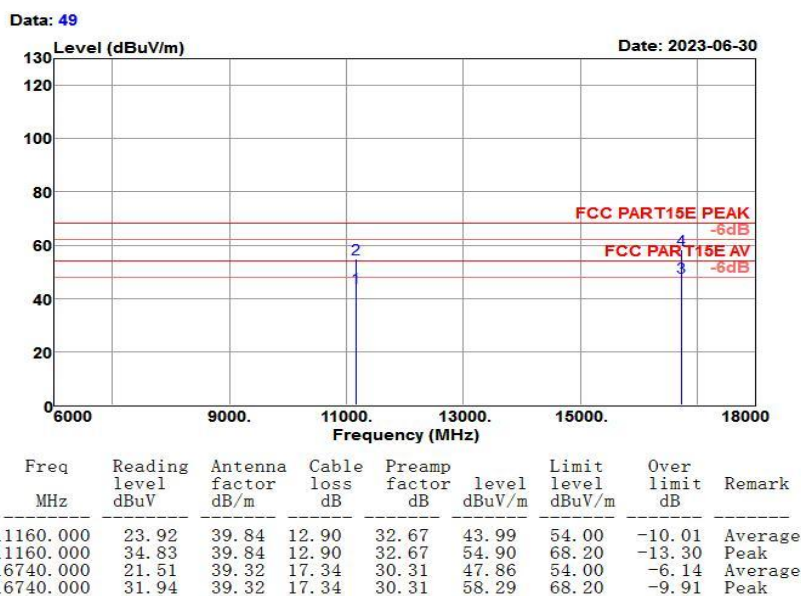

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11a CH140 5700MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH140 (5700MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

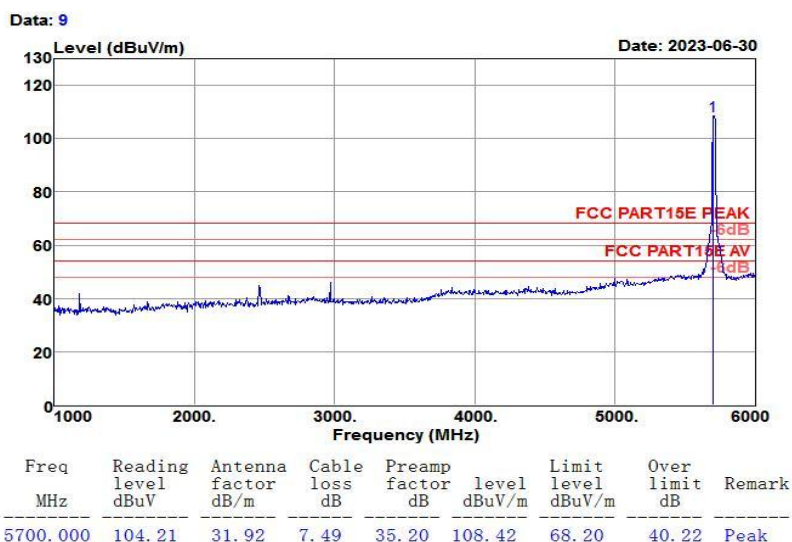

Test Mode :	802.11a CH140 5700MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH140 (5700MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

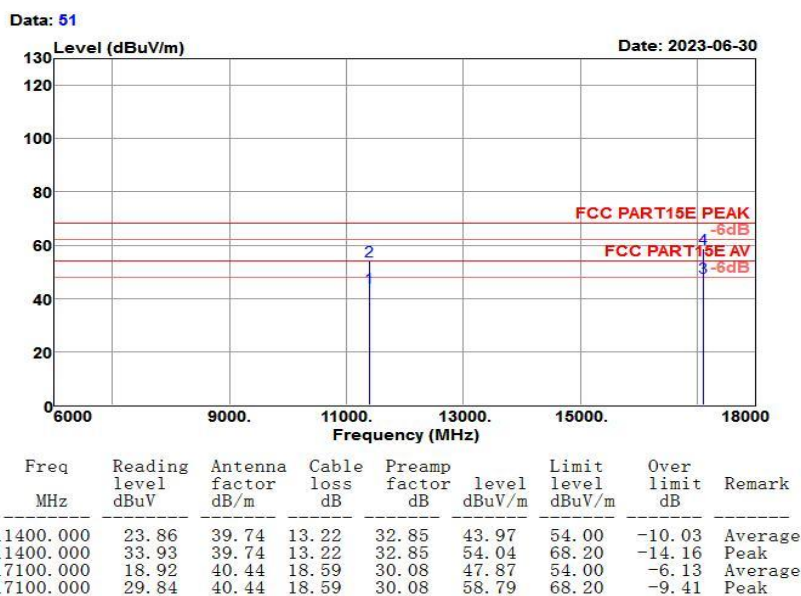

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11a CH140 5700MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH140 (5700MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

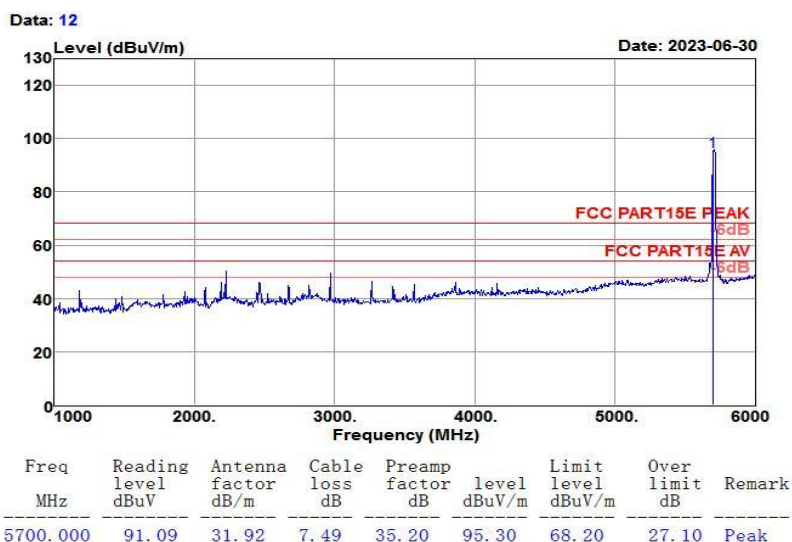

Test Mode :	802.11a CH140 5700MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site : 3m Chamber	Temp/Humi : 23℃/61%
Tested by : Jack	Pol/Phase : VERTICAL
Test Mode : 802.11a CH140 (5700MHz)	Power rating: DC 15W
EUT : Digital Video Monitor	Comment :
Model No. : DVM-D1	

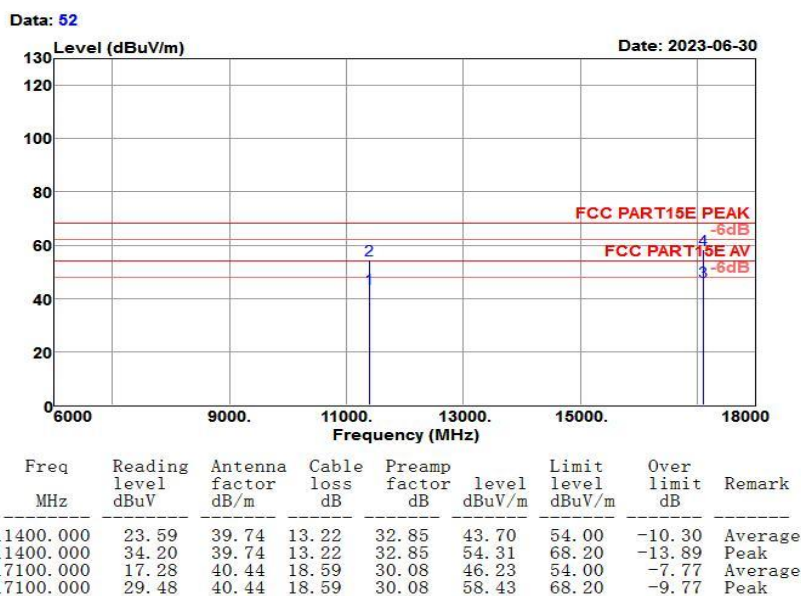

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11a CH140 5700MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH140 (5700MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

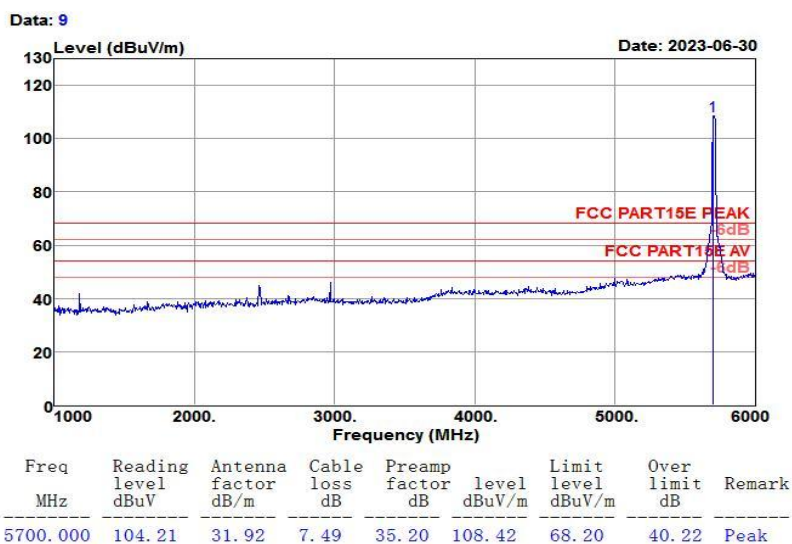

Test Mode :	802.11a CH144 5720MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH144 (5720MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

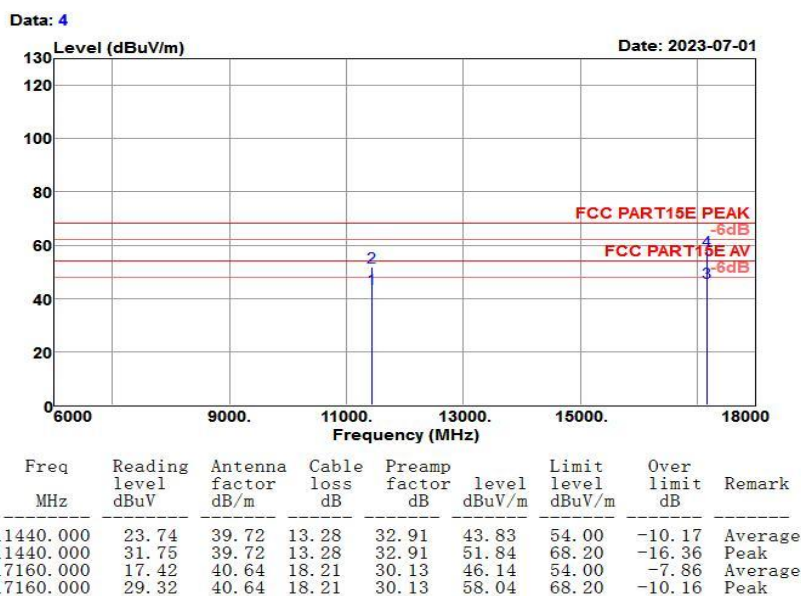

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11a CH144 5720MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH144 (5720MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

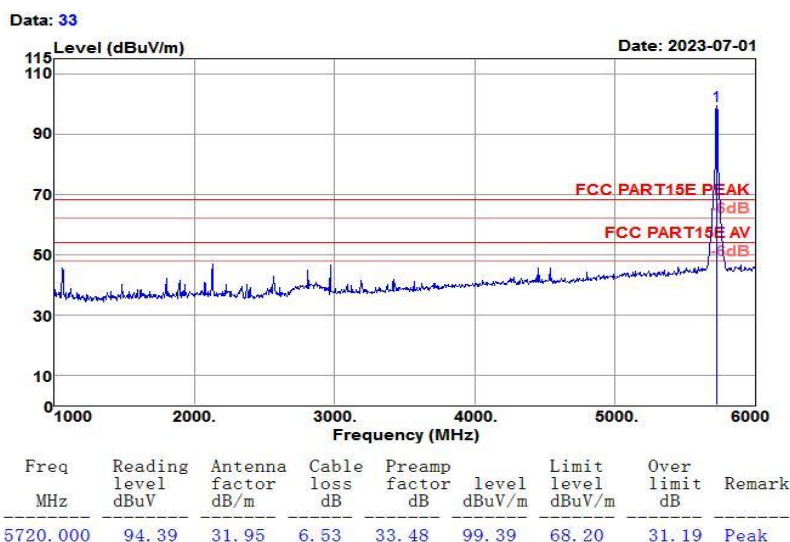

Test Mode :	802.11a CH144 5720MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH144 (5720MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

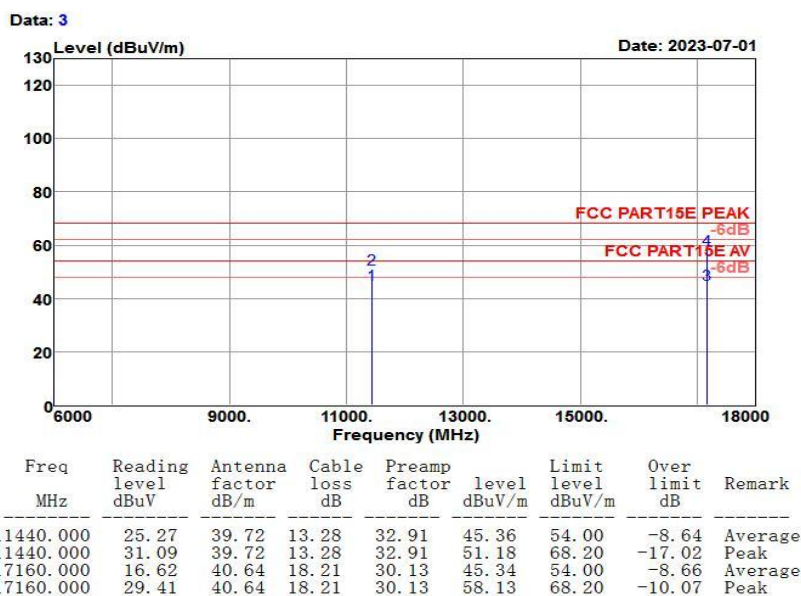

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11a CH149 5745MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH149 (5745MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

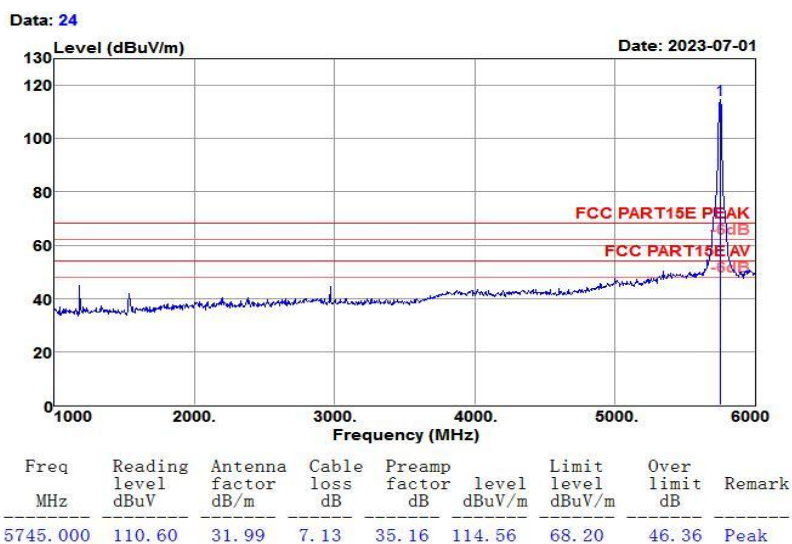

Test Mode :	802.11a CH149 5745MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH149 (5745MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

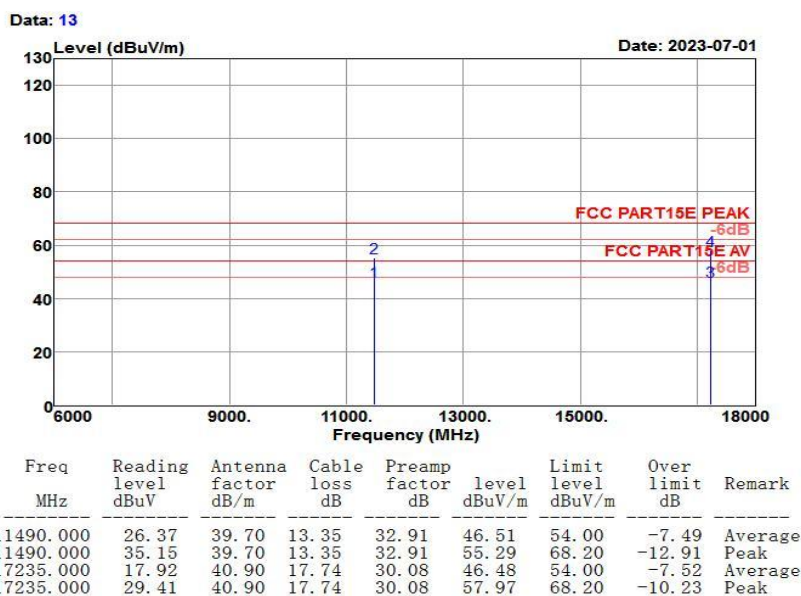

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11a CH149 5745MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH149 (5745MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

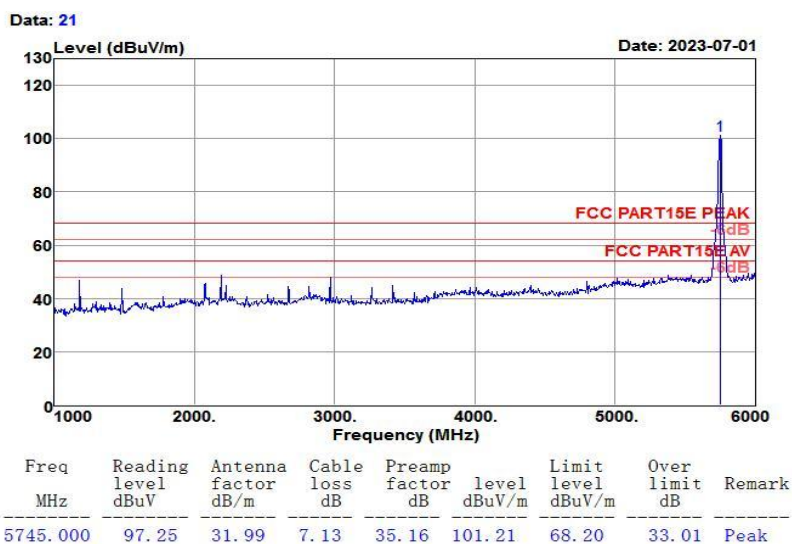

Test Mode :	802.11a CH149 5745MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH149 (5745MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

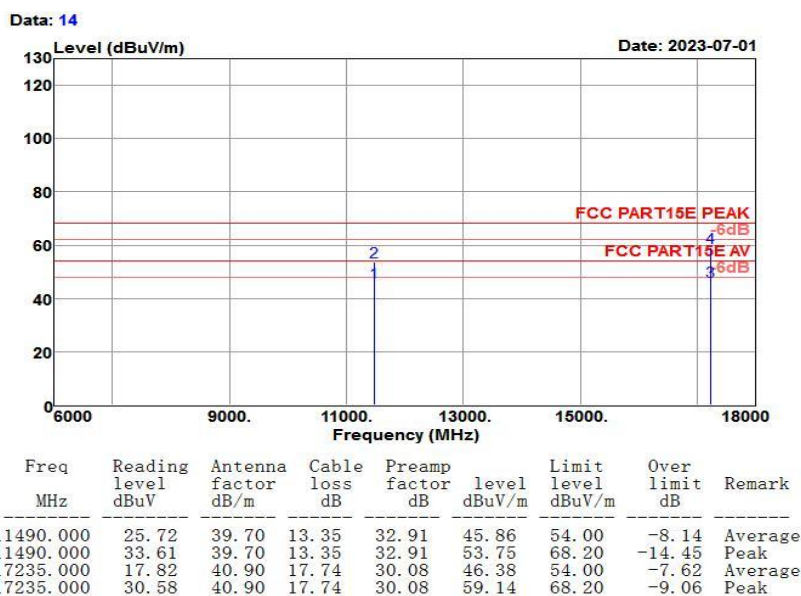


Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11a CH157 5785MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH157 (5785MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		


Data: 25

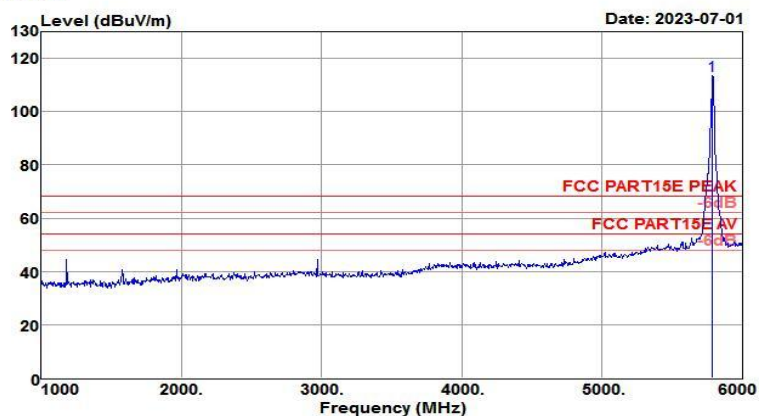

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5785.000	109.65	32.06	6.82	35.12	113.41	68.20	45.21	Peak

Test Mode :	802.11a CH157 5785MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH157 (5785MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

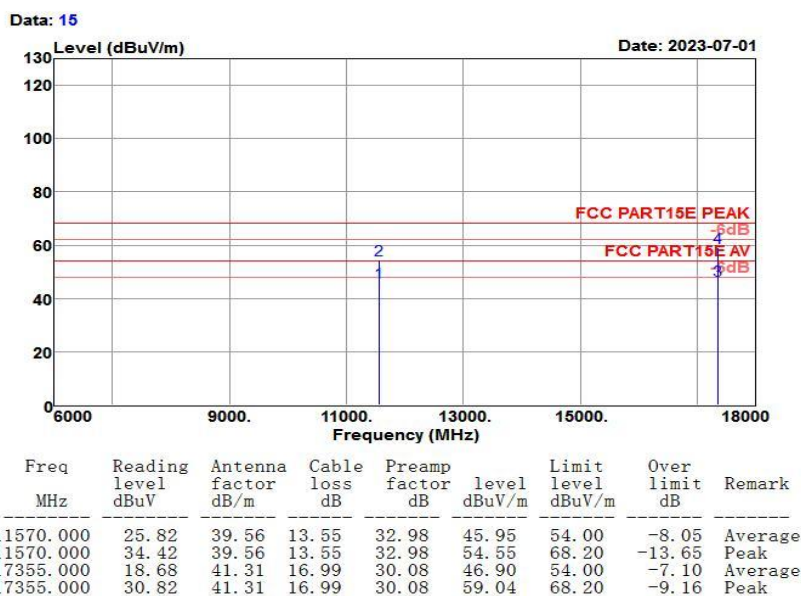

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11a CH157 5785MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH157 (5785MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

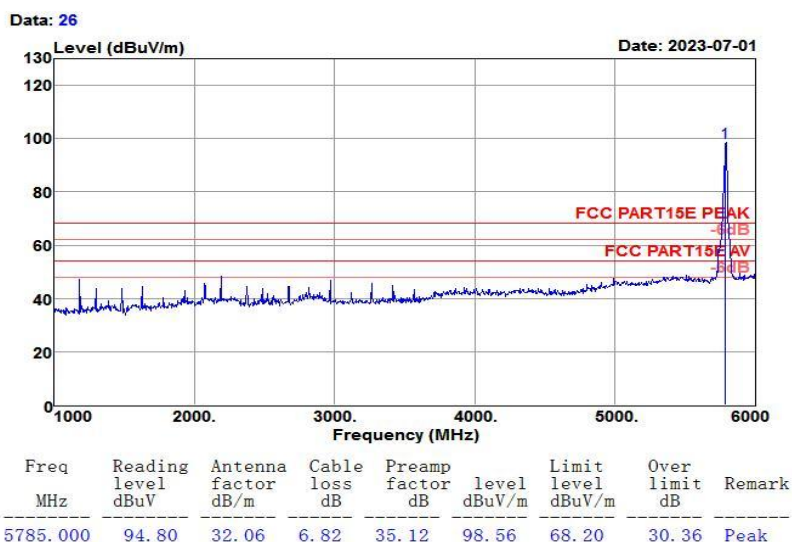

Test Mode :	802.11a CH157 5785MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH157 (5785MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

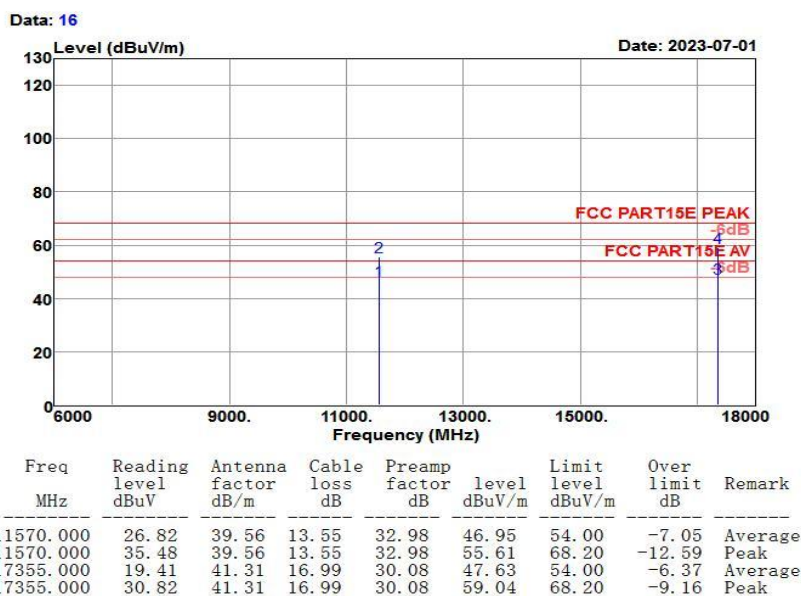

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11a CH165 5825MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH165 (5825MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

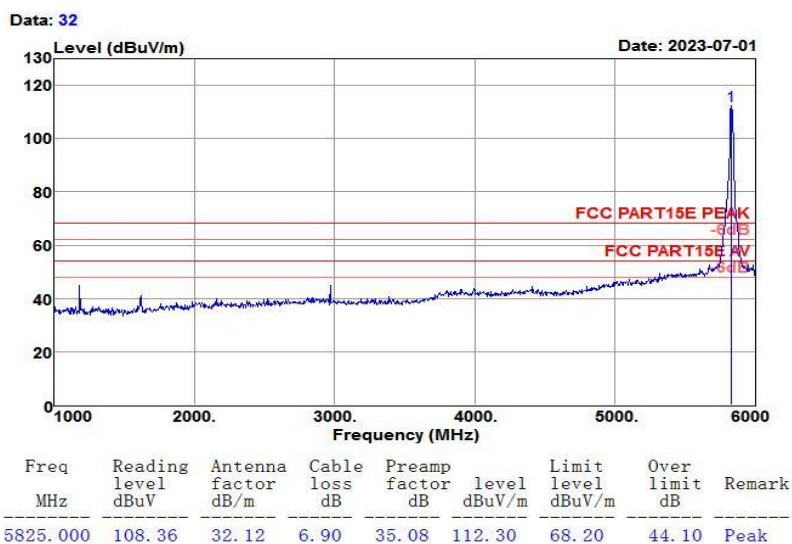

Test Mode :	802.11a CH165 5825MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH165 (5825MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

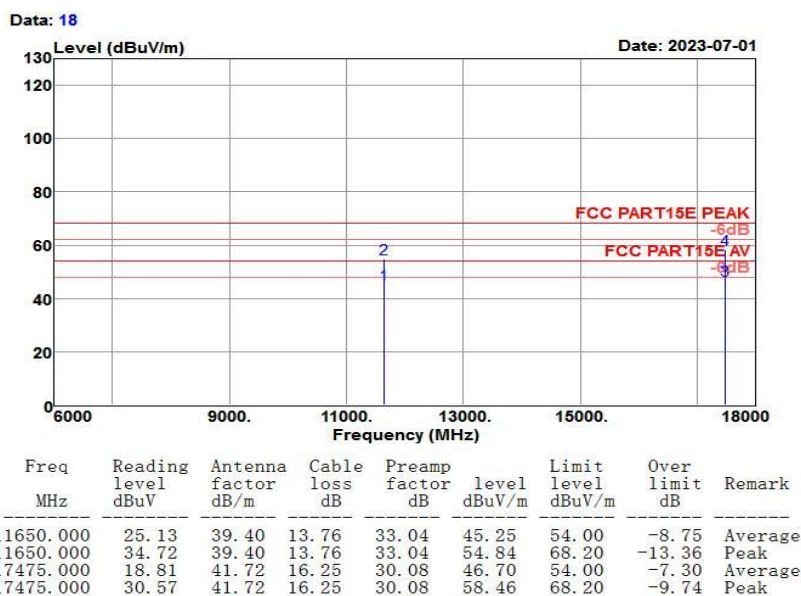

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11a CH165 5825MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site : 3m Chamber	Temp/Humi : 23℃/61%
Tested by : Jack	Pol/Phase : VERTICAL
Test Mode : 802.11a CH165 (5825MHz)	Power rating: DC 15W
EUT : Digital Video Monitor	Comment :
Model No. : DVM-D1	

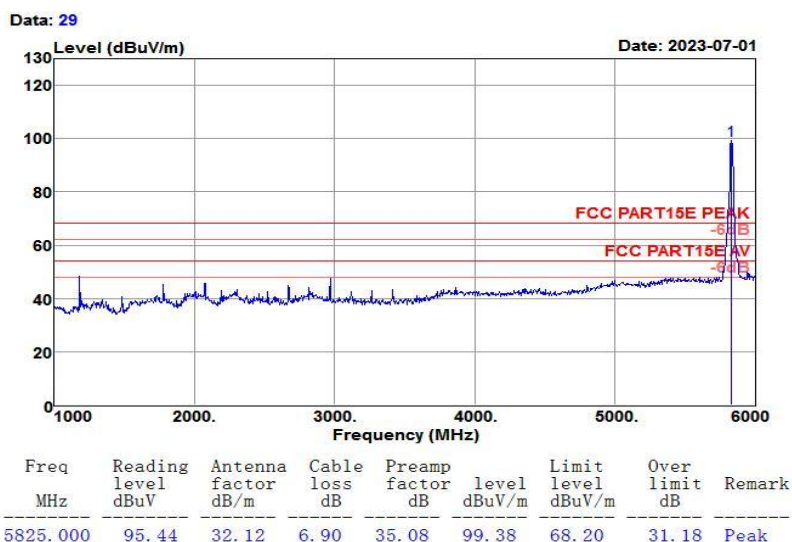

Test Mode :	802.11a CH165 5825MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH165 (5825MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

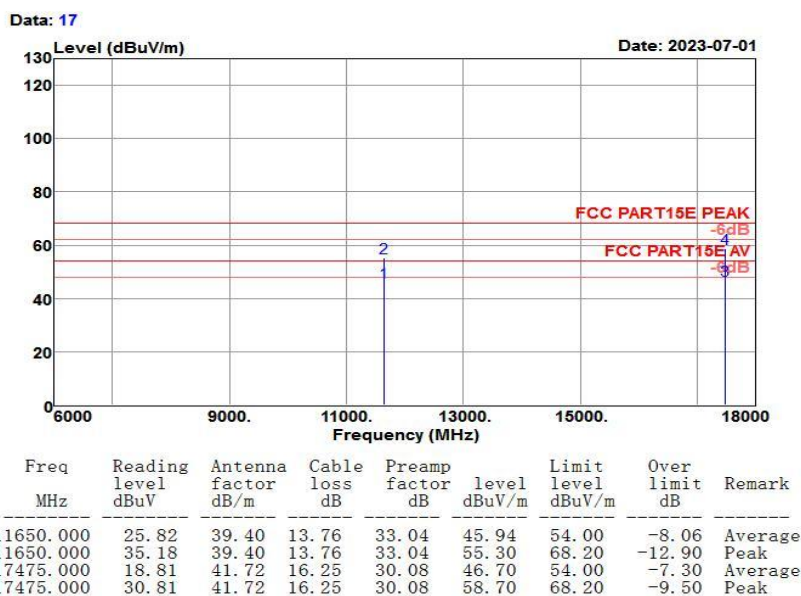

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11n HT20 CH36 5180MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT20 CH36 (5180MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

