


Test Mode :	802.11 n HT20 CH36 5180MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT20 CH36 (5180MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

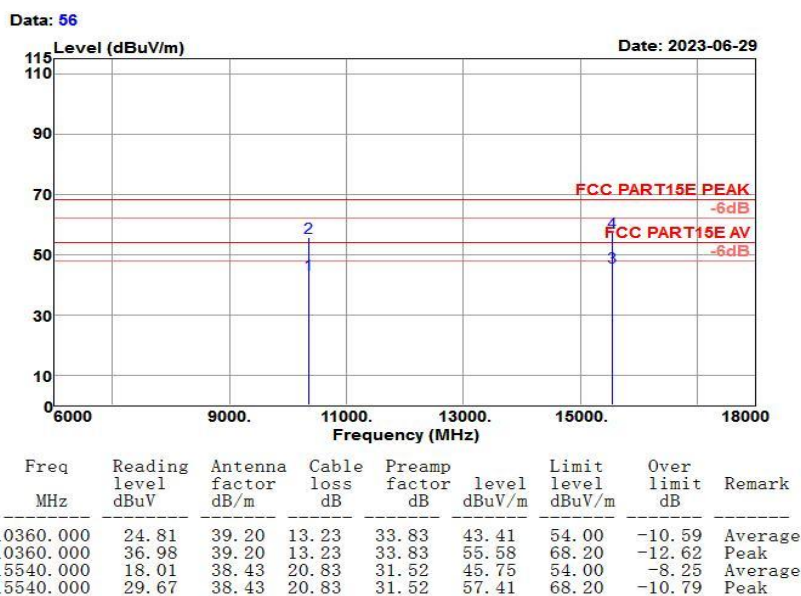

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT20 CH36 5180MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT20 CH36 (5180MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

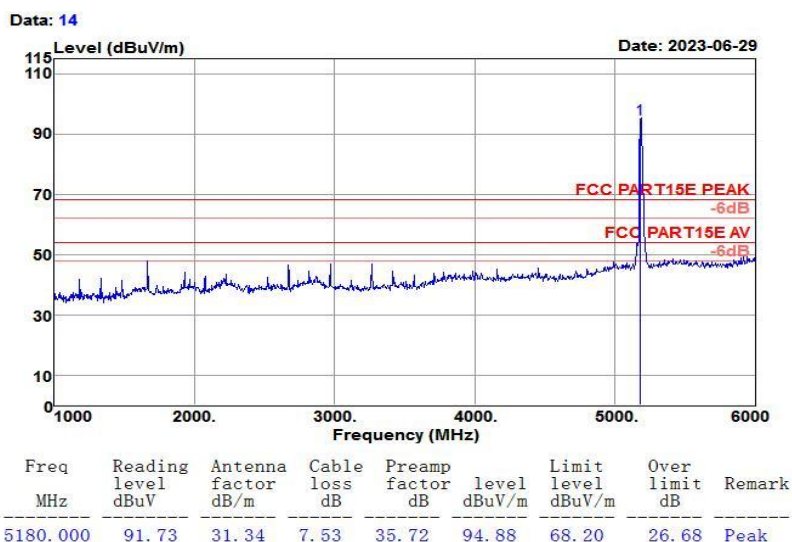

Test Mode :	802.11 n HT20 CH36 5180MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT20 CH36 (5180MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

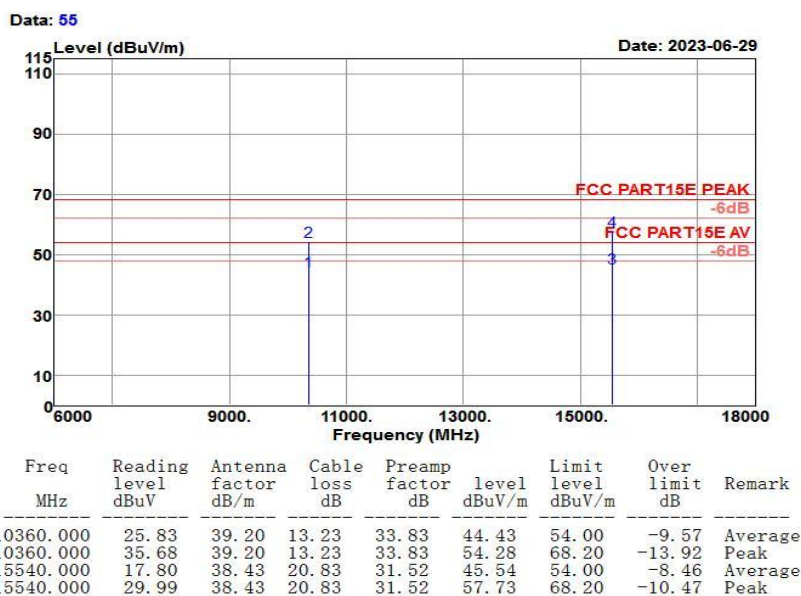

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11 n HT20 CH48 5240MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 24℃/62%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT20 CH48 (5240MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

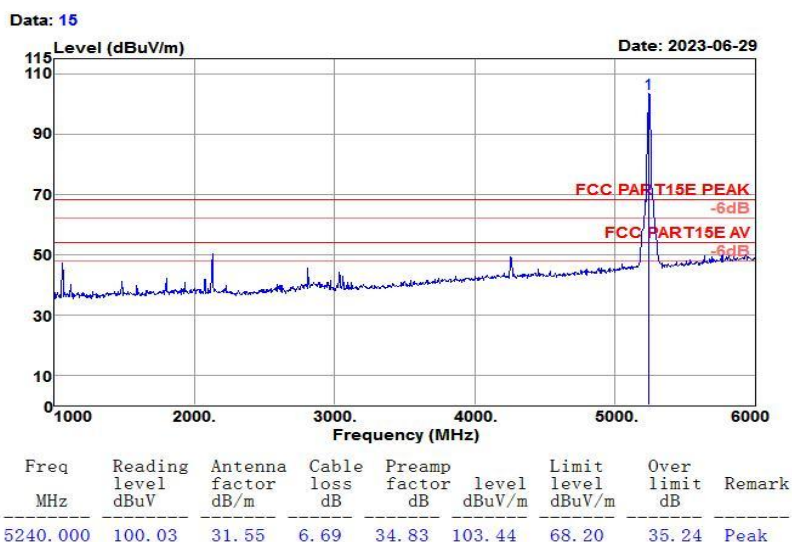

Test Mode :	802.11 n HT20 CH48 5240MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT20 CH48 (5240MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

Data: 57

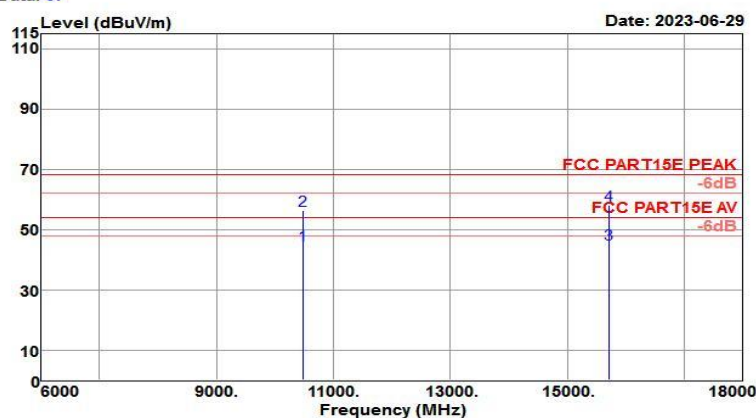


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
10480.000	25.75	39.37	13.32	33.68	44.76	54.00	-9.24	Average
10480.000	37.40	39.37	13.32	33.68	56.41	68.20	-11.79	Peak
15720.000	18.31	38.10	20.24	31.40	45.25	54.00	-8.75	Average
15720.000	31.00	38.10	20.24	31.40	57.94	68.20	-10.26	Peak

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT20 CH48 5240MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 24℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT20 CH48 (5240MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

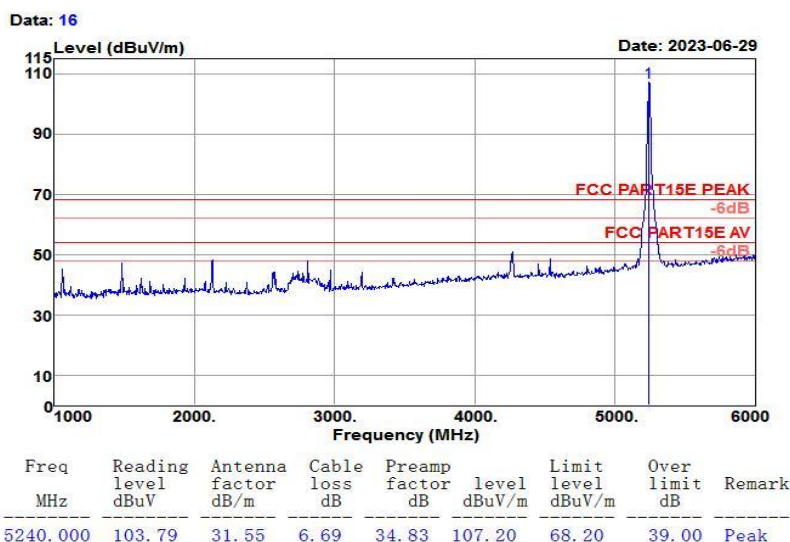

Test Mode :	802.11 n HT20 CH48 5240MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT20 CH48 (5240MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

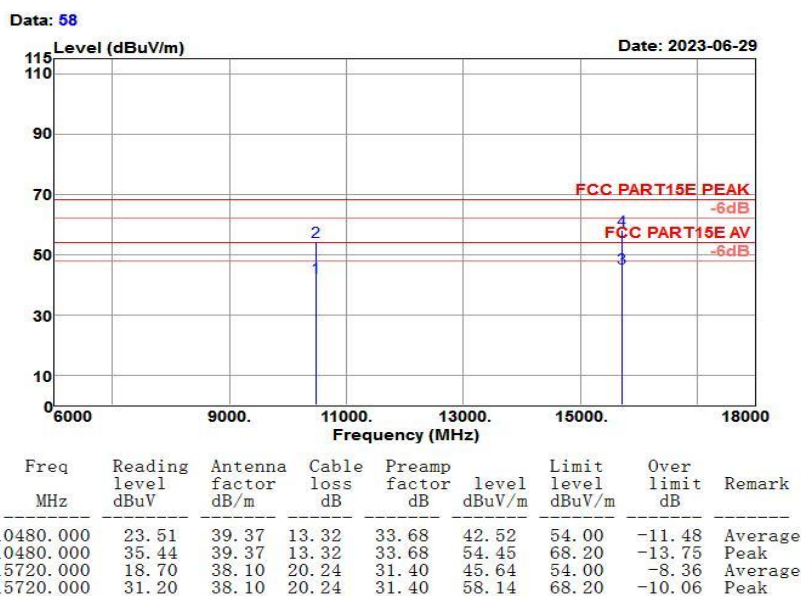

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT20 CH64 5320MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT20 CH64 (5320MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

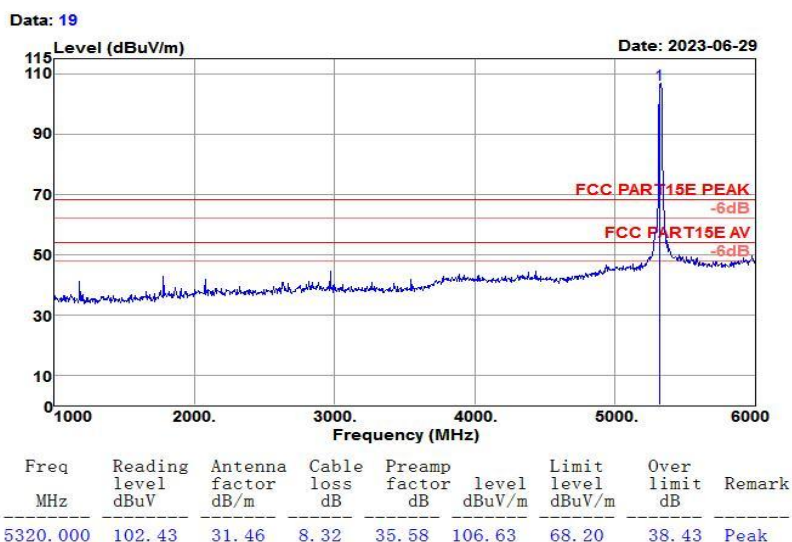

Test Mode :	802.11 n HT20 CH64 5320MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT20 CH64 (5320MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

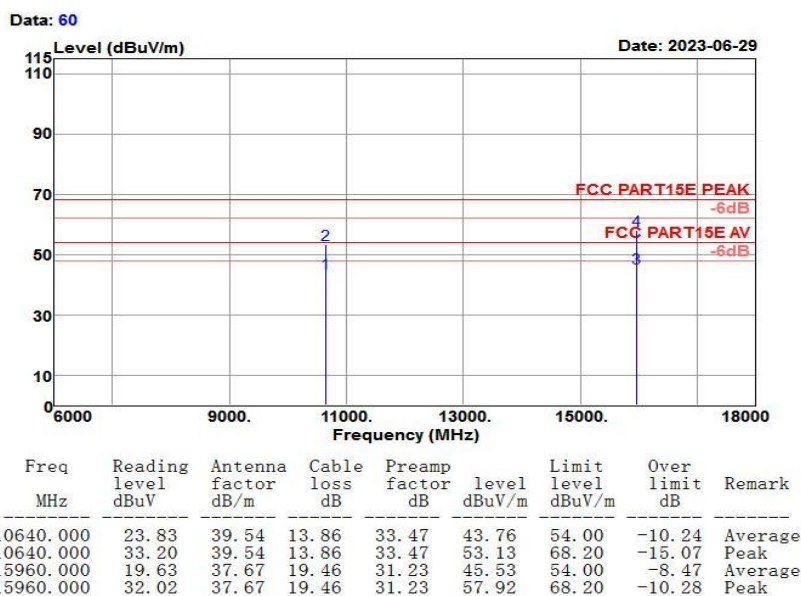


Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11 n HT20 CH64 5320MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT20 CH64 (5320MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		


Data: 22

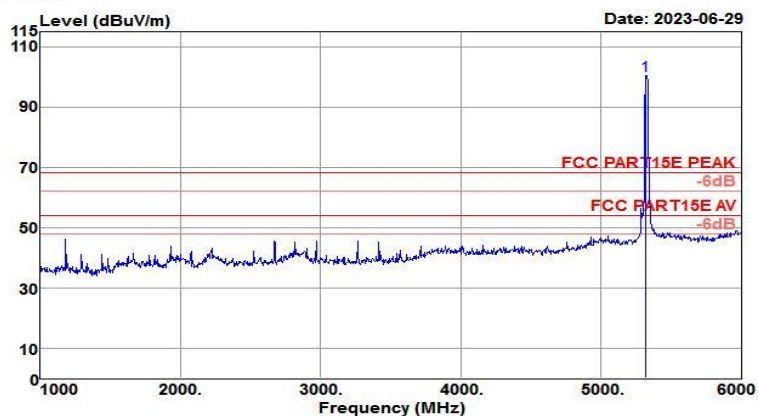

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5320.000	96.11	31.46	8.32	35.58	100.31	68.20	32.11	Peak

Test Mode :	802.11 n HT20 CH64 5320MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT20 CH64 (5320MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

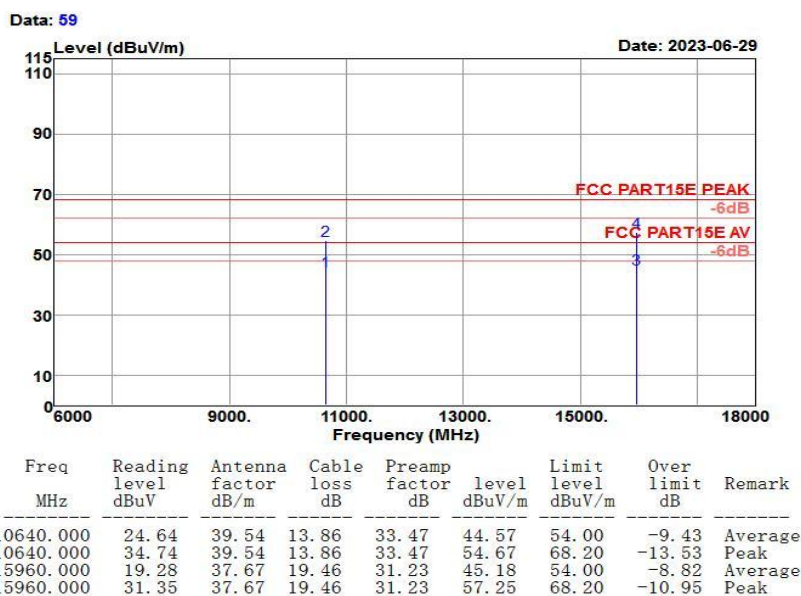

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT20 CH100 5500MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT20 CH100 (5500MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

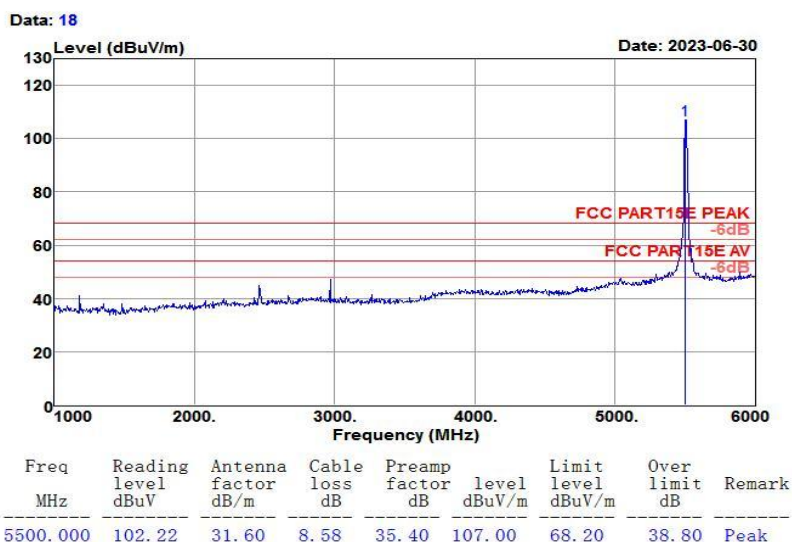

Test Mode :	802.11 n HT20 CH100 5500MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT20 CH100 (5500MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

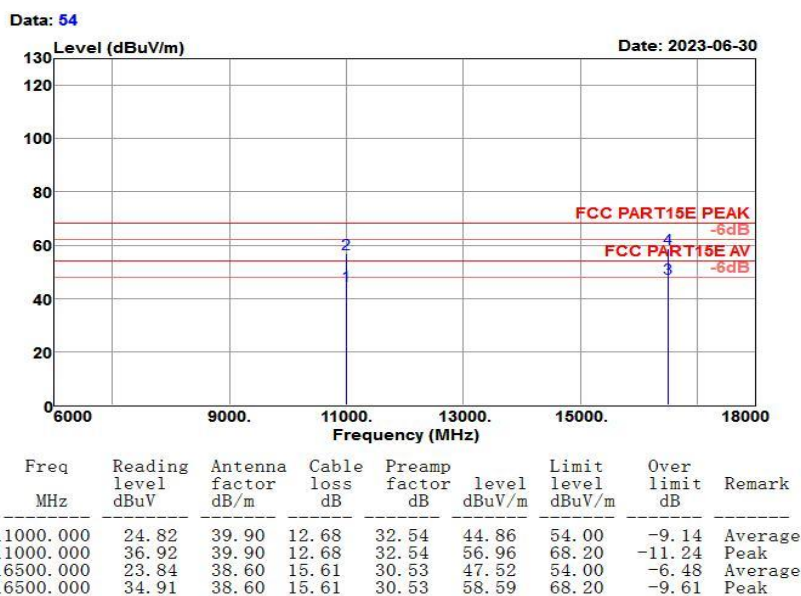

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT20 CH100 5500MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT20 CH100 (5500MHz)	Power rating:	DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

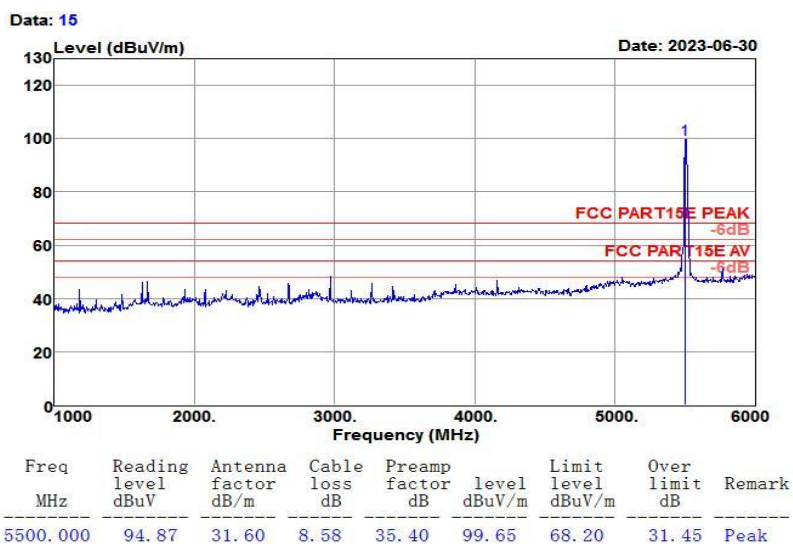

Test Mode :	802.11 n HT20 CH100 5500MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT20 CH100 (5500MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

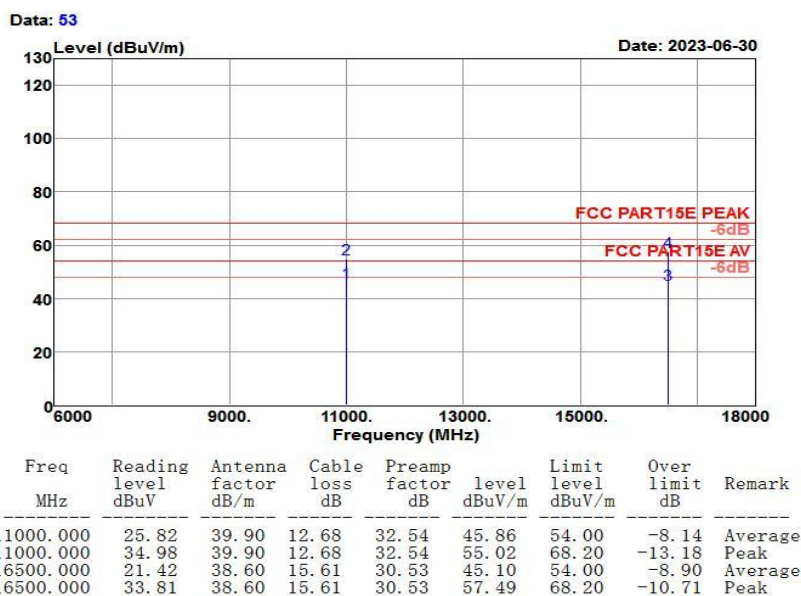

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT20 CH116 5580MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT20 CH116 (5580MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

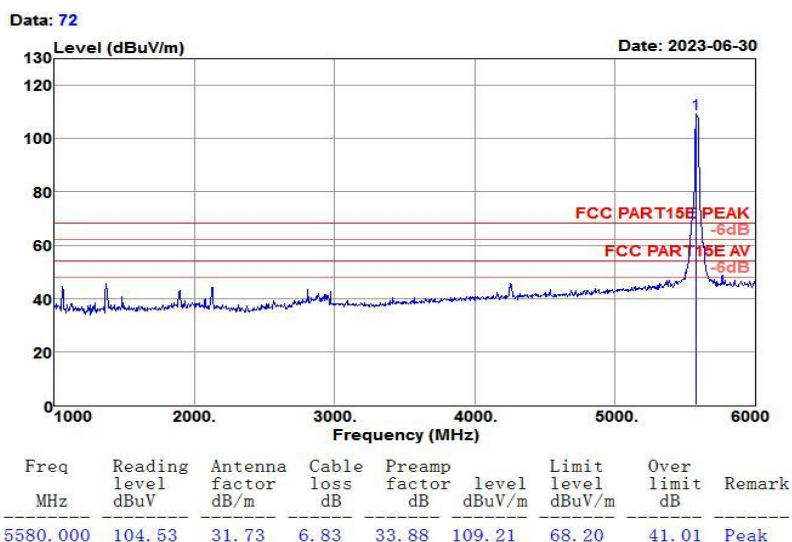

Test Mode :	802.11 n HT20 CH116 5580MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11n HT20 CH116 (5580MHz)
 Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

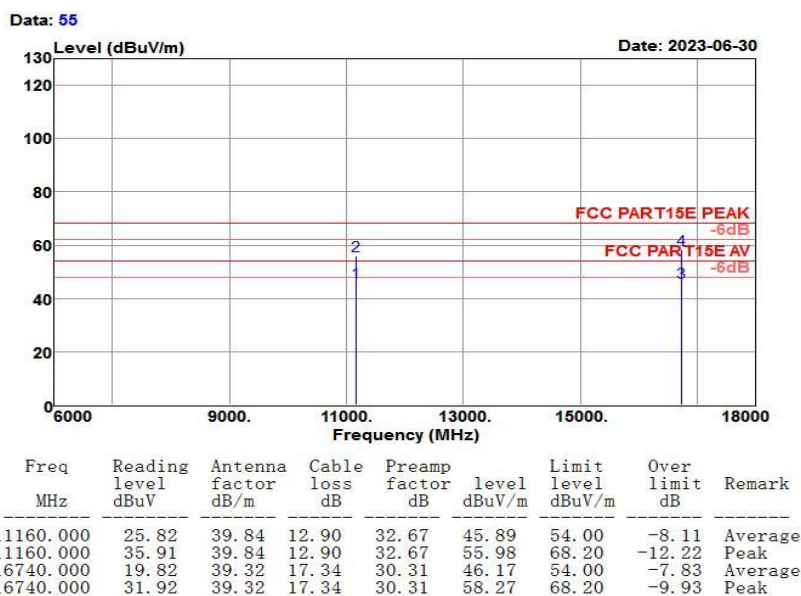

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT20 CH116 5580MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT20 CH116 (5580MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

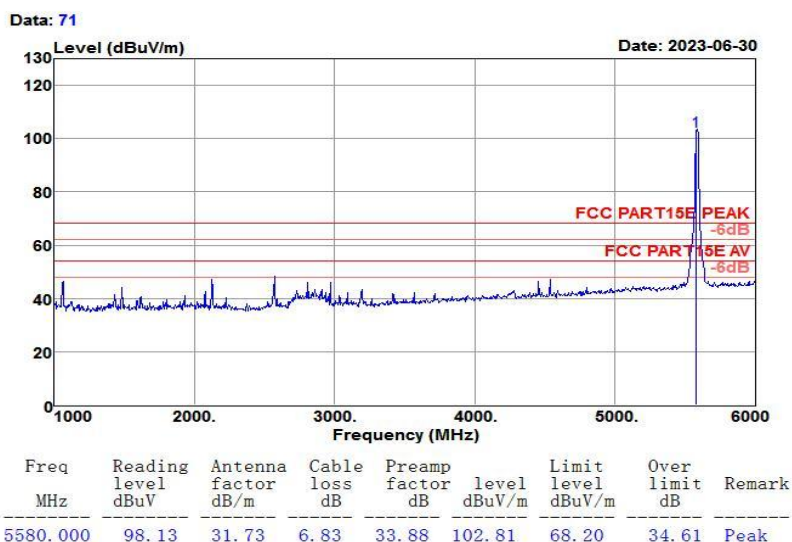

Test Mode :	802.11 n HT20 CH116 5580MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : 802.11n HT20 CH116 (5580MHz)
 Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

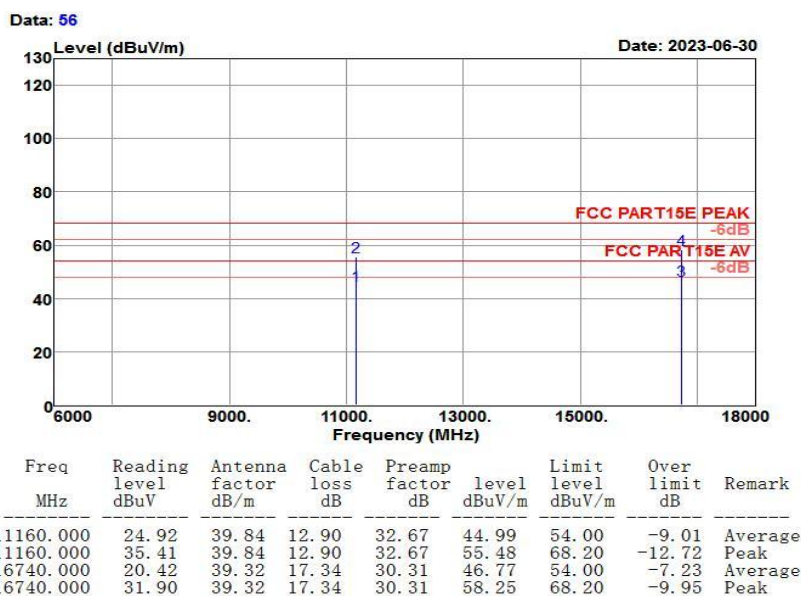

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT20 CH140 5700MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT20 CH140(5700MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

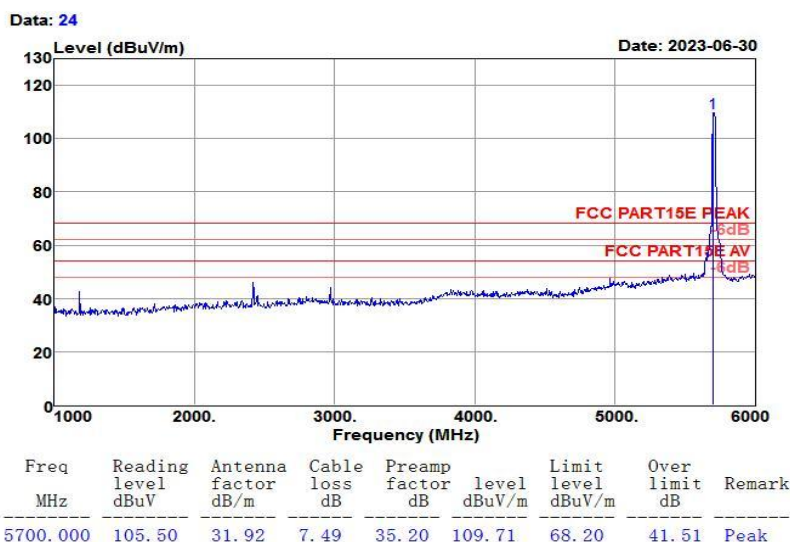

Test Mode :	802.11 n HT20 CH140 5700MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : 802.11n HT20 CH140 (5700MHz)
 Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

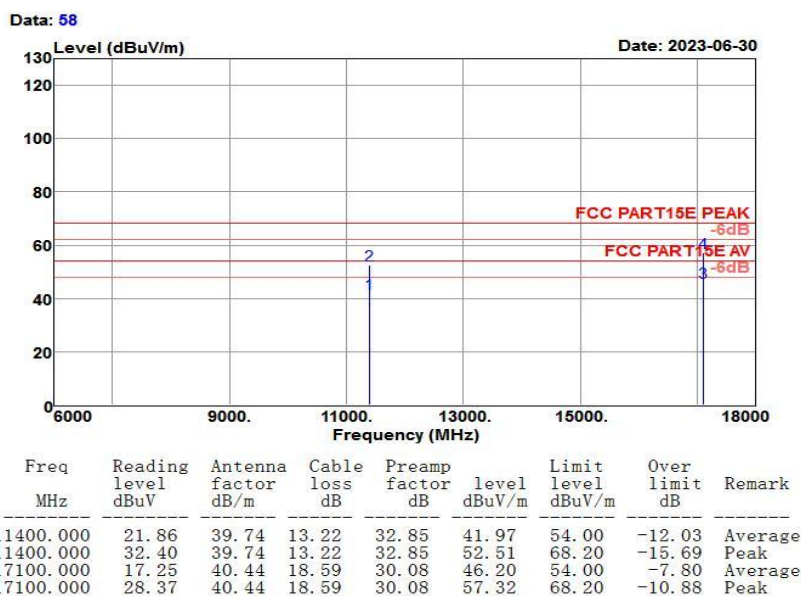

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT20 CH140 5700MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT20 CH140(5700MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

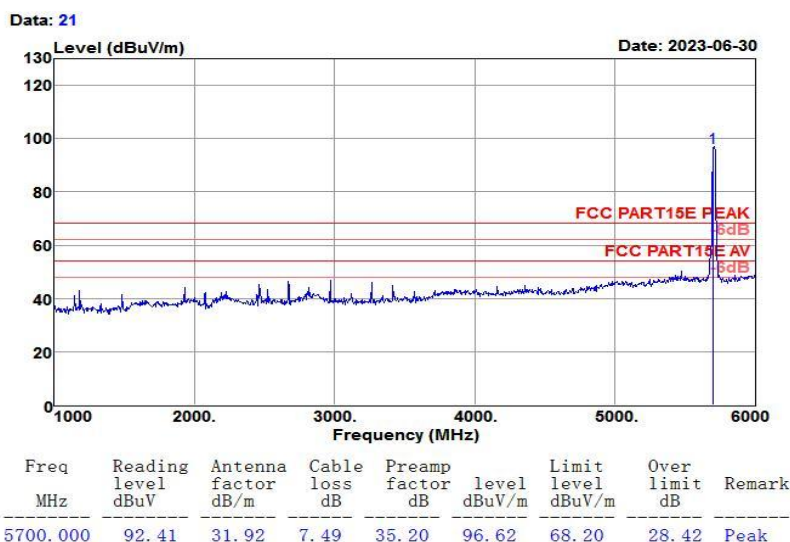

Test Mode :	802.11 n HT20 CH140 5700MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : 802.11n HT20 CH140 (5700MHz)
 Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

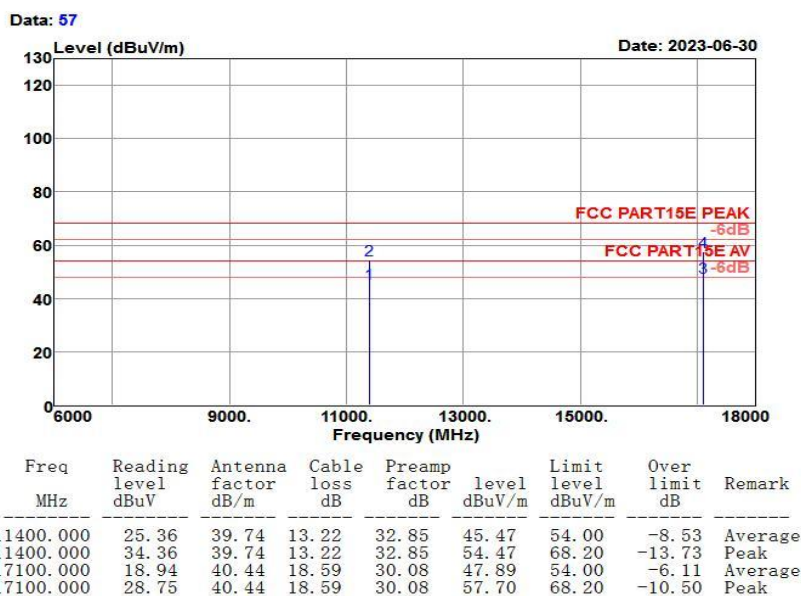

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT20 CH144 5720MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT20 CH144 (5720MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

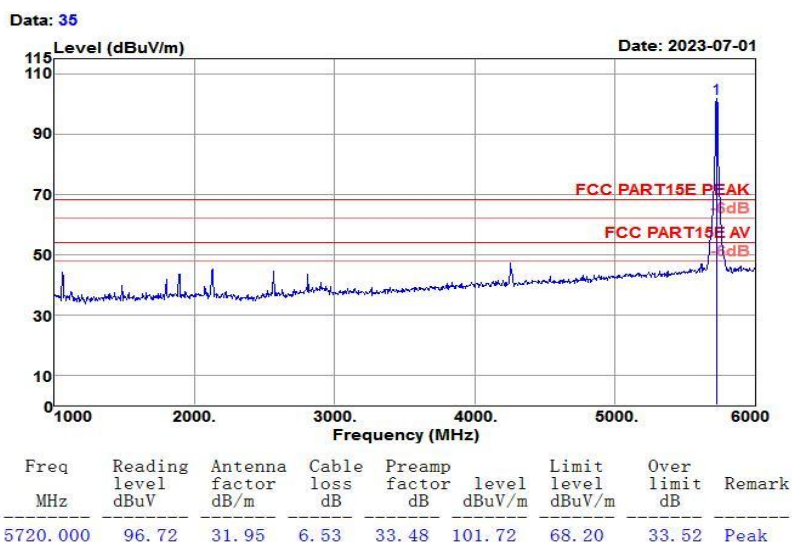

Test Mode :	802.11 n HT20 CH144 5720MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11n HT20 CH144 (5720MHz)
 Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

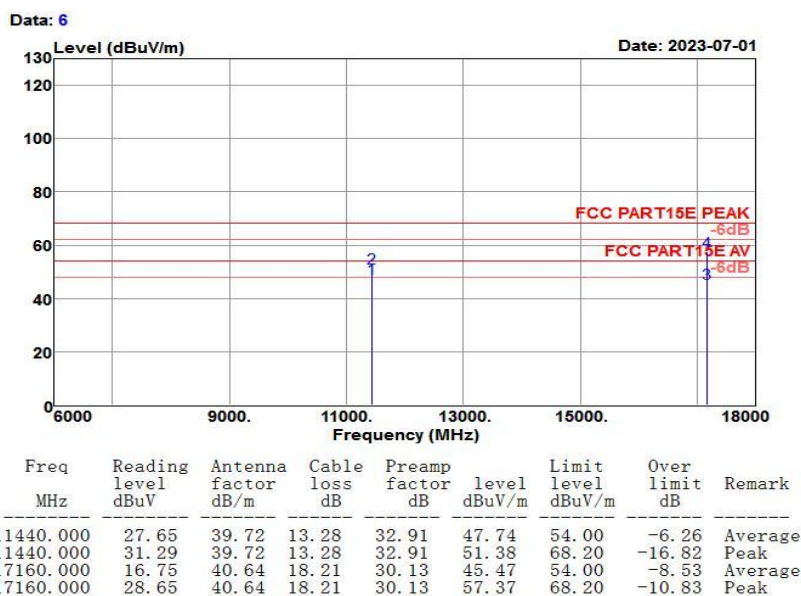

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT20 CH144 5720MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT20 CH144 (5720MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

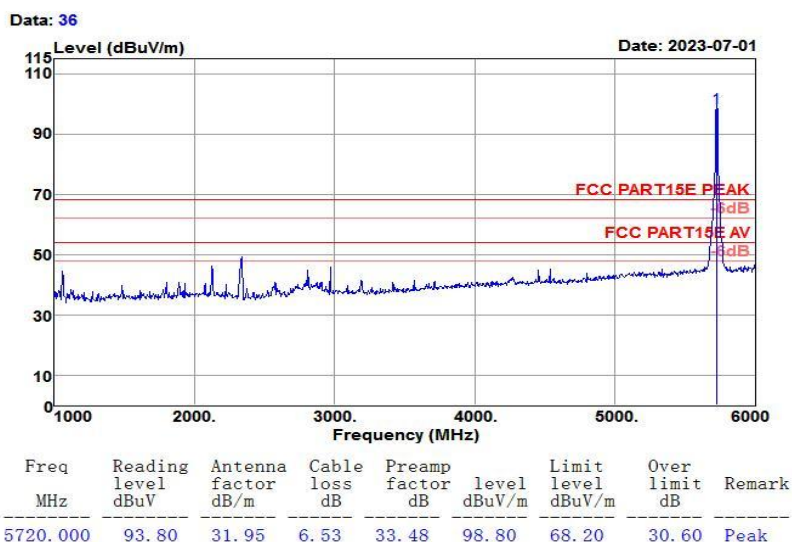

Test Mode :	802.11 n HT20 CH144 5720MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical

Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : 802.11n HT20 CH144 (5720MHz)
 Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

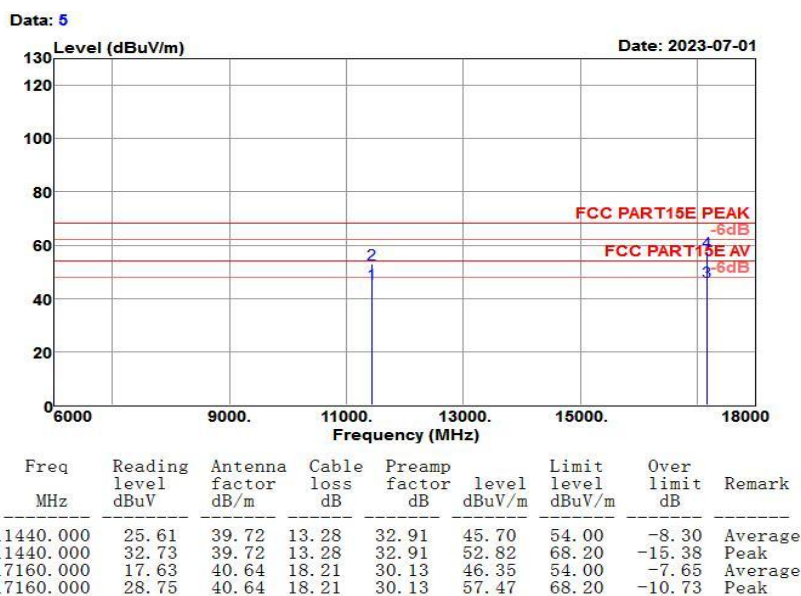


Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11 n HT20 CH149 5745MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT20 CH149 (5745MHz)	Power rating:	DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		


Data: 35

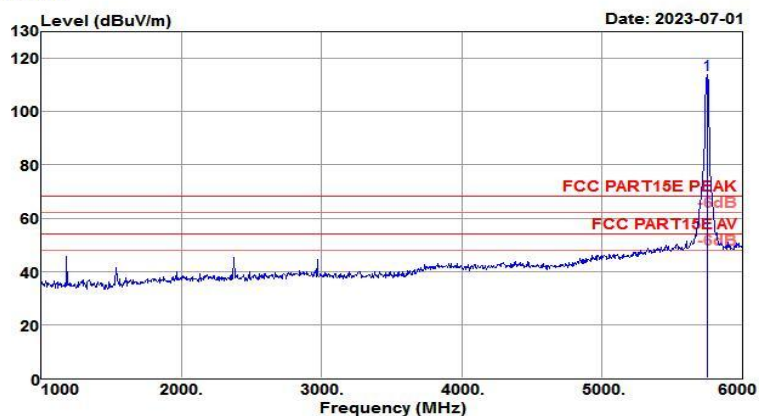

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5745.000	110.08	31.99	7.13	35.16	114.04	68.20	45.84	Peak

Test Mode :	802.11 n HT20 CH149 5745MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11n HT20 CH149 (5745MHz)
 Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

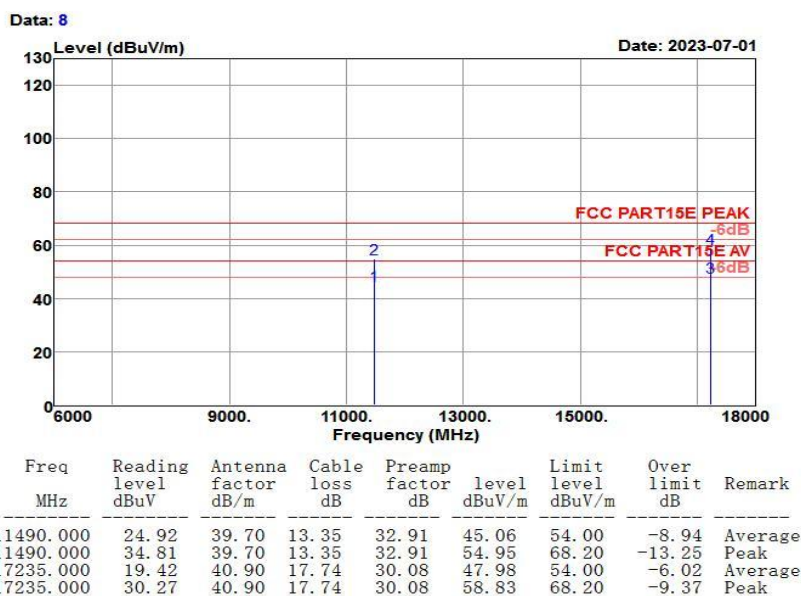

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT20 CH149 5745MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT20 CH149 (5745MHz)	Power rating:	DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

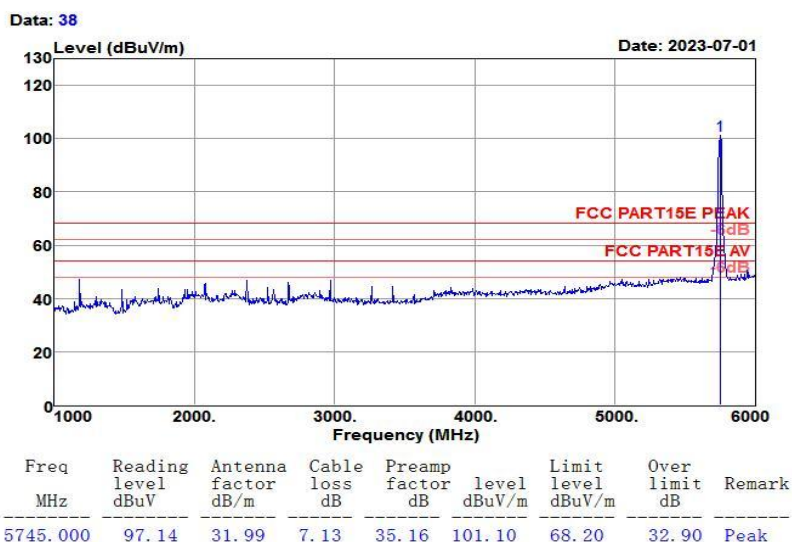

Test Mode :	802.11 n HT20 CH149 5745MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : 802.11n HT20 CH149 (5745MHz)
 Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

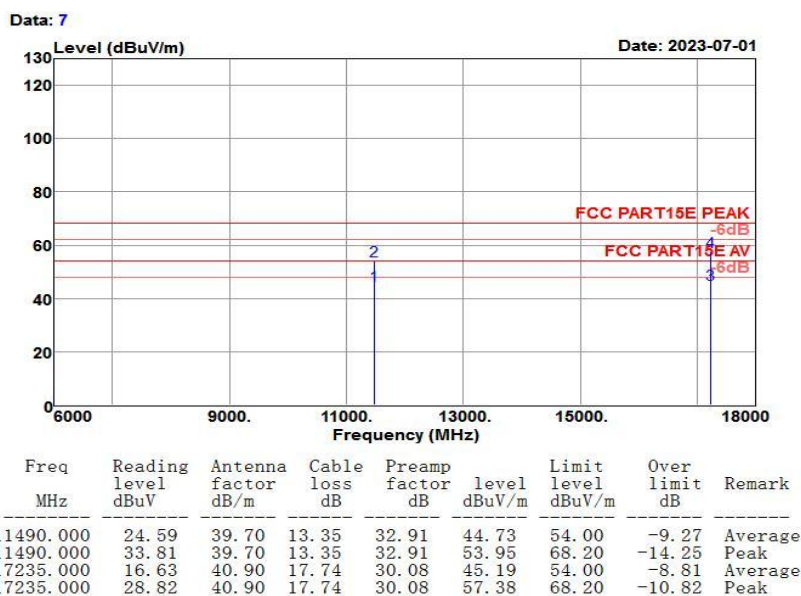

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT20 CH157 5785MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT20 CH157 (5785MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

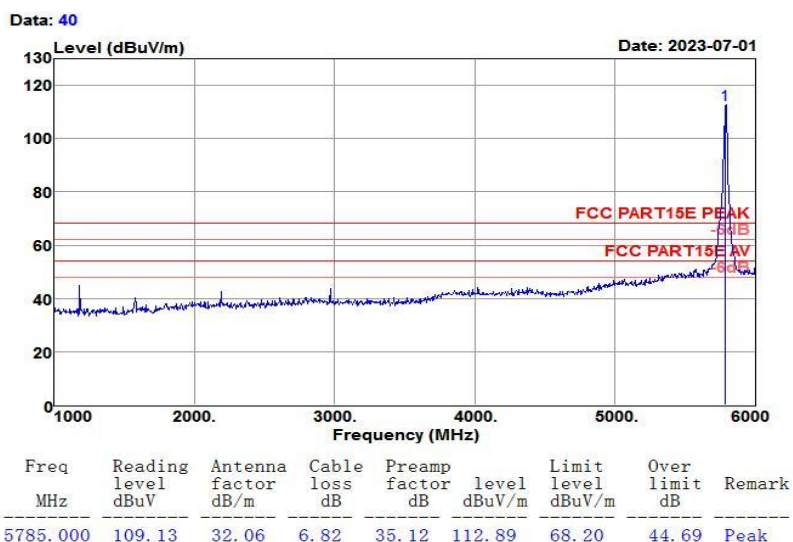

Test Mode :	802.11 n HT20 CH157 5785MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11n HT20 CH157 (5785MHz)
 Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

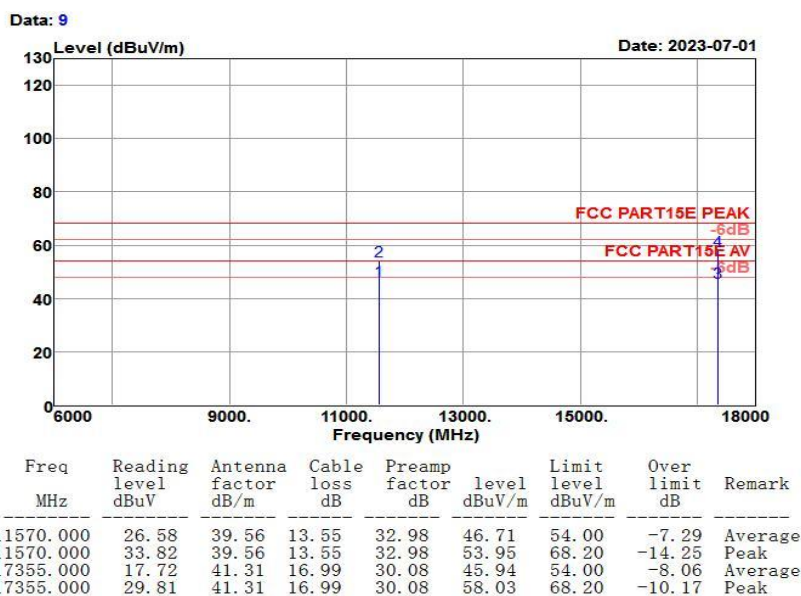

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT20 CH157 5785MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT20 CH157 (5785MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

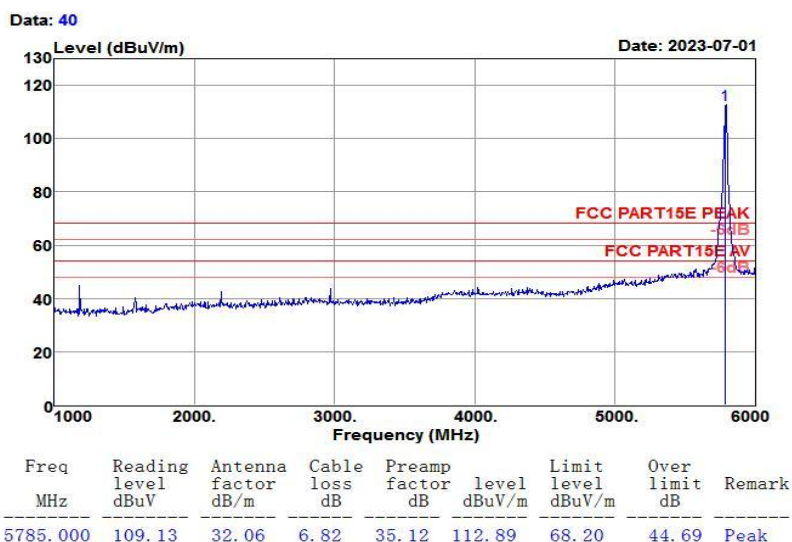

Test Mode :	802.11 n HT20 CH157 5785MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT20 CH157 (5785MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

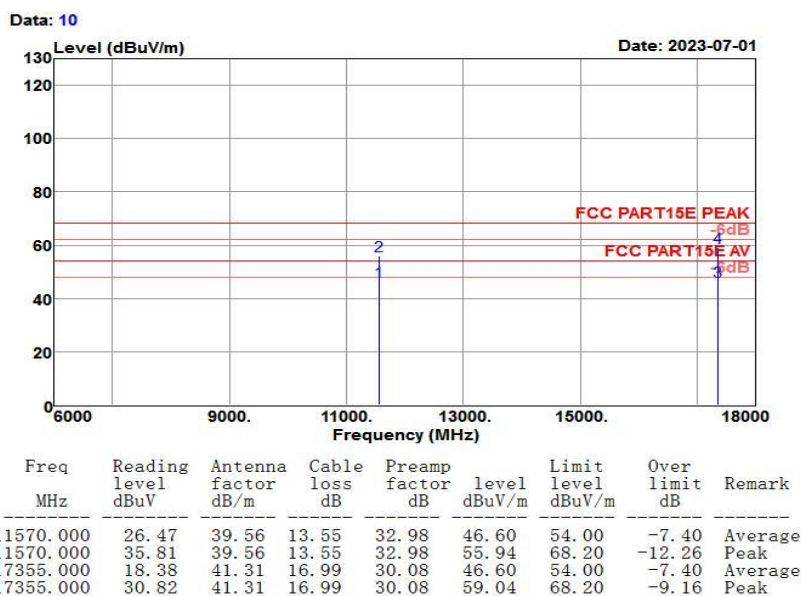

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT20 CH165 5825MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT20 CH165 (5825MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

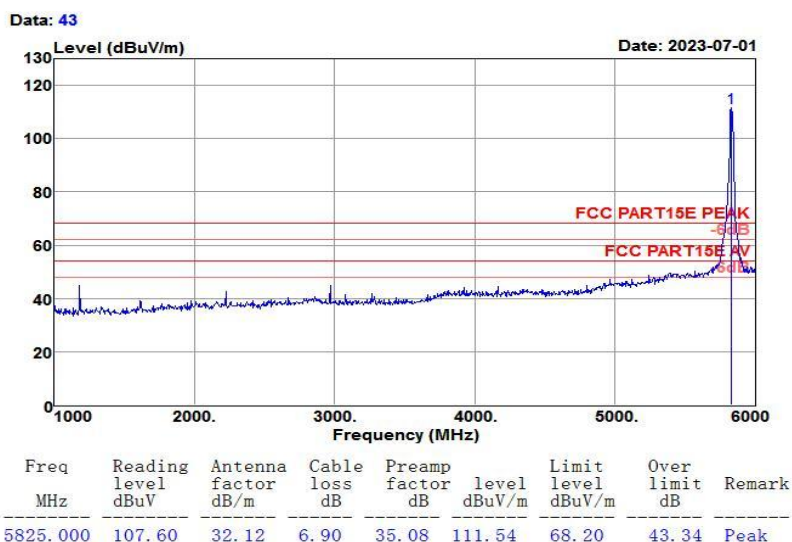

Test Mode :	802.11 n HT20 CH165 5825MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT20 CH165 (5825MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

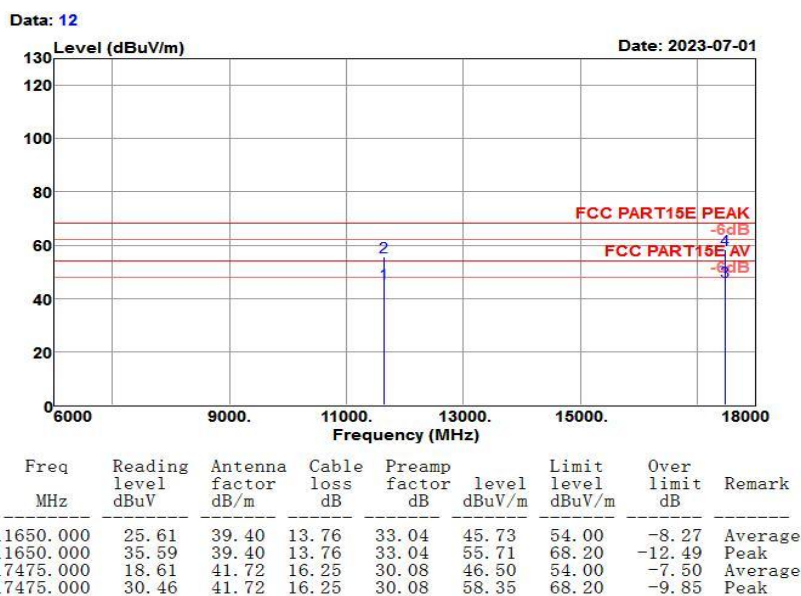

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT20 CH165 5825MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT20 CH165 (5825MHz)	Power rating:	DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

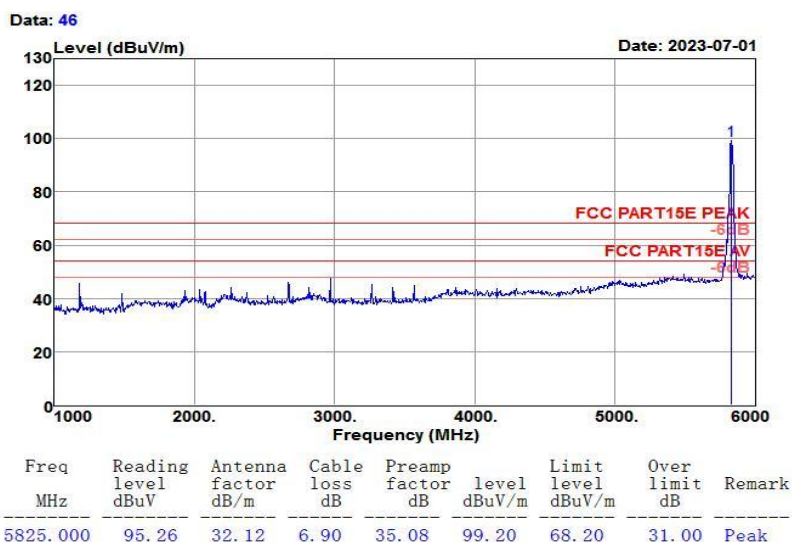

Test Mode :	802.11 n HT20 CH165 5825MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT20 CH165 (5825MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

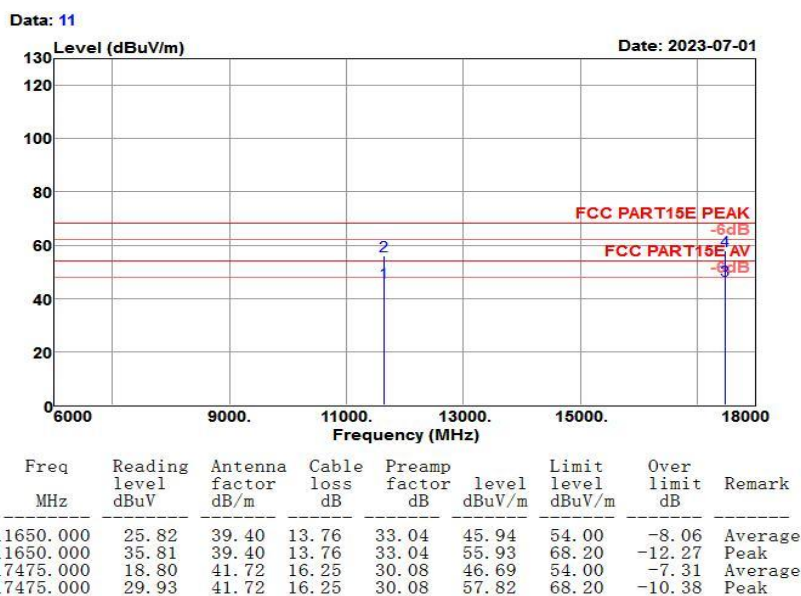

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11n HT40 CH38 5190MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40 CH38 (5190MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

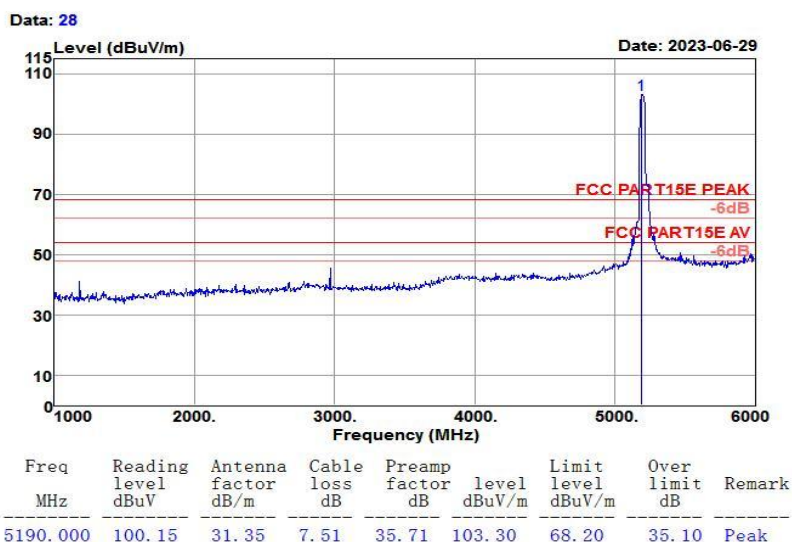

Test Mode :	802.11n HT40 CH38 5190MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal

Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11n HT40 CH38 (5190MHz)
 Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

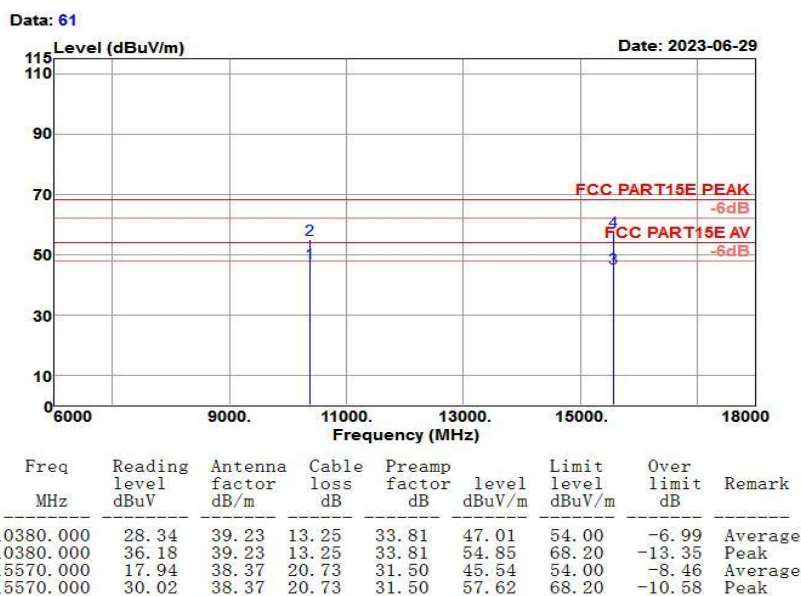


Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11n HT40 CH38 5190MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH38 (5190MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

Data: 25

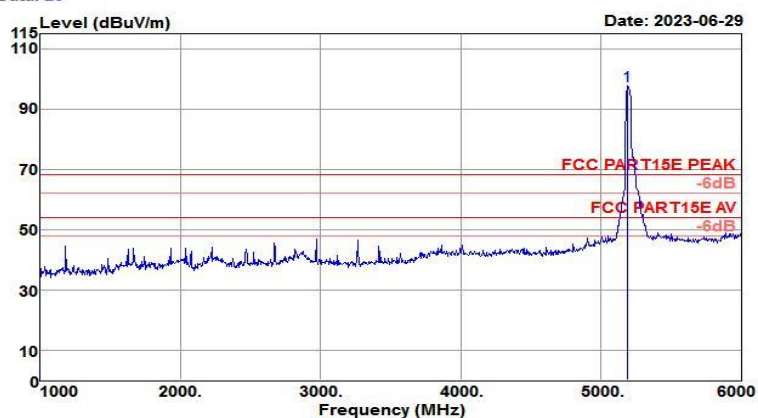


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5190.000	94.65	31.35	7.51	35.71	97.80	68.20	29.60	Peak

Test Mode :	802.11n HT40 CH38 5190MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical

Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : 802.11n HT40 CH38 (5190MHz)
 Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

Data: 62

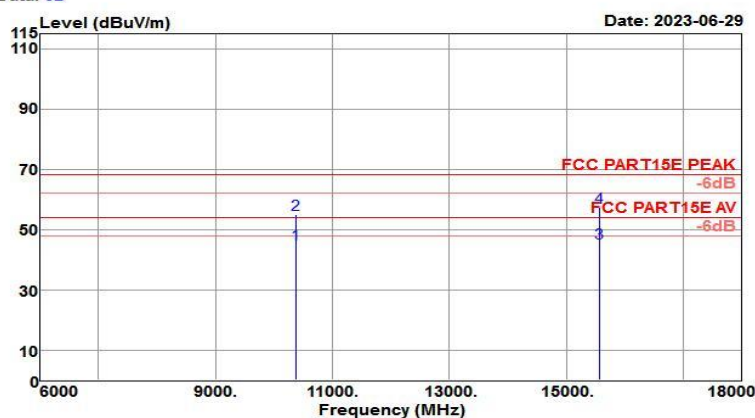


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
10380.000	26.52	39.23	13.25	33.81	45.19	54.00	-8.81	Average
10380.000	36.16	39.23	13.25	33.81	54.83	68.20	-13.37	Peak
15570.000	18.02	38.37	20.73	31.50	45.62	54.00	-8.38	Average
15570.000	29.72	38.37	20.73	31.50	57.32	68.20	-10.88	Peak

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT40 CH46 5230MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 24℃/62%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40 CH46 (5230MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

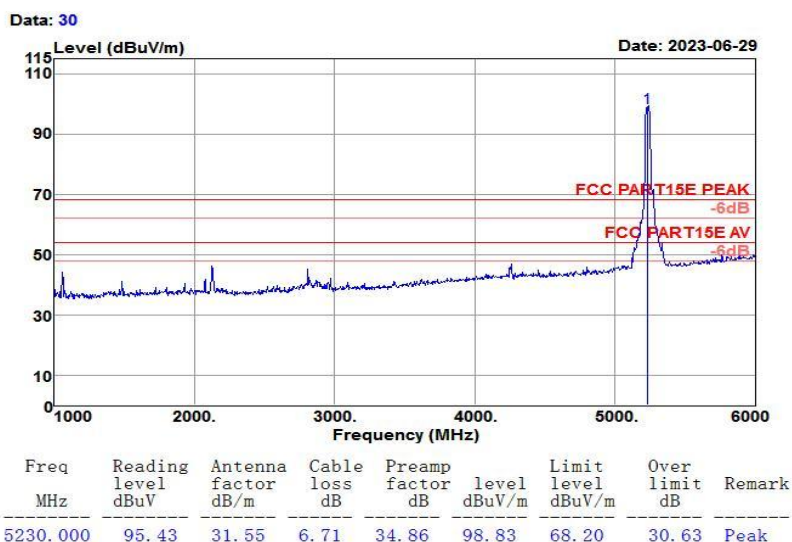

Test Mode :	802.11 n HT40 CH46 5230MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40 CH46 (5230MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

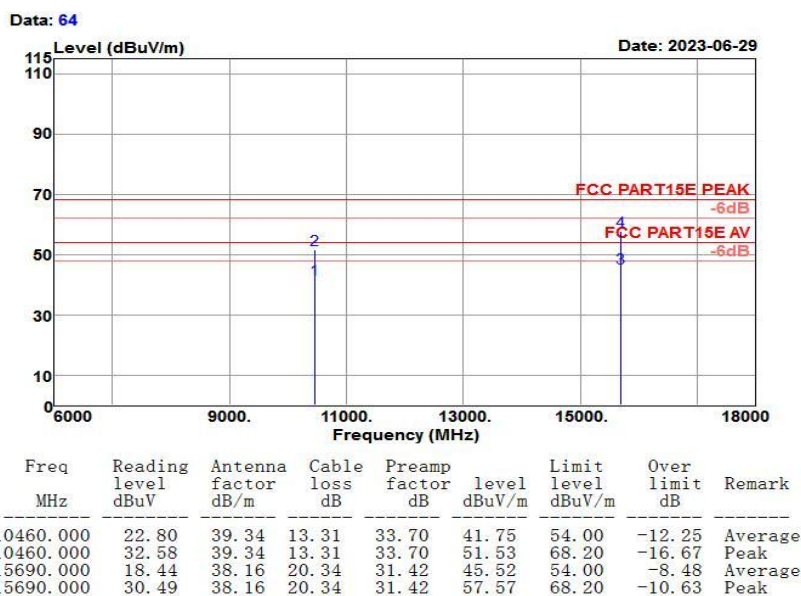

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT40 CH46 5230MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 24℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH46 (5230MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

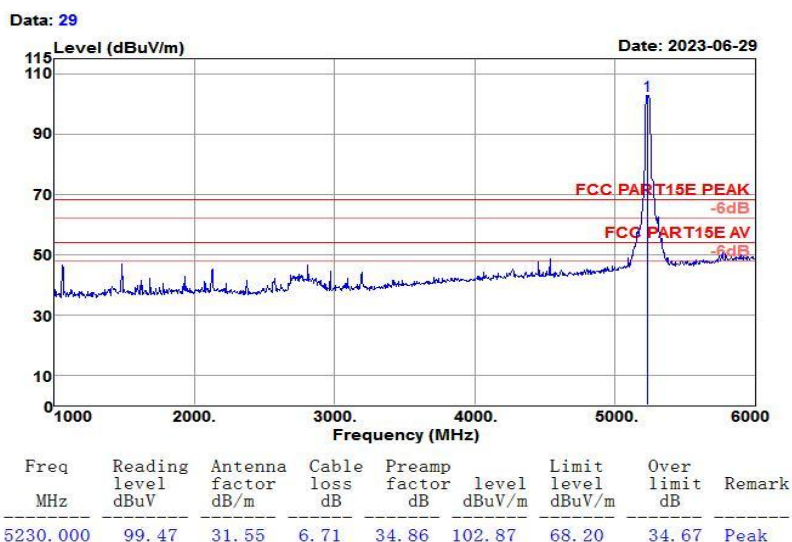

Test Mode :	802.11 n HT40 CH46 5230MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH46 (5230MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

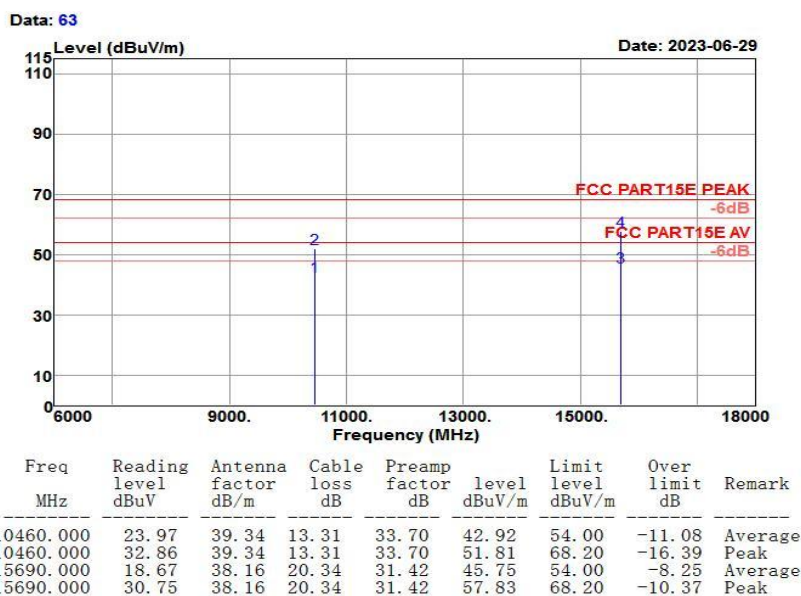

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT40 CH62 5310MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40 CH62 (5310MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

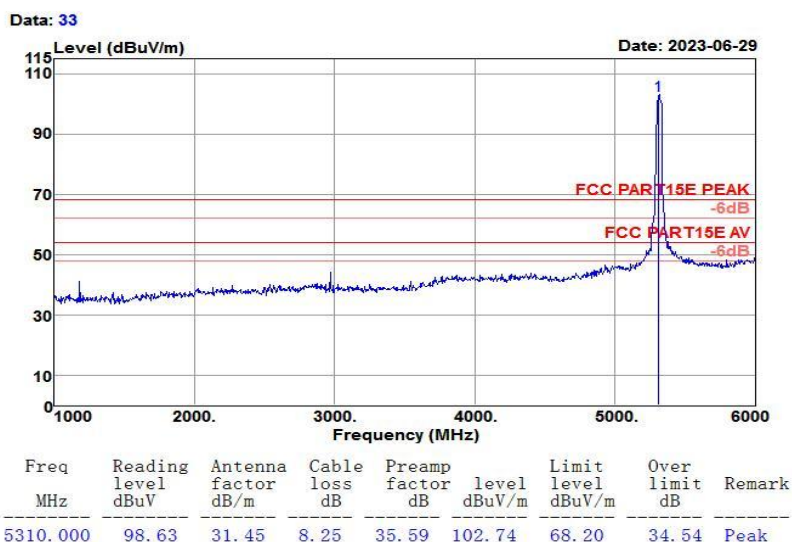

Test Mode :	802.11 n HT40 CH62 5310MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11n HT40 CH62 (5310MHz)
 Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

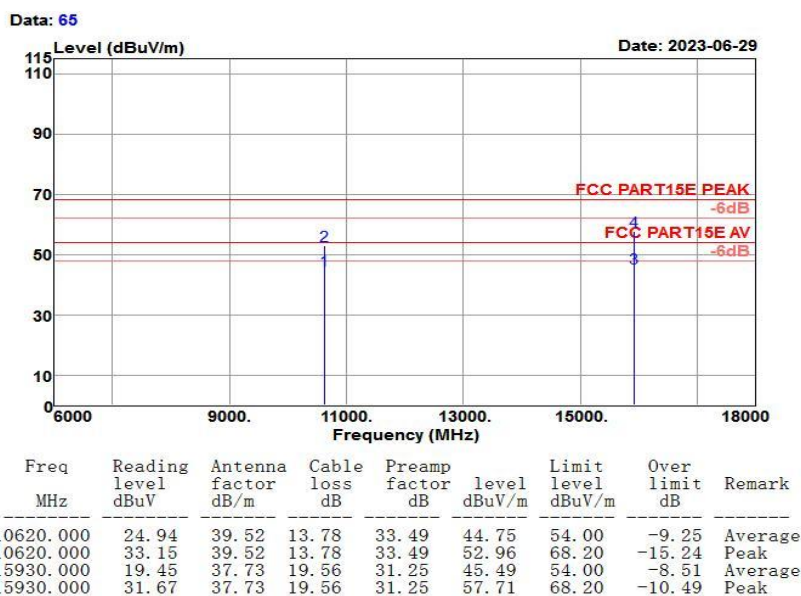

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT40 CH62 5310MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH62 (5310MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

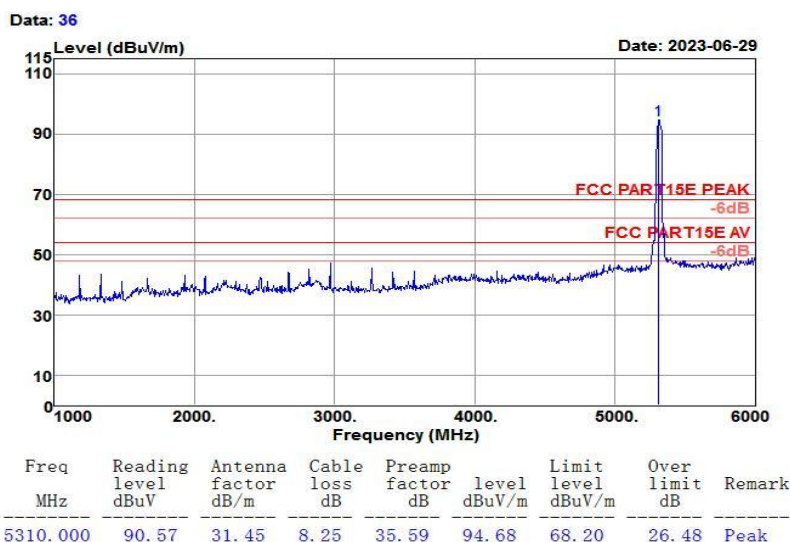

Test Mode :	802.11 n HT40 CH62 5310MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site : 3m Chamber	Temp/Humi : 23℃/61%
Tested by : Jack	Pol/Phase : VERTICAL
Test Mode : 802.11n HT40 CH62 (5310MHz)	Power rating: DC 15W
EUT : Digital Video Monitor	Comment :
Model No. : DVM-D1	

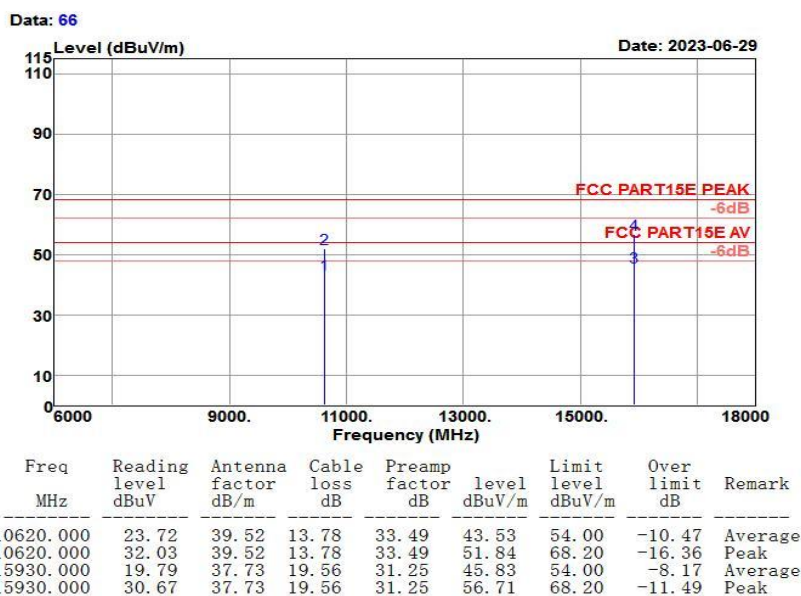

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT40 CH102 5510MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40 CH102(5510MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

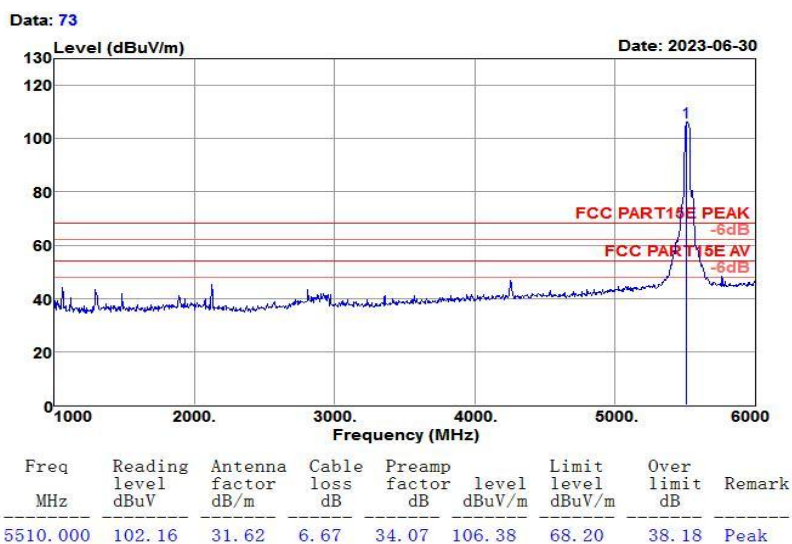

Test Mode :	802.11 n HT40 CH102 5510MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40 CH102(5510MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

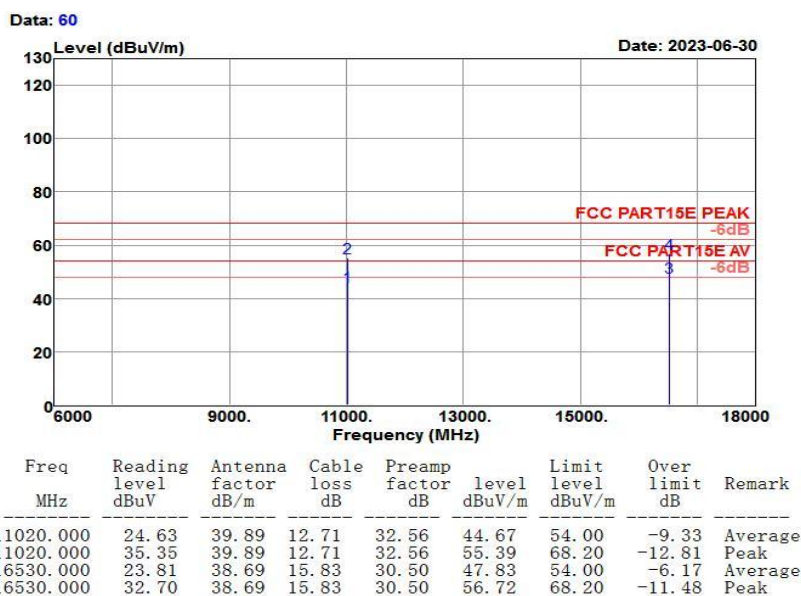

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT40 CH102 5510MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH102(5510MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

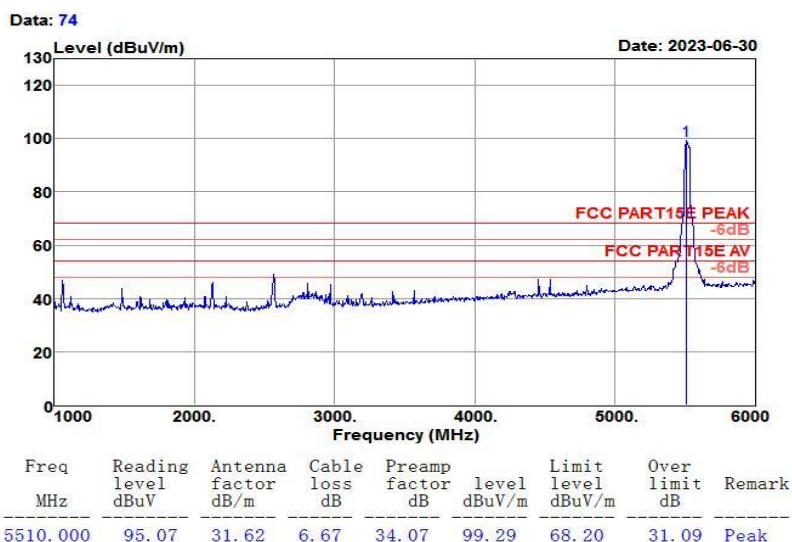

Test Mode :	802.11 n HT40 CH102 5510MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH102(5510MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

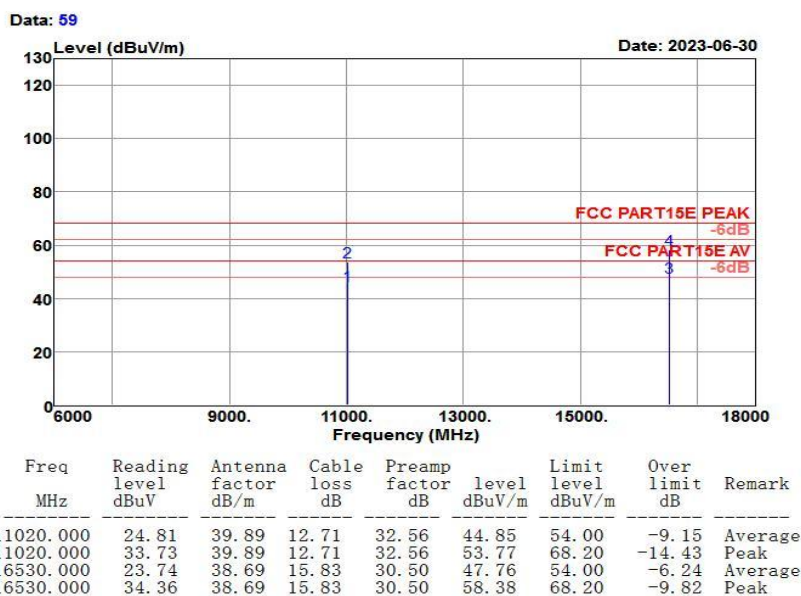

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT40 CH110 5550MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40 CH110(5550MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

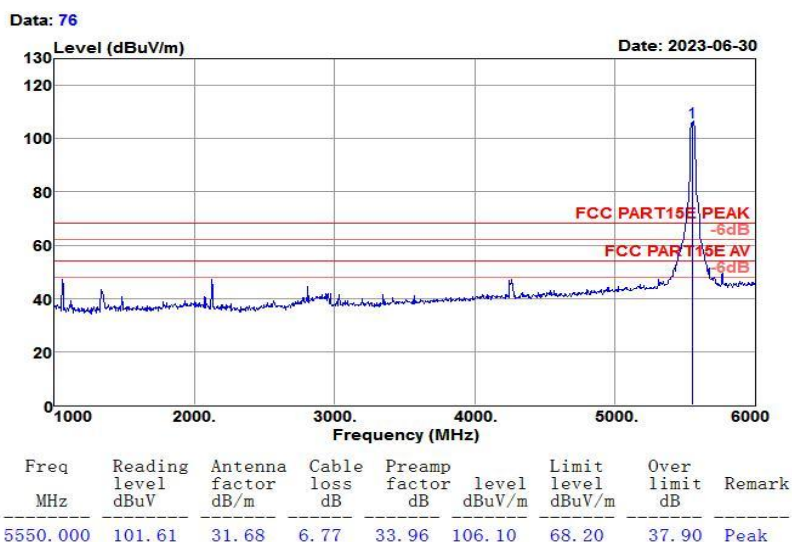

Test Mode :	802.11 n HT40 CH110 5550MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40 CH110(5550MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

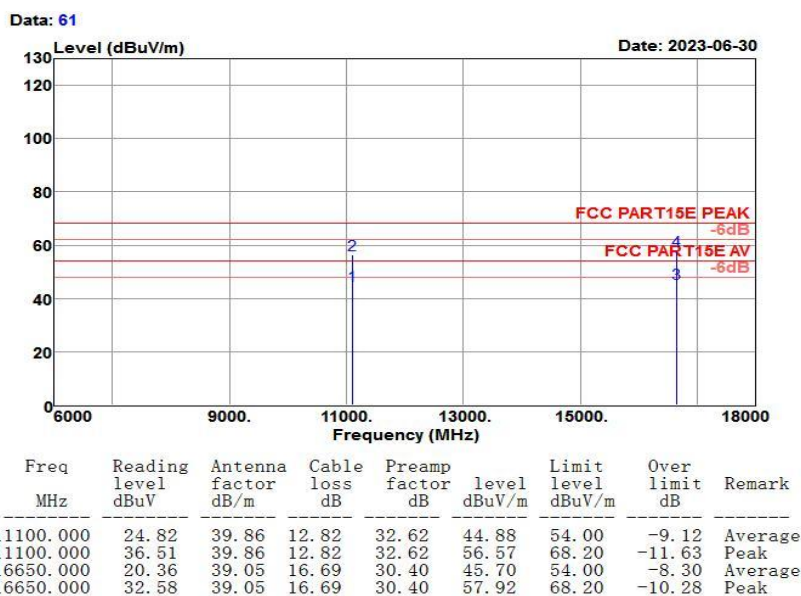

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT40 CH110 5550MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH110(5550MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

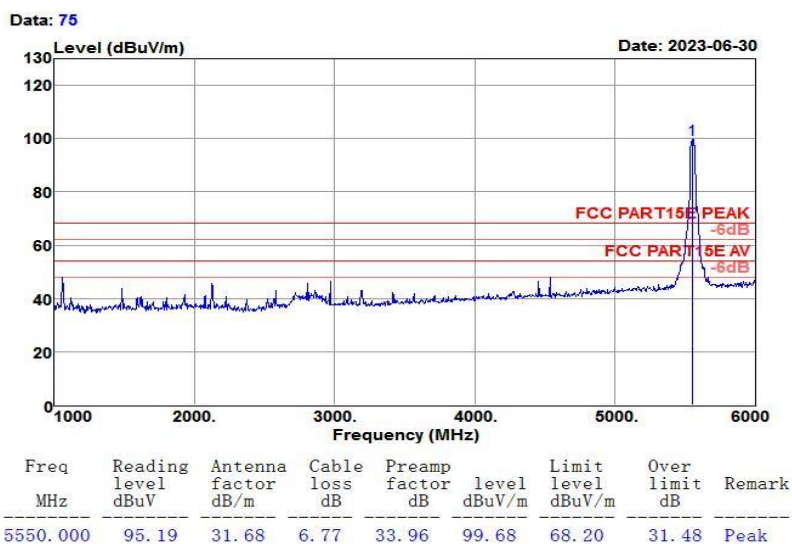

Test Mode :	802.11 n HT40 CH110 5550MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH110(5550MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

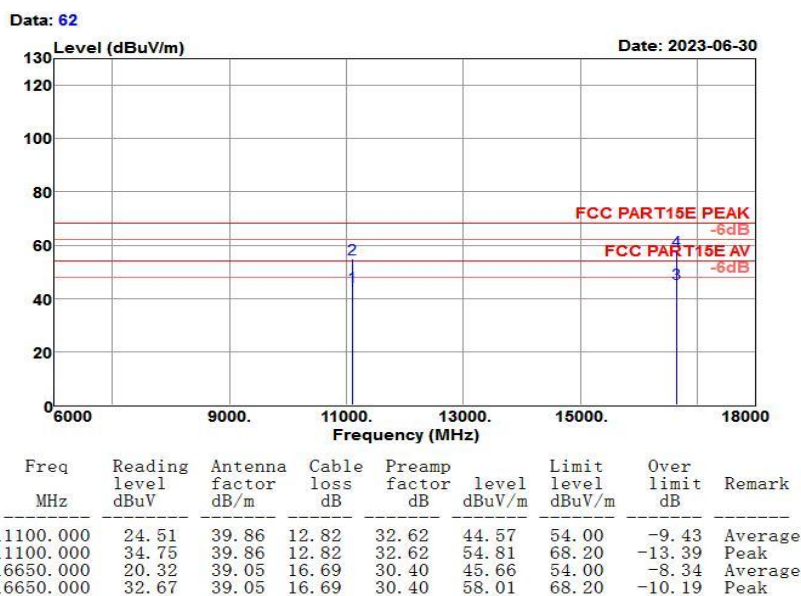

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT40 CH134 5670MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40 CH134(5670MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

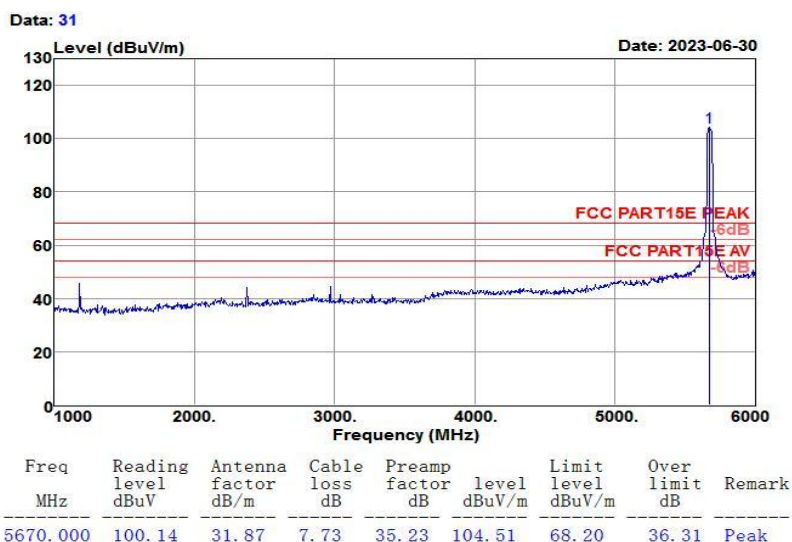

Test Mode :	802.11 n HT40 CH134 5670MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40 CH134(5670MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

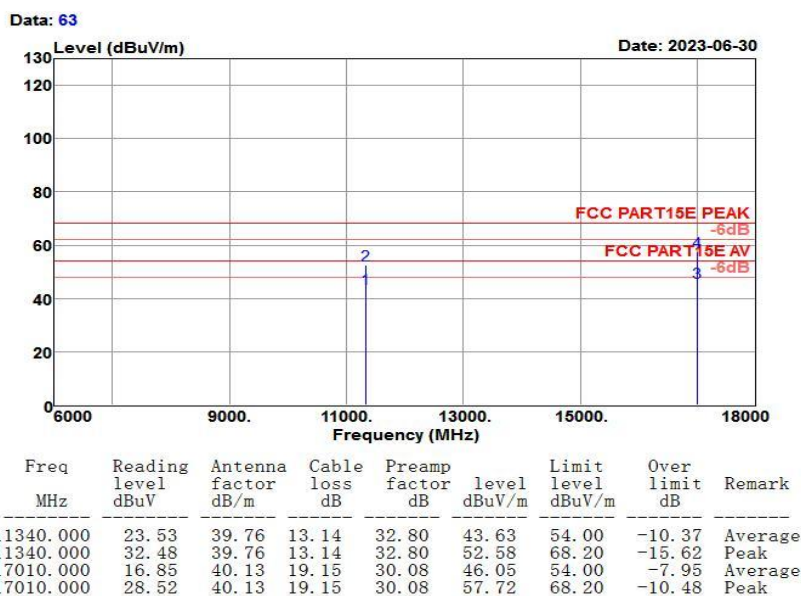

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT40 CH134 5670MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH134(5670MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

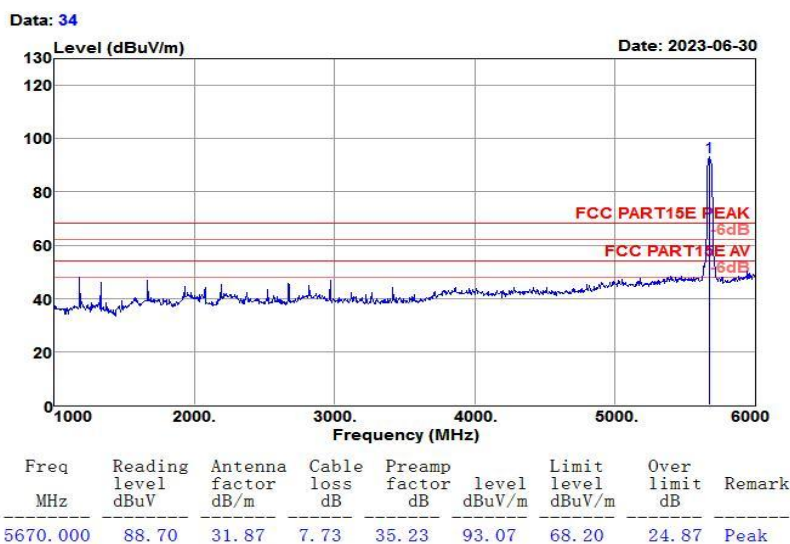

Test Mode :	802.11 n HT40 CH134 5670MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH134(5670MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

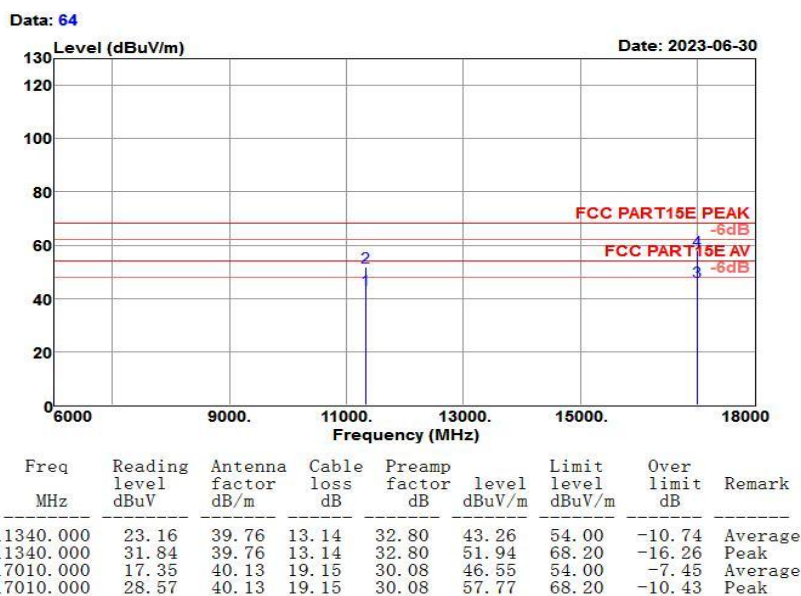

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT40 CH142 5710MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40 CH142 (5710MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

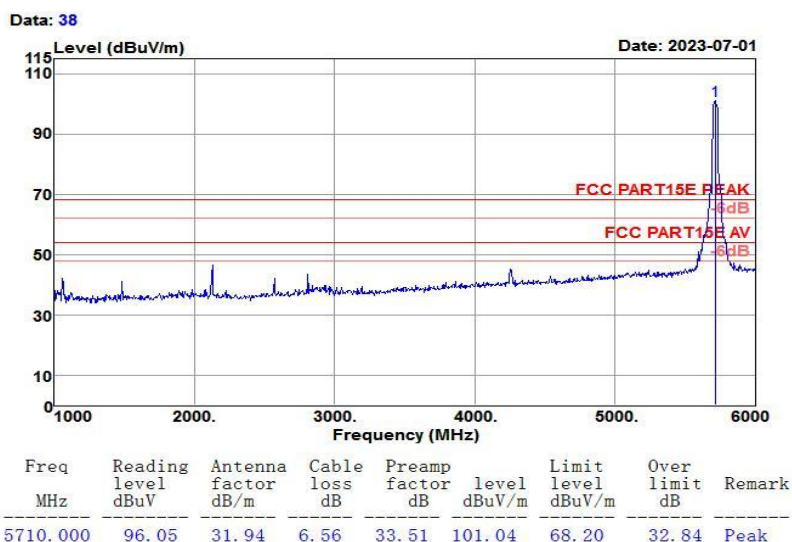

Test Mode :	802.11 n HT40 CH142 5710MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40 CH142(5710MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

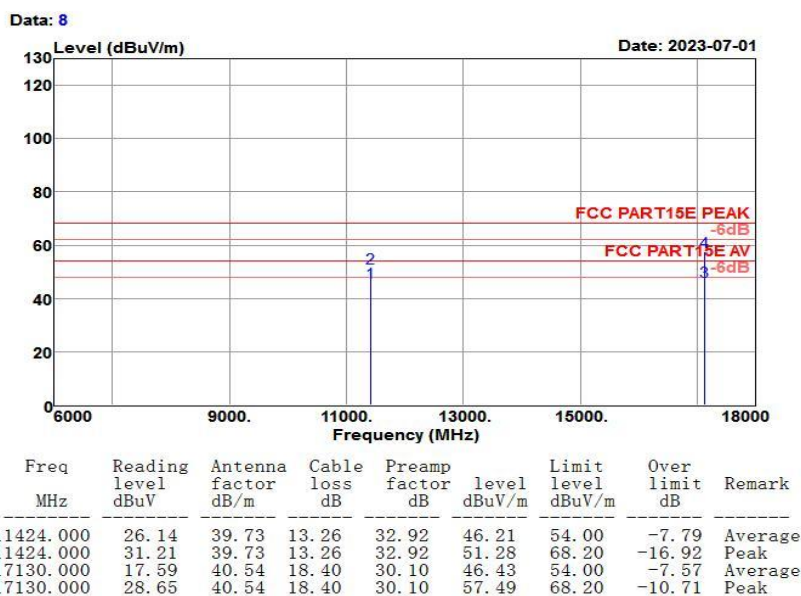

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT40 CH142 5710MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH142 (5710MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

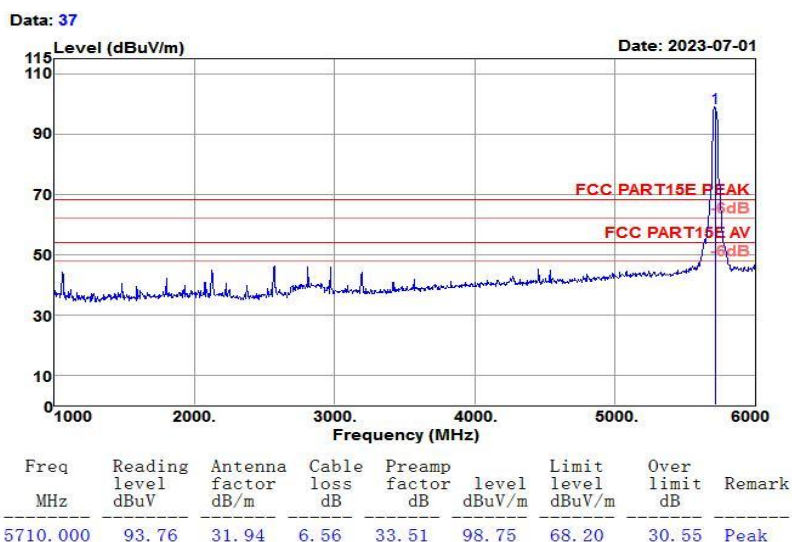

Test Mode :	802.11 n HT40 CH142 5710MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH142(5710MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

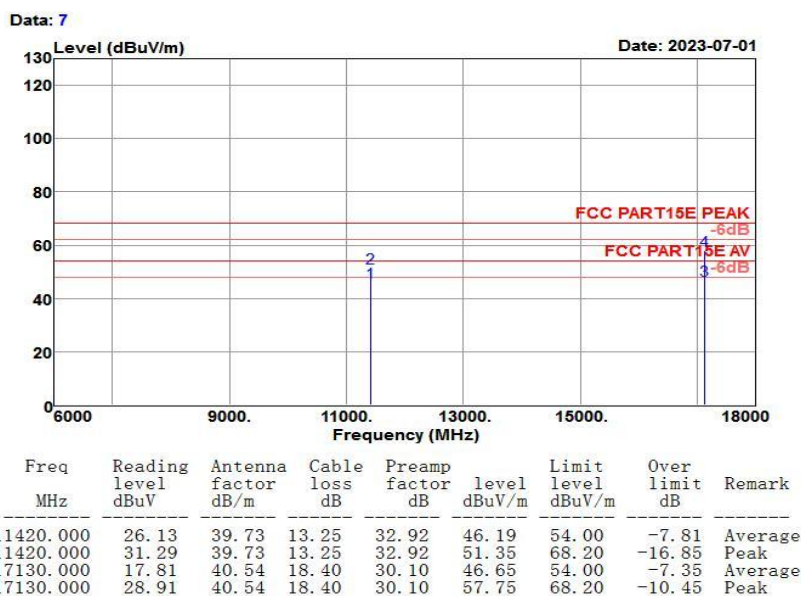

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT40 CH151 5755MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40 CH151 (5755MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

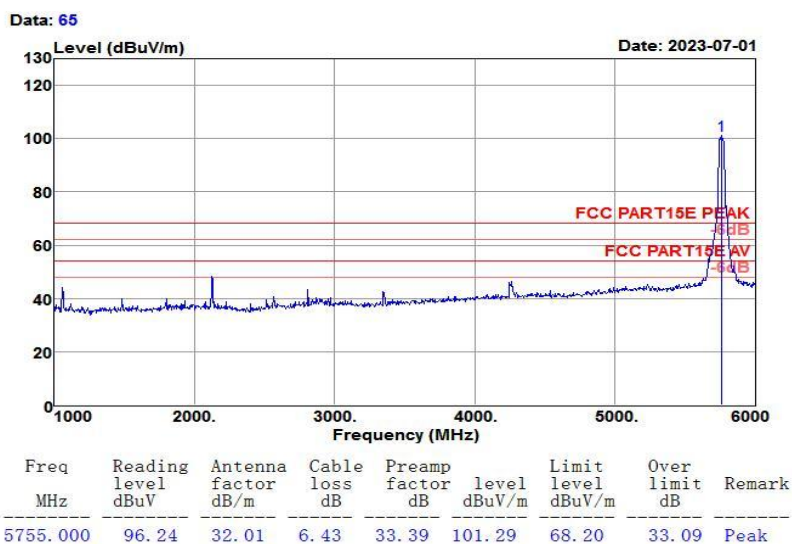

Test Mode :	802.11 n HT40 CH151 5755MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11n HT40 CH151 (5755MHz)
 Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

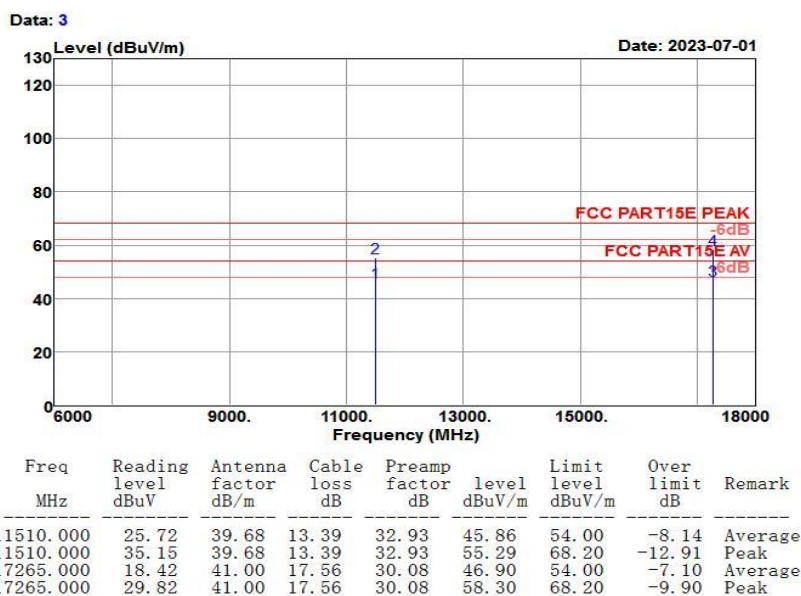

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT40 CH151 5755MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH151 (5755MHz)	Power rating:	DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

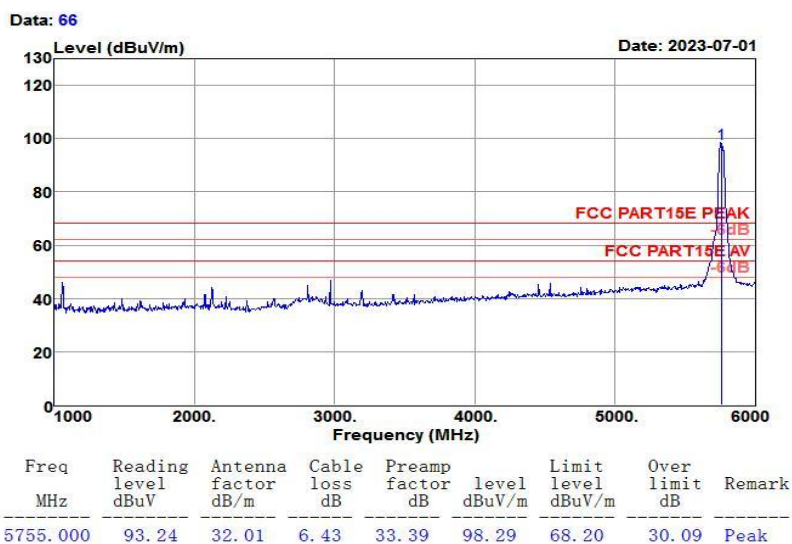

Test Mode :	802.11 n HT40 CH151 5755MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH151 (5755MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

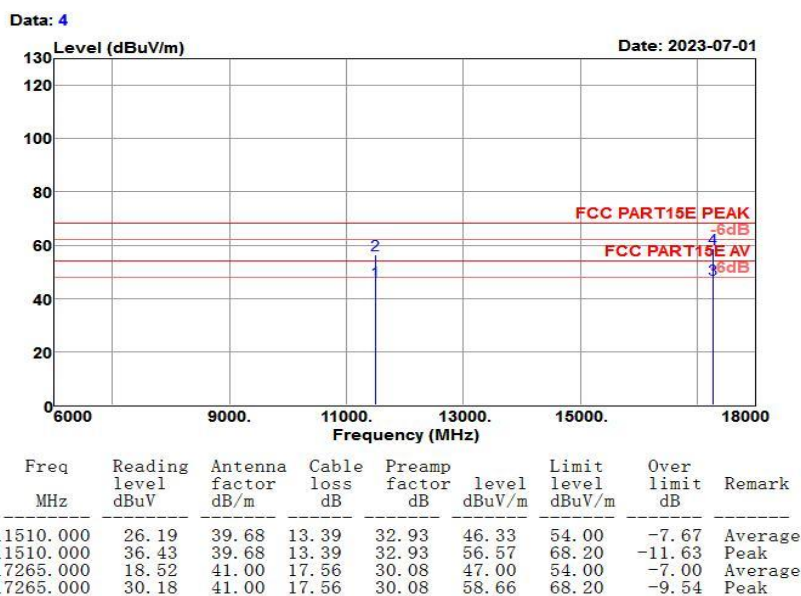

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT40 CH159 5795MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40 CH159 (5795MHz)	Power rating:	DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

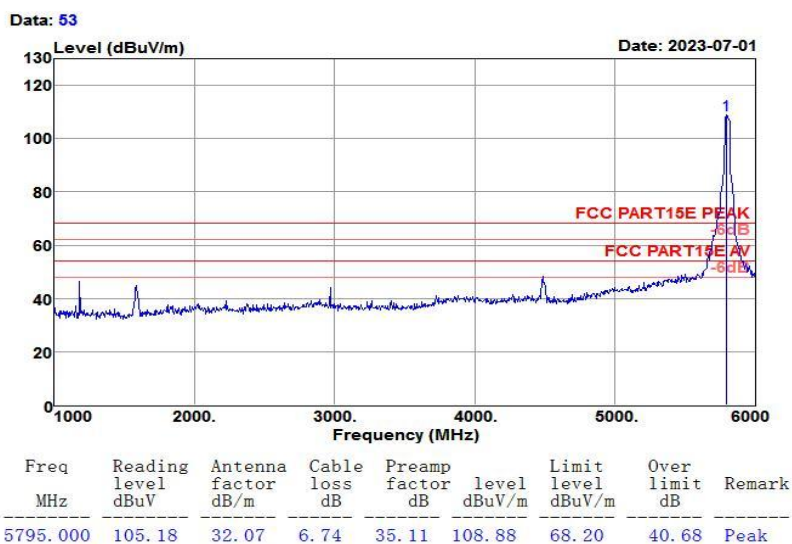

Test Mode :	802.11 n HT40 CH159 5795MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40 CH159 (5795MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

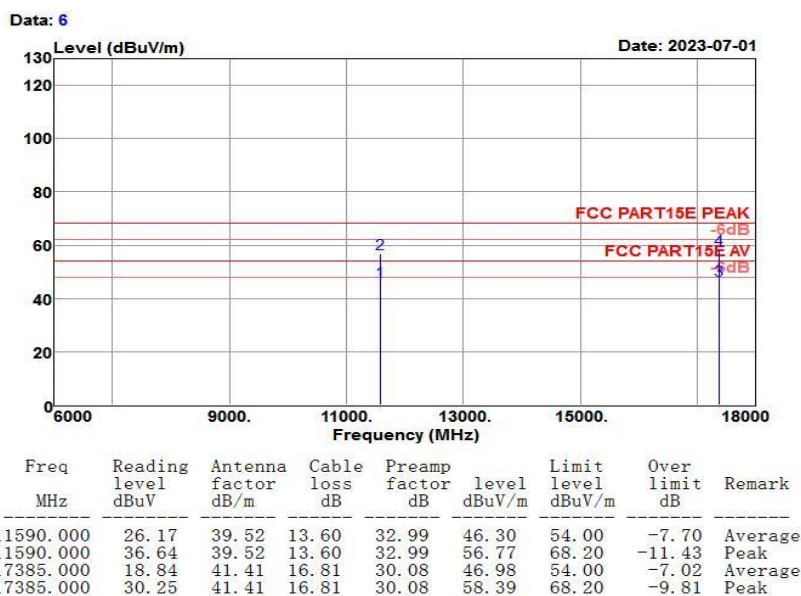

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 n HT40 CH159 5795MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH159 (5795MHz)	Power rating:	DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

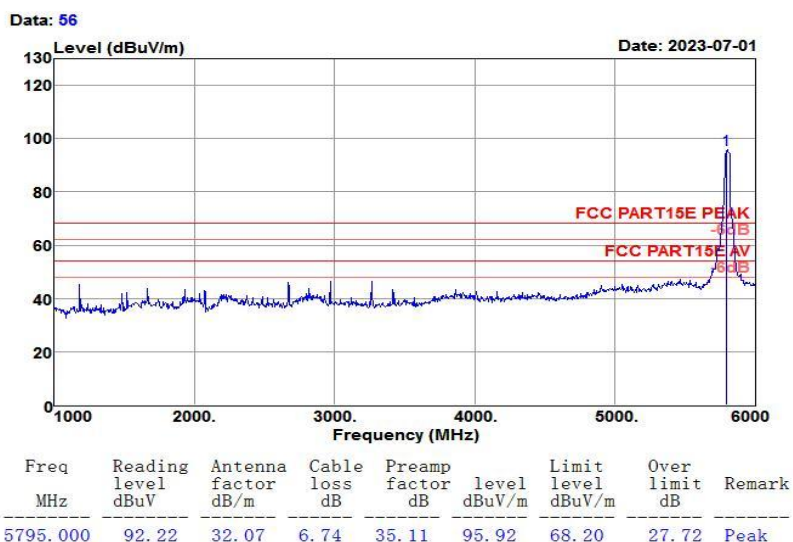

Test Mode :	802.11 n HT40 CH159 5795MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical

Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : 802.11n HT40 CH159 (5795MHz)
 Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

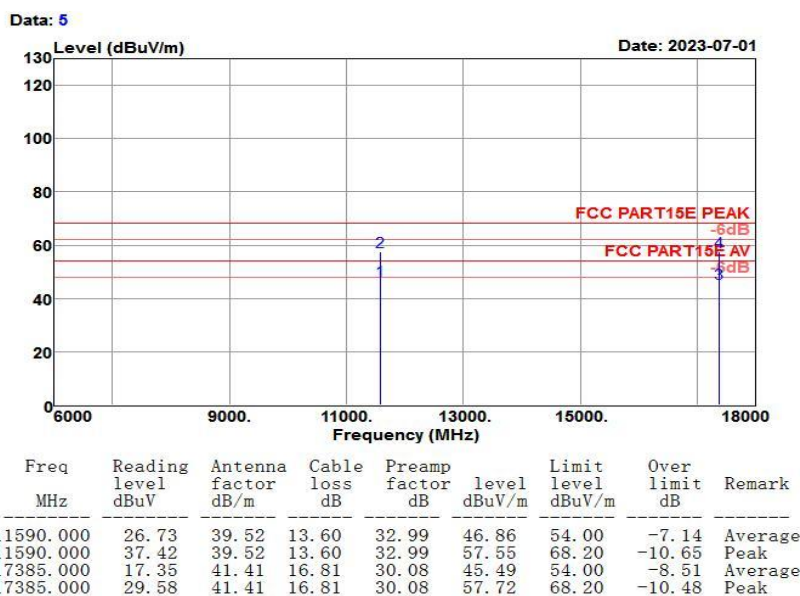


Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11 ac VHT80 CH42 5210MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11ac VHT80 CH42(5210MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

Data: 42

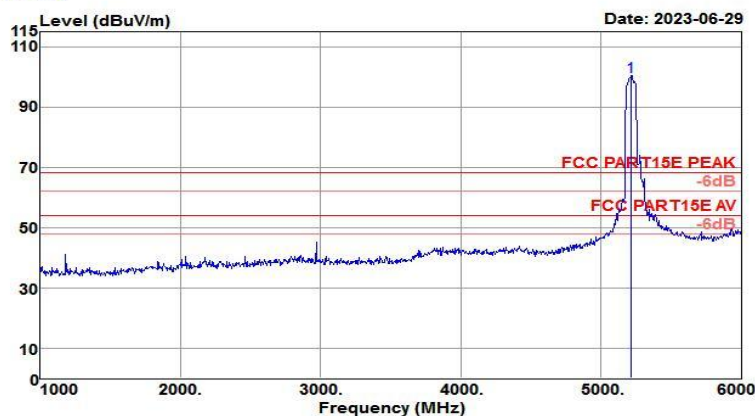


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5210.000	97.01	31.37	7.56	35.69	100.25	68.20	32.05	Peak

Test Mode :	802.11 ac VHT80 CH42 5210MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal

Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11ac VHT80 CH42(5210MHz)
 Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

Data: 68

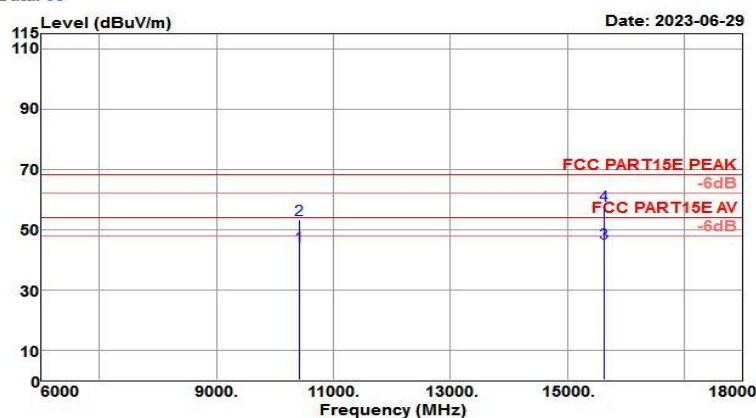


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
10420.000	25.69	39.29	13.28	33.75	44.51	54.00	-9.49	Average
10420.000	34.39	39.29	13.28	33.75	53.21	68.20	-14.99	Peak
15630.000	18.00	38.27	20.54	31.46	45.35	54.00	-8.65	Average
15630.000	30.57	38.27	20.54	31.46	57.92	68.20	-10.28	Peak

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11 ac VHT80 CH42 5210MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11ac VHT80 CH42(5210MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

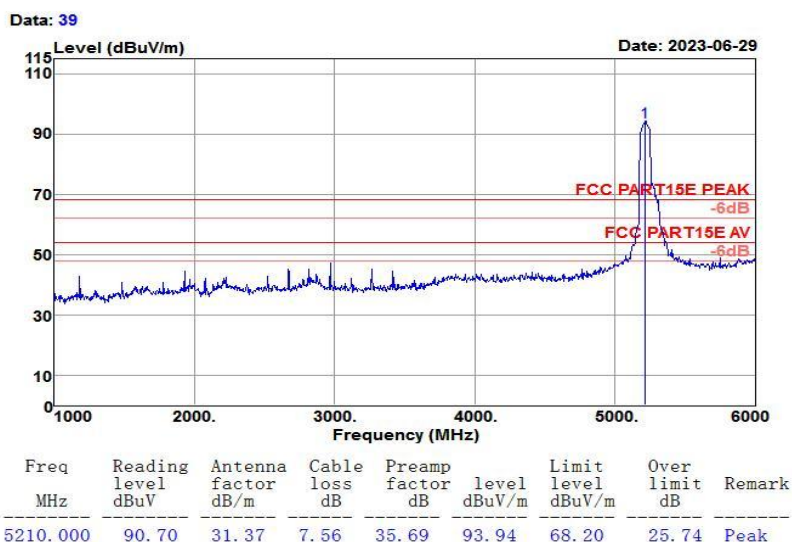

Test Mode :	802.11 ac VHT80 CH42 5210MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical

Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : 802.11ac VHT80 CH42(5210MHz)
 Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

Data: 67

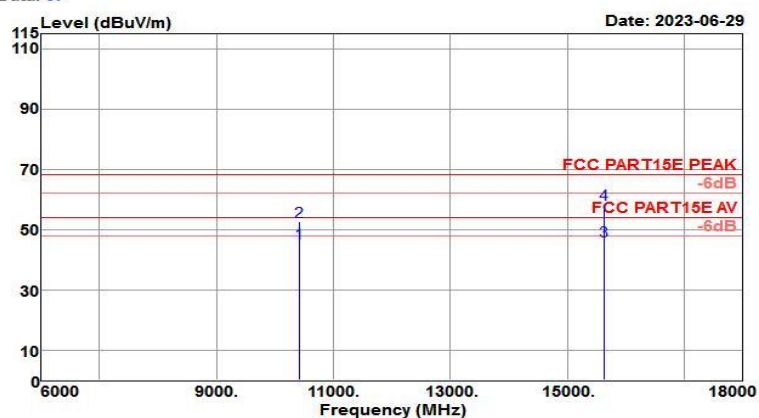


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
10420.000	26.59	39.29	13.28	33.75	45.41	54.00	-8.59	Average
10420.000	33.82	39.29	13.28	33.75	52.64	68.20	-15.56	Peak
15630.000	18.83	38.27	20.54	31.46	46.18	54.00	-7.82	Average
15630.000	31.17	38.27	20.54	31.46	58.52	68.20	-9.68	Peak

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 ac VHT80 CH58 5290MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11ac VHT80 CH58(5290MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

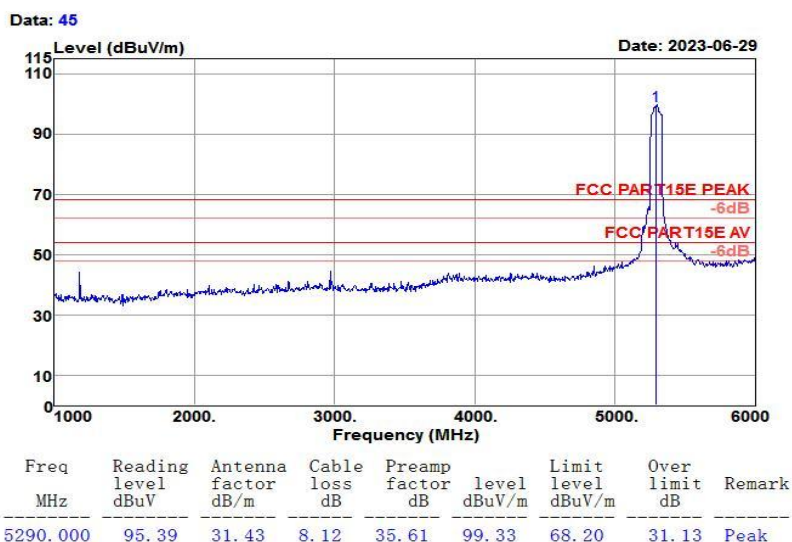

Test Mode :	802.11 ac VHT80 CH58 5290MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11ac VHT80 CH58(5290MHz)
 Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

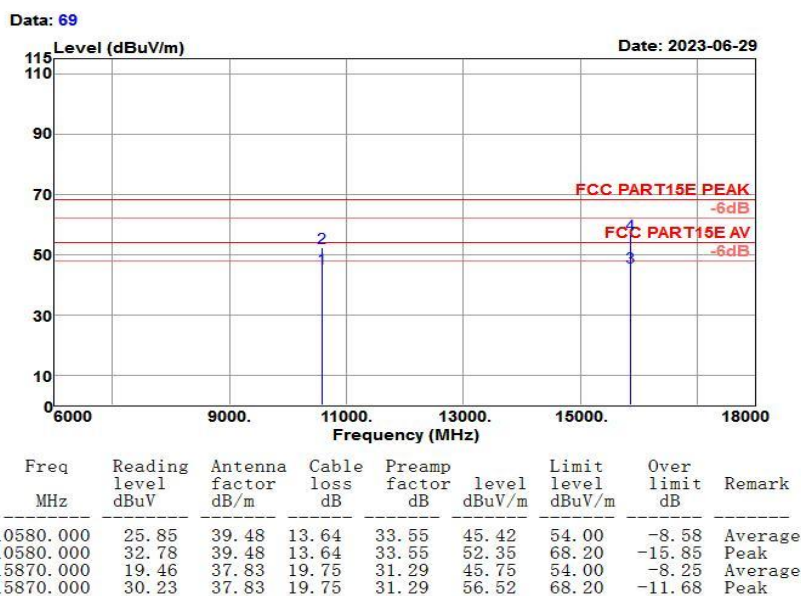

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 ac VHT80 CH58 5290MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11ac VHT80 CH58(5290MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

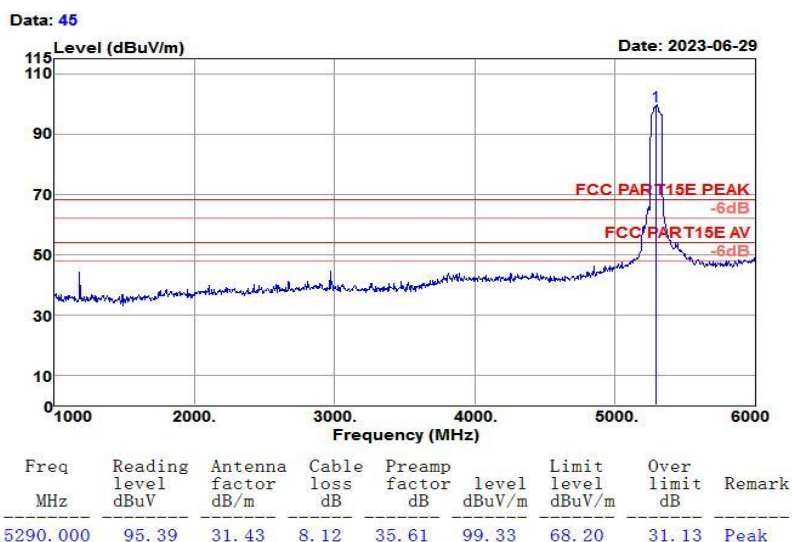

Test Mode :	802.11 ac VHT80 CH58 5290MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : 802.11ac VHT80 CH58(5290MHz)
 Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

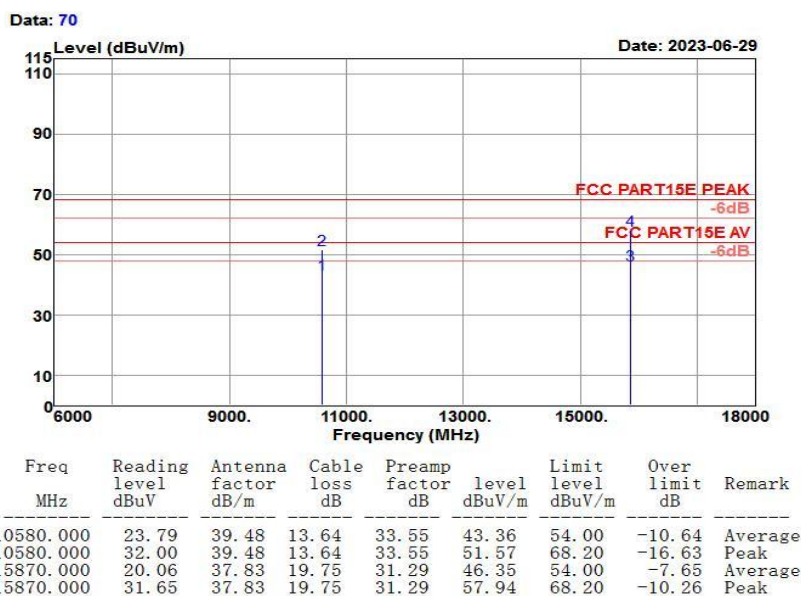

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	802.11 ac VHT80 CH106 5530MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11ac VHT80 CH106(5530MHz)	Power rating:	DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

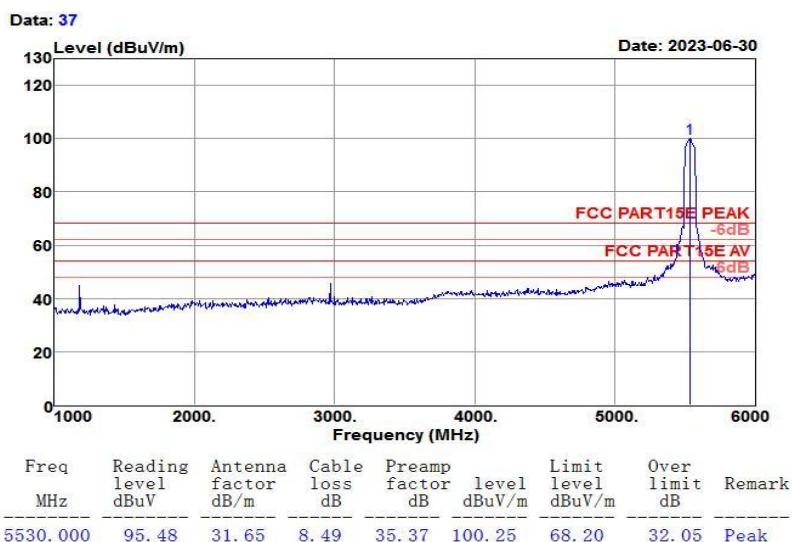

Test Mode :	802.11 ac VHT80 CH106 5530MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal

Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11ac VHT80 CH106(5530MHz) Power rating: DC 15W
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

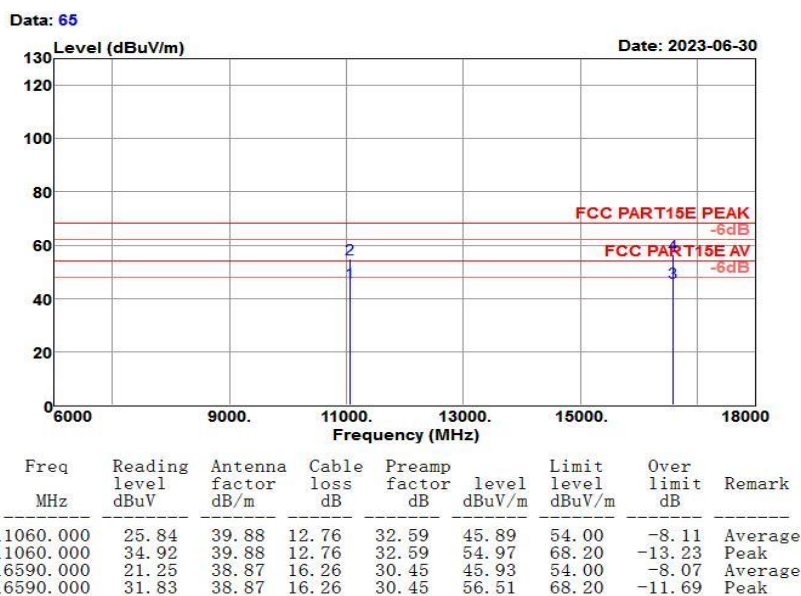

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11 ac VHT80 CH106 5530MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11ac VHT80 CH106(5530MHz)	Power rating:	DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

