

FCC TEST REPORT

FCC ID:2AY5D-F600

Applicant Name..... : Shenzhen USV Technology Co.,Ltd

Address..... : 4F, Building B20, Hengfeng Industrial City, Hangchen, Bao'an District, Shenzhen City, Guangdong Province, China

Manufacturer Name..... : Shenzhen USV Technology Co.,Ltd

Address..... : 4F, Building B20, Hengfeng Industrial City, Hangchen, Bao'an District, Shenzhen City, Guangdong Province, China

Product..... : 3-IN-1 CHARGER STATION

Model(s)..... : F600

Additional Model(s)..... : /

Trademark..... : /

Model Difference..... : /

Prepared by..... : Guangdong Zhonghan Testing Technology Co., Ltd.

Address..... : Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Date of Receipt..... : May 6, 2026

Date of Test(s)..... : May 6, 2026 to June 2, 2026

Date of Issue..... : June 2, 2026

Test Requested..... : Select test(s) as requested by the client.

Test Standard(s)..... : FCC CFR Title 47 Part 15 Subpart C

Test procedure..... : ANSI C63.10-2020+Cor.1-2023+C63.10a-2024 + Errata to C63.10a-2024

In the configuration tested, the EUT complied with the standards specified above.

Prepared by:

Kimi Lu

Kimi Lu/ Engineer

Reviewed by:

Baret Wu

Baret Wu/ Director



Lee/ Manager

Note: The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report shall not be reproduced except in full, without prior written approval of ZHT. This document may be altered or revised by ZHT, personnel only, and shall be noted in the revision of the document.



TABLE OF CONTENTS

1. TEST SUMMARY	3
2. GENERAL INFORMATION	4
3.1 GENERAL DESCRIPTION OF EUT	4
3.2 Test mode	5
3.3 Block Diagram of EUT Configuration	7
3.4 Test Conditions	7
3. TEST FACILITY AND TEST INSTRUMENT USED	8
4.1 Test Facility	8
4.2 Instrument List For All Test Items	8
4.3 Testing software	9
4.4 Measurement Uncertainty	9
4. CONDUCTED EMISSION TEST	10
5.1 CONDUCTED EMISSION MEASUREMENT	10
5.1.1 POWER LINE CONDUCTED EMISSION Limits	10
5.1.2 TEST PROCEDURE	10
5.1.3 DEVIATION FROM TEST STANDARD	10
5.1.4 TEST SETUP	11
5.1.5 EUT OPERATING CONDITIONS	11
5.1.6 Test Result	12
5. RADIATED EMISSION MEASUREMENT	14
6.1 Radiated Emission Limits	14
6.2 Anechoic Chamber Test Setup Diagram	15
6.3 Test Procedure	15
6.4 DEVIATION FROM TEST STANDARD	15
6.5 Test Result	16
6. BANDWIDTH TEST	19
7. ANTENNA REQUIREMENT	22
8. TEST SETUP PHOTO	26
9. EUT CONSTRUCTIONAL DETAILS	26

1. TEST SUMMARY

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Spurious Emission	15.209(a)(f)	Pass
20dB Bandwidth	15.215	Pass

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name:	3-IN-1 CHARGER STATION
Test Model No:	F600
Hardware version:	V1.0
Software version:	V1.0
Operation Frequency:	Coil Antenna 1: 115-205KHz, 360KHz Coil Antenna 2: 115-205KHz Coil Antenna 3: 323-328KHz, 1.78MHz
Modulation type:	ASK
Antenna Type:	Inductive loop coil Antenna
Antenna gain:	Coil Antenna 1&2&3: 0dBi
Power supply:	Input: 9V $\rightleftharpoons$ 3A, 15V $\rightleftharpoons$ 3A Output: Coil Antenna 1: 5W/7.5W/10W/15W/25W Coil Antenna 2: 5W Coil Antenna 3: 5W
Sample Number:	260506114YP001
Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Guangdong Zhonghan Testing Technology Co., Ltd. does not assume any responsibility.	



2.2 Test mode


Test Modes:	
Mode 1	AC Mains + WPT + Phone (25W Battery Status:≤1%)
Mode 2	AC Mains + WPT + Phone (25W Battery Status:≤50%)
Mode 3	AC Mains + WPT + Phone (25W Battery Status:≤99%)
Mode 4	AC Mains + WPT + Phone (15W Battery Status:≤1%)
Mode 5	AC Mains + WPT + Phone (15W Battery Status:≤50%)
Mode 6	AC Mains + WPT + Phone (15W Battery Status:≤99%)
Mode 7	AC Mains + WPT + Phone (10W Battery Status:≤1%)
Mode 8	AC Mains + WPT + Phone (10W Battery Status:≤50%)
Mode 9	AC Mains + WPT + Phone (10W Battery Status:≤99%)
Mode 10	AC Mains + WPT + Phone (7.5W Battery Status:≤1%)
Mode 11	AC Mains + WPT + Phone (7.5W Battery Status:≤50%)
Mode 12	AC Mains + WPT + Phone (7.5W Battery Status:≤99%)
Mode 13	AC Mains + WPT + Phone (5W Battery Status:≤1%)
Mode 14	AC Mains + WPT + Phone (5W Battery Status:≤50%)
Mode 15	AC Mains + WPT + Phone (5W Battery Status:≤99%)
Mode 16	AC Mains + WPT + Earphone (5W Battery Status:≤1%)
Mode 17	AC Mains + WPT + Earphone (5W Battery Status:≤50%)
Mode 18	AC Mains + WPT + Earphone (5W Battery Status:≤99%)
Mode 19	AC Mains + WPT + iWatch (5W Battery Status:≤1%)
Mode 20	AC Mains + WPT + iWatch (5W Battery Status:≤50%)
Mode 21	AC Mains + WPT + iWatch (5W Battery Status:≤99%)
Mode 22	AC Mains + WPT + Phone (25W Battery Status:≤1%)+ Earphone (5W Battery Status:≤1%)+iWatch (5W Battery Status:≤1%)
Mode 23	AC Mains + WPT + Phone (25W Battery Status:≤50%)+ Earphone (5W Battery Status:≤50%)+iWatch (5W Battery Status:≤50%)
Mode 24	AC Mains + WPT + Phone (25W Battery Status:≤99%)+ Earphone (5W Battery Status:≤99%)+iWatch (5W Battery Status:≤99%)
Mode 25	AC Mains + WPT + Phone (15W Battery Status:≤1%)+ Earphone (5W Battery Status:≤1%)+iWatch (5W Battery Status:≤1%)
Mode 26	AC Mains + WPT + Phone (15W Battery Status:≤50%)+ Earphone (5W Battery Status:≤50%)+iWatch (5W Battery Status:≤50%)
Mode 27	AC Mains + WPT + Phone (15W Battery Status:≤99%)+ Earphone (5W Battery Status:≤99%)+iWatch (5W Battery Status:≤99%)
Mode 28	AC Mains + WPT + Phone (10W Battery Status:≤1%)+ Earphone (5W Battery Status:≤1%)+iWatch (5W Battery Status:≤1%)
Mode 29	AC Mains + WPT + Phone (10W Battery Status:≤50%)+ Earphone (5W Battery Status:≤50%)+iWatch (5W Battery Status:≤50%)
Mode 30	AC Mains + WPT + Phone (10W Battery Status:≤99%)+ Earphone (5W Battery Status:≤99%)+iWatch (5W Battery Status:≤99%)
Mode 31	AC Mains + WPT + Phone (7.5W Battery Status:≤1%)+ Earphone (5W Battery Status:≤1%)+iWatch (5W Battery Status:≤1%)
Mode 32	AC Mains + WPT + Phone (7.5W Battery Status:≤50%)+ Earphone (5W Battery Status:≤50%)+iWatch (5W Battery Status:≤50%)




Mode 33	AC Mains + WPT + Phone (7.5W Battery Status:≤99%)+ Earphone (5W Battery Status:≤99%)+iWatch (5W Battery Status:≤99%)
Mode 34	AC Mains + WPT + Phone (5W Battery Status:≤1%)+ Earphone (5W Battery Status:≤1%)+iWatch (5W Battery Status:≤1%)
Mode 35	AC Mains + WPT + Phone (5W Battery Status:≤50%)+ Earphone (5W Battery Status:≤50%)+iWatch (5W Battery Status:≤50%)
Mode 36	AC Mains + WPT + Phone (5W Battery Status:≤99%)+ Earphone (5W Battery Status:≤99%)+iWatch (5W Battery Status:≤99%)
Mode 37	Standby
Note: All modes were tested, only the worst-case was recorded in the report. Mode 22 is the worst mode.	

2.3 Block Diagram of EUT Configuration

Conducted Emission

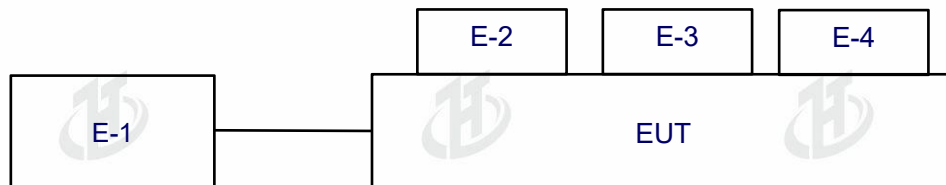

Radiated Emission

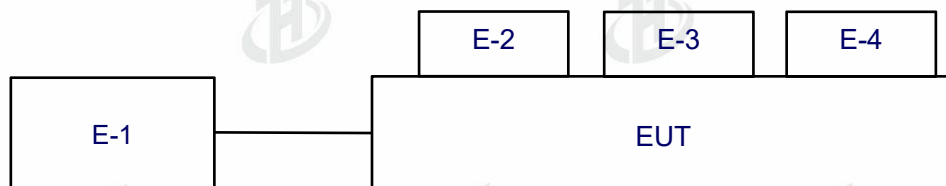

2.4 Test Conditions

Temperature: 25.5℃

Relative Humidity: 54.4

3. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	AC Adapter	Whale ancient (Dongguan) Technobgy Industrial Co.,LTD	JG45W00C-U	/	AE
E-2	Mobile phone	Apple Inc.	iPhone 15	/	AE
E-3	Apple watch	Apple Inc.	ultra 2	/	AE
E-4	Earphone	Apple	A2031	/	AE

Item	Shielded Type	Ferrite Core	Length	Note

Note:	
(1)	The support equipment was authorized by Declaration of Confirmation.
(2)	For detachable type I/O cable should be specified the length in cm in 『Length』 column.
(3)	“YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

**4. TEST FACILITY AND TEST INSTRUMENT USED****4.1 Test Facility**

Guangdong Zhonghan Testing Technology Co., Ltd.
Add. :Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

FCC Registration Number:255941
Designation Number: CN0325
IC Registered No.: 29832
CAB identifier: CN0143

4.2 Instrument List For All Test Items**Radiation Test equipment**

Item	Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
1	Receiver	R&S	ESCI	100874	Apr. 24, 2026	Apr. 23, 2027
2	Loop Antenna	TESEQ	HLA6121	58357	Sept. 8, 2025	Sept. 7, 2026
3	Amplifier	Schwarzbeck	BBV 9743 B	00378	Apr. 24, 2026	Apr. 23, 2027
4	Amplifier	Schwarzbeck	BBV 9718 B	00040	May 8, 2026 May 8, 2025	May 7, 2027 May 7, 2026
5	Bilog Antenna	Schwarzbeck	VULB9162	00498	Apr. 25, 2026	Apr. 24, 2027
6	Horn Antenna	Schwarzbeck	BBHA9120D	02623	Apr. 25, 2026	Apr. 24, 2027
7	Horn Antenna	A.H.SYSTEMS	SAS574	588	Oct. 20, 2025	Oct. 19, 2026
8	Amplifier	AEROFLEX	100KHz-40GHz	097	Oct. 20, 2025	Oct. 19, 2026
9	Spectrum Analyzer	R&S	FSV40	101413	Apr. 24, 2026	Apr. 23, 2027
10	Spectrum Analyzer	KEYSIGHT	N9020A	MY53420208	Apr. 24, 2026	Apr. 23, 2027
11	WIDBAND RADIO COMMUNICATION TESTER	R&S	CMW500	109863	Apr. 24, 2026	Apr. 23, 2027
12	Single Generator	Agilent	N5182A	MY48180575	Apr. 24, 2026	Apr. 23, 2027
13	Power Sensor	MWRFTest	MW100-RFCB	/	Apr. 24, 2026	Apr. 23, 2027
14	Power Amplifier Shielding Room	EMToni	2m3m3m	/	Apr. 11, 2026	Apr. 10, 2031
15	CABLE	EMToni	DA800-NM-NM-11000MM	/	Apr. 24, 2026	Apr. 23, 2027

Conduction Test equipment

Equipment	Manufacturer	Model	Last Cal.	Next Cal.
Receiver	R&S	ESCI	Apr. 24, 2026	Apr. 23, 2027
LISN	R&S	ENV216	Aug. 22, 2025	Aug. 23, 2026
ISN CAT 6	Schwarzbeck	NTFM 8158	Apr. 24, 2026	Apr. 23, 2027
ISN CAT 5	Schwarzbeck	CAT5 8158	Apr. 24, 2026	Apr. 23, 2027
Capacitive Voltage Probe	Schwarzbeck	CVP 9222 C	May 8, 2026 May 8, 2025	May 7, 2027 May 7, 2026
Current Transformer Clamp	Schwarzbeck	SW 9605	May 8, 2026 May 8, 2025	May 7, 2027 May 7, 2026
Receiver	R&S	ESCI	Apr. 24, 2026	Apr. 23, 2027

4.3 Testing software

Project	Software name	Edition
Conducted Emission	EZ-EMC	EMC-CON 3A1.1+
Radiated Emission	EZ-EMC	FA-03A2 RE+
RF Test	MTS 8310	2.0.0.0

4.4 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	0.92dB
2	RF conducted power	0.16dB
3	Conducted spurious emissions	0.21dB
4	All radiated emissions (9k-30MHz)	4.68dB
5	All radiated emissions (30-1GHz)	5.1dB
6	All radiated emissions (1-6GHz)	3.9dB
7	All radiated emissions (6GHz-18GHz)	4.3dB
8	All radiated emissions (18-40GHz)	4.65dB
9	Temperature	0.5°C
10	Humidity	2%
11	Occupied Bandwidth	4.96%

Decision Rule

- ☒ Uncertainty is not included
☐ Uncertainty is inclu

5. CONDUCTED EMISSION TEST

5.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024 + Errata to C63.10a-2024
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

5.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	QP	AVG	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


5.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

5.1.3 DEVIATION FROM TEST STANDARD

No deviation

5.1.4 TEST SETUP

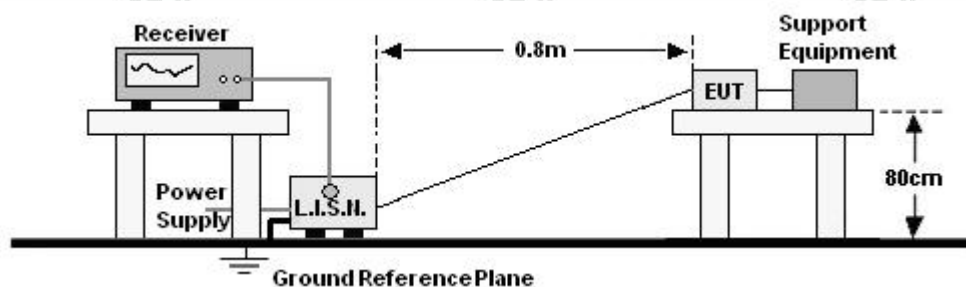


5.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

5.1.6 Test Result

Temperature:	24.6°C	Relative Humidity:	54.7%
Pressure:	1014kPa	Phase :	L
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 22

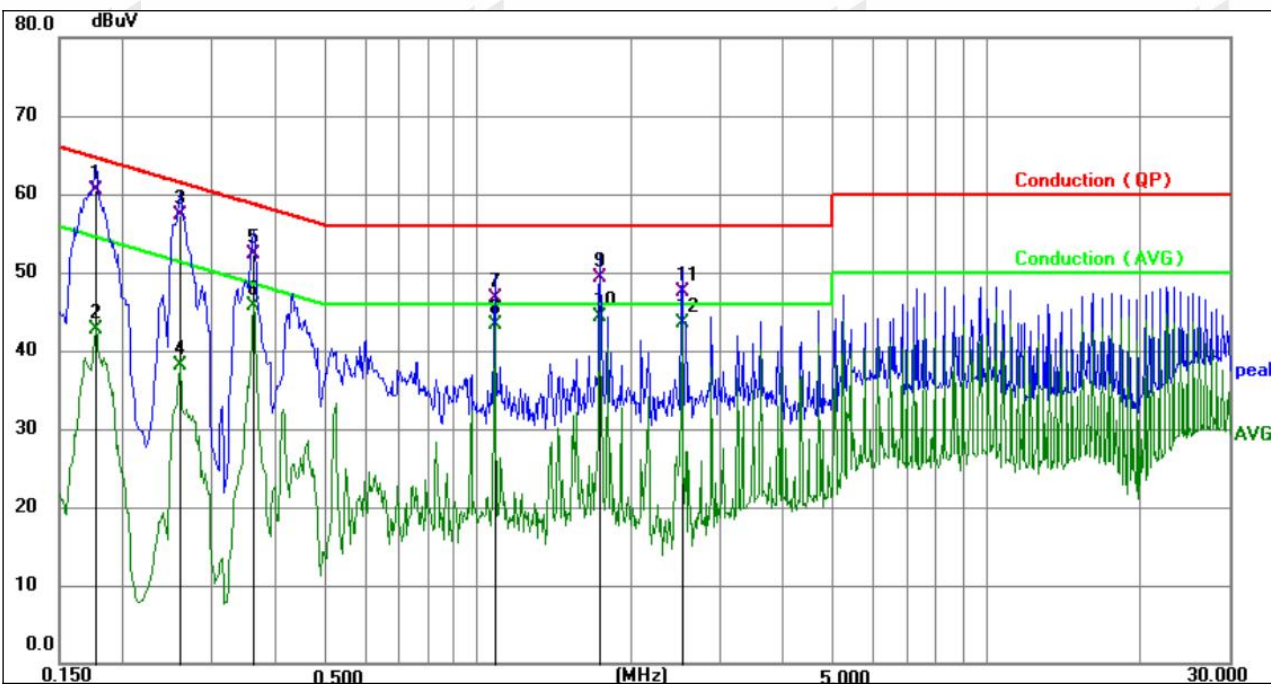


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1766	50.51	9.90	60.41	64.64	-4.23	QP	P	
2	0.1766	32.79	9.90	42.69	54.64	-11.95	AVG	P	
3	0.2580	47.37	9.93	57.30	61.50	-4.20	QP	P	
4	0.2580	28.09	9.93	38.02	51.50	-13.48	AVG	P	
5	0.3613	42.36	9.97	52.33	58.70	-6.37	QP	P	
6	0.3613	35.73	9.97	45.70	48.70	-3.00	AVG	P	
7	1.0813	36.58	10.06	46.64	56.00	-9.36	QP	P	
8	1.0813	33.21	10.06	43.27	46.00	-2.73	AVG	P	
9	1.7383	39.19	10.06	49.25	56.00	-6.75	QP	P	
10 *	1.7383	34.25	10.06	44.31	46.00	-1.69	AVG	P	
11	2.5170	37.36	10.06	47.42	56.00	-8.58	QP	P	
12	2.5170	33.46	10.06	43.52	46.00	-2.48	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor



Temperature:	24.6°C	Relative Humidity:	54.7%
Pressure:	1014kPa	Phase :	N
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 22

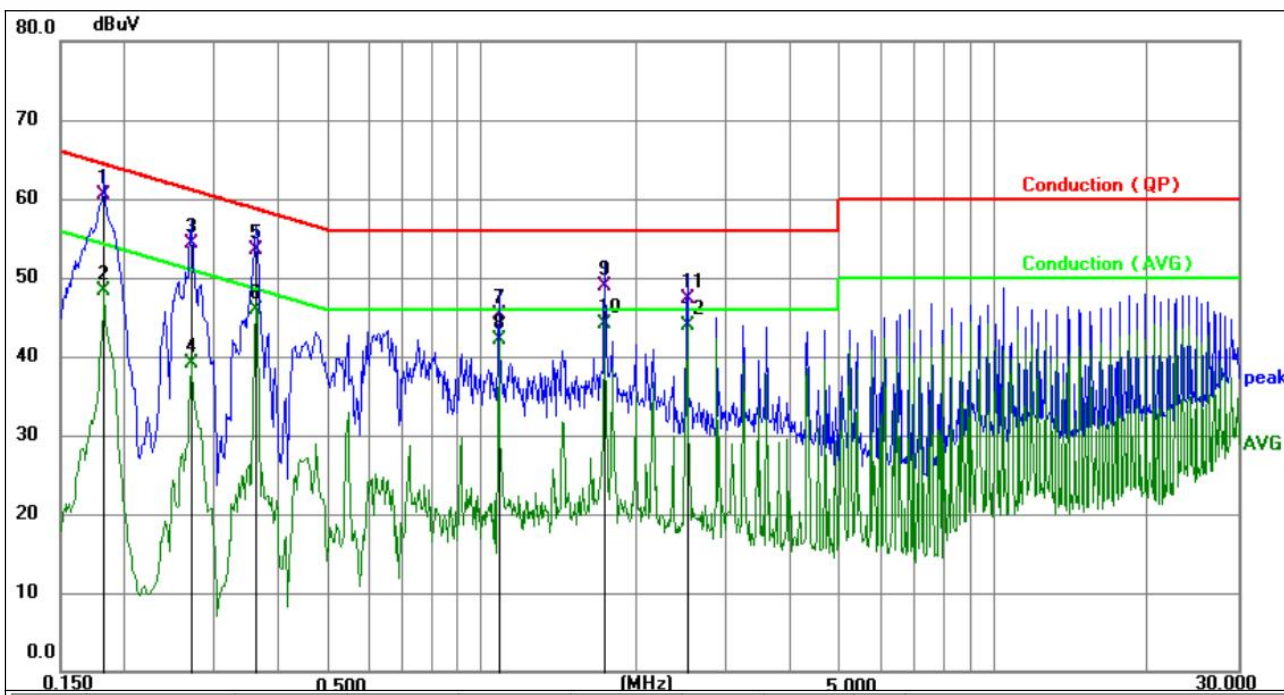

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1824	50.58	9.90	60.48	64.38	-3.90	QP	P	
2	0.1824	38.47	9.90	48.37	54.38	-6.01	AVG	P	
3	0.2700	44.41	9.94	54.35	61.12	-6.77	QP	P	
4	0.2700	29.23	9.94	39.17	51.12	-11.95	AVG	P	
5	0.3613	43.51	9.97	53.48	58.70	-5.22	QP	P	
6	0.3613	36.03	9.97	46.00	48.70	-2.70	AVG	P	
7	1.0770	35.30	10.06	45.36	56.00	-10.64	QP	P	
8	1.0770	31.99	10.06	42.05	46.00	-3.95	AVG	P	
9	1.7383	38.94	10.06	49.00	56.00	-7.00	QP	P	
10 *	1.7383	34.14	10.06	44.20	46.00	-1.80	AVG	P	
11	2.5170	37.20	10.06	47.26	56.00	-8.74	QP	P	
12	2.5170	33.79	10.06	43.85	46.00	-2.15	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

6. RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024 + Errata to C63.10a-2024				
Test Frequency Range:	9kHz to 1GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

6.1 Radiated Emission Limits

Limits for frequency below 30MHz


Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.490	2400/F(kHz)	300	Peak Value
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value

Limits for frequency Above 30MHz


Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
Above 1GHz	54.00	Average Value
	74.00	Peak Value

6.2 Anechoic Chamber Test Setup Diagram

(A) Radiated Emission Test-Up Frequency Below 30MHz

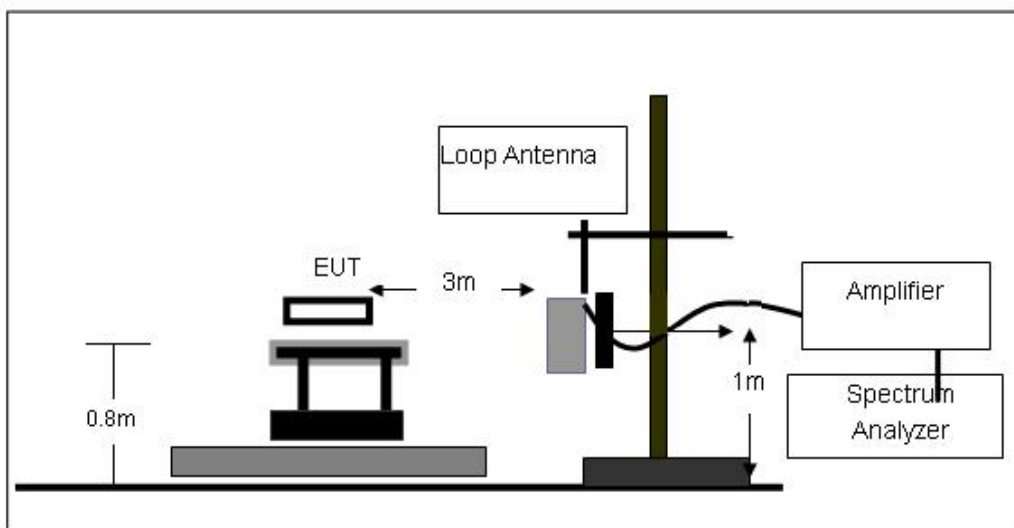

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

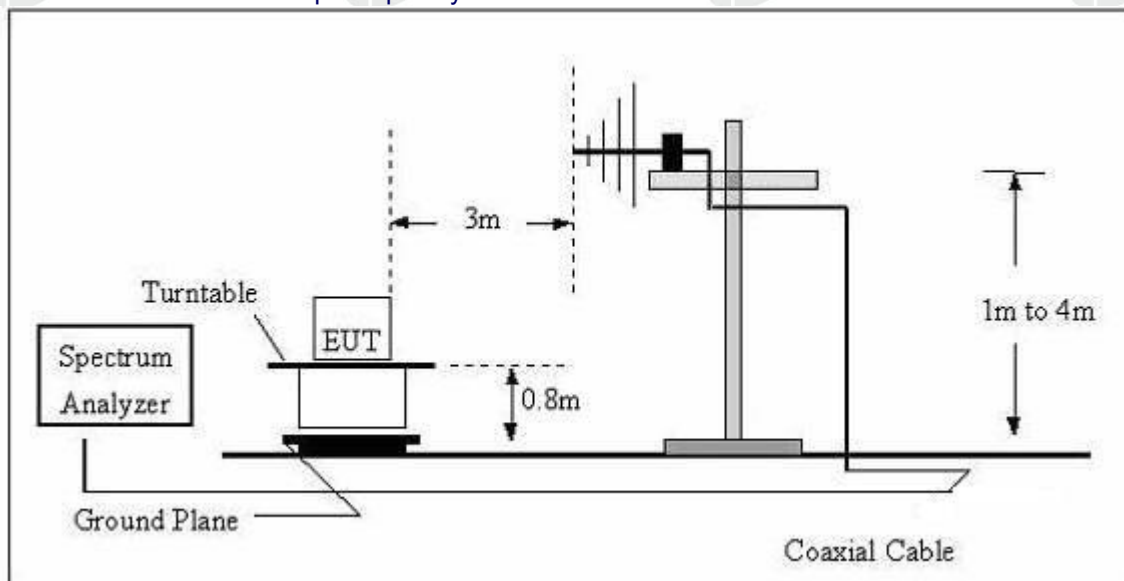

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2020+Cor.1-2023+C63.10a-2024 + Errata to C63.10a-2024. The specification used was the FCC 15.209 and FCC 15.205 limits.

6.3 Test Procedure

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna (calibrated by dipole antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on measurement.

6.4 DEVIATION FROM TEST STANDARD

No deviation



6.5 Test Result


Measurement data:

Note: Limit dBuV/m @3m = Limit dBuV/m @300m+ 80

Limit dBuV/m @3m = Limit dBuV/m @30m + 40

9 kHz~30 MHz

Temperature:	23.6℃	Relative Humidity:	54.2%
Pressure:	1014kPa	Polarization:	coaxial
Test Voltage:	AC 120V/60Hz	Test Modes:	Mode 22

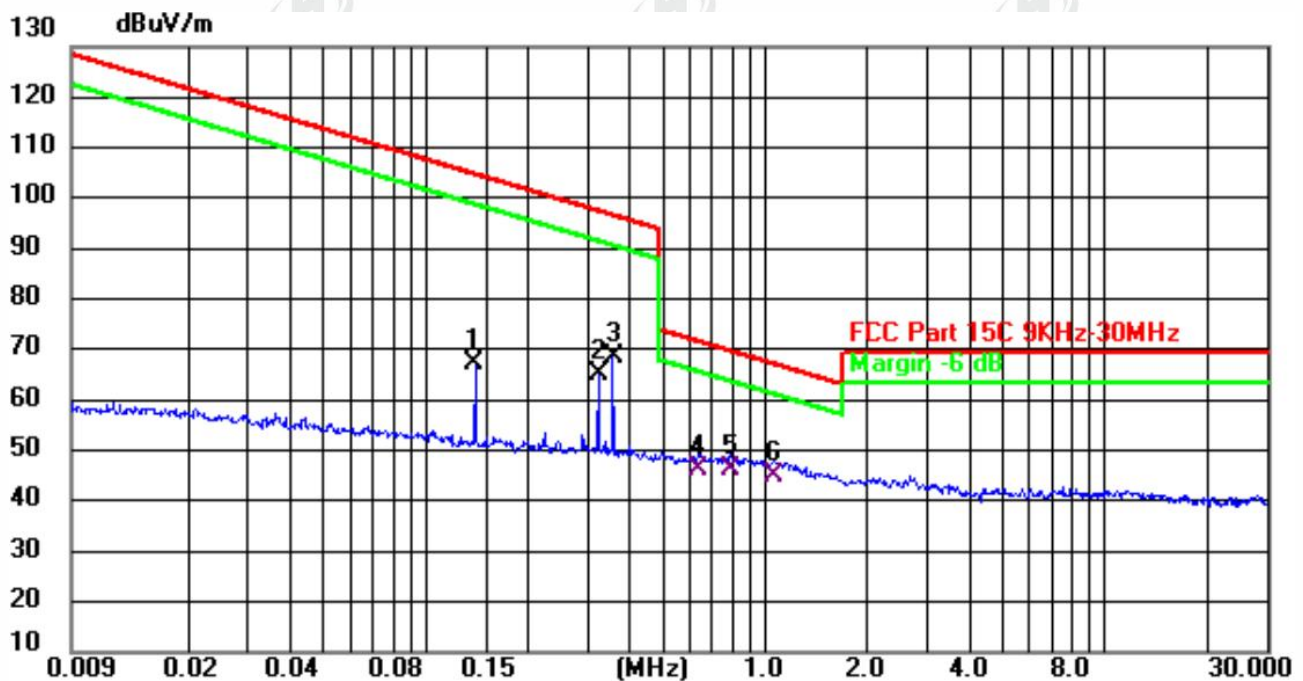

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1386	66.98	0.16	67.14	104.77	-37.63	peak
2	0.3233	64.47	0.77	65.24	97.41	-32.17	peak
3	0.3594	67.60	0.84	68.44	96.49	-28.05	peak
4	0.6360	44.90	1.38	46.28	71.53	-25.25	QP
5	0.7922	44.62	1.69	46.31	69.63	-23.32	QP
6 *	1.0610	42.56	2.23	44.79	67.09	-22.30	QP

Note:

Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Emission Level = Meter Reading - Factor

Margin = Emission Level- Limit.


The amplitude of emissions which are attenuated by more than 20db below the permissible value has no need to be reported.



!- Means the test Degree and Height are not recorded by the test software and only show the worst case in the test report

30MHz-1GHz


Temperature:	23.6℃	Relative Humidity:	54.2%
Pressure:	1014 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Modes:	Mode 22

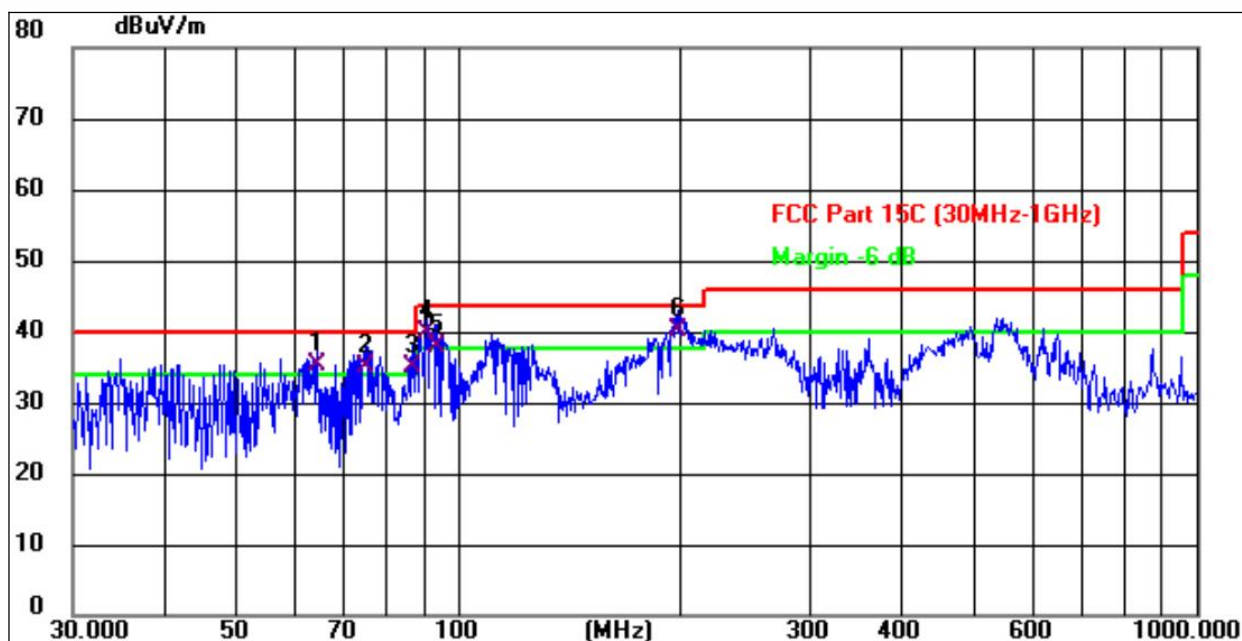

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	64.2074	45.92	-10.52	35.40	40.00	-4.60	QP
2 !	74.9191	47.67	-12.66	35.01	40.00	-4.99	QP
3 !	86.8067	47.09	-12.07	35.02	40.00	-4.98	QP
4 !	90.5374	51.35	-11.42	39.93	43.50	-3.57	QP
5 !	93.4402	48.88	-10.94	37.94	43.50	-5.56	QP
6 *	198.5880	50.11	-10.08	40.03	43.50	-3.47	QP



Temperature:	23.6°C	Relative Humidity:	54.2%
Pressure:	1014kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Test Modes:	Mode 22

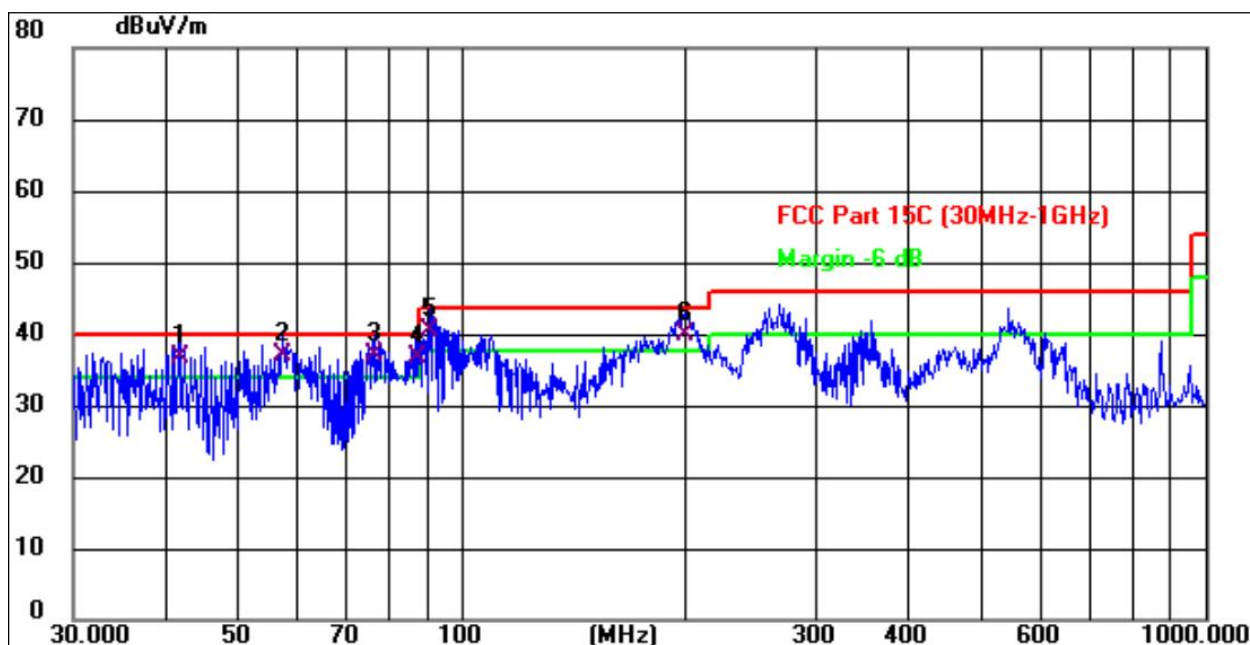

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	41.7129	45.71	-8.94	36.77	40.00	-3.23	QP
2 !	57.3922	46.09	-9.15	36.94	40.00	-3.06	QP
3 !	76.5119	49.81	-12.85	36.96	40.00	-3.04	QP
4 !	87.1115	48.87	-12.02	36.85	40.00	-3.15	QP
5 *	90.5374	51.99	-11.42	40.57	43.50	-2.93	QP
6 !	199.2855	49.94	-10.04	39.90	43.50	-3.60	QP

Remarks:

- Factor = Antenna Factor + Cable Loss – Preamplifier Factor
- Level = Reading + Factor
- Margin = Emission Level- Limit.
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- '-'Means the test Degree and Height are not recorded by the test software and only show the worst case in the test report.



7. BANDWIDTH TEST

1. Set RBW = 1%-5%OBW.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.


TEST SETUP



Temperature:	25.4 °C	Relative Humidity:	55%
Pressure:	1014kPa		

Frequency (KHz)	20dB bandwidth (KHz)	Result
359.4	0.418	Pass


360KHz Coil Antenna 1

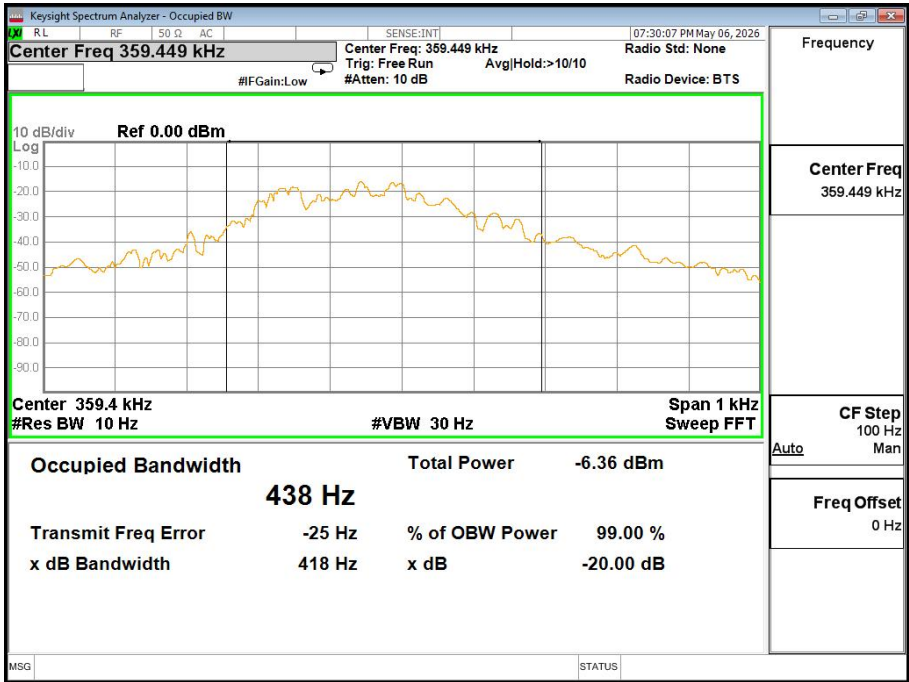

Temperature:	25.4 °C	Relative Humidity:	55%
Pressure:	1014kPa		

Frequency (KHz)	20dB bandwidth (KHz)	Result
127.7	0.143	Pass


115-205KHz Coil Antenna 1

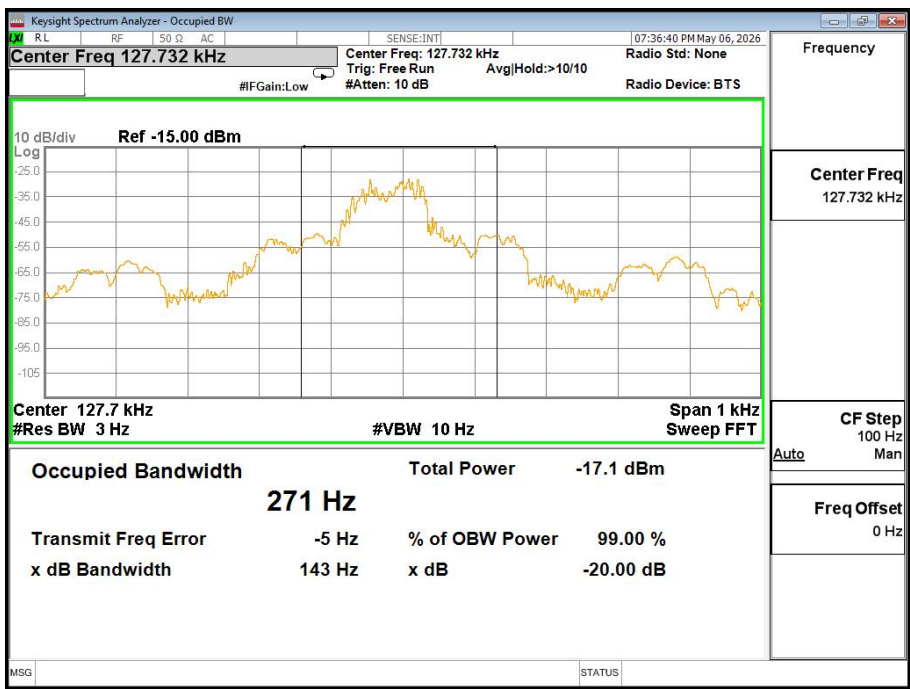

Temperature:	25.4 °C	Relative Humidity:	55%
Pressure:	1014kPa		

Frequency (KHz)	20dB bandwidth (KHz)	Result
138.6	0.126	Pass


115-205KHz Coil Antenna 2

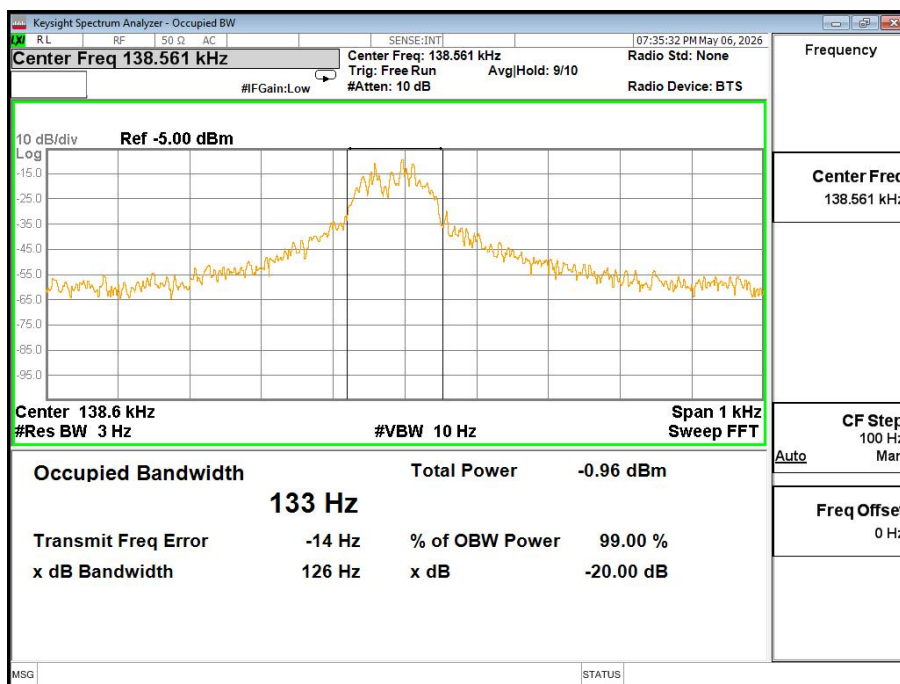

Temperature:	25.4 °C	Relative Humidity:	55%
Pressure:	1014kPa		

Frequency (KHz)	20dB bandwidth (KHz)	Result
323.3	0.625	Pass


323-328KHz Coil Antenna 3

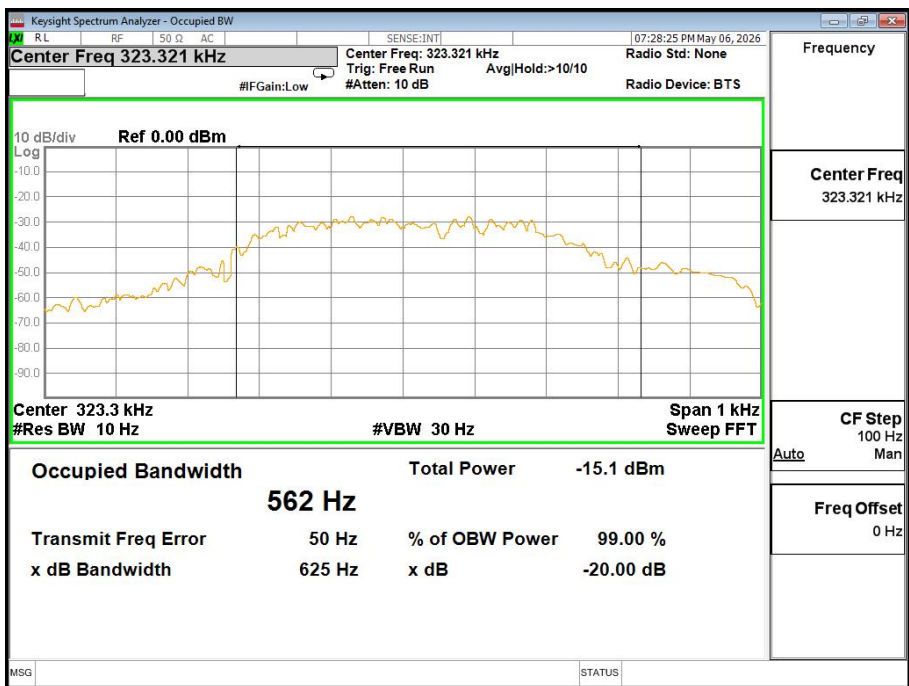

Temperature:	25.4 °C	Relative Humidity:	55%
Pressure:	1014kPa		

Frequency (KHz)	20dB bandwidth (KHz)	Result
1742	4.522	Pass

1.78MHz Coil Antenna 3

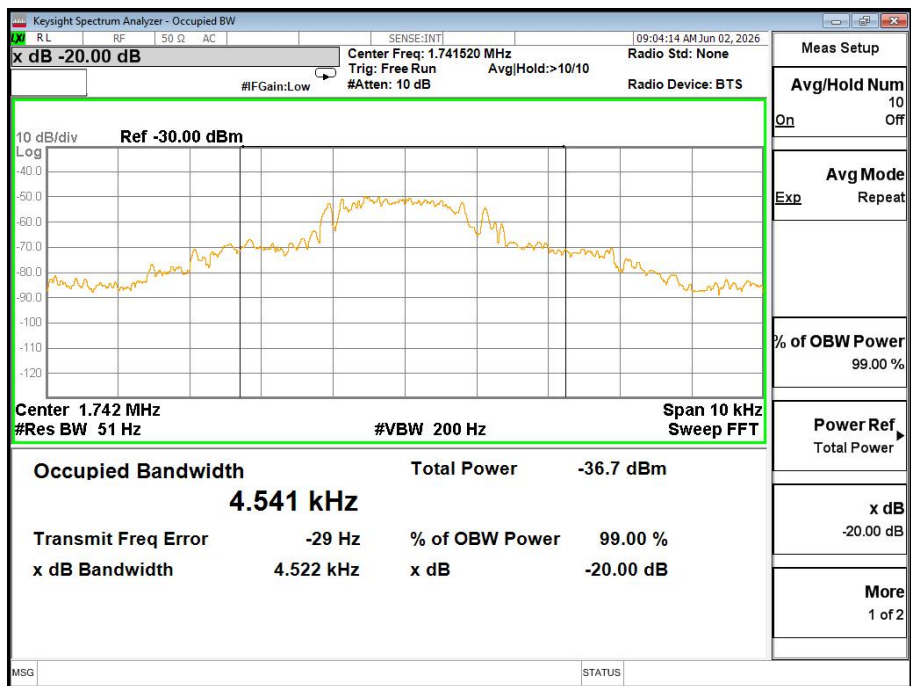

ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is Coil Antenna, the best case gain of the antennas is 0dBi, reference to the appendix II for details	

8. TEST SETUP PHOTO

Reference to the appendix I for details.

9. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

******* END OF REPORT *******