


Table of Content

Page 1	Content
Page 2	MCU
Page 3	PWR
Page 4	LAN
Page 5	POE
Page 6	EXT_IO/RS232/UHF
Page 7	Change List

EGLTEC 4-Port UHF RFID Reader-Fixed SF-0204 廠牌:EGLTEC



NOTE: Make 2 jumpers short, if programming used by UM24 CONN.

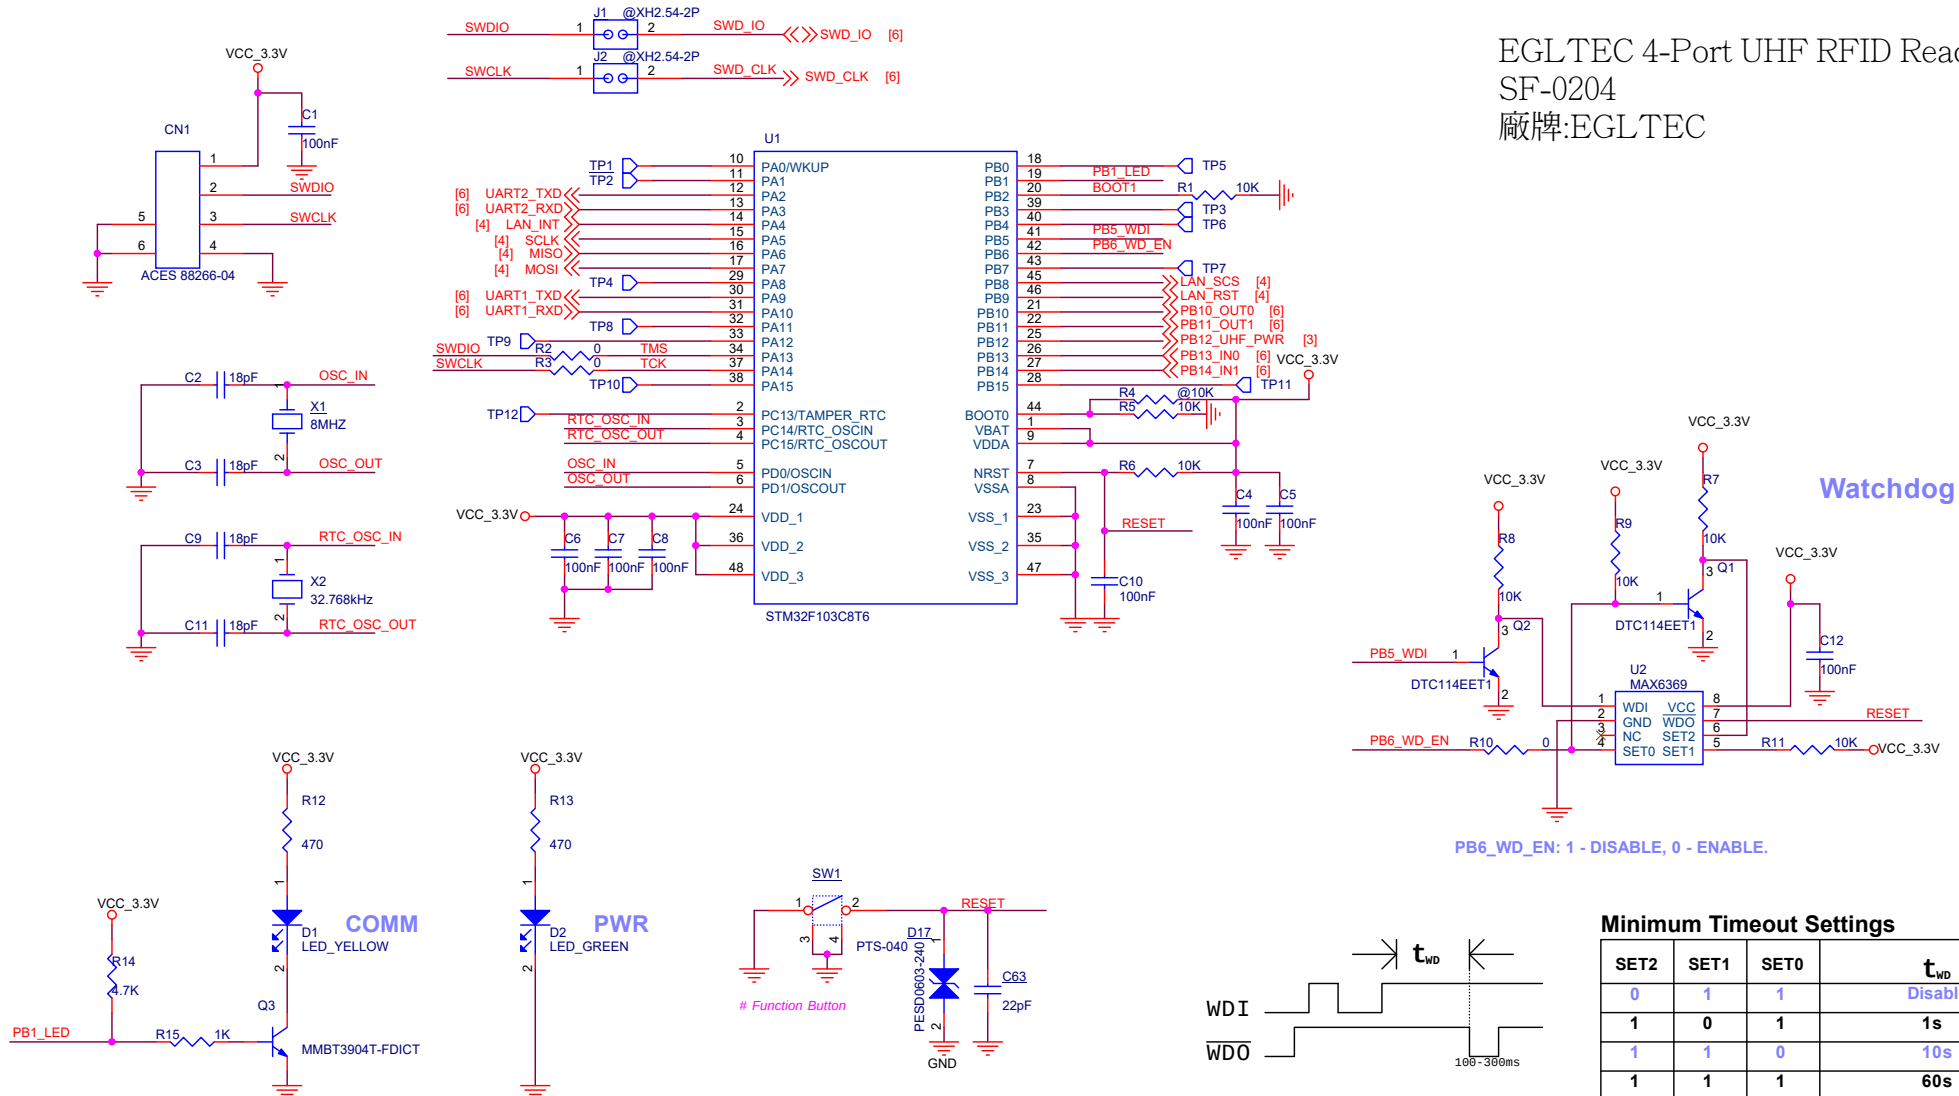



Minimum Timeout Settings

SET2	SET1	SET0	t_{WD}
0	1	1	Disabled
1	0	1	1s
1	1	0	10s
1	1	1	60s

Title			MCU
Size	Document Number	Rev	
B	<Doc>	2.0	
Date:	Monday, March 16, 2020	Sheet	2 of 7

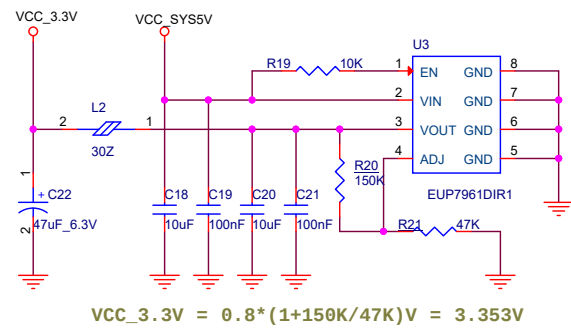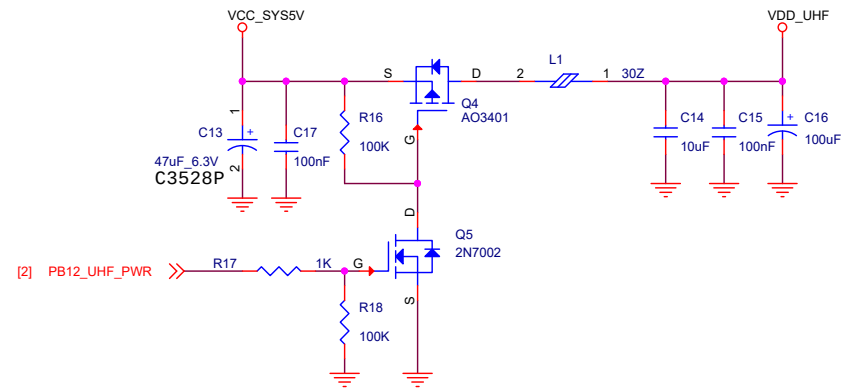


Title		
PWR		
Size	Document Number	Rev
B	<Doc>	2.0
Date:	Monday, March 16, 2020	Sheet 3 of 7

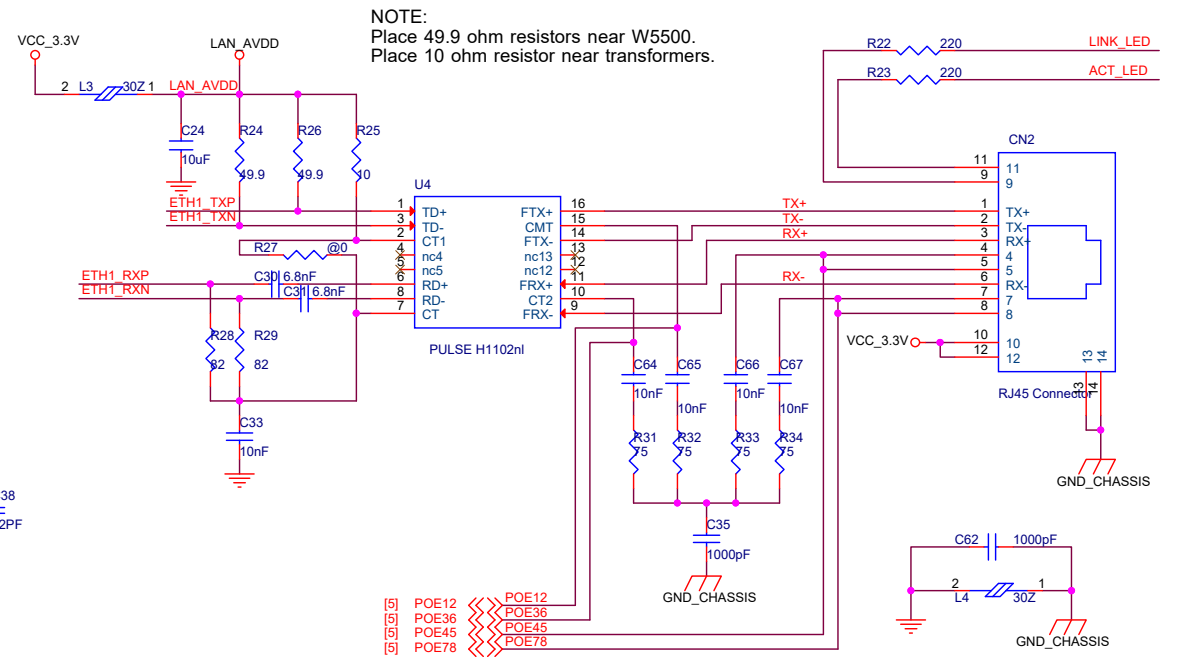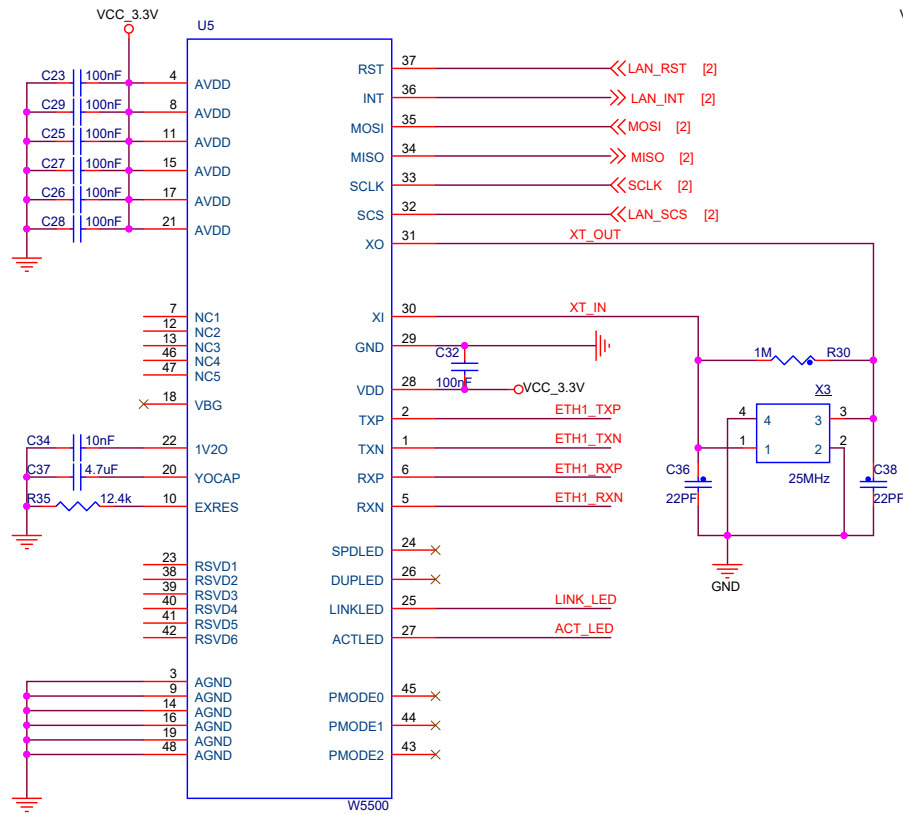

NOTE:
Place 49.9 ohm resistors near W5500.
Place 10 ohm resistor near transformers.







Title			LAN
Size	Document Number	Rev	
B	<Doc>	2.0	
Date:	Wednesday, December 23, 2020	Sheet	4 of 7

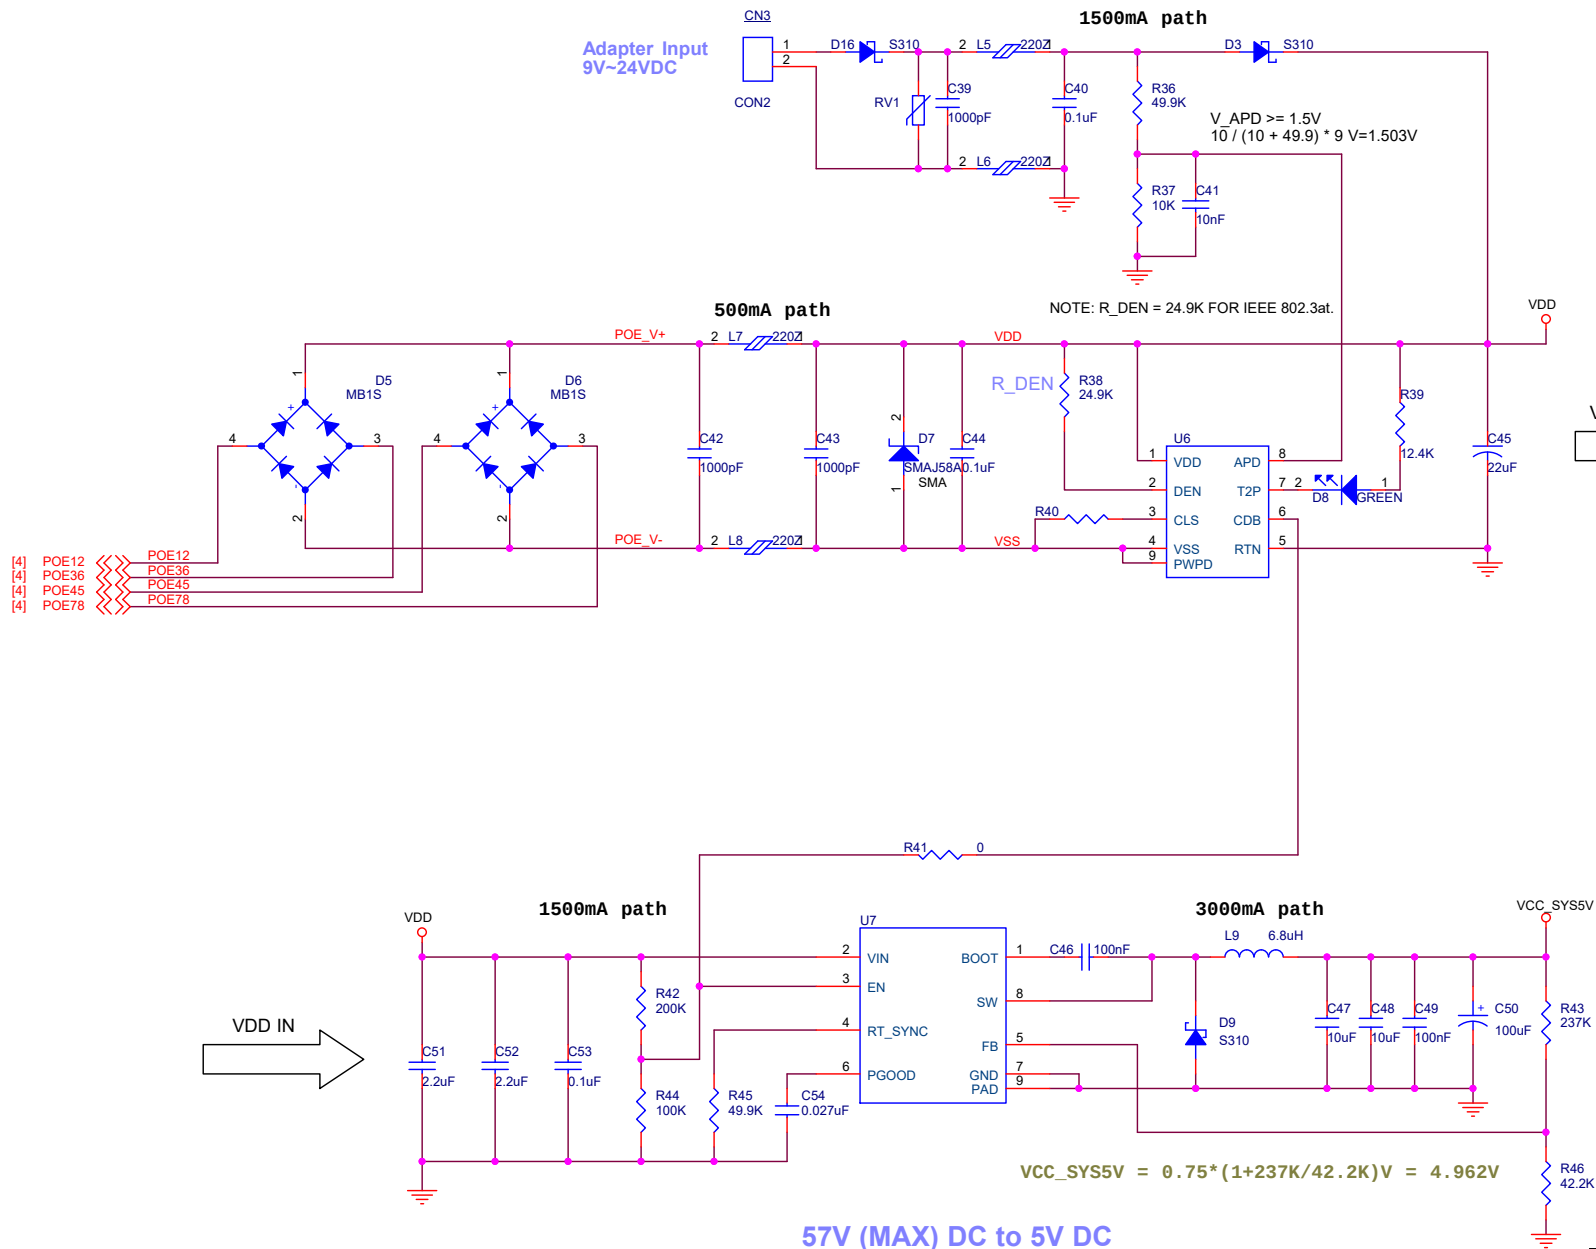

VDD OUT

VDD IN

Title		
POE		
Size	Document Number	Rev
B	<Doc>	2.0
Date:	Wednesday, December 23, 2020	Sheet 5 of 7

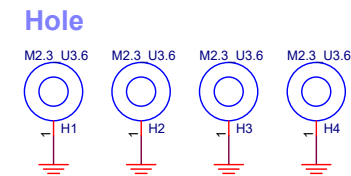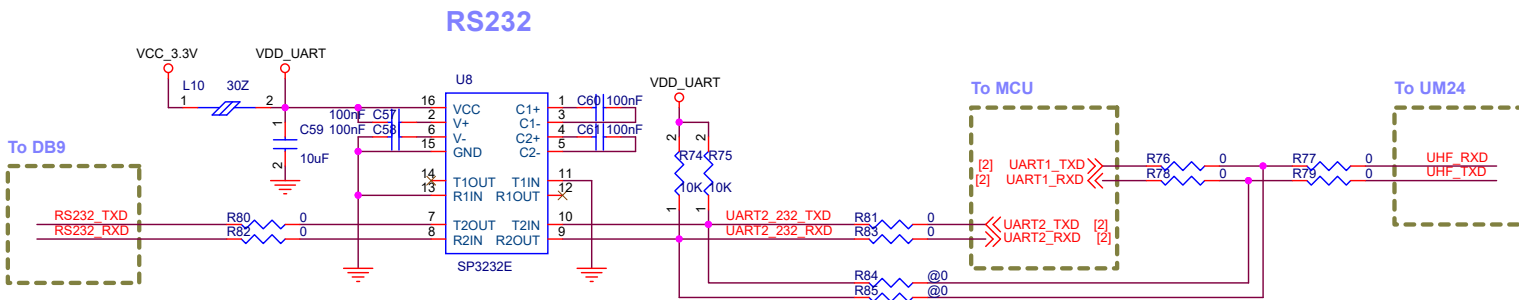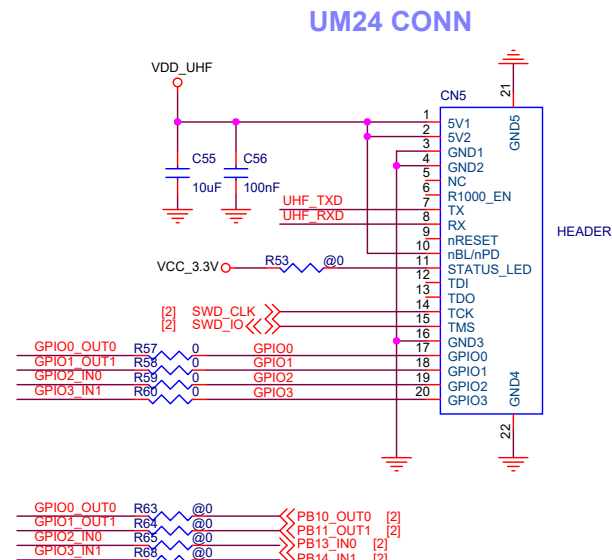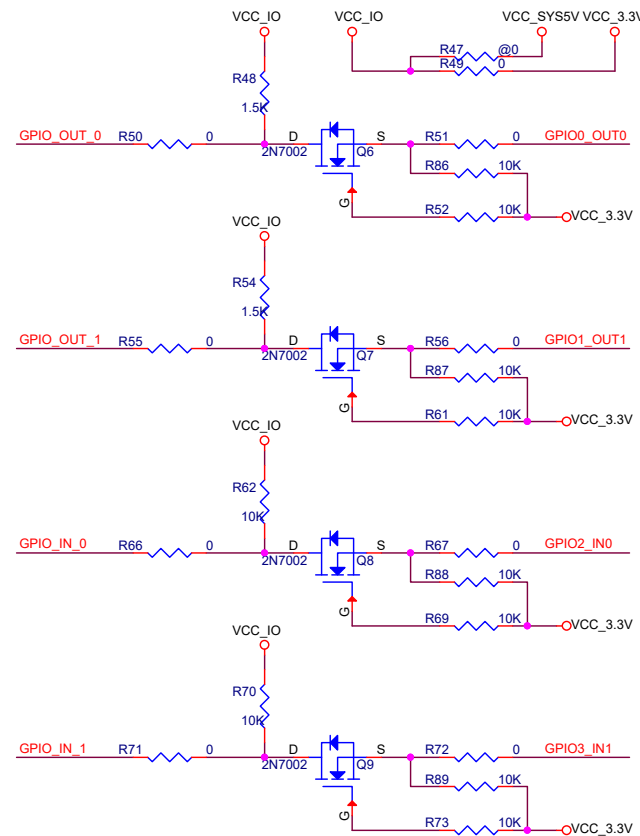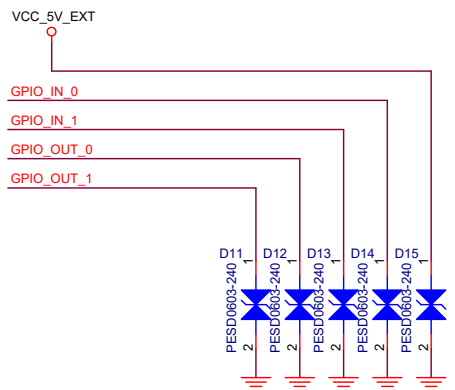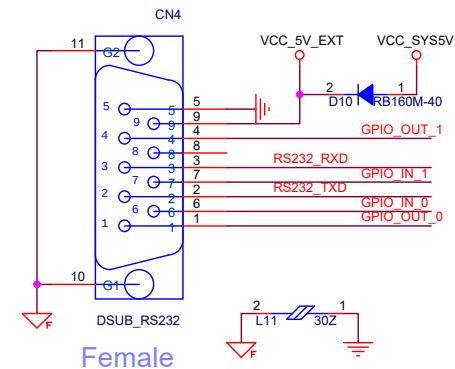

Default UARTs:
 UM24 - UART1 (PA9 & PA10);
 MCU - UART2 (PA2 & PA3) - RS232.

Title		
EXT_IO/RS232/UHF		
Size	Document Number	Rev
B	<Doc>	2.0
Date:	Wednesday, December 23, 2020	Sheet 6 of 7

Reserved for Future Use

Title			
Change List			
Size	Document Number	Rev	
B	<Doc>	2.0	
Date:	Monday, March 16, 2020	Sheet	7 of 7