


PROFESSIONAL REMOTE CONTROL HIGH SPEED CARS


INSTRUCTIONS

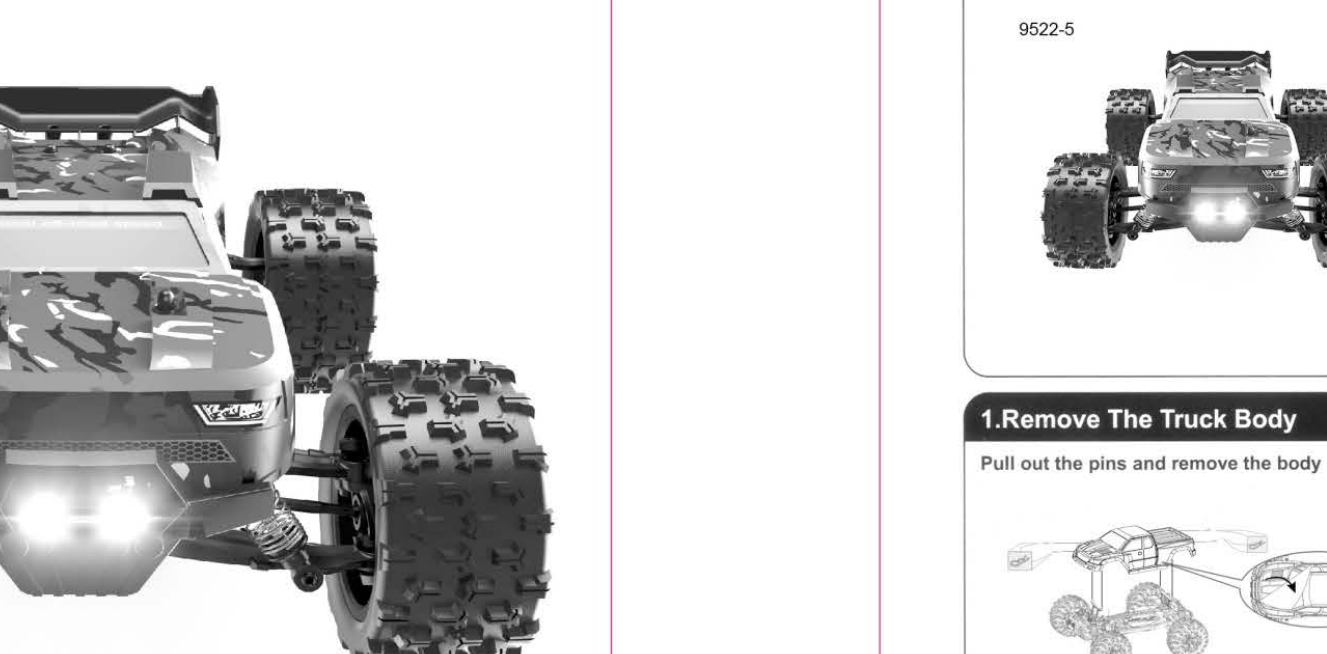

Dear Customer:  
Thank you for your purchase! As long as you contact us by email, there are many promotions to share with you and help you solve the problems. Wishing you good luck every day!

+1 (855) 422-2777  
eu@wiaorchi.com (EU)  
usa@wiaorchi.com (USA)  
jp@wiaorchi.com (JP)  
ca@wiaorchi.com (CA)

**Caution**  
(1) Small parts. Keep out of reach of small children.  
(2) Please operate in an open field without any wave interference.  
(3) When transmitter is low in power, please stop and change batteries immediately.  
(4) On backout after the removal, please do not place discarded sanitation.  
(5) Please store the car and the transmitter in a dry and cool environment.  
(6) Keep away from fire, hot or humid environment.  
(7) If car battery is wet, be sure to wipe and dry it completely to avoid any damage.

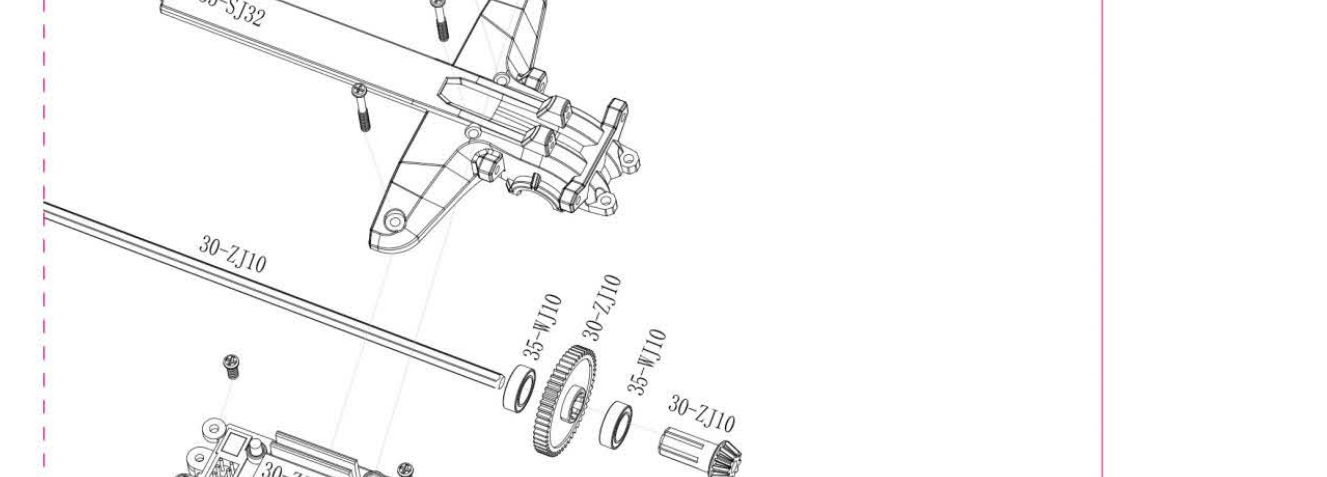


**1.Remove The Truck Body**  
Pull out the pins and remove the body

**2.Install LED wire**  
(1) Plug the LED wire into the front bumper block. Then connect the LED wire to the connector on the ESC.  
(2) Plug the LED wire into the front bumper block. Then connect the LED wire to the connector on the ESC.

**3.Install Transmitter Batteries**  
1.Remove the battery cover on the bottom of the transmitter (Figure 1)  
2.Install 2\*1.5V AA batteries (not included) in correct polarities (Figure 2)  
3.Close the battery cover (Figure 3)

**Notice:**  
1. When installing batteries, please be sure to match the polarities labeled on the battery holder.  
2. Do not mix old and new batteries.  
3. Do not mix different type of batteries.

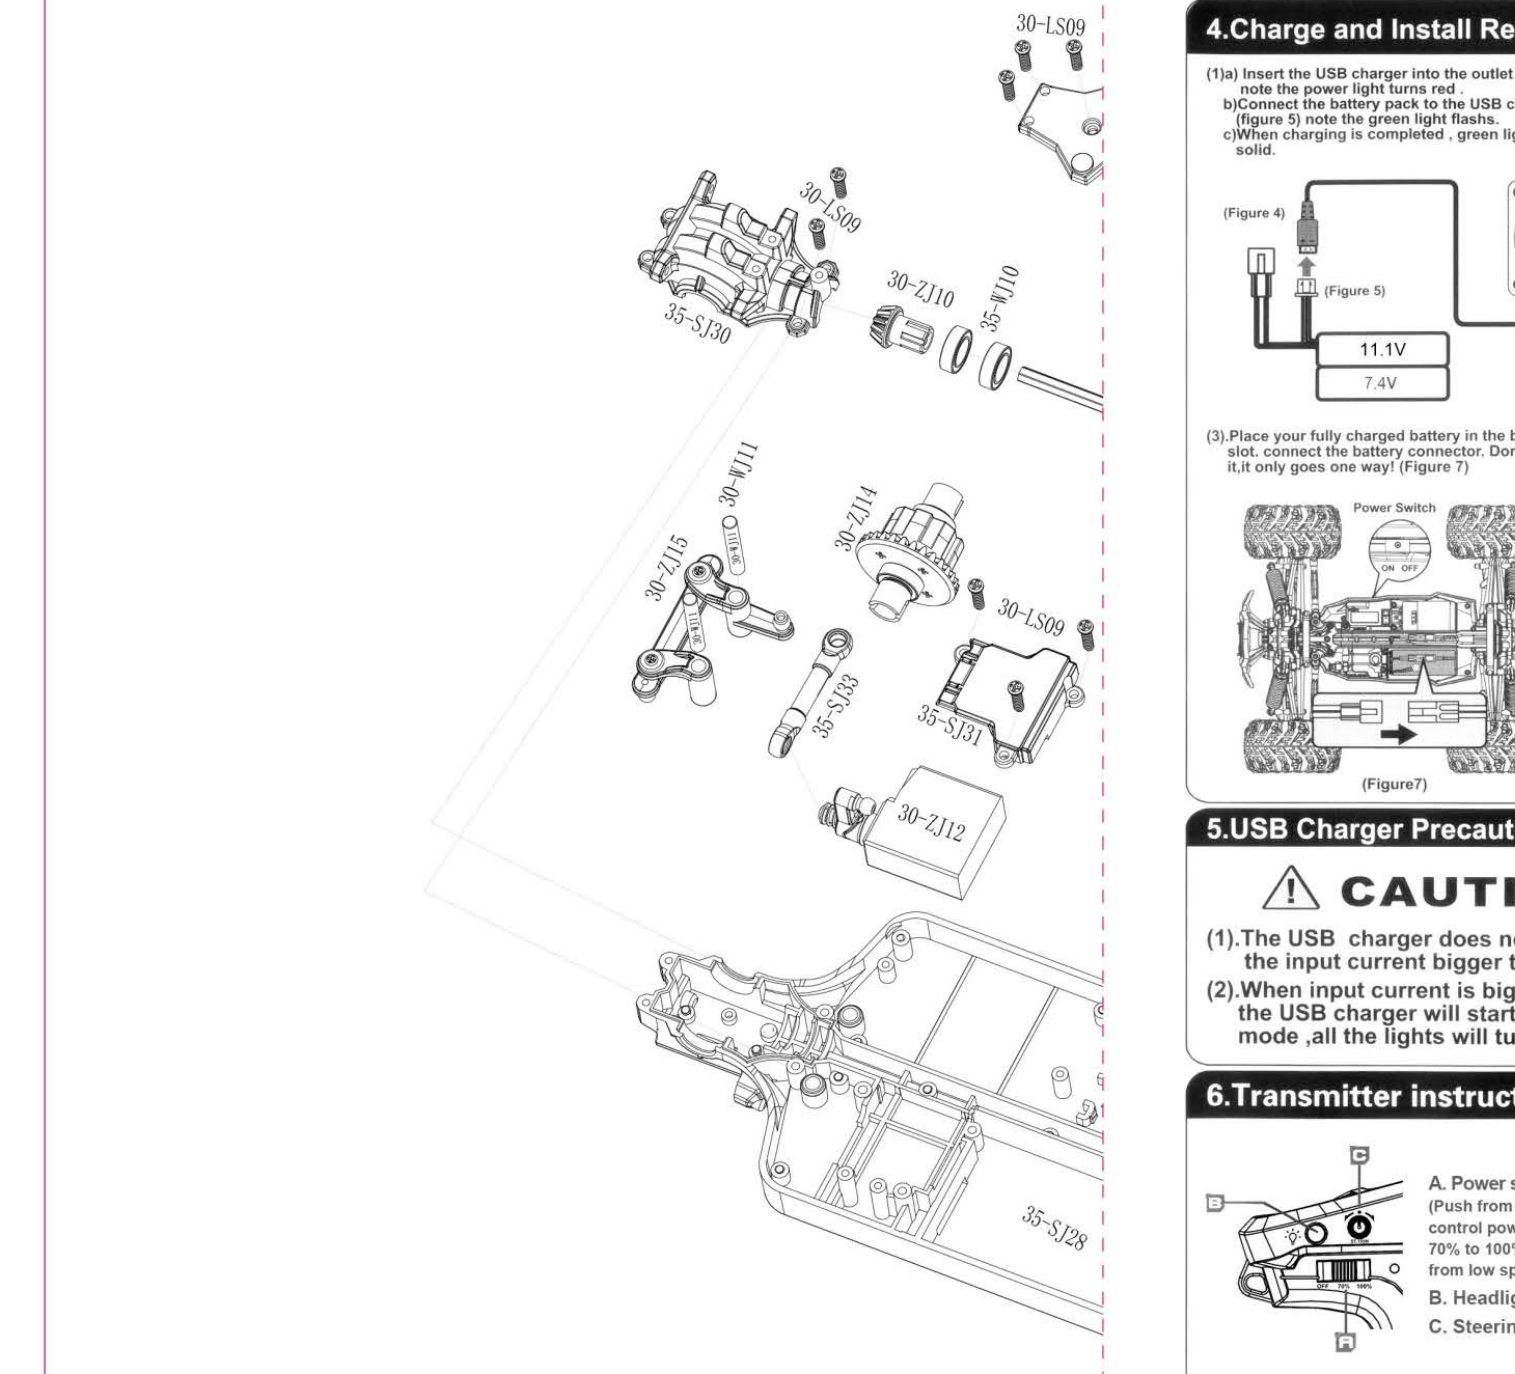

**4.Charge and Install Rechargeable Battery Pack**  
(1a) Insert the USB charger into the outlet (Figure 4)  
(1b) Connect the battery pack to the USB charger (Figure 5) note the green light flashes.  
(1c) When charging is completed, green light turns solid.  
(2) Loosen the latch of the battery cover on the chassis then remove it (Figure 6)  
(3) Place your fully-charged battery in the battery holder, correct the battery connector. Don't force it, it only goes one way (Figure 7)  
(4) Replace the battery cover, tighten the latch (Figure 8)

**5.USB Charger Precautions**  
**CAUTION**  
(1) The USB charger does not apply the input current bigger than 2.4A.  
(2) When input current is bigger than 2.4A, the USB charger will start-up protection mode, all the lights will turn off.

**6.Transmitter instructions**  
A. Power switch and Throttle trim  
(Push from OFF to 70%, remote control power on, push from 70% to 100%, remote control car from low speed to high speed)  
B. Headlight switch  
C. Steering trim

**7.Transmitter switch instructions**  
A. Power Switch  
For the first pairing, turn on the switch of the car and the remote control for frequency pairing. When the pairing is successful, the red LED on the car will also be on. The remote control will remain steady on, while the LED on the car will also be on.  
B. Steering Trim  
When the chassis switch is turned on and the front tires are not straight, use the ST TRIM to adjust the problem. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:  
C. Throttle trim  
SUGGEST: Please adjust the TH. Trim to the 70% speed when you play with the car for the first time to avoid damaging the car!

