


Dongguan Xunkai Electronics Co., Ltd.
Room 102, Building 2, Building 6, Sima Industrial Second Road,
Changping Town, Dongguan, Guangdong, China

Mark	Version	Change content	Date	Changer
	A	New version released	2022.03.06	goren

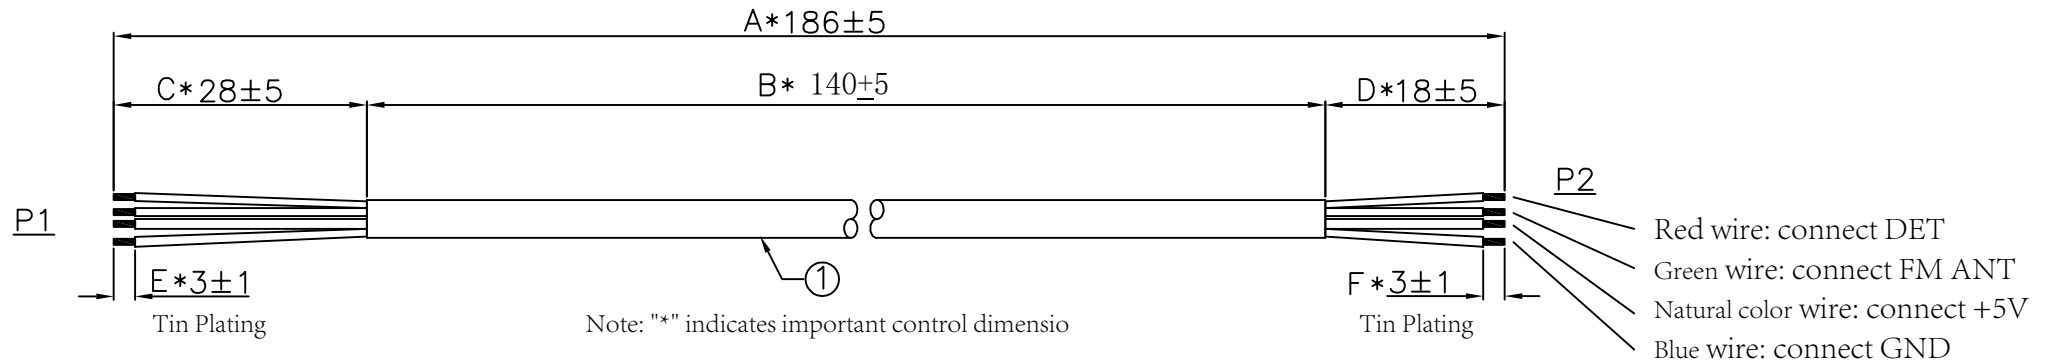

Requirement:

- The wires are free of dirt, stains, scratches, damage, color differences and other defects.
- Tin plating has no copper wire forks, tin tips, residual tin slag in the insulation layer and other defects.
- The dimensions are accurate and do not exceed the tolerance range.
- Electrical test: 100% continuity test, no short circuit, open circuit, misalignment, etc.
On-resistance: 2 MAX. Insulation resistance: 5M MIN.
Test voltage: DC300V.
- All materials comply with "RoHS" environmental standards.
Gain:0dBi
All measurements were performed radiated and therefore additional antenna gain documentation is not required.

①	Wire	Enameled wire (10*0.08mm)*2C (red,green)+(30*0.08mm)*2C (natural color, blue) Black TPE 70PA outer quilt;OD=2.0mm;L=186mm	1PCS	
Serial Number	Name	Specification	Dosage	Remark