

TEST REPORT

Applicant : Shenzhen SmartPet Technology Co., Ltd
Address : A2-301, Yingzhan Industry Zone, No.8 Longtian Tongfuyu Road,
Longtian Community, Longtian Street, Pingshan District, Shenzhen,
Guangdong, China

Manufacturer : Shenzhen SmartPet Technology Co., Ltd
Address : A2-301, Yingzhan Industry Zone, No.8 Longtian Tongfuyu Road,
Longtian Community, Longtian Street, Pingshan District, Shenzhen,
Guangdong, China

Product Name : Dog Training Collar

Model Number : VS10

Trademark : N/A

FCC ID : 2AYAF-VS10

Test Date : Jul. 23, 2026 to Aug. 03, 2026

Date of Report : Aug. 03, 2026

Test Result : This device described above has been tested by BKC, and the test results show that the equipment under test (EUT) is in compliance with the Standard requirements. And it is applicable only to the tested sample identified in the report.

Test Procedure Used:

Standards : FCC CFR Title 47 Part 15 Subpart C Section 15.231
ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to
C63.10a-2024
RSS-210 Issue 11, June 25, 2024
RSS-Gen Issue 5, Amendment 2 (February 2021)

Prepared by(Test Engineer):
Sten Huang

Sten Huang
Casey Wang

Approved(Manager):
Casey Wang

Approved(Manager):
Jerry Liao



TABLE OF CONTENT

1. General Information	4
1.1. Description of Device (EUT)	4
1.2. Channel List	4
1.3. Summary of test result	4
1.4. Special Accessories and Auxiliary Equipment	5
1.5. Test mode	5
1.6. Block Diagram	5
1.7. Test Conditions	5
1.8. Measurement Uncertainty (95% confidence levels, k=2)	6
1.9. Test Facility	6
1.10. Test Equipment	6
2. Conducted emission at the mains terminals test	8
2.1. Limit	8
2.2. Test Setup	8
2.3. Test Procedure	8
2.4. Test Result	9
3. Radiated Spurious Emissions	11
3.1. Limit	11
3.2. Test Setup	12
3.3. Test Procedure	14
3.4. Test Result	15
4. Bandwidth Test	18
4.1. Limit	18
4.2. Test Setup	18
4.3. Test Procedure	18
4.4. Test Result	18
5. Calculation of Average Factor	20
5.1. Calculation	20
6. Dwell time	21
6.1. Applicable Standard	21
6.2. Test Setup	21
6.3. Test Procedure	21
6.4. Test Result	22
7. Antenna Requirement	23
8. Test Photographs	24

Revision History of This Test Report

[illegible]

1. General Information

1.1. Description of Device (EUT)

EUT Name	:	Dog Training Collar
Model No.	:	VS10
Model Difference	:	N/A
Power supply	:	Transmitter:3.7V===300mAh Receiver: DC 3.7V
Operation frequency	:	433.92MHz
Max. RF output power:	:	71.60dBuV/m
Modulation	:	FSK
Antenna Type	:	Internal antenna, Maximum Gain is -17dBi
Intend use environment	:	Residential, commercial and light industrial environment

1.2.Channel List

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	433.92	/	/	/	/

1.3.Summary of test result

RF PART		
Test Items	Test Requirement	Result
Conducted Emission	15.207 RSS-Gen 8.8	PASS
Fundamental & Radiated Spurious Emission Measurement	15.209, 15.231b RSS-210 A.1.2 RSS-Gen 8.9	PASS
Occupy Bandwidth	15.231c RSS-210 A.1.3 RSS-Gen 6.7	PASS
Dwell time	15.231a RSS-210 A1.1 RSS-Gen 6.10	PASS
Antenna Requirement	15.203 RSS-Gen 6.8	PASS

Remark:
N/A is an abbreviation for Not Applicable.
Measurement Uncertainty is not taken into account for conformity statement

1.4.Special Accessories and Auxiliary Equipment

Description	Manufacturer	Model No.	Hardware Version	Software Version
/	/	/	/	/


1.5.Test mode

The special RF test software was used to control EUT work in Continuous TX mode, and select test channel, wireless mode.


Test mode	Low channel	Middle channel	High channel
FSK	433.92MHz	/	/
Note:			

1.6.Block Diagram


Conducted Emission



Radiated Emission



Conducted Spurious



1.7.Test Conditions

Category	Normal Conditions	Extreme Conditions
Temperature range	15-35℃	N/A
Humidity range	20-75%	N/A
Pressure range	86-106kPa	N/A
Power supply	Battery DC 3.7V	N/A
Note: N/A is an abbreviation for Not Applicable.		

1.8.Measurement Uncertainty (95% confidence levels, k=2)

Item	MU	Remark
Uncertainty for radio frequency	$\pm 7 \times 10^{-8}$	
Conducted Emissions (150kHz~30MHz)	$\pm 2.54\text{dB}$	
Radiated Emission(9KHz~30MHz)	$\pm 1.6\text{ dB}$	
Radiated Emission(30MHz~1GHz)	Vertical: $\pm 4.14\text{dB}$ Horizontal: $\pm 4.25\text{dB}$	
Radiated Emission(1GHz~6GHz)	$\pm 3.9\text{dB}$	
Radiated Emission(6GHz~18GHz)	$\pm 4.3\text{dB}$	
Radiated Emission(18GHz~40GHz)	$\pm 3.38\text{dB}$	
Uncertainty for conducted RF Power	$\pm 0.20\text{dB}$	
Conducted spurious emissions	$\pm 0.24\text{dB}$	
Uncertainty for temperature	0.6°C	
Uncertainty for humidity	1%	
Bandwidth	$\pm 1.5 \times 10^{-6}$	
Time	$\pm 2\%$	
Duty Cycle	$\pm 2\%$	

Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%

1.9.Test Facility

Site Description	
Name of Firm	: Shenzhen BKC Testing Co., Ltd.
Site Location	: Room103, 1/F, Huaya Building, Huaya Industrial Park, Yousong Community, Longhua Subdistrict, Longhua District, Shenzhen, Guangdong, China
ISED CAB identifier	: CN0188
ISED Company Number	: 34333
FCC Designation Number	: CN1416
FCC Test Firm Registration Number	: 701543

1.10.Test Equipment

Conducted Test Site

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	102762	Mar. 11. 2026	Mar. 10. 2027
2	EMI Test Receiver	R&S	ESCI	101424	Mar. 11. 2026	Mar. 10. 2027
3	Rf cables	HTEC	HCE 2M-CE	N/A	Mar. 11. 2026	Mar. 10. 2027
4	Coupling/ Decoupling Network	Diamond	CX210	N/A	Mar. 11. 2026	Mar. 10. 2027
5	CE Testing software	EZ	EZ-EMC	/	/	/

Radiated Test Site(Below 1G and Above 1G)

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Antenna	Schwarzbeck	VULB 9168	01321	Mar. 20. 2025	Mar. 19. 2028
2	EMI Test Receiver	R&S	ESRP	101478	Mar. 11. 2026	Mar. 10. 2027
3	Preamplifier	HP	8447D	2727A05345	Mar. 11. 2026	Mar. 10. 2027
4	Double Ridged Broadband	SCHWARZBECK	BBHA 9120D	02621	Mar. 11. 2026	Mar. 19. 2028
5	Preamplifier	Schwarzbeck	BBV 9718D	00041	Mar. 11. 2026	Mar. 10. 2027
6	Rf cables	HUBER+SUHNER	8M-RE	N/A	Mar. 11. 2026	Mar. 10. 2027
7	Rf cables	HUBER+SUHNER	1.5M-RE	N/A	Mar. 11. 2026	Mar. 10. 2027
8	Rf cables	HUBER+SUHNER	1.5M-AP-RE	N/A	Mar. 11. 2026	Mar. 10. 2027
9	Loop antenna	ANRF	ANRF-6603	091802	Mar. 09. 2025	Mar. 10. 2027
10	Spectrum analyzer	R&S	FSP40	200061	Mar. 11. 2026	Mar. 10. 2027
11	Double Ridged Broadband Horn Antenna	COM-POWER	AH-1840	10100009	Mar. 11. 2026	Mar. 10. 2027
12	Spectrum	Agilent	N9020A	MY50510311	Mar. 11. 2026	Mar. 10. 2027
13	Band Stop Filter	Bafang	BSF5G	2024052610	Mar. 11. 2026	Mar. 10. 2027
14	RE Testing software	EZ	EZ-EMC	/		/

RF Test Site

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum	Agilent	N9020A	MY50510311	Mar. 11. 2026	Mar. 10. 2027
2	Vector source	Agilent	N5182A	MY47420223	Mar. 11. 2026	Mar. 10. 2027
3	All instrument	Rohde & Schwarz	CMW 500	101131	Mar. 11. 2026	Mar. 10. 2027
4	control unit	MW	MW100-RFCB	MW200411BK-34	/	Mar. 10. 2027
5	RF Testing software	MW	MTS 8310	/	/	/
6	Spectrum analyzer	R&S	FSP40	200061	Mar. 11. 2026	Mar. 10. 2027

Test software

Software name	RF Testing software
Software version	2.0.0.0
Software name	RE Testing software
Software version	EMEC-03A2 RE+
Software name	CE Testing software
Software version	EMEC-3A1+

2. Conducted emission at the mains terminals test


2.1.Limit

Test Requirement:	FCC Part15 C Section 15.207, RSS-Gen 8.8
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

2.2.Test Setup

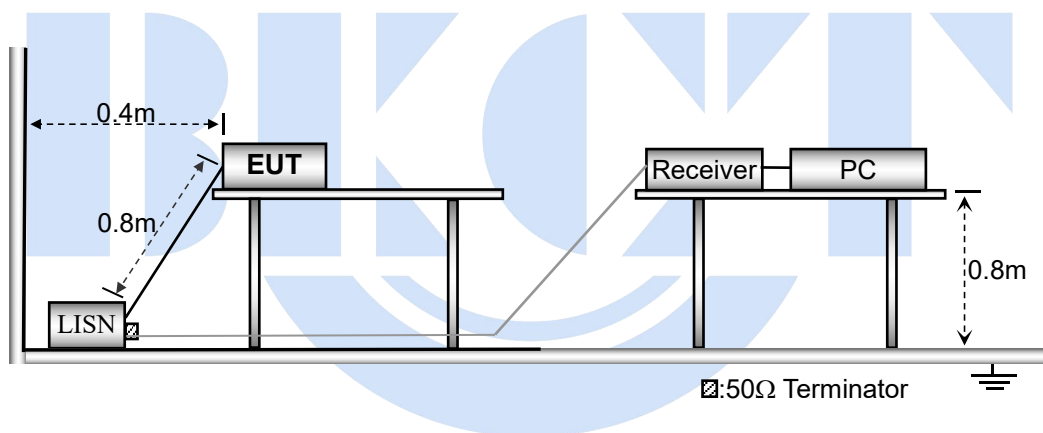


2.3.Test Procedure

1. The EUT was placed 0.1 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
2. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
3. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
4. LISN at least 80 cm from nearest part of EUT chassis.
5. For the actual test configuration, please refer to the related Item–EUT Test Photos.


2.4. Test Result

Conducted Emission At The Mains Terminals Test Data			
Temperature:	25.1℃	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Line
Test Voltage :	AC 120V/60Hz	Test Mode:	Charging Mode

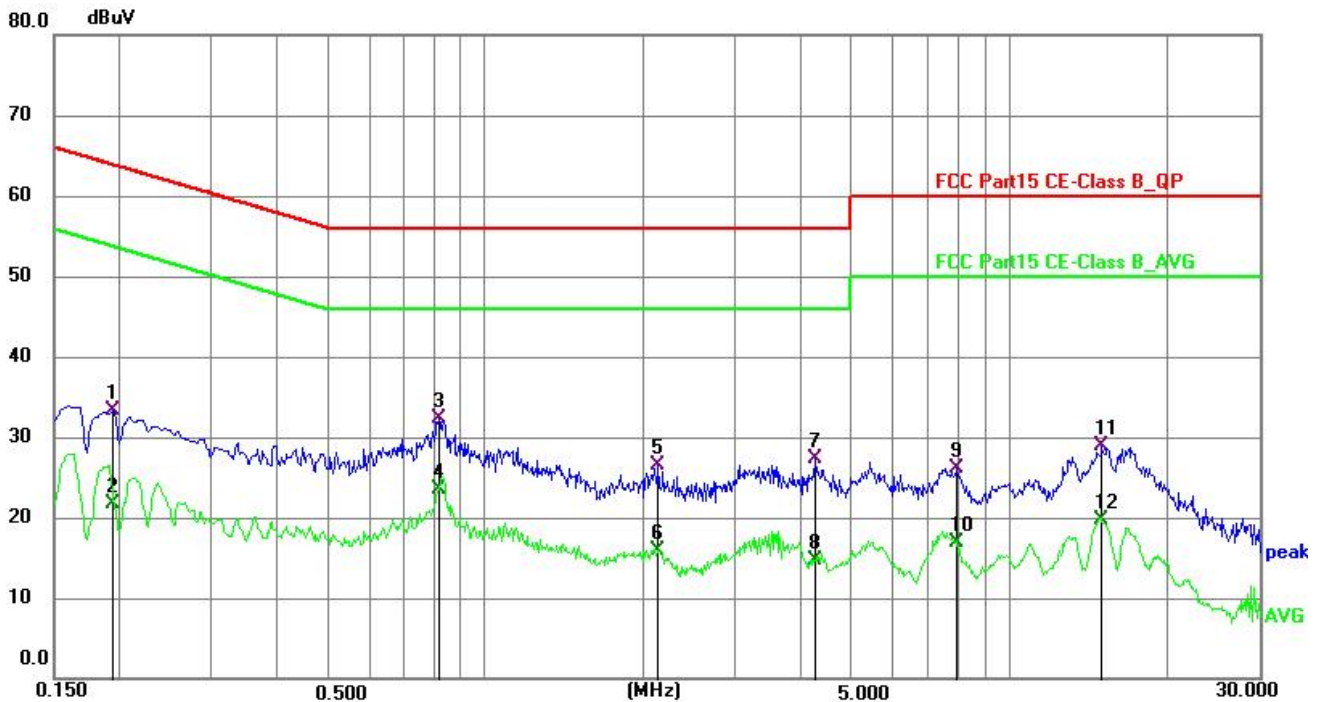

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1949	23.47	9.81	33.28	63.83	-30.55	QP	P	
2	0.1949	11.99	9.81	21.80	53.83	-32.03	AVG	P	
3	0.8160	22.51	9.76	32.27	56.00	-23.73	QP	P	
4 *	0.8160	13.77	9.76	23.53	46.00	-22.47	AVG	P	
5	2.1345	16.67	9.76	26.43	56.00	-29.57	QP	P	
6	2.1345	6.05	9.76	15.81	46.00	-30.19	AVG	P	
7	4.2540	17.45	9.81	27.26	56.00	-28.74	QP	P	
8	4.2540	4.91	9.81	14.72	46.00	-31.28	AVG	P	
9	7.9620	16.43	9.77	26.20	60.00	-33.80	QP	P	
10	7.9620	7.23	9.77	17.00	50.00	-33.00	AVG	P	
11	15.0450	19.21	9.75	28.96	60.00	-31.04	QP	P	
12	15.0450	9.86	9.75	19.61	50.00	-30.39	AVG	P	

Conducted Emission At The Mains Terminals Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Neutral
Test Voltage :	AC 120V/60Hz	Test Mode:	Charging Mode

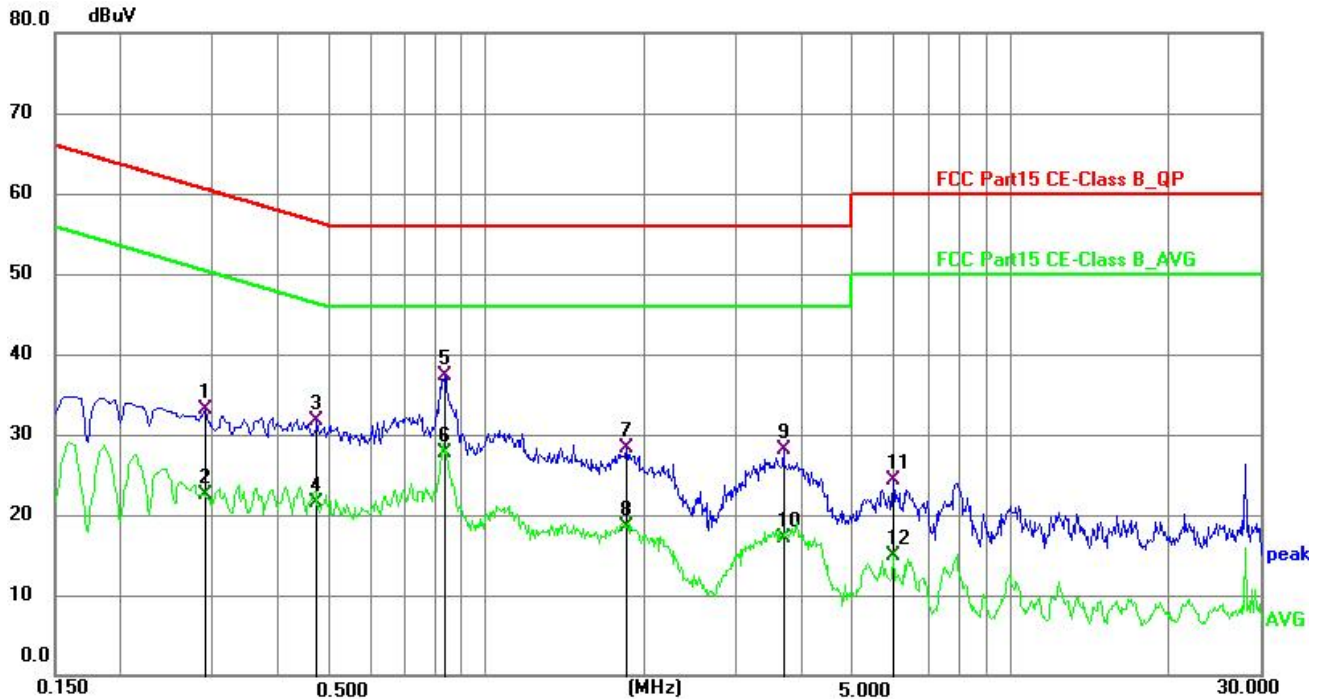

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2894	23.34	9.71	33.05	60.54	-27.49	QP	P	
2	0.2894	12.85	9.71	22.56	50.54	-27.98	AVG	P	
3	0.4739	21.91	9.70	31.61	56.45	-24.84	QP	P	
4	0.4739	11.82	9.70	21.52	46.45	-24.93	AVG	P	
5	0.8339	27.69	9.69	37.38	56.00	-18.62	QP	P	
6 *	0.8339	17.94	9.69	27.63	46.00	-18.37	AVG	P	
7	1.8509	18.63	9.69	28.32	56.00	-27.68	QP	P	
8	1.8509	8.76	9.69	18.45	46.00	-27.55	AVG	P	
9	3.6869	18.41	9.73	28.14	56.00	-27.86	QP	P	
10	3.6869	7.47	9.73	17.20	46.00	-28.80	AVG	P	
11	5.9684	14.61	9.72	24.33	60.00	-35.67	QP	P	
12	5.9684	5.27	9.72	14.99	50.00	-35.01	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor, Margin= Emission Level - Limit

3. Radiated Spurious Emissions

3.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.209,15.231(b), RSS-210 A.1.2, RSS-Gen 8.9

Test Method: ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

Test Result: PASS

Measurement Distance: 3m

Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log(2400/F(\text{kHz})) + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log(24000/F(\text{kHz})) + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log(30) + 40$
30 ~ 88	100	3	100	$20\log(100)$
88 ~ 216	150	3	150	$20\log(150)$
216 ~ 960	200	3	200	$20\log(200)$
Above 960	500	3	500	$20\log(500)$

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	¹ 1,250 to 3,750	¹ 125 to 375
174-260	3,750	375
260-470	¹ 3,750 to 12,500	¹ 375 to 1,250
Above 470	12,500	1,250

¹ Linear interpolations.


The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in § 15.209,

whichever limit permits a higher field strength.


3.2. Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

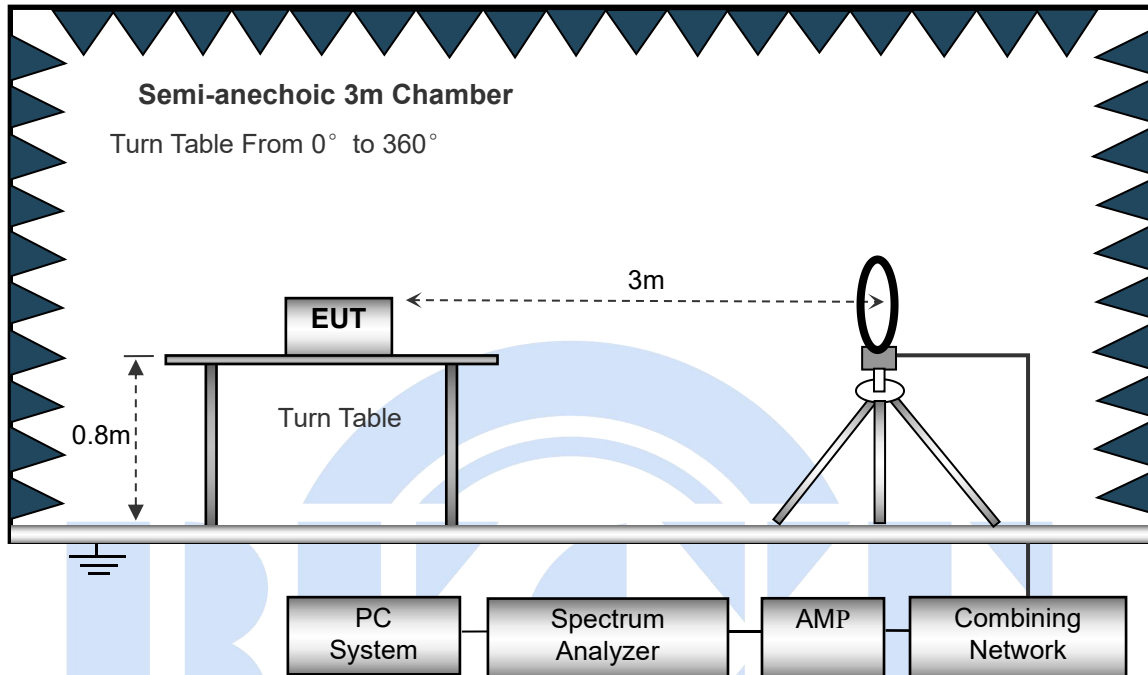

The test setup for emission measurement from 30 MHz to 1 GHz.

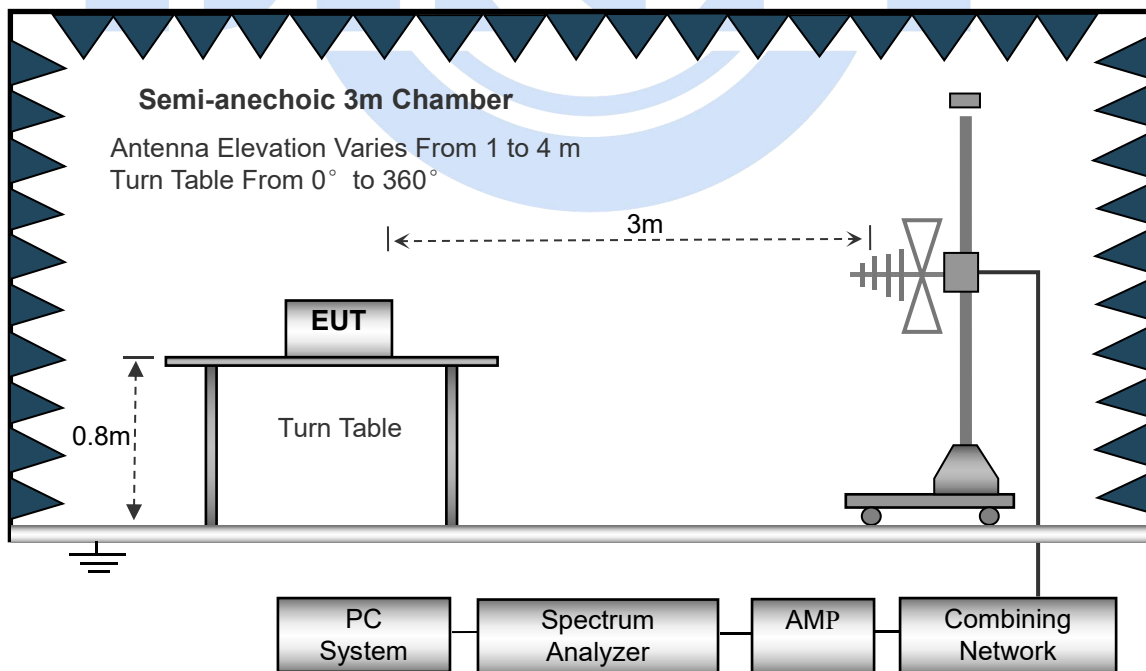

The test setup for emission measurement above 1 GHz.

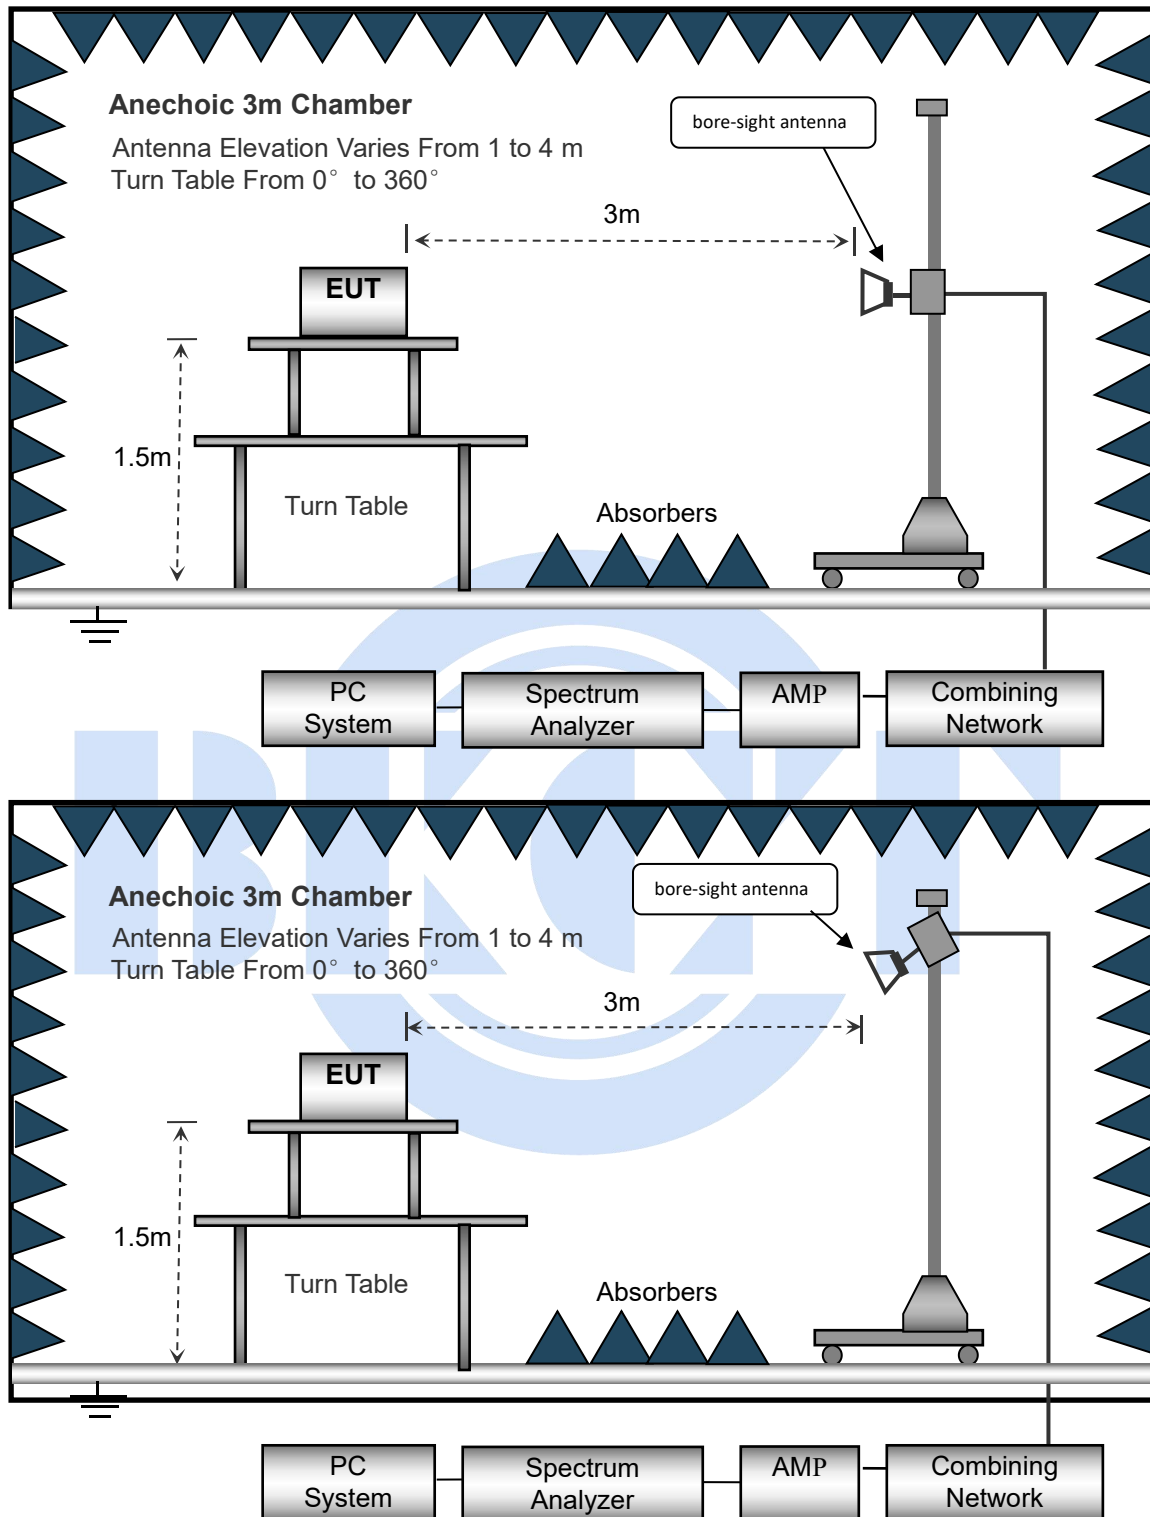

3.3. Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.




3.4. Test Result

Test Frequency: 9KHz~30MHz

The measurements were more than 20 dB below the limit and not reported.


Test Frequency : 30MHz ~ 1GHz

Radiation Emission Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Horizontal
Test Voltage :	DC 3.7V	Test Mode	Transmitting

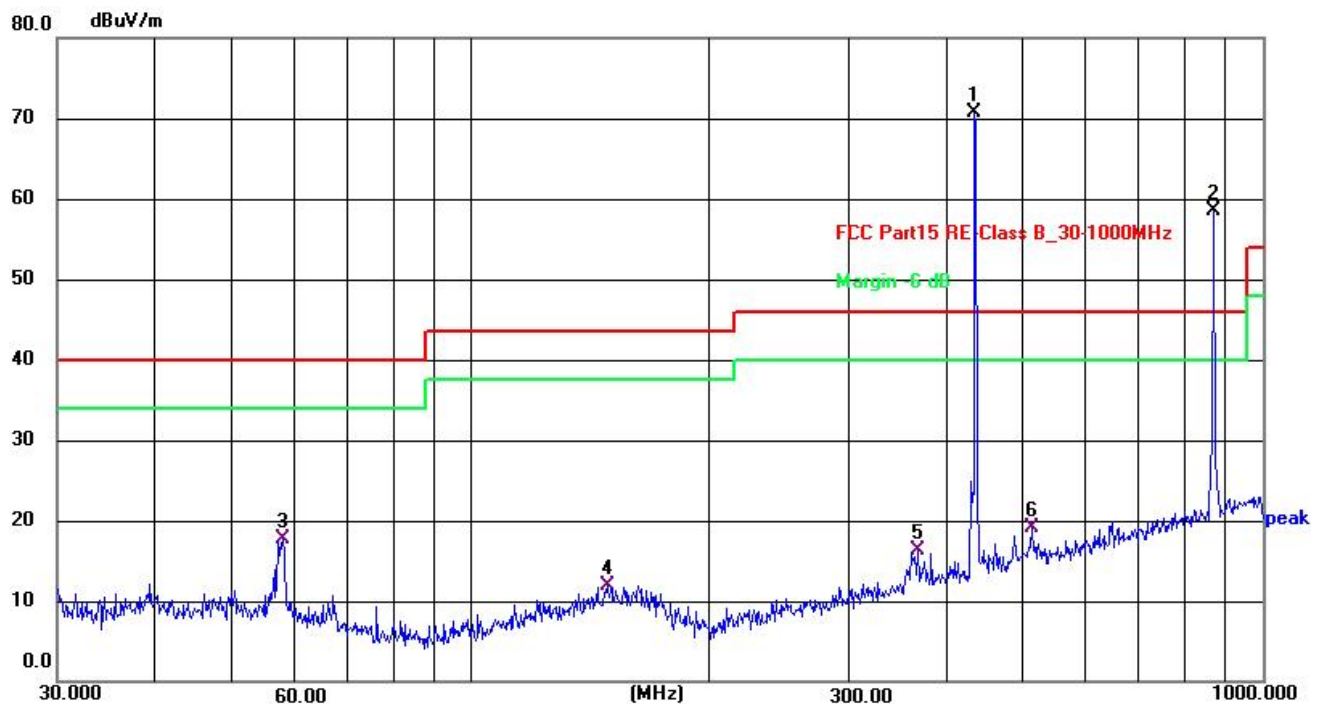

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	433.9130	83.19	-12.41	70.78	100.80	-30.02	peak
2 X	867.9120	64.35	-5.78	58.57	80.80	-22.23	peak
3	57.9180	34.56	-16.88	17.68	40.00	-22.32	QP
4	148.5451	27.07	-15.08	11.99	43.50	-31.51	QP
5	367.0804	30.16	-13.82	16.34	46.00	-29.66	QP
6	511.2970	30.60	-11.40	19.20	46.00	-26.80	QP

Radiation Emission Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Vertical
Test Voltage :	DC 3.7V	Test Mode	Transmitting

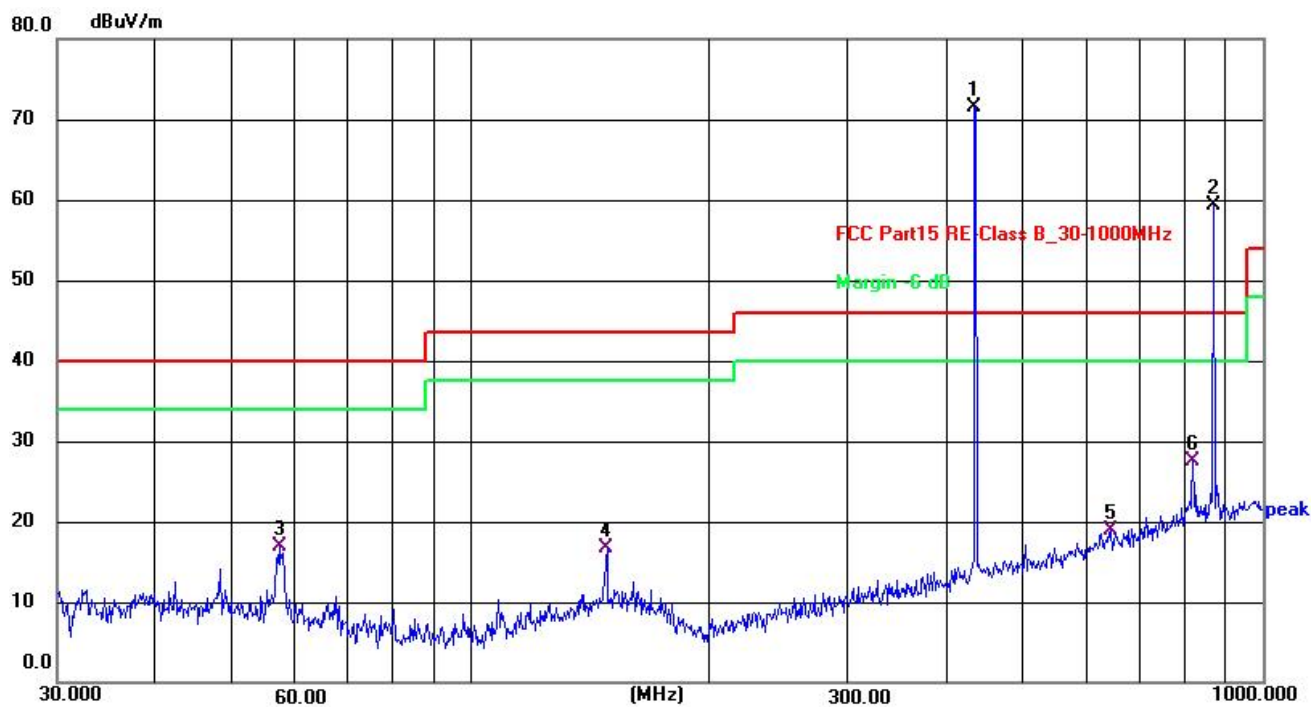

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	433.9130	84.01	-12.41	71.60	100.80	-29.20	peak
2 X	867.9120	65.11	-5.78	59.33	80.80	-21.47	peak
3	57.3721	33.65	-16.83	16.82	40.00	-23.18	QP
4	148.4929	31.81	-15.09	16.72	43.50	-26.78	QP
5	643.0865	27.73	-8.87	18.86	46.00	-27.14	QP
6	815.9678	33.93	-6.44	27.49	46.00	-18.51	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.

For average Emission

Frequency MHz	Peak Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit AV	Margin	Polarization
433.92	70.78	0	70.78	80.8	-10.12	Horizontal
867.84	58.57	0	58.57	60.8	-2.33	Horizontal

Frequency MHz	Peak Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit AV	Margin	Polarization
433.92	71.60	0	71.60	80.8	-9.3	Vertical
867.84	59.33	0	59.33	60.8	-1.57	Vertical

Notes: 1. Average emission Level = Peak Level + Duty cycle factor

2. Duty cycle level please see clause 5.

Radiated Spurious Emission (1GHz to 10th harmonics)

Frequency MHz	Peak Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit		Margin dB		Polarization
				PK	AV	PK	AV	
1301.68	43.34	0	43.34	74	54	-30.66	-10.66	Vertical
1735.67	43.79	0	43.79	80.8	60.8	-37.01	-17.01	Vertical
2169.16	42.71	0	42.71	80.8	60.8	-38.09	-18.09	Vertical
2603.22	43.96	0	43.96	80.8	60.8	-36.84	-16.84	Vertical
3037.83	44.47	0	44.47	80.8	60.8	-36.33	-16.33	Vertical
3471.93	41.63	0	41.63	80.8	60.8	-39.17	-19.17	Vertical
1301.26	39.72	0	39.72	74	54	-34.28	-14.28	Horizontal
1735.31	39.94	0	39.94	80.8	60.8	-40.86	-20.86	Horizontal
2169.61	39.74	0	39.74	80.8	60.8	-41.06	-21.06	Horizontal
2603.77	41.68	0	41.68	80.8	60.8	-39.12	-19.12	Horizontal
3037.56	41.66	0	41.66	80.8	60.8	-39.14	-19.14	Horizontal
3471.70	39.88	0	39.88	80.8	60.8	-40.92	-20.92	Horizontal

Notes: 1.Average emission Level = Peak Level + Duty cycle factor

2.Duty cycle level please see clause 5.

4. Bandwidth Test

4.1.Limit


Test Requirement: FCC CFR47 Part 15 Section 15.231(c)
 ,RSS-210 A1.1, RSS-Gen 6.7
Test Method: ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to
 C63.10a-2024
Test Result: PASS

Limit:

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating between 70 MHz to 900 MHz. Those devices operating above 900 MHz, the emission spurious shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

B.W (20dBc) Limit = $0.25\% * f(\text{MHz}) = 0.25\% * 433.92\text{MHz} = 1.085\text{MHz}$

4.2.Test Setup

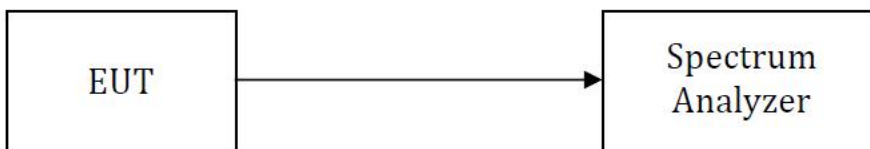


4.3.Test Procedure

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	1-5%OBW
VB	≥RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.Test Result

Frequency	20dB Bandwidth (KHz)	Limit (MHz)	Result
433.92MHz	54.79	1.085	PASS

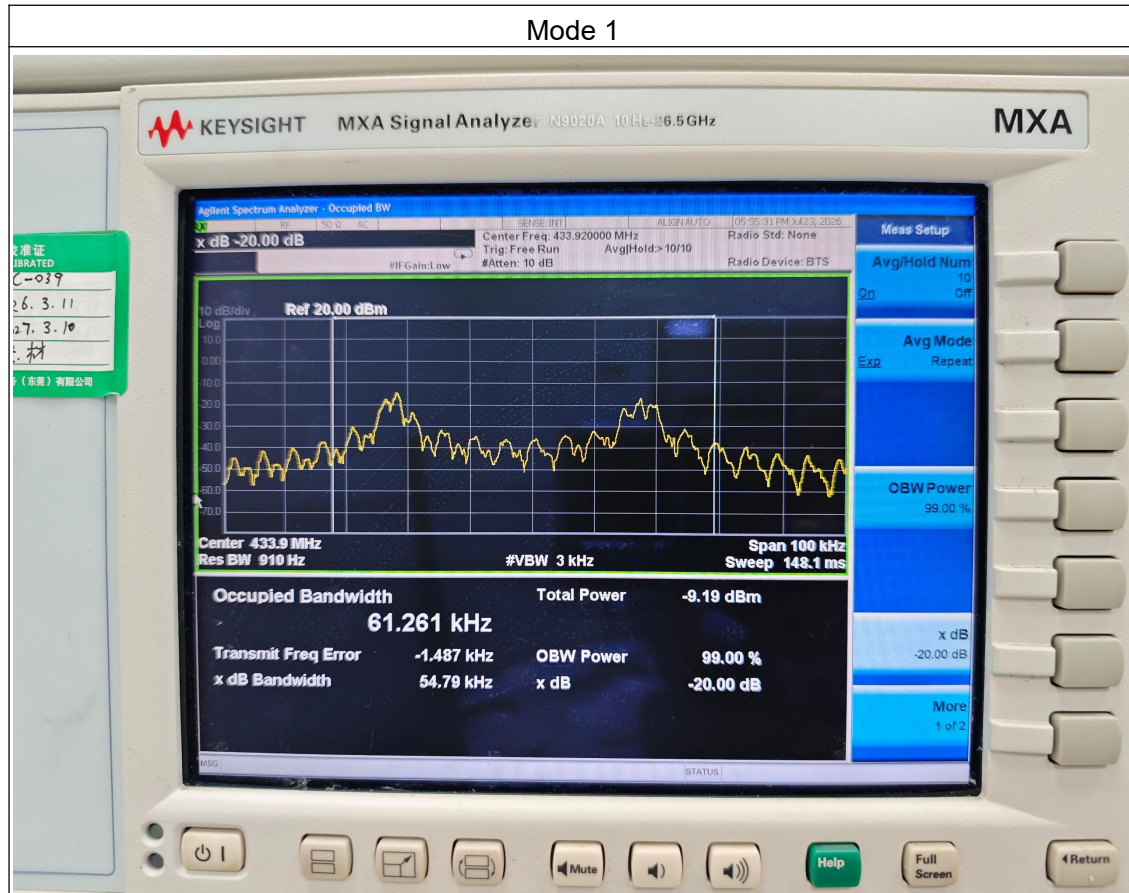

5. Calculation of Average Factor

5.1.Calculation

The output field strengths of specification in accordance with the FCC rules specify measurements with an average detector. During the test, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.

The duty cycle is measured in 100 ms or the repetition cycle period, whichever is a shorter time frame. The duty cycle is measured by placing the spectrum analyzer to set zero span at 1MHz resolution bandwidth.

Averaging factor in dB = $20\log(\text{duty cycle})$

The duration of one cycle = 51.40ms

The duty cycle is simply the on-time divided the duration of one cycle

Duty Cycle

= 100ms / 100ms

= 1


Therefore, the averaging factor is found by $20\log 1 = 0\text{dB}$

Test plot as follows:

Note: During the 100ms, the amount of pulse and on-time of pulse are the same for every pulse train.

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage :	DC 3.7V
Test Mode :	TX Mode		

Cycle

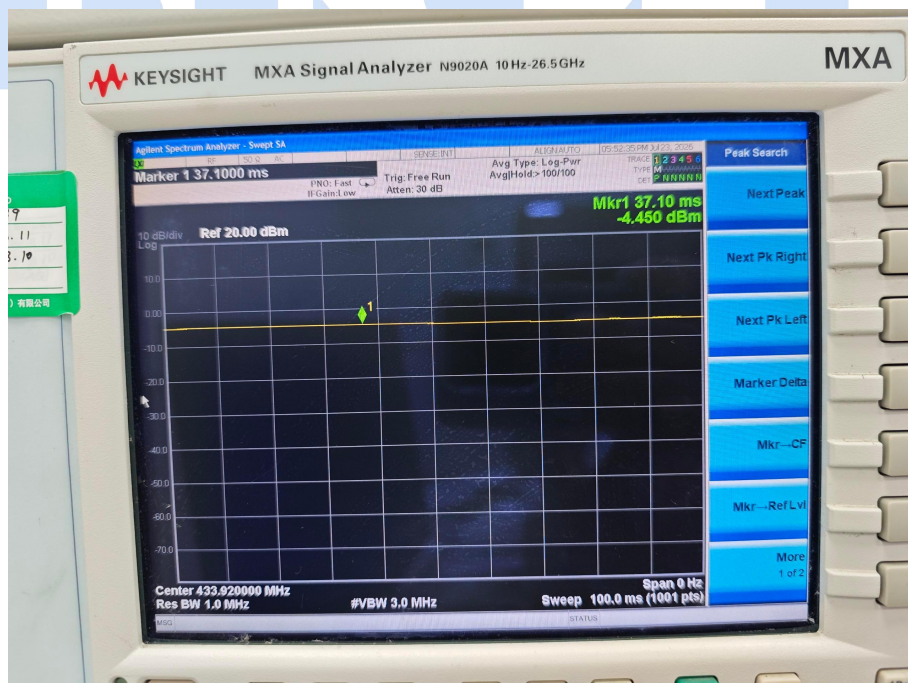


6. Dwell time

6.1.Applicable Standard

According to FCC 15.231(a) and RSS-210 A1.1 requirement:

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

6.2.Test Setup



6.3.Test Procedure


Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

- 1.Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- 2.Set RBW to 1MHz and VBW of spectrum analyzer to 3MHz with a convenient frequency span including 100 KHz bandwidth from band edge.
- 3.Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 4.Repeat above procedures until all measured frequencies were complete.

6.4. Test Result

Dwell time (second)	Limit (second)	Result
0.39s	<5s	Pass

Test plot as follows:

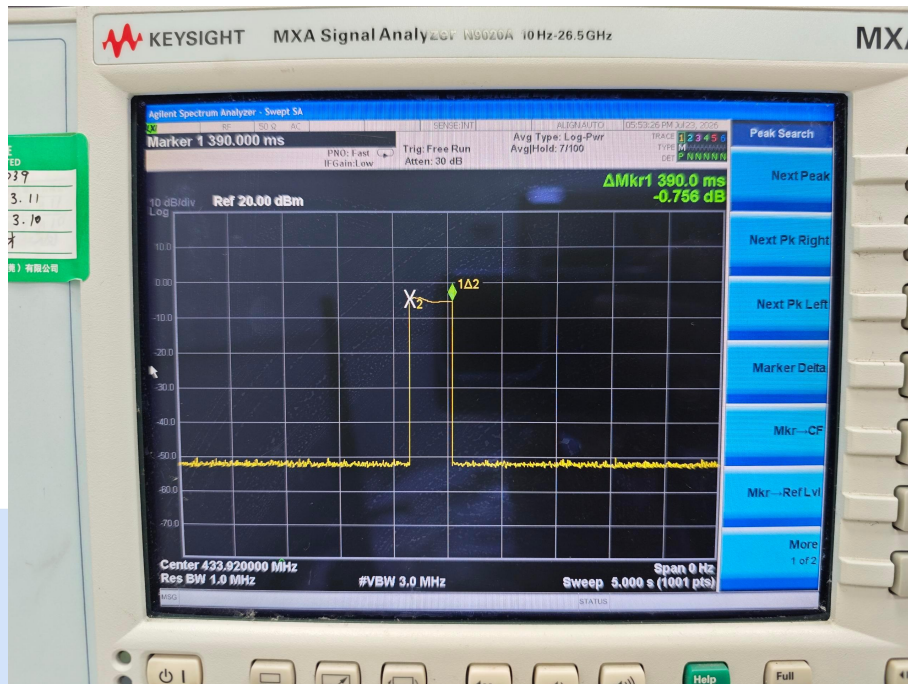

7. Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.

According to the RSS-Gen Section 7.1.2, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.

This product has an Internal antenna, and the maximum antenna gain is -17dBi, fulfill the requirement of this section.



8. Test Photographs

Please see the attachment for BKC26074337GE-3.

Appendix I: Photos of the EUT

Please see the attachment for BKC26074337GE-4/BKC26074337GE-5.

***** END OF REPORT *****

