
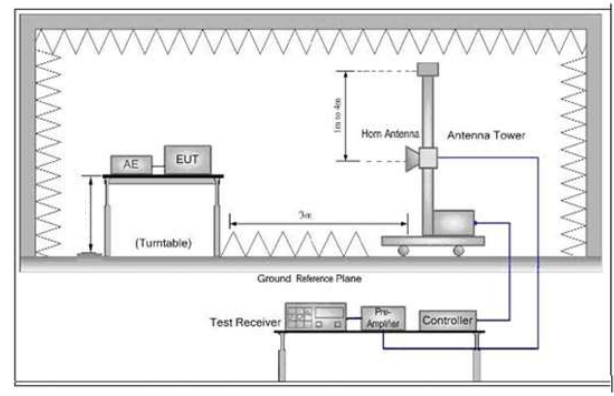
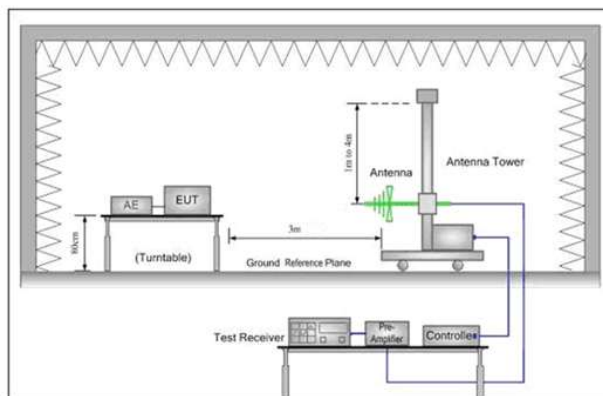


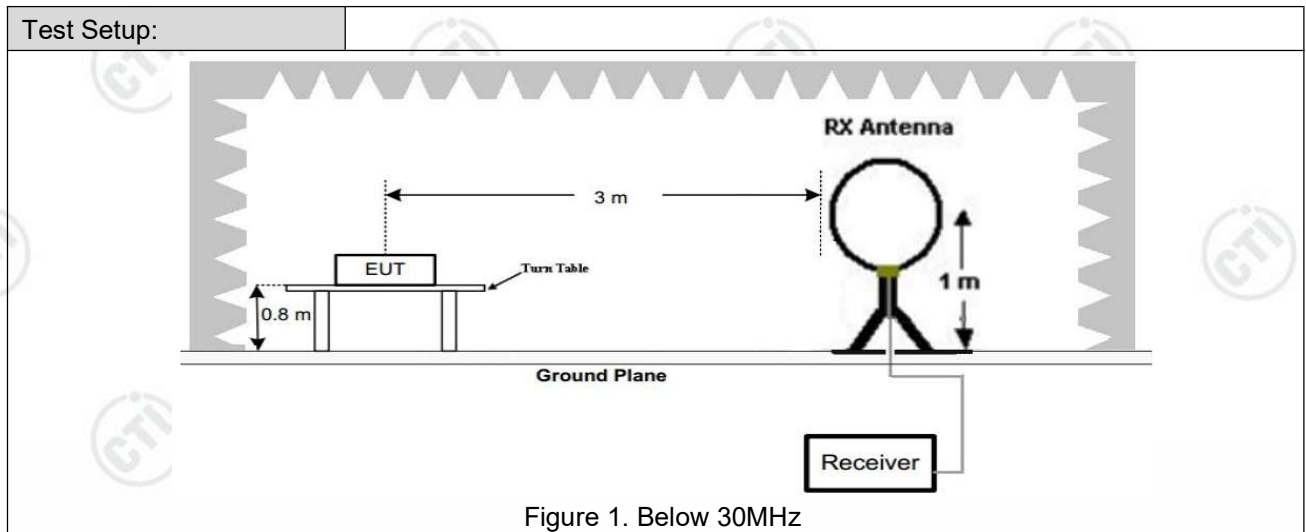

Test Procedure:

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both


	horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz) h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Refer to clause 3.3
Test Results:	Pass

Radiated Spurious Emission below 1GHz:

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes, only the worst case lowest channel of 1Mbps for 802.11b was recorded in the report.

Test Graph


Horizontal:

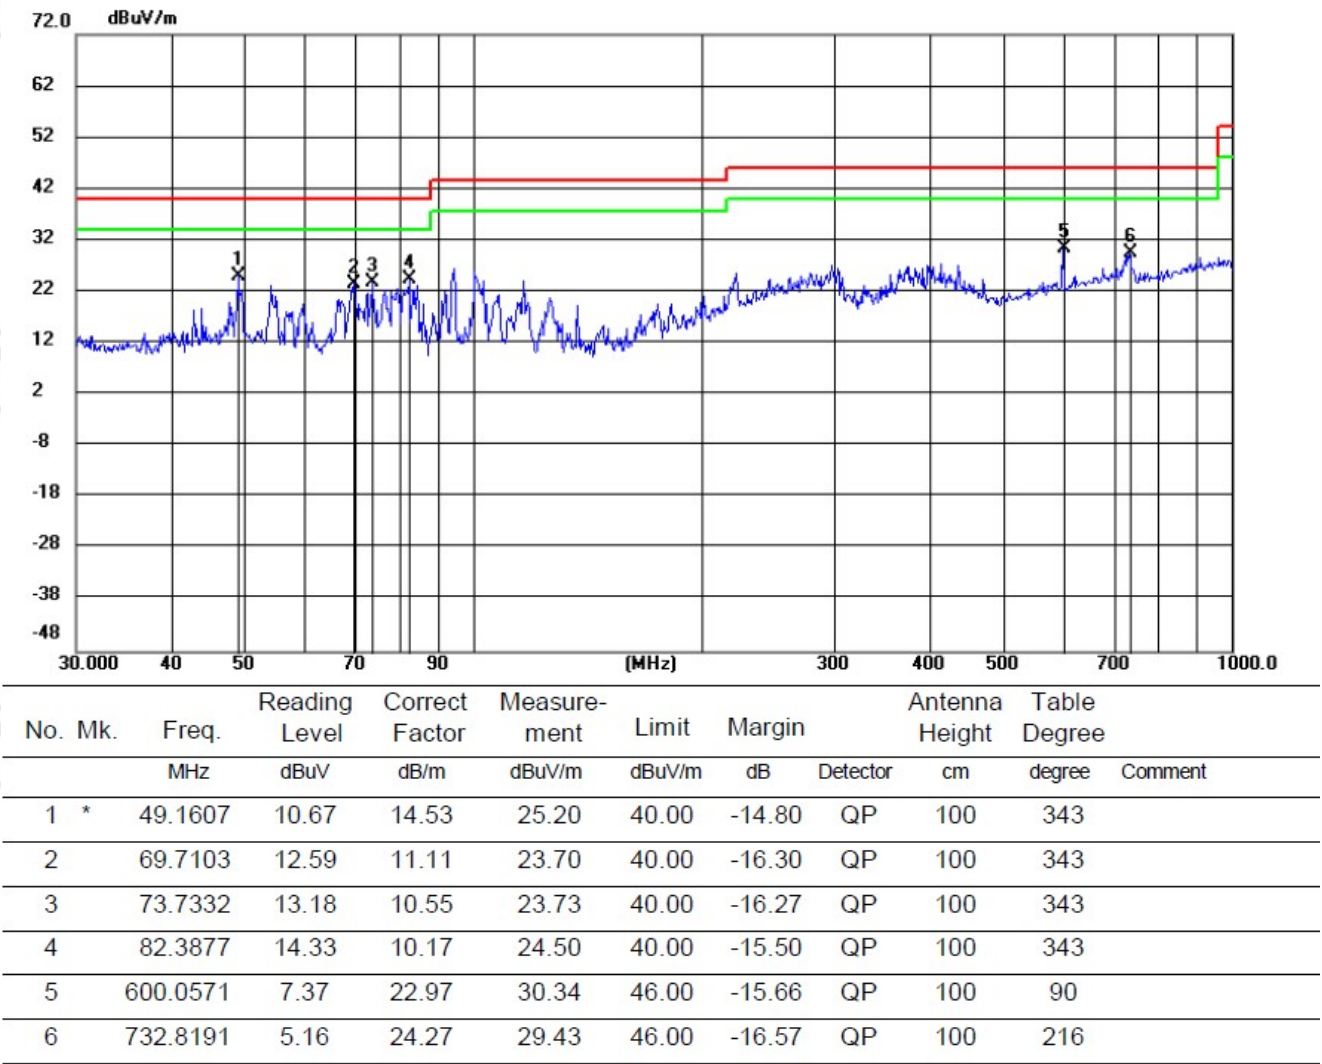

Remark:

1. $\text{Margin} = \text{Measurement}(\text{Level}) - \text{Limit}$.
2. $\text{Measurement}(\text{Level}) = \text{Reading Level} + \text{Correct Factor}$.
3. In the test results, an asterisk (*) indicates Maximum Data, a cross (X) indicates over Limit, an exclamation mark (!) indicates over -6dB margin Limit.

Vertical:

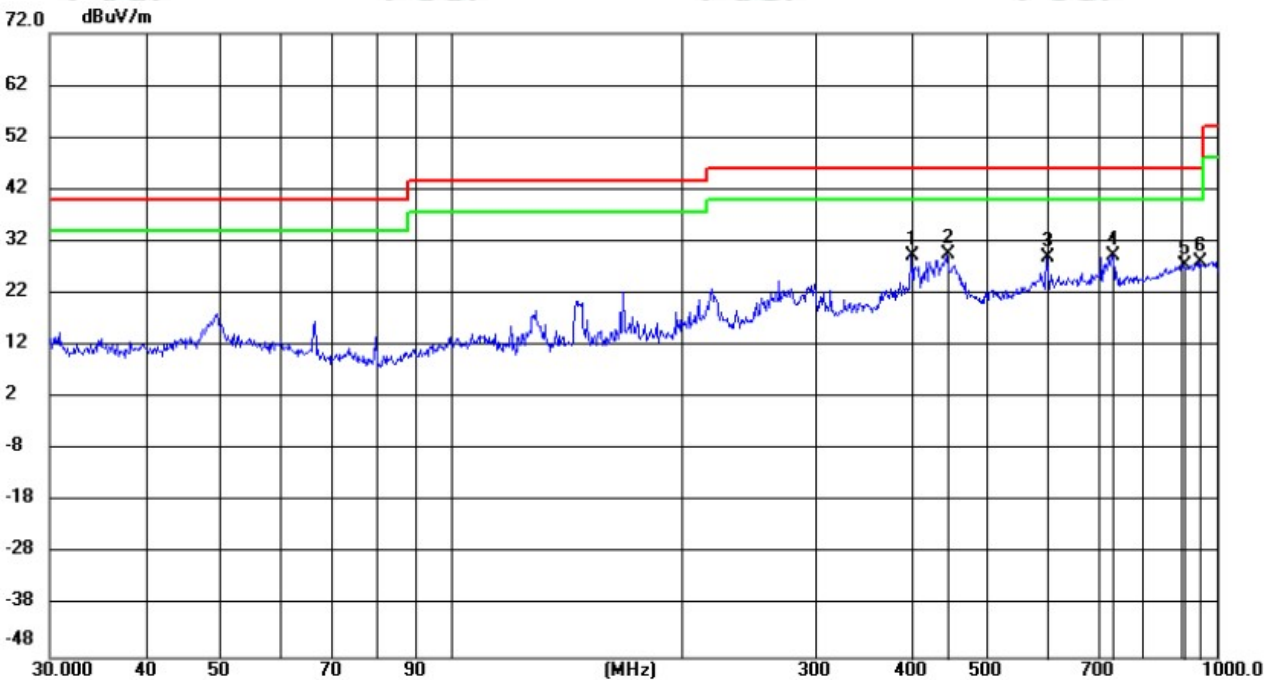

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		399.8706	9.66	19.49	29.15	46.00	-16.85	QP	100	159
2	*	445.5540	9.71	19.93	29.64	46.00	-16.36	QP	100	159
3		600.0573	5.96	22.97	28.93	46.00	-17.07	QP	100	176
4		730.7663	5.08	24.26	29.34	46.00	-16.66	QP	100	184
5		904.8945	0.56	27.00	27.56	46.00	-18.44	QP	100	99
6		952.0937	0.80	27.25	28.05	46.00	-17.95	QP	100	108

Remark:


1. $\text{Margin} = \text{Measurement}(\text{Level}) - \text{Limit}$.
2. $\text{Measurement}(\text{Level}) = \text{Reading Level} + \text{Correct Factor}$.
3. In the test results, an asterisk (*) indicates Maximum Data, a cross (X) indicates over Limit, an exclamation mark (!) indicates over -6dB margin Limit.

Radiated Spurious Emission above 1GHz:

Remark: Through Pre-scan, for SISO model (Antenna 1) was the worst case; only the worst case was in the report.

Test_Mode	802.11 b Transmitting	Test_Frequency	2412MHz
Remark:	/	Test_Date	2026/6/11


Test Graph

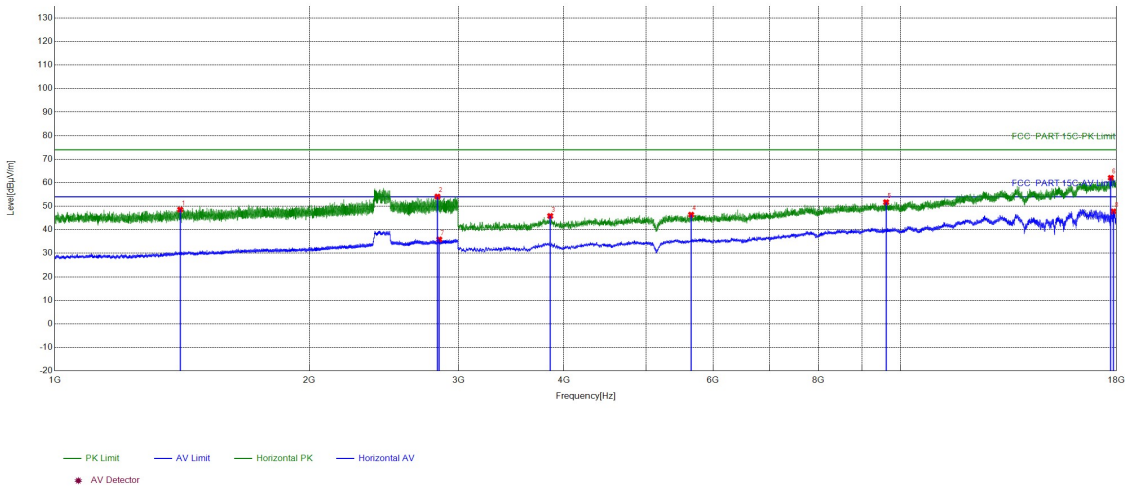

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1406.8271	12.88	35.68	48.56	74.00	25.44	PASS	Horizontal	PK
2	2834.5223	17.38	36.72	54.10	74.00	19.90	PASS	Horizontal	PK
3	3853.0569	-12.07	57.92	45.85	74.00	28.15	PASS	Horizontal	PK
4	5655.177	-6.26	52.66	46.40	74.00	27.60	PASS	Horizontal	PK
5	9615.441	1.35	50.36	51.71	74.00	22.29	PASS	Horizontal	PK
6	17727.9819	16.30	45.77	62.07	74.00	11.93	PASS	Horizontal	PK
7	2848.3899	17.33	18.56	35.89	54.00	18.11	PASS	Horizontal	AV
8	17852.9902	16.02	31.79	47.81	54.00	6.19	PASS	Horizontal	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2412MHz
Remark:	/	Test_Date	2026/6/11

Test Graph

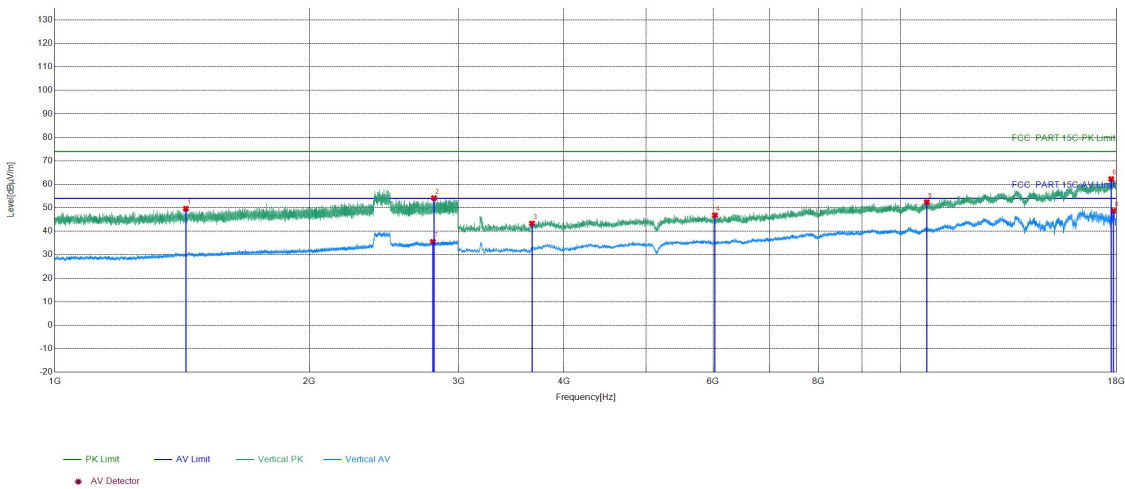

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1428.8286	12.90	36.70	49.60	74.00	24.40	PASS	Vertical	PK
2	2808.1205	17.26	36.88	54.14	74.00	19.86	PASS	Vertical	PK
3	3666.0444	-12.83	56.17	43.34	74.00	30.66	PASS	Vertical	PK
4	6033.2022	-5.14	51.98	46.84	74.00	27.16	PASS	Vertical	PK
5	10742.5162	2.34	50.08	52.42	74.00	21.58	PASS	Vertical	PK
6	17749.9833	16.89	45.36	62.25	74.00	11.75	PASS	Vertical	PK
7	2799.5866	17.24	18.32	35.56	54.00	18.44	PASS	Vertical	AV
8	17858.9906	15.88	32.81	48.69	54.00	5.31	PASS	Vertical	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2412MHz
Remark:	/	Test_Date	2026/6/11


Test Graph



Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18847.3139	-26.29	62.10	35.81	74.00	38.19	PASS	Horizontal	PK
2	20014.2406	-24.68	61.04	36.36	74.00	37.64	PASS	Horizontal	PK
3	21076.4431	-25.90	61.43	35.53	74.00	38.47	PASS	Horizontal	PK
4	22182.1673	-25.44	60.57	35.13	74.00	38.87	PASS	Horizontal	PK
5	23590.8436	-23.08	58.75	35.67	74.00	38.33	PASS	Horizontal	PK
6	24903.6361	-22.05	56.91	34.86	74.00	39.14	PASS	Horizontal	PK

Test_Mode	802.11 b Transmitting	Test_Frequency	2412MHz
Remark:	/	Test_Date	2026/6/11


Test Graph

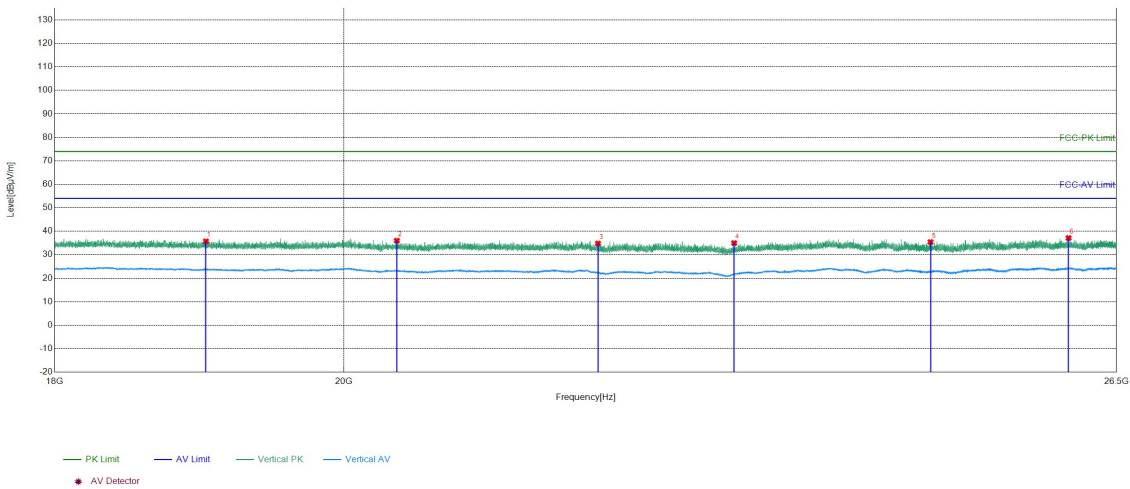

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	19019.0208	-26.25	61.97	35.72	74.00	38.28	PASS	Vertical	PK
2	20388.5955	-25.48	61.47	35.99	74.00	38.01	PASS	Vertical	PK
3	21939.0576	-25.72	60.50	34.78	74.00	39.22	PASS	Vertical	PK
4	23054.9822	-25.29	60.28	34.99	74.00	39.01	PASS	Vertical	PK
5	24764.9106	-21.94	57.37	35.43	74.00	38.57	PASS	Vertical	PK
6	26042.0017	-20.99	58.11	37.12	74.00	36.88	PASS	Vertical	PK

Test_Mode	802.11 b Transmitting	Test_Frequency	2437MHz
Remark:	/	Test_Date	2026/6/11


Test Graph

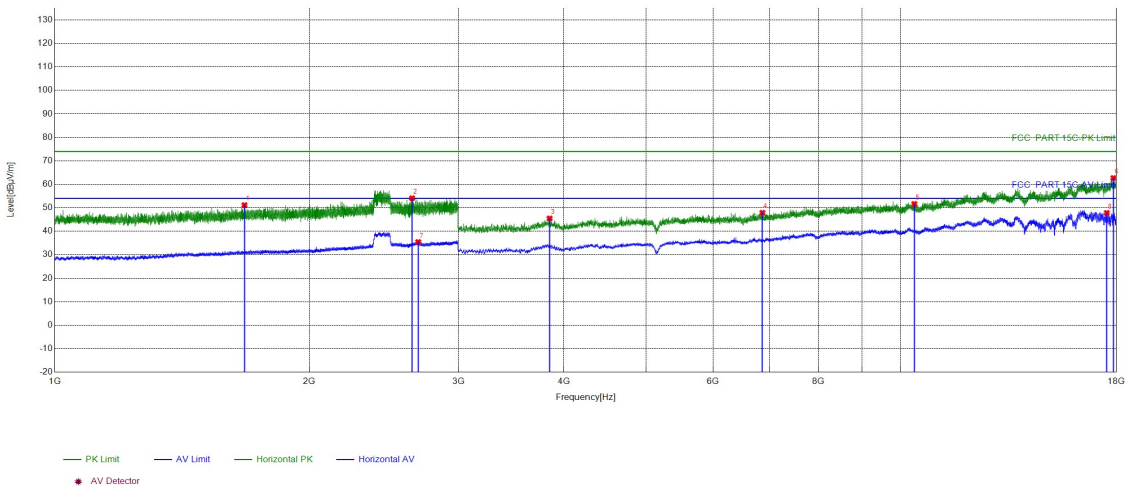

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1675.9117	14.03	37.10	51.13	74.00	22.87	PASS	Horizontal	PK
2	2645.1763	16.85	37.23	54.08	74.00	19.92	PASS	Horizontal	PK
3	3846.0564	-12.11	57.58	45.47	74.00	28.53	PASS	Horizontal	PK
4	6866.2578	-3.53	51.43	47.90	74.00	26.10	PASS	Horizontal	PK
5	10383.4922	1.88	49.76	51.64	74.00	22.36	PASS	Horizontal	PK
6	17851.9901	16.04	46.63	62.67	74.00	11.33	PASS	Horizontal	PK
7	2689.7126	17.24	18.20	35.44	54.00	18.56	PASS	Horizontal	AV
8	17533.9689	13.69	34.12	47.81	54.00	6.19	PASS	Horizontal	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2437MHz
Remark:	/	Test_Date	2026/6/11


Test Graph

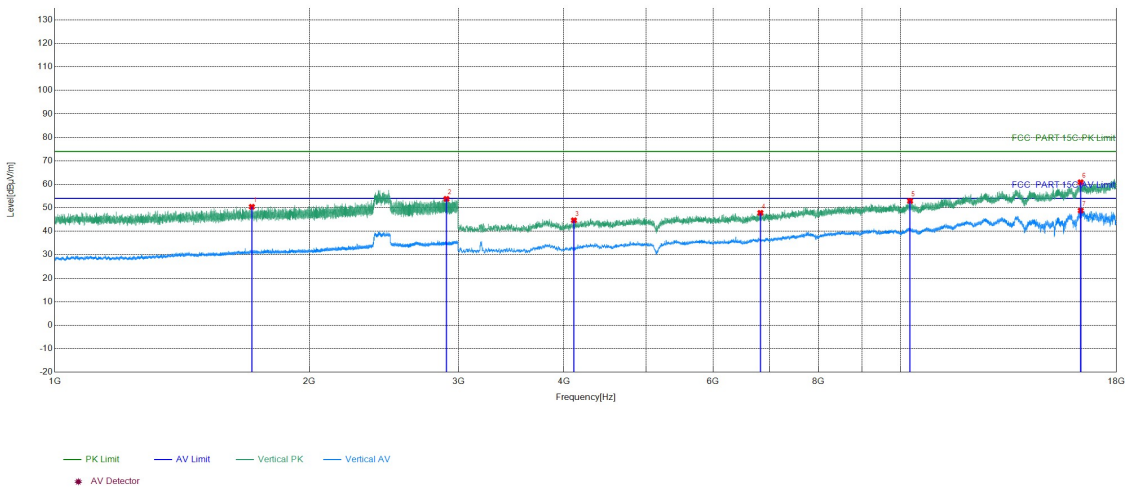

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1709.914	14.11	36.30	50.41	74.00	23.59	PASS	Vertical	PK
2	2904.527	17.75	36.04	53.79	74.00	20.21	PASS	Vertical	PK
3	4110.074	-10.94	55.60	44.66	74.00	29.34	PASS	Vertical	PK
4	6828.2552	-3.65	51.48	47.83	74.00	26.17	PASS	Vertical	PK
5	10262.4842	1.96	50.95	52.91	74.00	21.09	PASS	Vertical	PK
6	16327.8885	11.31	49.56	60.87	74.00	13.13	PASS	Vertical	PK
7	16332.8889	11.38	37.45	48.83	54.00	5.17	PASS	Vertical	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2437MHz
Remark:	/	Test_Date	2026/6/11

Test Graph

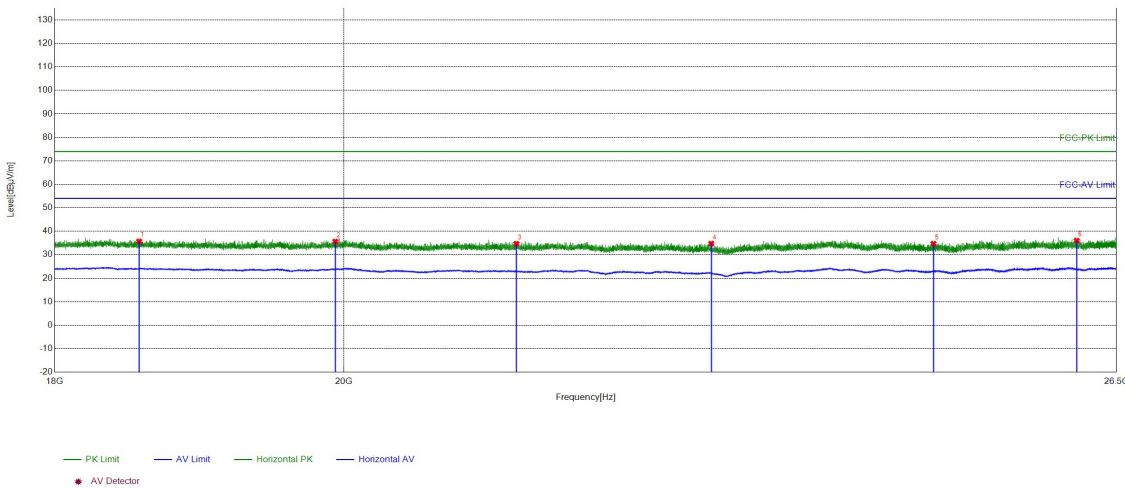

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18561.7025	-26.69	62.37	35.68	74.00	38.32	PASS	Horizontal	PK
2	19936.7175	-24.81	60.43	35.62	74.00	38.38	PASS	Horizontal	PK
3	21295.7518	-25.81	60.49	34.68	74.00	39.32	PASS	Horizontal	PK
4	22863.5545	-25.25	59.98	34.73	74.00	39.27	PASS	Horizontal	PK
5	24790.7516	-21.96	56.67	34.71	74.00	39.29	PASS	Horizontal	PK
6	26118.8448	-21.17	57.17	36.00	74.00	38.00	PASS	Horizontal	PK