


Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Remark:	/	Test_Date	2026/6/12


Test Graph

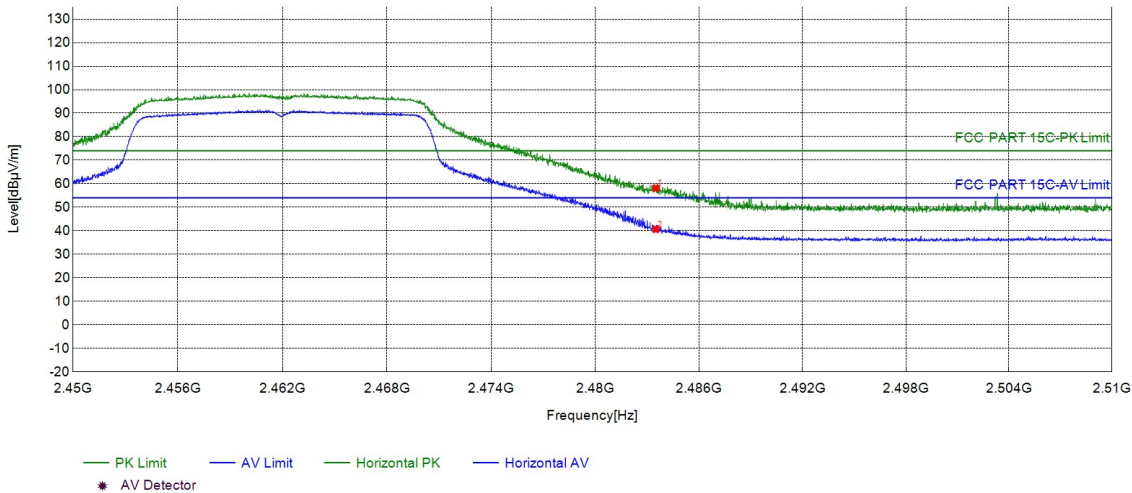

Suspected List									
NO	Freq. [MHz]	Factor [dB/m]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	16.29	41.86	58.15	74.00	15.85	PASS	Horizontal	PK
2	2483.5000	16.29	24.35	40.64	54.00	13.36	PASS	Horizontal	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Remark:	/	Test_Date	2026/6/12


Test Graph

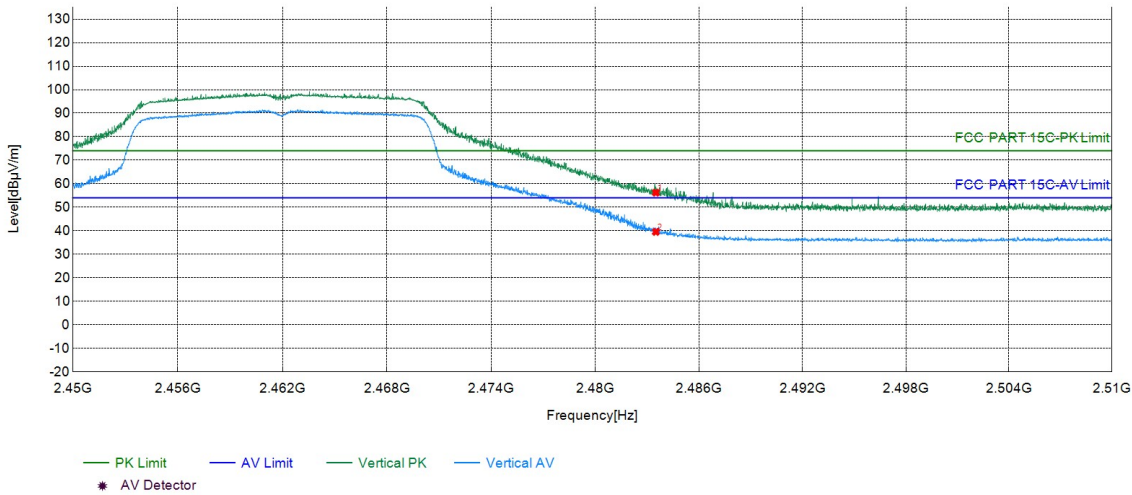

Suspected List									
NO	Freq. [MHz]	Factor [dB/m]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	16.29	39.93	56.22	74.00	17.78	PASS	Vertical	PK
2	2483.5000	16.29	23.25	39.54	54.00	14.46	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Remark:	/	Test_Date	2026/6/12


Test Graph

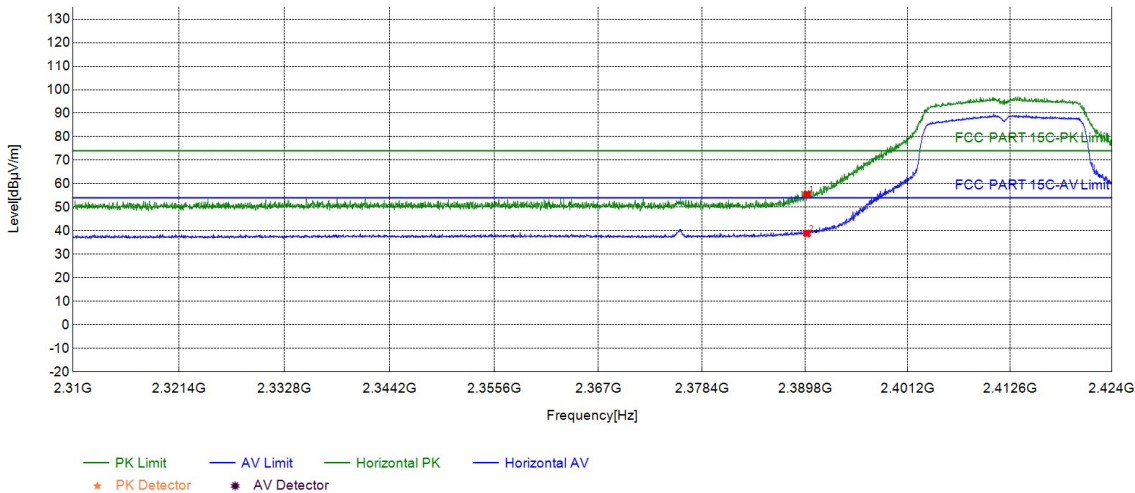

Suspected List									
NO	Freq. [MHz]	Factor [dB/m]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	15.96	39.59	55.55	74.00	18.45	PASS	Horizontal	PK
2	2390.0000	15.96	22.88	38.84	54.00	15.16	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Remark:	/	Test_Date	2026/6/12


Test Graph

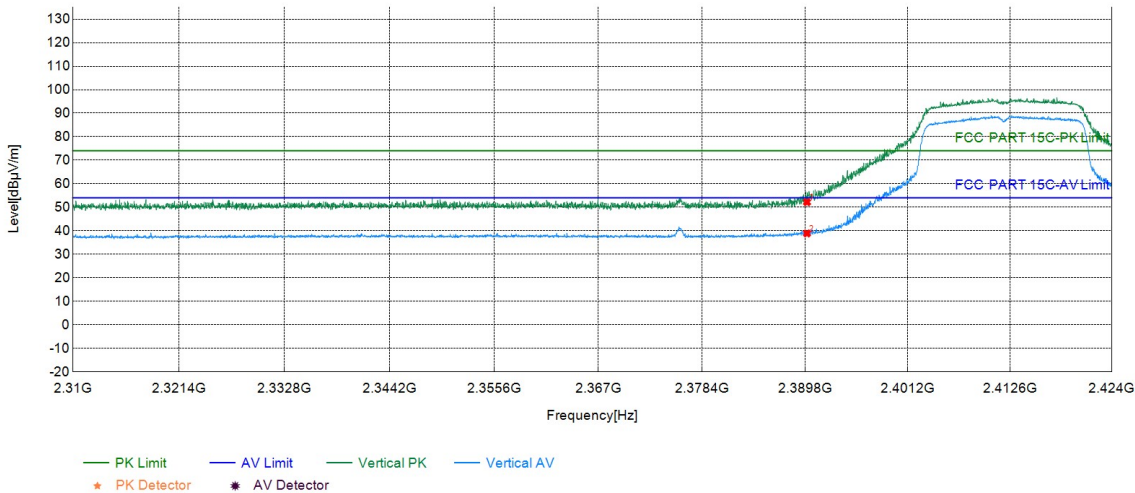

Suspected List									
NO	Freq. [MHz]	Factor [dB/m]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	15.96	36.22	52.18	74.00	21.82	PASS	Vertical	PK
2	2390.0000	15.96	22.92	38.88	54.00	15.12	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Remark:	/	Test_Date	2026/6/12


Test Graph

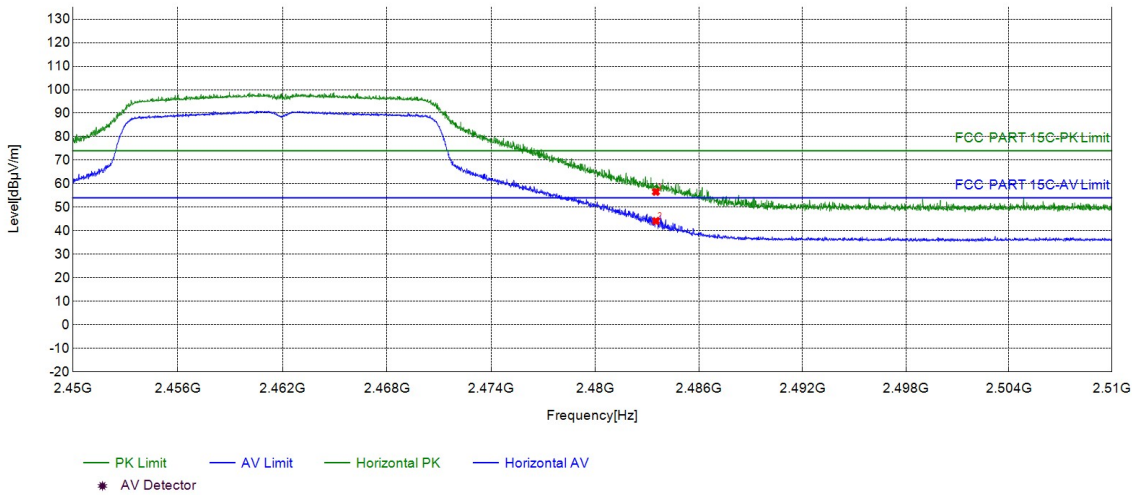

Suspected List									
NO	Freq. [MHz]	Factor [dB/m]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	16.29	40.25	56.54	74.00	17.46	PASS	Horizontal	PK
2	2483.5000	16.29	27.87	44.16	54.00	9.84	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Remark:	/	Test_Date	2026/6/12


Test Graph

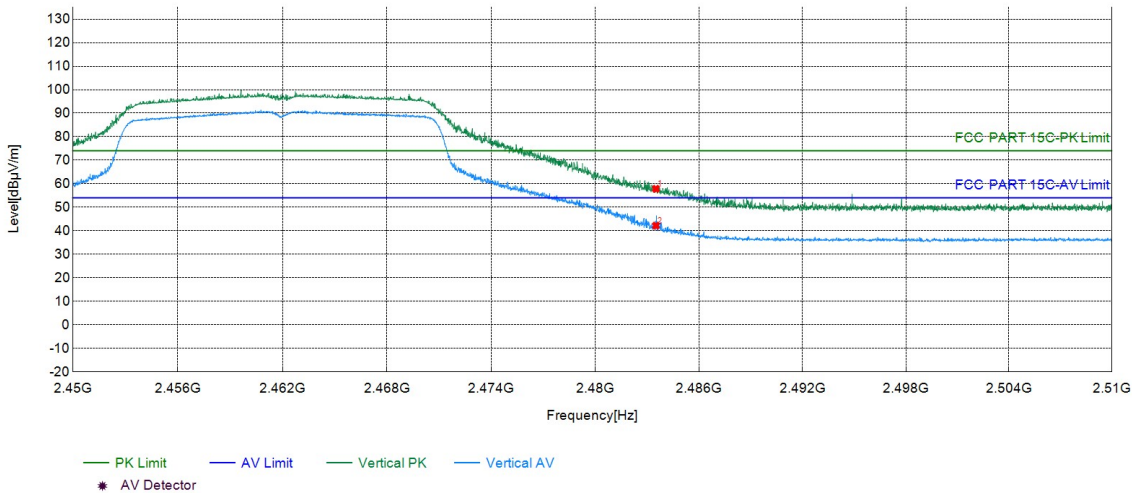

Suspected List									
NO	Freq. [MHz]	Factor [dB/m]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	16.29	41.55	57.84	74.00	16.16	PASS	Vertical	PK
2	2483.5000	16.29	25.89	42.18	54.00	11.82	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Remark:	/	Test_Date	2026/6/12


Test Graph

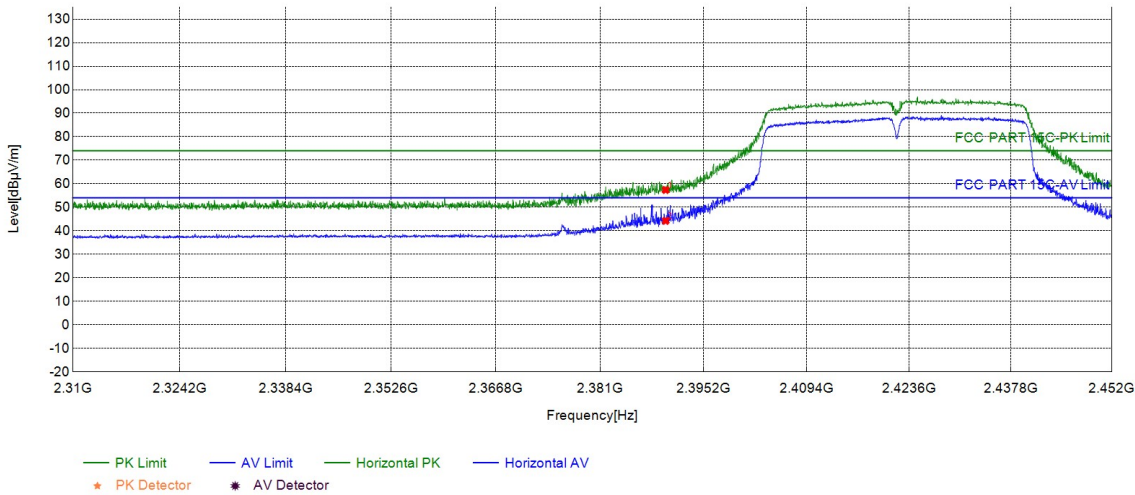

Suspected List									
NO	Freq. [MHz]	Factor [dB/m]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	15.96	41.39	57.35	74.00	16.65	PASS	Horizontal	PK
2	2390.0000	15.96	28.26	44.22	54.00	9.78	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Remark:	/	Test_Date	2026/6/12


Test Graph

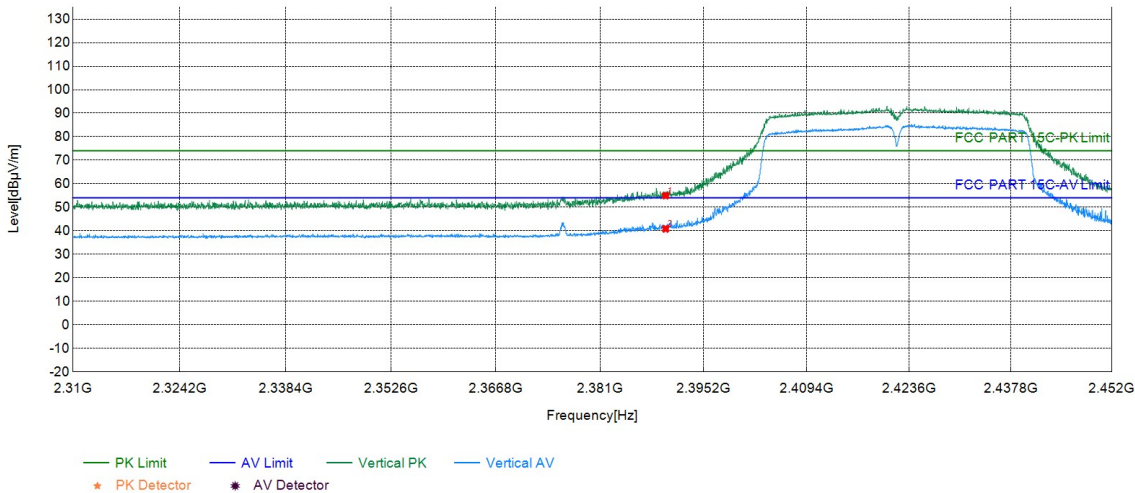

Suspected List									
NO	Freq. [MHz]	Factor [dB/m]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	15.96	39.02	54.98	74.00	19.02	PASS	Vertical	PK
2	2390.0000	15.96	24.88	40.84	54.00	13.16	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Remark:	/	Test_Date	2026/6/12


Test Graph

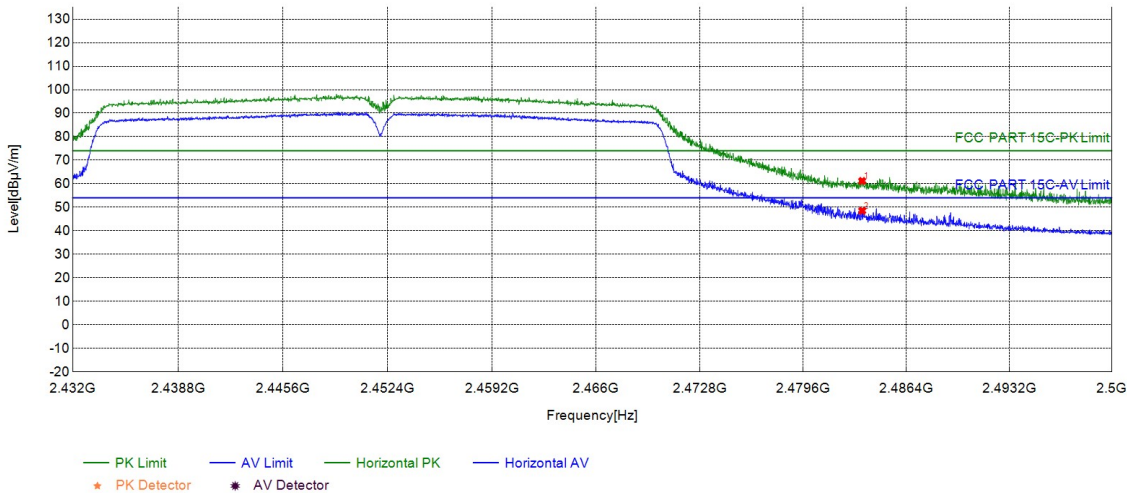

Suspected List									
NO	Freq. [MHz]	Factor [dB/m]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	16.29	44.89	61.18	74.00	12.82	PASS	Horizontal	PK
2	2483.5000	16.29	32.23	48.52	54.00	5.48	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Remark:	/	Test_Date	2026/6/12

Test Graph

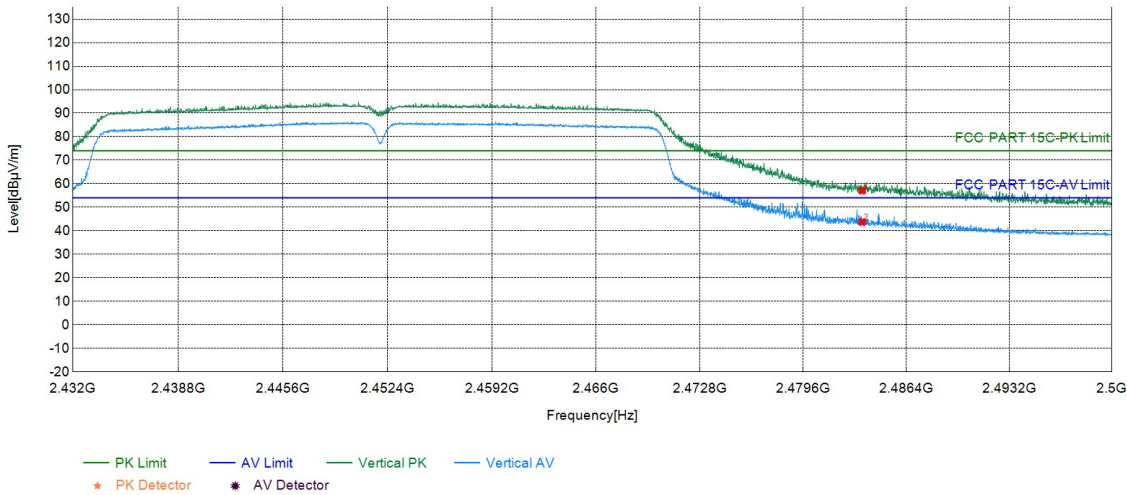

Suspected List									
NO	Freq. [MHz]	Factor [dB/m]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	16.29	40.76	57.05	74.00	16.95	PASS	Vertical	PK
2	2483.5000	16.29	27.41	43.70	54.00	10.30	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor