

TEST REPORT

Reference No...... : WTF26D04119695W002
FCC ID : 2AYBO-HAB7T
Applicant..... : JVCKENWOOD USA Corporation
Address..... : 4001 Worsham Ave, Long Beach, California, United States
Manufacturer : Dongguan G.K Technology Co.,Ltd.
Address : 4F, No.7, Dong'er St., Xingfa South Rd., Wu'sha, Chang'an,
DONGGUAN CHINA 523879
Product..... : Wireless Headphones
Model(s) : HA-B7T
Brand Name..... : JVC
Standards..... : FCC 47CFR Part 15.247
Date of Receipt Sample : 2026-05-28
Date of Test : 2026-05-28 to 2026-07-16
Date of Issue..... : 2026-08-11
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998

Fax: +86-769-2267 6828

Compiled by:

Estel Qian

Estel Qian / Project Engineer

Approved by:



Deval Qin / Designated Reviewer

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS	2
3 REVISION HISTORY.....	4
4 GENERAL INFORMATION.....	5
4.1 GENERAL DESCRIPTION OF E.U.T.....	5
4.2 DETAILS OF E.U.T.....	5
4.3 CHANNEL LIST.....	6
4.4 TEST MODE	6
4.5 TEST FACILITY	7
5 TEST SUMMARY	8
6 EQUIPMENT USED DURING TEST.....	9
6.1 EQUIPMENTS LIST	9
6.2 DESCRIPTION OF SUPPORT UNITS.....	10
6.3 MEASUREMENT UNCERTAINTY	10
7 RADIATED SPURIOUS EMISSIONS	11
7.1 EUT OPERATION.....	11
7.2 TEST SETUP	12
7.3 SPECTRUM ANALYZER SETUP	13
7.4 TEST PROCEDURE.....	14
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	14
7.6 SUMMARY OF TEST RESULTS.....	15
8 CONDUCTED SPURIOUS EMISSIONS.....	68
8.1 TEST PROCEDURE.....	68
8.2 TEST RESULT.....	69
9 BAND EDGE MEASUREMENT.....	99
9.1 TEST PROCEDURE.....	99
9.2 TEST RESULT	100
10 20DB BANDWIDTH AND 99% BANDWIDTH MEASUREMENT	112
10.1 TEST PROCEDURE	112
10.2 TEST RESULT	112
11 MAXIMUM PEAK OUTPUT POWER.....	133
11.1 TEST PROCEDURE	133
11.2 TEST RESULT	134
12 HOPPING CHANNEL SEPARATION.....	145
12.1 TEST PROCEDURE	145
12.2 TEST RESULT	146
13 NUMBER OF HOPPING FREQUENCY.....	157
13.1 TEST PROCEDURE	157
13.2 TEST RESULT	158
14 DWELL TIME	161
14.1 TEST PROCEDURE	161

14.2 TEST RESULT161

15 ANTENNA REQUIREMENT173

16 RF EXPOSURE173

17 PHOTOGRAPHS OF TEST SETUP AND EUT.....173

3 Revision History

Test Report No.	Date of Receipt Sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTF26D04119695W002	2026-05-28	2026-05-28 to 2026-07-16	2026-08-11	Original	-	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	Wireless Headphones
Model(s):	HA-B7T
Model Description:	N/A
Test Sample No.:	1-1/1
Bluetooth Version:	6.0
Hardware Version:	V3
Software Version:	(HA-B7T)_JVC HA-B7T 2026-F

4.2 Details of E.U.T.

Operation Frequency:	2402~2480MHz
Max. RF output power:	Left earbud: 4.73dBm Right earbud: 5.06dBm
Type of Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna installation:	PCB printed antenna
Antenna Gain:	2.1dBi

Note:

#: The antenna gain is provided by the applicant, and the applicant should be responsible for its authenticity, WALTERK lab has not verified the authenticity of its information.

Ratings:	Charge voltage for charging case: DC 5V
Battery:	Charging case: 3.7V 250mAh Earbuds: 3.7V 35mAh

4.3 Channel List

Normal

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-

4.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests; the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting	2402MHz	2441MHz	2480MHz

4.5 Test Facility

The test facility has a test site registered with the following organizations:

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A, October 15, 2016.

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

5 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious emissions	15.247(d)	N/A
Band edge	15.247(d) 15.205(a)	PASS
Conducted Emission	15.207	PASS
20dB Bandwidth and 99% Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Antenna Requirement	15.203	Complies
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

6 Equipment Used during Test

6.1 Equipments List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Calibration Due Date
3m Semi-anechoic Chamber for Radiation Emissions 1#						
1	Spectrum Analyzer	R&S	FSP30	100091	2026-04-07	2027-04-06
2	Amplifier	Agilent	8447D	2944A10178	2025-07-04 2026-07-01	2026-07-03 2027-06-30
3	Tri-log Broadband Antenna	SCHWARZBECK	VULB9163	336	2025-07-20	2026-07-19
4	Coaxial Cable	Top	TYPE16(13M)	-	2026-04-07	2027-04-06
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1314	2025-08-09	2026-08-08
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2025-07-04 2026-07-01	2026-07-03 2027-06-30
7	Broadband Preamplifier	COMPLIANCE	PAP-1G18	2004	2025-07-04 2026-07-01	2026-07-03 2027-06-30
8	Coaxial Cable	Top	ZT26-NJ-NJ-8M/FA	-	2026-04-07	2027-04-06
9	Microwave Amplifier	SCHWARZBECK	BBV 9721	100472	2025-07-04 2026-07-01	2026-07-03 2027-06-30
10	Coaxial Cable	Top	ZT40-2.92J-2.92J-2.0M	17100919	2025-07-08 2026-07-01	2026-07-07 2027-06-30
3m Semi-anechoic Chamber for Radiation Emissions 2#						
1	Test Receiver	R&S	ESCI	101296	2026-04-07	2027-04-06
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2025-07-05 2026-07-04	2026-07-04 2027-07-03
3	Active Loop Antenna	Com-Power	AL-130R	10160007	2026-04-19	2027-04-18
4	Amplifier	ANRITSU	MH648A	M43381	2026-04-07	2027-04-06
5	Cable	HUBER+SUHNER	CBL2	525178	2026-04-07	2027-04-06
RF Conducted Testing						
1	Spectrum Analyzer	R&S	FSP40	100501	2025-07-04 2026-07-01	2026-07-03 2027-06-30
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2025-07-04 2026-07-01	2026-07-03 2027-06-30
3	Power Sensor	TST	TSCB562R2	-	2025-12-05	2026-12-04

Test Software:

Test Item	Software name	Software version
Radiated Emission(3m)	EZ-EMC	EZ-EMC(RA-03A1-1)
RF Conducted Testing	TST-301	V2.0

6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

6.3 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	± 3.64 dB(AC mains 150KHz~30MHz)
Radiated Spurious Emissions	± 5.08 dB (Bilog antenna 30M~1000MHz)
	± 4.99 dB (Horn antenna 1000M~25000MHz)
Radio Frequency	± 1 x 10 ⁻⁷ Hz
RF Power	± 0.42 dB
Dwell time	1.0%
Conducted Spurious Emissions	± 2.76 dB (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor:k=2	

7 Radiated Spurious Emissions

Test Requirement: FCC 47CFR Part 15 Section 15.205 &15.209 & 15.247

Test Method: ANSI C63.10-2020

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 51.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in Transmitting mode, the worst test data were shown in the report.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10-2020.


The test setup for emission measurement below 30MHz.

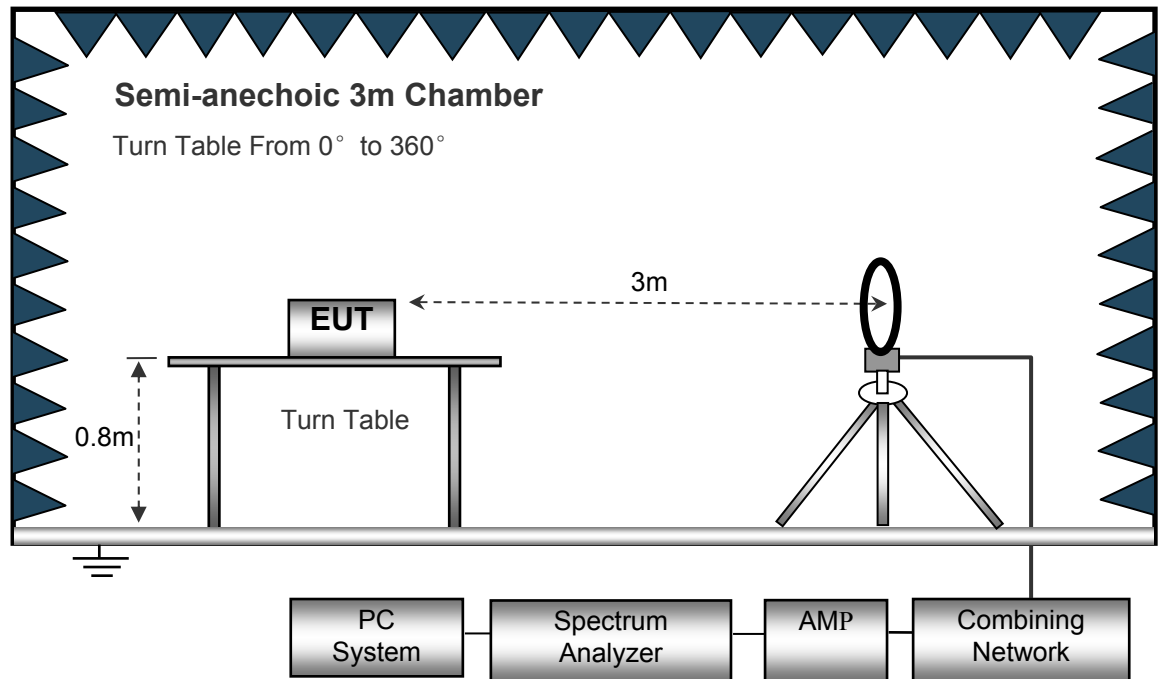

The test setup for emission measurement from 30 MHz to 1 GHz.

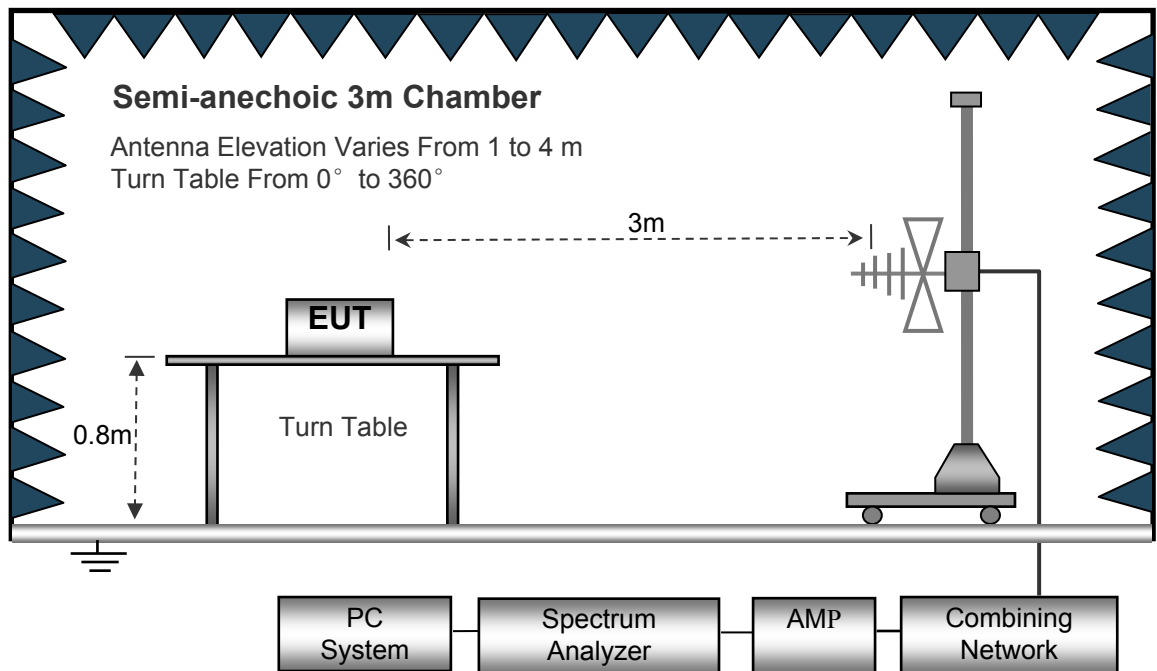

The test setup for emission measurement above 1 GHz.

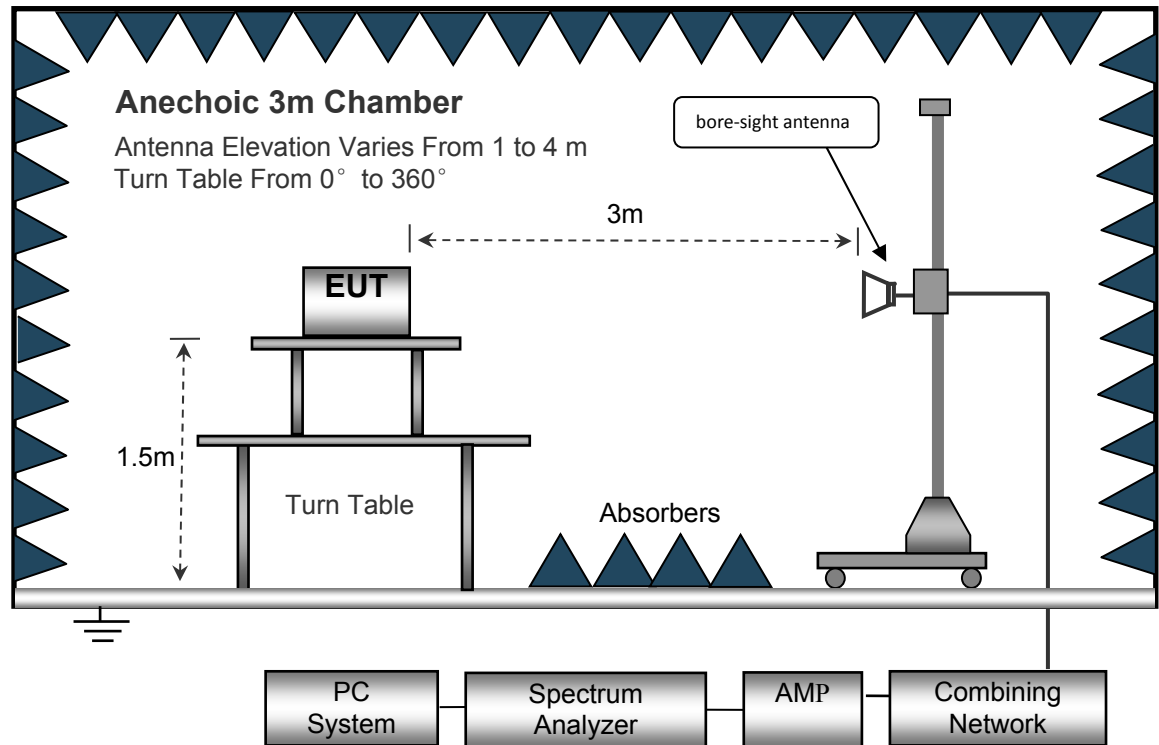

7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
IF Bandwidth.....10kHz
Video Bandwidth.....10kHz
Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth.....100kHz
Video Bandwidth.....300kHz

Above 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth.....1MHz
Video Bandwidth.....3MHz
DetectorAve.
Resolution Bandwidth.....1MHz
Video Bandwidth.....10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the Z position. So the data shown was the Z position only.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

Test Frequency: 9kHz~30MHz


The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 1GHz


Remark: only the worst data (8DPSK modulation mode High channel) were reported.

Left earbud

Antenna Polarization: Vertical

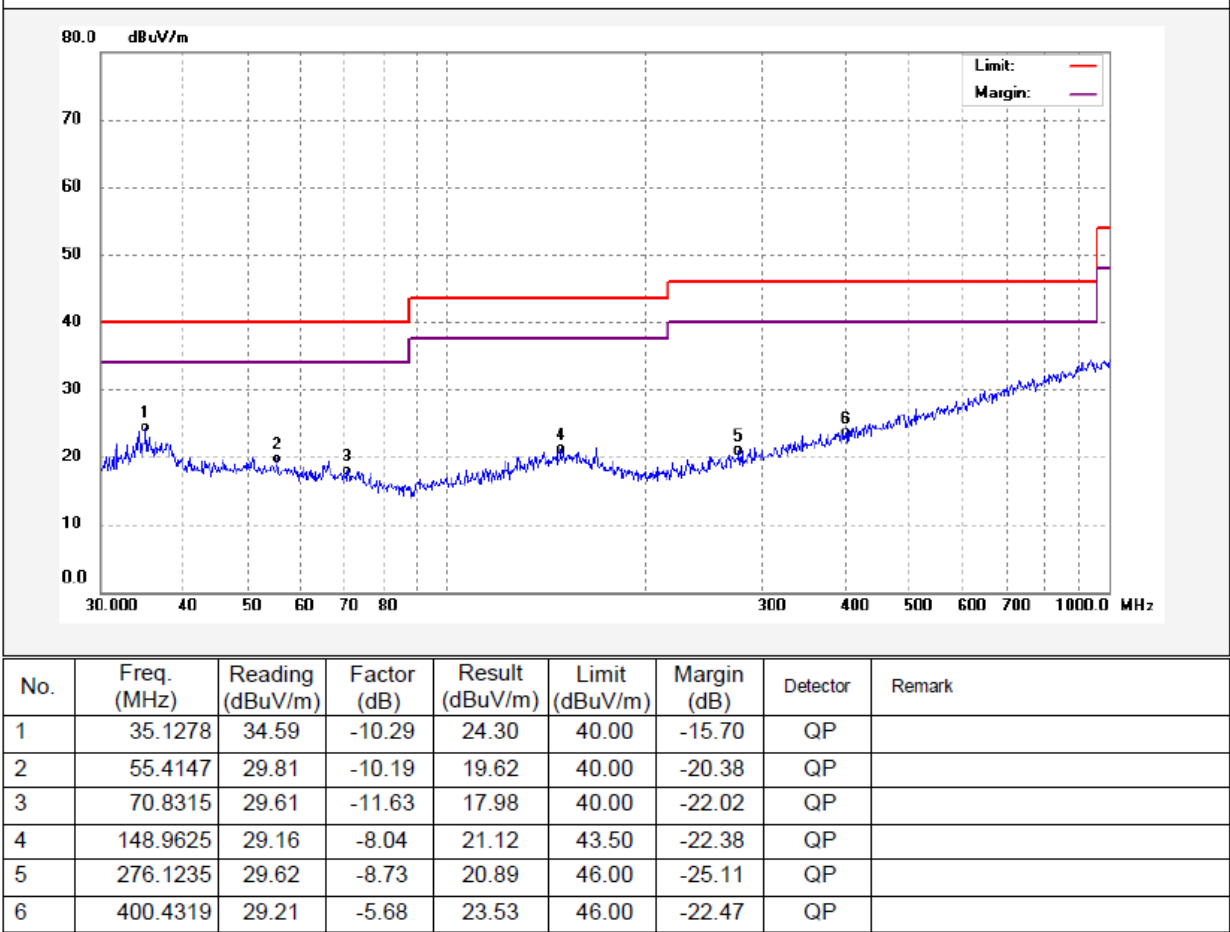


Antenna Polarization: Horizontal

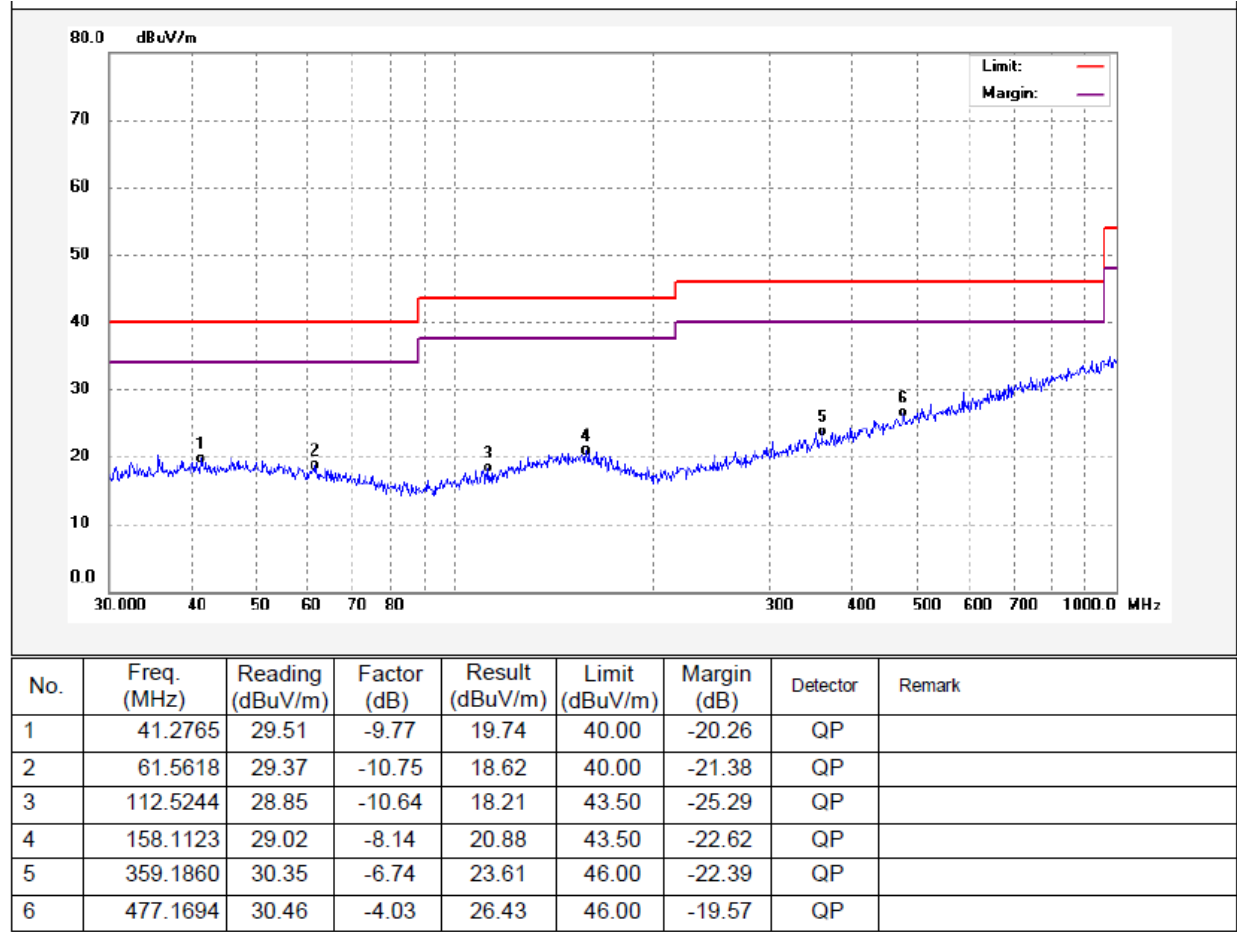


Right earbud

Antenna Polarization: Vertical

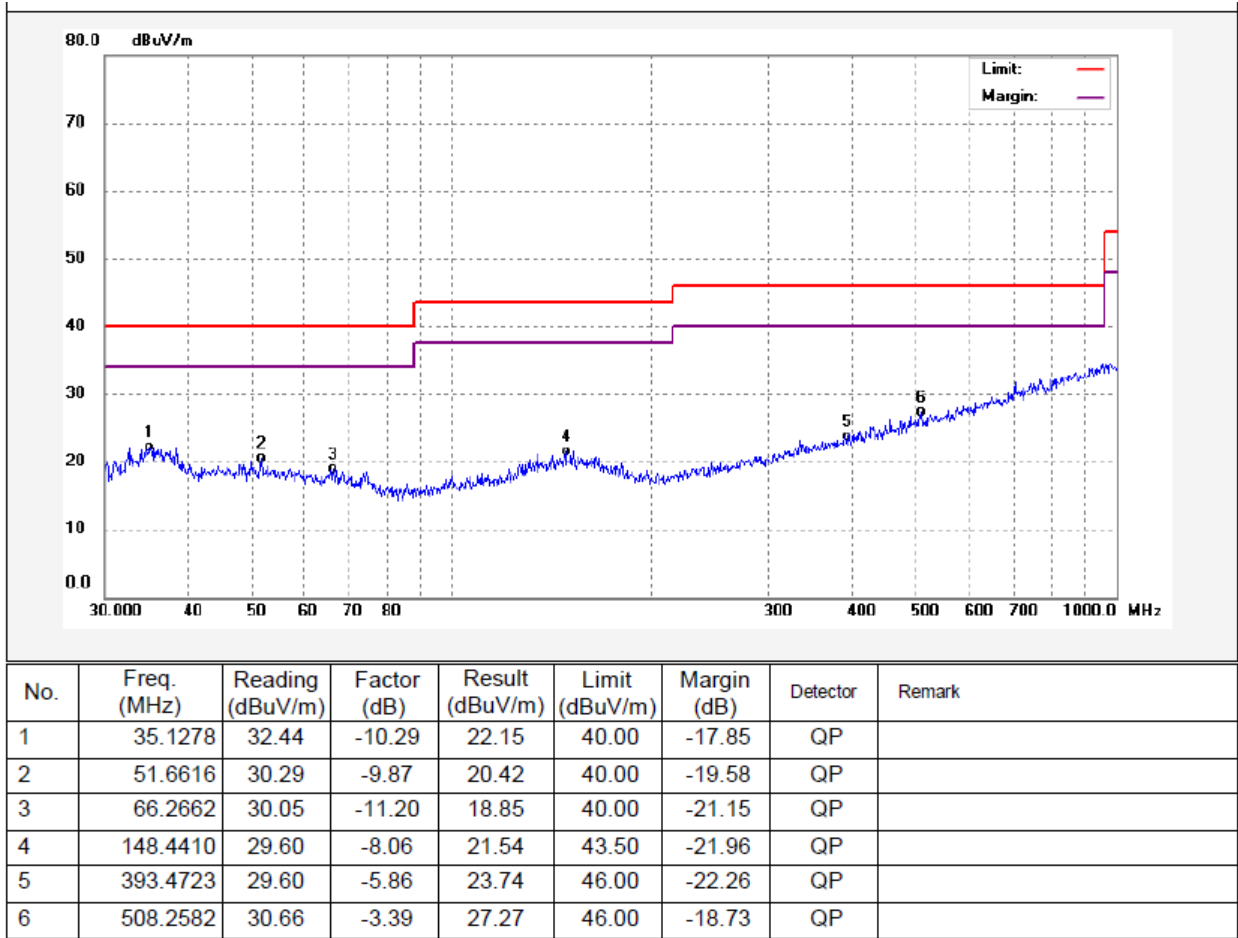

Antenna Polarization: Horizontal

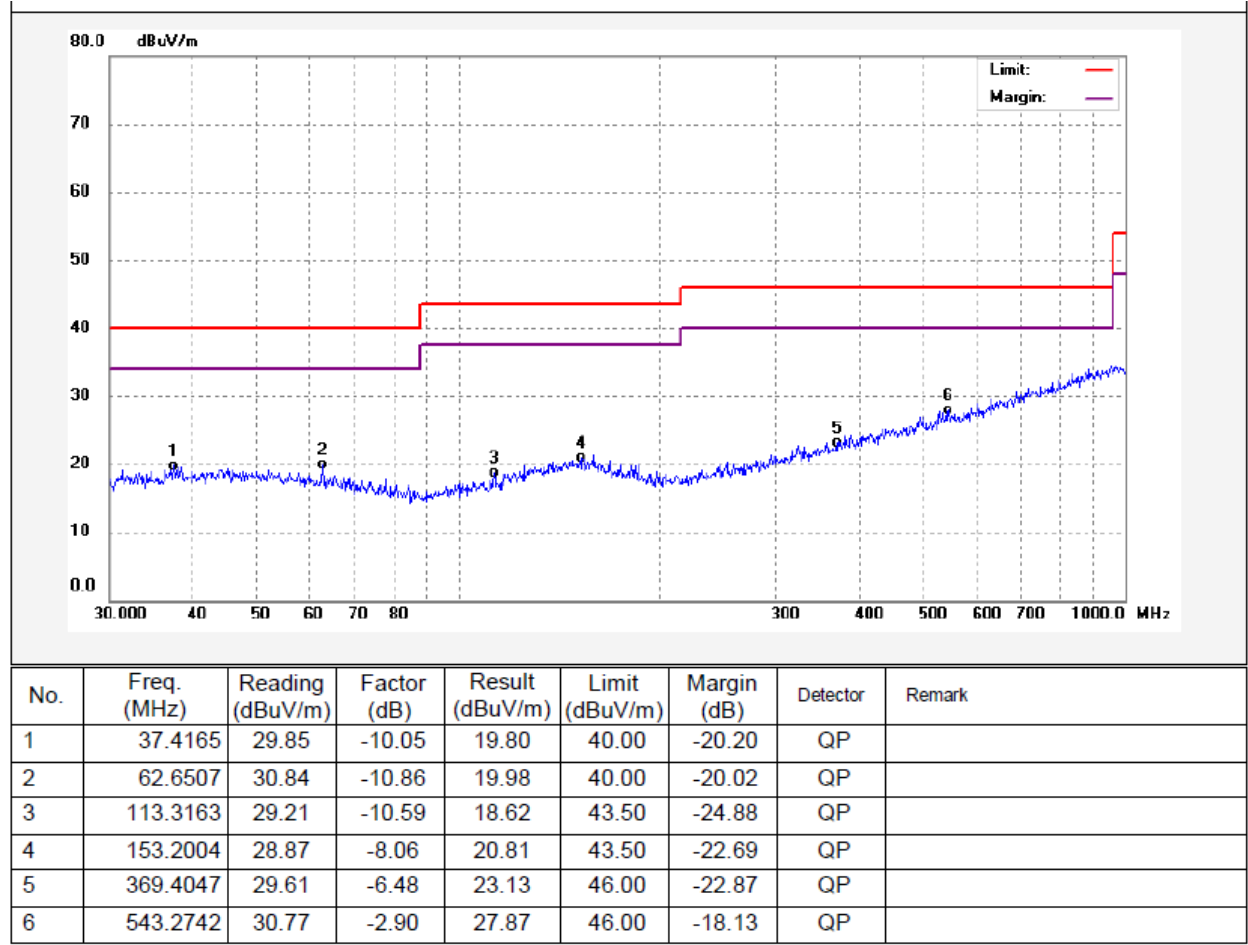


Test Frequency: 1GHz ~ 18GHz

Remark: only the worst data (8DPSK modulation mode) were reported.

Left earbud


Low channel

Antenna Polarization: Vertical

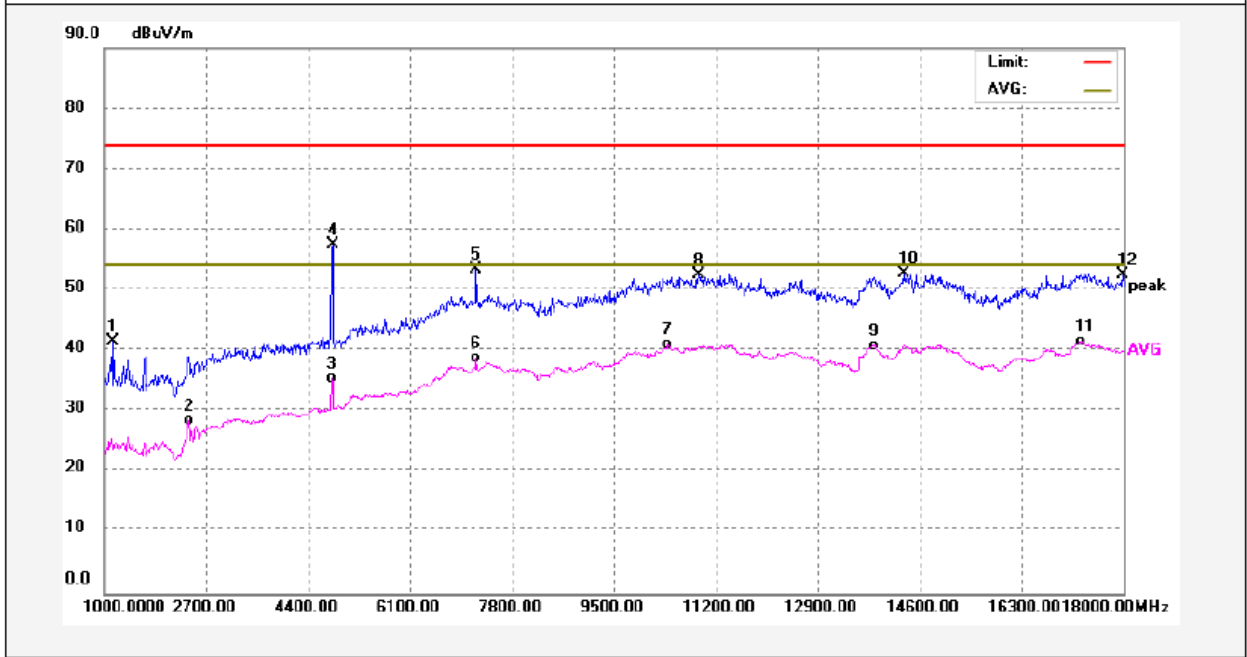

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1153.000	56.31	-14.82	41.49	74.00	-32.51	peak	
2	2411.000	39.24	-10.74	28.50	54.00	-25.50	AVG	
3	4791.000	41.81	-6.33	35.48	54.00	-18.52	AVG	
4	4808.000	63.82	-6.30	57.52	74.00	-16.48	peak	
5	7205.000	52.37	1.04	53.41	74.00	-20.59	peak	
6	7205.000	37.84	1.04	38.88	54.00	-15.12	AVG	
7	10401.000	37.07	3.89	40.96	54.00	-13.04	AVG	
8	10911.000	47.60	4.86	52.46	74.00	-21.54	peak	
9	13835.000	32.59	8.27	40.86	54.00	-13.14	AVG	
10	14328.000	43.41	9.43	52.84	74.00	-21.16	peak	
11	17286.000	29.82	11.75	41.57	54.00	-12.43	AVG	
12	17983.000	35.69	16.85	52.54	74.00	-21.46	peak	


Antenna Polarization: Horizontal

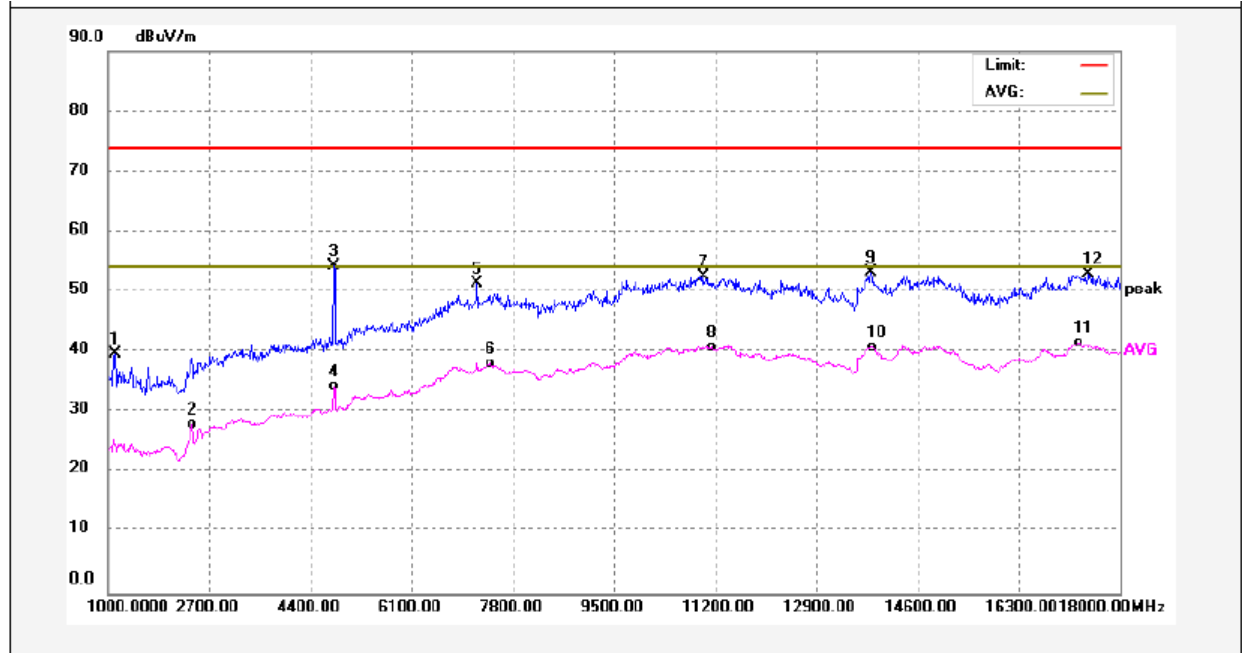

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1119.000	54.61	-14.89	39.72	74.00	-34.28	peak	
2	2411.000	38.68	-10.74	27.94	54.00	-26.06	AVG	
3	4791.000	60.68	-6.33	54.35	74.00	-19.65	peak	
4	4791.000	40.55	-6.33	34.22	54.00	-19.78	AVG	
5	7205.000	50.35	1.04	51.39	74.00	-22.61	peak	
6	7426.000	36.95	1.29	38.24	54.00	-15.76	AVG	
7	10996.000	47.57	5.02	52.59	74.00	-21.41	peak	
8	11149.000	35.84	5.00	40.84	54.00	-13.16	AVG	
9	13818.000	45.09	8.22	53.31	74.00	-20.69	peak	
10	13835.000	32.53	8.27	40.80	54.00	-13.20	AVG	
11	17303.000	29.80	11.80	41.60	54.00	-12.40	AVG	
12	17473.000	40.71	12.17	52.88	74.00	-21.12	peak	


Middle channel

Antenna Polarization: Vertical

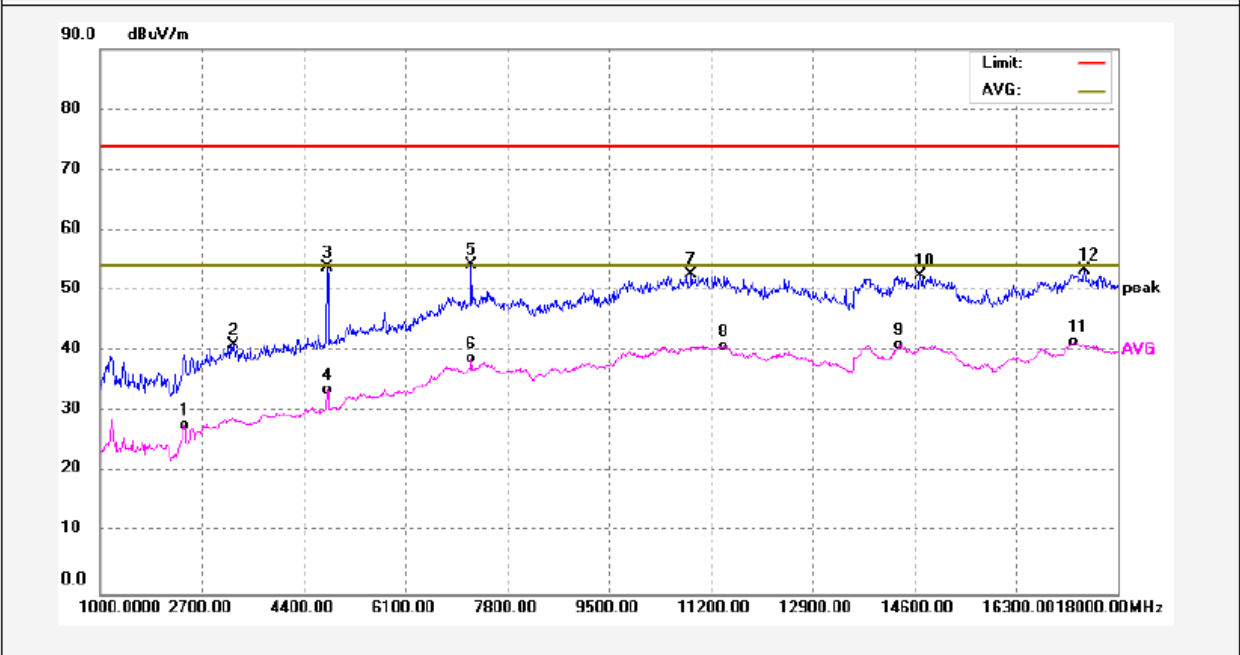


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2411.000	38.54	-10.74	27.80	54.00	-26.20	AVG	
2	3227.000	49.76	-8.78	40.98	74.00	-33.02	peak	
3	4791.000	60.18	-6.33	53.85	74.00	-20.15	peak	
4	4791.000	39.90	-6.33	33.57	54.00	-20.43	AVG	
5	7205.000	53.22	1.04	54.26	74.00	-19.74	peak	
6	7205.000	37.72	1.04	38.76	54.00	-15.24	AVG	
7	10877.000	47.95	4.81	52.76	74.00	-21.24	peak	
8	11421.000	35.92	4.97	40.89	54.00	-13.11	AVG	
9	14345.000	31.50	9.47	40.97	54.00	-13.03	AVG	
10	14702.000	43.07	9.42	52.49	74.00	-21.51	peak	
11	17269.000	29.79	11.72	41.51	54.00	-12.49	AVG	
12	17439.000	41.40	12.09	53.49	74.00	-20.51	peak	

Antenna Polarization: Horizontal

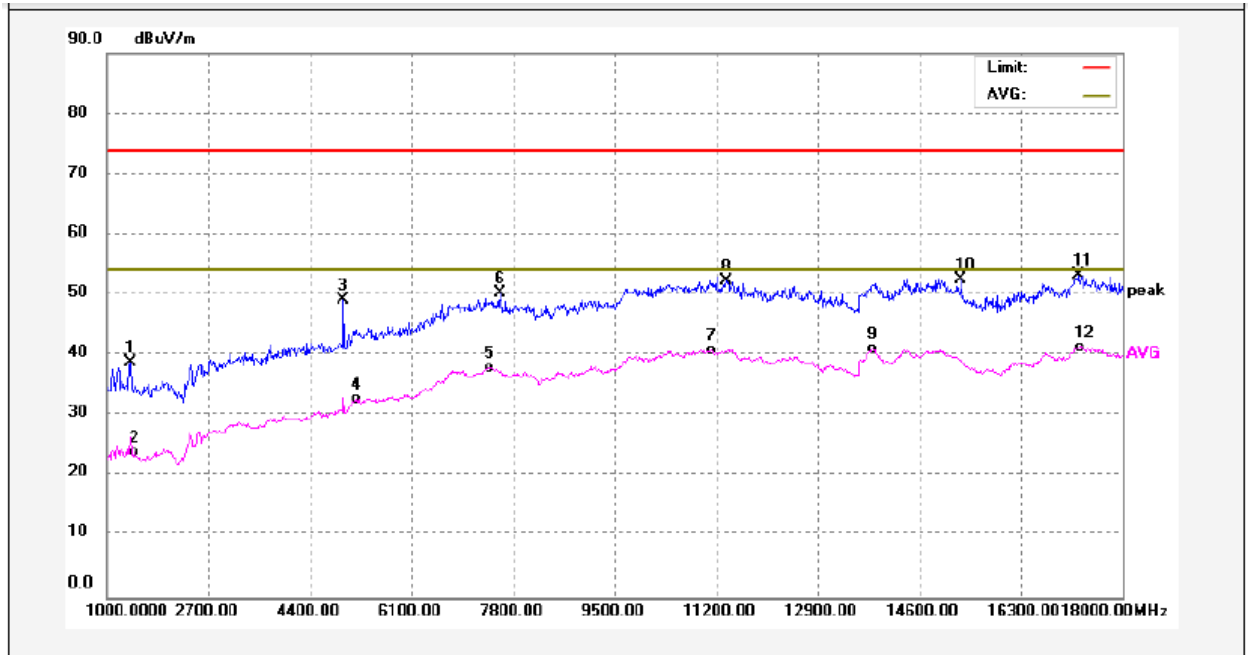


Hight channel

Antenna Polarization: Vertical

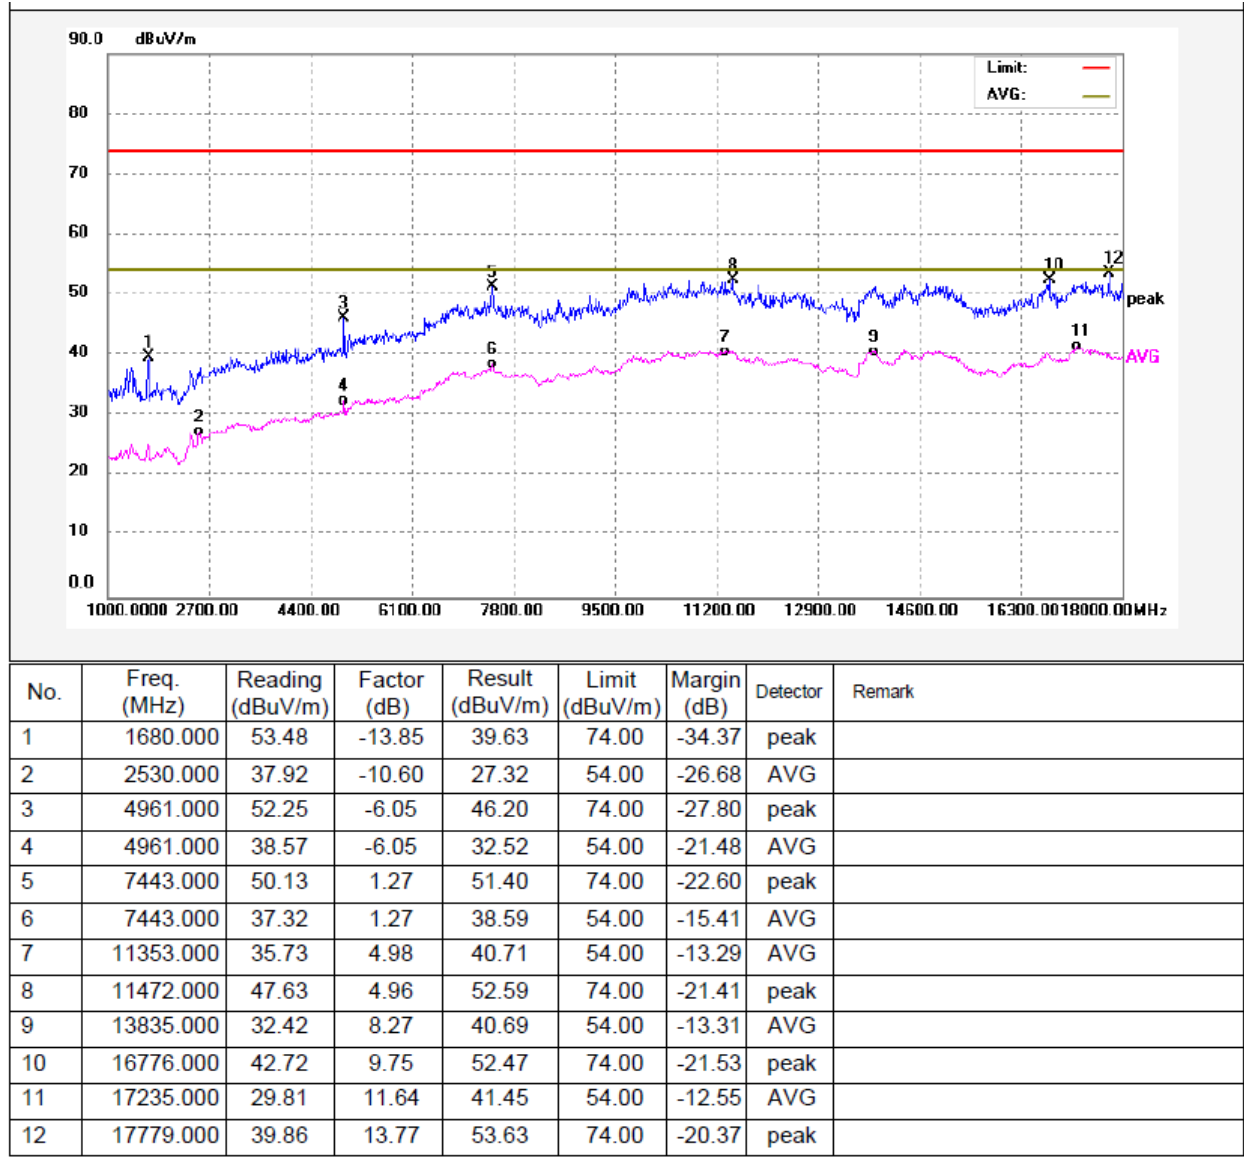


Antenna Polarization: Horizontal

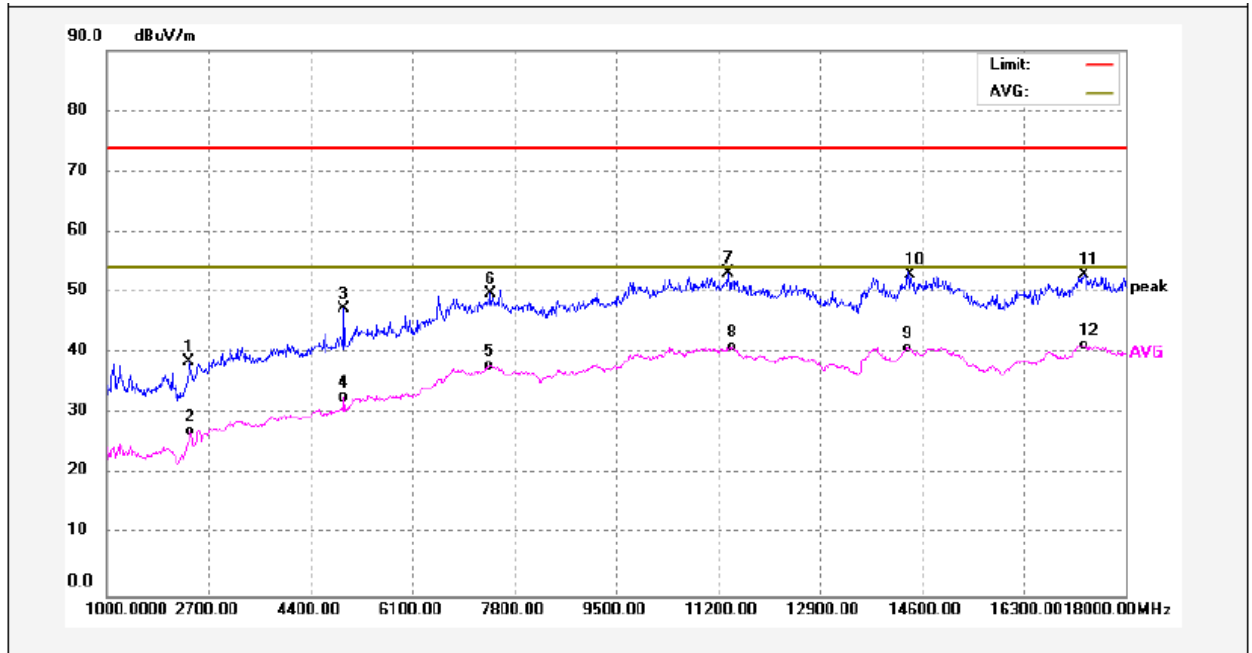


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2377.000	49.41	-10.78	38.63	74.00	-35.37	peak	
2	2394.000	37.78	-10.75	27.03	54.00	-26.97	AVG	
3	4961.000	53.38	-6.05	47.33	74.00	-26.67	peak	
4	4961.000	38.88	-6.05	32.83	54.00	-21.17	AVG	
5	7375.000	36.73	1.28	38.01	54.00	-15.99	AVG	
6	7409.000	48.60	1.31	49.91	74.00	-24.09	peak	
7	11370.000	48.24	4.97	53.21	74.00	-20.79	peak	
8	11438.000	36.11	4.96	41.07	54.00	-12.93	AVG	
9	14362.000	31.37	9.50	40.87	54.00	-13.13	AVG	
10	14413.000	43.43	9.59	53.02	74.00	-20.98	peak	
11	17303.000	41.18	11.80	52.98	74.00	-21.02	peak	
12	17303.000	29.58	11.80	41.38	54.00	-12.62	AVG	

Right earbud
Low channel
Antenna Polarization: Vertical

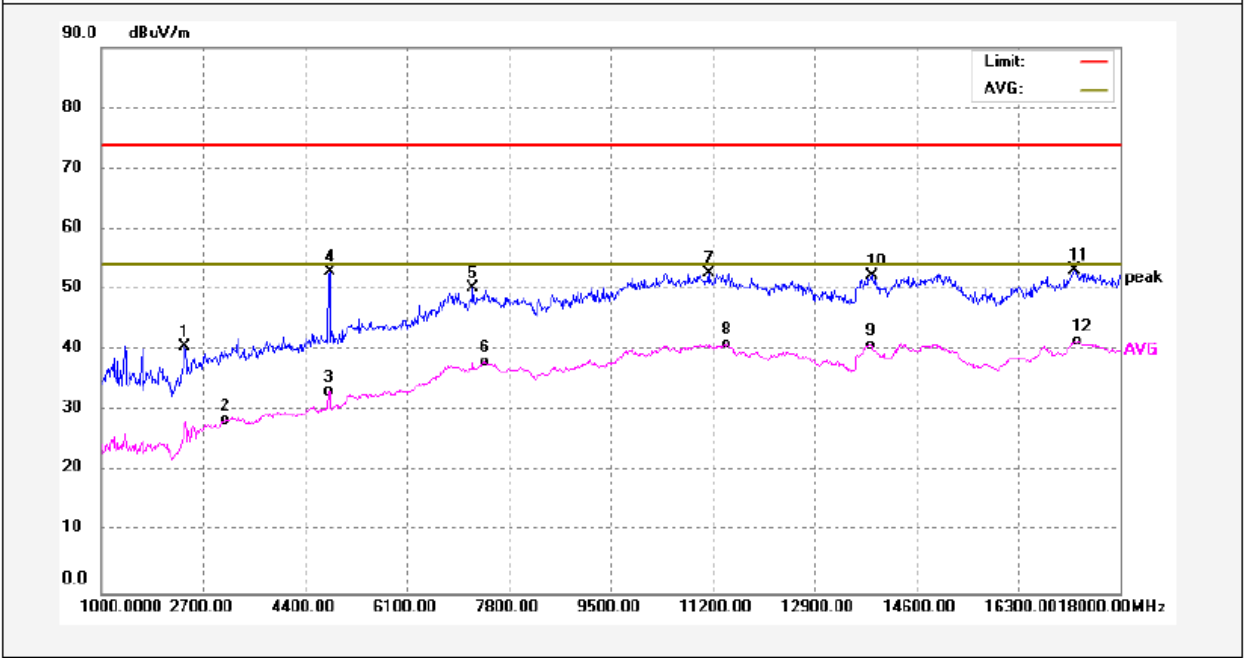

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2394.000	51.38	-10.75	40.63	74.00	-33.37	peak	
2	3074.000	37.73	-9.22	28.51	54.00	-25.49	AVG	
3	4791.000	39.48	-6.33	33.15	54.00	-20.85	AVG	
4	4808.000	59.25	-6.30	52.95	74.00	-21.05	peak	
5	7205.000	49.31	1.04	50.35	74.00	-23.65	peak	
6	7409.000	36.75	1.31	38.06	54.00	-15.94	AVG	
7	11132.000	47.74	5.00	52.74	74.00	-21.26	peak	
8	11438.000	36.02	4.96	40.98	54.00	-13.02	AVG	
9	13835.000	32.62	8.27	40.89	54.00	-13.11	AVG	
10	13852.000	43.93	8.33	52.26	74.00	-21.74	peak	
11	17235.000	41.53	11.64	53.17	74.00	-20.83	peak	
12	17286.000	29.74	11.75	41.49	54.00	-12.51	AVG	


Antenna Polarization: Horizontal

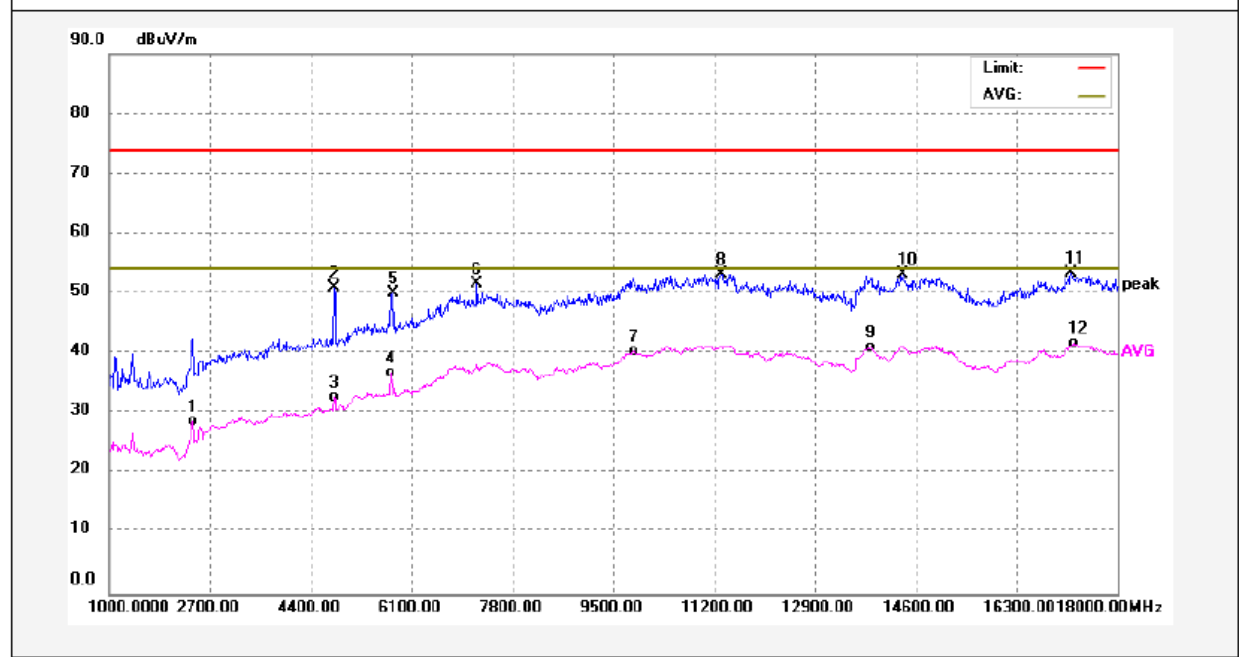

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2411.000	39.39	-10.74	28.65	54.00	-25.35	AVG	
2	4791.000	57.35	-6.33	51.02	74.00	-22.98	peak	
3	4791.000	38.96	-6.33	32.63	54.00	-21.37	AVG	
4	5743.000	40.91	-4.10	36.81	54.00	-17.19	AVG	
5	5794.000	54.01	-3.94	50.07	74.00	-23.93	peak	
6	7205.000	50.55	1.04	51.59	74.00	-22.41	peak	
7	9840.000	37.26	3.09	40.35	54.00	-13.65	AVG	
8	11319.000	48.22	4.99	53.21	74.00	-20.79	peak	
9	13835.000	32.74	8.27	41.01	54.00	-12.99	AVG	
10	14379.000	43.61	9.53	53.14	74.00	-20.86	peak	
11	17218.000	41.86	11.61	53.47	74.00	-20.53	peak	
12	17269.000	29.95	11.72	41.67	54.00	-12.33	AVG	


Middle channel

Antenna Polarization: Vertical

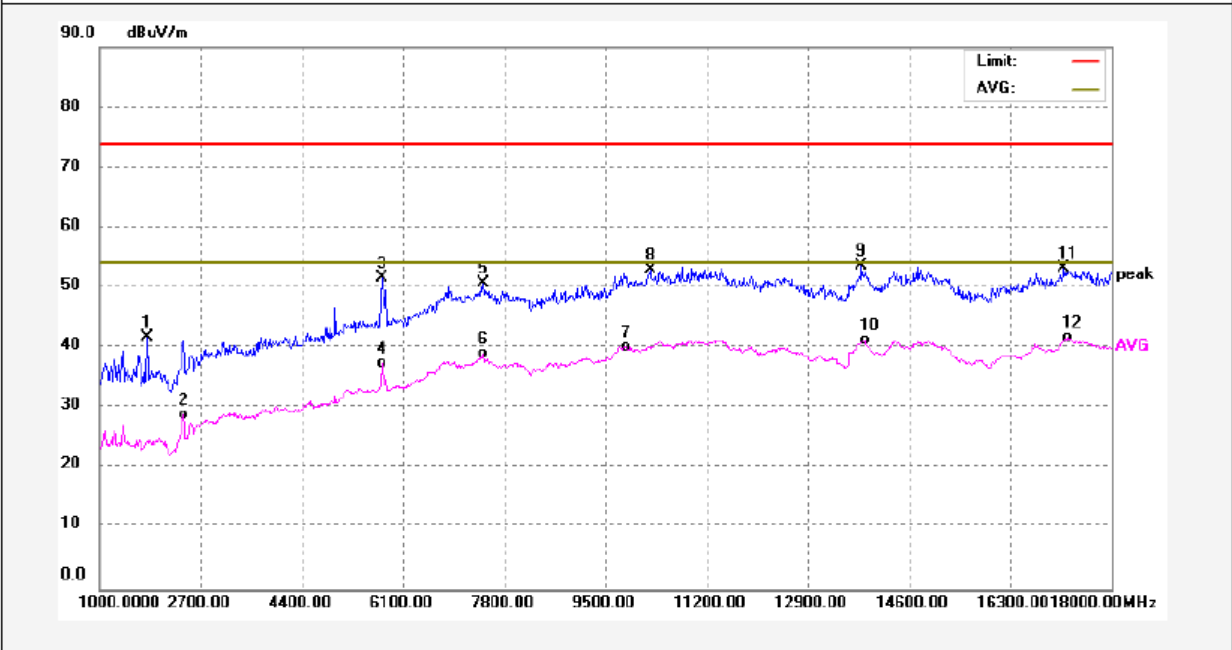


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1799.000	55.38	-13.57	41.81	74.00	-32.19	peak	
2	2411.000	39.65	-10.74	28.91	54.00	-25.09	AVG	
3	5743.000	55.63	-4.10	51.53	74.00	-22.47	peak	
4	5743.000	41.46	-4.10	37.36	54.00	-16.64	AVG	
5	7443.000	49.47	1.27	50.74	74.00	-23.26	peak	
6	7443.000	37.85	1.27	39.12	54.00	-14.88	AVG	
7	9840.000	37.16	3.09	40.25	54.00	-13.75	AVG	
8	10248.000	49.41	3.53	52.94	74.00	-21.06	peak	
9	13801.000	45.40	8.16	53.56	74.00	-20.44	peak	
10	13852.000	32.89	8.33	41.22	54.00	-12.78	AVG	
11	17201.000	41.70	11.56	53.26	74.00	-20.74	peak	
12	17252.000	30.03	11.67	41.70	54.00	-12.30	AVG	

Antenna Polarization: Horizontal

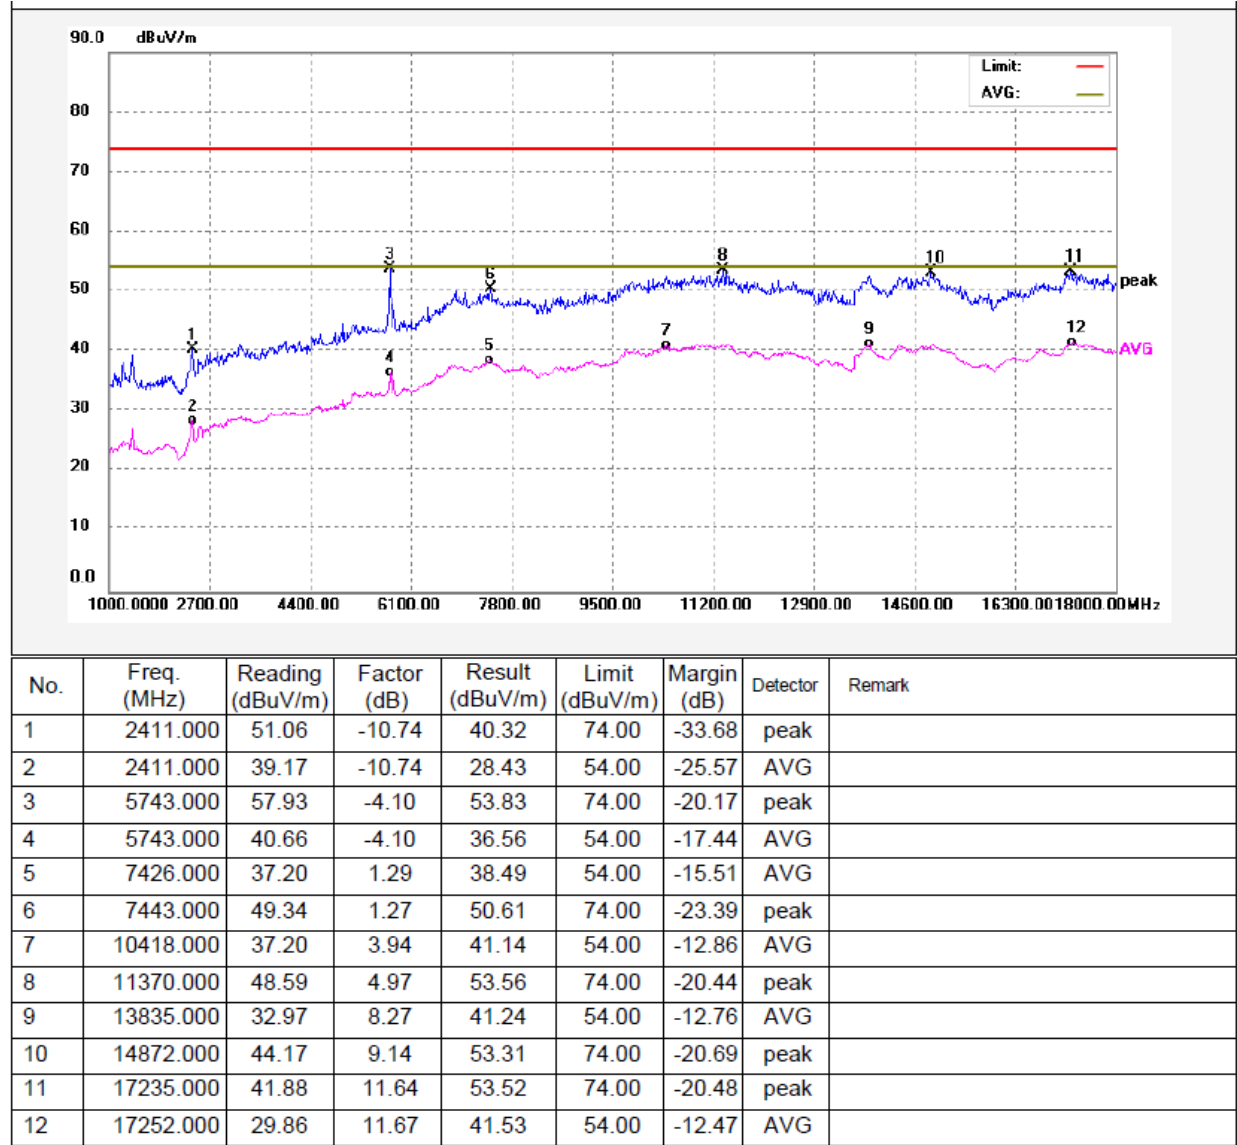


High channel

Antenna Polarization: Vertical

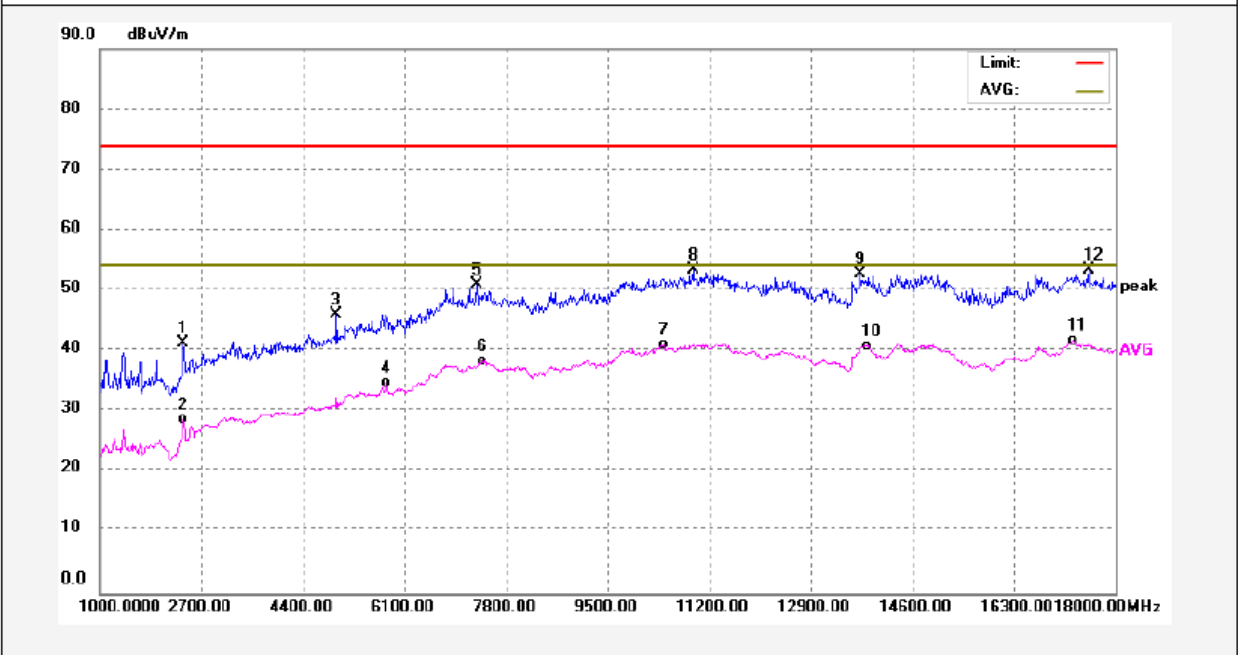

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2394.000	51.93	-10.75	41.18	74.00	-32.82	peak	
2	2394.000	39.53	-10.75	28.78	54.00	-25.22	AVG	
3	4961.000	52.16	-6.05	46.11	74.00	-27.89	peak	
4	5794.000	38.67	-3.94	34.73	54.00	-19.27	AVG	
5	7307.000	49.84	1.18	51.02	74.00	-22.98	peak	
6	7409.000	37.07	1.31	38.38	54.00	-15.62	AVG	
7	10435.000	37.06	3.97	41.03	54.00	-12.97	AVG	
8	10928.000	48.59	4.90	53.49	74.00	-20.51	peak	
9	13733.000	44.92	7.92	52.84	74.00	-21.16	peak	
10	13835.000	32.61	8.27	40.88	54.00	-13.12	AVG	
11	17286.000	29.93	11.75	41.68	54.00	-12.32	AVG	
12	17558.000	40.88	12.55	53.43	74.00	-20.57	peak	

Antenna Polarization: Horizontal

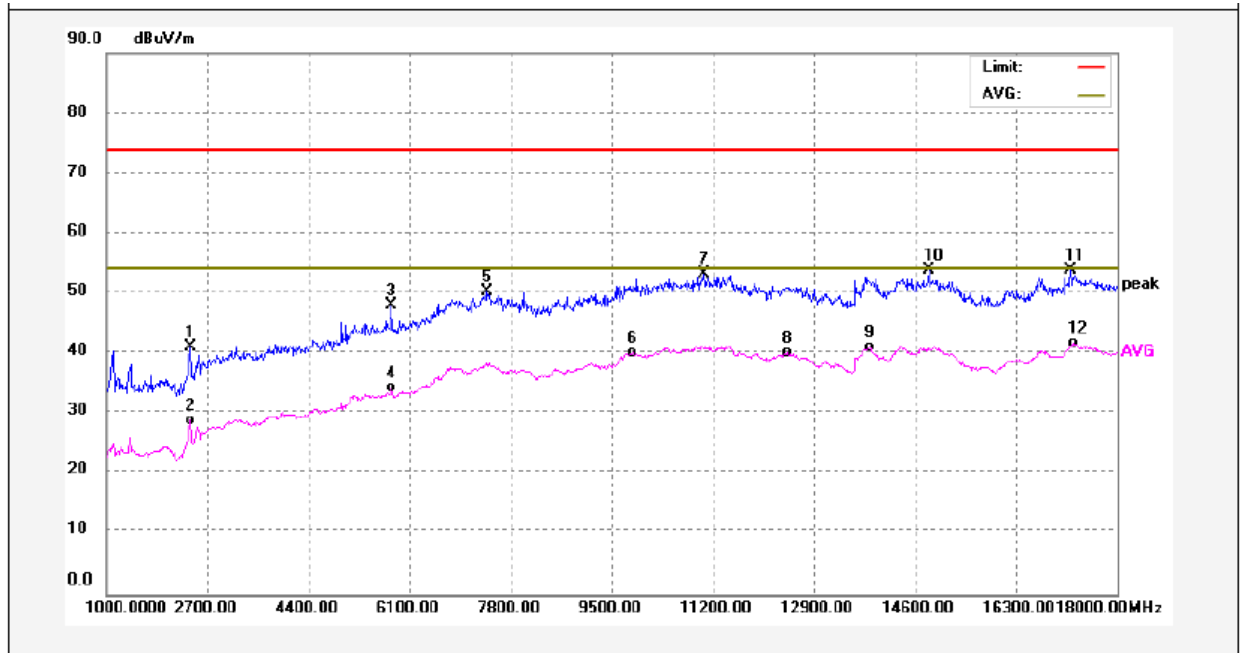

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2411.000	51.77	-10.74	41.03	74.00	-32.97	peak	
2	2411.000	39.62	-10.74	28.88	54.00	-25.12	AVG	
3	5794.000	51.98	-3.94	48.04	74.00	-25.96	peak	
4	5794.000	38.21	-3.94	34.27	54.00	-19.73	AVG	
5	7409.000	49.05	1.31	50.36	74.00	-23.64	peak	
6	9840.000	37.13	3.09	40.22	54.00	-13.78	AVG	
7	11047.000	48.15	5.02	53.17	74.00	-20.83	peak	
8	12458.000	35.53	4.56	40.09	54.00	-13.91	AVG	
9	13835.000	32.69	8.27	40.96	54.00	-13.04	AVG	
10	14838.000	44.67	9.20	53.87	74.00	-20.13	peak	
11	17218.000	42.21	11.61	53.82	74.00	-20.18	peak	
12	17252.000	30.00	11.67	41.67	54.00	-12.33	AVG	


Test Frequency: 18GHz~25GHz

Remark: only the worst data (8DPSK modulation mode) were reported.


Left earbud

Low channel

Antenna Polarization: Vertical

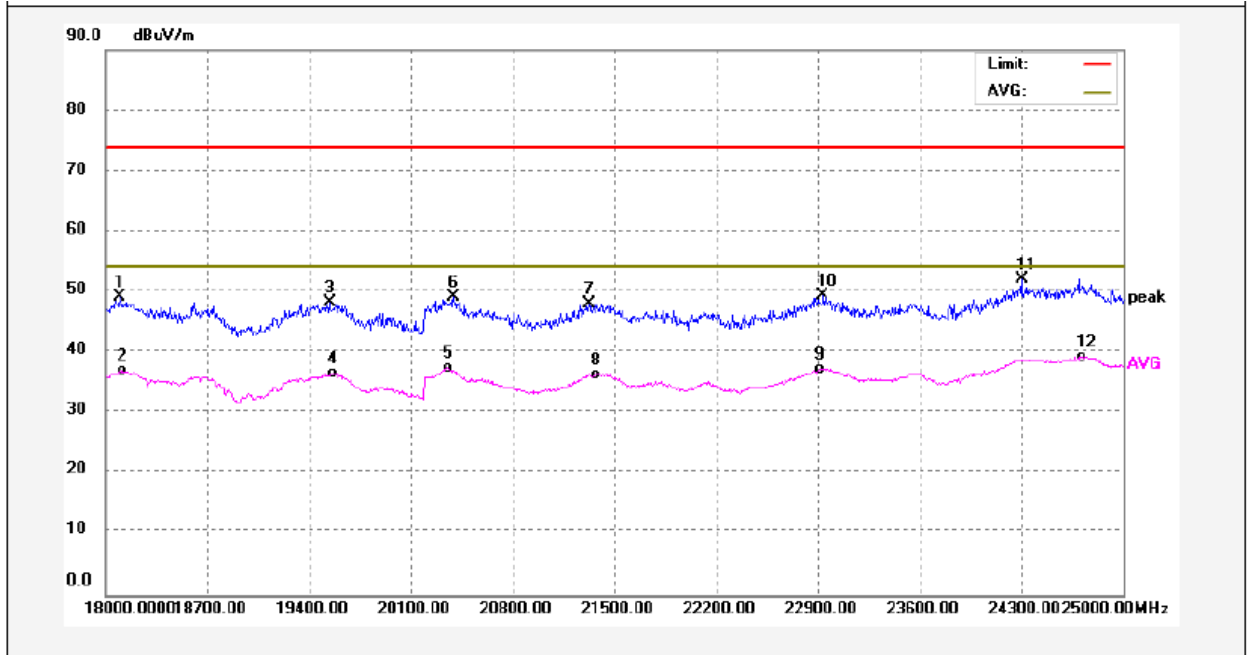


Antenna Polarization: Horizontal

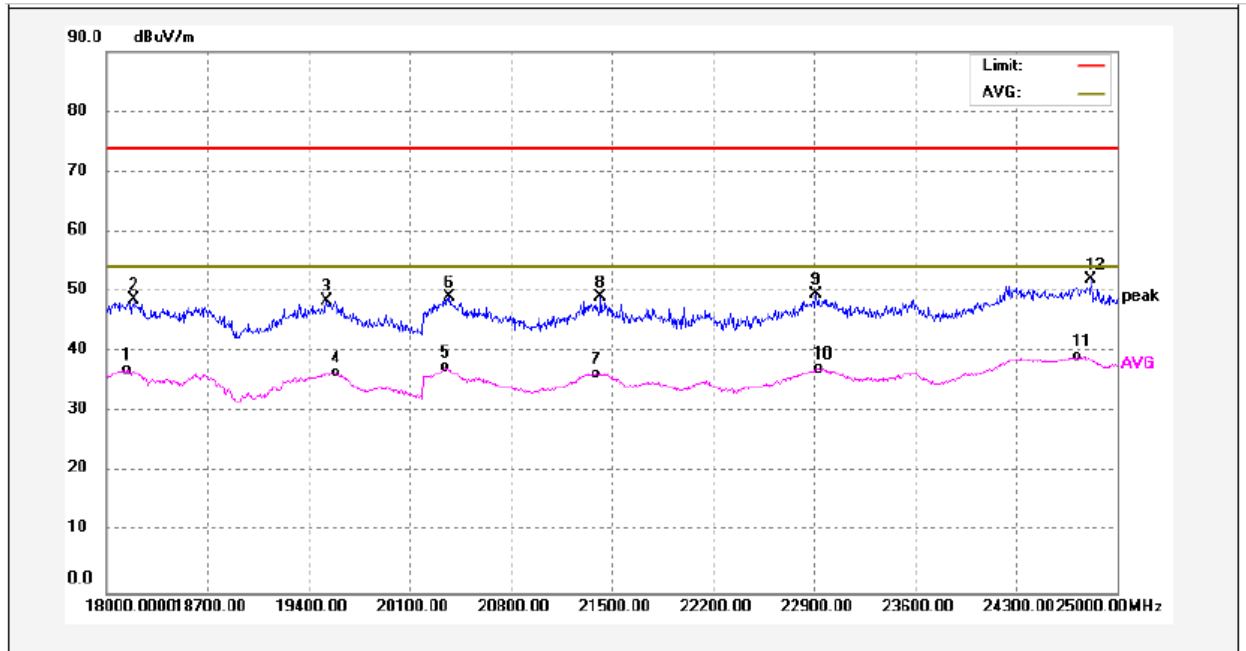

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	18147.000	39.77	-2.65	37.12	54.00	-16.88	AVG	
2	18189.000	51.56	-2.74	48.82	74.00	-25.18	peak	
3	19526.000	51.11	-2.63	48.48	74.00	-25.52	peak	
4	19589.000	39.33	-2.82	36.51	54.00	-17.49	AVG	
5	20345.000	41.02	-3.64	37.38	54.00	-16.62	AVG	
6	20373.000	52.66	-3.56	49.10	74.00	-24.90	peak	
7	21395.000	39.70	-3.35	36.35	54.00	-17.65	AVG	
8	21423.000	52.54	-3.40	49.14	74.00	-24.86	peak	
9	22914.000	52.38	-2.72	49.66	74.00	-24.34	peak	
10	22935.000	39.99	-2.66	37.33	54.00	-16.67	AVG	
11	24720.000	41.38	-2.16	39.22	54.00	-14.78	AVG	
12	24818.000	54.22	-2.07	52.15	74.00	-21.85	peak	


Middle channel

Antenna Polarization: Vertical

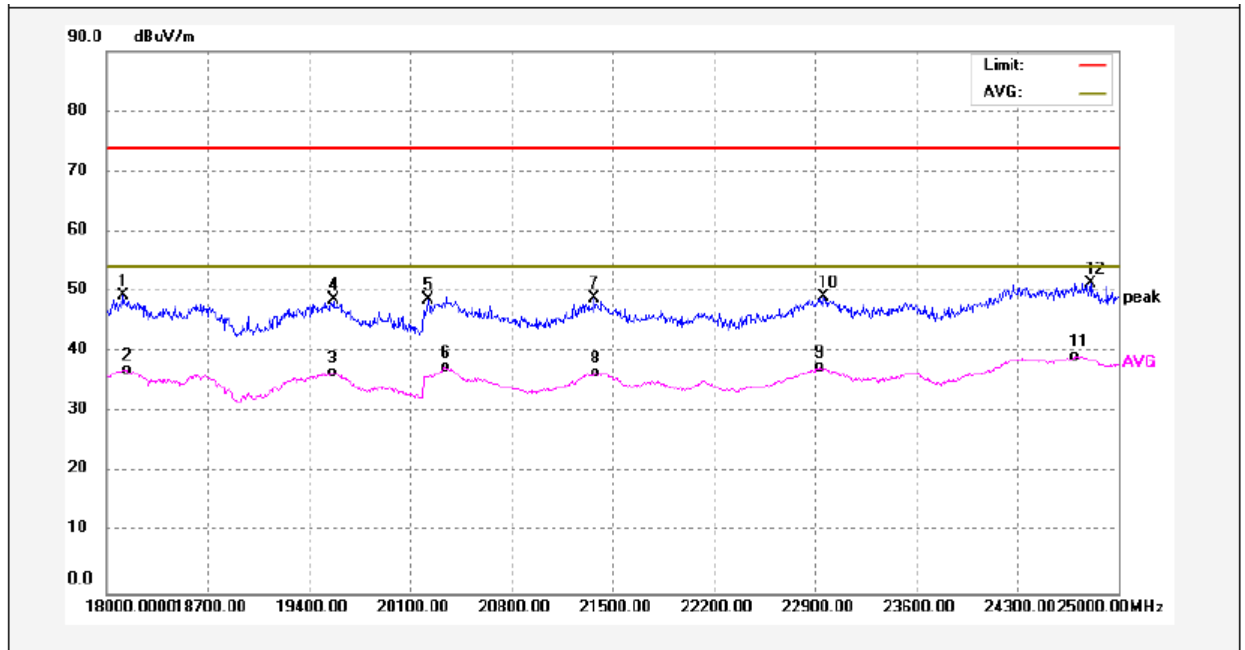

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	18119.000	51.99	-2.60	49.39	74.00	-24.61	peak	
2	18147.000	39.77	-2.65	37.12	54.00	-16.88	AVG	
3	19561.000	39.36	-2.74	36.62	54.00	-17.38	AVG	
4	19568.000	51.36	-2.76	48.60	74.00	-25.40	peak	
5	20226.000	52.58	-3.86	48.72	74.00	-25.28	peak	
6	20345.000	41.09	-3.64	37.45	54.00	-16.55	AVG	
7	21374.000	52.29	-3.31	48.98	74.00	-25.02	peak	
8	21381.000	39.81	-3.32	36.49	54.00	-17.51	AVG	
9	22928.000	40.05	-2.69	37.36	54.00	-16.64	AVG	
10	22956.000	51.71	-2.60	49.11	74.00	-24.89	peak	
11	24699.000	41.48	-2.14	39.34	54.00	-14.66	AVG	
12	24804.000	53.58	-2.10	51.48	74.00	-22.52	peak	


Antenna Polarization: Horizontal

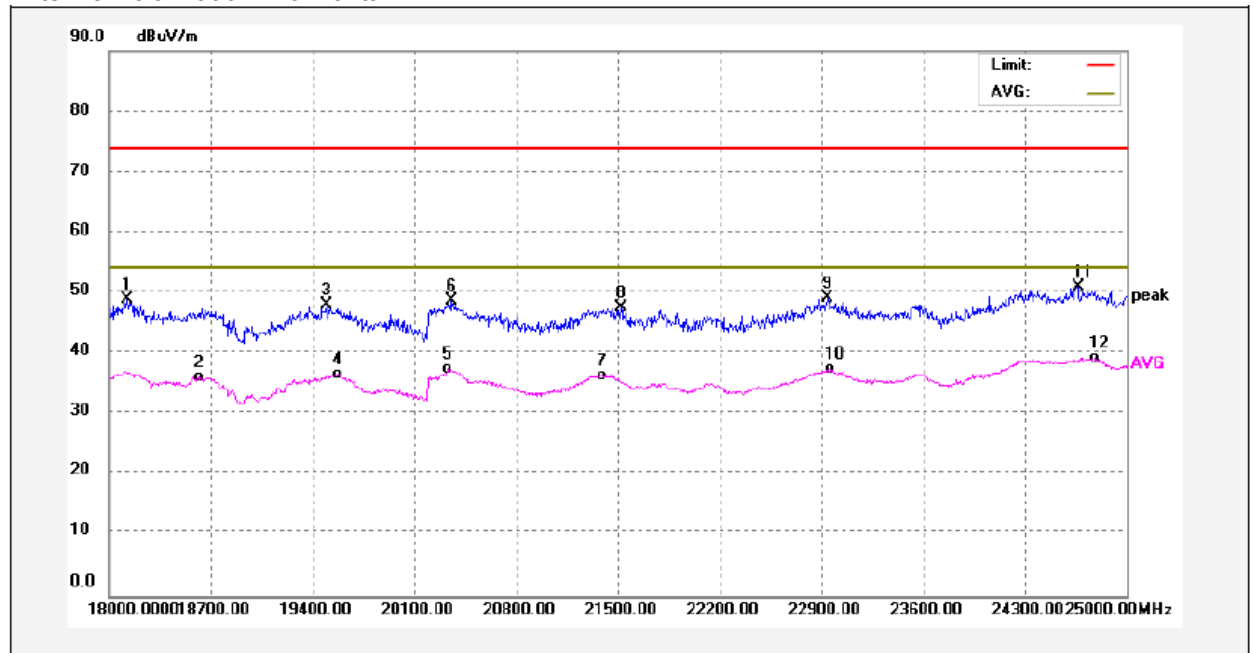

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	18126.000	51.44	-2.60	48.84	74.00	-25.16	peak	
2	18623.000	39.00	-2.95	36.05	54.00	-17.95	AVG	
3	19498.000	50.49	-2.55	47.94	74.00	-26.06	peak	
4	19568.000	39.23	-2.76	36.47	54.00	-17.53	AVG	
5	20331.000	41.09	-3.69	37.40	54.00	-16.60	AVG	
6	20352.000	52.30	-3.63	48.67	74.00	-25.33	peak	
7	21395.000	39.71	-3.35	36.36	54.00	-17.64	AVG	
8	21521.000	51.10	-3.55	47.55	74.00	-26.45	peak	
9	22942.000	51.82	-2.64	49.18	74.00	-24.82	peak	
10	22963.000	39.97	-2.58	37.39	54.00	-16.61	AVG	
11	24664.000	53.09	-2.12	50.97	74.00	-23.03	peak	
12	24783.000	41.36	-2.13	39.23	54.00	-14.77	AVG	


Hight channel

Antenna Polarization: Vertical

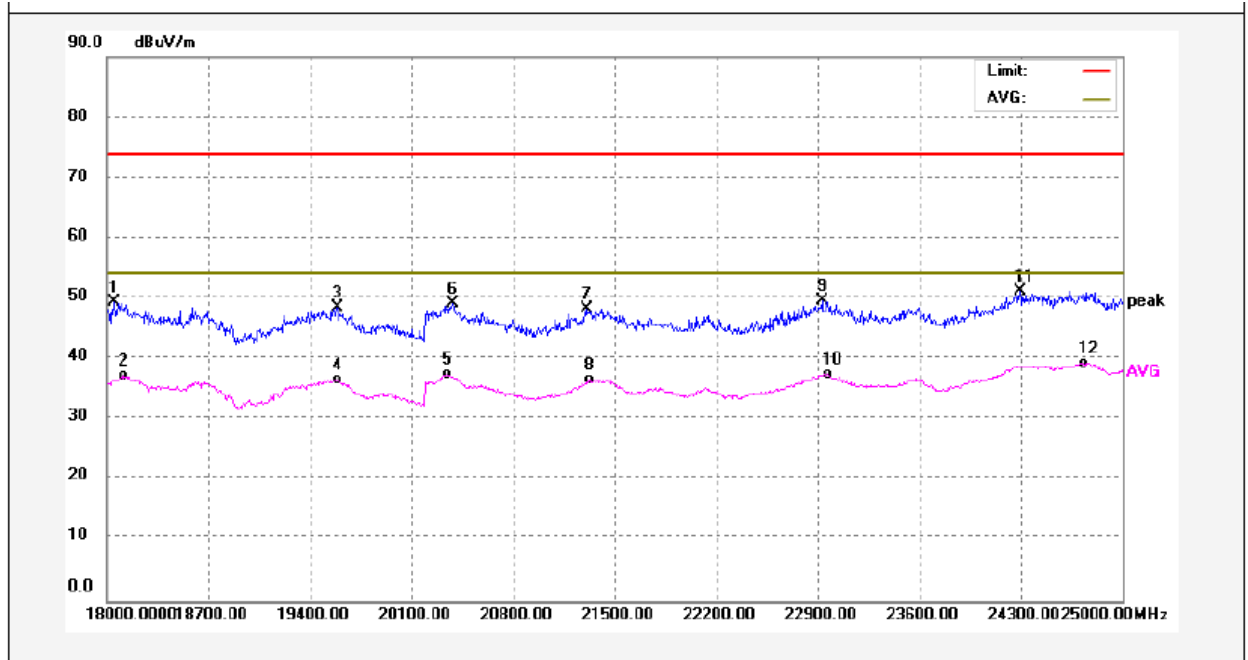

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	18049.000	51.89	-2.44	49.45	74.00	-24.55	peak	
2	18119.000	39.79	-2.60	37.19	54.00	-16.81	AVG	
3	19589.000	51.41	-2.82	48.59	74.00	-25.41	peak	
4	19589.000	39.37	-2.82	36.55	54.00	-17.45	AVG	
5	20345.000	41.07	-3.64	37.43	54.00	-16.57	AVG	
6	20387.000	52.66	-3.52	49.14	74.00	-24.86	peak	
7	21304.000	51.53	-3.16	48.37	74.00	-25.63	peak	
8	21325.000	39.69	-3.21	36.48	54.00	-17.52	AVG	
9	22928.000	52.30	-2.69	49.61	74.00	-24.39	peak	
10	22970.000	40.06	-2.56	37.50	54.00	-16.50	AVG	
11	24293.000	53.46	-2.25	51.21	74.00	-22.79	peak	
12	24734.000	41.47	-2.16	39.31	54.00	-14.69	AVG	

Antenna Polarization: Horizontal

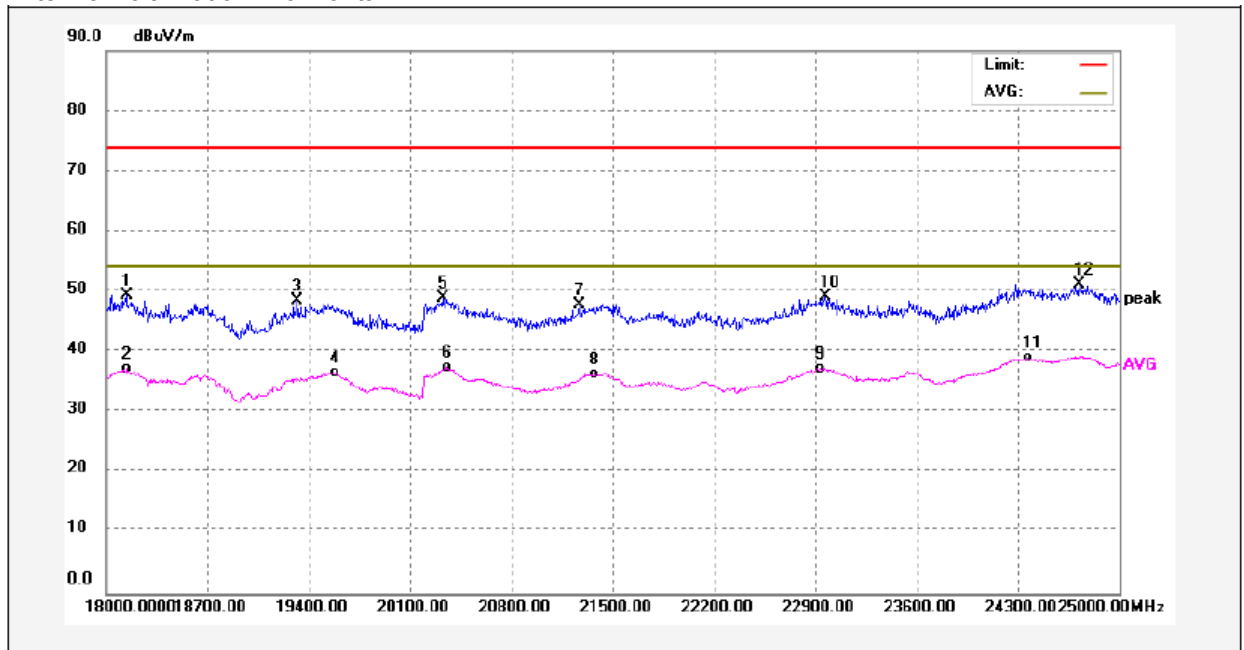


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	18140.000	52.07	-2.64	49.43	74.00	-24.57	peak	
2	18147.000	39.96	-2.65	37.31	54.00	-16.69	AVG	
3	19323.000	51.31	-2.85	48.46	74.00	-25.54	peak	
4	19582.000	39.34	-2.80	36.54	54.00	-17.46	AVG	
5	20324.000	52.67	-3.71	48.96	74.00	-25.04	peak	
6	20359.000	41.07	-3.61	37.46	54.00	-16.54	AVG	
7	21269.000	51.01	-3.11	47.90	74.00	-26.10	peak	
8	21374.000	39.69	-3.31	36.38	54.00	-17.62	AVG	
9	22928.000	40.04	-2.69	37.35	54.00	-16.65	AVG	
10	22970.000	51.66	-2.56	49.10	74.00	-24.90	peak	
11	24370.000	41.19	-2.16	39.03	54.00	-14.97	AVG	
12	24720.000	53.36	-2.16	51.20	74.00	-22.80	peak	

Right earbud


Low channel

Antenna Polarization: Vertical

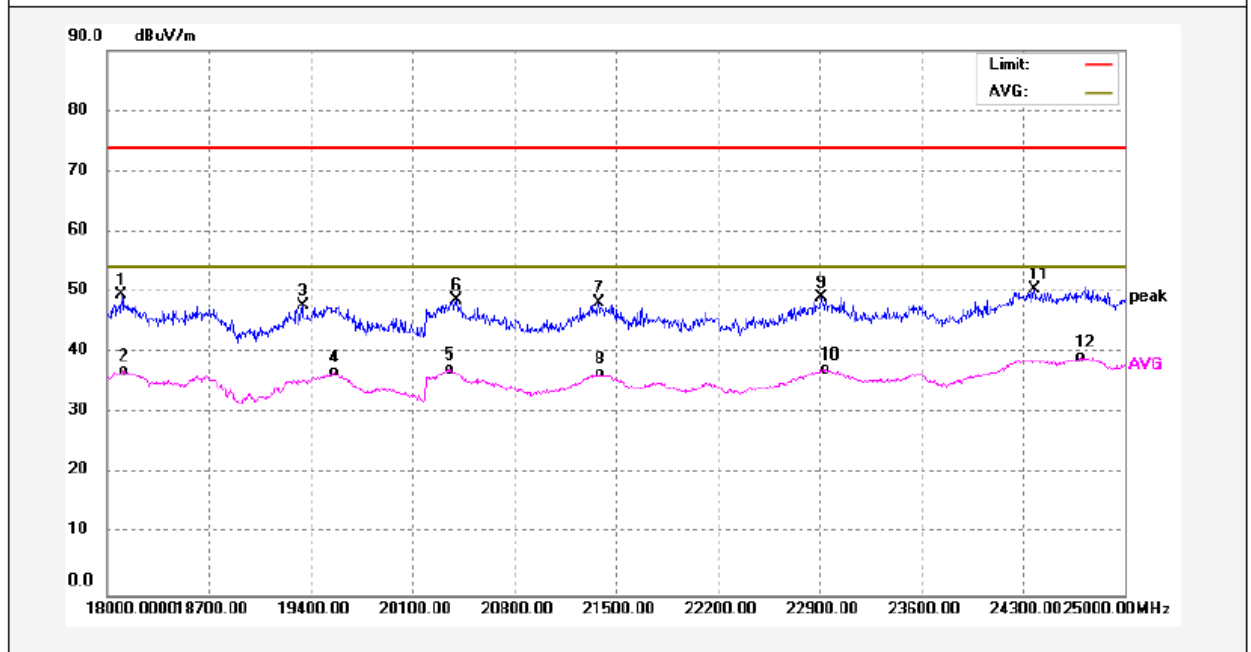

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	18098.000	52.27	-2.55	49.72	74.00	-24.28	peak	
2	18119.000	39.60	-2.60	37.00	54.00	-17.00	AVG	
3	19344.000	50.57	-2.82	47.75	74.00	-26.25	peak	
4	19561.000	39.55	-2.74	36.81	54.00	-17.19	AVG	
5	20352.000	40.93	-3.63	37.30	54.00	-16.70	AVG	
6	20401.000	52.24	-3.48	48.76	74.00	-25.24	peak	
7	21381.000	51.52	-3.32	48.20	74.00	-25.80	peak	
8	21395.000	39.80	-3.35	36.45	54.00	-17.55	AVG	
9	22914.000	51.95	-2.72	49.23	74.00	-24.77	peak	
10	22942.000	39.93	-2.64	37.29	54.00	-16.71	AVG	
11	24377.000	52.64	-2.14	50.50	74.00	-23.50	peak	
12	24692.000	41.36	-2.14	39.22	54.00	-14.78	AVG	


Antenna Polarization: Horizontal

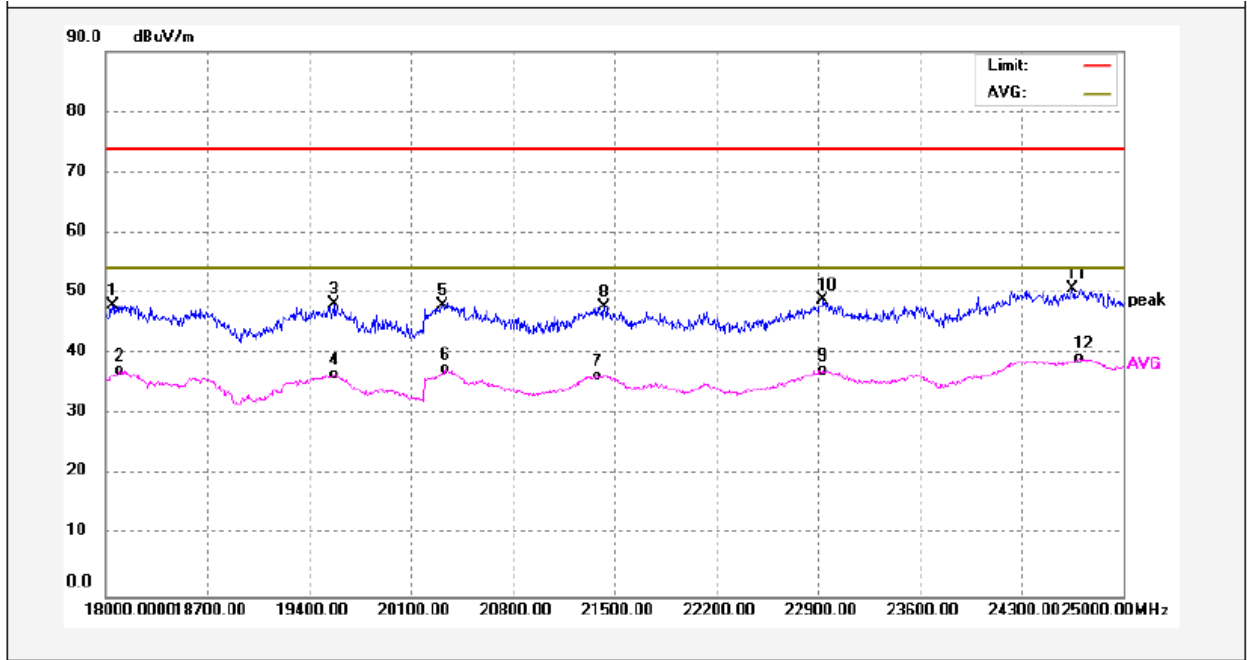

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	18049.000	50.58	-2.44	48.14	74.00	-25.86	peak	
2	18098.000	39.82	-2.55	37.27	54.00	-16.73	AVG	
3	19575.000	51.10	-2.78	48.32	74.00	-25.68	peak	
4	19575.000	39.31	-2.78	36.53	54.00	-17.47	AVG	
5	20317.000	51.75	-3.73	48.02	74.00	-25.98	peak	
6	20338.000	41.09	-3.66	37.43	54.00	-16.57	AVG	
7	21381.000	39.67	-3.32	36.35	54.00	-17.65	AVG	
8	21430.000	51.24	-3.42	47.82	74.00	-26.18	peak	
9	22928.000	40.00	-2.69	37.31	54.00	-16.69	AVG	
10	22935.000	51.54	-2.66	48.88	74.00	-25.12	peak	
11	24650.000	52.77	-2.10	50.67	74.00	-23.33	peak	
12	24692.000	41.38	-2.14	39.24	54.00	-14.76	AVG	


Middle channel

Antenna Polarization: Vertical

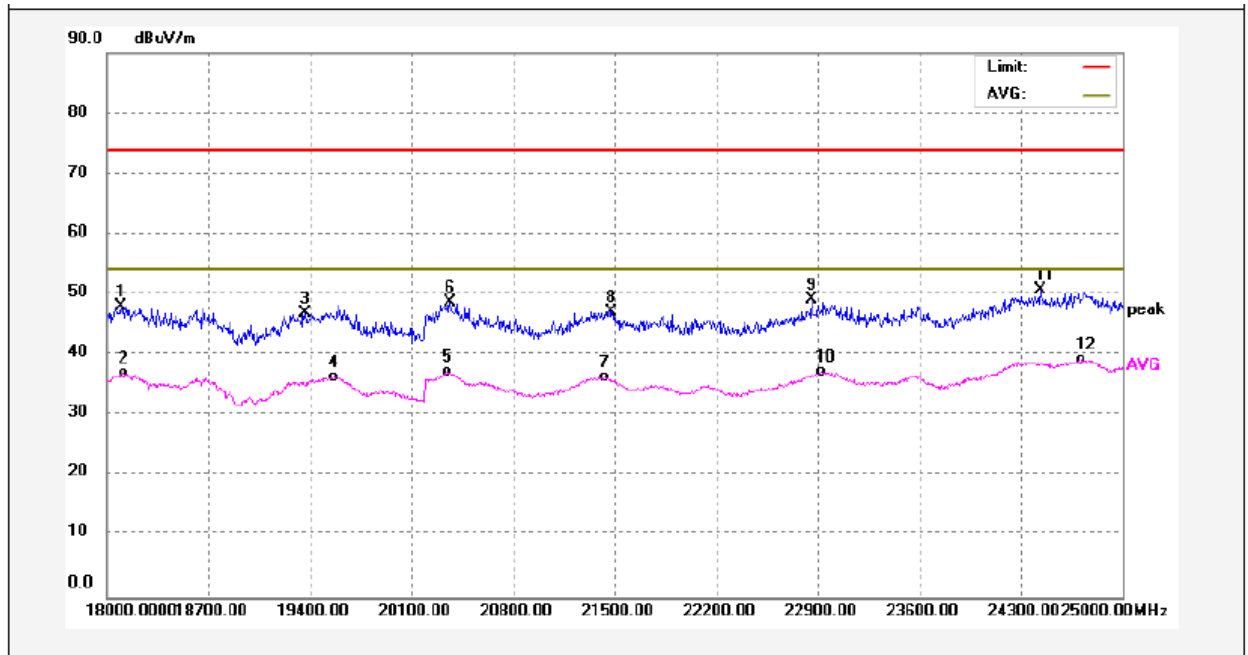

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	18098.000	50.68	-2.55	48.13	74.00	-25.87	peak	
2	18112.000	39.53	-2.58	36.95	54.00	-17.05	AVG	
3	19365.000	49.78	-2.78	47.00	74.00	-27.00	peak	
4	19561.000	39.08	-2.74	36.34	54.00	-17.66	AVG	
5	20345.000	40.90	-3.64	37.26	54.00	-16.74	AVG	
6	20366.000	52.38	-3.58	48.80	74.00	-25.20	peak	
7	21430.000	39.81	-3.42	36.39	54.00	-17.61	AVG	
8	21472.000	50.73	-3.50	47.23	74.00	-26.77	peak	
9	22858.000	52.03	-2.89	49.14	74.00	-24.86	peak	
10	22921.000	40.02	-2.70	37.32	54.00	-16.68	AVG	
11	24433.000	52.86	-2.07	50.79	74.00	-23.21	peak	
12	24713.000	41.36	-2.16	39.20	54.00	-14.80	AVG	


Antenna Polarization: Horizontal

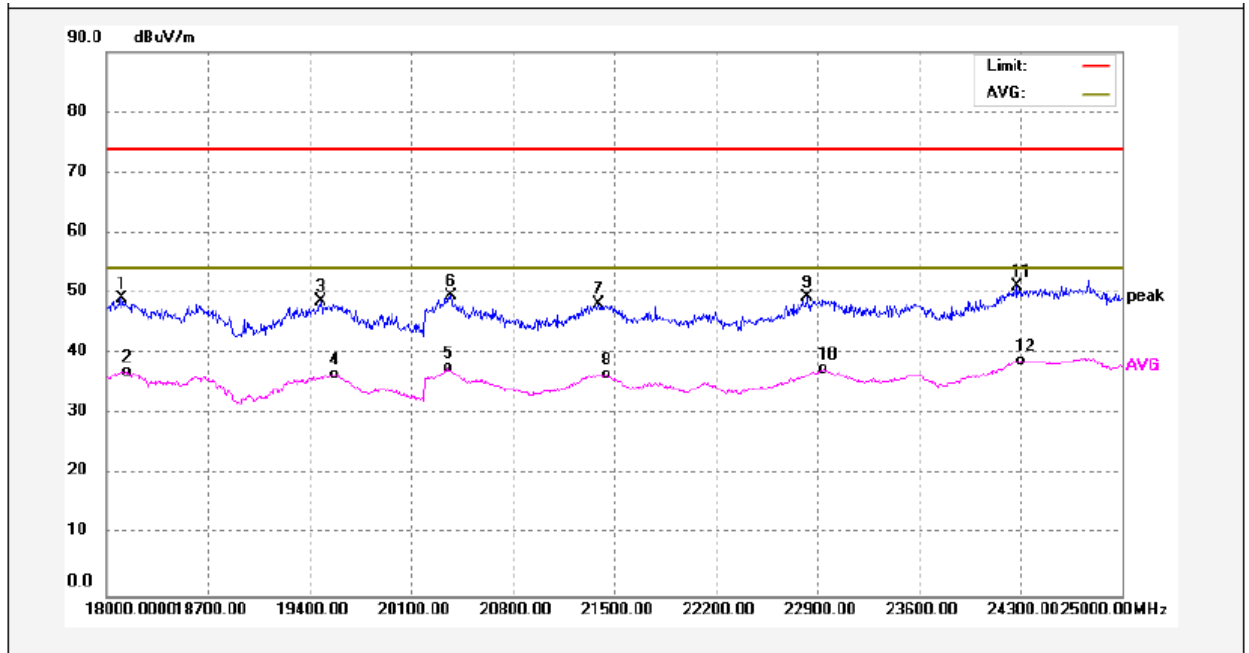

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	18105.000	51.65	-2.56	49.09	74.00	-24.91	peak	
2	18147.000	39.58	-2.65	36.93	54.00	-17.07	AVG	
3	19477.000	51.28	-2.59	48.69	74.00	-25.31	peak	
4	19575.000	39.38	-2.78	36.60	54.00	-17.40	AVG	
5	20359.000	41.25	-3.61	37.64	54.00	-16.36	AVG	
6	20373.000	53.09	-3.56	49.53	74.00	-24.47	peak	
7	21395.000	51.52	-3.35	48.17	74.00	-25.83	peak	
8	21444.000	40.00	-3.45	36.55	54.00	-17.45	AVG	
9	22830.000	52.25	-2.97	49.28	74.00	-24.72	peak	
10	22942.000	40.03	-2.64	37.39	54.00	-16.61	AVG	
11	24279.000	53.50	-2.26	51.24	74.00	-22.76	peak	
12	24300.000	41.10	-2.24	38.86	54.00	-15.14	AVG	


High channel

Antenna Polarization: Vertical

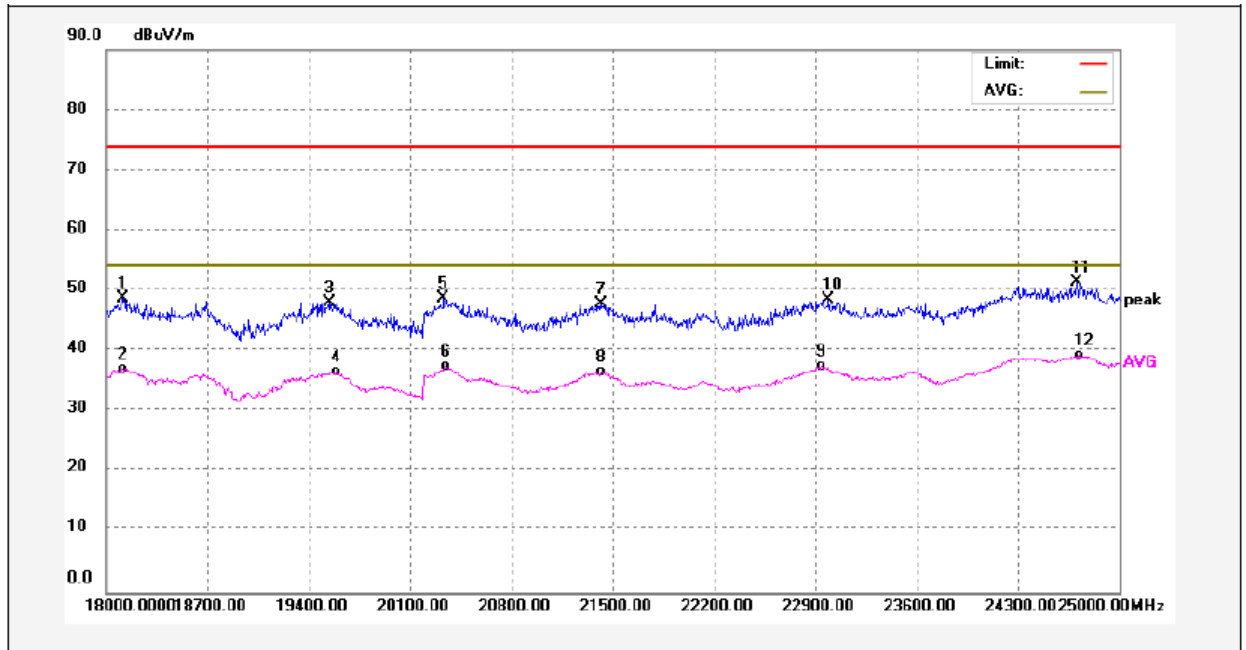

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	18119.000	51.29	-2.60	48.69	74.00	-25.31	peak	
2	18119.000	39.60	-2.60	37.00	54.00	-17.00	AVG	
3	19540.000	50.76	-2.67	48.09	74.00	-25.91	peak	
4	19589.000	39.40	-2.82	36.58	54.00	-17.42	AVG	
5	20331.000	52.42	-3.69	48.73	74.00	-25.27	peak	
6	20345.000	41.08	-3.64	37.44	54.00	-16.56	AVG	
7	21416.000	51.30	-3.39	47.91	74.00	-26.09	peak	
8	21416.000	39.86	-3.39	36.47	54.00	-17.53	AVG	
9	22942.000	40.07	-2.64	37.43	54.00	-16.57	AVG	
10	22991.000	50.93	-2.49	48.44	74.00	-25.56	peak	
11	24706.000	53.45	-2.14	51.31	74.00	-22.69	peak	
12	24727.000	41.36	-2.16	39.20	54.00	-14.80	AVG	

Antenna Polarization: Horizontal

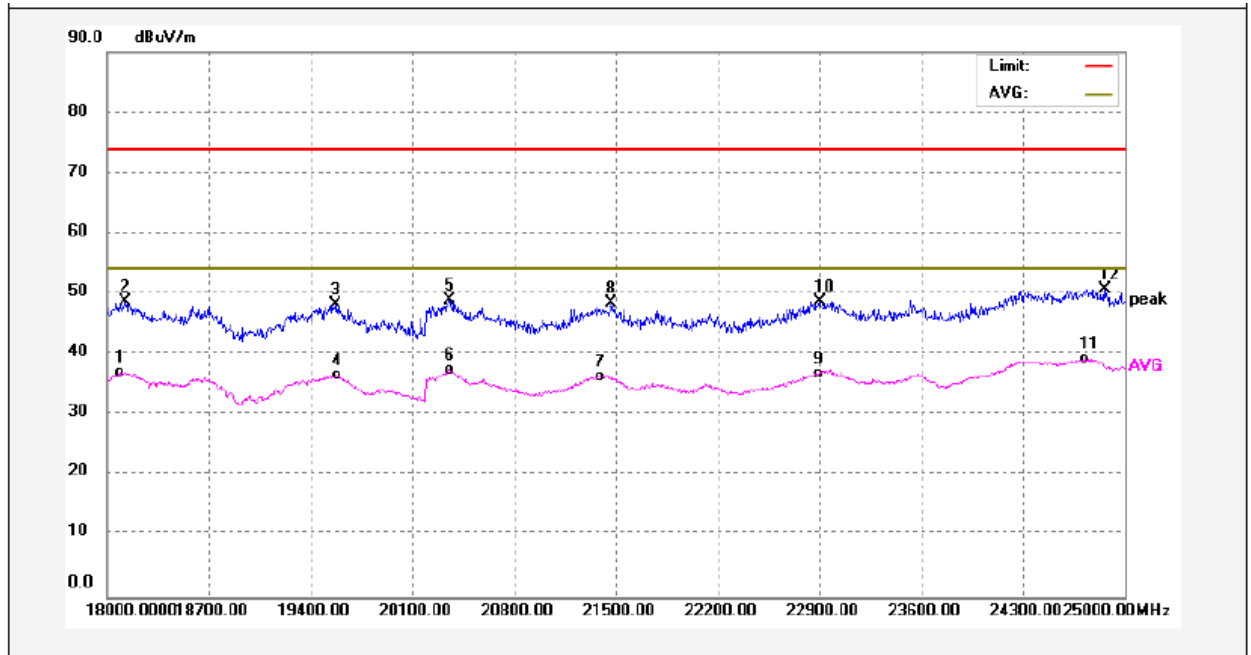


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	18091.000	39.55	-2.53	37.02	54.00	-16.98	AVG	
2	18126.000	51.28	-2.60	48.68	74.00	-25.32	peak	
3	19575.000	51.01	-2.78	48.23	74.00	-25.77	peak	
4	19582.000	39.28	-2.80	36.48	54.00	-17.52	AVG	
5	20352.000	52.62	-3.63	48.99	74.00	-25.01	peak	
6	20359.000	41.01	-3.61	37.40	54.00	-16.60	AVG	
7	21395.000	39.78	-3.35	36.43	54.00	-17.57	AVG	
8	21465.000	51.98	-3.49	48.49	74.00	-25.51	peak	
9	22879.000	39.70	-2.83	36.87	54.00	-17.13	AVG	
10	22900.000	51.59	-2.77	48.82	74.00	-25.18	peak	
11	24727.000	41.40	-2.16	39.24	54.00	-14.76	AVG	
12	24860.000	52.78	-2.01	50.77	74.00	-23.23	peak	

Radiated Restricted Band Emission


Left earbud

1DH5-Low


Antenna Polarization: Vertical

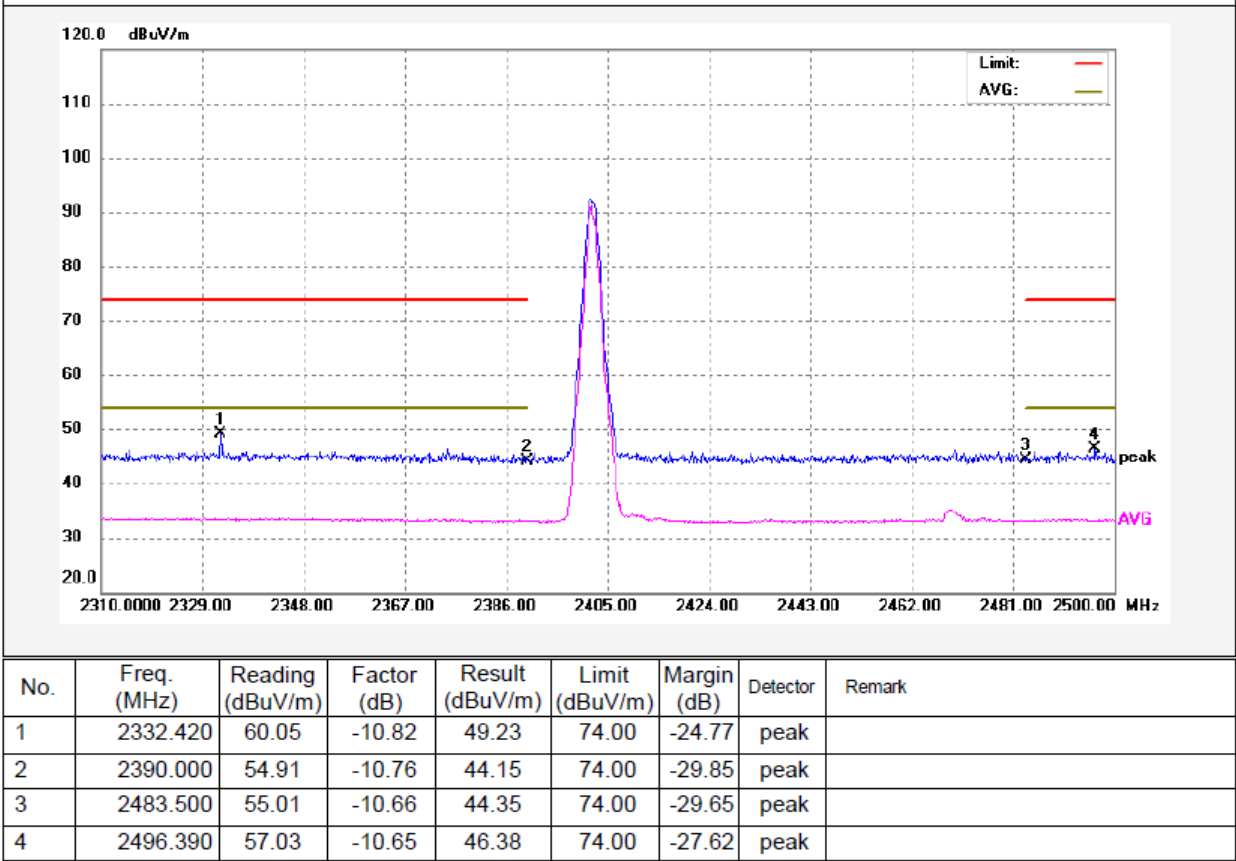


Antenna Polarization: Horizontal

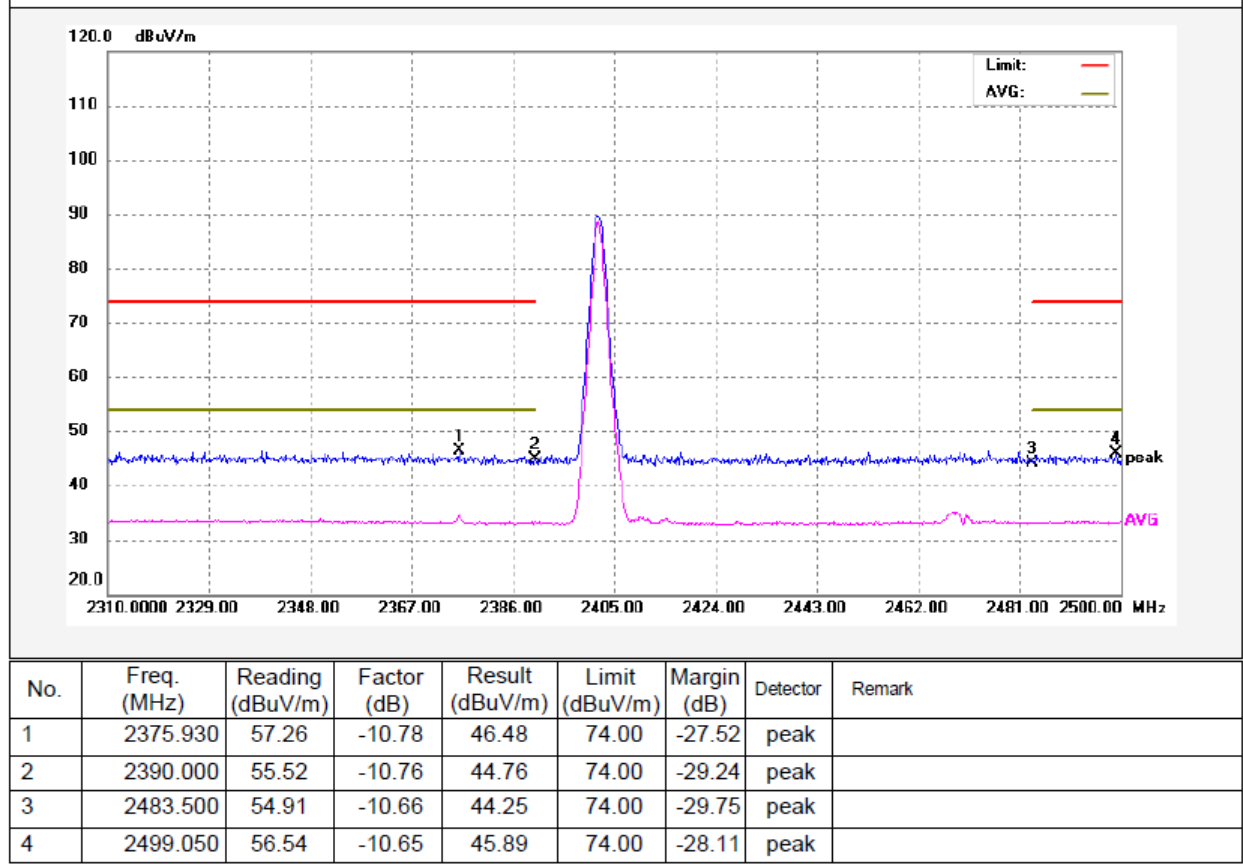

1DH5-High
Antenna Polarization: Vertical

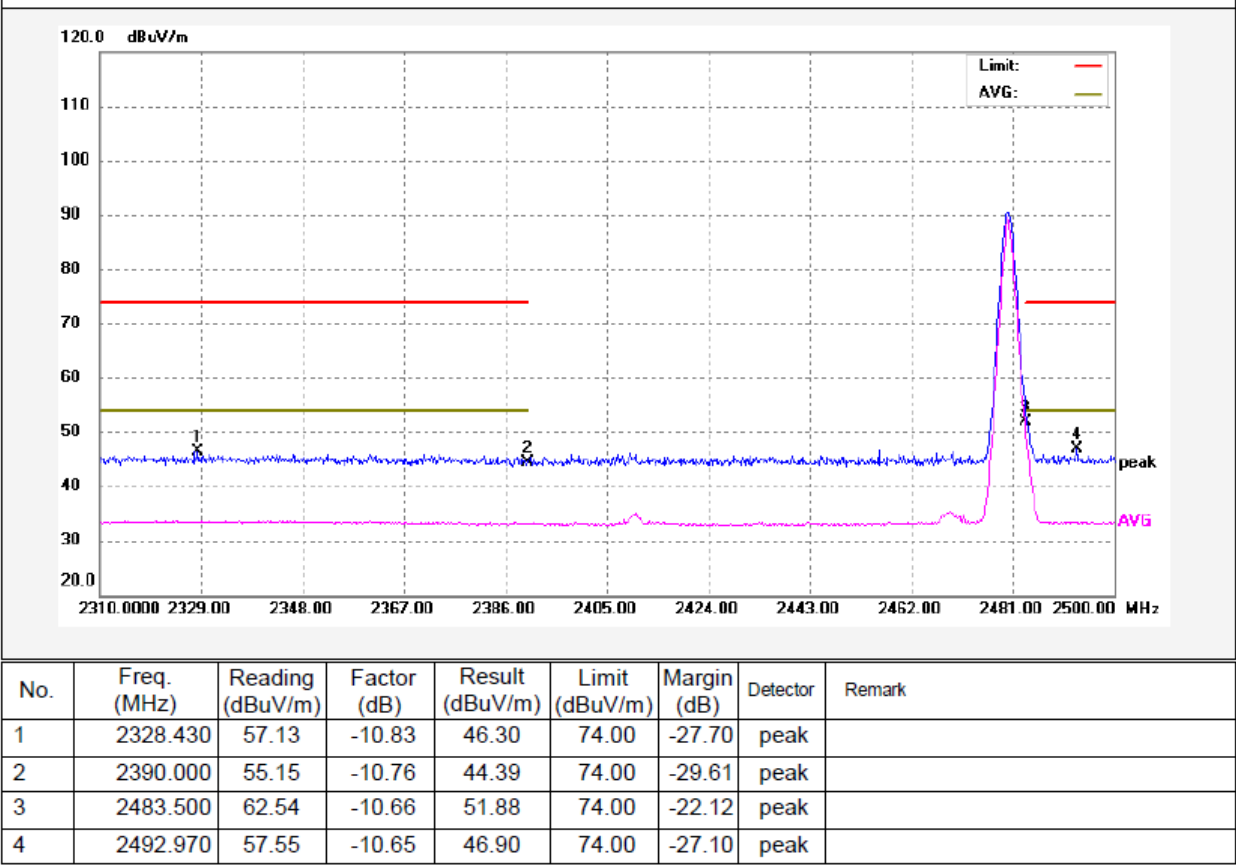


Antenna Polarization: Horizontal

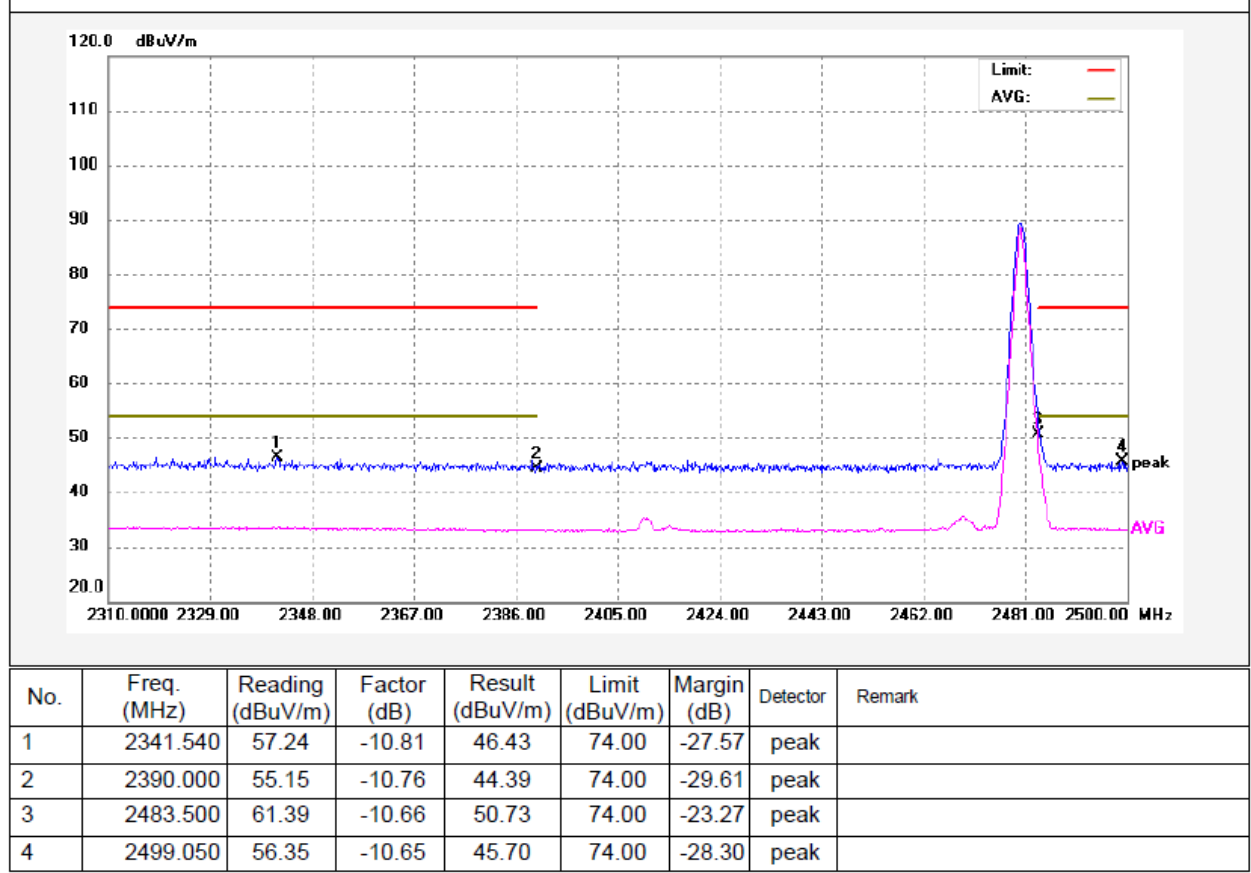


2DH5-Low

Antenna Polarization: Vertical

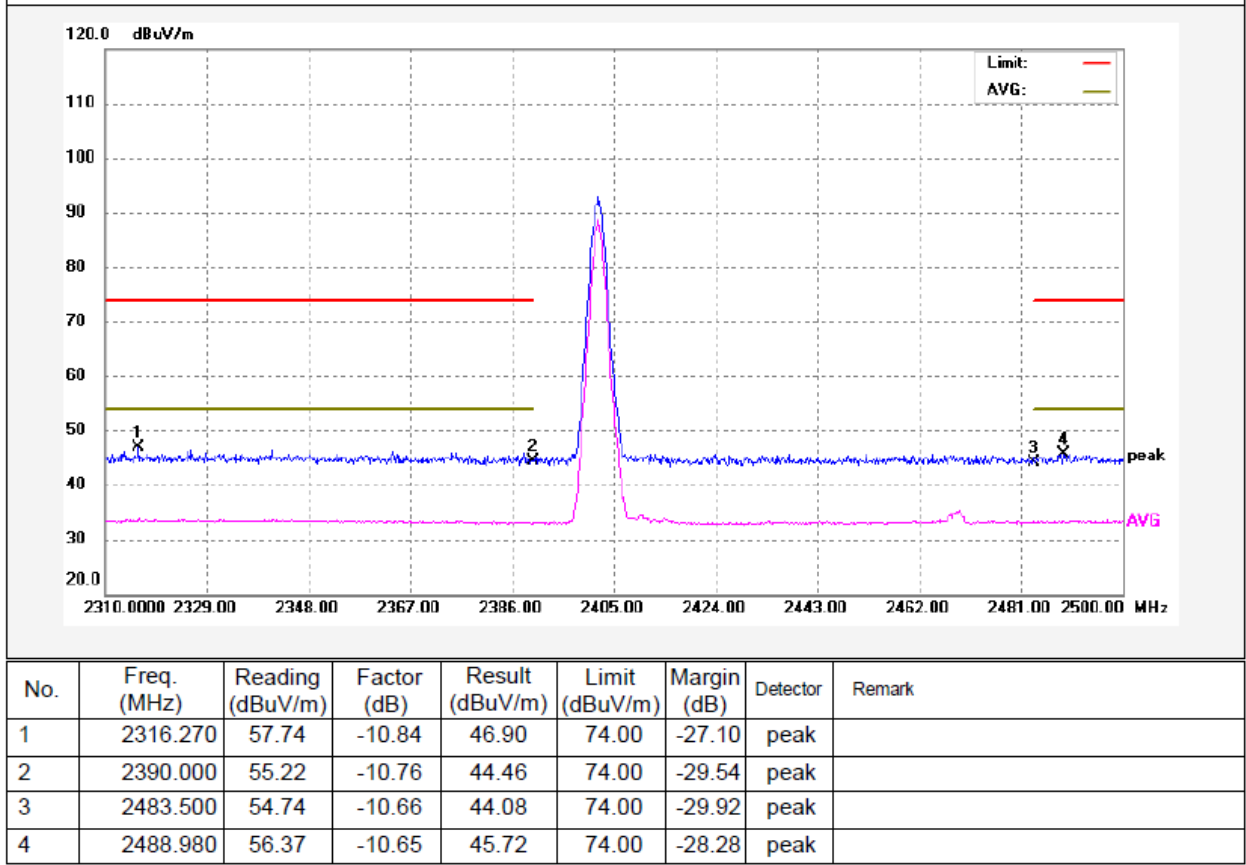


Antenna Polarization: Horizontal

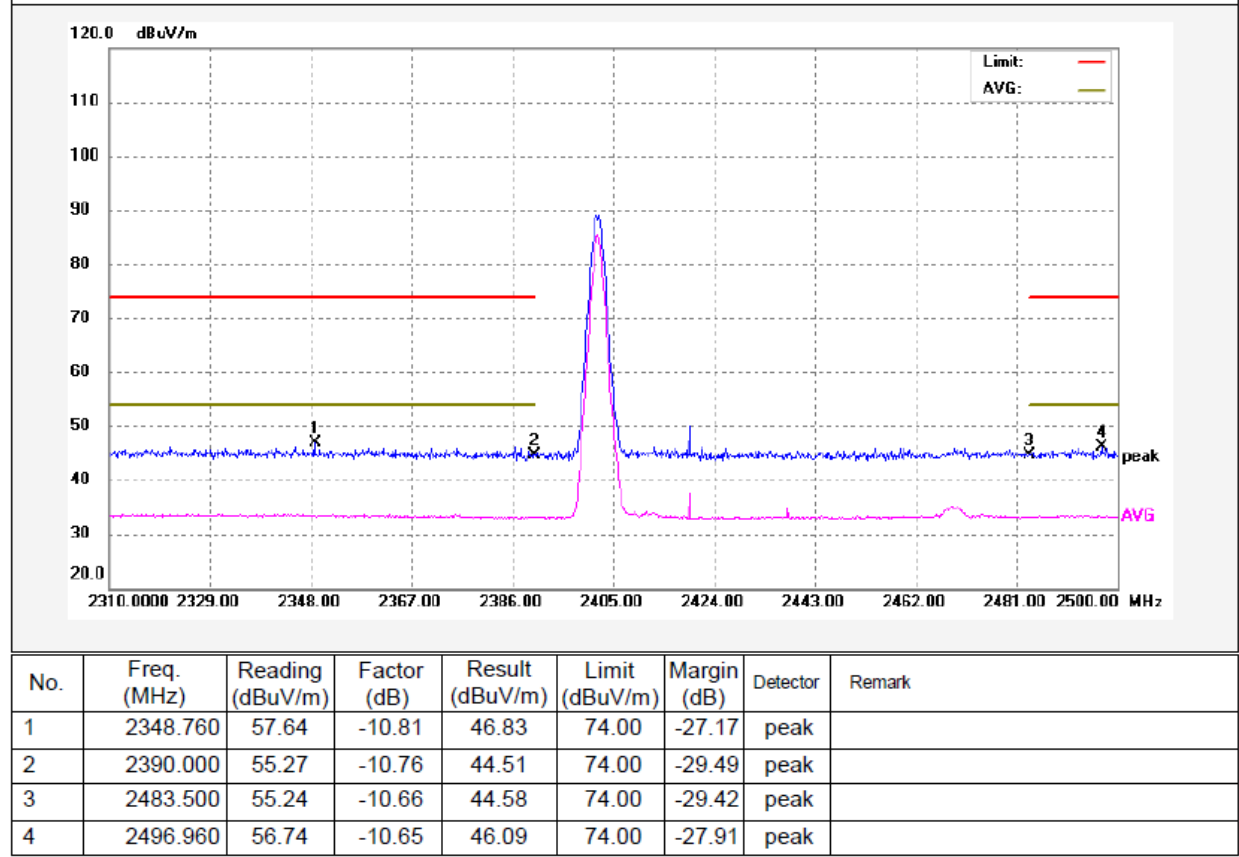


2DH5-High

Antenna Polarization: Vertical

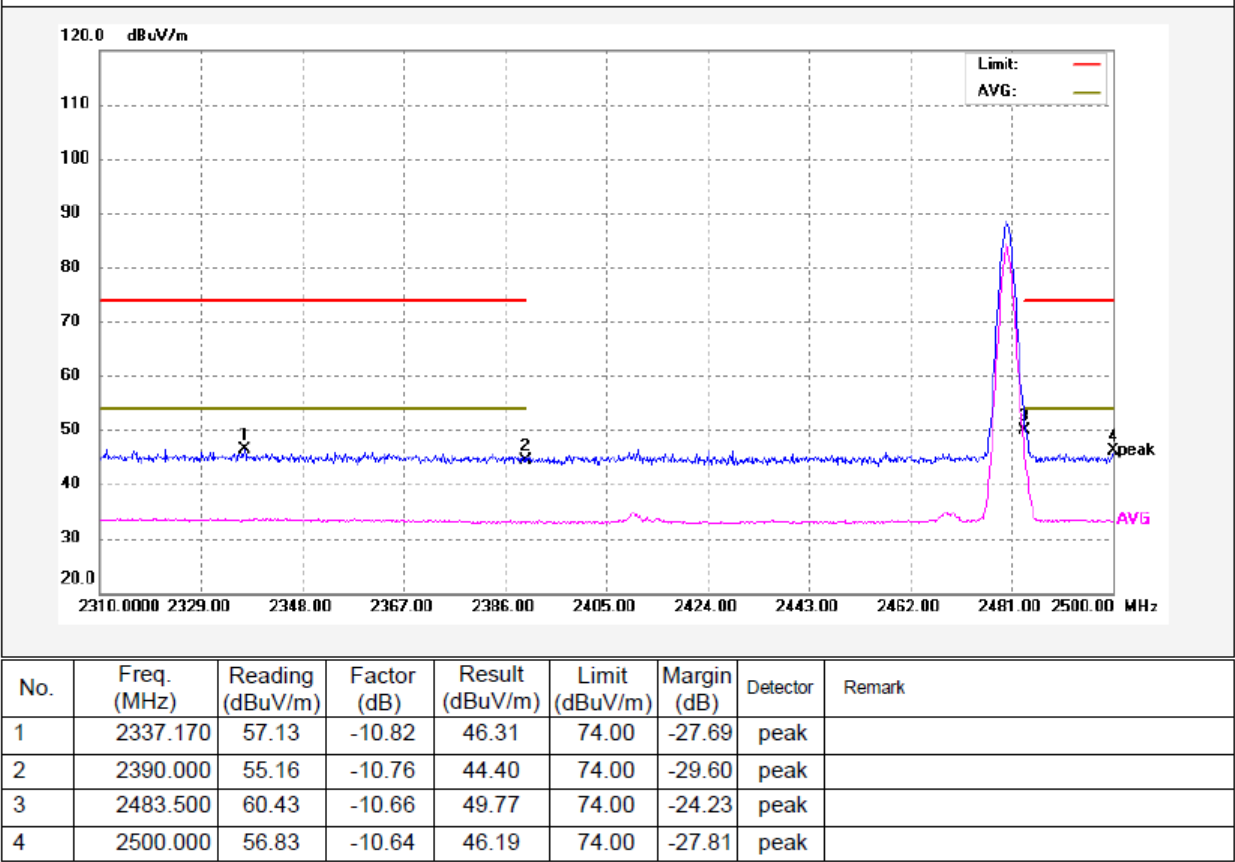


Antenna Polarization: Horizontal

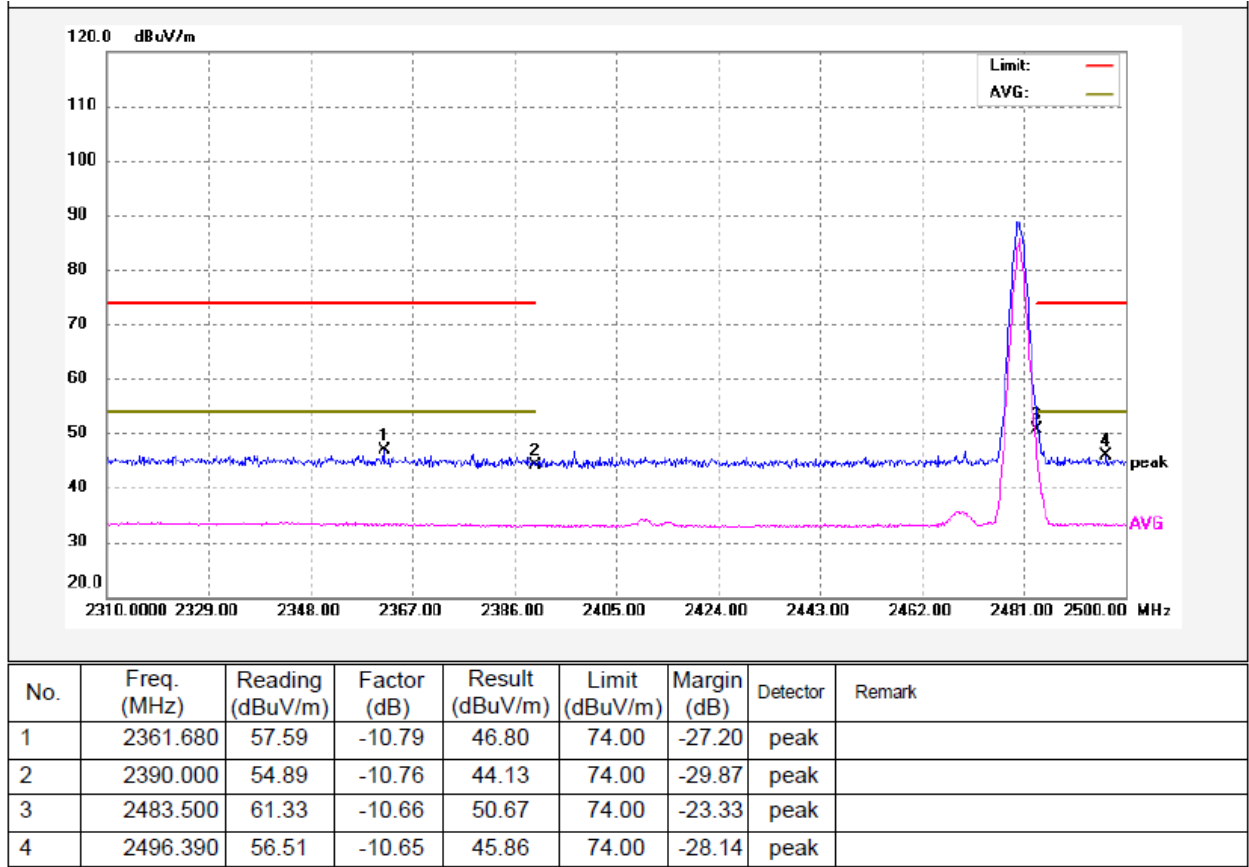


3DH5-Low

Antenna Polarization: Vertical

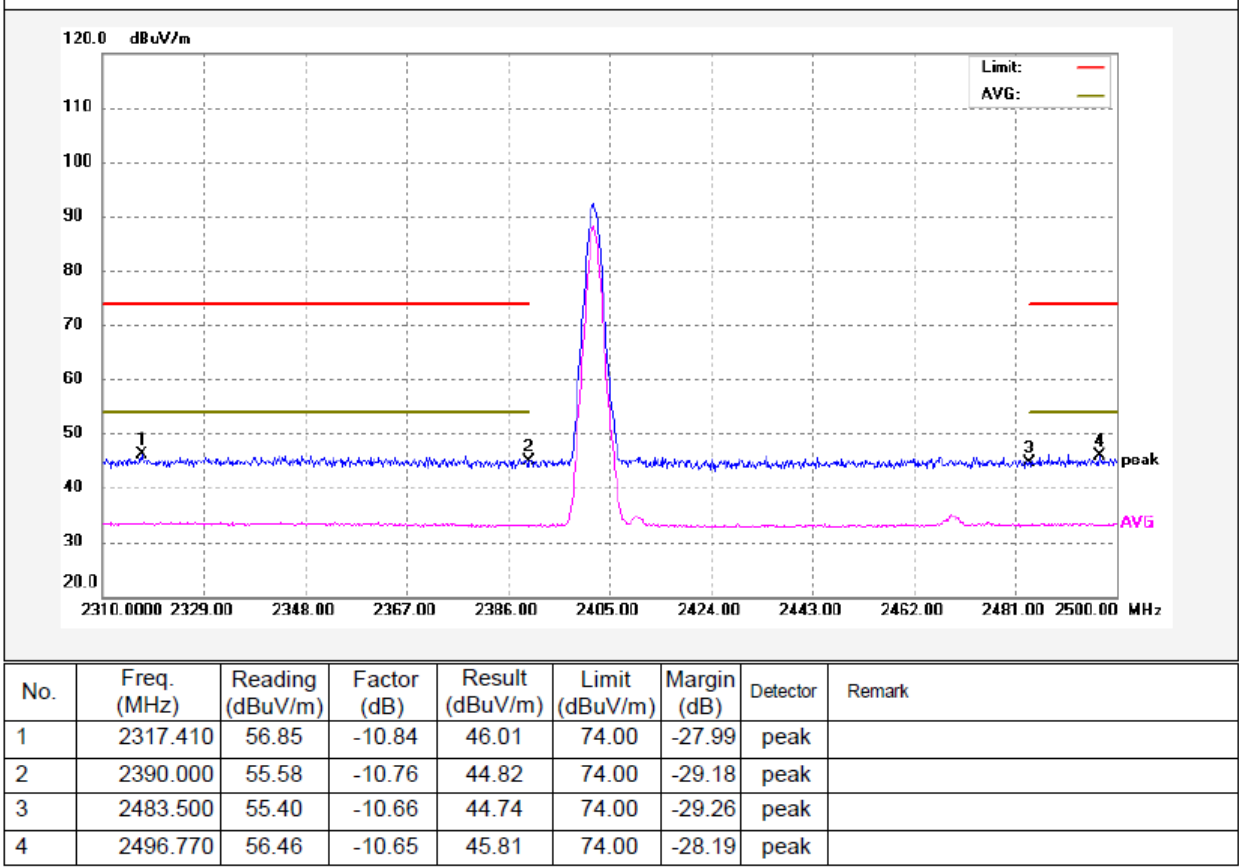


Antenna Polarization: Horizontal

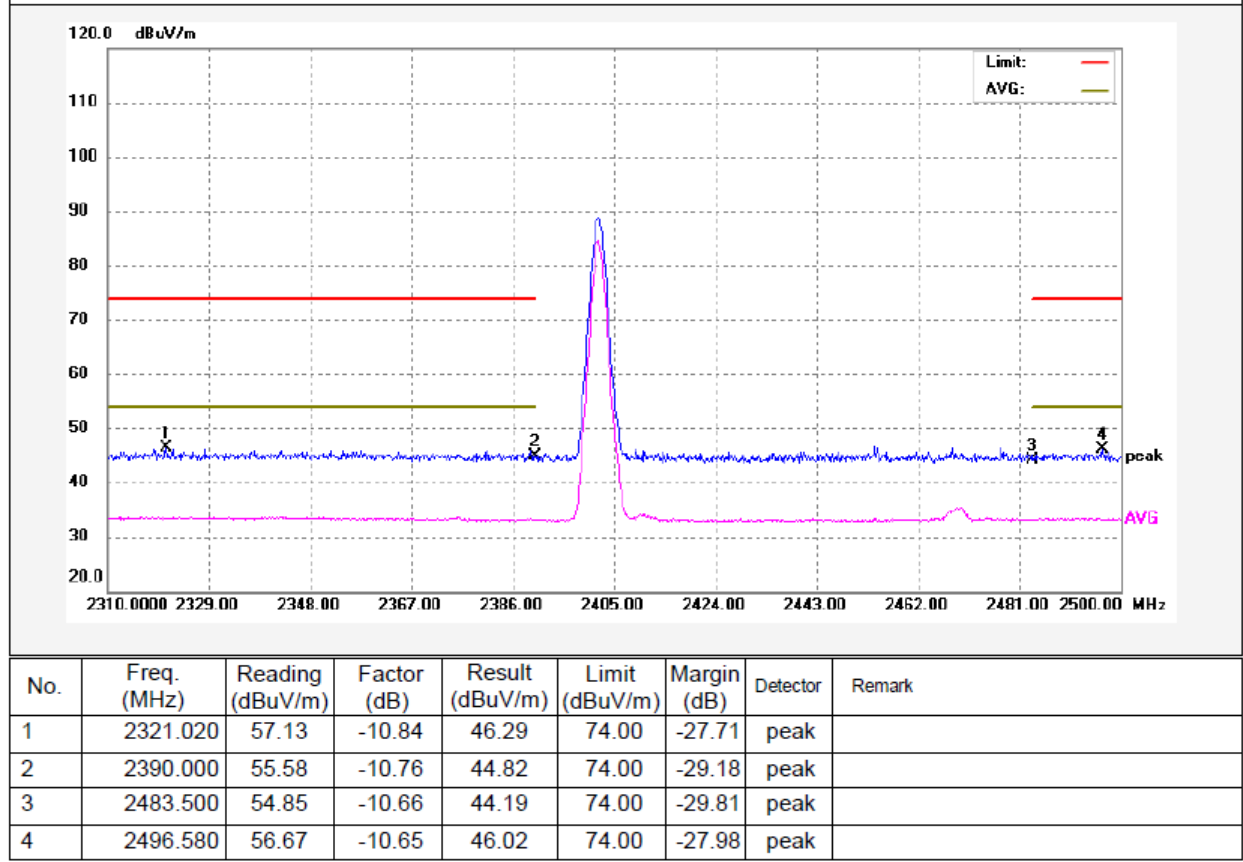


3DH5-High

Antenna Polarization: Vertical

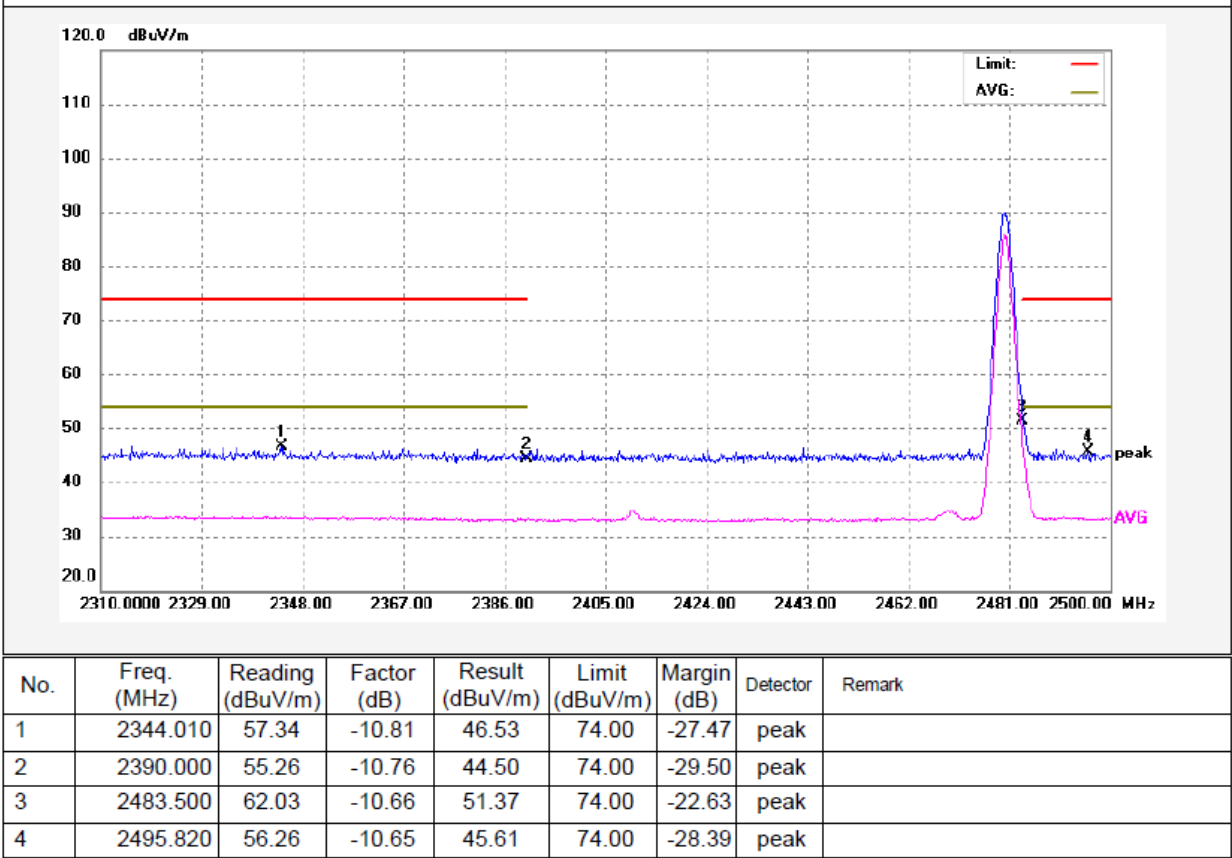


Antenna Polarization: Horizontal

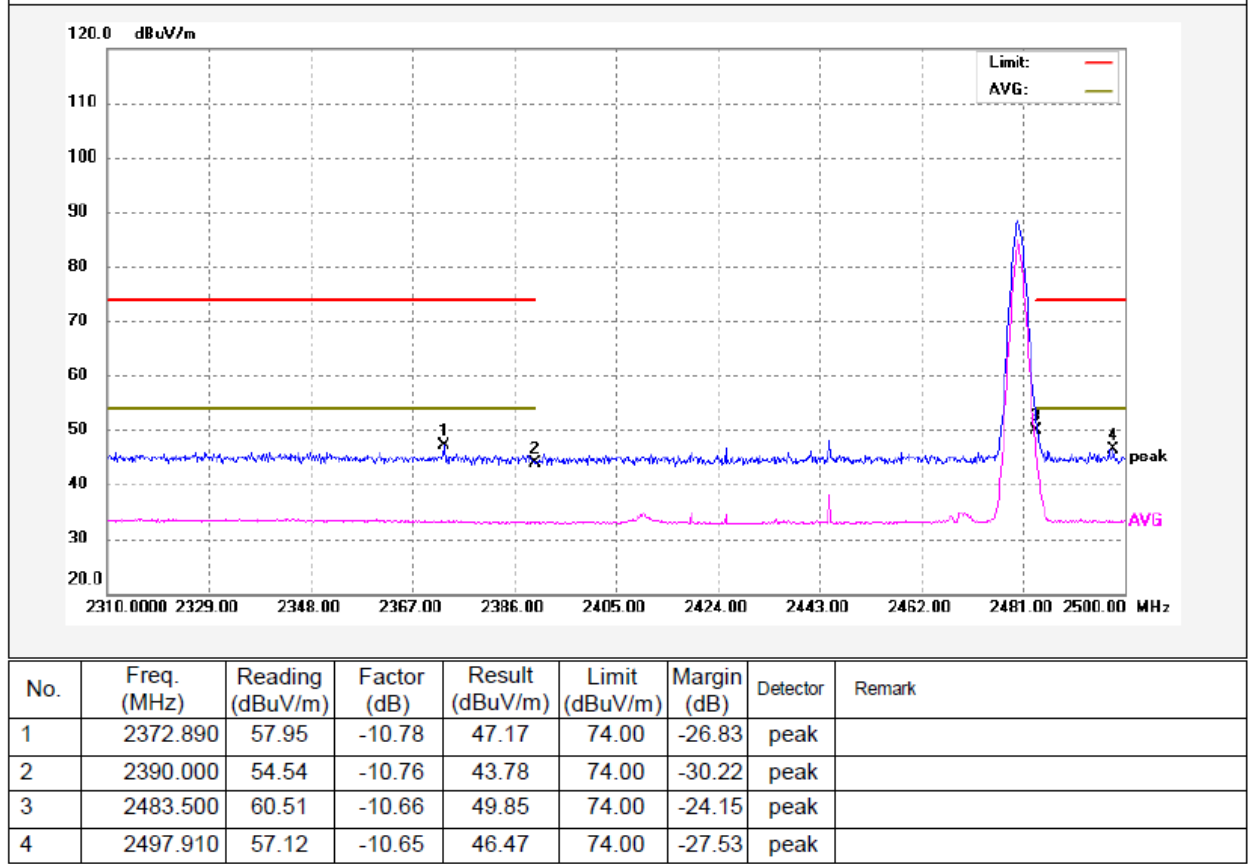


Right earbud

1DH5-Low


Antenna Polarization: Vertical

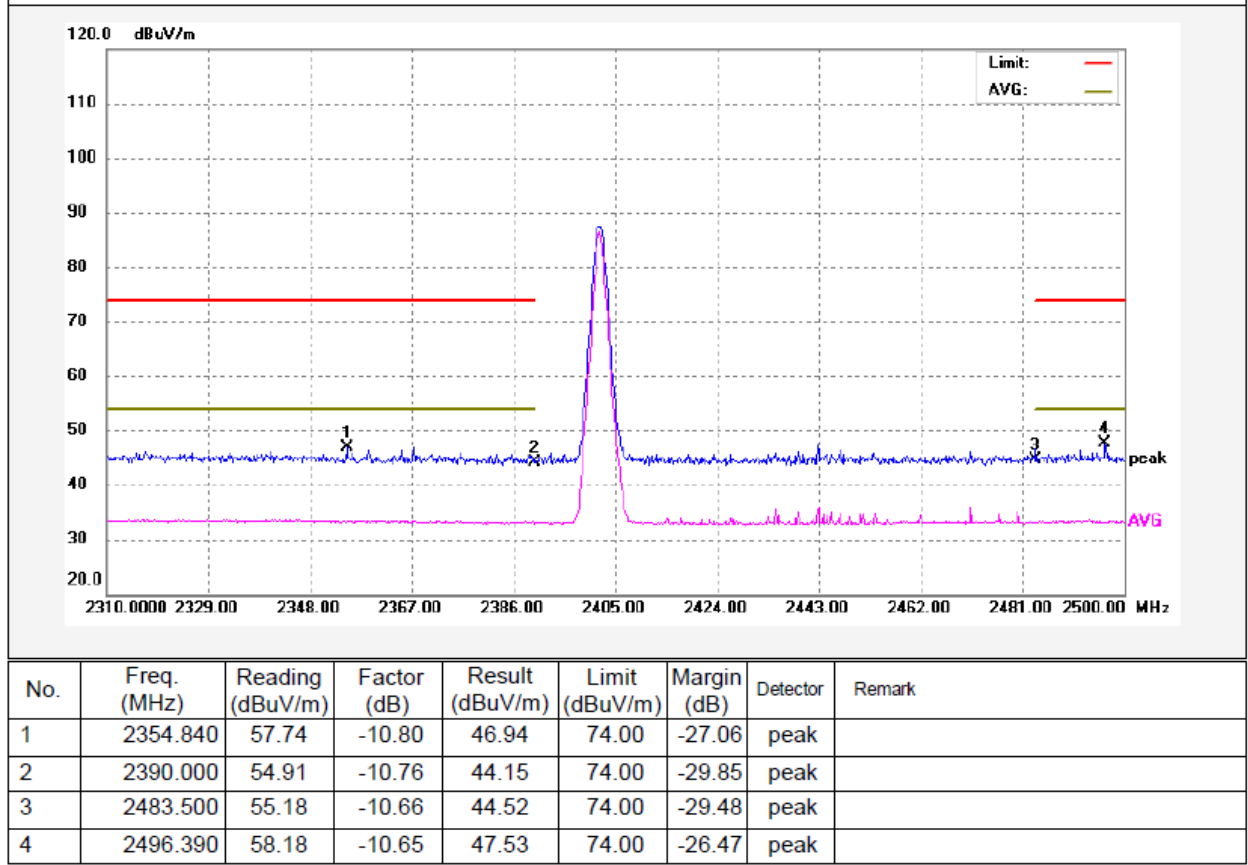


Antenna Polarization: Horizontal

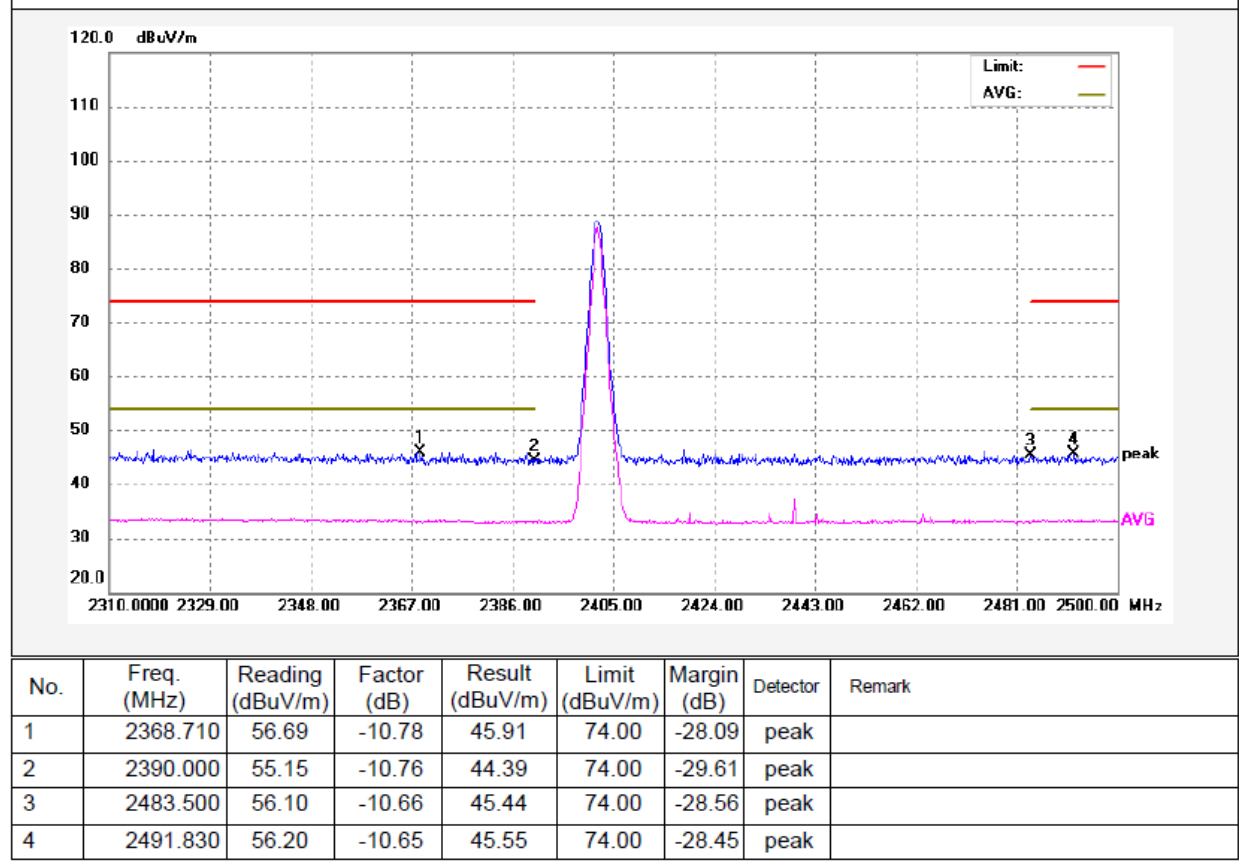

1DH5-High
Antenna Polarization: Vertical

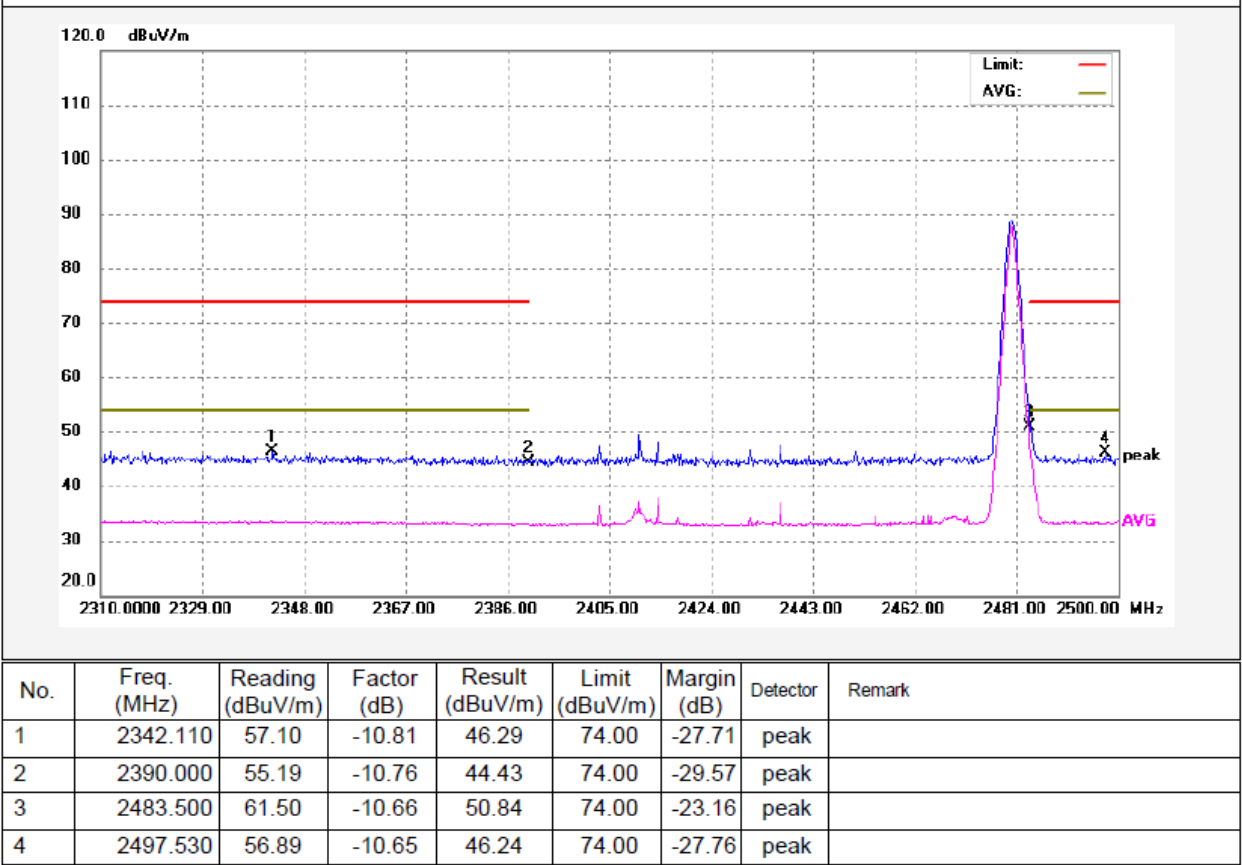


Antenna Polarization: Horizontal

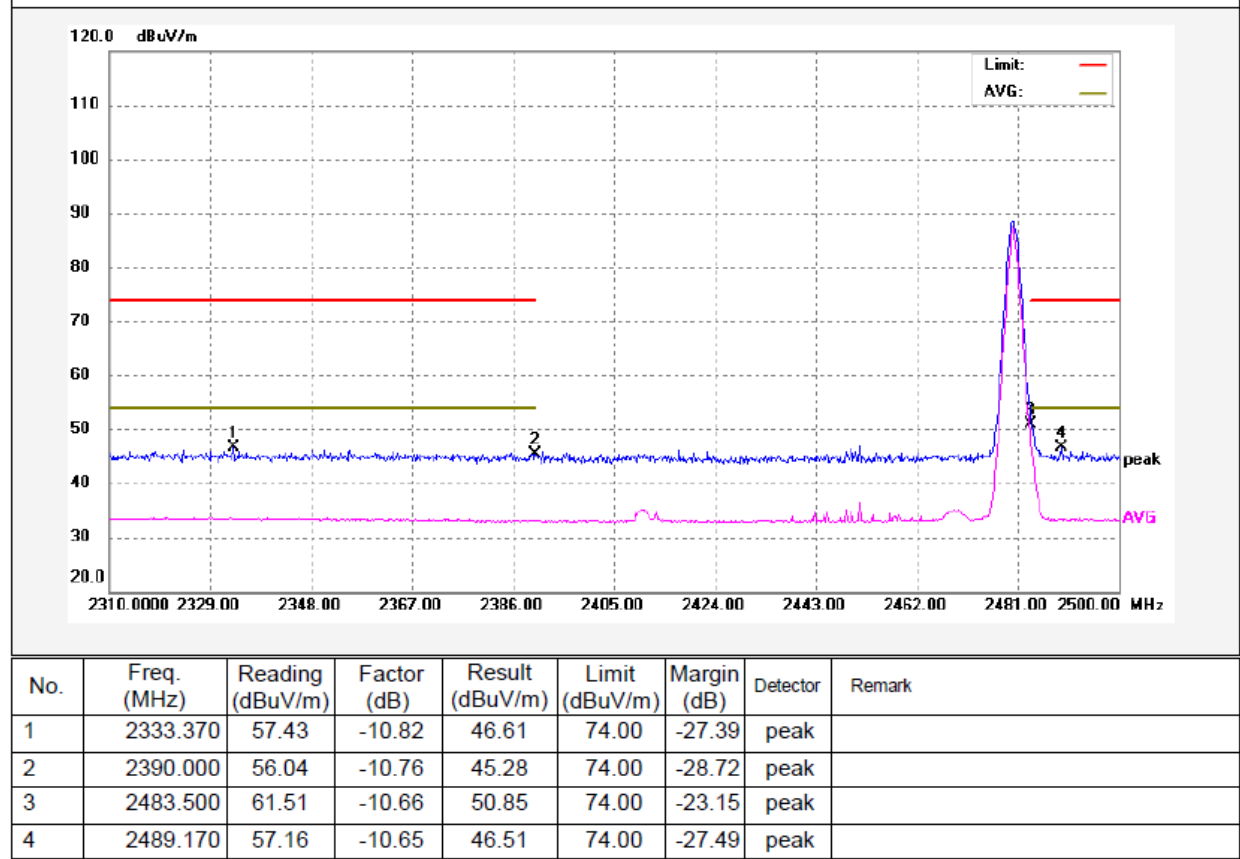


2DH5-Low

Antenna Polarization: Vertical

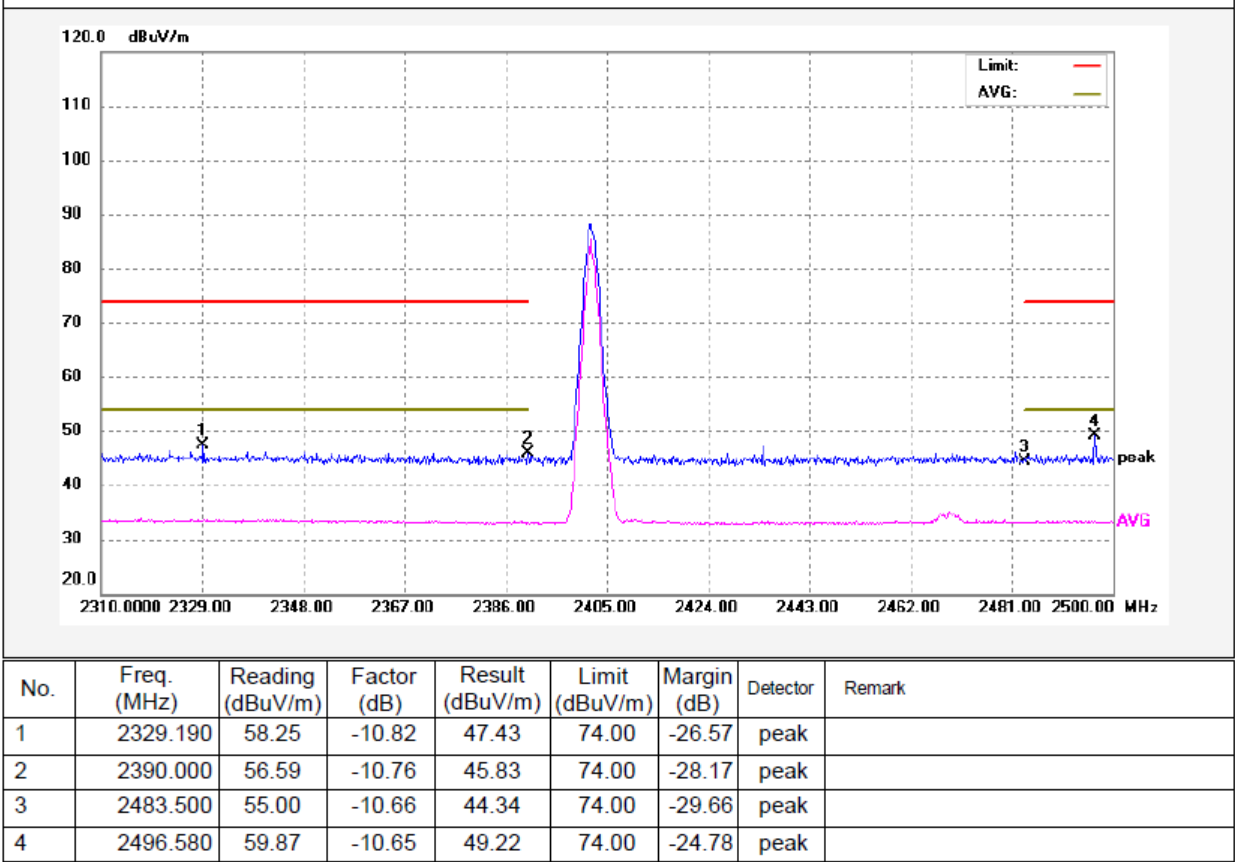


Antenna Polarization: Horizontal

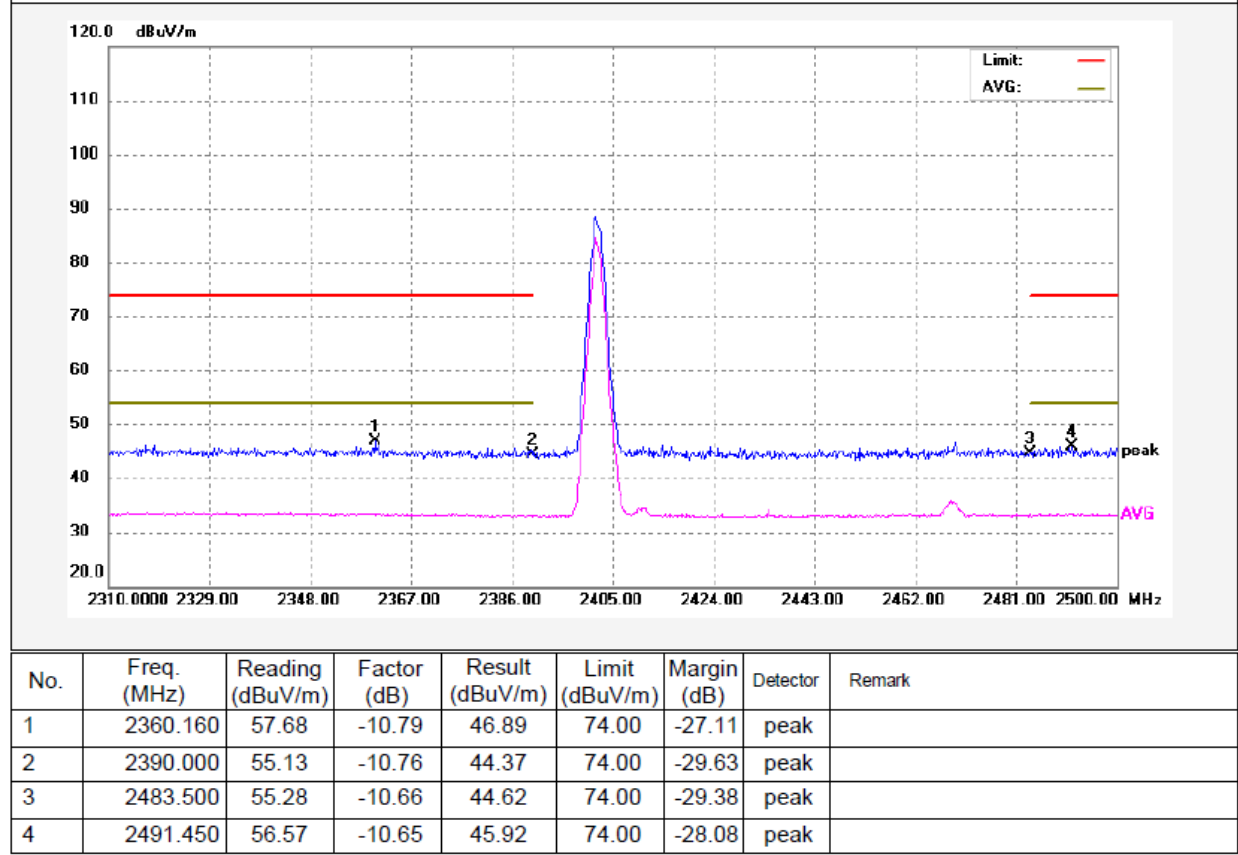


2DH5-High

Antenna Polarization: Vertical

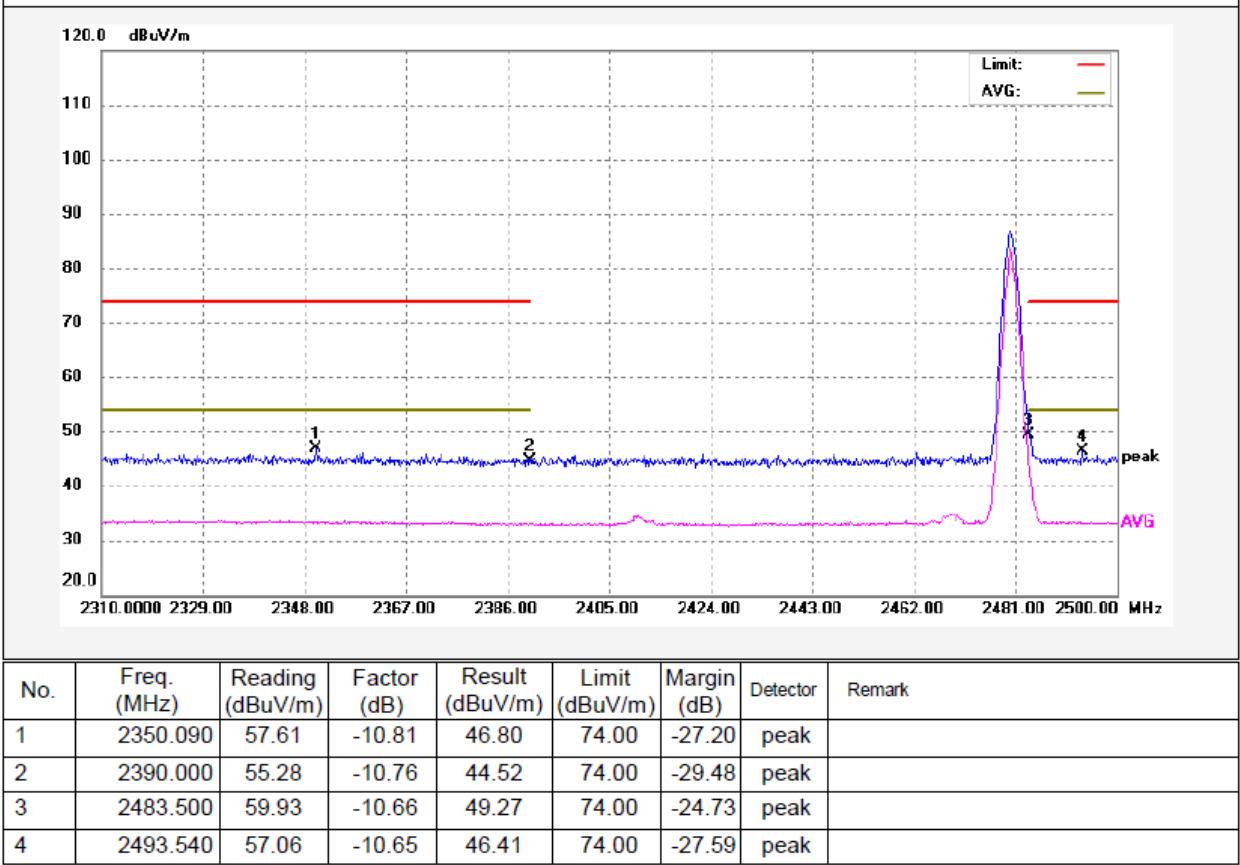


Antenna Polarization: Horizontal

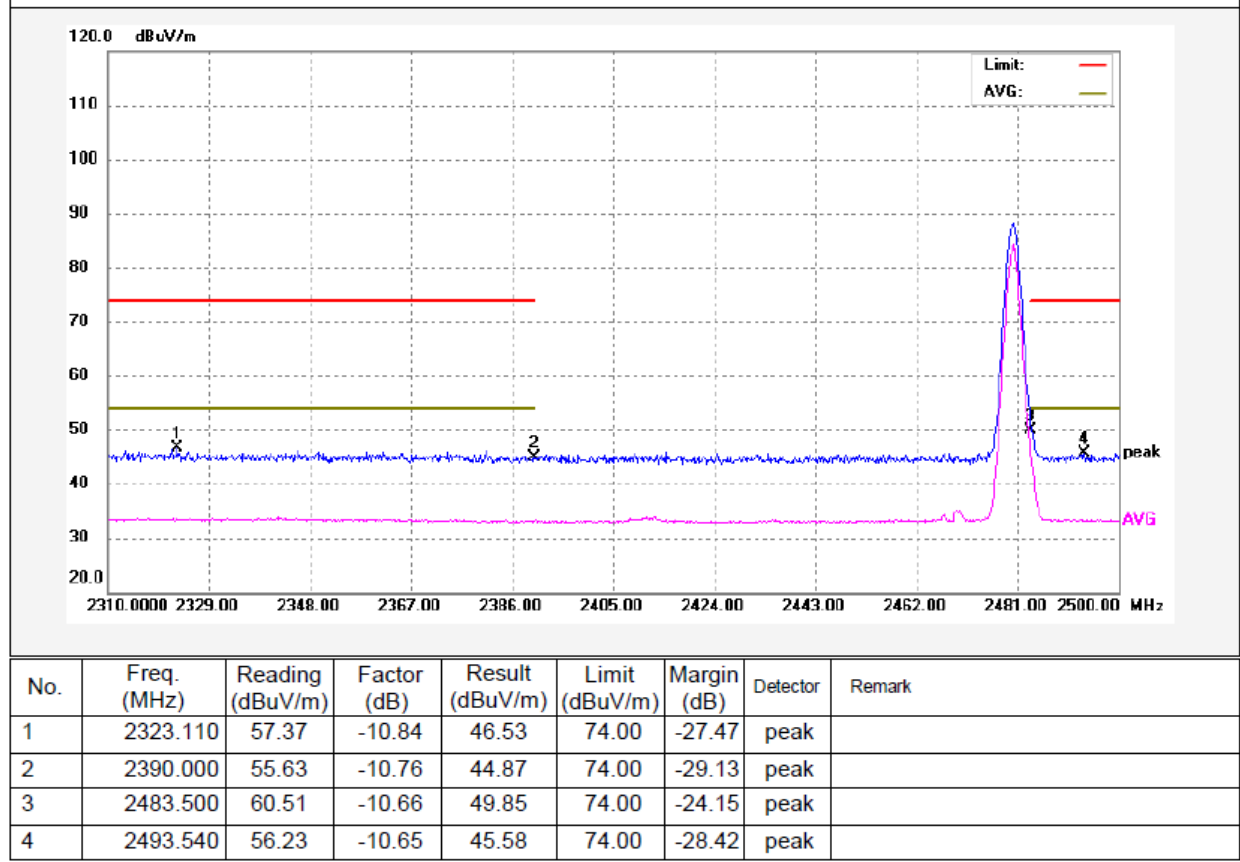


3DH5-Low

Antenna Polarization: Vertical

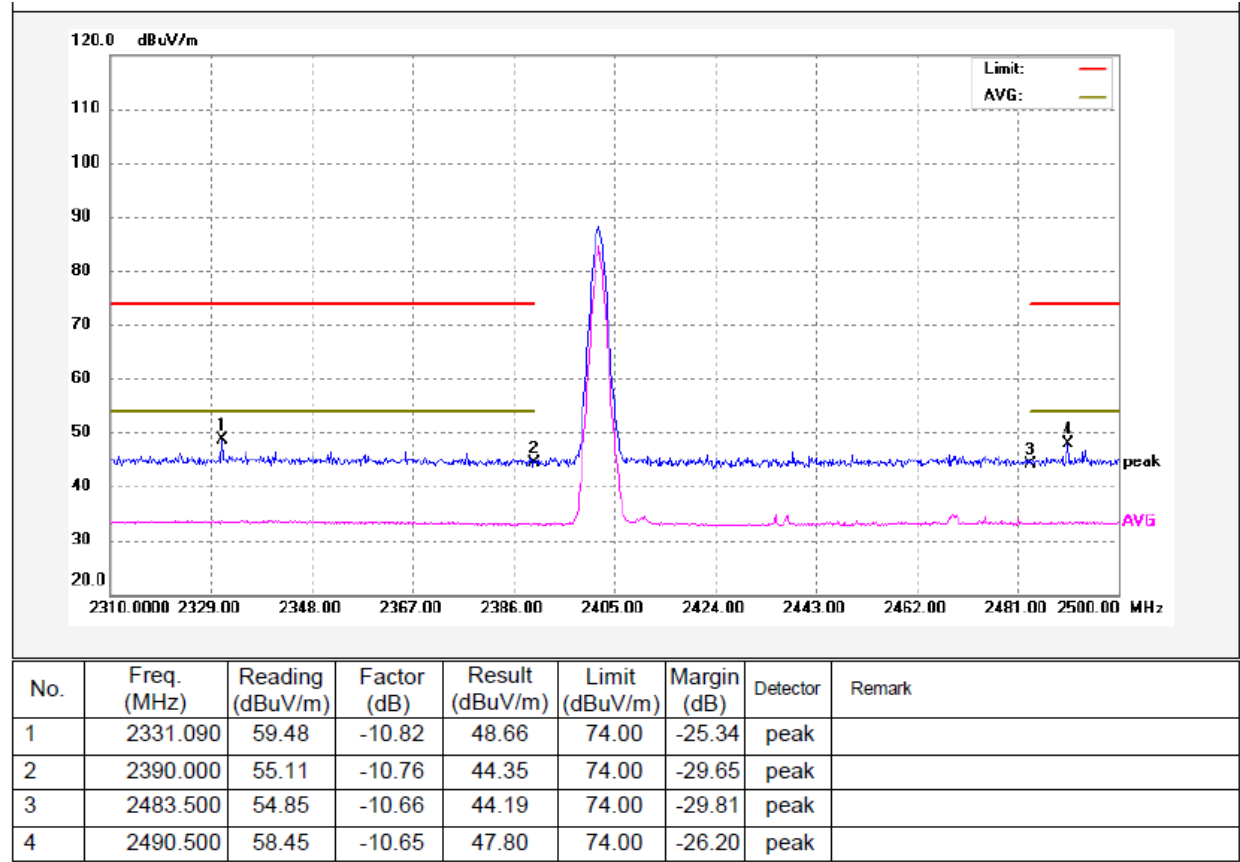


Antenna Polarization: Horizontal

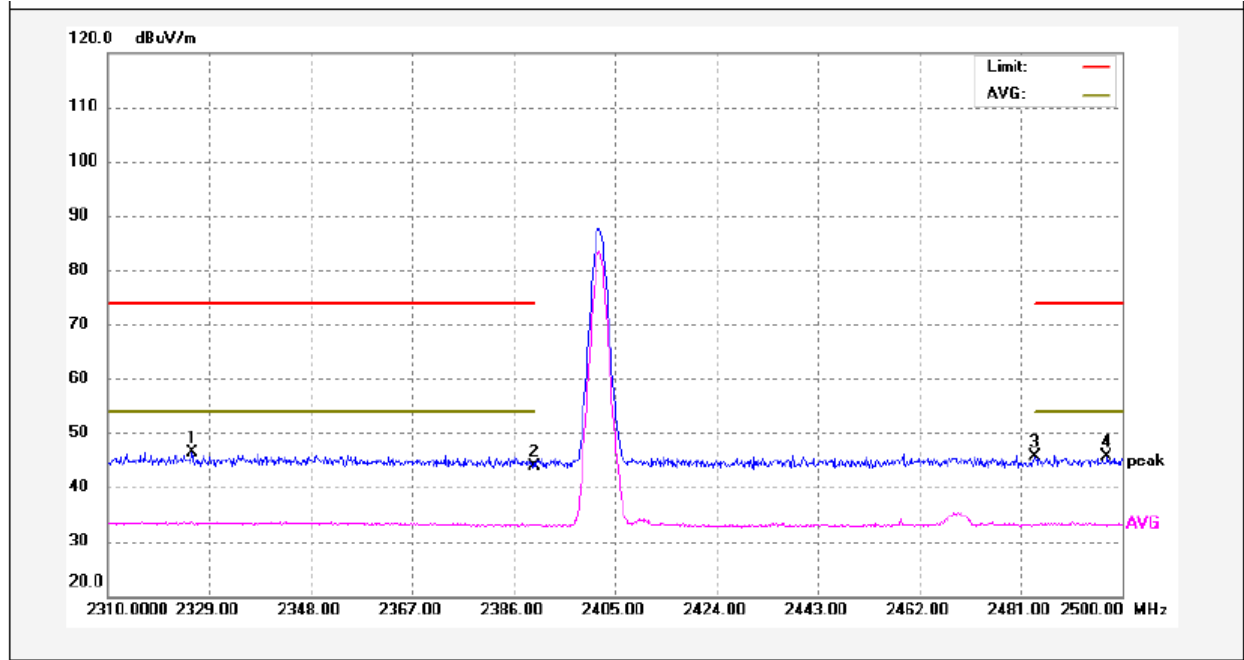


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2325.770	57.14	-10.84	46.30	74.00	-27.70	peak	
2	2390.000	54.56	-10.76	43.80	74.00	-30.20	peak	
3	2483.500	56.28	-10.66	45.62	74.00	-28.38	peak	
4	2497.150	56.40	-10.65	45.75	74.00	-28.25	peak	

3DH5-High
Antenna Polarization: Vertical

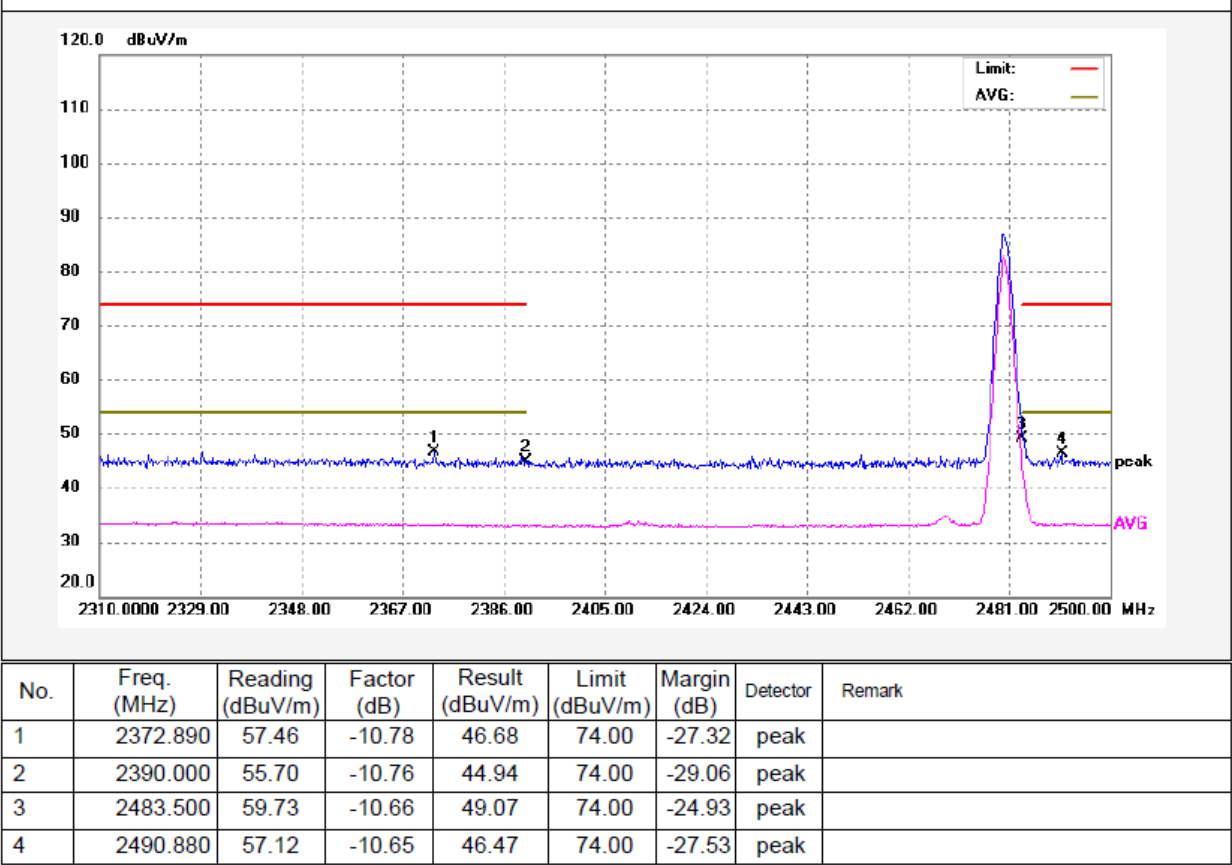

Antenna Polarization: Horizontal

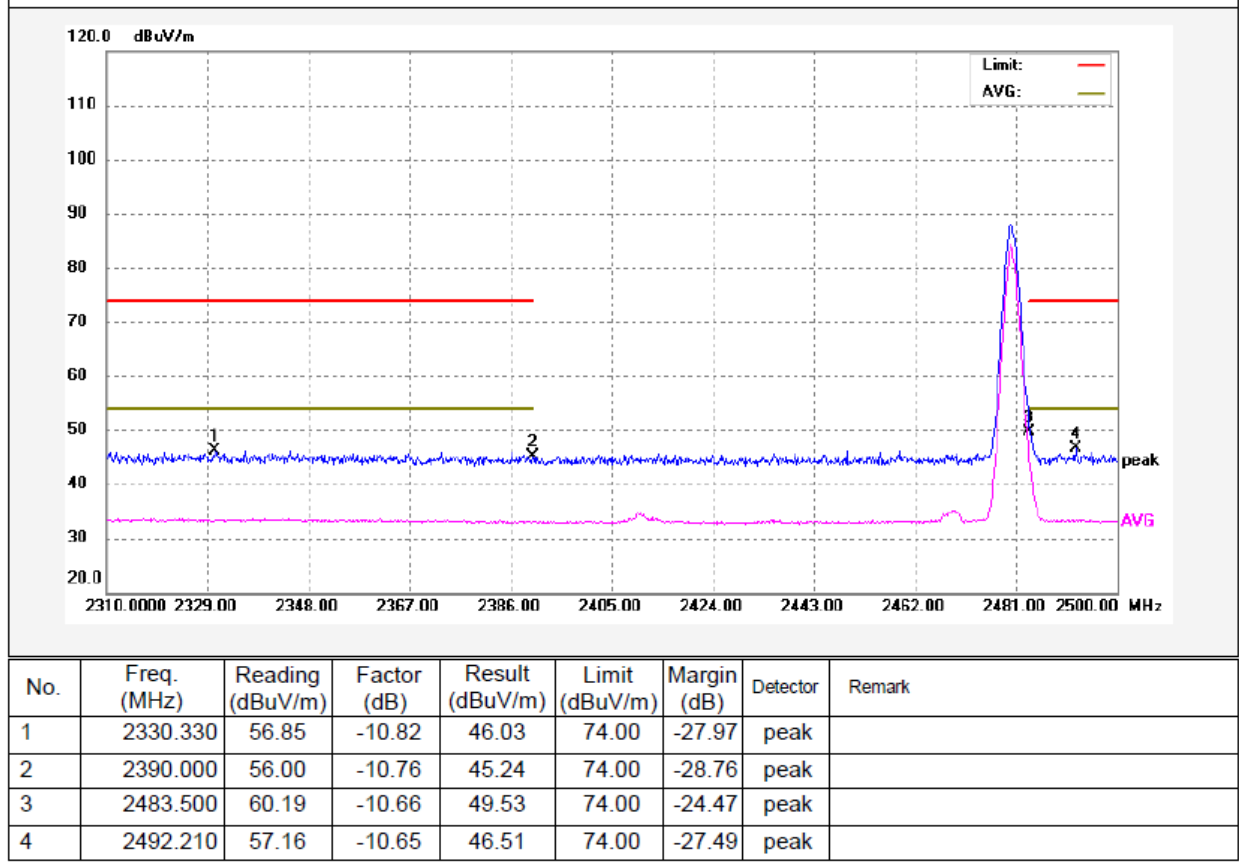

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

8 Conducted Spurious Emissions

Test Requirement: FCC 47CFR Part 15 Section 15.247

Test Method: ANSI C63.10-2020

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold


Above 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold


8.2 Test Result

Left earbud
9kHz – 150kHz
GFSK
Low Channel

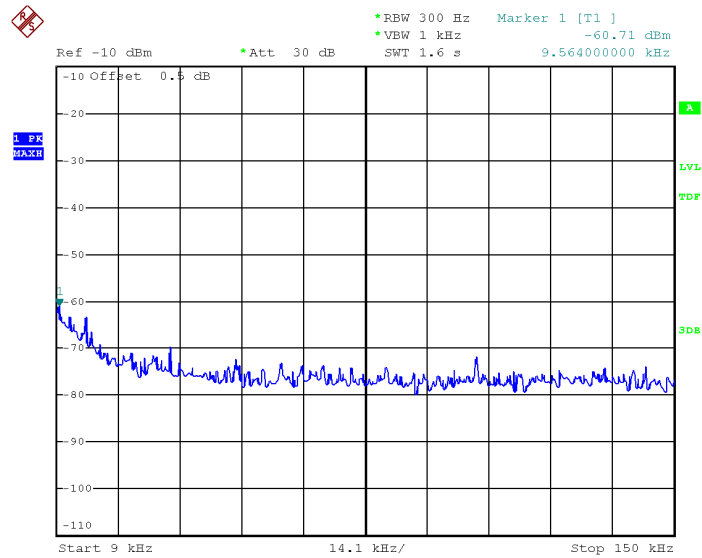


Date: 10.JUL.2026 10:38:28


Middle Channel

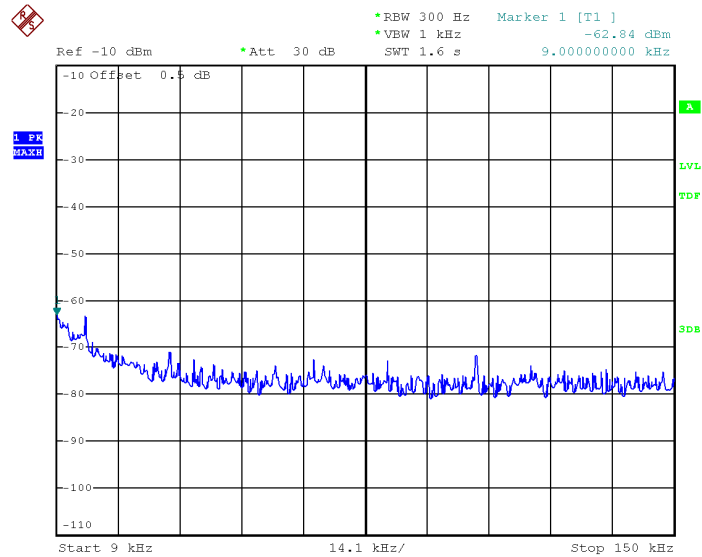


Date: 10.JUL.2026 10:38:52

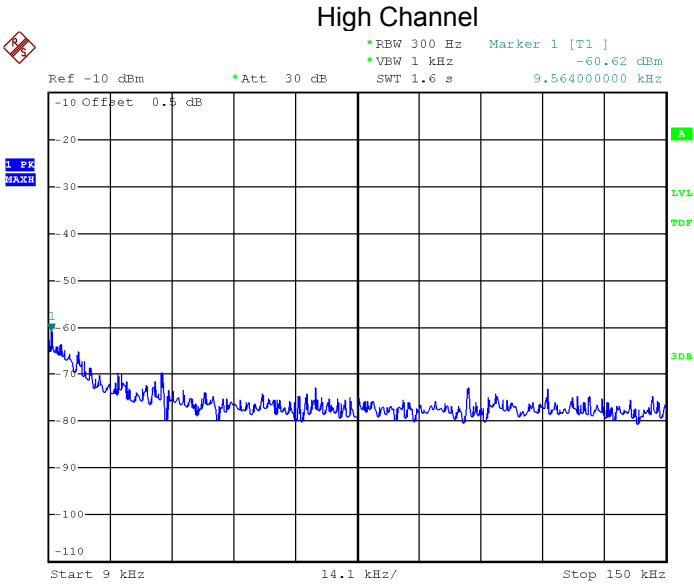


Date: 10.JUL.2026 10:39:19

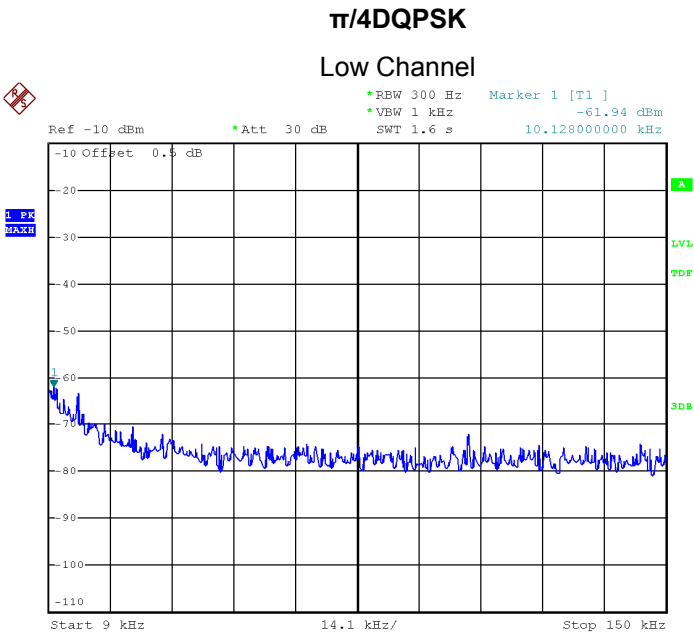

Date: 10.JUL.2026 10:39:45

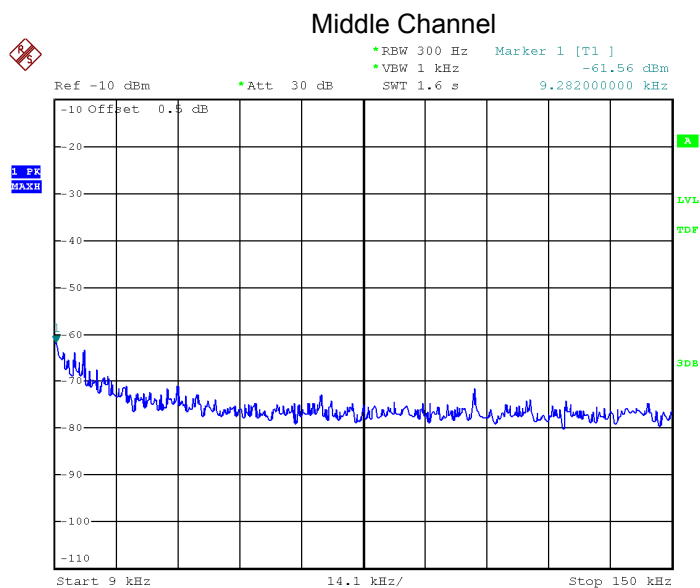


Date: 10.JUL.2026 10:40:25

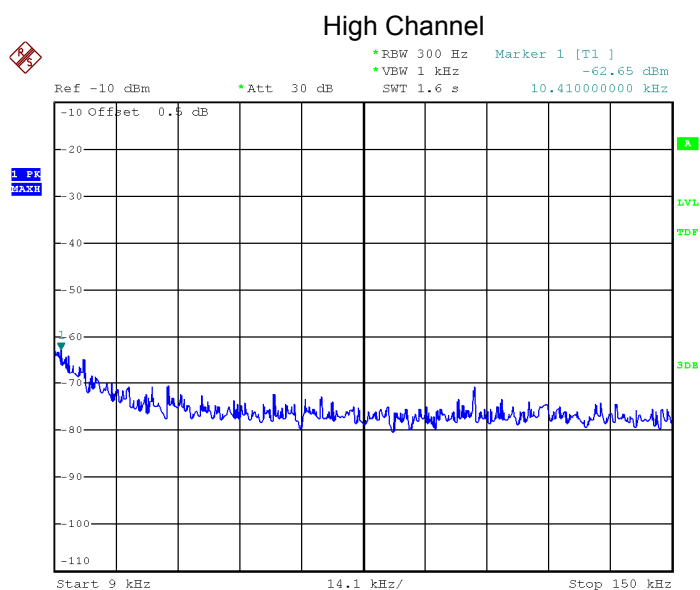

Date: 10.JUL.2026 10:41:05


8DPSK

Low Channel

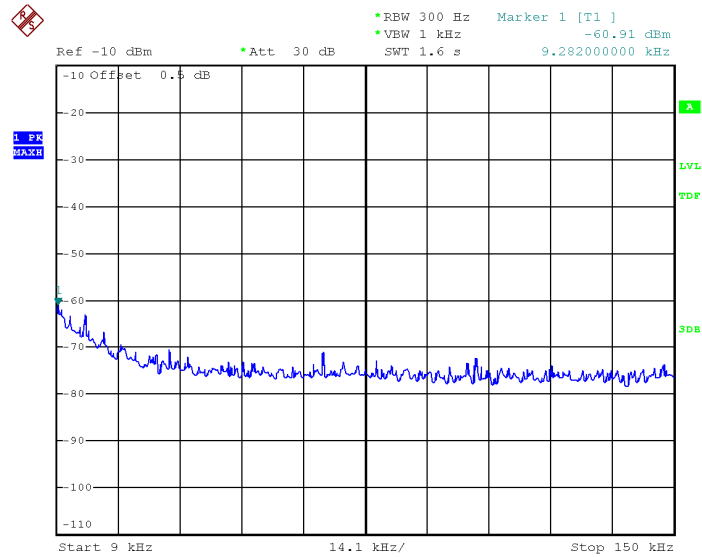


Date: 10.JUL.2026 10:42:49

Middle Channel

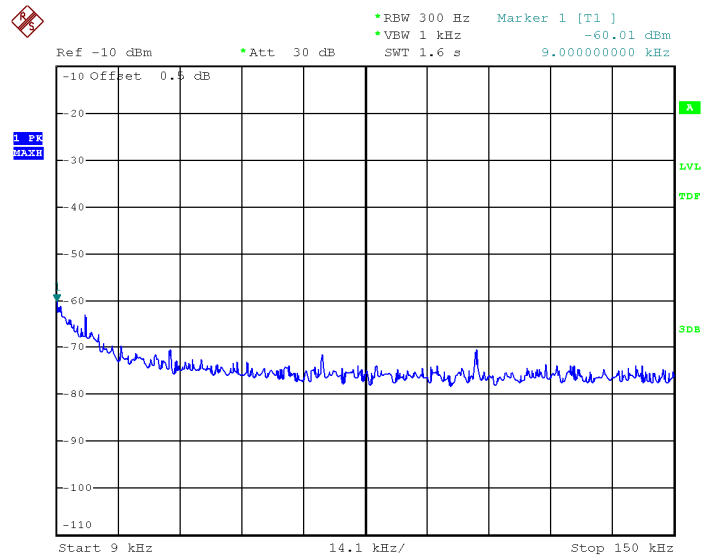

Date: 10.JUL.2026 10:44:39

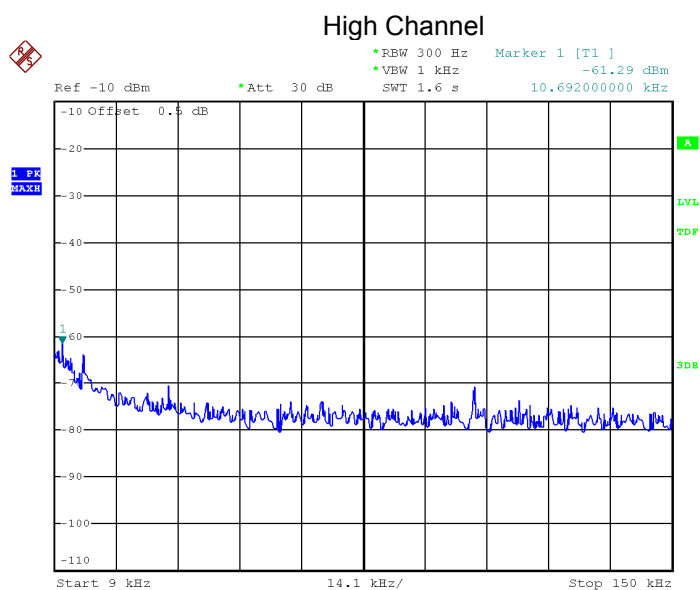


Date: 10.JUL.2026 10:45:16

150kHz – 30MHz


GFSK

Low Channel

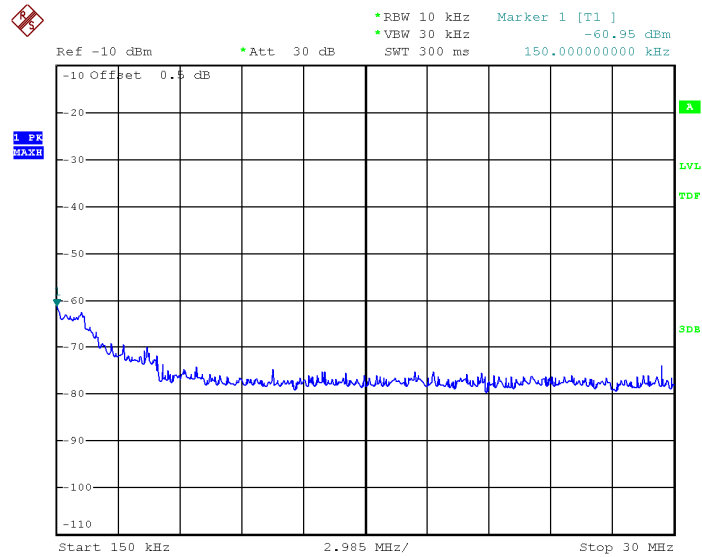


Date: 10.JUL.2026 10:53:11


Middle Channel

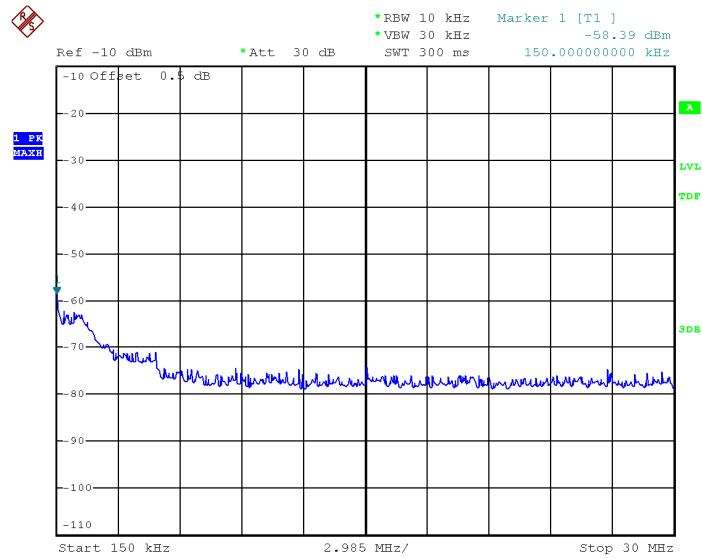


Date: 10.JUL.2026 10:53:29

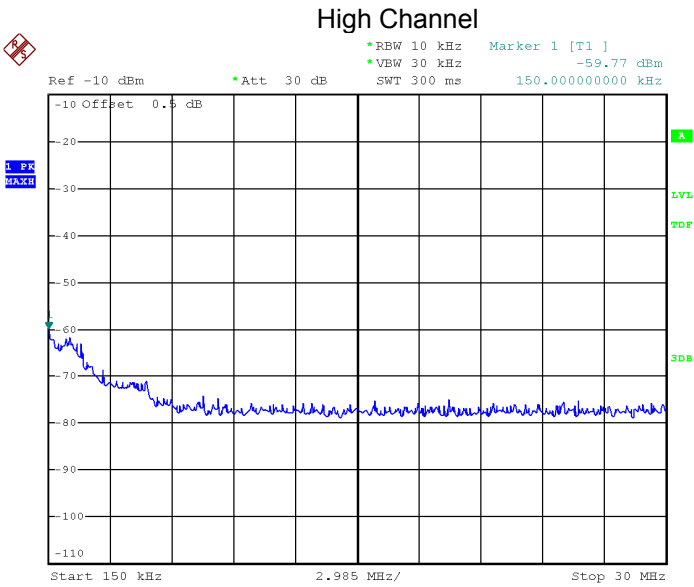


Date: 10.JUL.2026 10:53:53

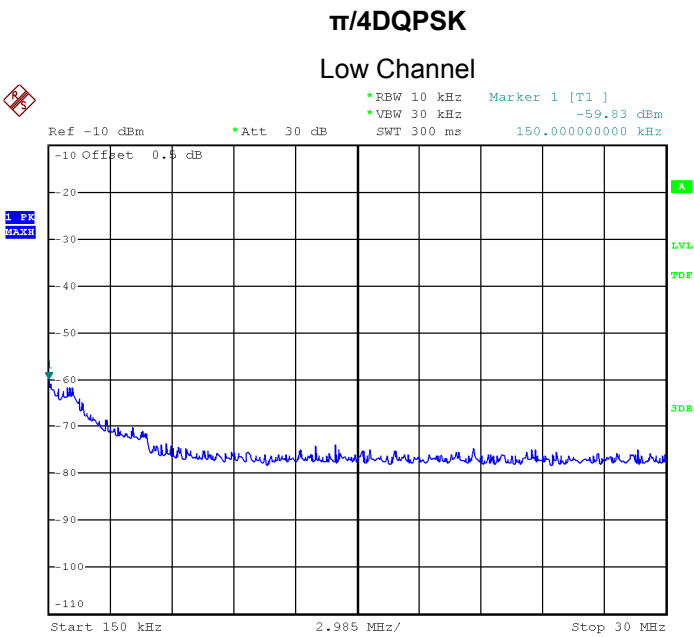

Date: 10.JUL.2026 10:54:26

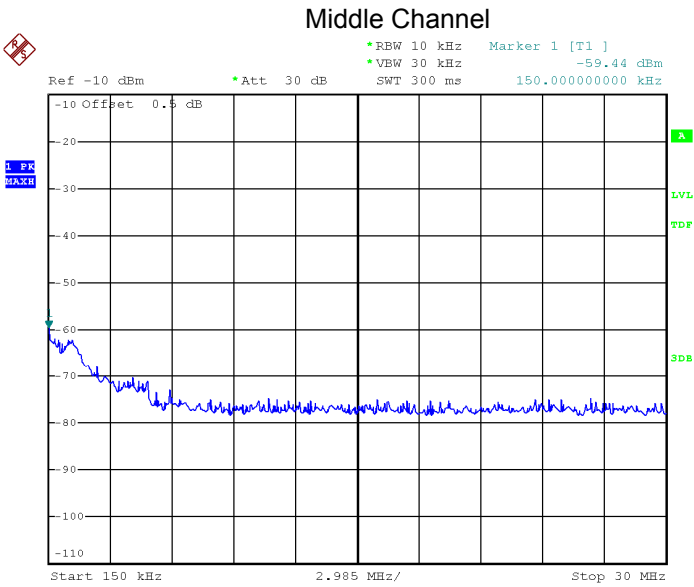


Date: 10.JUL.2026 10:55:00

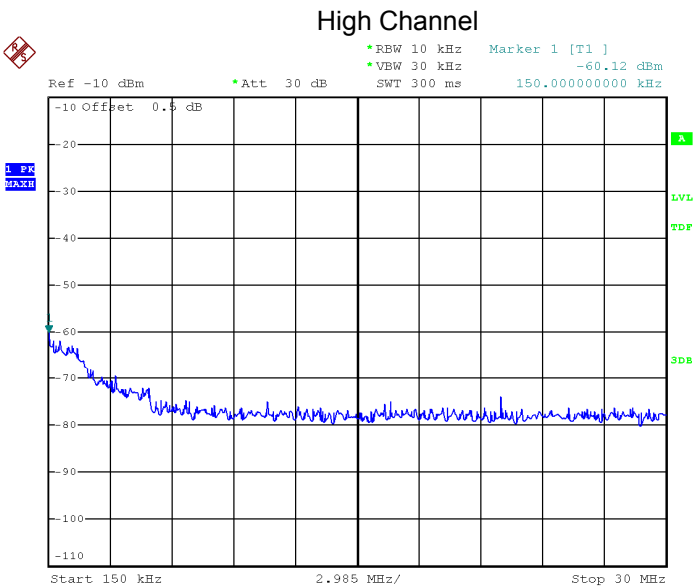

Date: 10.JUL.2026 10:55:13


8DPSK

Low Channel

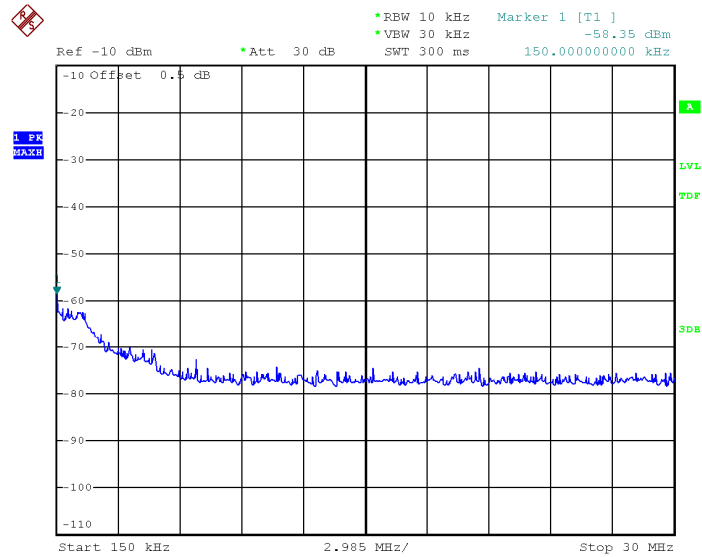


Date: 10.JUL.2026 10:55:46

Middle Channel

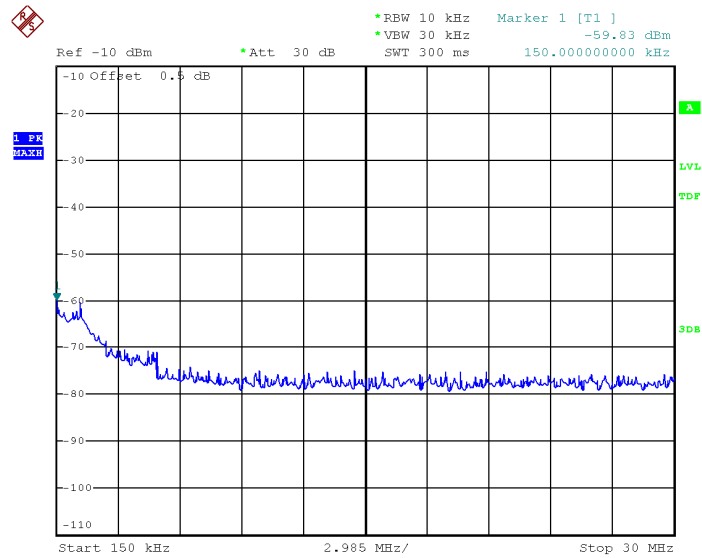


Date: 10.JUL.2026 10:56:02

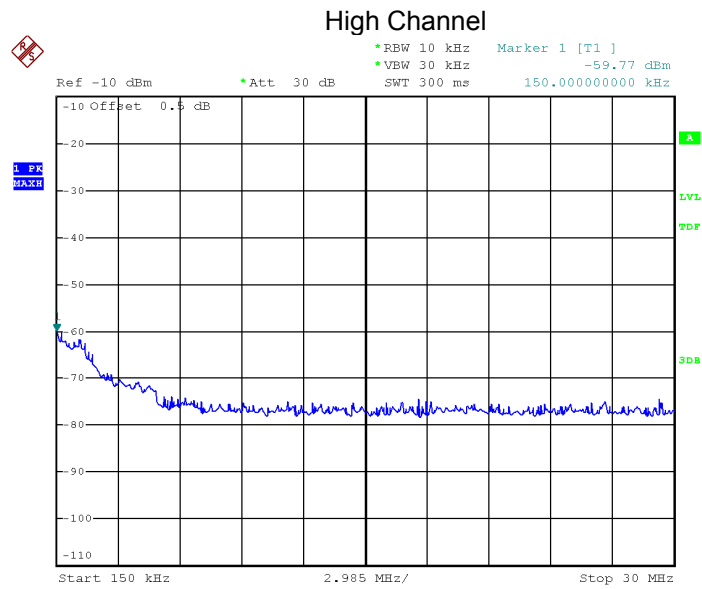


Date: 10.JUL.2026 10:56:43

30MHz – 25GHz
GFSK Low Channel

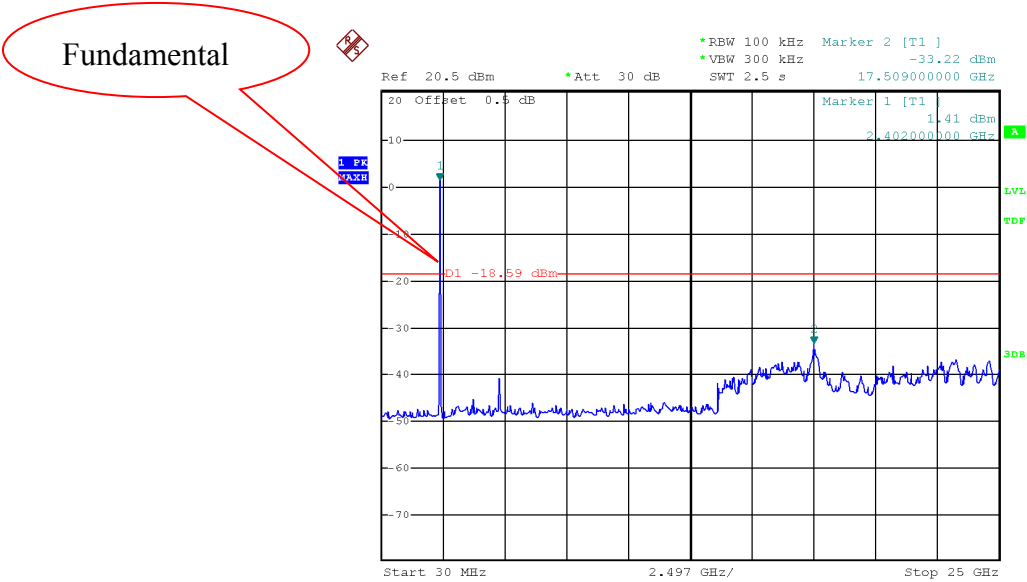


Date: 10.JUL.2026 10:52:25

GFSK Middle Channel

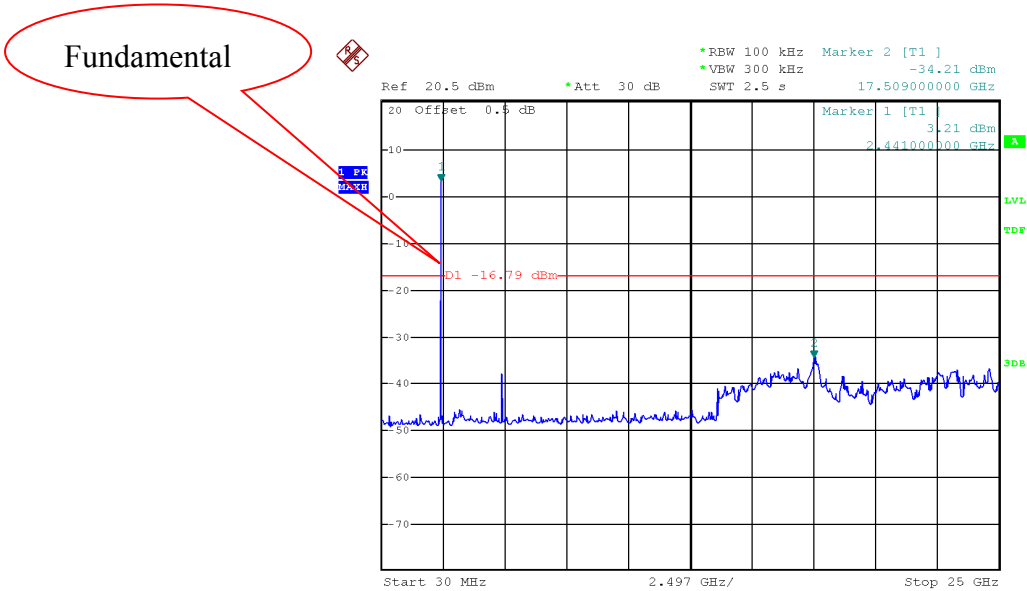


Date: 10.JUL.2026 10:51:39

GFSK High Channel

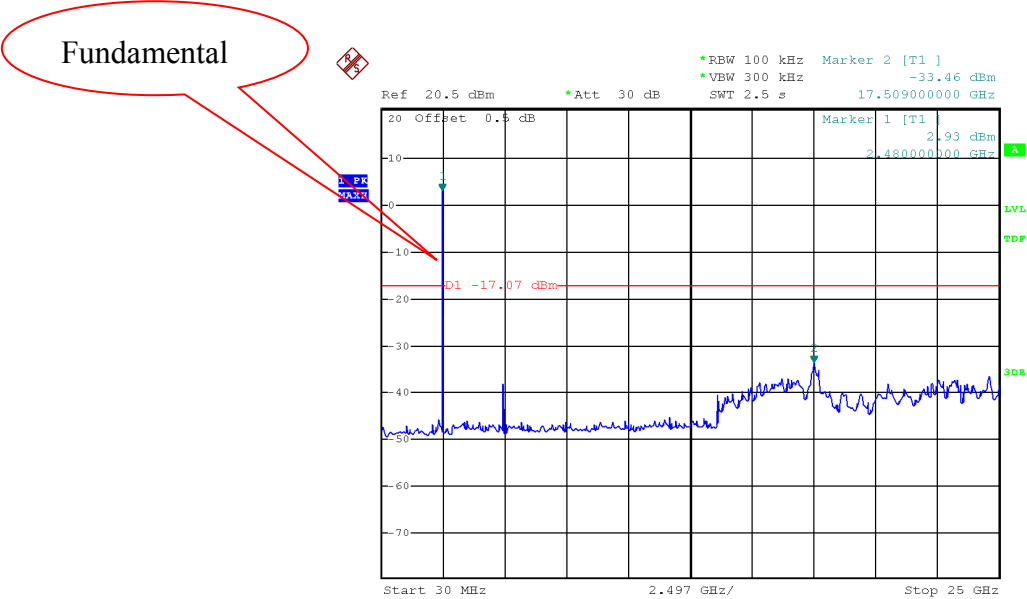


Date: 10.JUL.2026 10:50:22

$\pi/4$ DQPSK Low Channel

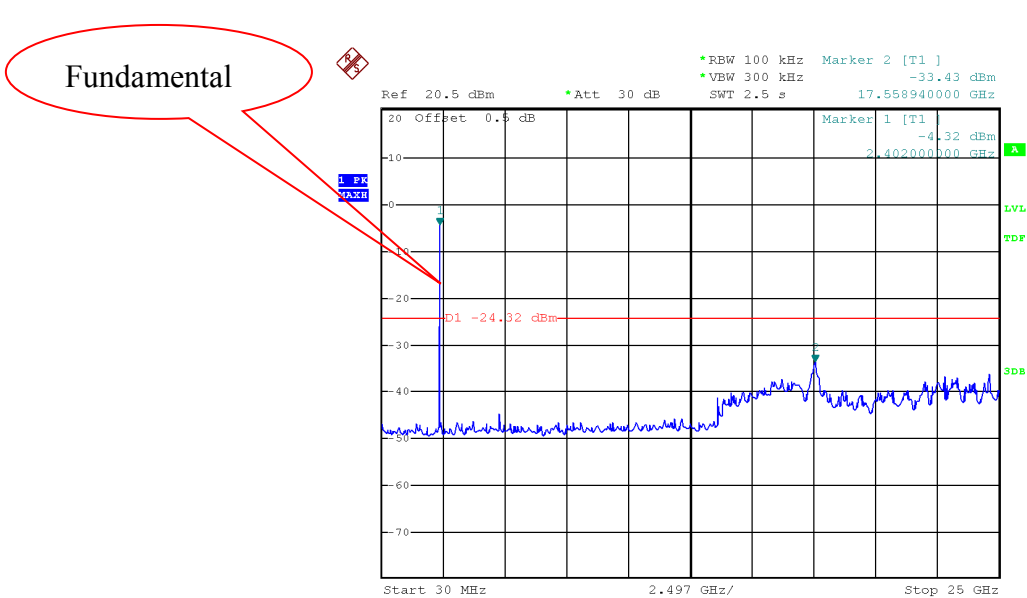


Date: 10.JUL.2026 10:48:24

$\pi/4$ DQPSK Middle Channel

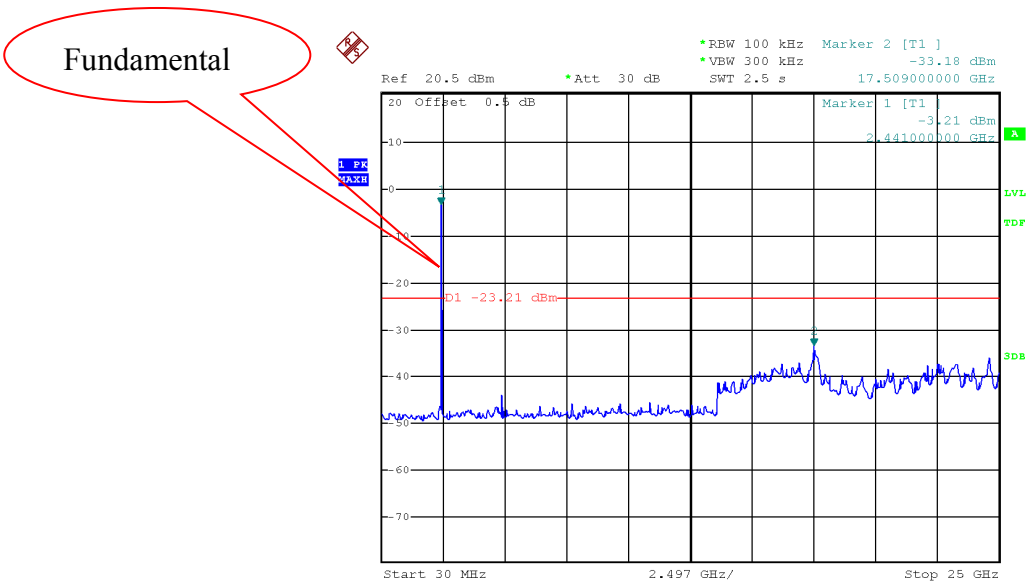

Date: 10.JUL.2026 10:48:56


$\pi/4$ DQPSK High Channel

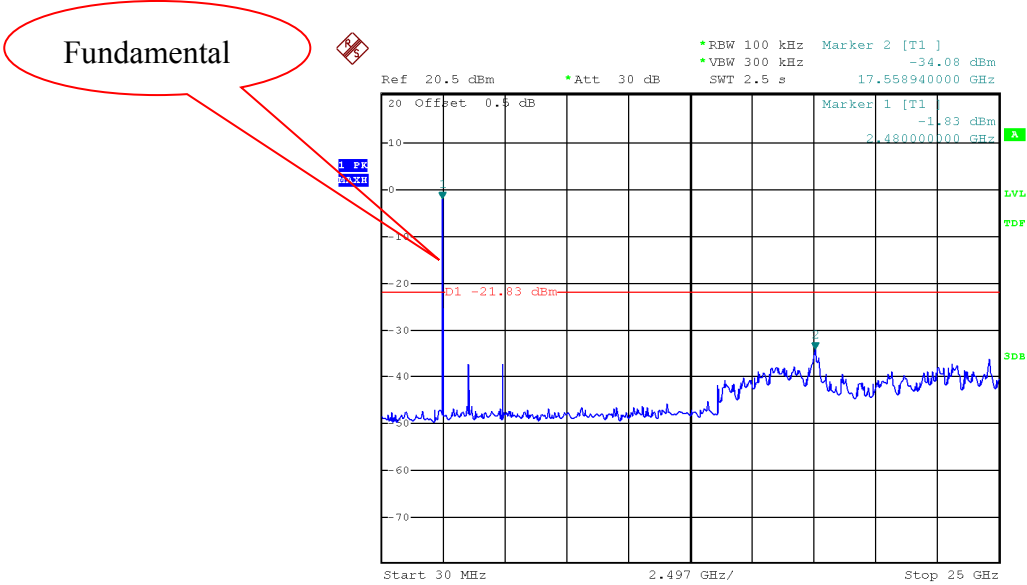

Date: 10.JUL.2026 10:49:21

8DPSK Low Channel


Fundamental

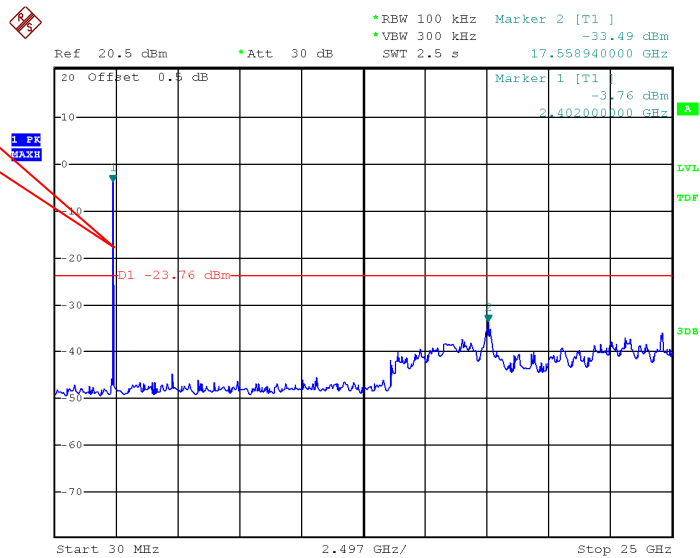

Date: 10.JUL.2026 10:47:18

8DPSK Middle Channel


Fundamental

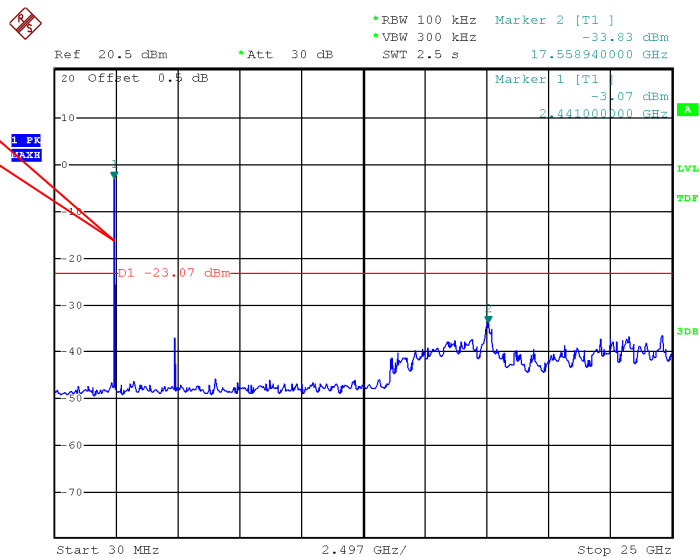

Date: 10.JUL.2026 10:46:50

8DPSK High Channel


Fundamental

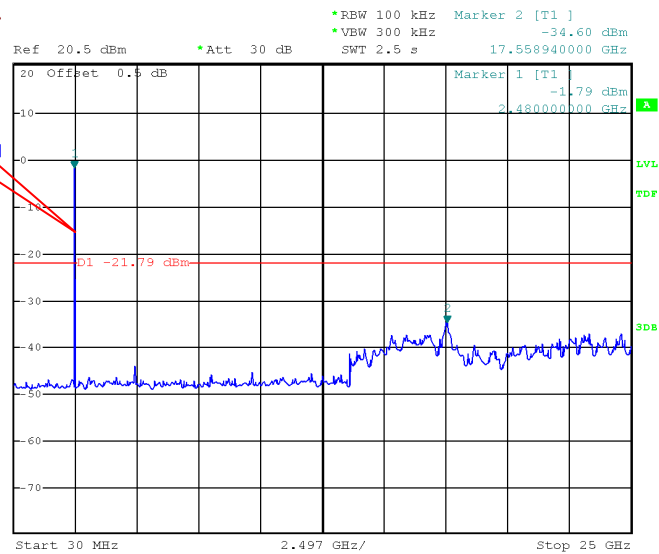

Date: 10.JUL.2026 10:46:15


Right earbud
9kHz – 150kHz
GFSK

Low Channel

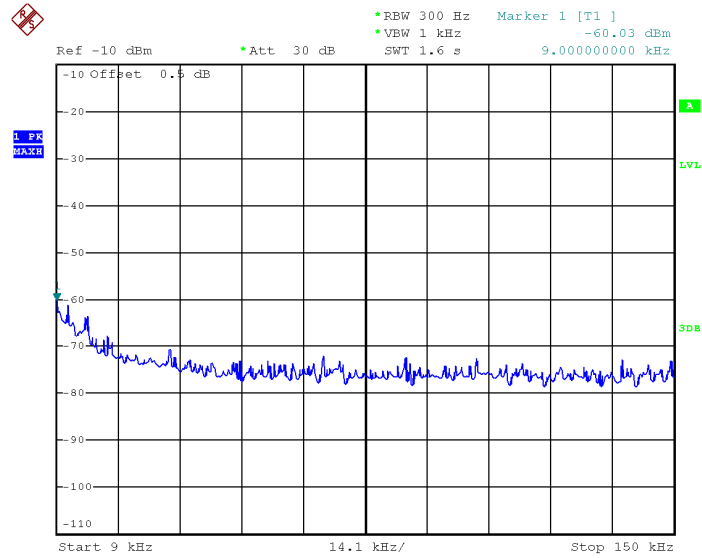


Date: 9.JUL.2026 17:06:43


Middle Channel

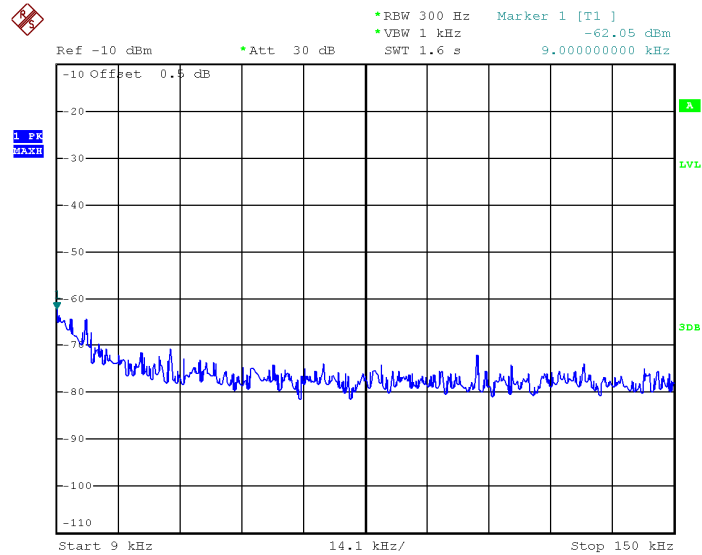


Date: 9.JUL.2026 17:07:04

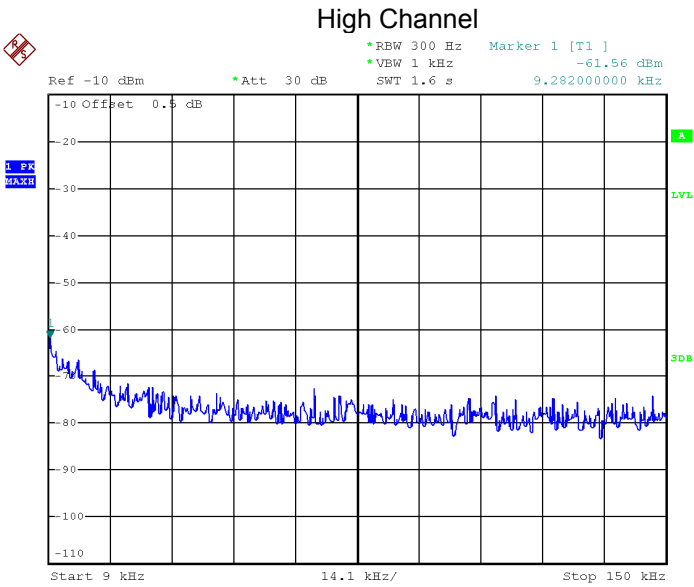


Date: 9.JUL.2026 17:07:20

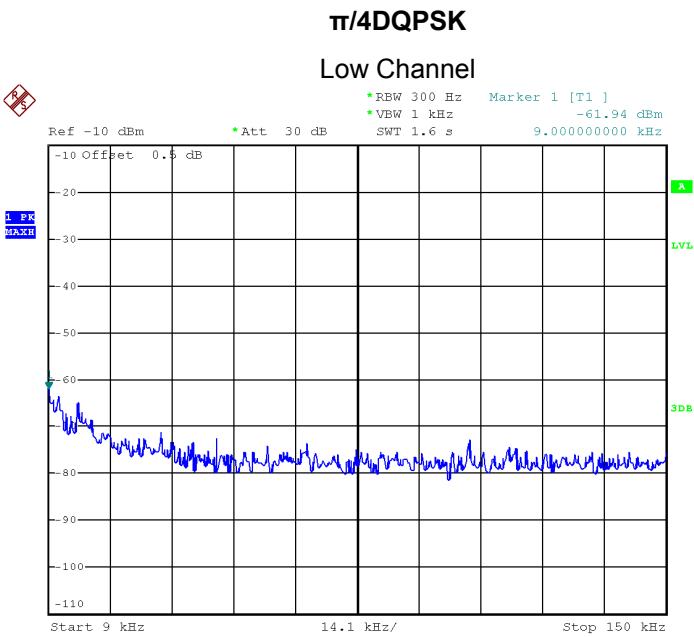

Date: 9.JUL.2026 17:07:41

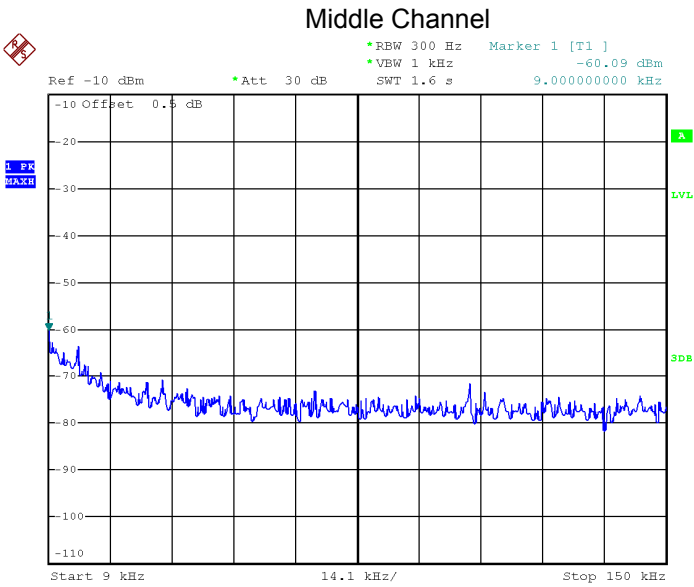


Date: 9.JUL.2026 17:08:14

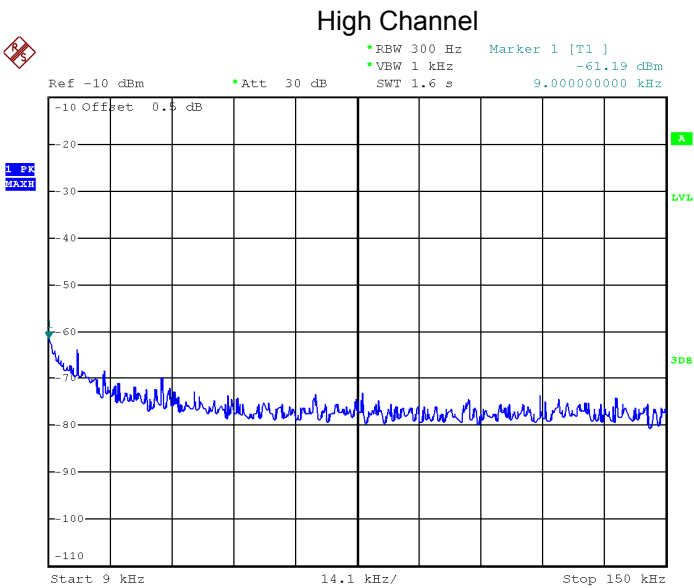

Date: 9.JUL.2026 17:08:40


8DPSK

Low Channel

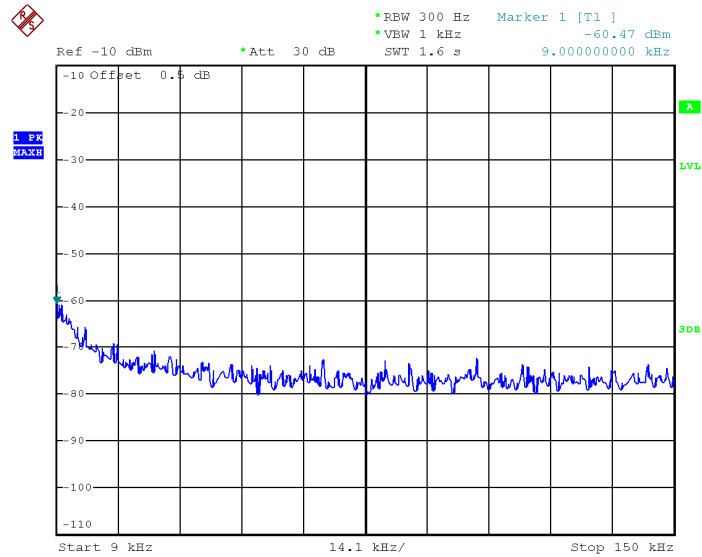


Date: 9.JUL.2026 17:09:14

Middle Channel

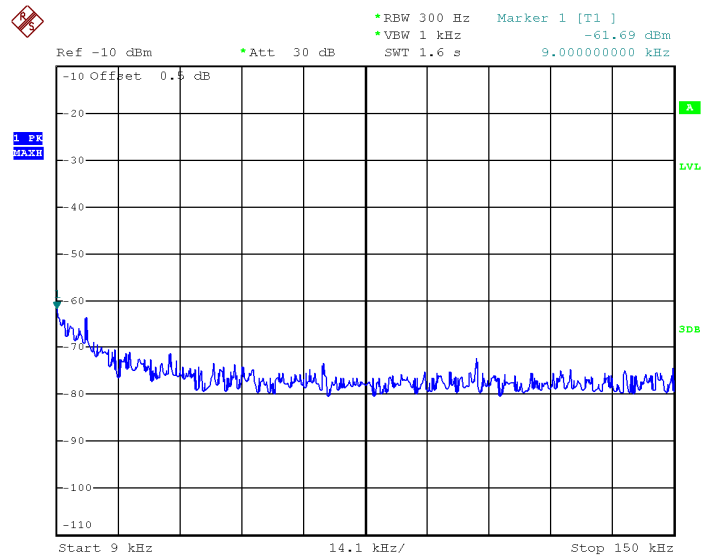

Date: 9.JUL.2026 17:09:37

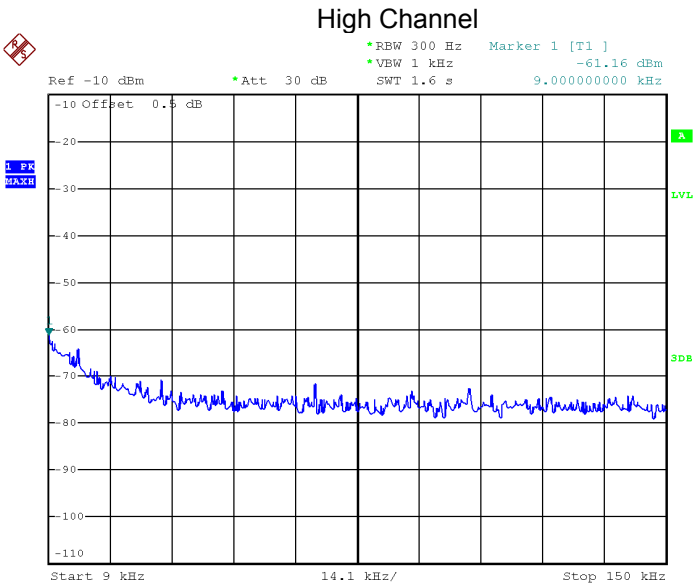


Date: 9.JUL.2026 17:10:42

150kHz – 30MHz


GFSK

Low Channel

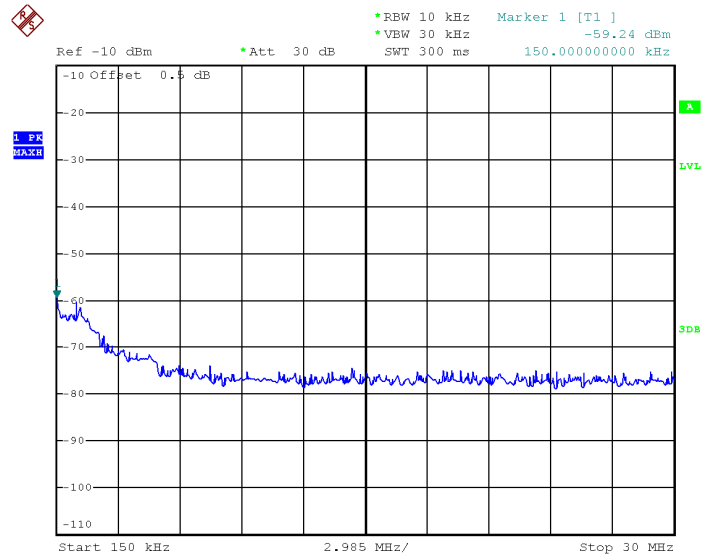


Date: 9.JUL.2026 17:11:37


Middle Channel

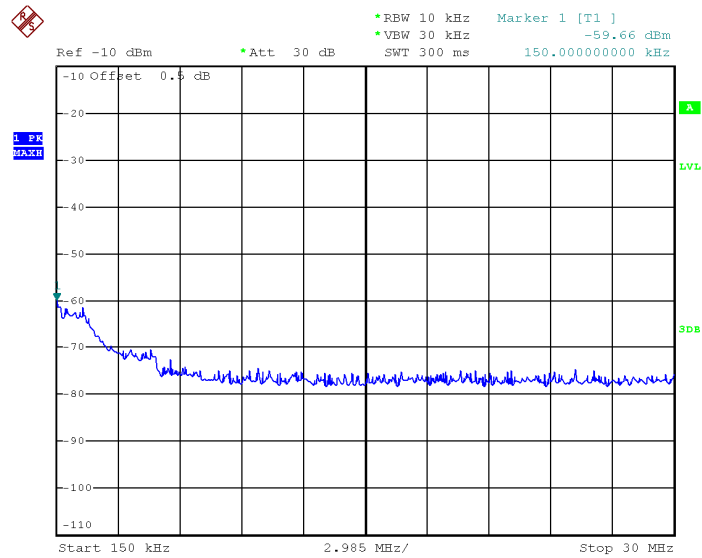


Date: 9.JUL.2026 17:12:10

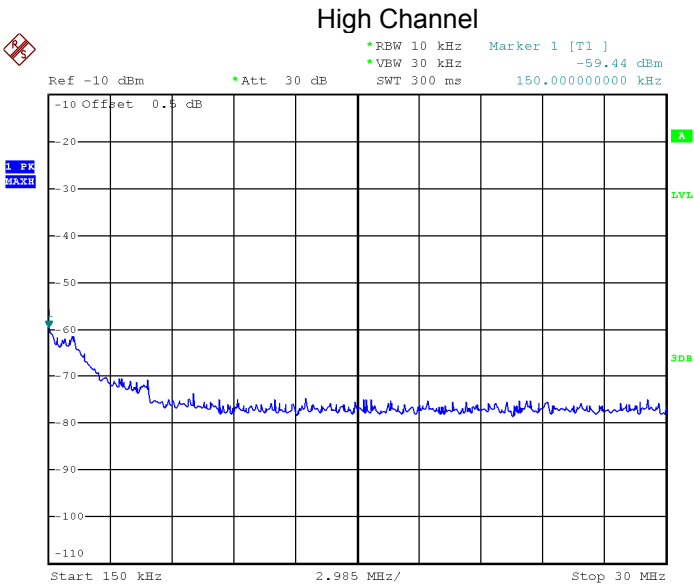


Date: 9.JUL.2026 17:12:41

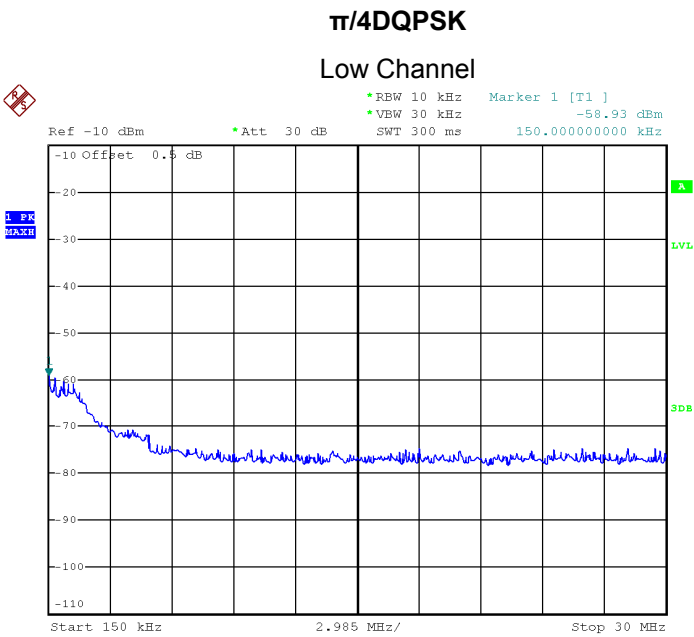

Date: 9.JUL.2026 17:13:22

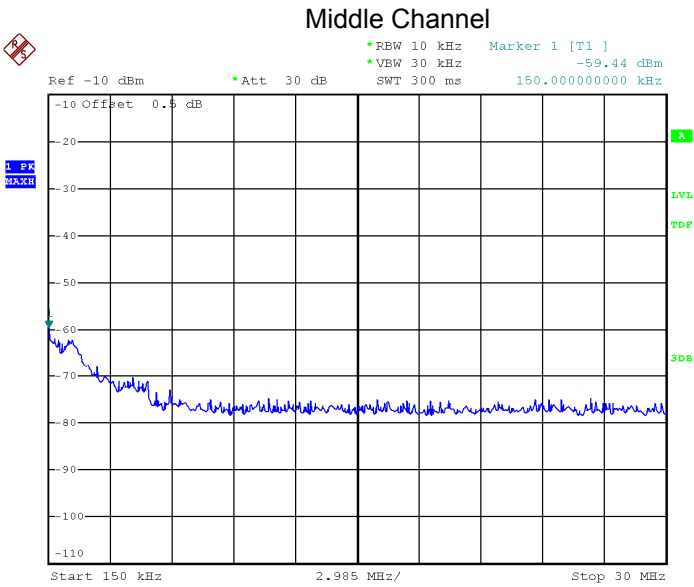


Date: 10.JUL.2026 10:55:00

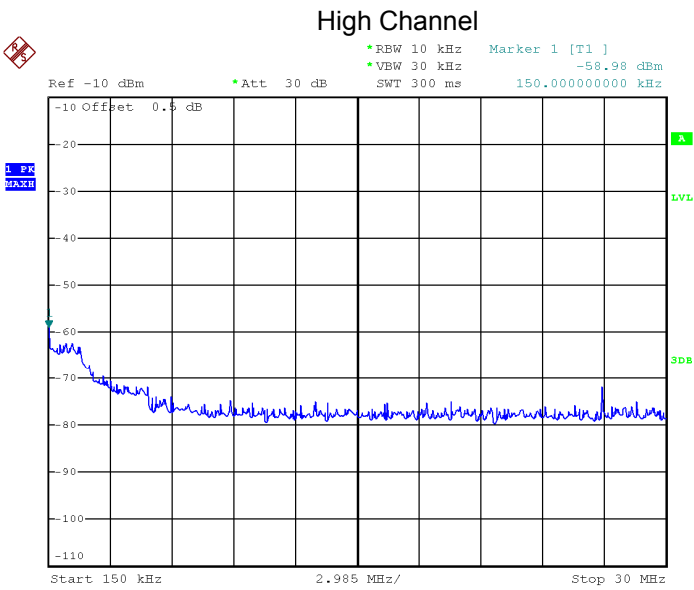

Date: 9.JUL.2026 17:13:53


8DPSK

Low Channel

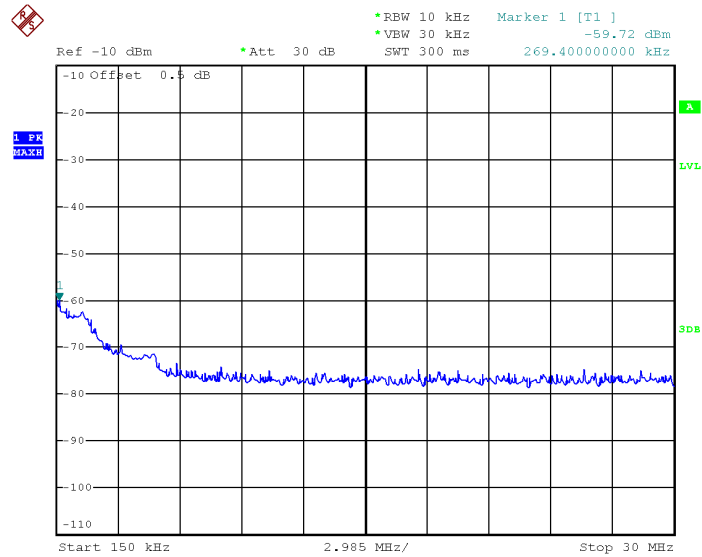


Date: 9.JUL.2026 17:14:31

Middle Channel

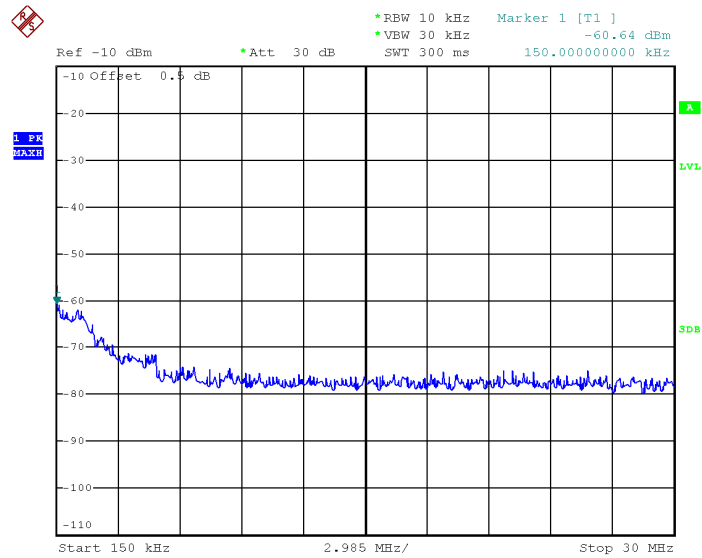


Date: 9.JUL.2026 17:14:46

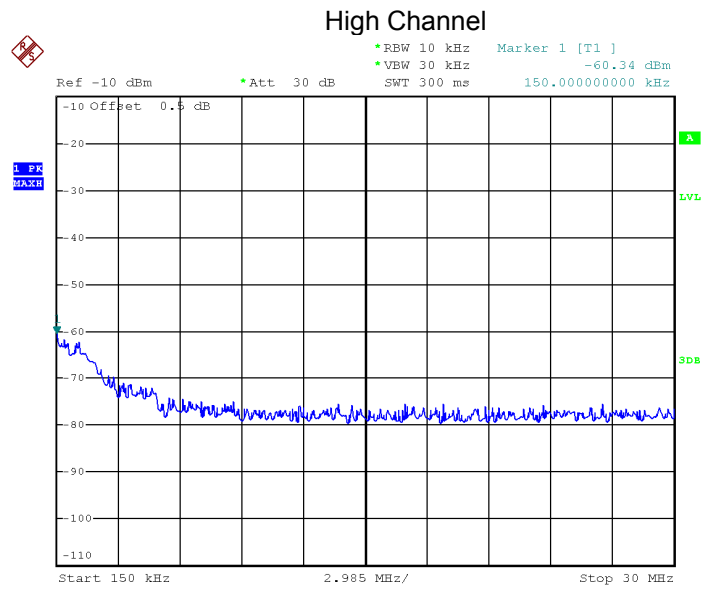


Date: 9.JUL.2026 17:15:01

30MHz – 25GHz
GFSK Low Channel

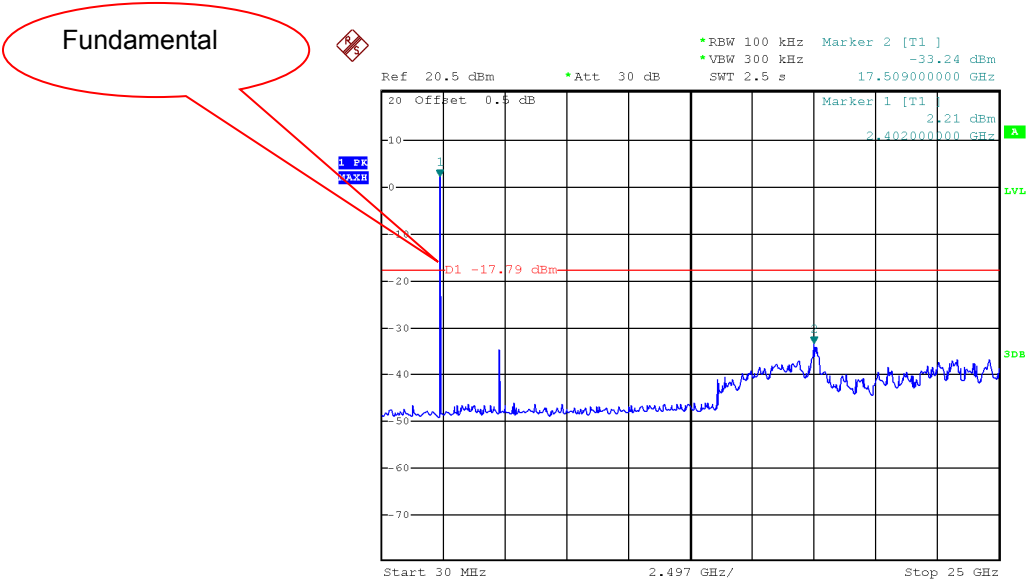


Date: 9.JUL.2026 16:59:16

GFSK Middle Channel

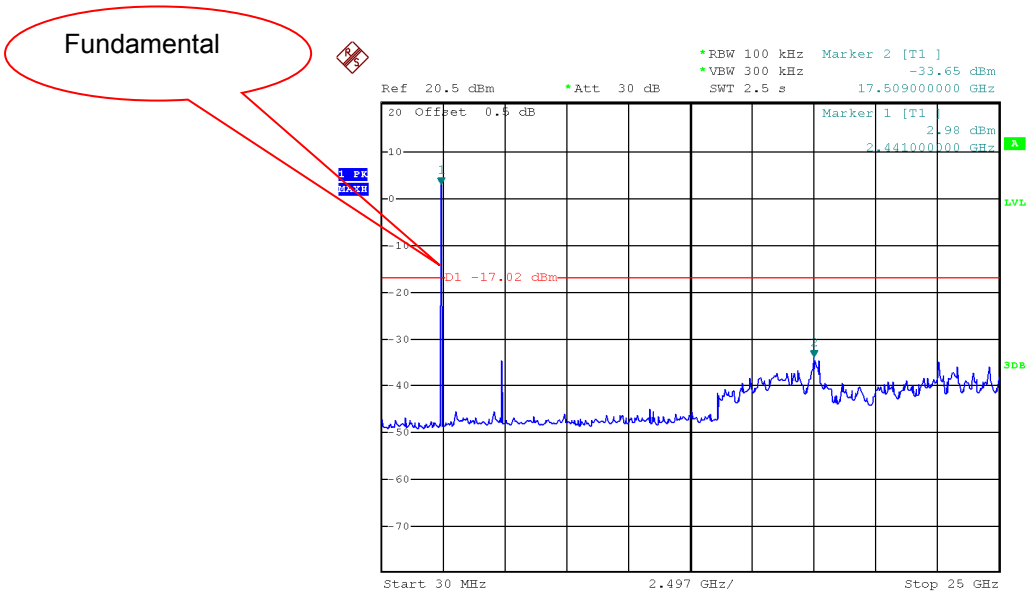


Date: 9.JUL.2026 16:57:58

GFSK High Channel

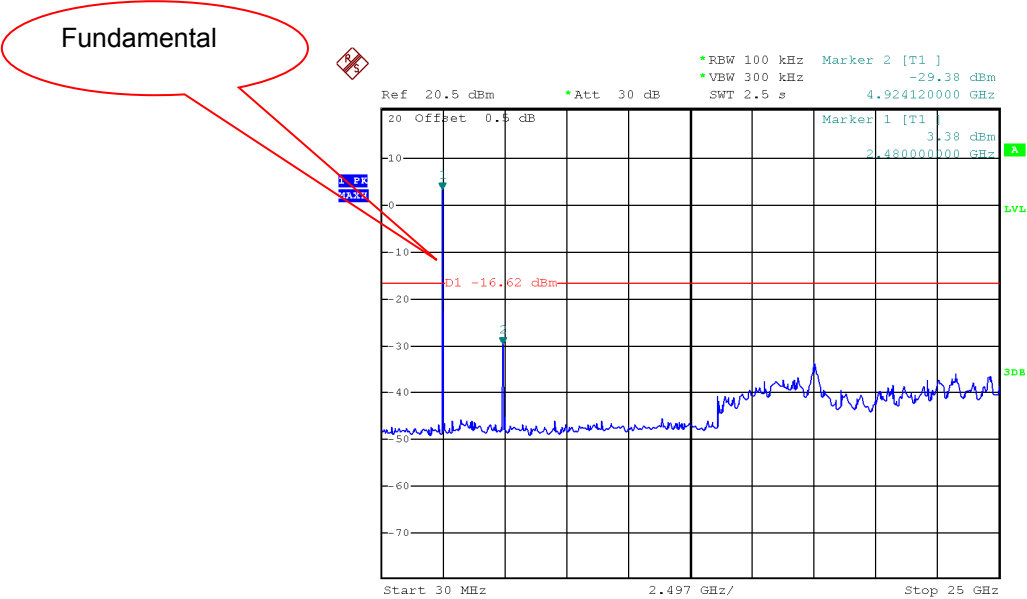


Date: 9.JUL.2026 16:57:03

$\pi/4$ DQPSK Low Channel

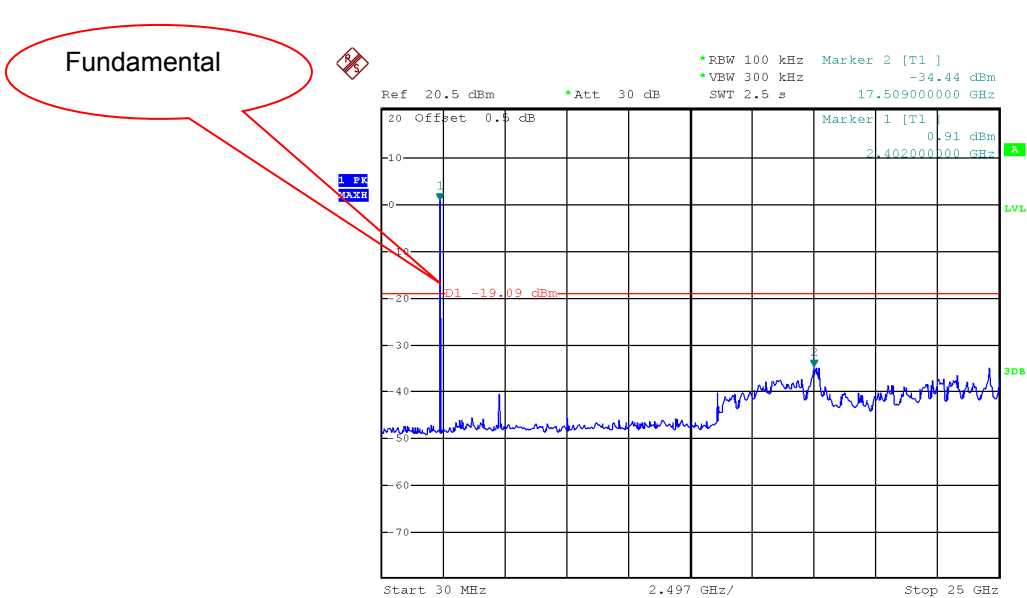


Date: 9.JUL.2026 17:00:09

$\pi/4$ DQPSK Middle Channel

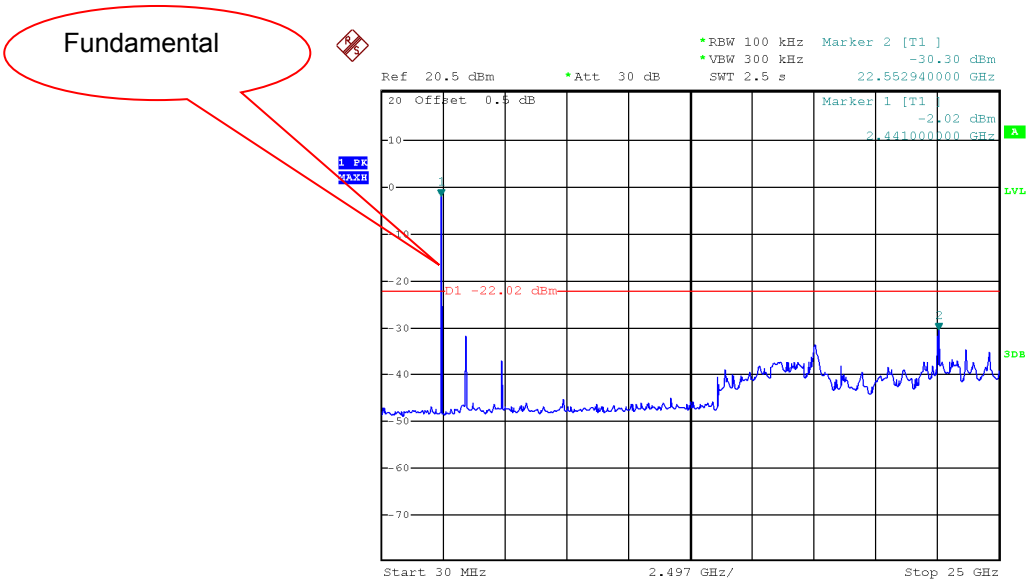


Date: 9.JUL.2026 17:01:25

$\pi/4$ DQPSK High Channel

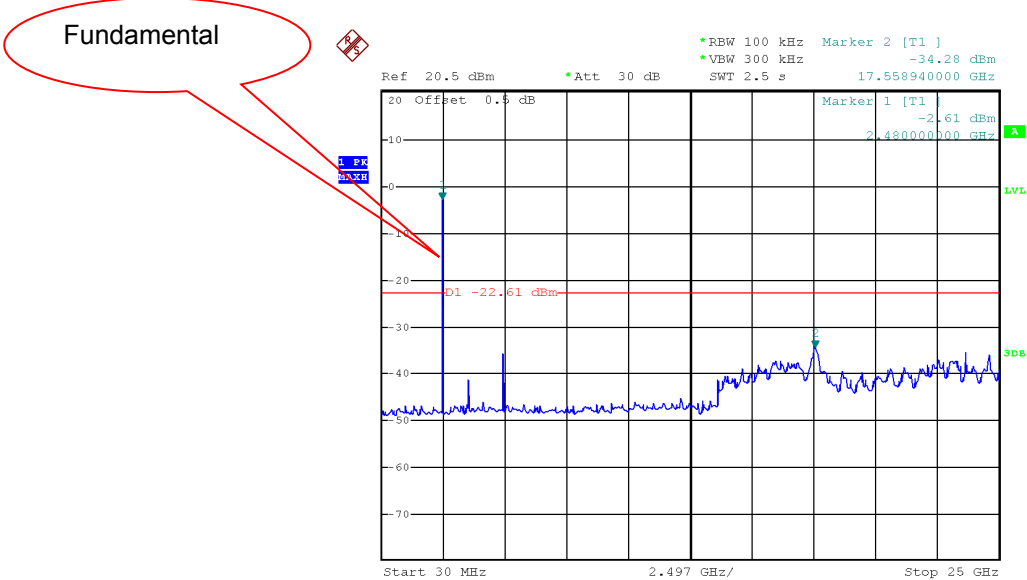


Date: 9.JUL.2026 17:02:20

8DPSK Low Channel

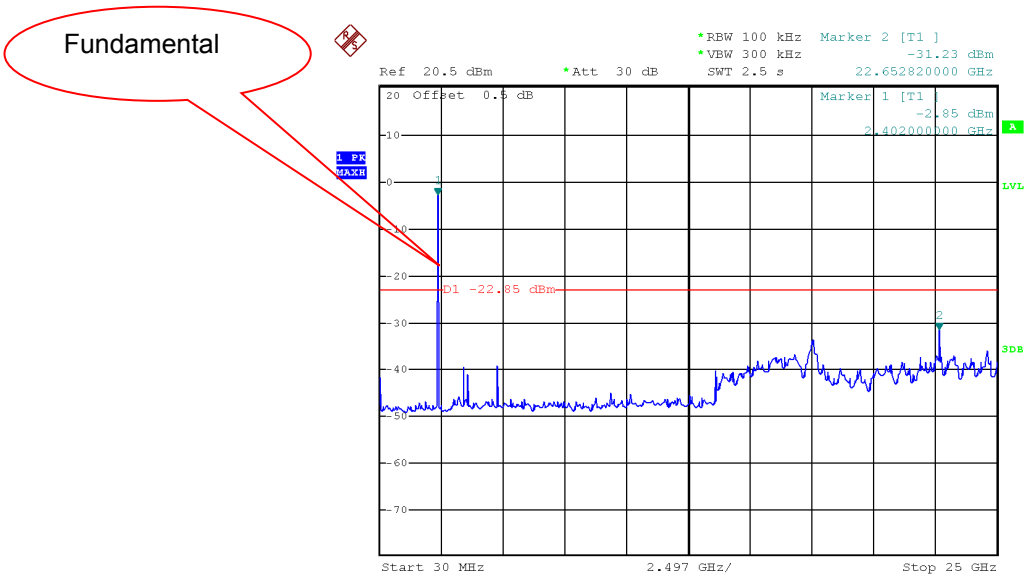

Date: 9.JUL.2026 17:04:57


8DPSK Middle Channel

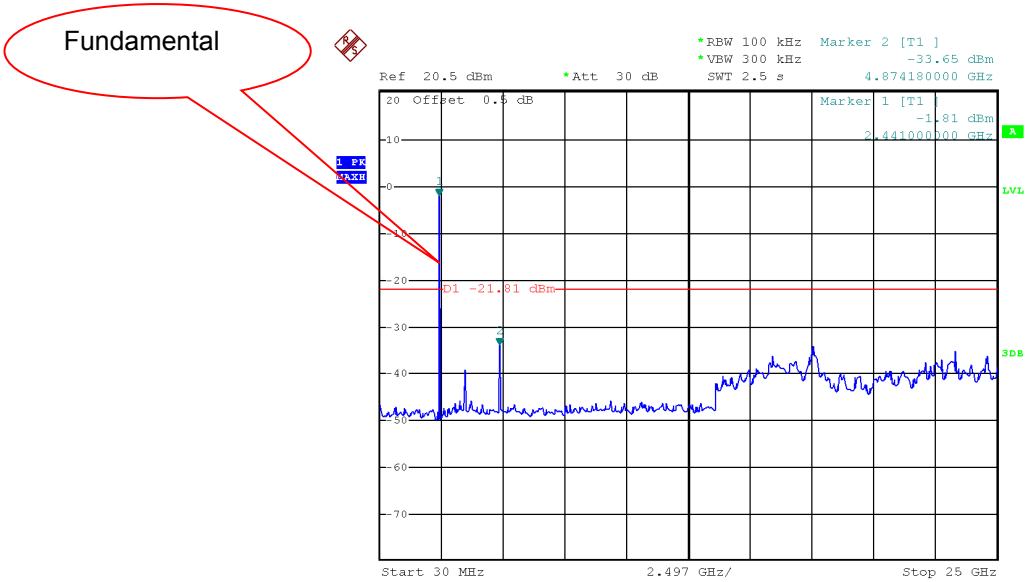

Date: 9.JUL.2026 17:03:52

8DPSK High Channel

Fundamental

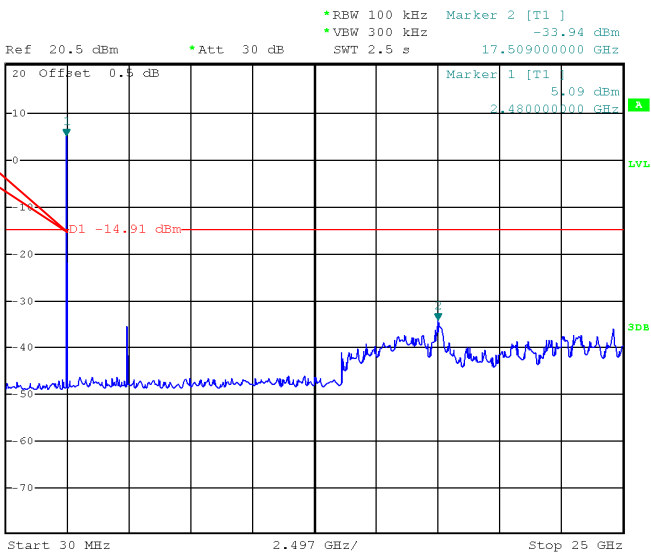

Date: 9.JUL.2026 17:03:11

9 Band Edge Measurement

Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10-2020
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting


9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

9.2 Test Result


Left earbud

GFSK Transmitting Band edge-left side

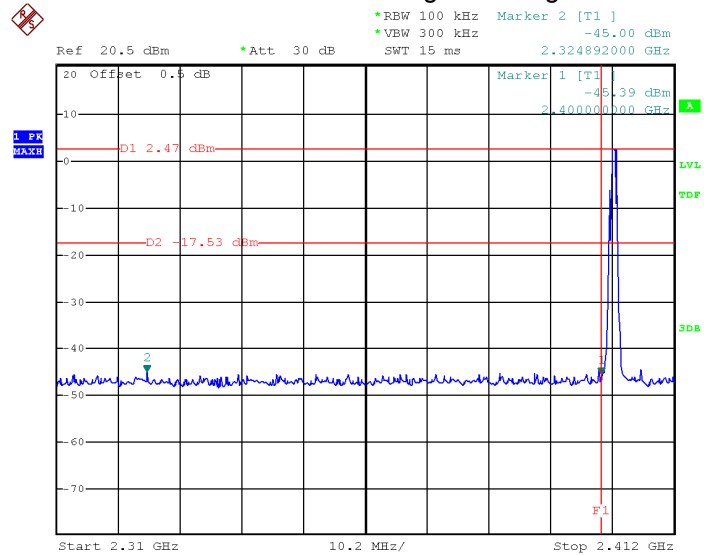


Date: 9.JUL.2026 19:35:07


GFSK Hopping Band edge-left side

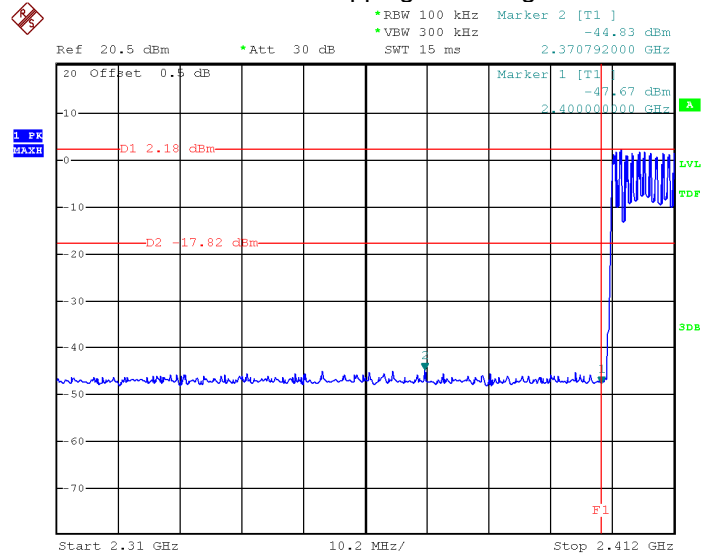


Date: 9.JUL.2026 19:53:30

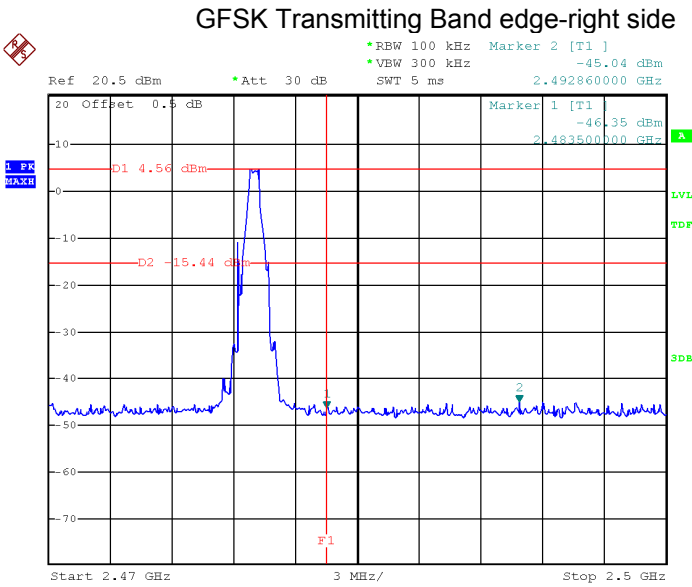


Date: 9.JUL.2026 19:43:17

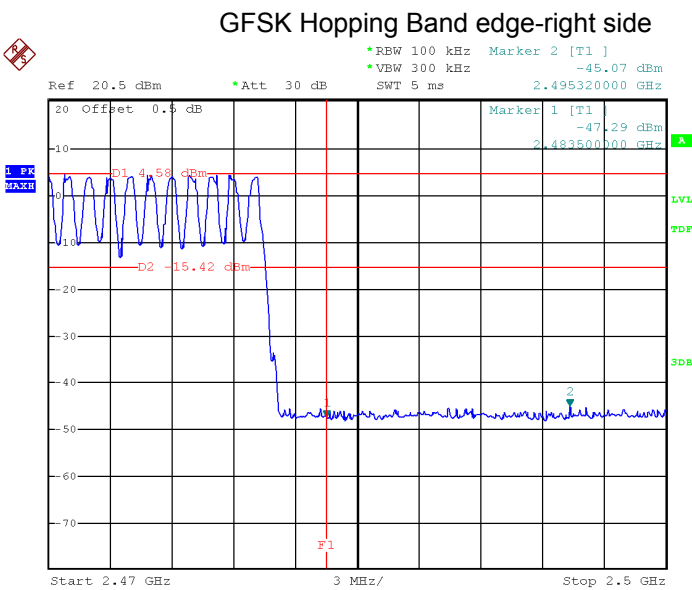


Date: 9.JUL.2026 19:45:02

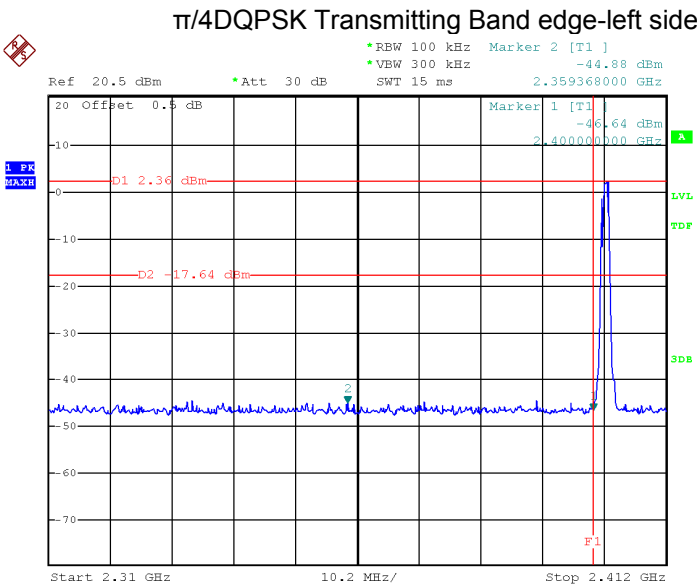


Date: 9.JUL.2026 19:37:12

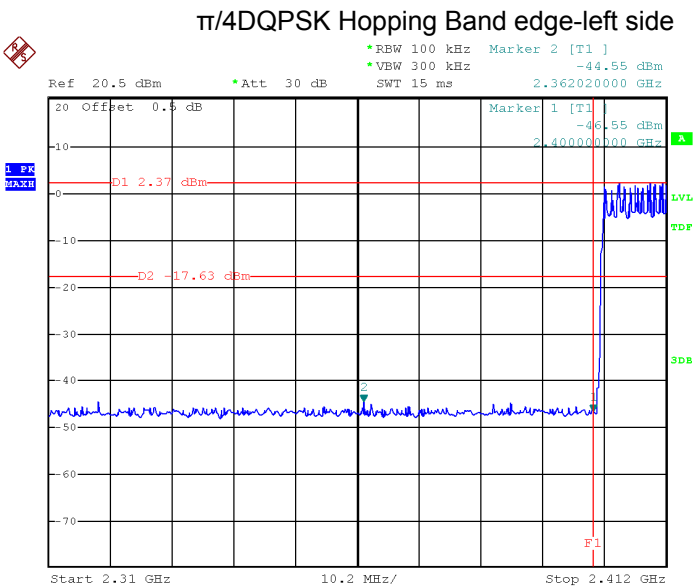


Date: 9.JUL.2026 19:52:28

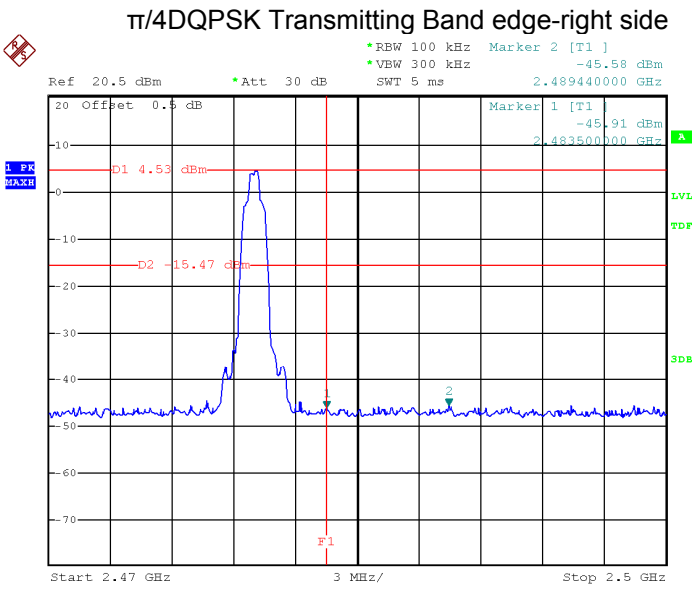


Date: 9.JUL.2026 19:42:05

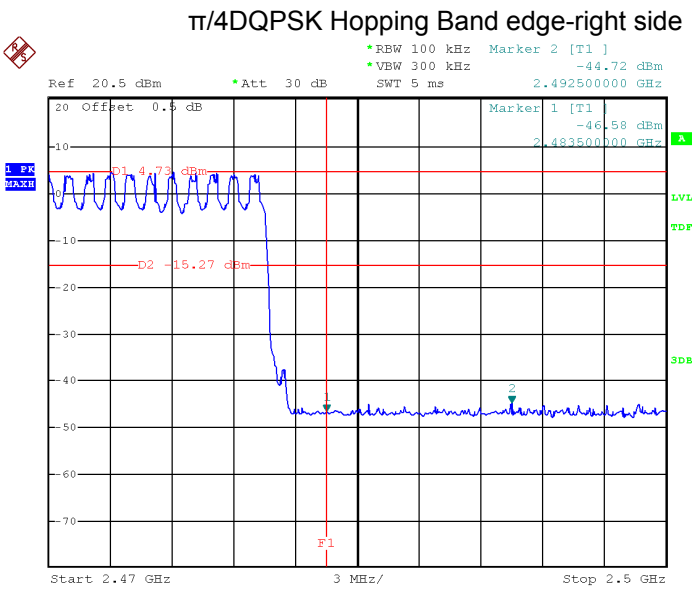


Date: 9.JUL.2026 19:46:56

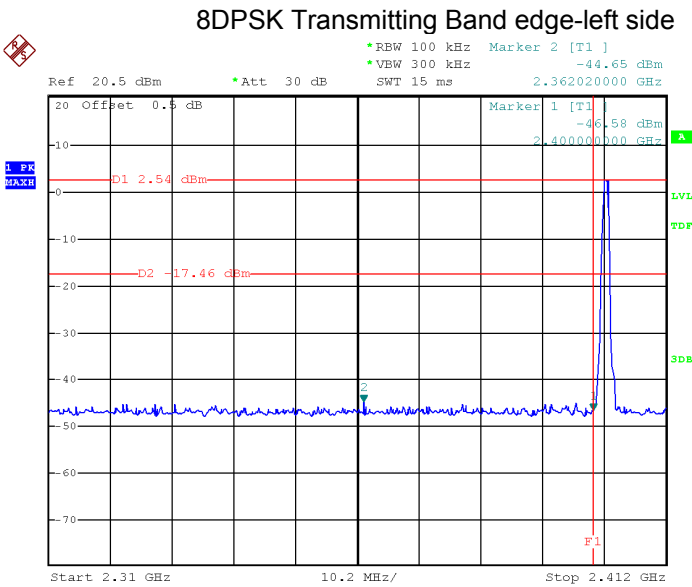


Date: 9.JUL.2026 19:38:21

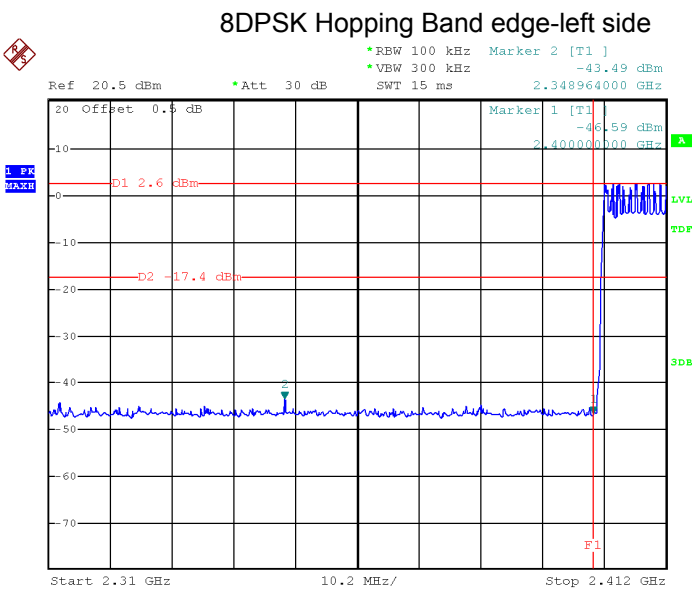

Date: 9.JUL.2026 19:51:04

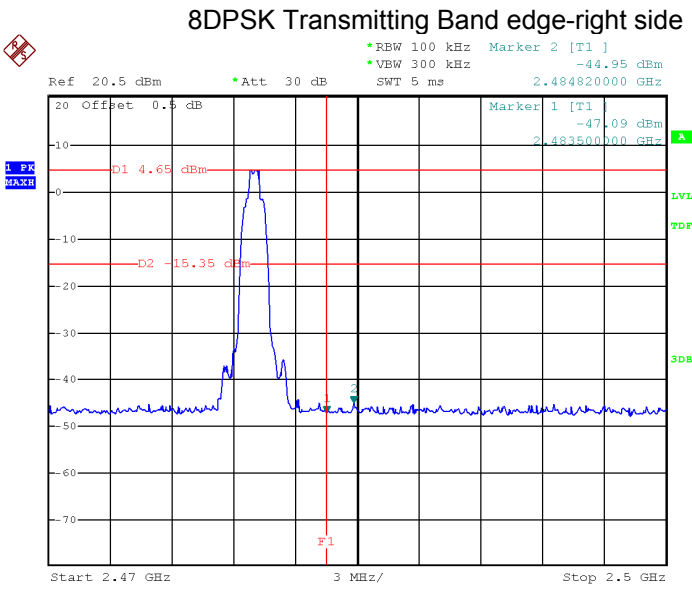


Date: 9.JUL.2026 19:40:49

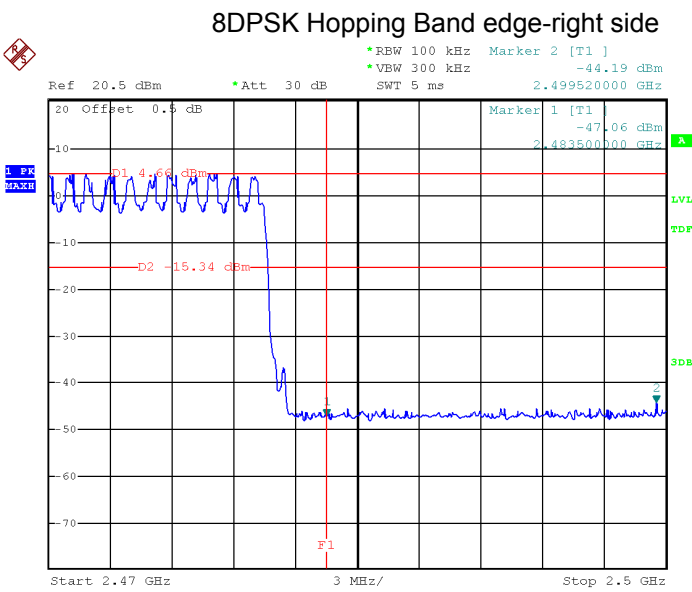

Date: 9.JUL.2026 19:48:30


Right earbud

GFSK Transmitting Band edge-left side

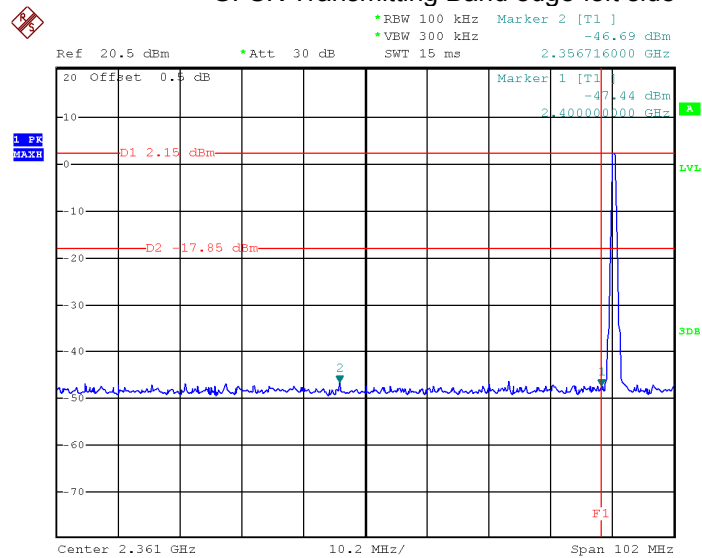


Date: 9.JUL.2026 16:18:56


GFSK Hopping Band edge-left side

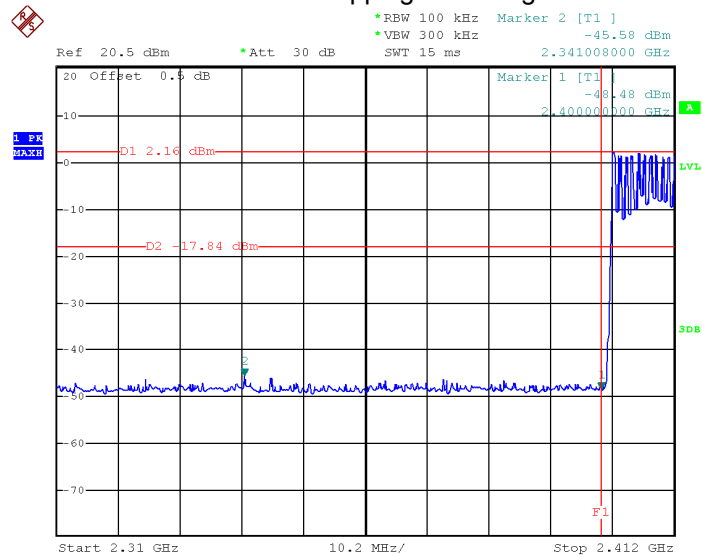


Date: 9.JUL.2026 16:33:31

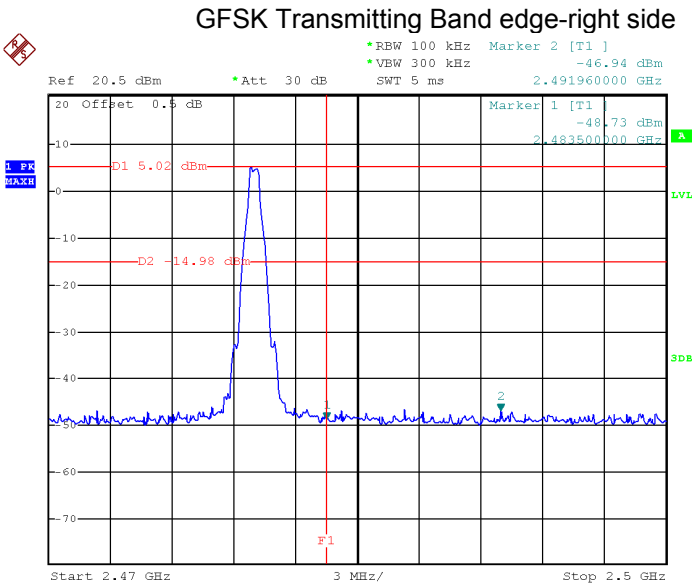


Date: 9.JUL.2026 16:19:52

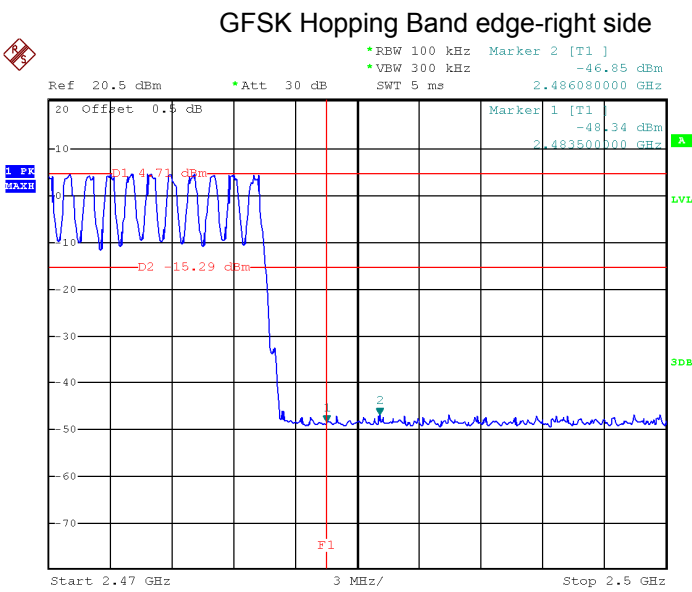


Date: 9.JUL.2026 16:32:10

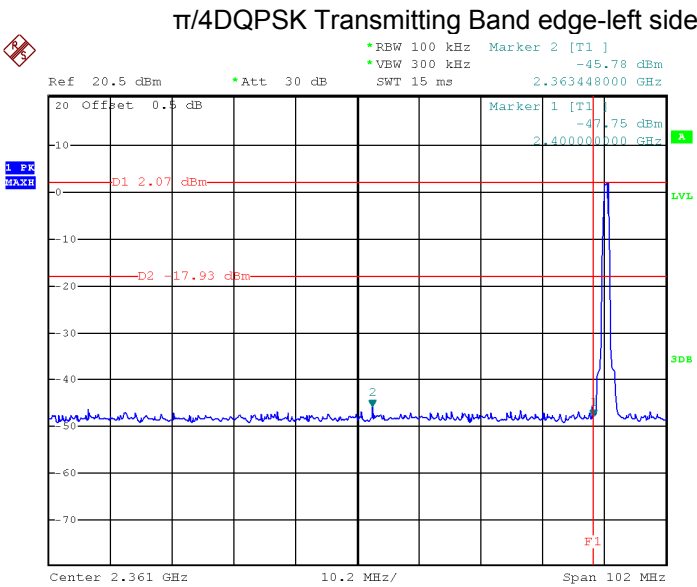


Date: 9.JUL.2026 16:17:34

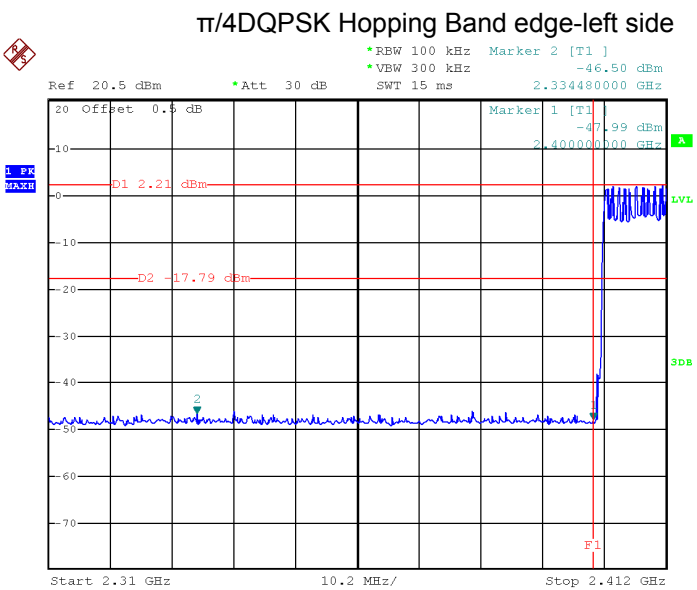


Date: 9.JUL.2026 16:35:14

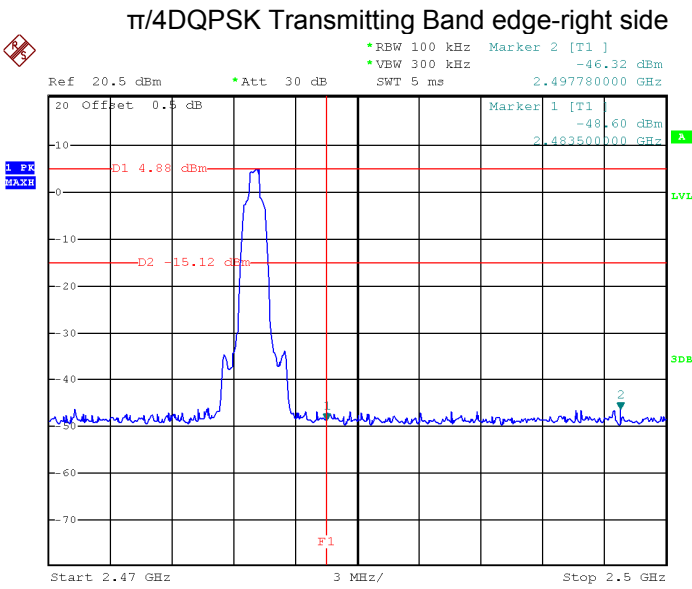


Date: 9.JUL.2026 16:21:04

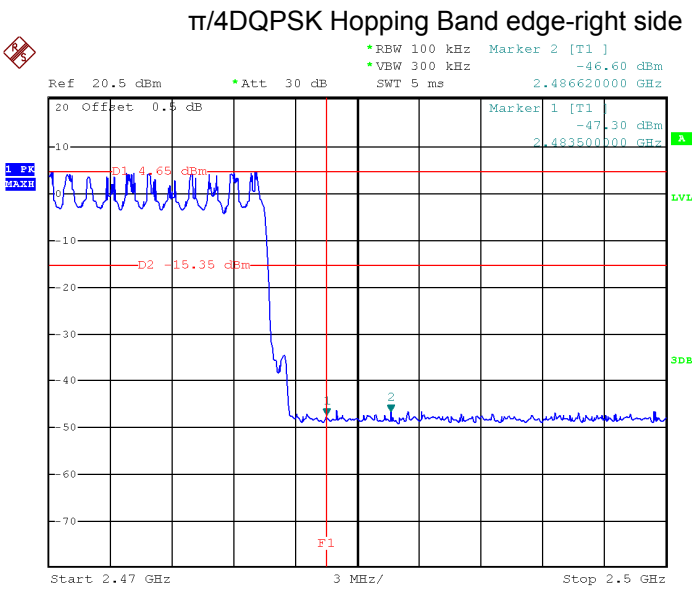


Date: 9.JUL.2026 16:30:31

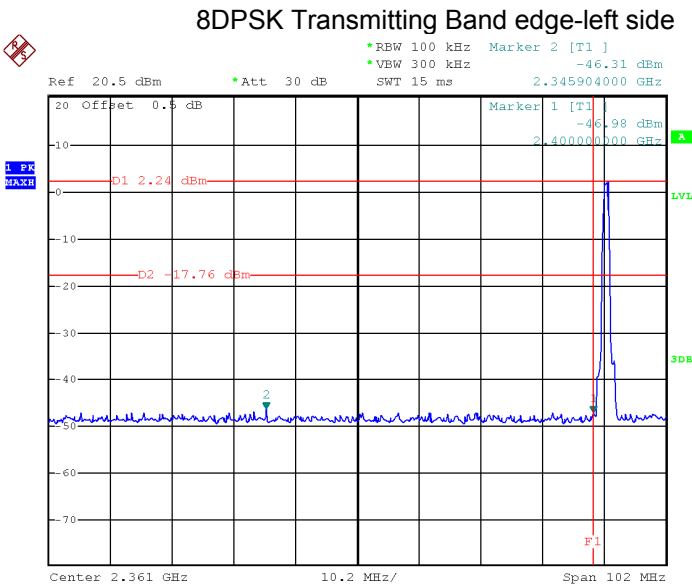


Date: 9.JUL.2026 16:15:45

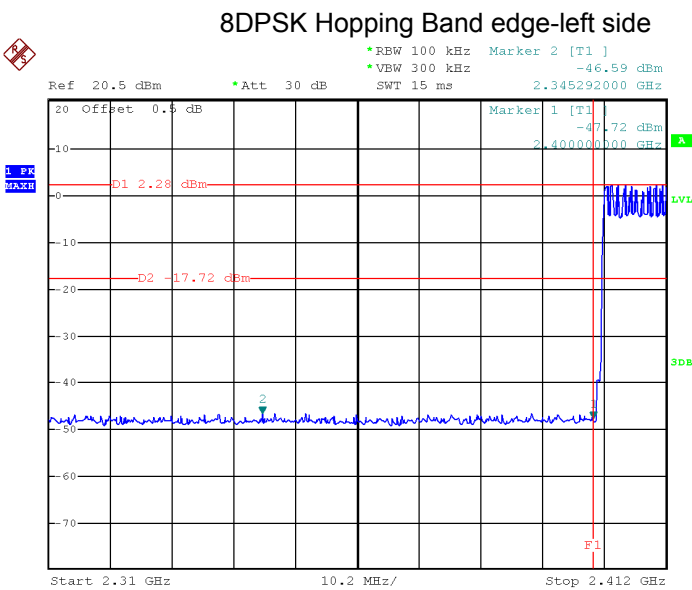

Date: 9.JUL.2026 16:37:31

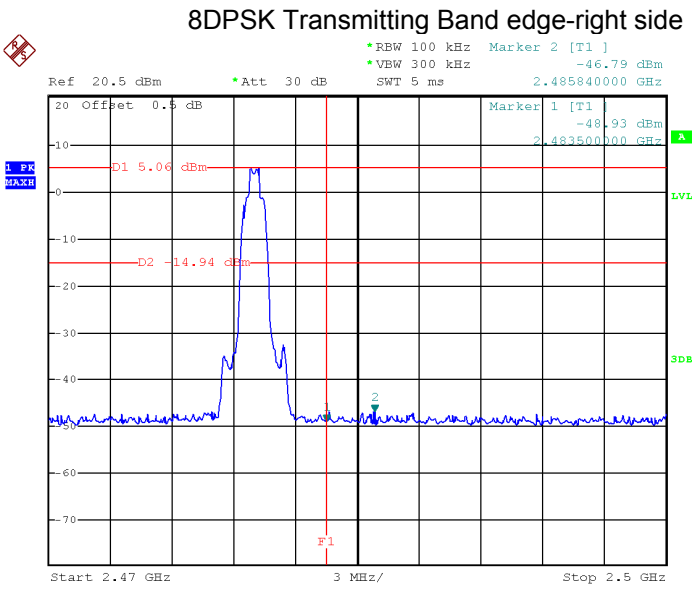

Date: 9.JUL.2026 16:22:02

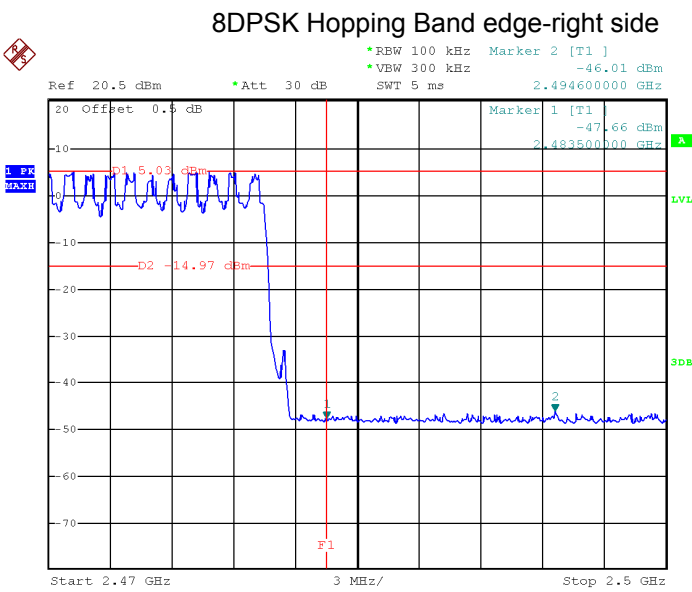

Date: 9.JUL.2026 16:26:38

10 20dB Bandwidth and 99% Bandwidth Measurement

Test Requirement: FCC 47CFR Part 15 Section 15.247

Test Method: ANSI C63.10-2020

Test Mode: Test in fixing operating frequency at low, Middle, high channel.

10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz

10.2 Test Result

Left earbud

Modulation	Test Channel	20 dB Bandwidth MHz	99% Bandwidth MHz
GFSK	Low	1.032	0.906
GFSK	Middle	1.038	0.906
GFSK	High	1.092	0.906
$\pi/4$ DQPSK	Low	1.266	1.146
$\pi/4$ DQPSK	Middle	1.260	1.134
$\pi/4$ DQPSK	High	1.254	1.140
8DPSK	Low	1.260	1.134
8DPSK	Middle	1.254	1.134
8DPSK	High	1.266	1.140

Right earbud


Modulation	Test Channel	20 dB Bandwidth MHz	99% Bandwidth MHz
GFSK	Low	1.092	0.912
GFSK	Middle	1.092	0.906
GFSK	High	1.092	0.906
$\pi/4$ DQPSK	Low	1.266	1.140
$\pi/4$ DQPSK	Middle	1.254	1.140
$\pi/4$ DQPSK	High	1.266	1.140
8DPSK	Low	1.254	1.134
8DPSK	Middle	1.254	1.134
8DPSK	High	1.254	1.134

Test plots

20 dB Bandwidth


Left earbud

GFSK Low Channel

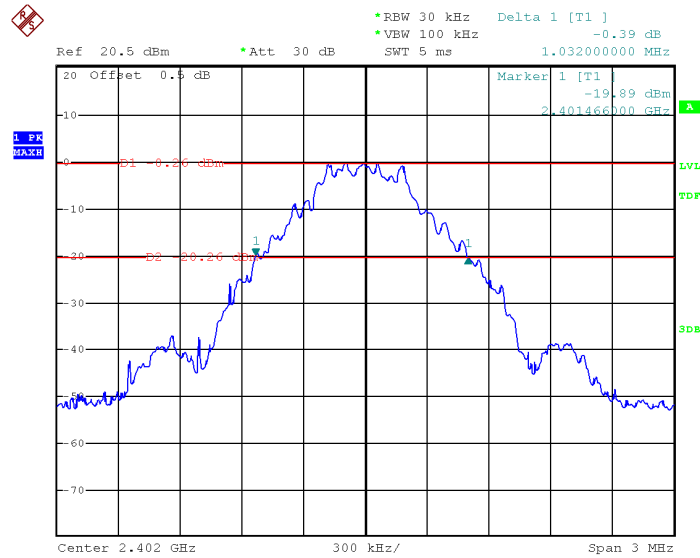


Date: 10.JUL.2026 12:58:41


GFSK Middle Channel

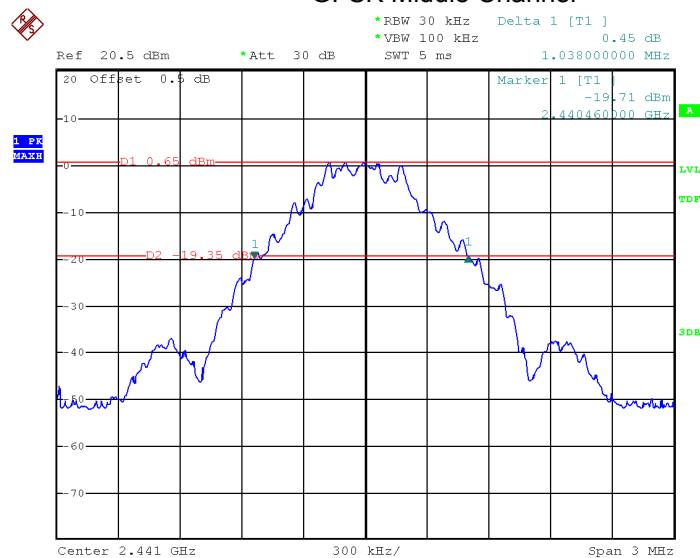


Date: 10.JUL.2026 12:59:41

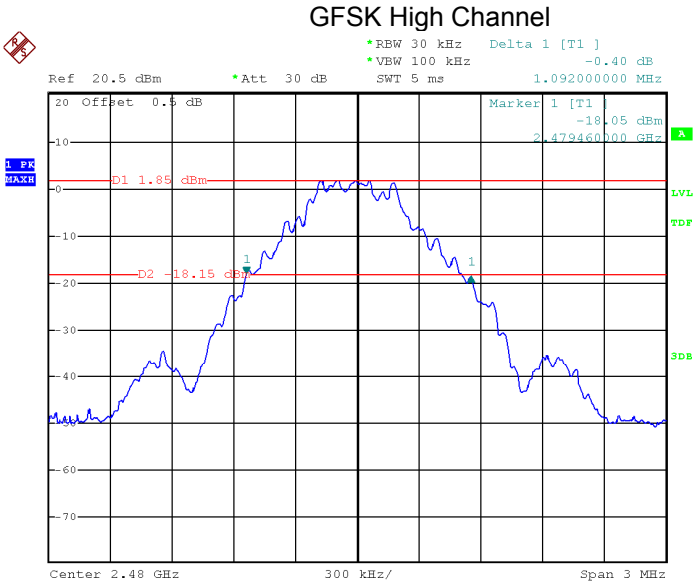


Date: 10.JUL.2026 13:03:04

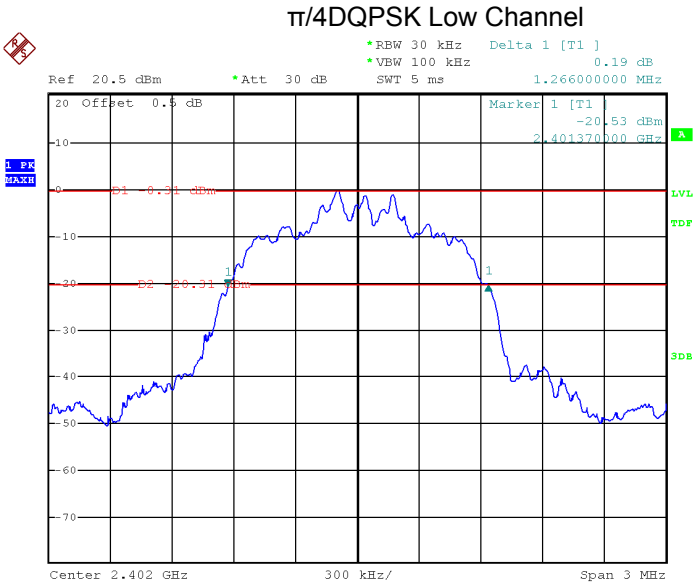


Date: 9.JUL.2026 18:34:39

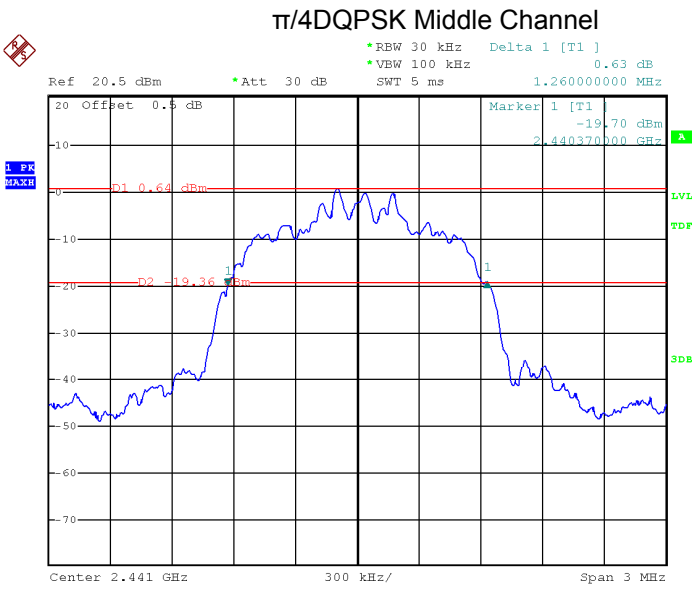


Date: 9.JUL.2026 18:36:09

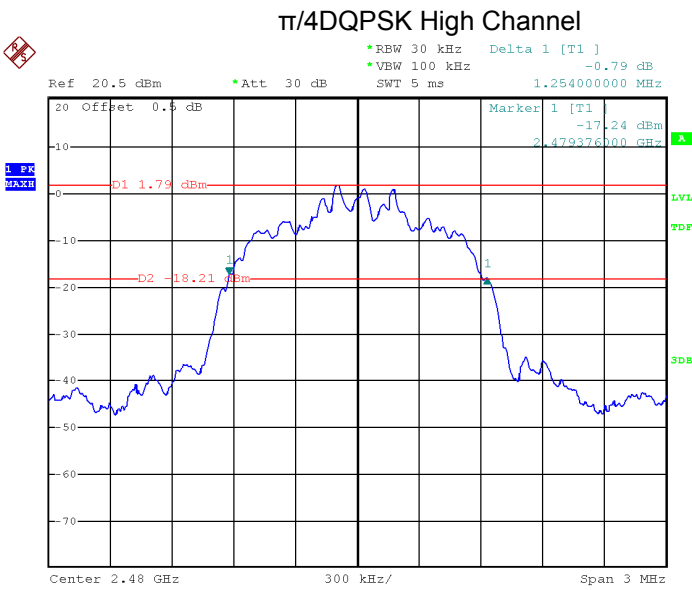


Date: 9.JUL.2026 18:37:43

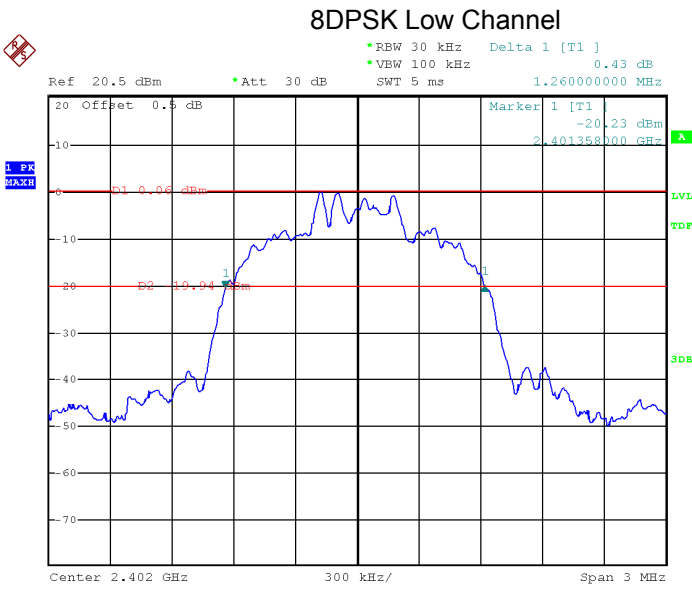

Date: 9.JUL.2026 18:43:00

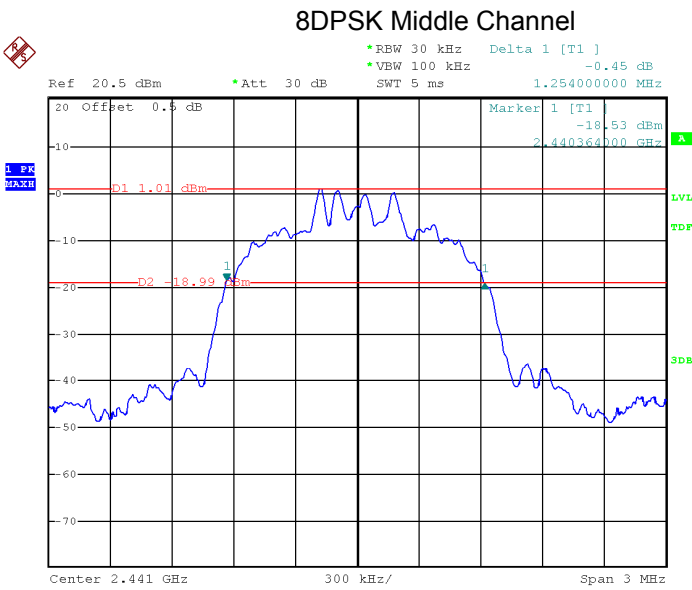


Date: 9.JUL.2026 18:41:24

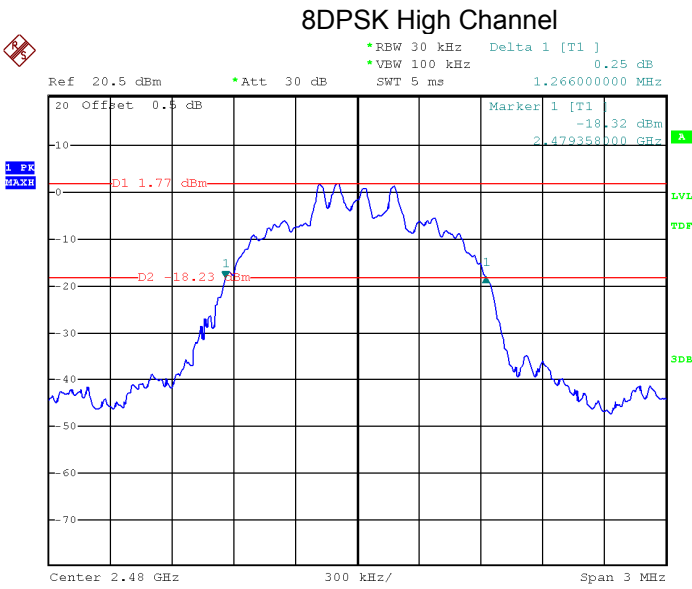

Date: 9.JUL.2026 18:40:06


Right earbud

GFSK Low Channel

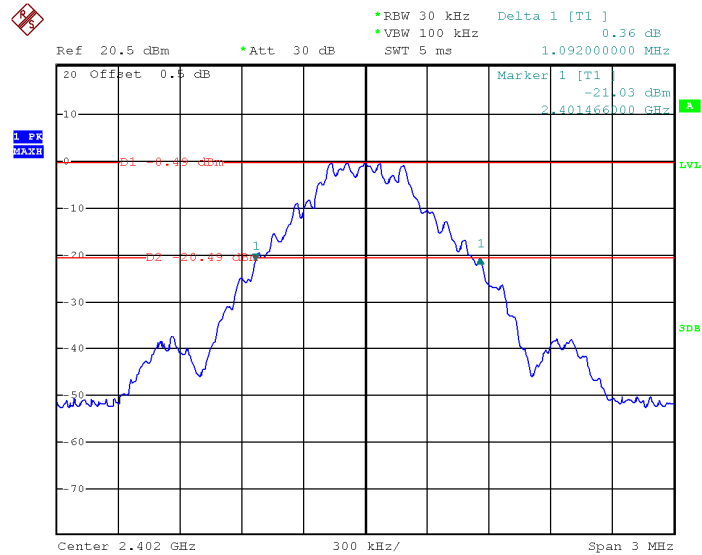


Date: 9.JUL.2026 15:27:18


GFSK Middle Channel

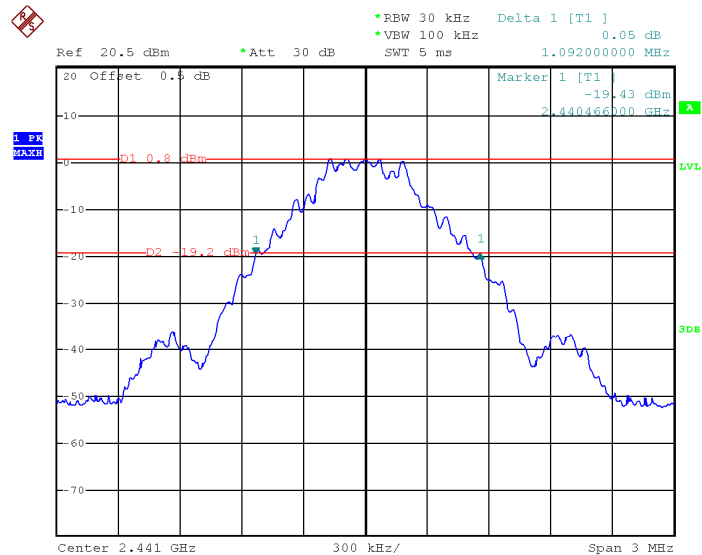


Date: 9.JUL.2026 15:28:59

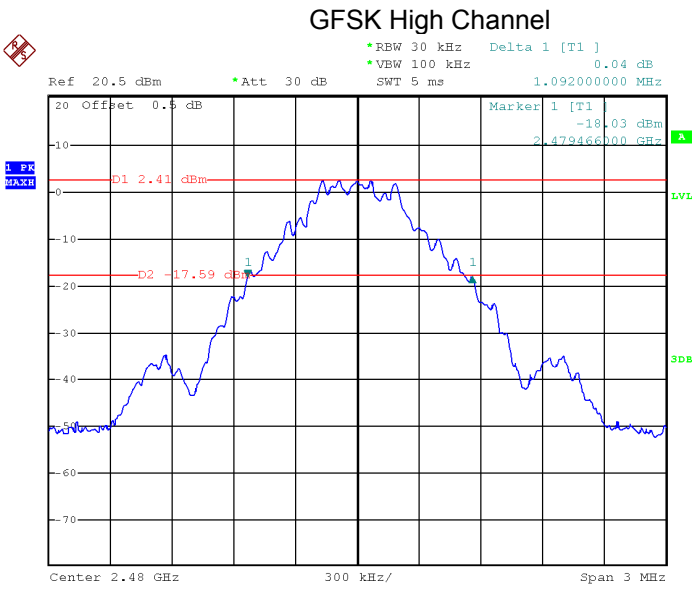


Date: 9.JUL.2026 15:30:06

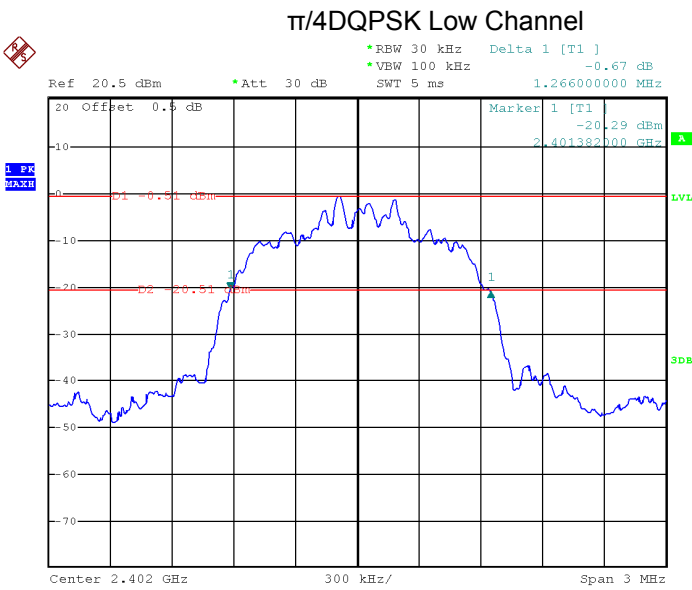


Date: 9.JUL.2026 15:24:58

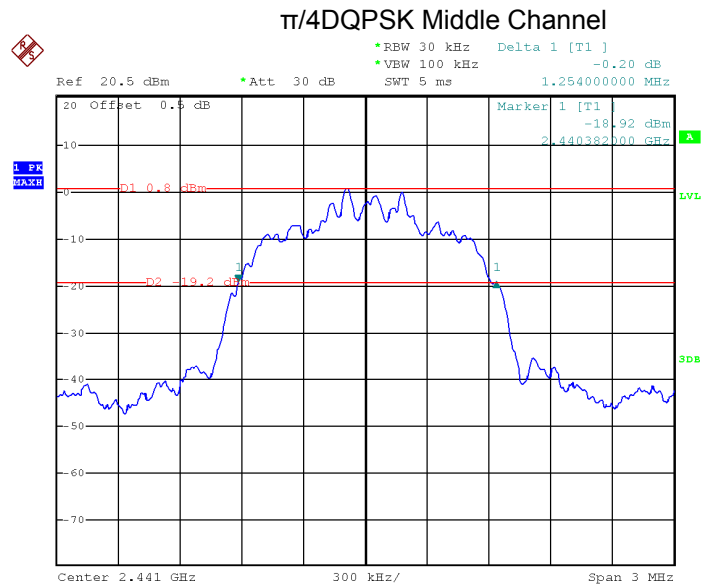


Date: 9.JUL.2026 15:23:55

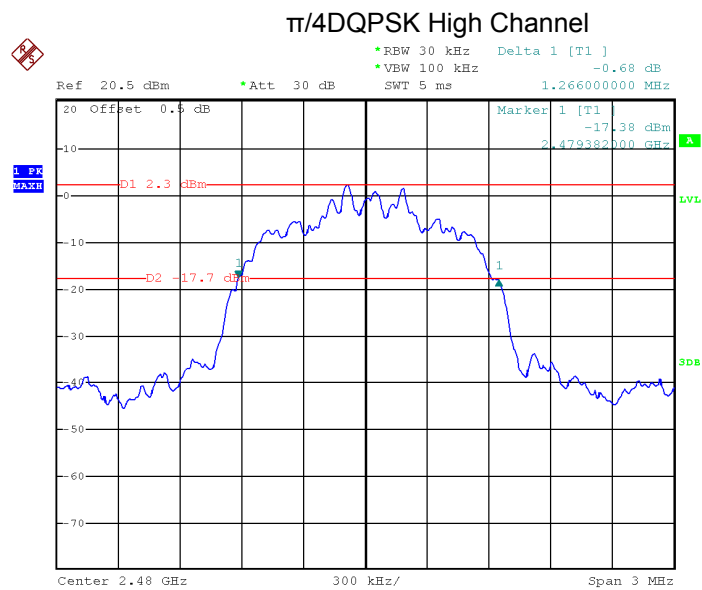


Date: 9.JUL.2026 15:22:56

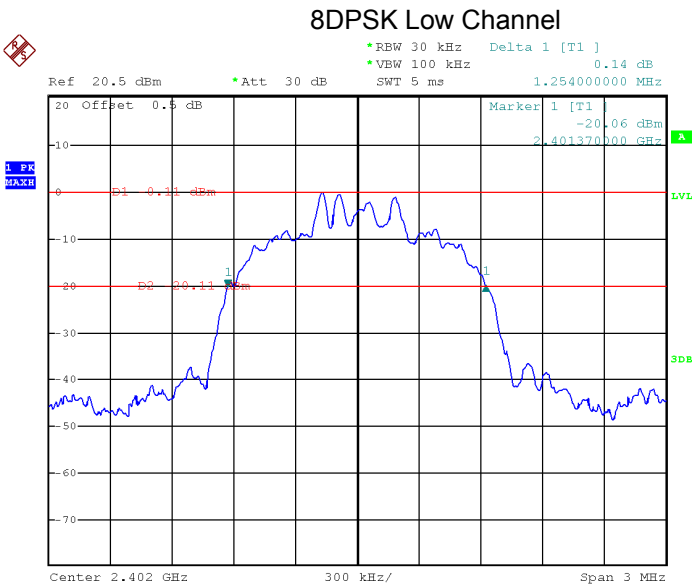

Date: 9.JUL.2026 15:12:55

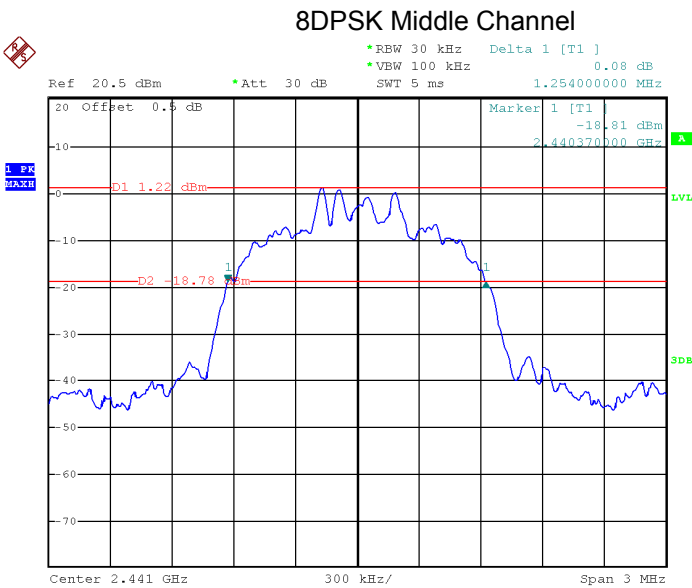

Date: 9.JUL.2026 15:14:30

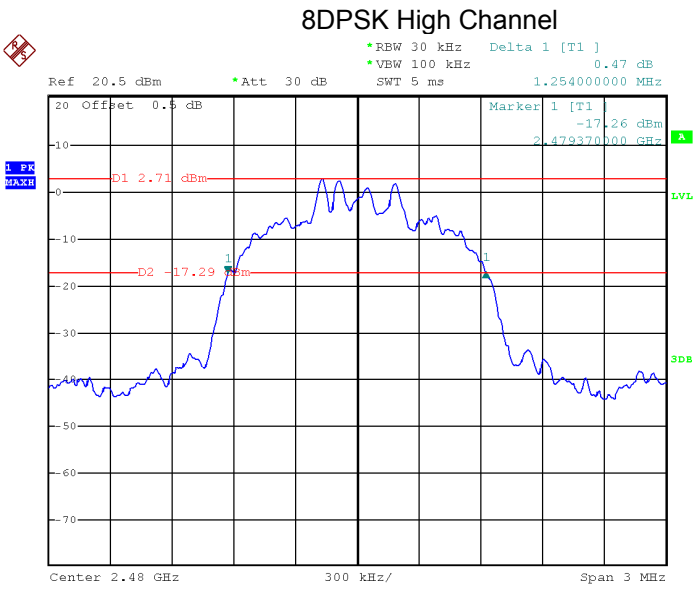


Date: 9.JUL.2026 15:21:14

99% Bandwidth


Left earbud

GFSK Low Channel

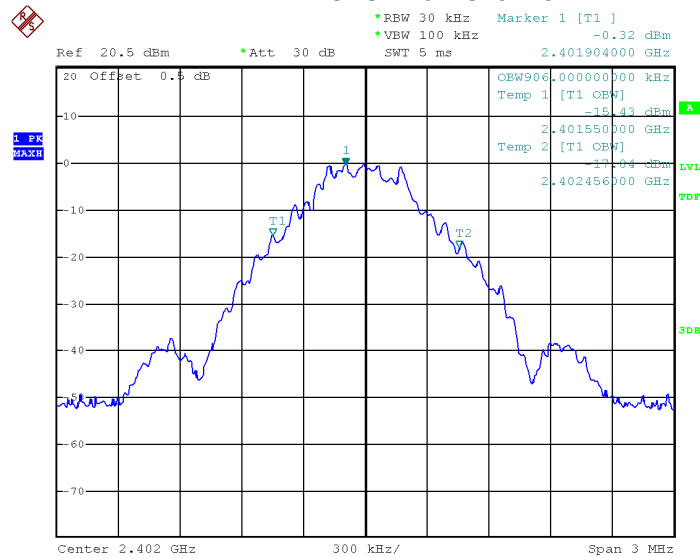


Date: 9.JUL.2026 18:51:56


GFSK Middle Channel

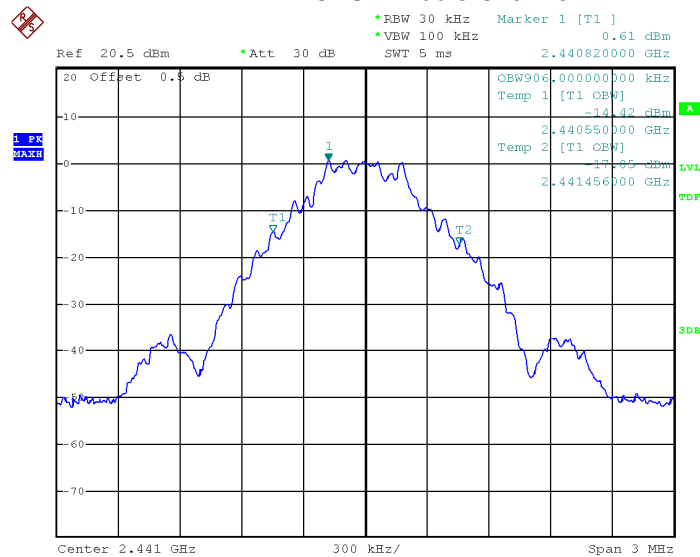


Date: 9.JUL.2026 18:53:10

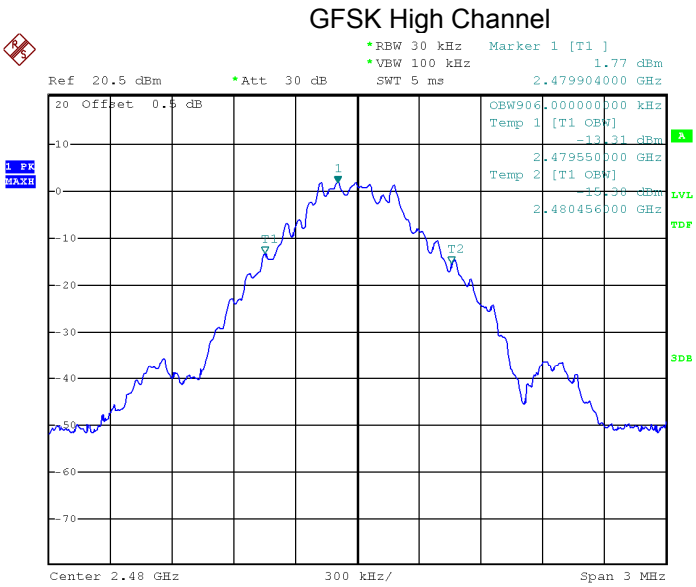


Date: 9.JUL.2026 18:54:01

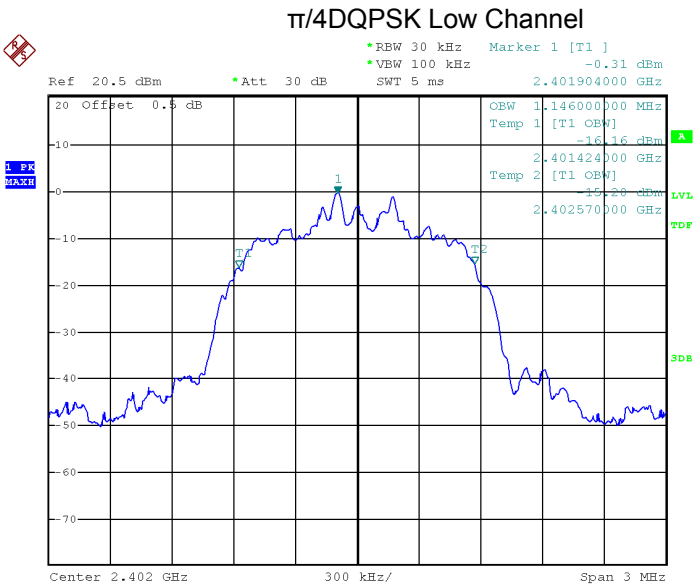


Date: 9.JUL.2026 18:51:06

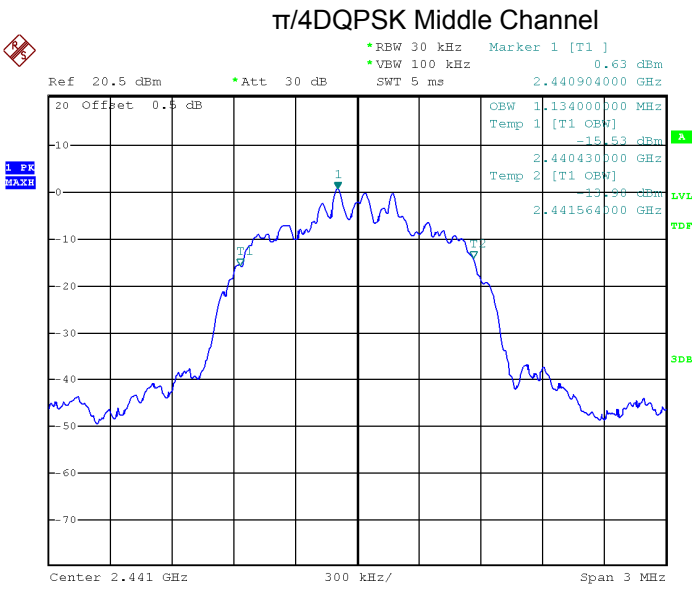


Date: 9.JUL.2026 18:50:11

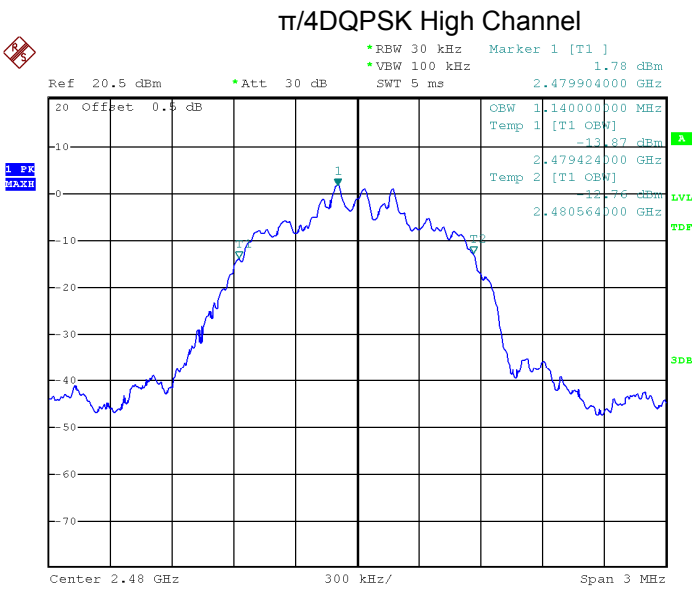


Date: 9.JUL.2026 18:49:09

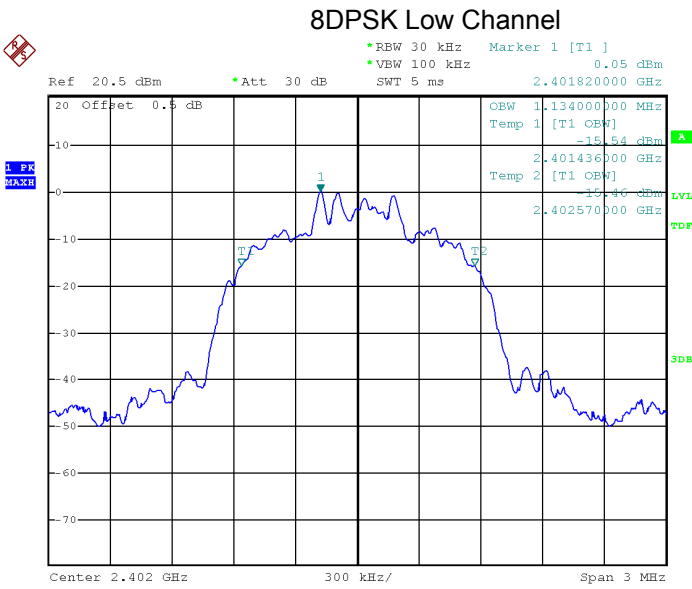

Date: 9.JUL.2026 18:44:37

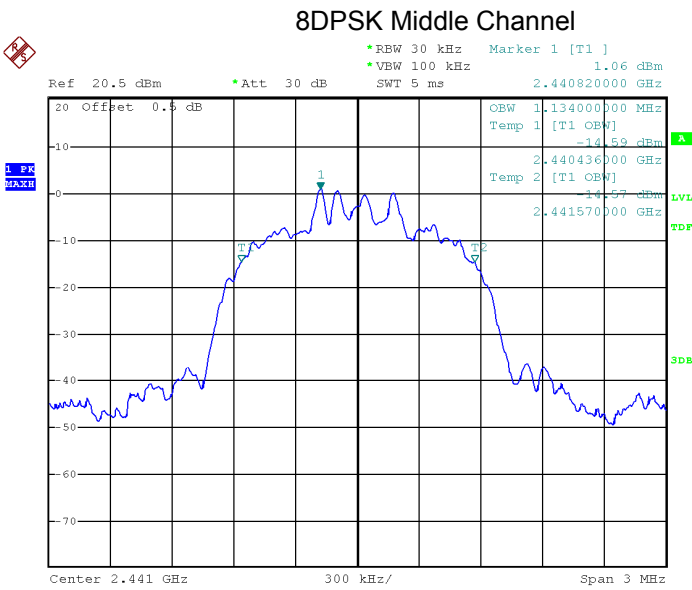


Date: 9.JUL.2026 18:45:59

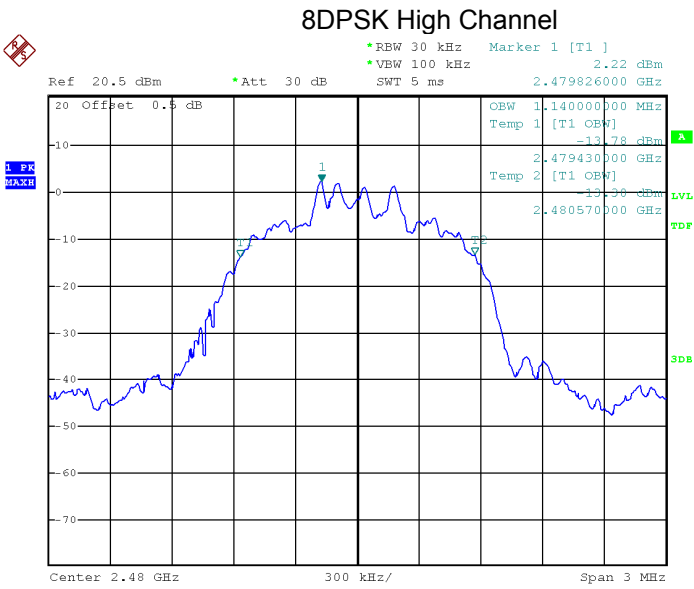

Date: 9.JUL.2026 18:47:56


Right earbud

GFSK Low Channel

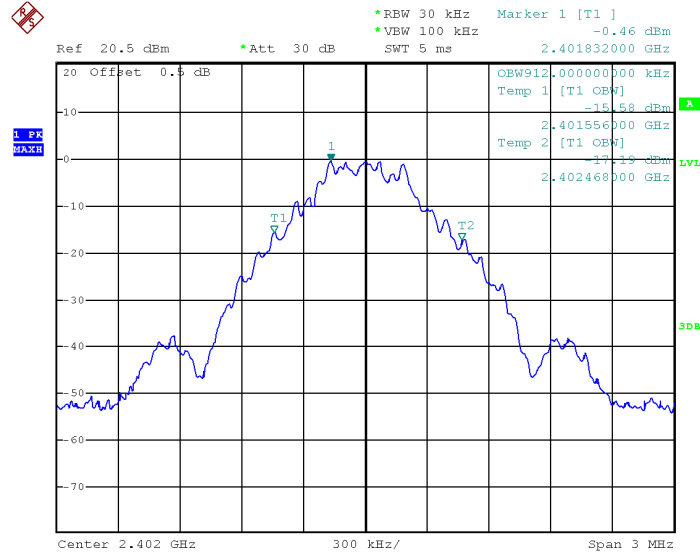


Date: 9.JUL.2026 15:33:20


GFSK Middle Channel

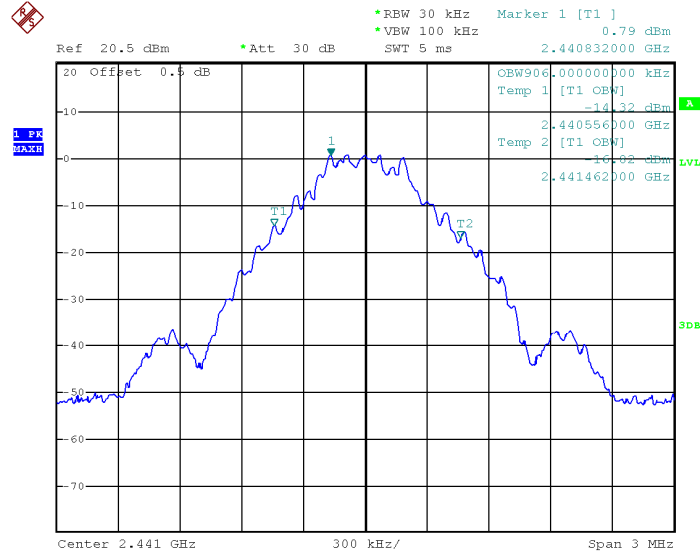


Date: 9.JUL.2026 15:32:32

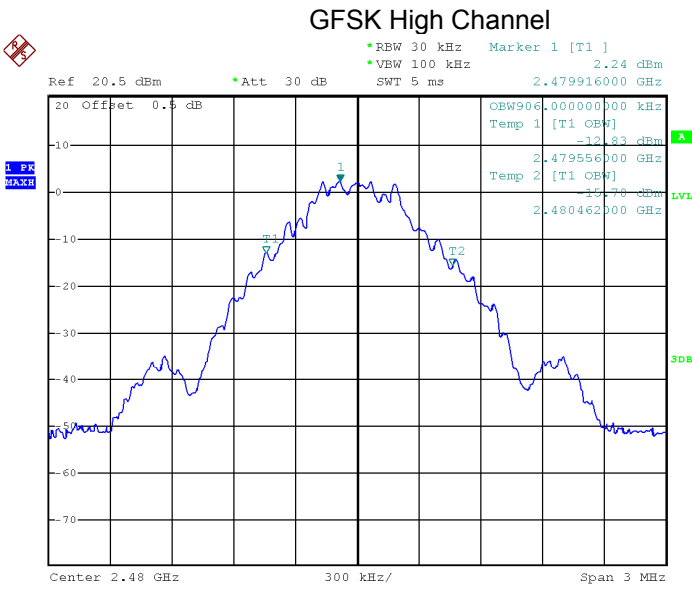


Date: 9.JUL.2026 15:31:19

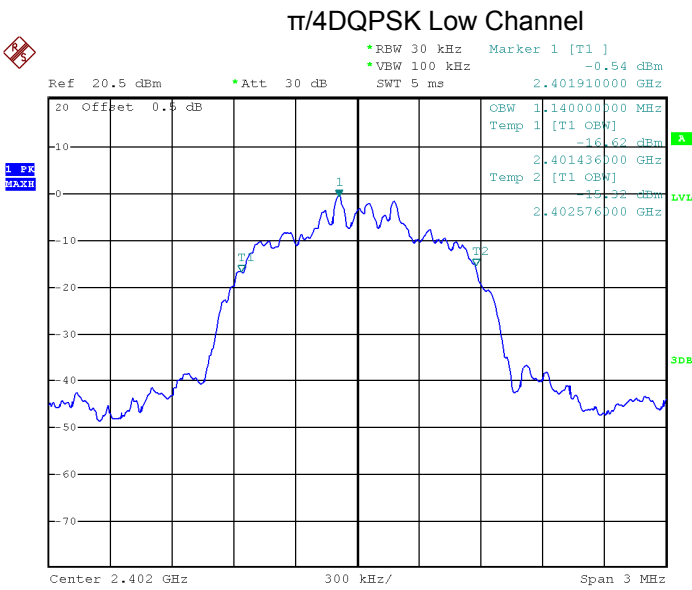


Date: 9.JUL.2026 15:34:37

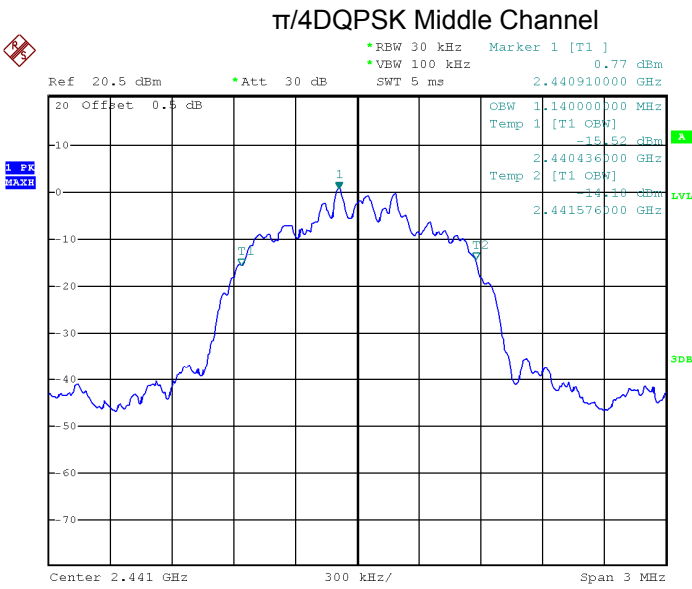


Date: 9.JUL.2026 15:35:31

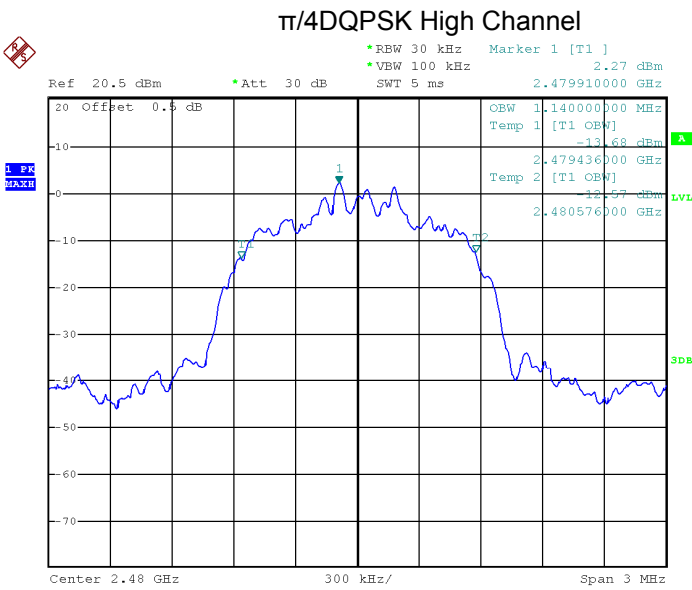


Date: 9.JUL.2026 15:36:19

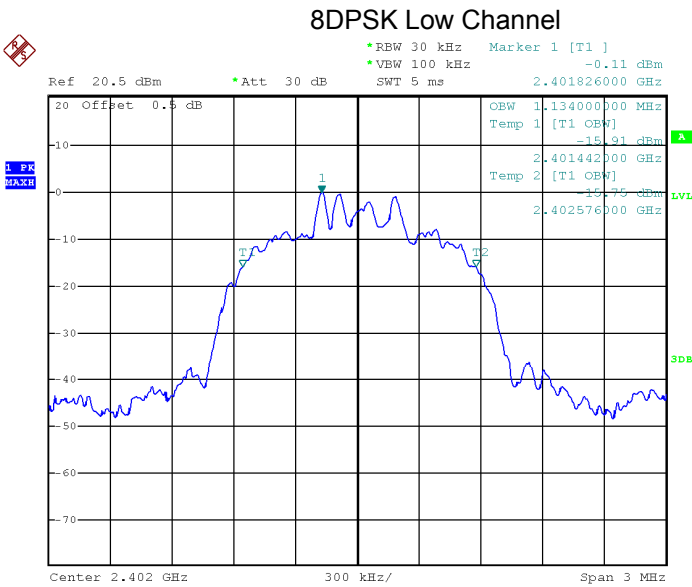

Date: 9.JUL.2026 15:39:48

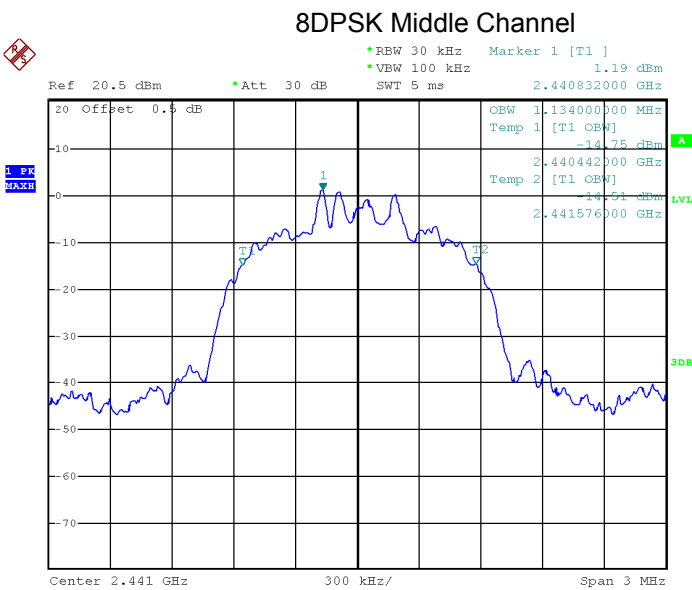

Date: 9.JUL.2026 15:38:14

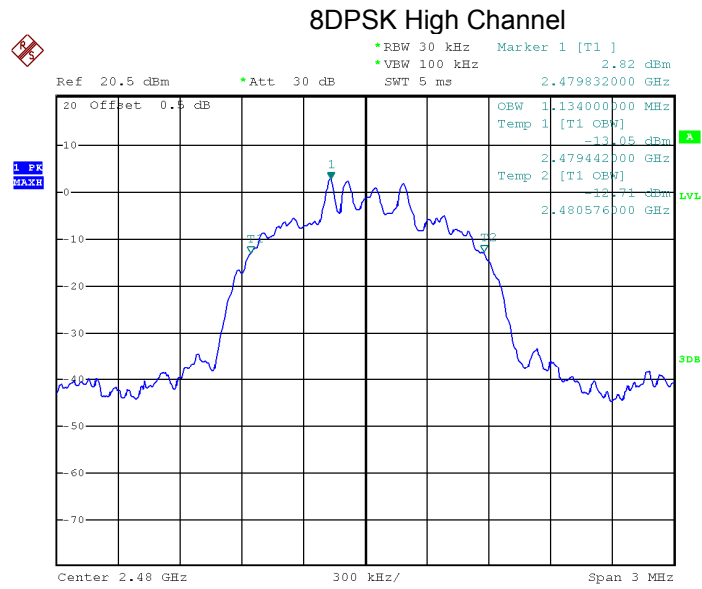

Date: 9.JUL.2026 15:37:34

11 Maximum Peak Output Power

Test Requirement:	FCC 47CFR Part 15 Section 15.247
Test Method:	ANSI C63.10-2020
Test Limit:	§15.247(b)(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
Test Mode:	Test in fixing frequency transmitting mode.

11.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer:
 - a) Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW $\geq$ 20 dB bandwidth of the emission being measured.
 - 3) VBW $\geq$ RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
 - b) Allow trace to stabilize.
 - c) Use the marker-to-peak function to set the marker to the peak of the emission.
 - d) The indicated level is the peak output power, after any corrections for external attenuators and cables.
 - e) A plot of the test results and setup description shall be included in the test report.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

11.2 Test Result

Left earbud

Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Low	2.59	30
GFSK	Middle	3.50	30
GFSK	High	4.60	30
$\pi/4$ DQPSK	Low	2.53	21
$\pi/4$ DQPSK	Middle	3.41	21
$\pi/4$ DQPSK	High	4.60	21
8DPSK	Low	2.68	21
8DPSK	Middle	3.60	21
8DPSK	High	4.73	21


Right earbud

Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Low	2.40	30
GFSK	Middle	3.56	30
GFSK	High	5.06	30
$\pi/4$ DQPSK	Low	2.31	21
$\pi/4$ DQPSK	Middle	3.56	21
$\pi/4$ DQPSK	High	5.06	21
8DPSK	Low	2.31	21
8DPSK	Middle	3.53	21
8DPSK	High	5.06	21

Test plots


Left earbud

GFSK Low Channel

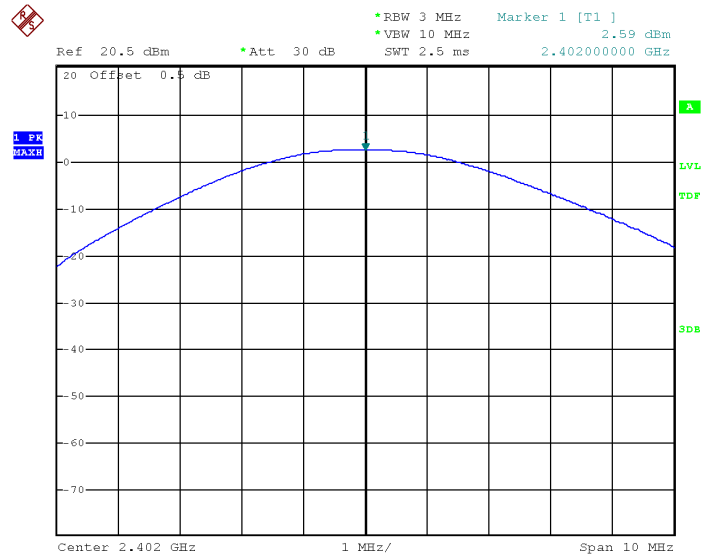


Date: 9.JUL.2026 18:20:05


GFSK Middle Channel

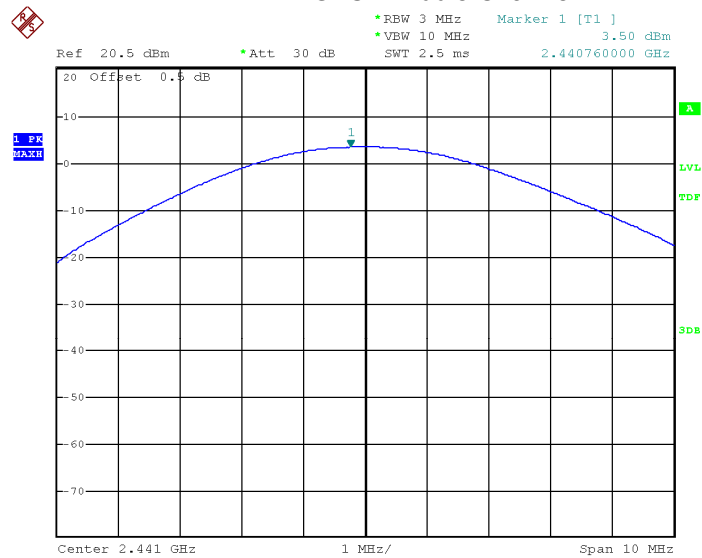


Date: 9.JUL.2026 18:20:34

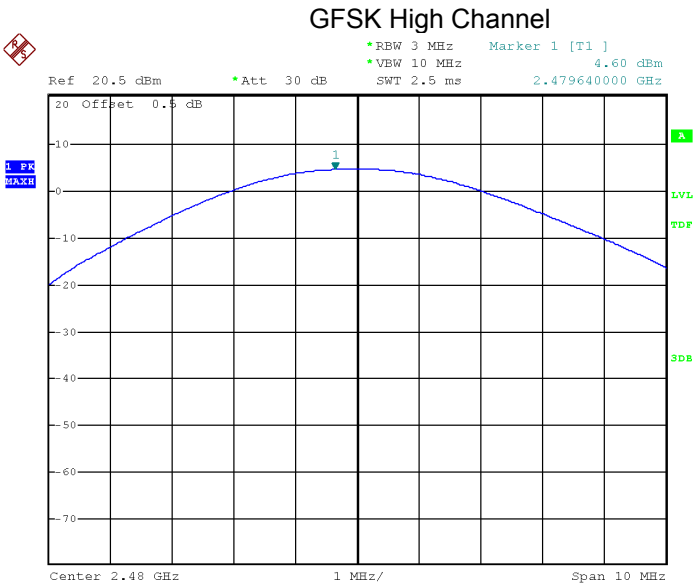


Date: 9.JUL.2026 18:21:09

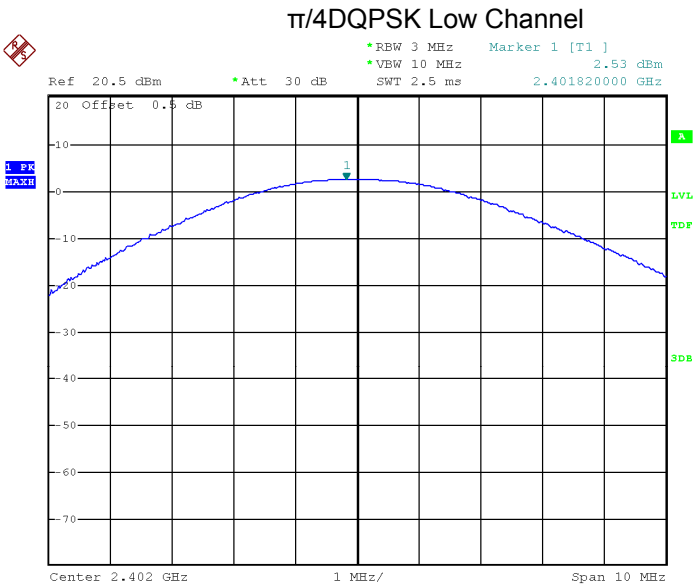


Date: 9.JUL.2026 18:24:28

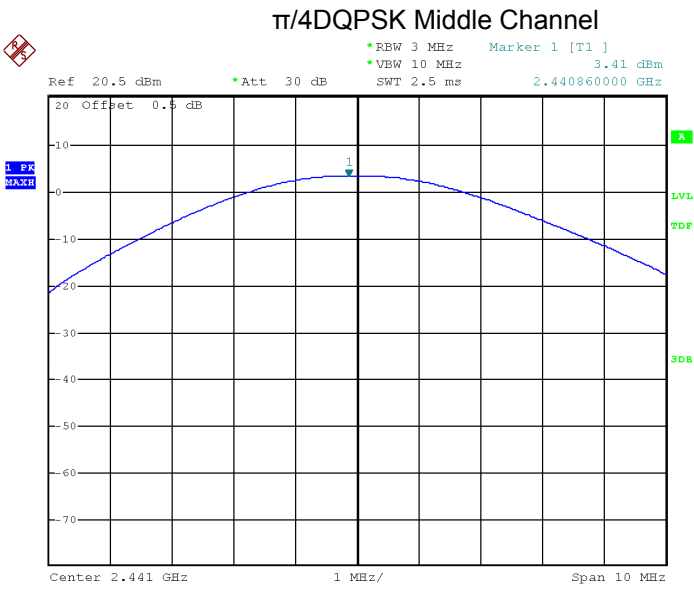


Date: 9.JUL.2026 18:22:21

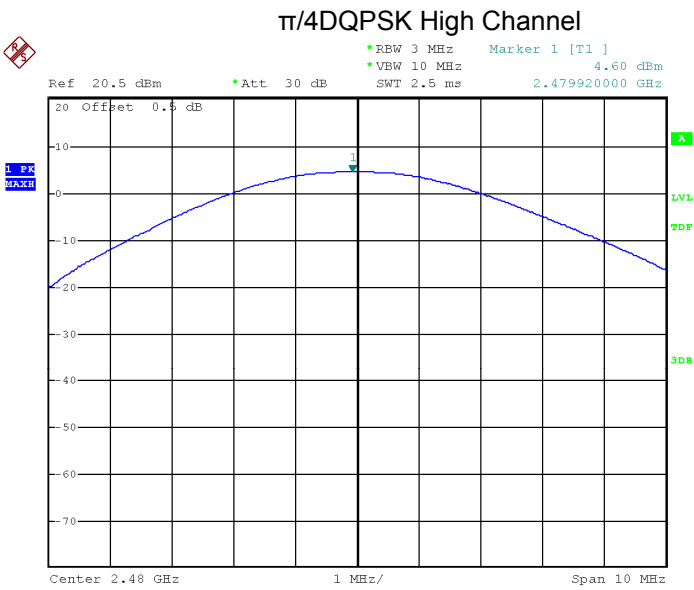


Date: 9.JUL.2026 18:21:46

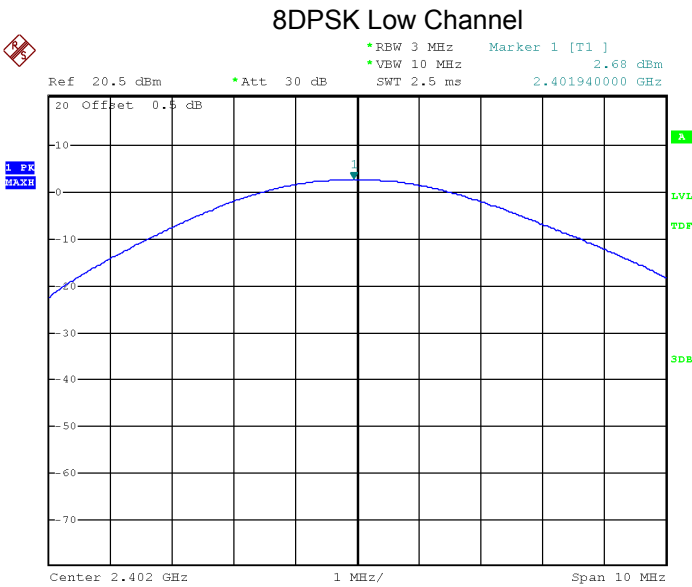

Date: 9.JUL.2026 18:26:18

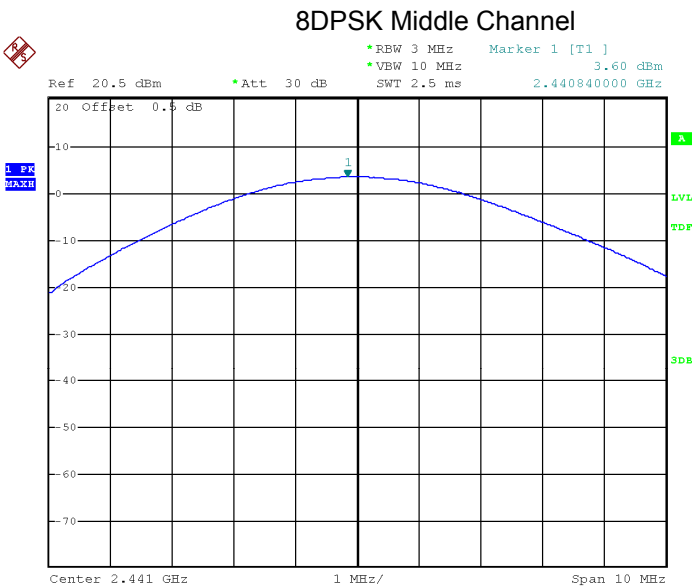


Date: 9.JUL.2026 18:27:02

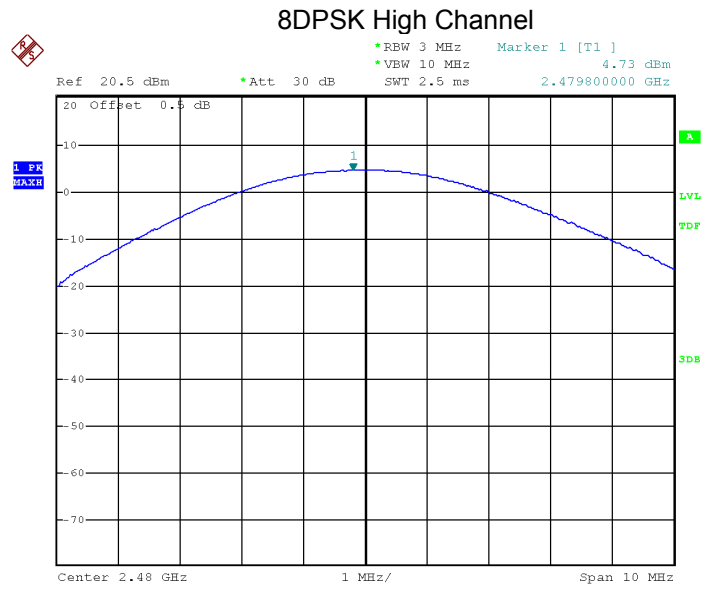

Date: 9.JUL.2026 18:27:30


Right earbud

GFSK Low Channel

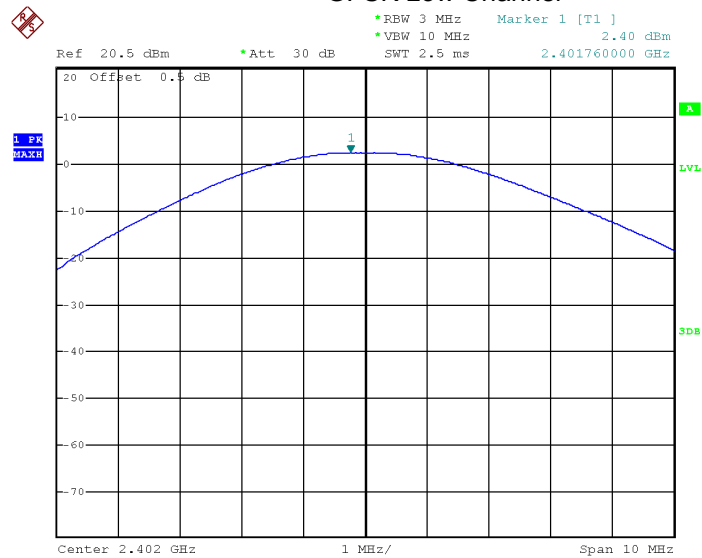


Date: 9.JUL.2026 14:56:16


GFSK Middle Channel

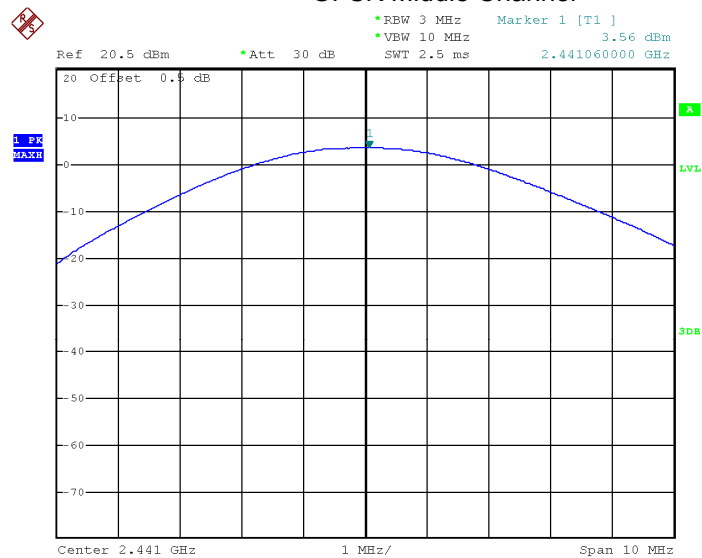


Date: 9.JUL.2026 14:56:55

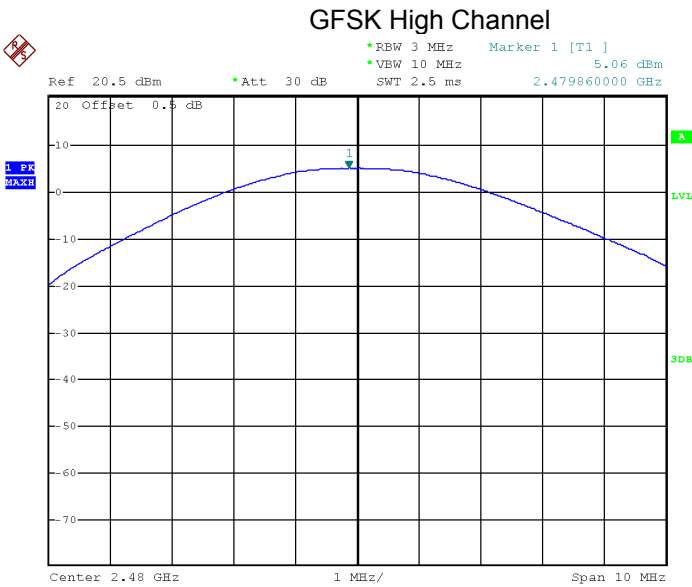


Date: 9.JUL.2026 14:57:24

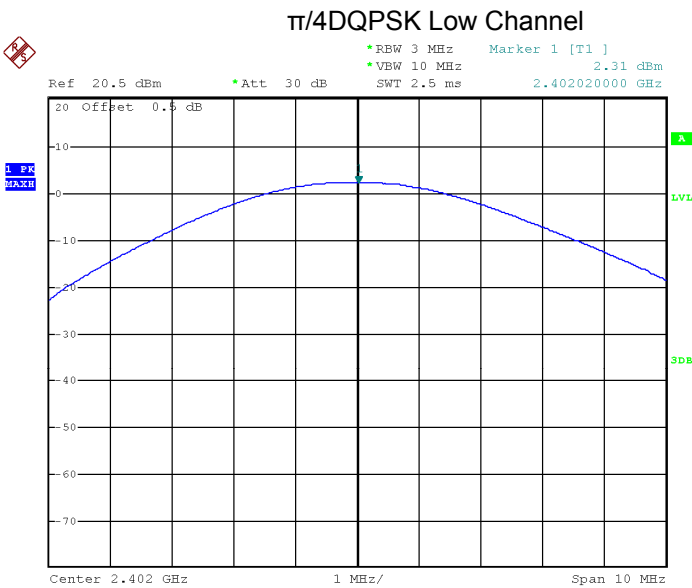


Date: 9.JUL.2026 14:59:34

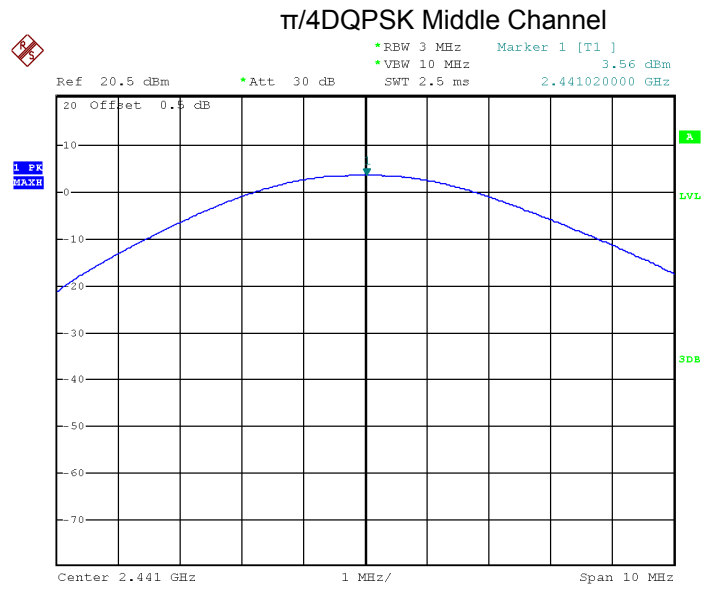


Date: 9.JUL.2026 14:58:53

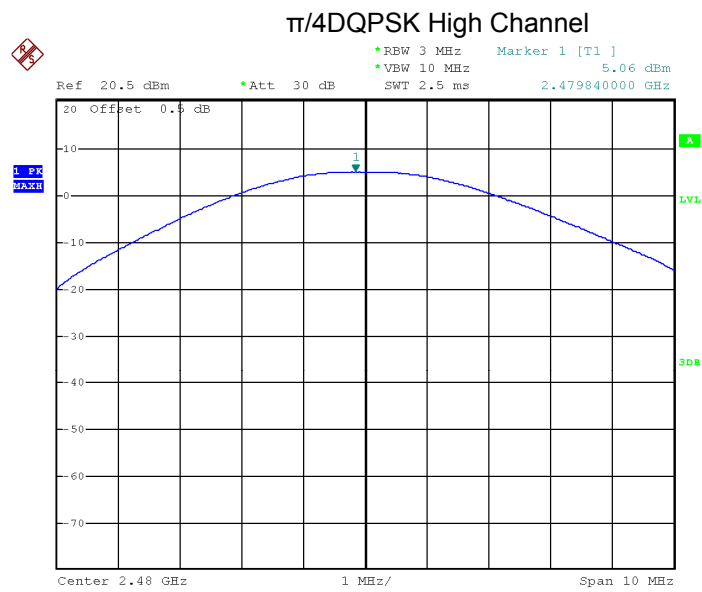


Date: 9.JUL.2026 14:58:26

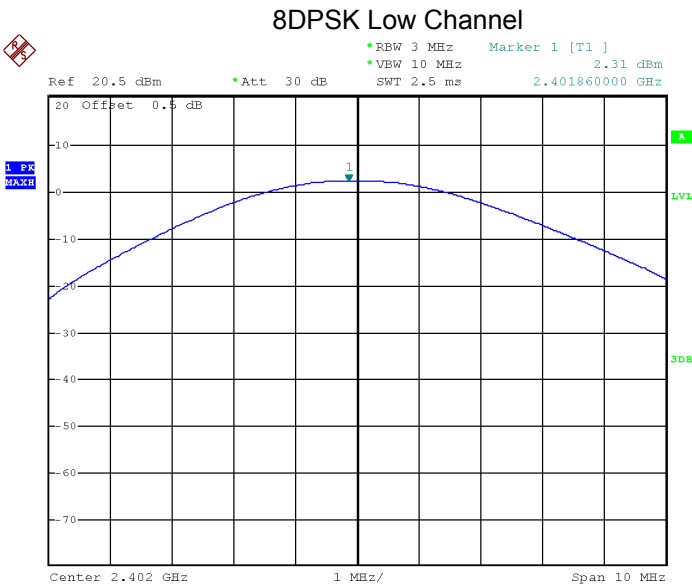

Date: 9.JUL.2026 15:00:38

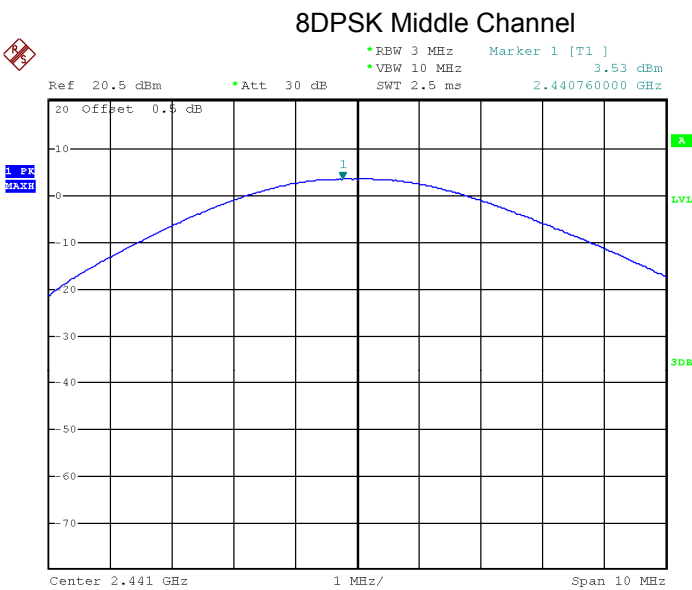

Date: 9.JUL.2026 15:01:13

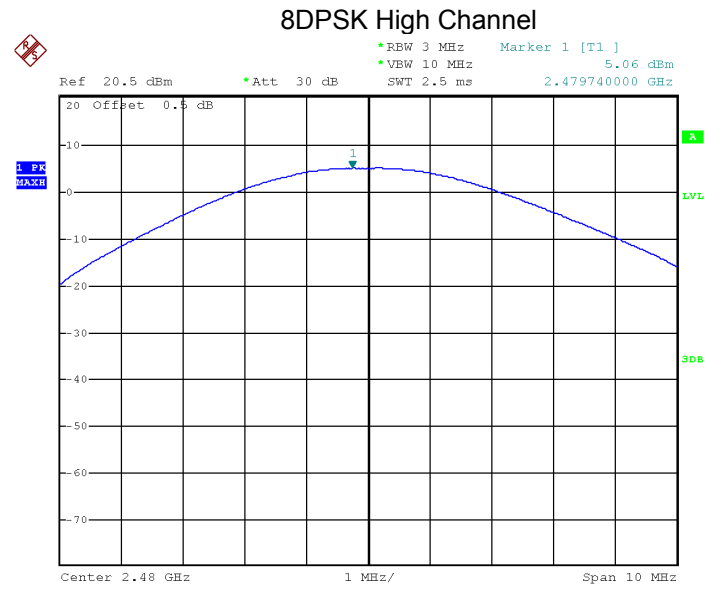

Date: 9.JUL.2026 15:03:06

12 Hopping Channel Separation

Test Requirement: FCC 47CFR Part 15 Section 15.247

Test Method: ANSI C63.10-2020

Test Limit: Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with power no greater than 0.125W.

Test Mode: Test in hopping transmitting operating mode.

12.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer:
 - a) Span: Wide enough to capture the peaks of two adjacent channels.
 - b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
 - c) Video (or average) bandwidth (VBW) $\geq$ RBW.
 - d) Sweep: Auto.
 - e) Detector function: Peak.
 - f) Trace: Max hold.
 - g) Allow the trace to stabilize.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

12.2 Test Result

Left earbud

Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.008	0.688	PASS
GFSK	Middle	1.002	0.692	PASS
GFSK	High	1.008	0.728	PASS
$\pi/4$ DQPSK	Low	1.008	0.844	PASS
$\pi/4$ DQPSK	Middle	1.002	0.840	PASS
$\pi/4$ DQPSK	High	1.008	0.836	PASS
8DPSK	Low	1.002	0.840	PASS
8DPSK	Middle	1.002	0.836	PASS
8DPSK	High	1.002	0.844	PASS


Right earbud

Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.002	0.728	PASS
GFSK	Middle	1.008	0.728	PASS
GFSK	High	1.008	0.728	PASS
$\pi/4$ DQPSK	Low	0.996	0.844	PASS
$\pi/4$ DQPSK	Middle	0.996	0.836	PASS
$\pi/4$ DQPSK	High	1.002	0.844	PASS
8DPSK	Low	1.008	0.836	PASS
8DPSK	Middle	0.996	0.836	PASS
8DPSK	High	1.002	0.836	PASS

Test plots


Left earbud

GFSK Low Channel

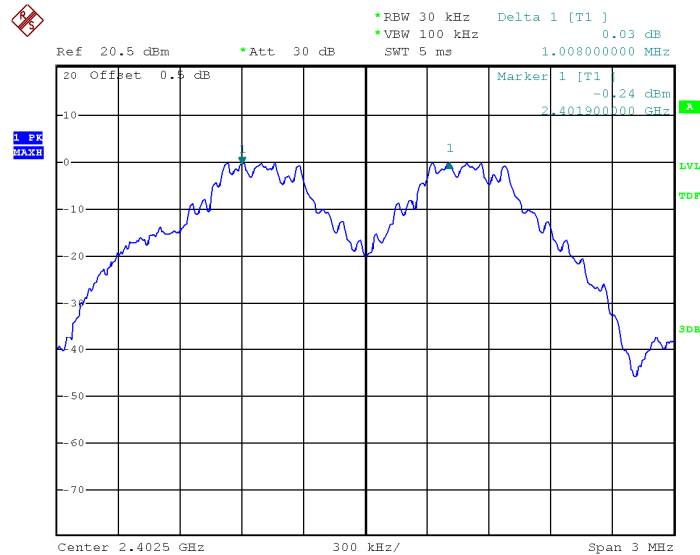


Date: 9.JUL.2026 19:27:22


GFSK Middle Channel

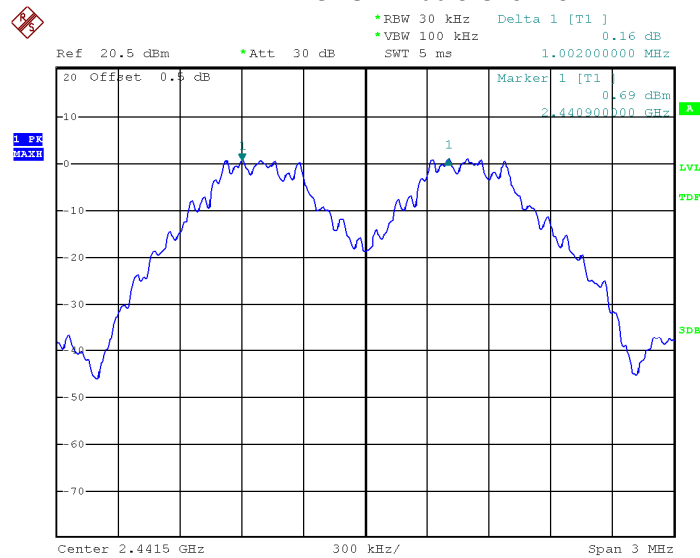


Date: 9.JUL.2026 19:28:54

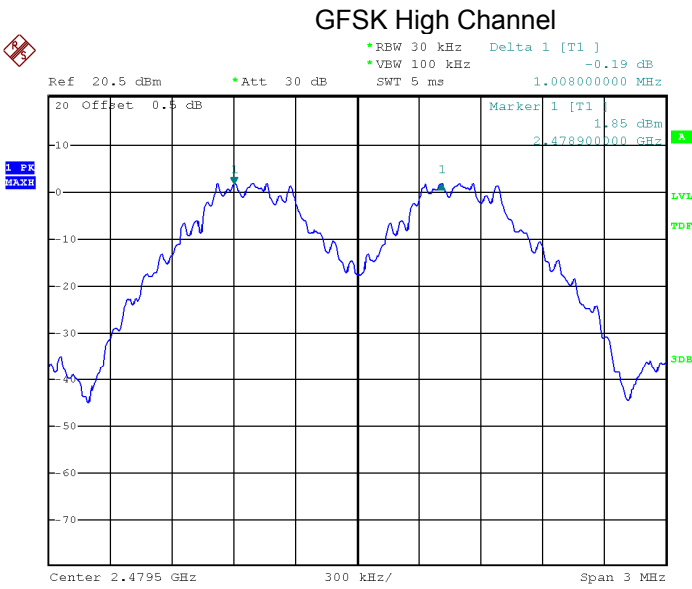


Date: 9.JUL.2026 19:29:51

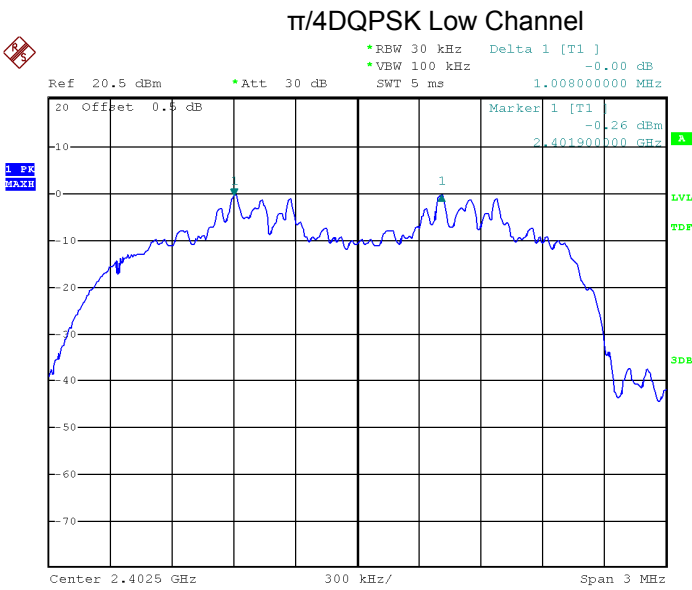


Date: 9.JUL.2026 19:23:11

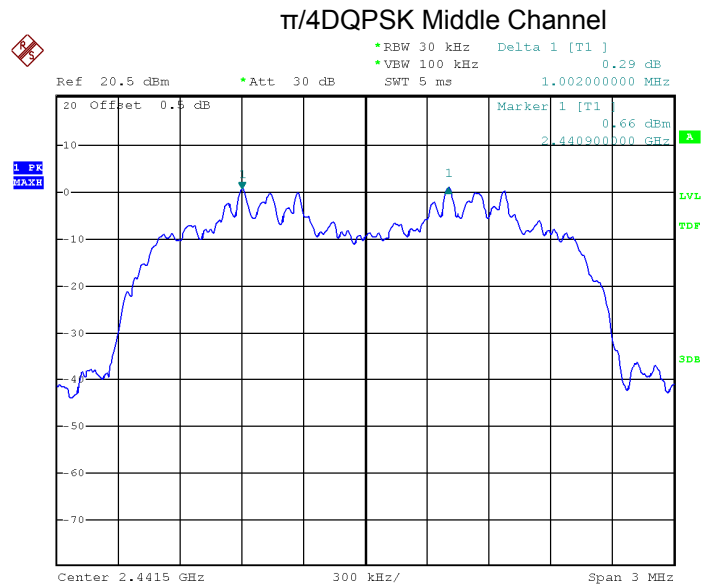


Date: 9.JUL.2026 19:20:37

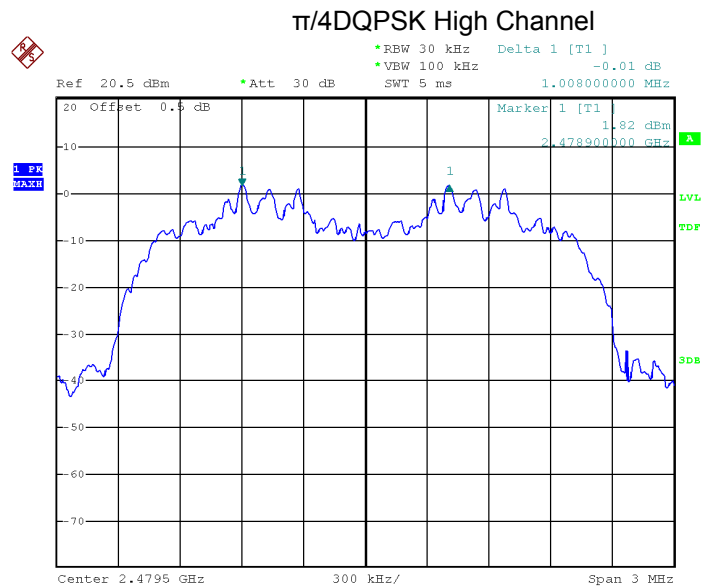


Date: 9.JUL.2026 19:18:30

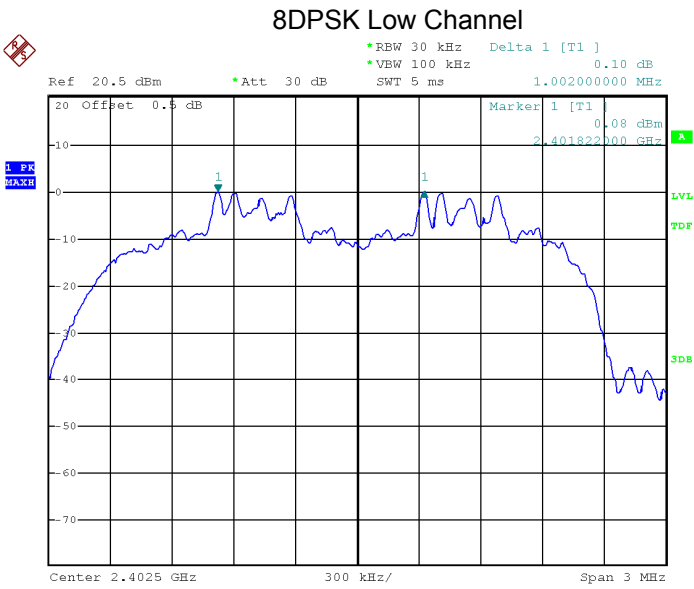

Date: 9.JUL.2026 19:05:40

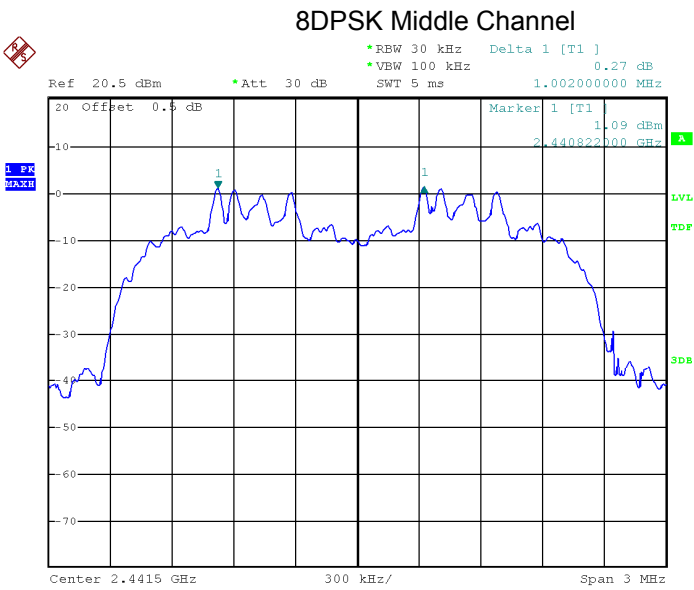


Date: 9.JUL.2026 19:08:02

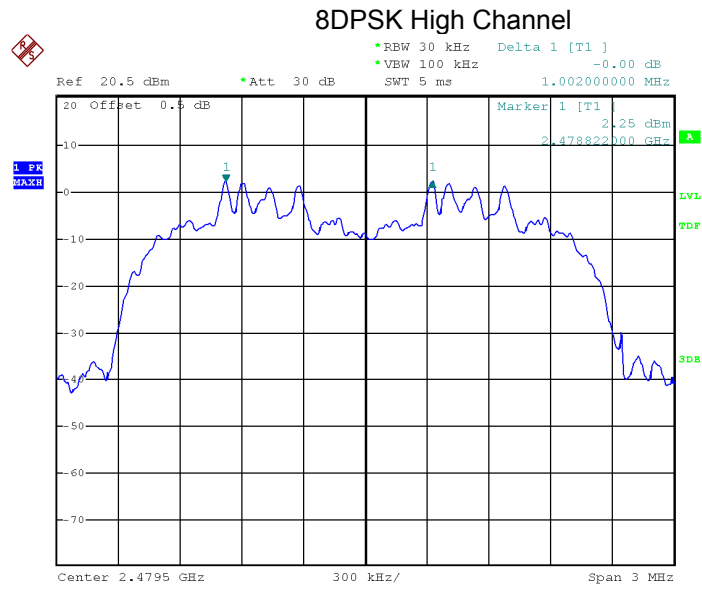

Date: 9.JUL.2026 19:16:00


Right earbud

GFSK Low Channel

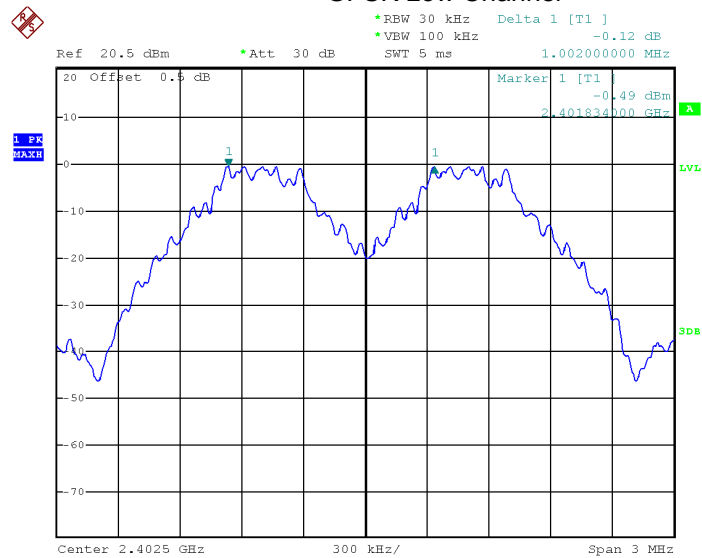


Date: 9.JUL.2026 15:56:16


GFSK Middle Channel

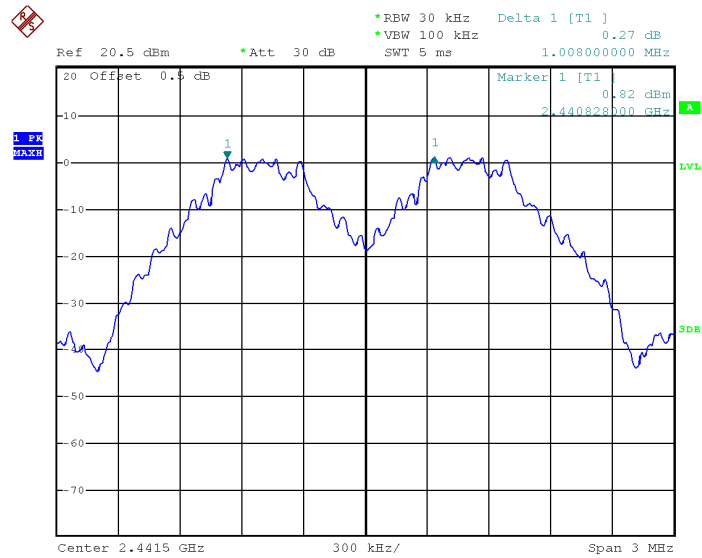


Date: 9.JUL.2026 15:53:39

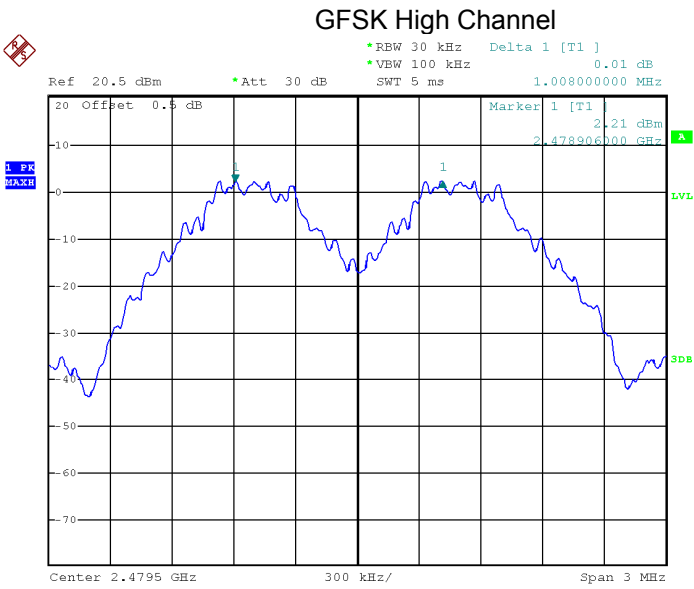


Date: 9.JUL.2026 15:51:03

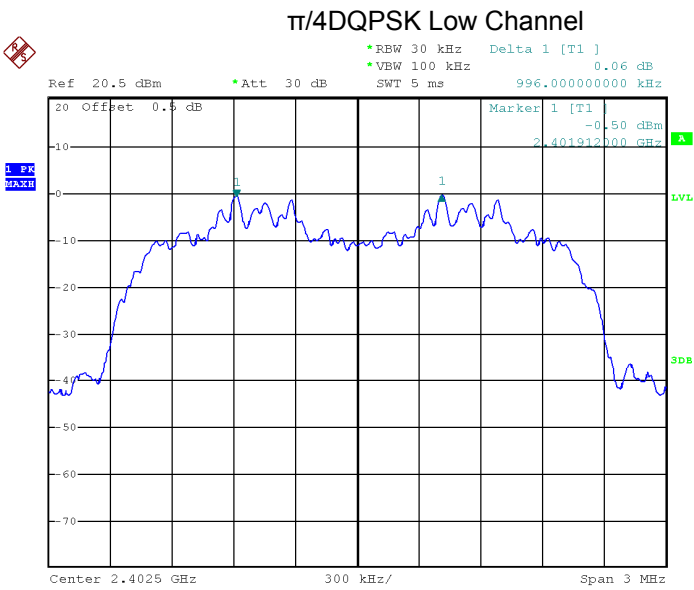


Date: 9.JUL.2026 16:01:04

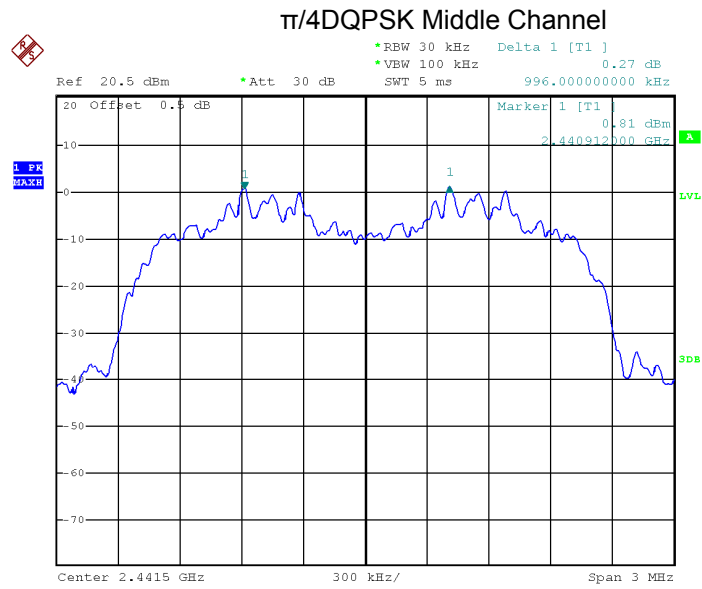


Date: 9.JUL.2026 16:02:45

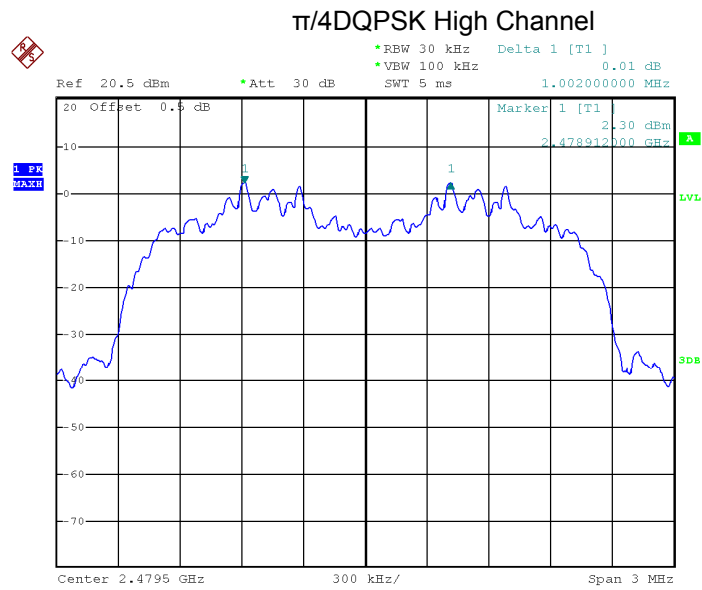


Date: 9.JUL.2026 16:06:12

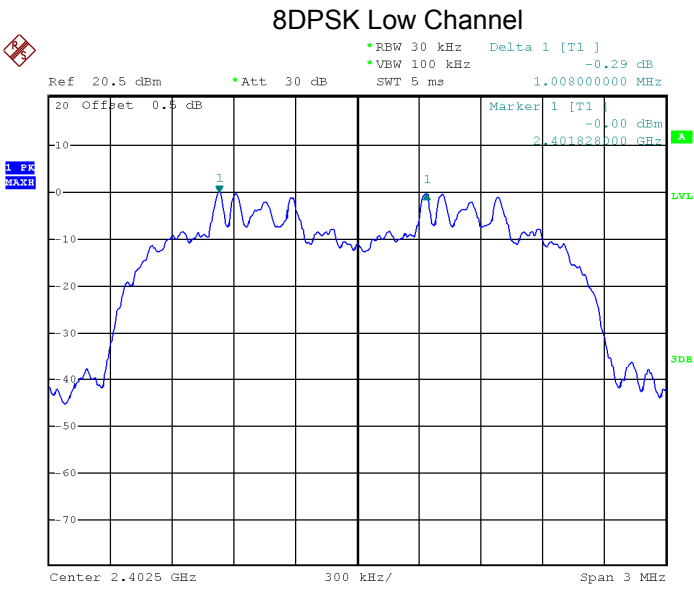

Date: 9.JUL.2026 16:14:08

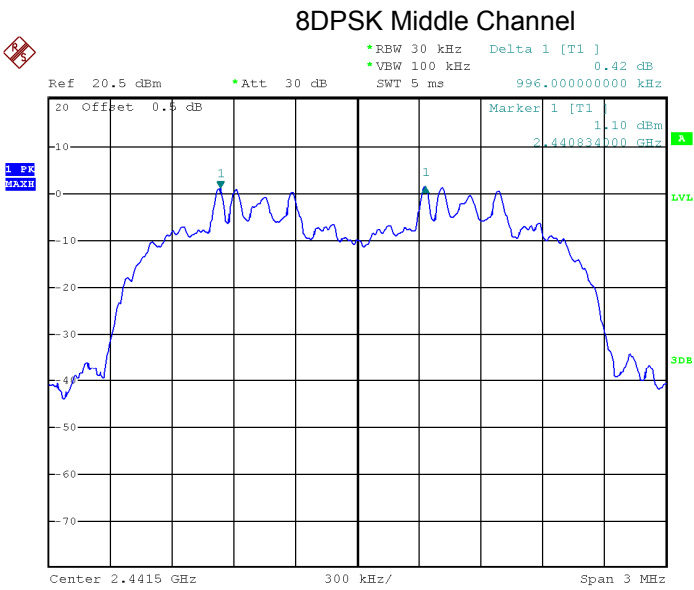

Date: 9.JUL.2026 16:12:20

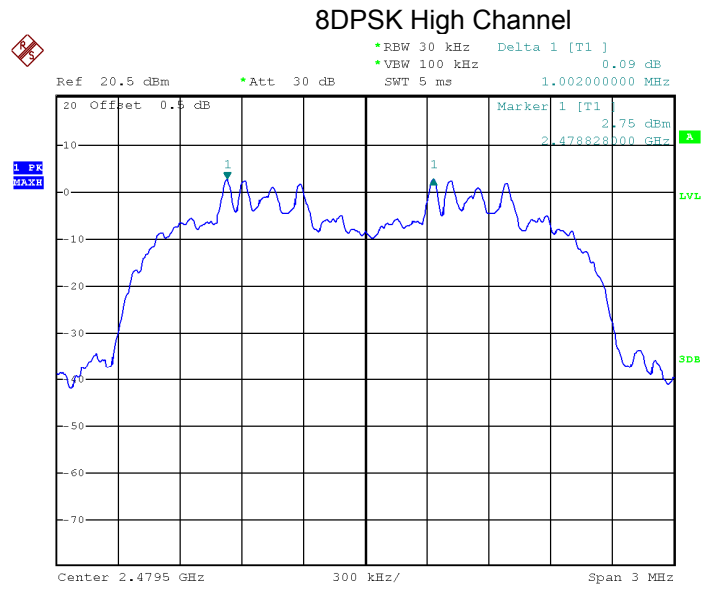

Date: 9.JUL.2026 16:08:24

13 Number of Hopping Frequency

Test Requirement: FCC 47CFR Part 15 Section 15.247

Test Method: ANSI C63.10-2020

Test Limit: Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

Test Mode: Test in hopping transmitting operating mode.

13.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer:
 - a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
 - b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
 - c) VBW $\geq$ RBW.
 - d) Sweep: Auto.
 - e) Detector function: Peak.
 - f) Trace: Max hold.
 - g) Allow the trace to stabilize..
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;


13.2 Test Result

Test Plots:

79 Channels in total


Left earbud

GFSK

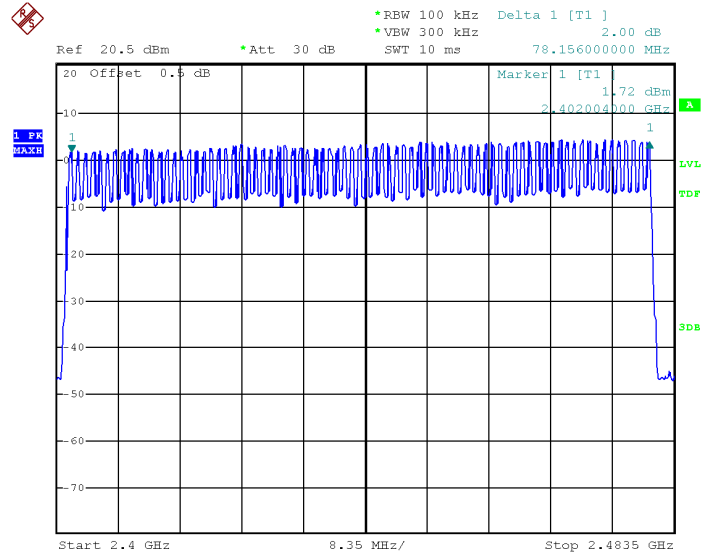


Date: 9.JUL.2026 19:55:54


$\pi/4$ DQPSK

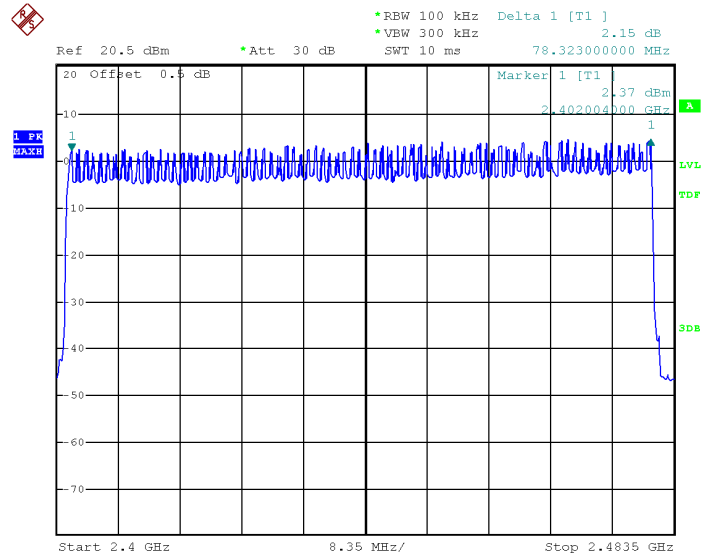


Date: 9.JUL.2026 20:01:01

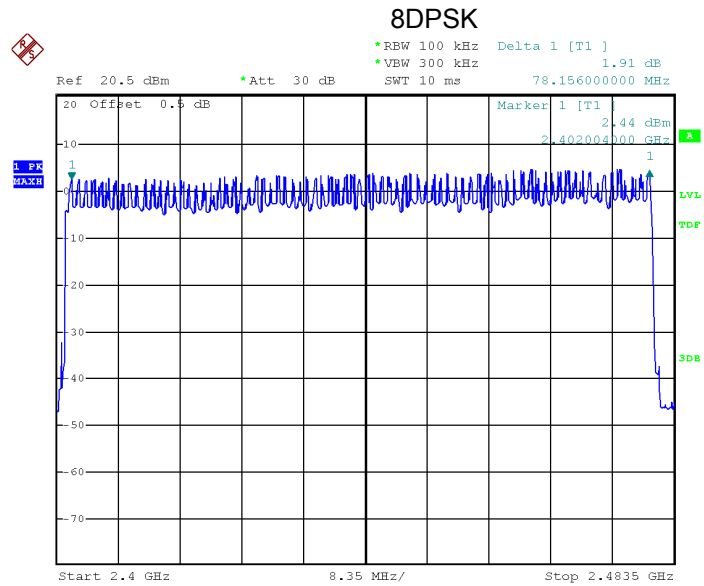


Date: 9.JUL.2026 20:06:01

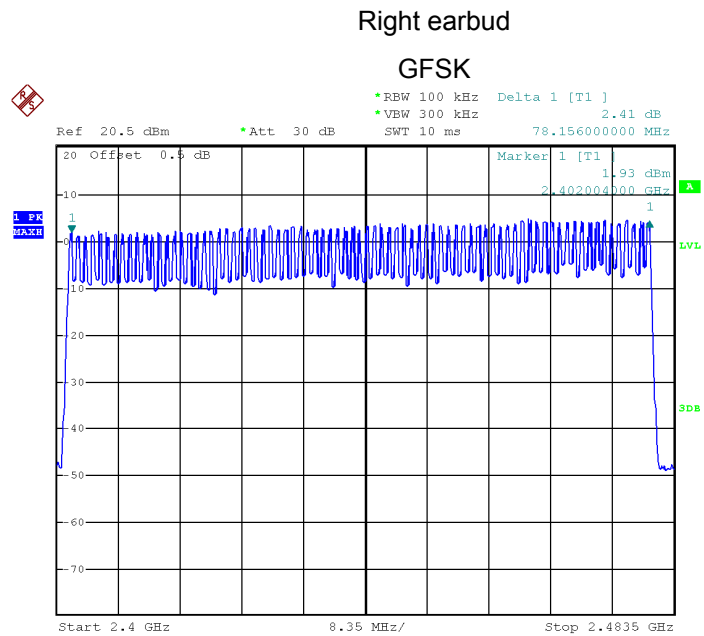

Date: 9.JUL.2026 16:55:06

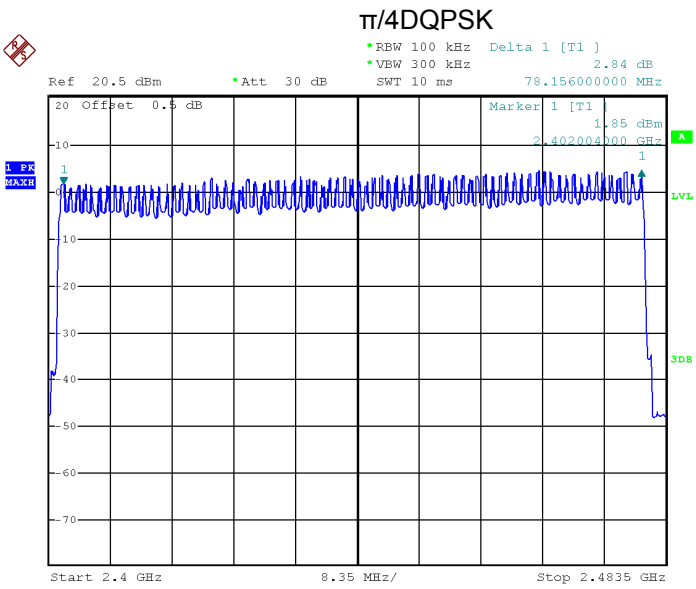

Date: 9.JUL.2026 16:53:22

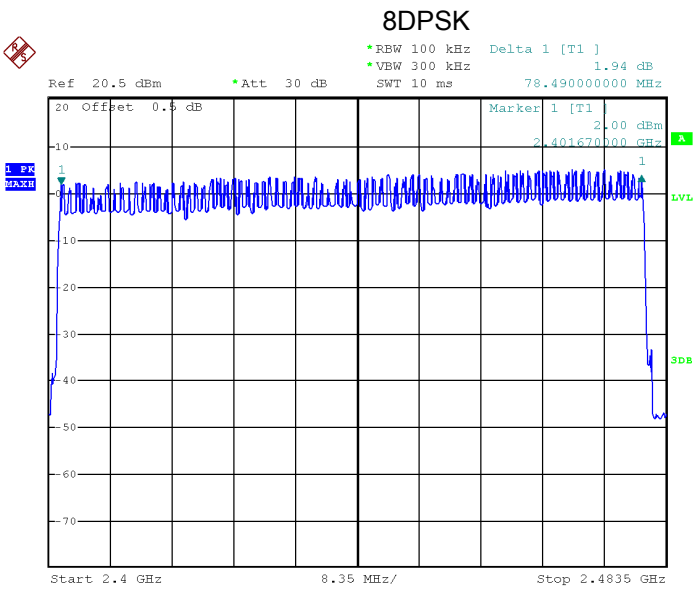

Date: 9.JUL.2026 16:47:13

14 Dwell Time

Test Requirement: FCC 47CFR Part 15 Section 15.247

Test Method: ANSI C63.10-2020

Test Limit: Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Mode: Test in hopping transmitting operating mode.

14.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

14.2 Test Result

DH5 Packet permit maximum $1600 / 79 / 6$ hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum $1600 / 79 / 4$ hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum $1600 / 79 / 2$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

Data Packet	Dwell Time(s)
DH5	$1600/79/6*0.4*79*(MkrDelta)/1000$
DH3	$1600/79/4*0.4*79*(MkrDelta)/1000$
DH1	$1600/79/2*0.4*79*(MkrDelta)/1000$
Remark: Mkr Delta is once pulse time.	

Left earbud

Modulation	Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	DH5	Low	2.900	0.309	0.4
		middle	2.900	0.309	0.4
		High	2.920	0.311	0.4
$\pi/4$ DQPSK	2DH5	Low	2.900	0.309	0.4
		middle	2.900	0.309	0.4
		High	2.900	0.309	0.4
8DPSK	3DH5	Low	2.920	0.311	0.4
		middle	2.920	0.311	0.4
		High	2.900	0.309	0.4


Right earbud

Modulation	Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	DH5	Low	2.900	0.309	0.4
		middle	2.900	0.309	0.4
		High	2.920	0.311	0.4
$\pi/4$ DQPSK	2DH5	Low	2.920	0.311	0.4
		middle	2.920	0.311	0.4
		High	2.920	0.311	0.4
8DPSK	3DH5	Low	2.920	0.311	0.4
		middle	2.920	0.311	0.4
		High	2.920	0.311	0.4


Remark: Only the worst-case mode DH5, 2DH5 and 3DH5 were recorded.

Test Plots


Left earbud

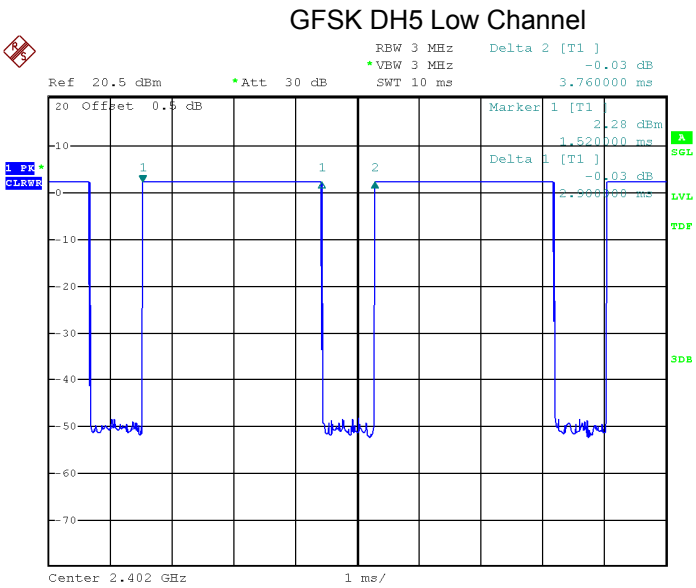


Date: 9.JUL.2026 18:56:55

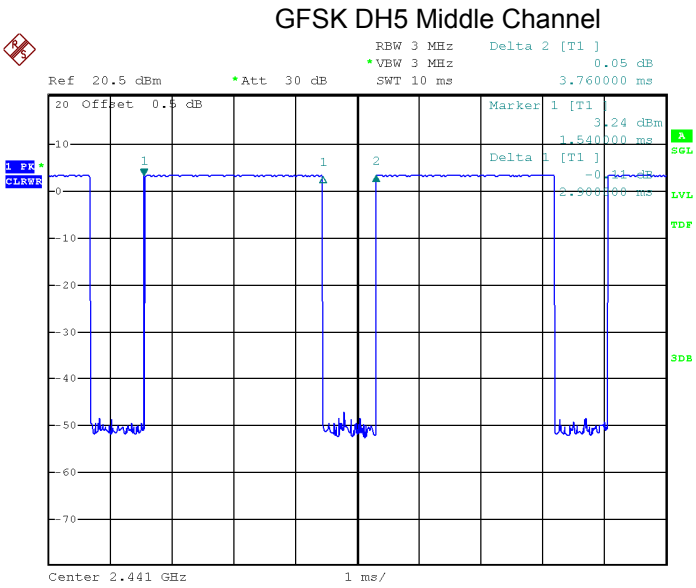


Date: 9.JUL.2026 18:56:28

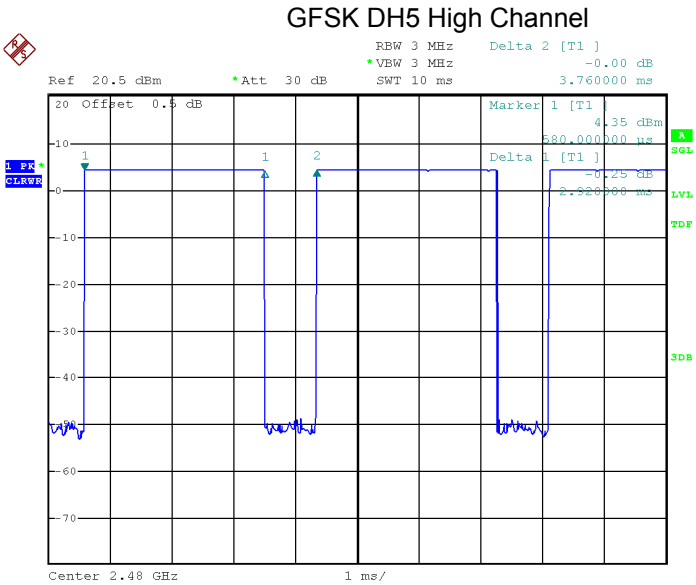


Date: 9.JUL.2026 18:55:22

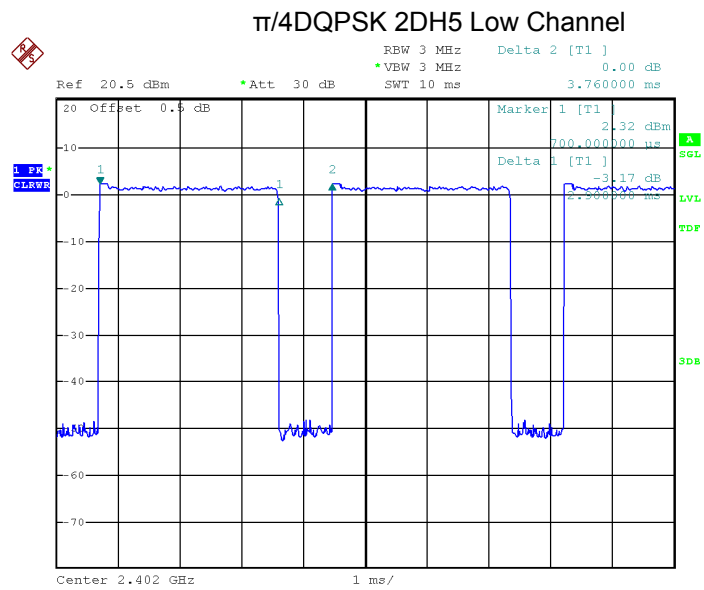


Date: 9.JUL.2026 18:57:42

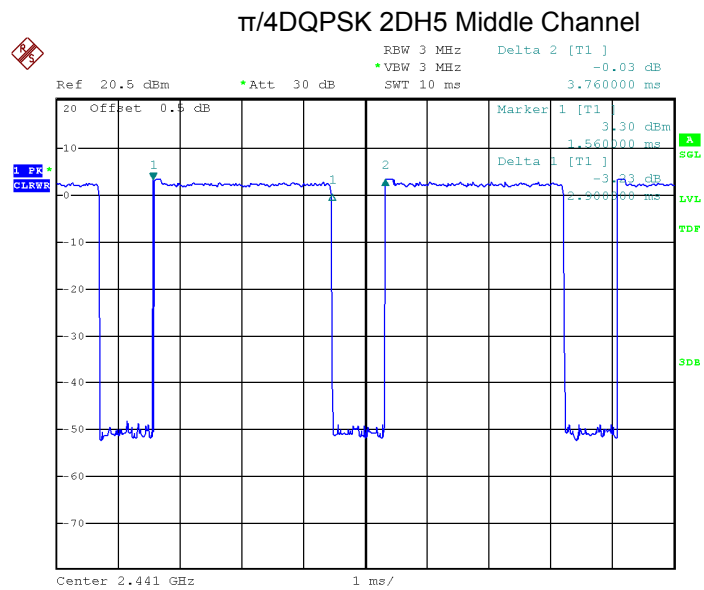


Date: 9.JUL.2026 18:58:13

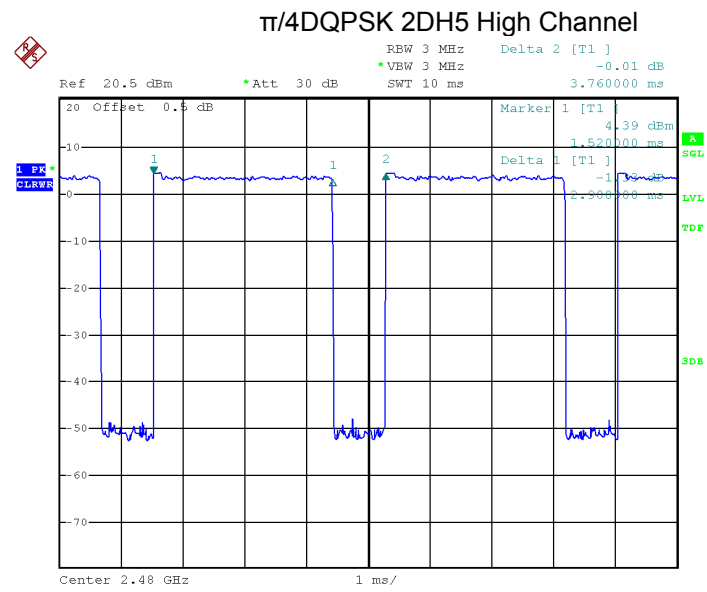


Date: 9.JUL.2026 18:58:46

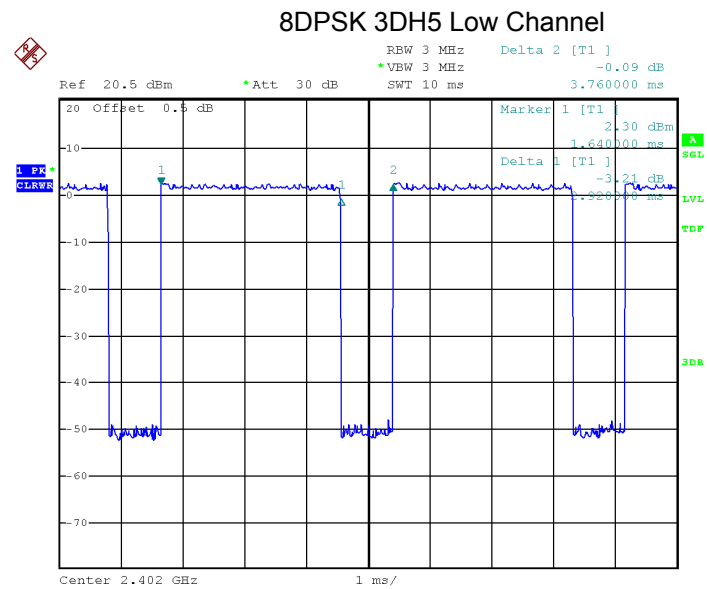


Date: 9.JUL.2026 19:00:42

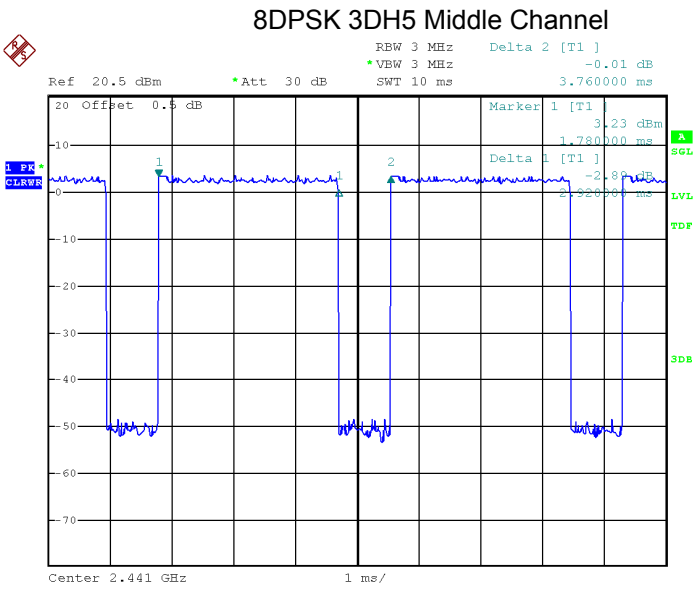


Date: 9.JUL.2026 19:00:06

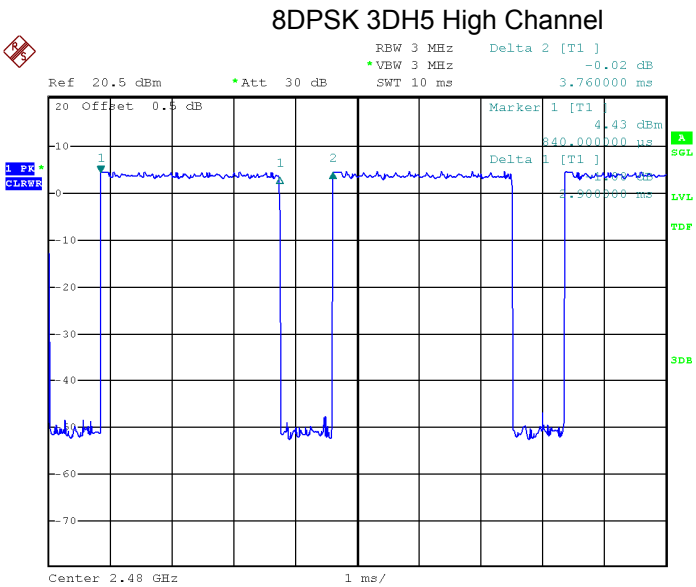


Date: 9.JUL.2026 18:59:19

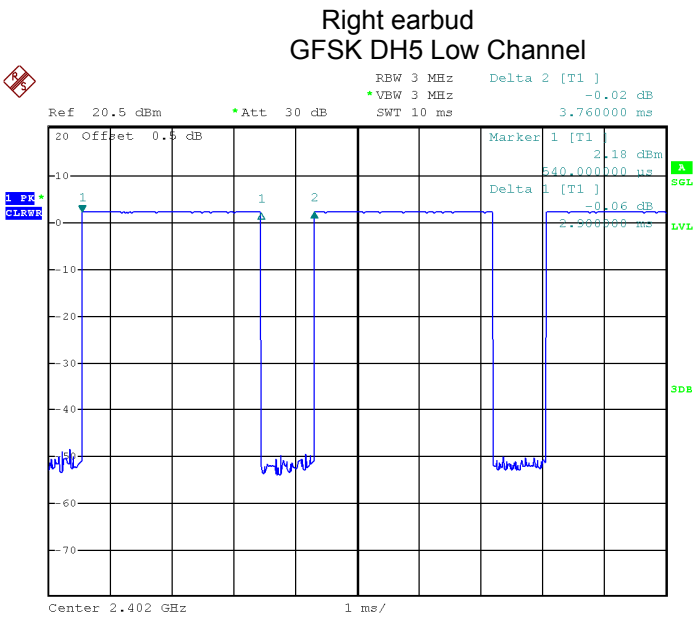


Date: 9.JUL.2026 15:47:36

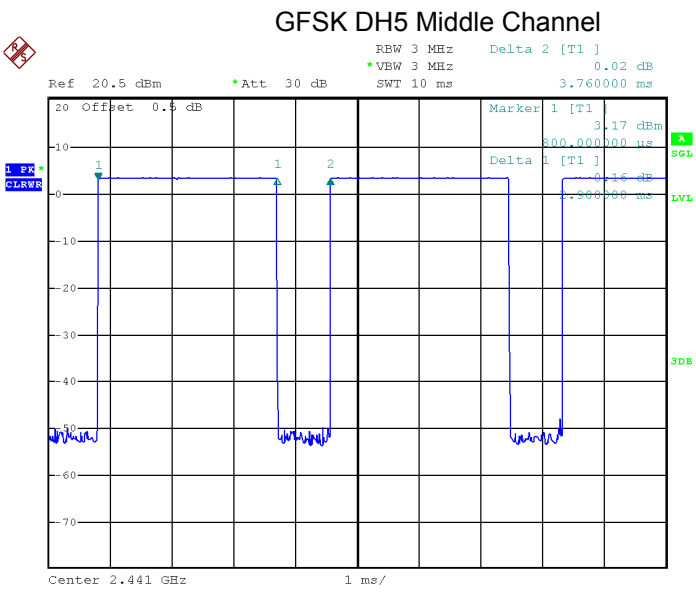


Date: 9.JUL.2026 15:48:11

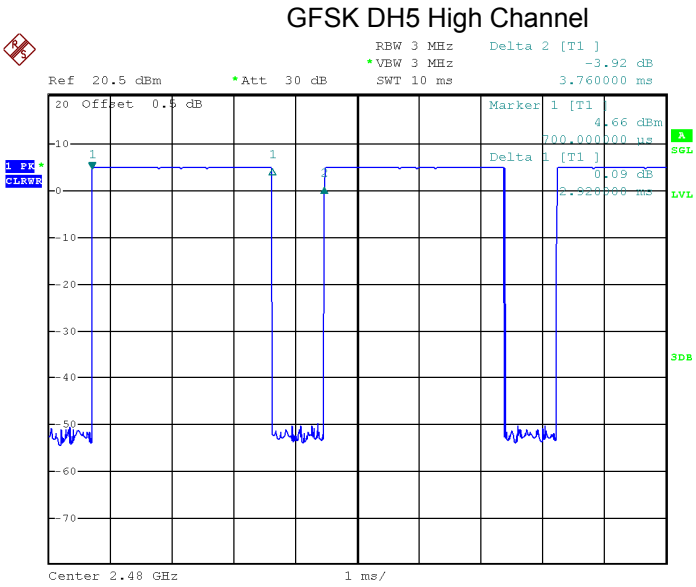


Date: 9.JUL.2026 15:48:50

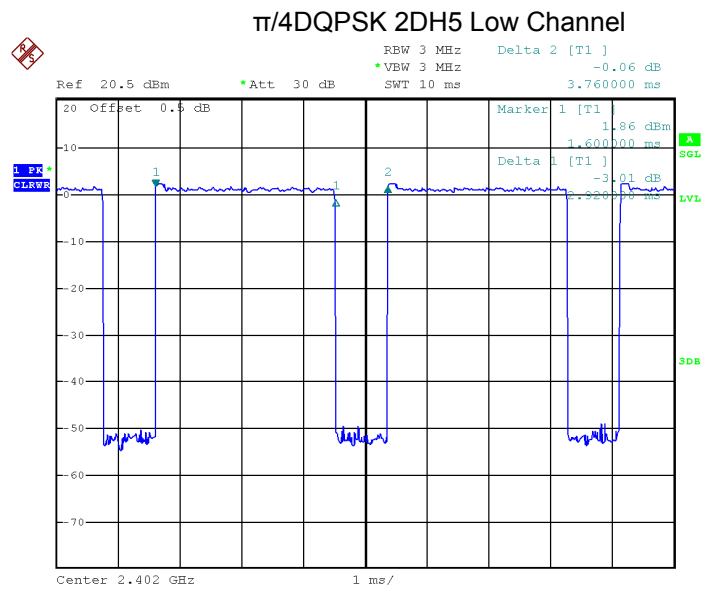


Date: 9.JUL.2026 15:47:01

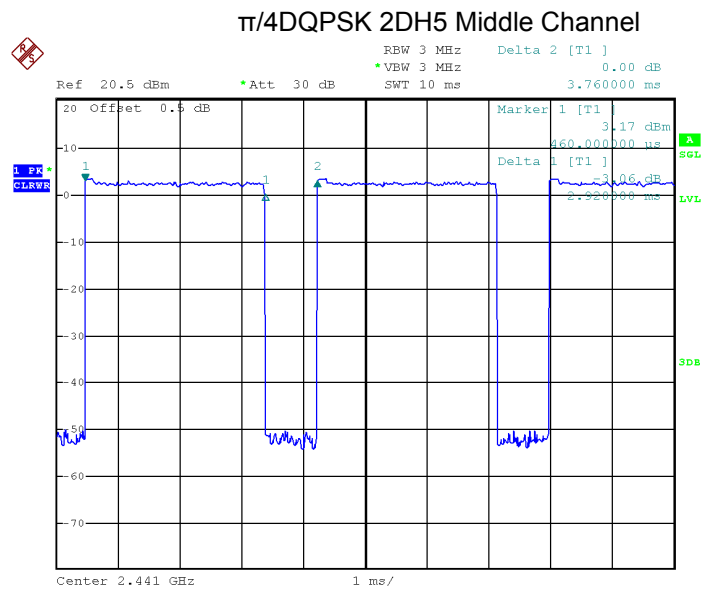


Date: 9.JUL.2026 15:46:30

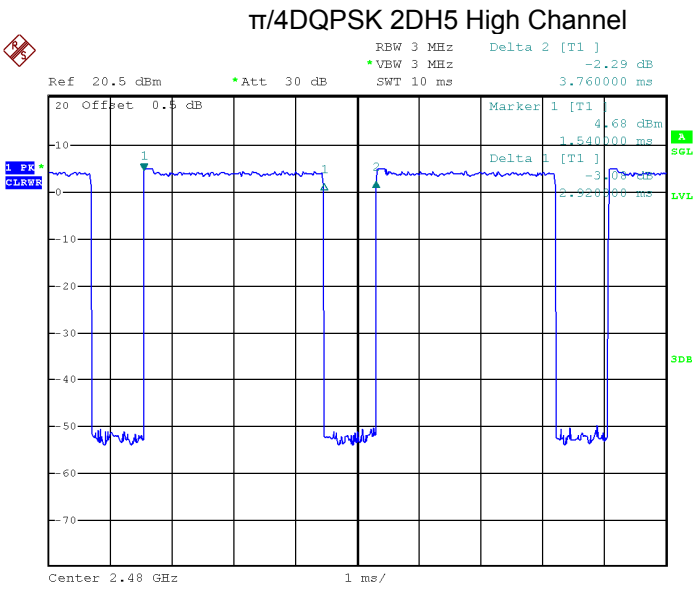


Date: 9.JUL.2026 15:45:48

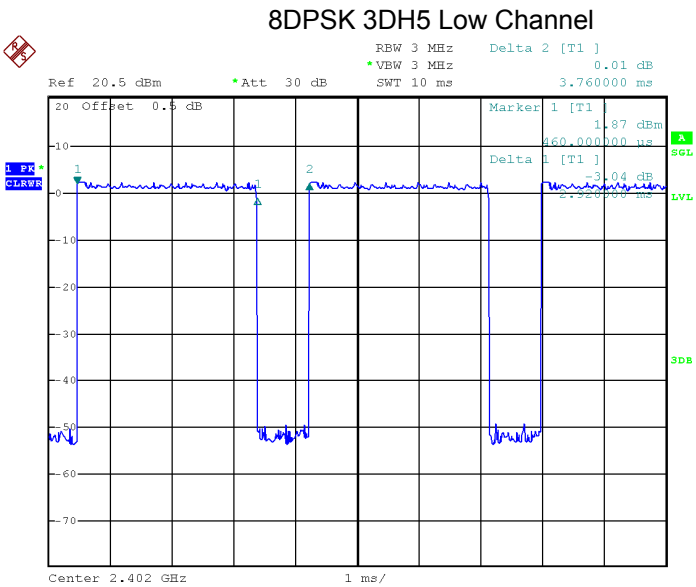

Date: 9.JUL.2026 15:43:05

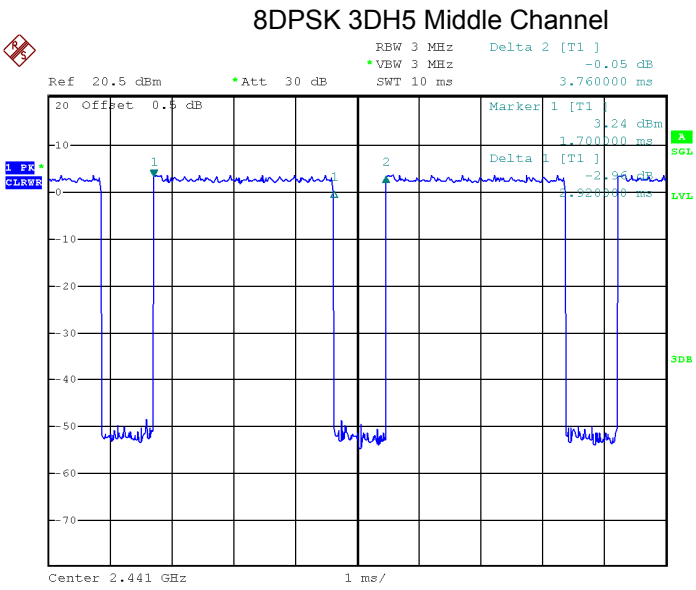

Date: 9.JUL.2026 15:44:15

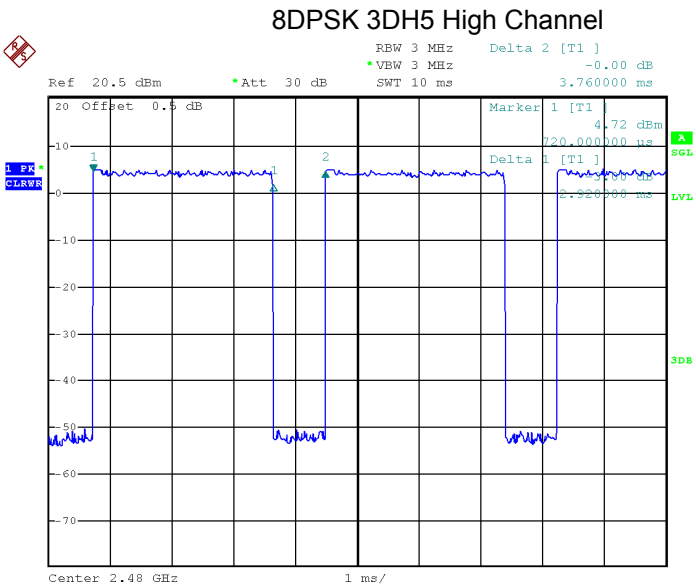

Date: 9.JUL.2026 15:45:08

15 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna, fulfil the requirement of this section.

Note: Please refer to EUT photos for more details.

16 RF Exposure

Remark: refer to MPE test report: WTF26D04119695W003.

17 Photographs of test setup and EUT.

Note: Please refer to appendix: Appendix-HA-B7T-Photos.

=====End of Report=====