



承 认 书

SPECIFICATION FOR APPROVAL

客户名称 Customer Name	ZHUHAI LTECH TECHNOLOGY CO. , LTD.		
客户项目名 Customer Project Name	RT-PCB004-2	顺达成项目名 SDC Project Name	RT-PCB004-2
客户编码 Customer P/N		顺达成料号 SDC P/N	WF2006B-1131R-200(白)
频段 Band	WIFI2. 4G/BT		
版本号 Version	A0		
设计人信息/Designer Information			
射频工程师 RF Engineer		研发主管 R&D Diretor	
结构工程师 ME Engineer			

审批/ Approval			客户批准/Customer Approval		
	制作 Prepared By	审核 Checked By	批准 Approval By	审核 Checked By	批准 Approval By
签章 Signature					
日期 Date	2025. 07. 04	2025. 07. 04	2025. 07. 04		

修订履历/Change Log				
版本 Version	修订内容 Change Description	责任人 Person in Charge	核准 Approval By	日期 Date



目录/Catalogue


序号 No.	项目 Item	页码 Page No.
1	图纸或实物图片 Drawing or Product Image	3
2	尺寸测量报告 Dimensions Test Report	4
3	射频性能测试报告 RF Performance Test Report	5-8
4	可靠性测试报告 Reliability Test Report1	9
5	包装文件 Package Document	10
6	环境有害物质管控一览表 RoHS Control list for Sample	11
7	安装事宜或其它 Install Wizard or Other	11



深圳市顺达成科技有限公司
SHUN DA CHENG TECHNOLOGY CO., LTD

产品图纸或实物图片

Drawing or Product Image

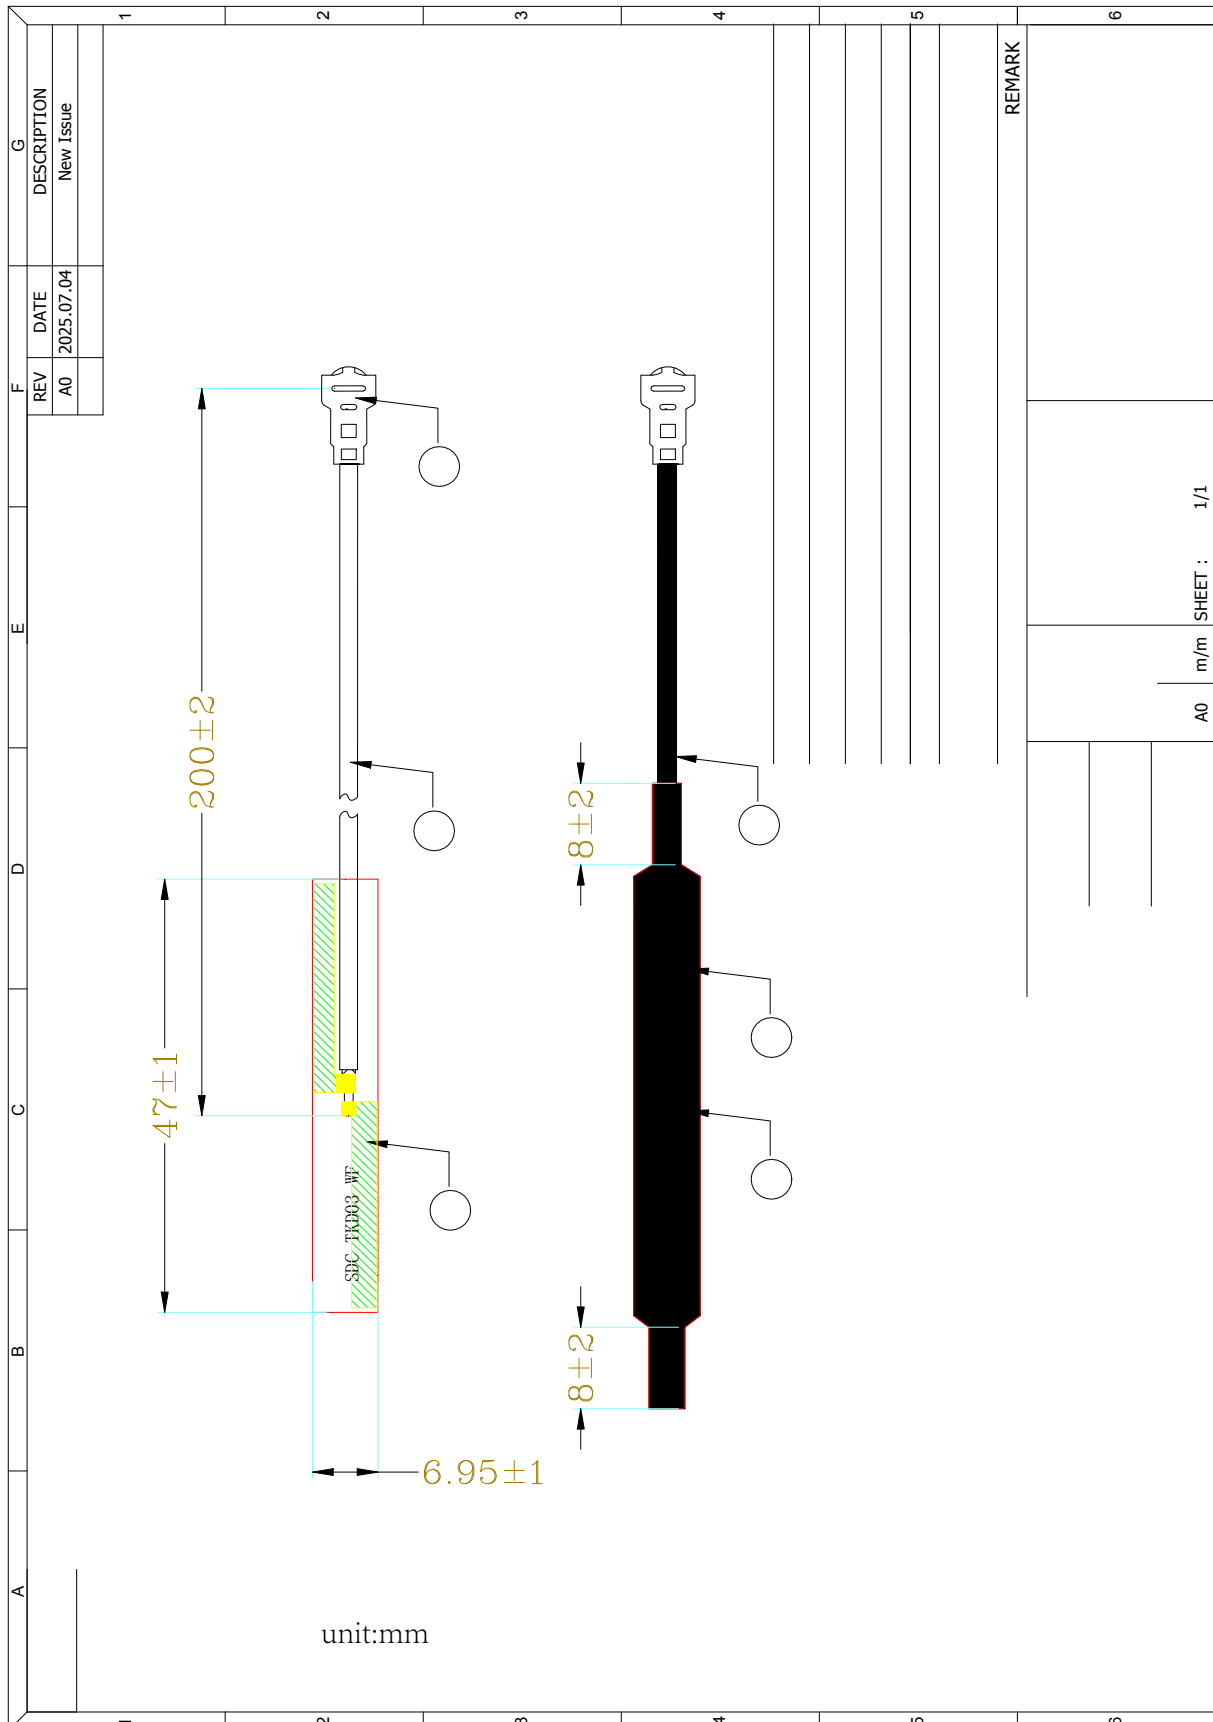



样品尺寸测量报告

Sample Dimensions Test Report

测试日期 Test Date	2025. 07. 04	样品数量 Sample Qty.	3	测试人 Inspector	许燕芳
尺寸编号 Dimension No.	标准 Standard	样品 1 Sample 1	样品 2 Sample 2	样品 3 Sample 3	Pass/NG
①Length	47±1mm	47	47.2	47	Pass
②Width	6.95±1mm	7	7.2	7	Pass
③Thickness	0.6±0.05mm	0.6	0.6	0.6	Pass
④Cable length	200±2mm	200	201	201	Pass
最终结论 Conclusion					PASS
测试人&日期 Inspector & Date			批准&日期 Approval & Date		



射频性能测量报告

RF Performance Test Report

天线测试设备简介

Antenna Test Equipment Introduction

测试天线输入特性使用 **Agilent E5071C and Agilent 5062A** 矢量网络分析仪；辐射特性利用广屏三维近场暗室进行测试，并分别使用 8960 E5515 和 Agilent E4438C 进行了分析。暗房的测试坐标如下：

Test of antenna input characteristics using **Agilent E5071C and Agilent 5062A** vector network analyzer; The radiation pattern of the antenna are tested using the guangping 3D near field Anechoic Chamber, and the instrument is used to agilent8960 E5515 and Agilent E4438C. The test coordinates of the darkroom are as follows:

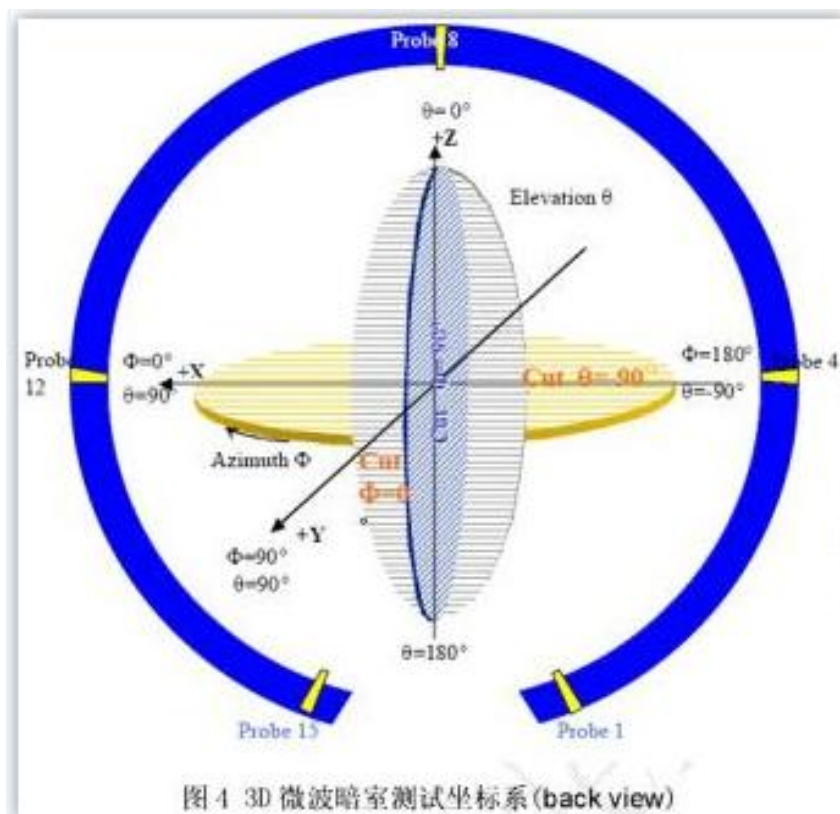


图4 3D 微波暗室测试坐标系 (back view)


1. S11 参数测量/S11 Parameter-VSWR

使用一根 50Ω 同轴电缆连接到天线，然后该电缆连接到网络分析仪测量 S11 参数，被测量产品远离金属至少 20 厘米。

Measuring Method is a 50Ω coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the S11 parameter, Keeping this fixture away from metal at least 20cm.




S11 Parameter-VSWR

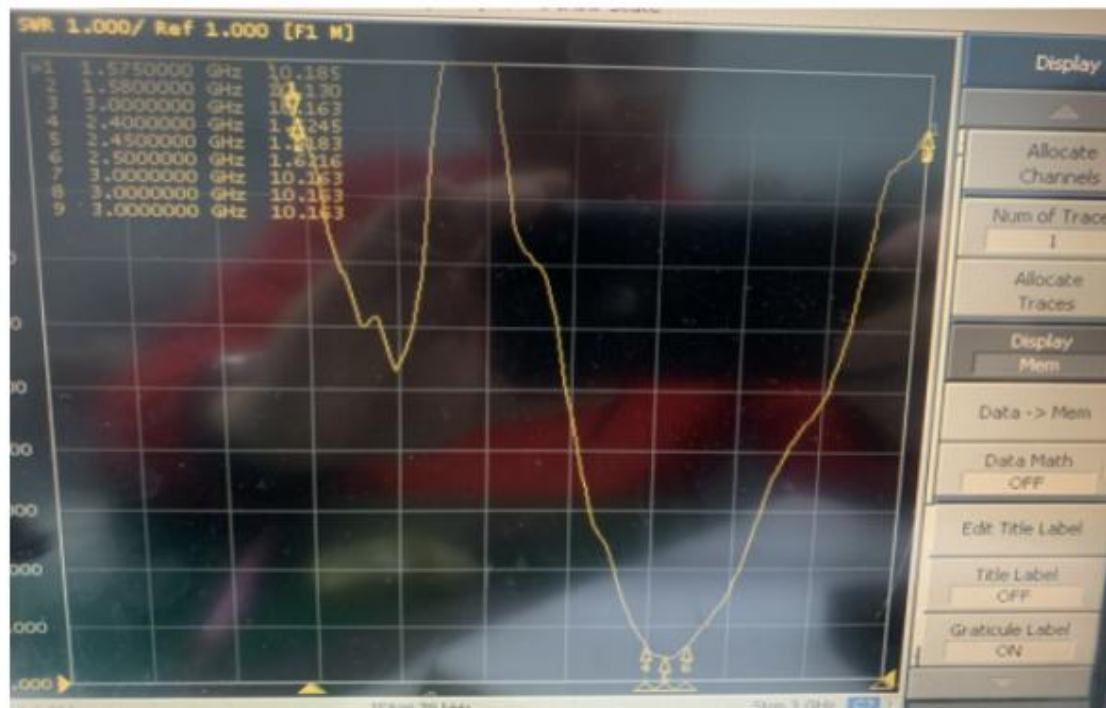

Frequency(MHz)	2400	2450	2500
VSWR	1.62	1.31	1.62

2. 天线匹配网络/Antenna Matching Network

Antenna

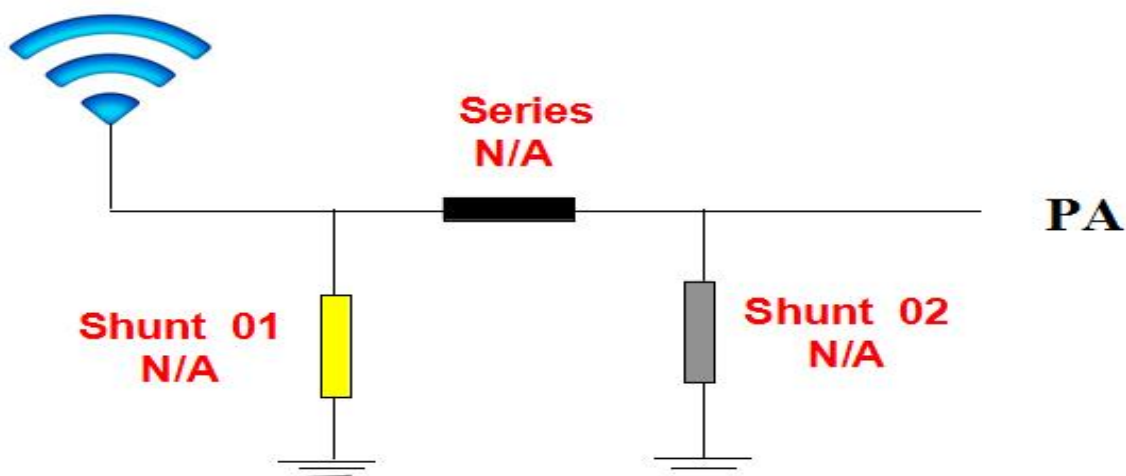



3.Gain & Efficiency

WIFI Frequency (MHz)	Efficiency (%)	Peak GAIN (dBi)
2400	45.78	1.71
2450	44.96	2.11
2500	45.59	1.53

