

**Shenzhen Global Test Service Co.,Ltd.**

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

RF Exposure evaluation**Report Reference No. :** GTS20251231004-2-07**FCC ID. :** 2AYD5-I25D04

Compiled by


(position+printed name+signature): File administrators Peter Xiao

Supervised by

(position+printed name+signature): Test Engineer Evan Ouyang

Approved by

(position+printed name+signature) : Manager Jason Hu

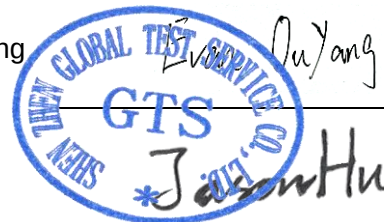

Date of issue : Apr.09, 2026

Representative Laboratory Name Shenzhen Global Test Service Co.,Ltd.

..... :

Address

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

Applicant's name..... : Imin Technology Pte Ltd

Address : 11 Bishan Street 21 #03-05 Singapore 573943

Test specification :

Standard..... : 47CFR §1.1310 Basis and purpose

47CFR §2.1091 Radiofrequency radiation exposure evaluation: mobile devices

TRF Originator : Shenzhen Global Test Service Co.,Ltd.

Master TRF : Dated 2014-12

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description : POS Device

Trade Mark



Manufacturer : Imin Technology Pte Ltd

Model/Type reference : I25D04

Listed Models : N/A

Hardware Version : 185*76*1.6mm\DS3-61_CM1_V1.1

Software Version..... : 1.0.0.10.53_GMS_260409

Rating : DC 24V/2.5A by Adapter

Result : **PASS**

TEST REPORT

Test Report No. :	GTS20251231004-2-07	Apr.09, 2026
		Date of issue

Equipment under Test : POS Device

Model /Type : I25D04

Listed model : N/A

Applicant : **Imin Technology Pte Ltd**

Address : 11 Bishan Street 21 #03-05 Singapore 573943

Manufacturer : **Imin Technology Pte Ltd**

Address : 11 Bishan Street 21 #03-05 Singapore 573943

Test Result:	PASS
--------------	------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1. SUMMARY 4

1.1 EUT CONFIGURATION..... 4

1.2 PRODUCT DESCRIPTION 4

2. TEST ENVIRONMENT 7

2.1 ADDRESS OF THE TEST LABORATORY 7

2.2 TEST FACILITY 7

2.3 ENVIRONMENTAL CONDITIONS 7

2.4 STATEMENT OF THE MEASUREMENT UNCERTAINTY 7

3. METHOD OF MEASUREMENT 8

3.1 APPLICABLE STANDARD..... 8

3.2 REQUIREMENT 8

3.3LIMIT 8

3.4 MPE CALCULATION METHOD..... 9

3.5 ANTENNA INFORMATION 9

4. CONDUCTED POWER RESULTS..... 10

5. MANUFACTURING TOLERANCE 20

6. MEASUREMENT RESULTS 35

6.1 STANDALONE MPE EVALUATION..... 35

6.2 SIMULTANEOUS TRANSMISSION MPE 40

7. CONCLUSION 41

1. SUMMARY

1.1 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - supplied by the lab

●	/	M/N:	/
		Manufacturer:	/

1.2 Product Description

Product Name:	POS Device
Trade Mark:	
Model/Type reference:	I25D04
List Model:	N/A
Model Declaration	N/A
Power supply:	DC 24V/2.5A by Adapter
Hardware Version	185*76*1.6mm\DS3-61_CM1_V1.1
Software Version	1.0.0.10.53_GMS_260409
Sample ID	GTS20251231004-2-S001-1# GTS20251231004-2-S001-2#
Bluetooth	
Frequency Range	2402MHz ~ 2480MHz
Channel Number	79 channels for Bluetooth (DSS) 40 channels for Bluetooth (DTS)
Channel Spacing	1MHz for Bluetooth (DSS) 2MHz for Bluetooth (DTS)
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8DPSK for Bluetooth (DSS) GFSK for Bluetooth (DTS)
2.4GWLAN	
WLAN Operation frequency	IEEE 802.11b:2412-2462MHz IEEE 802.11g:2412-2462MHz IEEE 802.11n HT20:2412-2462MHz IEEE 802.11n HT40:2422-2452MHz IEEE 802.11ax HE20:2412-2462MHz IEEE 802.11ax HE40:2422-2452MHz
WLAN Modulation Type	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax HE20: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax HE40: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
Channel number:	11 Channel for IEEE 802.11b/g/n/ax (HT20) 7 Channel for IEEE 802.11n/ax (HT40)
Channel separation:	5MHz
5GWLAN(5.2G/5.3G/5.7G/5.8G Band)	
WLAN Operation frequency	5180MHz -5240MHz/ 5260MHz to 5320MHz/ 5500MHz to 5700MHz/ 5745MHz to 5825MHz
WLAN Modulation Type	IEEE 802.11a: OFDM(64QAM, 16QAM, QPSK, BPSK)

	IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ac VHT20: OFDM (256QAM,64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ax HE20: OFDMA (1024QAM,256QAM,64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ac VHT40: OFDM (256QAM,64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ax HE40: OFDMA (1024QAM,256QAM,64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ac VHT80: OFDM (256QAM,64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ax HE80: OFDMA (1024QAM,256QAM,64QAM, 16QAM, QPSK,BPSK)		
Channel number:	4 Channels for 20MHz bandwidth(5180-5240MHz) 4 Channels for 20MHz bandwidth(5260-5320MHz) 11 Channels for 20MHz bandwidth(5500-5700MHz) 5 channels for 20MHz bandwidth(5745-5825MHz) 2 channels for 40MHz bandwidth(5190~5230MHz) 2 channels for 40MHz bandwidth(5270~5310MHz) 5 Channels for 40MHz bandwidth(5510-5670MHz) 2 channels for 40MHz bandwidth(5755~5795MHz) 1 channels for 80MHz bandwidth(5210MHz) 1 channels for 80MHz bandwidth(5290MHz) 2 Channels for 80MHz bandwidth(5530-5610MHz) 1 channels for 80MHz bandwidth(5775MHz)		
Antenna Description	Two Internal antenna respectively. WLAN support 2*2MIMO technology. ANT1 used for BT&WIFI TX/RX, 5.00 dBi(Max.) for 2.4G Band and 6.78 dBi(Max.) for 5G Band ANT2 used for WIFI TX/RX, 5.00 dBi(Max.) for 2.4G Band and 6.78 dBi(Max.) for 5G Band		
6GWLAN			
WLAN Operation frequency	5925MHz -6425MHz/ 6425MHz to 6525MHz/ 6525MHz to 6875MHz/ 6875MHz to 7125MHz		
WLAN Modulation Type	IEEE 802.11ac VHT20: OFDM (256QAM,64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ax HE20: OFDMA (1024QAM,256QAM,64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ac VHT40: OFDM (256QAM,64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ax HE40: OFDMA (1024QAM,256QAM,64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ac VHT80: OFDM (256QAM,64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ax HE80: OFDMA (1024QAM,256QAM,64QAM, 16QAM, QPSK,BPSK)		
Channel number:	24 Channels for 20MHz bandwidth(5925-6425MHz) 5 Channels for 20MHz bandwidth(6435-6515MHz) 17 Channels for 20MHz bandwidth(6535-6875MHz) 12 channels for 20MHz bandwidth(6895-7115MHz) 12 channels for 40MHz bandwidth(5965~6405MHz) 3 channels for 40MHz bandwidth(6445~6525MHz) 8 Channels for 40MHz bandwidth(6565-6845MHz) 6 channels for 40MHz bandwidth(6885~7085MHz) 6 channels for 80MHz bandwidth(5985~6385MHz) 1 channels for 80MHz bandwidth(6465MHz) 4 Channels for 80MHz bandwidth(6545-6865MHz) 2 channels for 80MHz bandwidth(6945~7025MHz)		
Antenna gain	Frequency Range	ANT 1	ANT 2
	5925-6425MHz	5.17 dBi	5.90 dBi

	6425-6525MHz	4.47 dBi	4.58 dBi
	6525-6875MHz	5.48 dBi	6.22 dBi
	6875-7125MHz	6.72 dBi	5.35 dBi
RFID(13.56MHz) (Optional)			
Frequency Range	13.56MHz		
Channel Number	1		
Modulation Type	ASK		
Antenna Description	Internal Antenna, 0dBi (Max.)		

2. TEST ENVIRONMENT

2.1 Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

2.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L8169)

Shenzhen Global Test Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2019 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA (Certificate No. 4758.01)

Shenzhen Global Test Service Co., Ltd. has been assessed by the American Association for Laboratory Accreditation (A2LA). Certificate No. 4758.01.

Industry Canada Registration Number. is 24189.

FCCDesignationNumberisCN1401.

FCC Registered Test Site Number is 684561.

2.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

2.4 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Global Test Service Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

3. METHOD OF MEASUREMENT

3.1 Applicable Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated.

KDB447498 D01 General RF Exposure Guidance v06: Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies

3.2 Requirement

Systems operating under the provisions of FCC 47 CFR section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as mobile device whereby a distance of 0.2m normally can be maintained between the user and the device, and below RF Permissible Exposure limit shall comply with.

In accordance with KDB447498 D01 General RF Exposure Guidance v06 for Simultaneous transmission MPE test exclusion applies when the sum of the MPE ratios for all simultaneous transmitting antennas incorporated in a host device, based on the calculated/estimated, numerically modeled or measured field strengths or power density, is ≤ 1.0 . The MPE ratio of each antenna is determined at the minimum test separation distance required by the operating configurations and exposure conditions of the host device, according to the ratio of field strengths or power density to MPE limit, at the test frequency. Either the maximum peak or spatially averaged results from measurements or numerical simulations may be used to determine the MPE ratios. Spatial averaging does not apply when MPE is estimated using simple calculations based on far-field plane-wave equivalent conditions. The antenna installation and operating requirements for the host device must meet the minimum test separation distances required by all antennas, in both standalone and simultaneous transmission operations, to satisfy compliance.

3.3 Limit

Limits for Maximum Permissible Exposure (MPE)/Controlled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for Occupational/Controlled Exposure				
0.3 – 3.0	614	1.63	(100) *	6
3.0 – 30	1842/f	4.89/f	(900/f ²)*	6
30 – 300	61.4	0.163	1.0	6
300 – 1500	/	/	f/300	6
1500 – 100,000	/	/	5	6

Limits for Maximum Permissible Exposure (MPE)/Uncontrolled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for Occupational/Controlled Exposure				
0.3 – 3.0	614	1.63	(100) *	30
3.0 – 30	824/f	2.19/f	(180/f ²)*	30
30 – 300	27.5	0.073	0.2	30
300 – 1500	/	/	f/1500	30
1500 – 100,000	/	/	1.0	30

F=frequency in MHz

*=Plane-wave equivalent power density

3.4 MPE Calculation Method

Predication of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG / 4\pi R^2$$

Where: S=power density

P=power input to antenna

G=power gain of the antenna in the direction of interest relative to an isotropic radiator

R=distance to the center of radiation of the antenna

3.5 Antenna Information

I25D04 can only use antennas certificated as follows provided by manufacturer;

Internal Identification	Antenna Identification in Internal photos	Antenna type and antenna number	Operate frequency band	Maximum antenna gain
Antenna1	BT&WLAN	Internal Antenna	2.4 – 2.5 GHz 5.0 – 6.0 GHz 5.0 – 7.25 GHz	5.00 dBi(Max.) for 2.4G band 6.78 dBi(Max.) for 5G band 5.17 dBi(Max.) for 5925-6425MHz 4.47 dBi(Max.) for 6425-6525MHz 5.48 dBi(Max.) for 6525-6875MHz 6.72 dBi(Max.) for 6875-7125MHz
Antenna2	WLAN	Internal Antenna	2.4 – 2.5 GHz 5.0 – 6.0 GHz 5.0 – 7.25 GHz	5.00 dBi(Max.) for 2.4G band 6.78 dBi(Max.) for 5G band 5.90 dBi(Max.) for 5925-6425MHz 4.58 dBi(Max.) for 6425-6525MHz 6.22 dBi(Max.) for 6525-6875MHz 5.35 dBi(Max.) for 6875-7125MHz
Antenna3	NFC	Internal Antenna	13.0 – 14.0 MHz	0 dBi

4. Conducted Power Results

NFC

Mode	Channel	Frequency (MHz)	Field strength of fundamental (dBuV/m) @3m
ASK	1	13.56	92.30

Antenna1

Bluetooth

Mode	Channel	Frequency (MHz)	Peak Conducted Output Power (dBm)
GFSK	0	2402	6.28
	39	2441	8.04
	78	2480	8.00
$\pi/4$ DQPSK	0	2402	5.45
	39	2441	7.37
	78	2480	6.35
8DPSK	0	2402	5.18
	39	2440	7.02
	78	2480	6.00
GFSK(BT LE)	0	2402	0.73
	19	2440	2.48
	39	2480	1.51

2.4GWLAN

Mode	Channel	Frequency (MHz)	Peak Conducted Output Power (dBm)
802.11b	01	2412	14.32
	06	2437	14.44
	11	2462	14.99
802.11g	01	2412	14.77
	06	2437	15.37
	11	2462	15.10
802.11n(HT20)	01	2412	14.62
	06	2437	15.38
	11	2462	15.06
802.11n(HT40)	03	2422	16.17
	06	2437	16.02
	09	2452	16.35
802.11ax(HE20)	01	2412	17.29
	06	2437	17.03
	11	2462	16.83
802.11ax(HE40)	03	2422	16.76
	06	2437	17.11
	09	2452	16.86

5.2GWLAN

Mode	Channel	Frequency (MHz)	Average Conducted Output Power (dBm)
802.11a	36	5180	10.24
	40	5200	9.77
	48	5240	10.38
802.11n20	36	5180	8.99
	40	5200	9.35
	48	5240	10.36
802.11n40	38	5190	8.49
	46	5230	11.39
802.11ac20	36	5180	10.13
	40	5200	10.49
	48	5240	11.60
802.11ac40	38	5190	9.77
	46	5230	11.46
802.11ac80	42	5210	10.38
802.11ax20	36	5180	9.79
	40	5200	10.31
	48	5240	11.25
802.11ax40	38	5190	10.60
	46	5230	11.60
802.11ax80	42	5210	10.09

5.3GWLAN

Mode	Channel	Frequency (MHz)	Average Conducted Output Power (dBm)
802.11a	52	5260	10.50
	56	5280	10.39
	64	5320	10.35
802.11n20	52	5260	11.56
	56	5280	11.68
	64	5320	11.59
802.11n40	54	5270	11.83
	58	5310	11.38
802.11ac20	52	5260	11.81
	56	5280	11.64
	64	5320	11.47
802.11ac40	54	5270	11.91
	58	5310	11.62
802.11ac80	62	5290	11.26
802.11ax20	52	5260	11.16
	56	5280	11.18
	64	5320	11.40
802.11ax40	54	5270	11.67
	58	5310	9.61
802.11ax80	62	5290	11.43

5.7GWLAN

Mode	Channel	Frequency (MHz)	Average Conducted Output Power (dBm)
802.11a	100	5500	10.41
	120	5600	9.36
	140	5700	7.97
802.11n20	100	5500	11.45
	120	5600	10.58
	140	5700	8.60
802.11n40	102	5510	11.44
	118	5590	10.17
	134	5670	9.53
802.11ac20	100	5500	11.20
	120	5600	10.61
	140	5700	8.73
802.11ac40	102	5510	10.48
	118	5590	9.92
	134	5670	9.56
802.11ac80	106	5530	10.06
	122	5610	8.74
802.11ax20	100	5500	10.89
	120	5600	10.13
	140	5700	8.50
802.11ax40	102	5510	11.73
	118	5590	10.23
	134	5670	9.94
802.11ax80	106	5530	10.12
	122	5610	8.66

5.8GWLAN

Mode	Channel	Frequency (MHz)	Average Conducted Output Power (dBm)
802.11a	149	5745	8.39
	157	5785	9.41
	165	5825	10.04
802.11n20	149	5745	9.11
	157	5785	9.62
	165	5825	10.81
802.11n40	151	5755	8.12
	159	5795	9.36
802.11ac20	149	5745	10.26
	157	5785	9.93
	165	5825	11.33
802.11ac40	151	5755	9.49
	159	5795	9.93
802.11ac80	155	5775	9.11
802.11ax20	149	5745	8.84
	157	5785	10.30
	165	5825	11.05
802.11ax40	151	5755	8.66
	159	5795	10.97
802.11ax80	155	5775	9.41

U-NII-5

Mode	Channel	Frequency (MHz)	Average Conducted Output Power (dBm)
802.11ac20	1	5955	-2.46
	45	6175	-2.67
	93	6415	-5.16
802.11ac40	3	5965	0.23
	43	6165	-0.03
	91	6405	-2.68
802.11ac80	15	5985	4.17
	47	6145	4.18
	79	6385	1.45
802.11ax20	1	5955	-2.33
	45	6175	-2.63
	93	6415	-4.92
802.11ax40	3	5965	-0.02
	43	6165	-0.34
	91	6405	-2.78
802.11ax80	15	5985	4.40
	47	6145	4.43
	79	6385	1.69

U-NII-6

Mode	Channel	Frequency (MHz)	Average Conducted Output Power (dBm)
802.11ac20	97	6435	-3.52
	105	6475	-3.65
	113	6515	-4.11
802.11ac40	99	6445	-1.49
	107	6485	-1.62
	115	6525	-2.27
802.11ac80	103	6465	1.73
802.11ax20	97	6435	-3.37
	105	6475	-3.42
	113	6515	-3.97
802.11ax40	99	6445	-1.22
	107	6485	-1.37
	115	6525	-2.05
802.11ax80	103	6465	-1.96

U-NII-7

Mode	Channel	Frequency (MHz)	Average Conducted Output Power (dBm)
802.11ac20	117	6535	-5.29
	149	6695	-5.48
	177	6855	-3.97
	181	6875	-3.88
802.11ac40	123	6565	-2.11
	147	6685	-2.41
	187	6845	-1.09
802.11ac80	119	6545	1.55
	135	6625	1.84
	151	6705	2.05
	167	6785	3.07
	183	6865	2.74
802.11ax20	117	6535	-5.03
	149	6695	-5.07
	177	6855	-3.69
	181	6875	-3.59
802.11ax40	123	6565	-1.91
	147	6685	-2.02
	187	6845	-0.89
802.11ax80	119	6545	1.72
	135	6625	1.99
	151	6705	2.27
	167	6785	3.35
	183	6865	2.98

U-NII-8

Mode	Channel	Frequency (MHz)	Average Conducted Output Power (dBm)
802.11ac20	189	6895	-3.71
	209	6995	-2.49
	233	7115	-2.95
802.11ac40	187	6885	-0.06
	195	6925	0.35
	203	6965	1.03
	227	7085	0.91
802.11ac80	199	6945	4.28
	215	7025	4.98
802.11ax20	189	6895	-3.02
	209	6995	-1.94
	233	7115	-1.97
802.11ax40	187	6885	-0.82
	195	6925	-0.34
	203	6965	0.19
	227	7085	0.12
802.11ax80	199	6945	3.54
	215	7025	4.10

Antenna2**2.4GWLAN**

Mode	Channel	Frequency (MHz)	Peak Conducted Output Power (dBm)
802.11b	01	2412	10.38
	06	2437	10.86
	11	2462	10.64
802.11g	01	2412	14.42
	06	2437	16.77
	11	2462	15.25
802.11n(HT20)	01	2412	15.25
	06	2437	16.56
	11	2462	15.63
802.11n(HT40)	03	2422	15.67
	06	2437	15.90
	09	2452	15.95
802.11ax(HE20)	01	2412	16.47
	06	2437	17.40
	11	2462	17.16
802.11ax(HE40)	03	2422	16.70
	06	2437	17.20
	09	2452	17.03

5.2GWLAN

Mode	Channel	Frequency (MHz)	Average Conducted Output Power (dBm)
802.11a	36	5180	13.99
	40	5200	14.24
	48	5240	15.35
802.11n20	36	5180	12.81
	40	5200	13.46
	48	5240	14.23
802.11n40	38	5190	13.12
	46	5230	13.05
802.11ac20	36	5180	12.97
	40	5200	13.65
	48	5240	14.40
802.11ac40	38	5190	12.33
	46	5230	12.67
802.11ac80	42	5210	11.96
802.11ax20	36	5180	13.11
	40	5200	13.72
	48	5240	14.37
802.11ax40	38	5190	12.40
	46	5230	12.88
802.11ax80	42	5210	11.93

5.3GWLAN

Mode	Channel	Frequency (MHz)	Average Conducted Output Power (dBm)
802.11a	52	5260	15.08
	56	5280	14.72
	64	5320	15.03
802.11n20	52	5260	13.75
	56	5280	13.72
	64	5320	14.07
802.11n40	54	5270	12.59
	58	5310	12.90
802.11ac20	52	5260	13.71
	56	5280	14.14
	64	5320	14.10
802.11ac40	54	5270	12.48
	58	5310	12.96
802.11ac80	62	5290	12.37
802.11ax20	52	5260	14.87
	56	5280	14.42
	64	5320	15.28
802.11ax40	54	5270	13.40
	58	5310	14.09
802.11ax80	62	5290	13.68

5.7GWLAN

Mode	Channel	Frequency (MHz)	Average Conducted Output Power (dBm)
802.11a	100	5500	15.09
	120	5600	15.83
	140	5700	15.43
802.11n20	100	5500	14.09
	120	5600	14.94
	140	5700	14.39
802.11n40	102	5510	12.93
	118	5590	13.42
	134	5670	13.87
802.11ac20	100	5500	14.38
	120	5600	15.06
	140	5700	14.37
802.11ac40	102	5510	13.29
	118	5590	13.45
	134	5670	14.03
802.11ac80	106	5530	12.31
	122	5610	11.95
802.11ax20	100	5500	14.50
	120	5600	14.97
	140	5700	14.65
802.11ax40	102	5510	13.15
	118	5590	13.29
	134	5670	13.87
802.11ax80	106	5530	12.49
	122	5610	12.47

5.8GWLAN

Mode	Channel	Frequency (MHz)	Average Conducted Output Power (dBm)
802.11a	149	5745	14.56
	157	5785	15.46
	165	5825	15.29
802.11n20	149	5745	13.60
	157	5785	14.55
	165	5825	13.88
802.11n40	151	5755	12.60
	159	5795	13.39
802.11ac20	149	5745	13.27
	157	5785	14.01
	165	5825	14.26
802.11ac40	151	5755	12.62
	159	5795	12.99
802.11ac80	155	5775	12.76
802.11ax20	149	5745	13.59
	157	5785	14.27
	165	5825	14.65
802.11ax40	151	5755	12.82
	159	5795	13.40
802.11ax80	155	5775	12.99

U-NII-5

Mode	Channel	Frequency (MHz)	Average Conducted Output Power (dBm)
802.11ac20	1	5955	-1.88
	45	6175	-2.05
	93	6415	-1.99
802.11ac40	3	5965	0.69
	43	6165	0.50
	91	6405	0.57
802.11ac80	15	5985	4.78
	47	6145	4.72
	79	6385	4.64
802.11ax20	1	5955	-1.86
	45	6175	-2.00
	93	6415	-1.66
802.11ax40	3	5965	0.36
	43	6165	0.18
	91	6405	0.39
802.11ax80	15	5985	4.93
	47	6145	4.88
	79	6385	4.75

U-NII-6

Mode	Channel	Frequency (MHz)	Average Conducted Output Power (dBm)
802.11ac20	97	6435	-0.82
	105	6475	-0.61
	113	6515	-0.63
802.11ac40	99	6445	1.23
	107	6485	1.50
	115	6525	1.35
802.11ac80	103	6465	5.33
802.11ax20	97	6435	-0.77
	105	6475	-0.50
	113	6515	-0.55
802.11ax40	99	6445	1.34
	107	6485	1.70
	115	6525	1.58
802.11ax80	103	6465	5.58

U-NII-7

Mode	Channel	Frequency (MHz)	Average Conducted Output Power (dBm)
802.11ac20	117	6535	-1.58
	149	6695	-1.98
	177	6855	-2.88
	181	6875	-3.18
802.11ac40	123	6565	1.30
	147	6685	1.11
	187	6845	0.15
802.11ac80	119	6545	4.99
	135	6625	5.06
	151	6705	4.63
	167	6785	4.05
	183	6865	3.81
802.11ax20	117	6535	-1.48
	149	6695	-1.70
	177	6855	-2.59
	181	6875	2.73
802.11ax40	123	6565	1.79
	147	6685	1.48
	187	6845	0.48
802.11ax80	119	6545	5.18
	135	6625	5.26
	151	6705	4.90
	167	6785	4.38
	183	6865	4.02

U-NII-8

Mode	Channel	Frequency (MHz)	Average Conducted Output Power (dBm)
802.11ac20	189	6895	-3.19
	209	6995	-5.55
	233	7115	-7.46
802.11ac40	187	6885	0.95
	195	6925	0.61
	203	6965	0.12
	227	7085	-2.86
802.11ac80	199	6945	3.94
	215	7025	2.41
802.11ax20	189	6895	-2.47
	209	6995	-4.42
	233	7115	-6.37
802.11ax40	187	6885	0.08
	195	6925	-0.49
	203	6965	-0.71
	227	7085	-3.55
802.11ax80	199	6945	3.19
	215	7025	1.32

5. Manufacturing Tolerance

Antenna 1

Bluetooth			
GFSK (Peak)			
Channel	Channel 0	Channel 39	Channel 78
Target (dBm)	6.00	8.00	8.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
$\pi/4$ DQPSK (Peak)			
Channel	Channel 0	Channel 39	Channel 78
Target (dBm)	5.00	7.00	6.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
8DPSK (Peak)			
Channel	Channel 0	Channel 39	Channel 78
Target (dBm)	5.00	7.00	6.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
GFSK BT LE (Peak)			
Channel	Channel 0	Channel 19	Channel 39
Target (dBm)	0.00	2.00	1.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0

2.4GWLAN			
IEEE 802.11b (Peak)			
Channel	Channel 01	Channel 06	Channel 11
Target (dBm)	14.00	14.00	14.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11g (Peak)			
Channel	Channel 01	Channel 06	Channel 11
Target (dBm)	14.00	15.00	15.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11n HT20 (Peak)			
Channel	Channel 01	Channel 06	Channel 11
Target (dBm)	14.00	15.00	15.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11n HT40 (Peak)			
Channel	Channel 03	Channel 06	Channel 09
Target (dBm)	16.00	16.00	16.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ax HE20 (Peak)			
Channel	Channel 01	Channel 06	Channel 11
Target (dBm)	17.00	17.00	16.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ax HE40 (Peak)			
Channel	Channel 03	Channel 06	Channel 09
Target (dBm)	16.00	17.00	16.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0

5.2GWLAN

IEEE 802.11a (Average)			
Channel	Channel 36	Channel 40	Channel 48
Target (dBm)	10.00	9.00	10.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11n HT20 (Average)			
Channel	Channel 36	Channel 40	Channel 48
Target (dBm)	8.00	9.00	10.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11n VHT40 (Average)			
Channel	Channel 38	Channel 46	/
Target (dBm)	8.00	11.00	/
Tolerance $\pm$ (dB)	1.0	1.0	/
IEEE 802.11ac VHT20 (Average)			
Channel	Channel 36	Channel 40	Channel 48
Target (dBm)	10.00	10.00	11.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ac VHT40 (Average)			
Channel	Channel 38	Channel 46	/
Target (dBm)	9.00	11.00	/
Tolerance $\pm$ (dB)	1.0	1.0	/
IEEE 802.11ac VHT80 (Average)			
Channel	Channel 42	/	/
Target (dBm)	10.00	/	/
Tolerance $\pm$ (dB)	1.0	/	/
IEEE 802.11ax HE20 (Average)			
Channel	Channel 36	Channel 40	Channel 48
Target (dBm)	9.00	10.00	11.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ax HE40 (Average)			
Channel	Channel 38	Channel 46	/
Target (dBm)	10.00	11.00	/
Tolerance $\pm$ (dB)	1.0	1.0	/
IEEE 802.11ax HE80 (Average)			
Channel	Channel 42	/	/
Target (dBm)	10.00	/	/
Tolerance $\pm$ (dB)	1.0	/	/

5.3GWLAN

IEEE 802.11a (Average)			
Channel	Channel 52	Channel 56	Channel 64
Target (dBm)	10.00	10.00	10.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11n HT20 (Average)			
Channel	Channel 52	Channel 56	Channel 64
Target (dBm)	11.00	11.00	11.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11n HT40 (Average)			
Channel	Channel 52	Channel 56	/
Target (dBm)	11.00	11.00	/
Tolerance $\pm$ (dB)	1.0	1.0	/
IEEE 802.11ac VHT20 (Average)			
Channel	Channel 52	Channel 56	Channel 64
Target (dBm)	11.00	11.00	11.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ac VHT40 (Average)			
Channel	Channel 54	Channel 58	/
Target (dBm)	11.00	11.00	/
Tolerance $\pm$ (dB)	1.0	1.0	/
IEEE 802.11ac VHT80 (Average)			
Channel	Channel 62	/	/
Target (dBm)	11.00	/	/
Tolerance $\pm$ (dB)	1.0	/	/
IEEE 802.11ax HE20 (Average)			
Channel	Channel 52	Channel 56	Channel 64
Target (dBm)	11.00	11.00	11.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ax HE40 (Average)			
Channel	Channel 54	Channel 58	/
Target (dBm)	11.00	9.00	/
Tolerance $\pm$ (dB)	1.0	1.0	/
IEEE 802.11ax HE80 (Average)			
Channel	Channel 62	/	/
Target (dBm)	11.00	/	/
Tolerance $\pm$ (dB)	1.0	/	/

5.7GWLAN

IEEE 802.11a (Average)			
Channel	Channel 100	Channel 120	Channel 140
Target (dBm)	10.00	9.00	7.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11n HT20 (Average)			
Channel	Channel 100	Channel 120	Channel 140
Target (dBm)	11.00	10.00	8.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11n HT40 (Average)			
Channel	Channel 102	Channel 118	Channel 134
Target (dBm)	11.00	10.00	9.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ac VHT20 (Average)			
Channel	Channel 100	Channel 120	Channel 140
Target (dBm)	11.00	10.00	8.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ac VHT40 (Average)			
Channel	Channel 102	Channel 118	Channel 134
Target (dBm)	10.00	9.00	9.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ac VHT80 (Average)			
Channel	Channel 106	Channel 122	/
Target (dBm)	10.00	8.00	/
Tolerance $\pm$ (dB)	1.0	1.0	/
IEEE 802.11ax HE20 (Average)			
Channel	Channel 100	Channel 120	Channel 140
Target (dBm)	10.00	10.00	8.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ax HE40 (Average)			
Channel	Channel 102	Channel 118	Channel 134
Target (dBm)	11.00	10.00	9.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ax HE80 (Average)			
Channel	Channel 106	Channel 122	/
Target (dBm)	10.00	8.00	/
Tolerance $\pm$ (dB)	1.0	1.0	/

5.8GWLAN

IEEE 802.11a (Average)			
Channel	Channel 149	Channel 157	Channel 165
Target (dBm)	8.00	9.00	10.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11n HT20 (Average)			
Channel	Channel 149	Channel 157	Channel 165
Target (dBm)	9.00	9.00	10.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11n HT40 (Average)			
Channel	Channel 151	Channel 159	/
Target (dBm)	8.00	9.00	/
Tolerance $\pm$ (dB)	1.0	1.0	/
IEEE 802.11ac VHT20 (Average)			
Channel	Channel 149	Channel 157	Channel 165
Target (dBm)	10.00	9.00	11.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ac VHT40 (Average)			
Channel	Channel 151	Channel 159	/
Target (dBm)	9.00	9.00	/
Tolerance $\pm$ (dB)	1.0	1.0	/
IEEE 802.11ac VHT80 (Average)			
Channel	Channel 155	/	/
Target (dBm)	9.00	/	/
Tolerance $\pm$ (dB)	1.0	/	/
IEEE 802.11ax HE20 (Average)			
Channel	Channel 149	Channel 157	Channel 165
Target (dBm)	8.00	10.00	11.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ax HE40 (Average)			
Channel	Channel 151	Channel 159	/
Target (dBm)	8.00	10.00	/
Tolerance $\pm$ (dB)	1.0	1.0	/
IEEE 802.11ax HE80 (Average)			
Channel	Channel 155	/	/
Target (dBm)	9.00	/	/
Tolerance $\pm$ (dB)	1.0	/	/

U-NII-5

IEEE 802.11ac VHT20 (Average)			
Channel	Channel 1	Channel 45	Channel 93
Target (dBm)	-2.00	-2.00	-5.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ac VHT40 (Average)			
Channel	Channel 3	Channel 43	Channel 91
Target (dBm)	0	0	-2.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ac VHT80 (Average)			
Channel	Channel 15	Channel 47	Channel 79
Target (dBm)	4.00	4.00	1.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ax HE20 (Average)			
Channel	Channel 1	Channel 45	Channel 93
Target (dBm)	-2.00	-2.00	-4.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ax HE40 (Average)			
Channel	Channel 3	Channel 43	Channel 91
Target (dBm)	0	0	-2.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ax HE80 (Average)			
Channel	Channel 15	Channel 47	Channel 79
Target (dBm)	4.00	4.00	1.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0

U-NII-6

IEEE 802.11ac VHT20 (Average)			
Channel	Channel 97	Channel 105	Channel 113
Target (dBm)	-3.00	-3.00	-4.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ac VHT40 (Average)			
Channel	Channel 99	Channel 107	Channel 115
Target (dBm)	-1.00	-1.00	-2.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ac VHT80 (Average)			
Channel	Channel 103	/	/
Target (dBm)	1.00	/	/
Tolerance $\pm$ (dB)	1.0	/	/
IEEE 802.11ax HE20 (Average)			
Channel	Channel 97	Channel 105	Channel 113
Target (dBm)	-3.00	-3.00	-3.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ax HE40 (Average)			
Channel	Channel 99	Channel 107	Channel 115
Target (dBm)	-1.00	-1.00	-2.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ax HE80 (Average)			
Channel	Channel 103	/	/
Target (dBm)	-2.00	/	/
Tolerance $\pm$ (dB)	1.0	/	/

U-NII-7

IEEE 802.11ac VHT20 (Average)					
Channel	Channel 117	Channel 149	Channel 177	Channel 181	/
Target (dBm)	-5.00	-5.00	-3.00	-3.00	/
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	/
IEEE 802.11ac VHT40 (Average)					
Channel	Channel 123	Channel 147	Channel 187	/	/
Target (dBm)	-2.00	-2.00	-1.00	/	/
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0
IEEE 802.11ac VHT80 (Average)					
Channel	Channel 119	Channel 135	Channel 151	Channel 167	Channel 183
Target (dBm)	1.00	1.00	2.00	3.00	2.00
Tolerance $\pm$ (dB)	1.0	1.0	/	/	/
IEEE 802.11ax HE20 (Average)					
Channel	Channel 117	Channel 149	Channel 177	Channel 181	/
Target (dBm)	-5.00	-5.00	-3.00	-3.00	/
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	/
IEEE 802.11ax HE40 (Average)					
Channel	Channel 123	Channel 147	Channel 187	/	/
Target (dBm)	-1.00	-2.00	0	/	/
Tolerance $\pm$ (dB)	1.0	1.0	1.0	/	/
IEEE 802.11ax HE80 (Average)					
Channel	Channel 119	Channel 135	Channel 151	Channel 167	Channel 183
Target (dBm)	1.00	1.00	2.00	3.00	2.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0

U-NII-8

IEEE 802.11ac VHT20 (Average)				
Channel	Channel 189	Channel 209	Channel 233	
Target (dBm)	-3.00	-2.00	-2.00	
Tolerance ±(dB)	1.0	1.0	1.0	
IEEE 802.11ac VHT40 (Average)				
Channel	Channel 187	Channel 195	Channel 203	Channel 227
Target (dBm)	0	0	1.00	0
Tolerance ±(dB)	1.0	1.0	1.0	1.0
IEEE 802.11ac VHT80 (Average)				
Channel	Channel 199	Channel 215	/	
Target (dBm)	4.00	4.00	/	
Tolerance ±(dB)	1.0	1.0	/	
IEEE 802.11ax HE20 (Average)				
Channel	Channel 189	Channel 209	Channel 233	
Target (dBm)	-3.00	-1.00	-1.00	
Tolerance ±(dB)	1.0	1.0	1.0	
IEEE 802.11ax HE40 (Average)				
Channel	Channel 187	Channel 195	Channel 203	Channel 227
Target (dBm)	0	0	0	0
Tolerance ±(dB)	1.0	1.0	1.0	1.0
IEEE 802.11ax HE80 (Average)				
Channel	Channel 199	Channel 215	/	
Target (dBm)	3.00	4.00	/	
Tolerance ±(dB)	1.0	1.0	/	

Antenna2**2.4GWLAN**

IEEE 802.11b (Peak)			
Channel	Channel 01	Channel 06	Channel 11
Target (dBm)	10.00	10.00	10.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11g (Peak)			
Channel	Channel 01	Channel 06	Channel 11
Target (dBm)	14.00	16.00	15.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11n HT20 (Peak)			
Channel	Channel 01	Channel 06	Channel 11
Target (dBm)	15.00	16.00	15.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11n HT40 (Peak)			
Channel	Channel 03	Channel 06	Channel 09
Target (dBm)	15.00	15.00	15.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ax HE20 (Peak)			
Channel	Channel 01	Channel 06	Channel 11
Target (dBm)	16.00	17.00	17.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ax HE40 (Peak)			
Channel	Channel 03	Channel 06	Channel 09
Target (dBm)	16.00	17.00	17.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0

5.2GWLAN

IEEE 802.11a (Average)			
Channel	Channel 36	Channel 40	Channel 48
Target (dBm)	13.00	14.00	15.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11n HT20 (Average)			
Channel	Channel 36	Channel 40	Channel 48
Target (dBm)	12.00	13.00	14.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11n VHT40 (Average)			
Channel	Channel 38	Channel 46	/
Target (dBm)	13.00	13.00	/
Tolerance $\pm$ (dB)	1.0	1.0	/
IEEE 802.11ac VHT20 (Average)			
Channel	Channel 36	Channel 40	Channel 48
Target (dBm)	12.00	13.00	14.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ac VHT40 (Average)			
Channel	Channel 38	Channel 46	/
Target (dBm)	12.00	12.00	/
Tolerance $\pm$ (dB)	1.0	1.0	/
IEEE 802.11ac VHT80 (Average)			
Channel	Channel 42	/	/
Target (dBm)	11.00	/	/
Tolerance $\pm$ (dB)	1.0	/	/
IEEE 802.11ax HE20 (Average)			
Channel	Channel 36	Channel 40	Channel 48
Target (dBm)	13.00	13.00	14.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ax HE40 (Average)			
Channel	Channel 38	Channel 46	/
Target (dBm)	12.00	12.00	/
Tolerance $\pm$ (dB)	1.0	1.0	/
IEEE 802.11ax HE80 (Average)			
Channel	Channel 42	/	/
Target (dBm)	11.00	/	/
Tolerance $\pm$ (dB)	1.0	/	/

5.3GWLAN

IEEE 802.11a (Average)			
Channel	Channel 52	Channel 56	Channel 64
Target (dBm)	15.00	14.00	15.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11n HT20 (Average)			
Channel	Channel 52	Channel 56	Channel 64
Target (dBm)	13.00	13.00	14.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11n HT40 (Average)			
Channel	Channel 52	Channel 56	/
Target (dBm)	12.00	12.00	/
Tolerance $\pm$ (dB)	1.0	1.0	/
IEEE 802.11ac VHT20 (Average)			
Channel	Channel 52	Channel 56	Channel 64
Target (dBm)	13.00	14.00	14.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ac VHT40 (Average)			
Channel	Channel 54	Channel 58	/
Target (dBm)	12.00	12.00	/
Tolerance $\pm$ (dB)	1.0	1.0	/
IEEE 802.11ac VHT80 (Average)			
Channel	Channel 62	/	/
Target (dBm)	12.00	/	/
Tolerance $\pm$ (dB)	1.0	/	/
IEEE 802.11ax HE20 (Average)			
Channel	Channel 52	Channel 56	Channel 64
Target (dBm)	14.00	14.00	15.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ax HE40 (Average)			
Channel	Channel 54	Channel 58	/
Target (dBm)	13.00	14.00	/
Tolerance $\pm$ (dB)	1.0	1.0	/
IEEE 802.11ax HE80 (Average)			
Channel	Channel 62	/	/
Target (dBm)	13.00	/	/
Tolerance $\pm$ (dB)	1.0	/	/

5.7GWLAN

IEEE 802.11a (Average)			
Channel	Channel 100	Channel 120	Channel 140
Target (dBm)	15.00	15.00	15.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11n HT20 (Average)			
Channel	Channel 100	Channel 120	Channel 140
Target (dBm)	14.00	14.00	14.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11n HT40 (Average)			
Channel	Channel 102	Channel 118	Channel 134
Target (dBm)	12.00	13.00	13.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ac VHT20 (Average)			
Channel	Channel 100	Channel 120	Channel 140
Target (dBm)	14.00	15.00	14.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ac VHT40 (Average)			
Channel	Channel 102	Channel 118	Channel 134
Target (dBm)	13.00	13.00	14.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ac VHT80 (Average)			
Channel	Channel 106	Channel 122	/
Target (dBm)	12.00	11.00	/
Tolerance $\pm$ (dB)	1.0	1.0	/
IEEE 802.11ax HE20 (Average)			
Channel	Channel 100	Channel 120	Channel 140
Target (dBm)	14.00	14.00	14.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ax HE40 (Average)			
Channel	Channel 102	Channel 118	Channel 134
Target (dBm)	13.00	13.00	13.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ax HE80 (Average)			
Channel	Channel 106	Channel 122	/
Target (dBm)	12.00	12.00	/
Tolerance $\pm$ (dB)	1.0	1.0	/

5.8GWLAN

IEEE 802.11a (Average)			
Channel	Channel 149	Channel 157	Channel 165
Target (dBm)	14.00	15.00	15.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11n HT20 (Average)			
Channel	Channel 149	Channel 157	Channel 165
Target (dBm)	13.00	14.00	13.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11n HT40 (Average)			
Channel	Channel 151	Channel 159	/
Target (dBm)	12.00	13.00	/
Tolerance $\pm$ (dB)	1.0	1.0	/
IEEE 802.11ac VHT20 (Average)			
Channel	Channel 149	Channel 157	Channel 165
Target (dBm)	13.00	14.00	14.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ac VHT40 (Average)			
Channel	Channel 151	Channel 159	/
Target (dBm)	12.00	12.00	/
Tolerance $\pm$ (dB)	1.0	1.0	/
IEEE 802.11ac VHT80 (Average)			
Channel	Channel 155	/	/
Target (dBm)	12.00	/	/
Tolerance $\pm$ (dB)	1.0	/	/
IEEE 802.11ax HE20 (Average)			
Channel	Channel 149	Channel 157	Channel 165
Target (dBm)	13.00	14.00	14.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ax HE40 (Average)			
Channel	Channel 151	Channel 159	/
Target (dBm)	12.00	13.00	/
Tolerance $\pm$ (dB)	1.0	1.0	/
IEEE 802.11ax HE80 (Average)			
Channel	Channel 155	/	/
Target (dBm)	12.00	/	/
Tolerance $\pm$ (dB)	1.0	/	/

U-NII-5

IEEE 802.11ac VHT20 (Average)			
Channel	Channel 1	Channel 45	Channel 93
Target (dBm)	-1.00	-2.00	-1.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ac VHT40 (Average)			
Channel	Channel 3	Channel 43	Channel 91
Target (dBm)	0	0	0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ac VHT80 (Average)			
Channel	Channel 15	Channel 47	Channel 79
Target (dBm)	4.00	4.00	4.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ax HE20 (Average)			
Channel	Channel 1	Channel 45	Channel 93
Target (dBm)	-1.00	-2.00	-1.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ax HE40 (Average)			
Channel	Channel 3	Channel 43	Channel 91
Target (dBm)	0	0	0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ax HE80 (Average)			
Channel	Channel 15	Channel 47	Channel 79
Target (dBm)	4.00	4.00	4.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0

U-NII-6

IEEE 802.11ac VHT20 (Average)			
Channel	Channel 97	Channel 105	Channel 113
Target (dBm)	0	0	0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ac VHT40 (Average)			
Channel	Channel 99	Channel 107	Channel 115
Target (dBm)	1.00	1.00	1.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ac VHT80 (Average)			
Channel	Channel 103	/	/
Target (dBm)	5.00	/	/
Tolerance $\pm$ (dB)	1.0	/	/
IEEE 802.11ax HE20 (Average)			
Channel	Channel 97	Channel 105	Channel 113
Target (dBm)	0	0	0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ax HE40 (Average)			
Channel	Channel 99	Channel 107	Channel 115
Target (dBm)	1.00	1.00	1.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0
IEEE 802.11ax HE80 (Average)			
Channel	Channel 103	/	/
Target (dBm)	5.00	/	/
Tolerance $\pm$ (dB)	1.0	/	/

U-NII-7

IEEE 802.11ac VHT20 (Average)					
Channel	Channel 117	Channel 149	Channel 177	Channel 181	/
Target (dBm)	-1.00	-1.00	-2.00	-3.00	/
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	/
IEEE 802.11ac VHT40 (Average)					
Channel	Channel 123	Channel 147	Channel 187	/	/
Target (dBm)	1.00	1.00	0	/	/
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0
IEEE 802.11ac VHT80 (Average)					
Channel	Channel 119	Channel 135	Channel 151	Channel 167	Channel 183
Target (dBm)	4.00	5.00	4.00	4.00	3.00
Tolerance $\pm$ (dB)	1.0	1.0	/	/	/
IEEE 802.11ax HE20 (Average)					
Channel	Channel 117	Channel 149	Channel 177	Channel 181	/
Target (dBm)	-1.00	-1.00	-2.00	2.00	/
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	/
IEEE 802.11ax HE40 (Average)					
Channel	Channel 123	Channel 147	Channel 187	/	/
Target (dBm)	1.00	1.00	0	/	/
Tolerance $\pm$ (dB)	1.0	1.0	1.0	/	/
IEEE 802.11ax HE80 (Average)					
Channel	Channel 119	Channel 135	Channel 151	Channel 167	Channel 183
Target (dBm)	5.00	5.00	4.00	4.00	4.00
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0

U-NII-8

IEEE 802.11ac VHT20 (Average)				
Channel	Channel 189	Channel 209	Channel 233	
Target (dBm)	-3.00	-5.00	-7.00	
Tolerance ±(dB)	1.0	1.0	1.0	
IEEE 802.11ac VHT40 (Average)				
Channel	Channel 187	Channel 195	Channel 203	Channel 227
Target (dBm)	0	0	0	-2.00
Tolerance ±(dB)	1.0	1.0	1.0	1.0
IEEE 802.11ac VHT80 (Average)				
Channel	Channel 199	Channel 215	/	
Target (dBm)	3.00	2.00	/	
Tolerance ±(dB)	1.0	1.0	/	
IEEE 802.11ax HE20 (Average)				
Channel	Channel 189	Channel 209	Channel 233	
Target (dBm)	-2.00	-4.00	-6.00	
Tolerance ±(dB)	1.0	1.0	1.0	
IEEE 802.11ax HE40 (Average)				
Channel	Channel 187	Channel 195	Channel 203	Channel 227
Target (dBm)	0	0	0	-3.00
Tolerance ±(dB)	1.0	1.0	1.0	1.0
IEEE 802.11ax HE80 (Average)				
Channel	Channel 199	Channel 215	/	
Target (dBm)	3.00	1.00	/	
Tolerance ±(dB)	1.0	1.0	/	

6. Measurement Results

6.1 Standalone MPE Evaluation

As declared by the Applicant, the EUT is a wireless device used in a fix application, at least 20 cm from any body part of the user or nearby persons; from the maximum EUT RF output power, the minimum separation distance, $r = 20\text{cm}$, as well as the gain of the used antenna refer to antenna information, the RF power density can be obtained.

NFC

Mode	Channel	Frequency (MHz)	Field strength of fundamental @ 3m		Field strength of fundamental @ 0.2m		Electric Field Strength (V/m)
			(dBuV/m)	V/m	(dBuV/m)	V/m	
ASK	1	13.56	92.30	0.0412	139.34	9.2683	60.77

Remark:

$$1. V/m = 10^{((dBuV/m) - 120)/20}$$

$$2. dBuV/m(0.2m) = dBuV/m(3m) + 40\lg(3m/0.2m)$$

Antenna 1

BT

Modulation Type	Output power		Antenna Gain (dBi)	Antenna Gain (linear)	MPE (mW/cm ²)	MPE Limits (mW/cm ²)
	dBm	mW				
GFSK	9.00	7.9433	5.00	3.1623	0.0050	1.0000
$\pi/4$ DQPSK	8.00	6.3096	5.00	3.1623	0.0040	1.0000
8DPSK	8.00	6.3096	5.00	3.1623	0.0040	1.0000
GFSK(BT LE)	3.00	1.9953	5.00	3.1623	0.0013	1.0000

2.4GWLAN

Modulation Type	Output power		Antenna Gain (dBi)	Antenna Gain (linear)	MPE (mW/cm ²)	MPE Limits (mW/cm ²)
	dBm	mW				
802.11b	15.00	31.6228	5.00	3.1623	0.0199	1.0000
802.11g	16.00	39.8107	5.00	3.1623	0.0250	1.0000
802.11n(HT20)	16.00	39.8107	5.00	3.1623	0.0250	1.0000
802.11n(HT40)	17.00	50.1187	5.00	3.1623	0.0315	1.0000
802.11ax(HE20)	18.00	63.0957	5.00	3.1623	0.0397	1.0000
802.11ax(HE40)	18.00	63.0957	5.00	3.1623	0.0397	1.0000

5.2GWLAN

Modulation Type	Output power		Antenna Gain (dBi)	Antenna Gain (linear)	MPE (mW/cm ²)	MPE Limits (mW/cm ²)
	dBm	mW				
802.11a	11.00	12.5893	6.78	4.7643	0.0119	1.0000
802.11n20	11.00	12.5893	6.78	4.7643	0.0119	1.0000
802.11n40	12.00	15.8489	6.78	4.7643	0.0150	1.0000
802.11ac20	12.00	15.8489	6.78	4.7643	0.0150	1.0000
802.11ac40	12.00	15.8489	6.78	4.7643	0.0150	1.0000
802.11ac80	11.00	12.5893	6.78	4.7643	0.0119	1.0000
802.11ax20	12.00	15.8489	6.78	4.7643	0.0150	1.0000
802.11ax40	12.00	15.8489	6.78	4.7643	0.0150	1.0000
802.11ax80	11.00	12.5893	6.78	4.7643	0.0119	1.0000

5.3GWLAN

Modulation Type	Output power		Antenna Gain (dBi)	Antenna Gain (linear)	MPE (mW/cm ²)	MP20 Limits (mW/cm ²)
	dBm	mW				
802.11a	11.00	12.5893	6.78	4.7643	0.0119	1.0000
802.11n20	12.00	15.8489	6.78	4.7643	0.0150	1.0000
802.11n40	12.00	15.8489	6.78	4.7643	0.0150	1.0000
802.11ac20	12.00	15.8489	6.78	4.7643	0.0150	1.0000
802.11ac40	12.00	15.8489	6.78	4.7643	0.0150	1.0000
802.11ac80	12.00	15.8489	6.78	4.7643	0.0150	1.0000
802.11ax20	12.00	15.8489	6.78	4.7643	0.0150	1.0000
802.11ax40	12.00	15.8489	6.78	4.7643	0.0150	1.0000
802.11ax80	12.00	15.8489	6.78	4.7643	0.0150	1.0000

5.7GWLAN

Modulation Type	Output power		Antenna Gain (dBi)	Antenna Gain (linear)	MPE (mW/cm ²)	MP20 Limits (mW/cm ²)
	dBm	mW				
802.11a	11.00	12.5893	6.78	4.7643	0.0119	1.0000
802.11n20	12.00	15.8489	6.78	4.7643	0.0150	1.0000
802.11n40	12.00	15.8489	6.78	4.7643	0.0150	1.0000
802.11ac20	12.00	15.8489	6.78	4.7643	0.0150	1.0000
802.11ac40	11.00	12.5893	6.78	4.7643	0.0119	1.0000
802.11ac80	11.00	12.5893	6.78	4.7643	0.0119	1.0000
802.11ax20	11.00	12.5893	6.78	4.7643	0.0119	1.0000
802.11ax40	12.00	15.8489	6.78	4.7643	0.0150	1.0000
802.11ax80	11.00	12.5893	6.78	4.7643	0.0119	1.0000

5.8GWLAN

Modulation Type	Output power		Antenna Gain (dBi)	Antenna Gain (linear)	MPE (mW/cm ²)	MPE Limits (mW/cm ²)
	dBm	mW				
802.11a	11.00	12.5893	6.78	4.7643	0.0119	1.0000
802.11n20	11.00	12.5893	6.78	4.7643	0.0119	1.0000
802.11n40	10.00	10.0000	6.78	4.7643	0.0095	1.0000
802.11ac20	12.00	15.8489	6.78	4.7643	0.0150	1.0000
802.11ac40	10.00	10.0000	6.78	4.7643	0.0095	1.0000
802.11ac80	10.00	10.0000	6.78	4.7643	0.0095	1.0000
802.11ax20	12.00	15.8489	6.78	4.7643	0.0150	1.0000
802.11ax40	11.00	12.5893	6.78	4.7643	0.0119	1.0000
802.11ax80	10.00	10.0000	6.78	4.7643	0.0095	1.0000

U-NII-5

Modulation Type	Output power		Antenna Gain (dBi)	Antenna Gain (linear)	MPE (mW/cm ²)	MPE Limits (mW/cm ²)
	dBm	mW				
802.11ac20	-1.00	0.7943	5.17	3.2885	0.0005	1.0000
802.11ac40	1.00	1.2589	5.17	3.2885	0.0008	1.0000
802.11ac80	5.00	3.1623	5.17	3.2885	0.0021	1.0000
802.11ax20	-1.00	0.7943	5.17	3.2885	0.0005	1.0000
802.11ax40	1.00	1.2589	5.17	3.2885	0.0008	1.0000
802.11ax80	5.00	3.1623	5.17	3.2885	0.0021	1.0000

U-NII-6

Modulation Type	Output power		Antenna Gain (dBi)	Antenna Gain (linear)	MPE (mW/cm ²)	MPE Limits (mW/cm ²)
	dBm	mW				
802.11ac20	-2.00	0.6310	4.47	2.7990	0.0004	1.0000
802.11ac40	0	1.0000	4.47	2.7990	0.0006	1.0000
802.11ac80	2.00	1.5849	4.47	2.7990	0.0009	1.0000
802.11ax20	-2.00	0.6310	4.47	2.7990	0.0004	1.0000
802.11ax40	0	1.0000	4.47	2.7990	0.0006	1.0000
802.11ax80	0	1.0000	4.47	2.7990	0.0006	1.0000

U-NII-7

Modulation Type	Output power		Antenna Gain (dBi)	Antenna Gain (linear)	MPE (mW/cm ²)	MPE Limits (mW/cm ²)
	dBm	mW				
802.11ac20	-2.00	0.6310	5.48	3.5318	0.0004	1.0000
802.11ac40	0	1.0000	5.48	3.5318	0.0007	1.0000
802.11ac80	4.00	2.5119	5.48	3.5318	0.0018	1.0000
802.11ax20	-2.00	0.6310	5.48	3.5318	0.0004	1.0000
802.11ax40	1.00	1.2589	5.48	3.5318	0.0009	1.0000
802.11ax80	4.00	2.5119	5.48	3.5318	0.0018	1.0000

U-NII-8

Modulation Type	Output power		Antenna Gain (dBi)	Antenna Gain (linear)	MPE (mW/cm ²)	MPE Limits (mW/cm ²)
	dBm	mW				
802.11ac20	-1.00	0.7943	6.72	4.6989	0.0007	1.0000
802.11ac40	2.00	1.5849	6.72	4.6989	0.0015	1.0000
802.11ac80	5.00	3.1623	6.72	4.6989	0.0030	1.0000
802.11ax20	0	1.0000	6.72	4.6989	0.0009	1.0000
802.11ax40	1.00	1.2589	6.72	4.6989	0.0012	1.0000
802.11ax80	5.00	3.1623	6.72	4.6989	0.0030	1.0000

Antenna2**2.4GWLAN**

Modulation Type	Output power		Antenna Gain (dBi)	Antenna Gain (linear)	MPE (mW/cm ²)	MPE Limits (mW/cm ²)
	dBm	mW				
802.11b	11.00	12.5893	5.00	3.1623	0.0079	1.0000
802.11g	17.00	50.1187	5.00	3.1623	0.0315	1.0000
802.11n(HT20)	17.00	50.1187	5.00	3.1623	0.0315	1.0000
802.11n(HT40)	16.00	39.8107	5.00	3.1623	0.0250	1.0000
802.11ax(HE20)	18.00	63.0957	5.00	3.1623	0.0397	1.0000
802.11ax(HE40)	18.00	63.0957	5.00	3.1623	0.0397	1.0000

5.2G WLAN

Modulation Type	Output power		Antenna Gain (dBi)	Antenna Gain (linear)	MPE (mW/cm ²)	MPE Limits (mW/cm ²)
	dBm	mW				
802.11a	16.00	39.8107	6.78	4.7643	0.0377	1.0000
802.11n20	15.00	31.6228	6.78	4.7643	0.0300	1.0000
802.11n40	14.00	25.1189	6.78	4.7643	0.0238	1.0000
802.11ac20	15.00	31.6228	6.78	4.7643	0.0300	1.0000
802.11ac40	13.00	19.9526	6.78	4.7643	0.0189	1.0000
802.11ac80	12.00	15.8489	6.78	4.7643	0.0150	1.0000
802.11ax20	15.00	31.6228	6.78	4.7643	0.0300	1.0000
802.11ax40	13.00	19.9526	6.78	4.7643	0.0189	1.0000
802.11ax80	12.00	15.8489	6.78	4.7643	0.0150	1.0000

5.3G WLAN

Modulation Type	Output power		Antenna Gain (dBi)	Antenna Gain (linear)	MPE (mW/cm ²)	MP20 Limits (mW/cm ²)
	dBm	mW				
802.11a	16.00	39.8107	6.78	4.7643	0.0377	1.0000
802.11n20	15.00	31.6228	6.78	4.7643	0.0300	1.0000
802.11n40	13.00	19.9526	6.78	4.7643	0.0189	1.0000
802.11ac20	15.00	31.6228	6.78	4.7643	0.0300	1.0000
802.11ac40	13.00	19.9526	6.78	4.7643	0.0189	1.0000
802.11ac80	13.00	19.9526	6.78	4.7643	0.0189	1.0000
802.11ax20	16.00	39.8107	6.78	4.7643	0.0377	1.0000
802.11ax40	15.00	31.6228	6.78	4.7643	0.0300	1.0000
802.11ax80	14.00	25.1189	6.78	4.7643	0.0238	1.0000

5.7G WLAN

Modulation Type	Output power		Antenna Gain (dBi)	Antenna Gain (linear)	MPE (mW/cm ²)	MP20 Limits (mW/cm ²)
	dBm	mW				
802.11a	16.00	39.8107	6.78	4.7643	0.0377	1.0000
802.11n20	15.00	31.6228	6.78	4.7643	0.0300	1.0000
802.11n40	14.00	25.1189	6.78	4.7643	0.0238	1.0000
802.11ac20	16.00	39.8107	6.78	4.7643	0.0377	1.0000
802.11ac40	15.00	31.6228	6.78	4.7643	0.0300	1.0000
802.11ac80	13.00	19.9526	6.78	4.7643	0.0189	1.0000
802.11ax20	15.00	31.6228	6.78	4.7643	0.0300	1.0000
802.11ax40	14.00	25.1189	6.78	4.7643	0.0238	1.0000
802.11ax80	13.00	19.9526	6.78	4.7643	0.0189	1.0000

5.8G WLAN

Modulation Type	Output power		Antenna Gain (dBi)	Antenna Gain (linear)	MPE (mW/cm ²)	MPE Limits (mW/cm ²)
	dBm	mW				
802.11a	16.00	16.00	6.78	4.7643	0.0377	1.0000
802.11n20	15.00	15.00	6.78	4.7643	0.0300	1.0000
802.11n40	14.00	14.00	6.78	4.7643	0.0238	1.0000
802.11ac20	15.00	15.00	6.78	4.7643	0.0300	1.0000
802.11ac40	13.00	13.00	6.78	4.7643	0.0189	1.0000
802.11ac80	13.00	13.00	6.78	4.7643	0.0189	1.0000
802.11ax20	15.00	15.00	6.78	4.7643	0.0300	1.0000
802.11ax40	14.00	14.00	6.78	4.7643	0.0238	1.0000
802.11ax80	13.00	13.00	6.78	4.7643	0.0189	1.0000

U-NII-5

Modulation Type	Output power		Antenna Gain (dBi)	Antenna Gain (linear)	MPE (mW/cm ²)	MPE Limits (mW/cm ²)
	dBm	mW				
802.11ac20	0	1.0000	5.90	3.8905	0.0008	1.0000
802.11ac40	1.00	1.2589	5.90	3.8905	0.0010	1.0000
802.11ac80	5.00	3.1623	5.90	3.8905	0.0024	1.0000
802.11ax20	0	1.0000	5.90	3.8905	0.0008	1.0000
802.11ax40	1.00	1.2589	5.90	3.8905	0.0010	1.0000
802.11ax80	5.00	3.1623	5.90	3.8905	0.0024	1.0000

U-NII-6

Modulation Type	Output power		Antenna Gain (dBi)	Antenna Gain (linear)	MPE (mW/cm ²)	MPE Limits (mW/cm ²)
	dBm	mW				
802.11ac20	1.00	1.2589	4.58	2.8708	0.0007	1.0000
802.11ac40	2.00	1.5849	4.58	2.8708	0.0009	1.0000
802.11ac80	6.00	3.9811	4.58	2.8708	0.0023	1.0000
802.11ax20	1.00	1.2589	4.58	2.8708	0.0007	1.0000
802.11ax40	2.00	1.5849	4.58	2.8708	0.0009	1.0000
802.11ax80	6.00	3.9811	4.58	2.8708	0.0023	1.0000

U-NII-7

Modulation Type	Output power		Antenna Gain (dBi)	Antenna Gain (linear)	MPE (mW/cm ²)	MPE Limits (mW/cm ²)
	dBm	mW				
802.11ac20	0	1.0000	6.22	4.1879	0.0008	1.0000
802.11ac40	2.00	1.5849	6.22	4.1879	0.0013	1.0000
802.11ac80	6.00	3.9811	6.22	4.1879	0.0033	1.0000
802.11ax20	0	1.0000	6.22	4.1879	0.0008	1.0000
802.11ax40	2.00	1.5849	6.22	4.1879	0.0013	1.0000
802.11ax80	6.00	3.9811	6.22	4.1879	0.0033	1.0000

U-NII-8

Modulation Type	Output power		Antenna Gain (dBi)	Antenna Gain (linear)	MPE (mW/cm ²)	MPE Limits (mW/cm ²)
	dBm	mW				
802.11ac20	-2.00	0.6310	5.35	3.4277	0.0004	1.0000
802.11ac40	1.00	1.2589	5.35	3.4277	0.0009	1.0000
802.11ac80	4.00	2.5119	5.35	3.4277	0.0017	1.0000
802.11ax20	-1.00	0.7943	5.35	3.4277	0.0005	1.0000
802.11ax40	1.00	1.2589	5.35	3.4277	0.0009	1.0000
802.11ax80	4.00	2.5119	5.35	3.4277	0.0017	1.0000

Remark:

1. Output power including tune-up tolerance;
2. MPE evaluate distance is 20cm from user manual provide by manufacturer;

6.2 Simultaneous Transmission MPE

The sample support one Bluetooth & WLAN modular and one Bluetooth & WLAN antenna, and one WLAN antennas, WLAN support MIMO, Need consider simultaneous transmission ;

The sample supports 2T2R MIMO technology for WLAN.

According to KDB447498 D01 General RF Exposure Guidance v06 for Transmitters used in mobile exposure conditions for simultaneous transmission operations;

$\sum$ of MPE ratios ≤ 1.0

6.2.1 Summary simultaneous transmission results

Maximum Simultaneous transmission MPE Ratios for NFC, 2.4GWLAN(ant1), 2.4GWLAN(ant2),

Maximum MPE ratio NFC	Maximum MPE ratio 2.4GWLAN(ant1)	Maximum MPE ratio 2.4GWLAN(ant2)	$\sum$ MPE ratios	Limit	Results
0.1525	0.0397	0.0397	0.2319	1.0	PASS

7. Conclusion

The measurement results comply with the FCC Limit per 47 CFR 2.1091 for the uncontrolled RF Exposure and SAR Exclusion Threshold per KDB447498 D01 General RF Exposure Guidance v06, No SAR is required.

.....End of Report.....