

Installers & User guide **Smart IoT Deadbolt.**

Welcome!

This guide will get you up and running with your igloohome Smart IoT Deadbolt. In the meantime, you should follow igloohome on Facebook and Youtube!



Like us on Facebook



Visit our Youtube




As our iglooworks app is frequently updated, there may be changes to this manual.
Please refer to our website igloohome.co/support for the latest version of the manual.


Table of Contents

What's Included	4
Specifications	5
Installation Guide	
Requirements	6
Prepare Door for Installation	7
Prepare Lock for Installation	9
Installation Instructions	10
Test Lock	17
Prepare the Door Frame	18
User Guide	
Lock Anatomy	19
Features	20
Unlocking and Locking	22
Lock Pairing & Provisioning	23
iglooworks App Functions	24
Lock Behaviour	25
9V Jumpstart Feature	26
Audio and LED Indications	27
Troubleshooting	28

What's Included

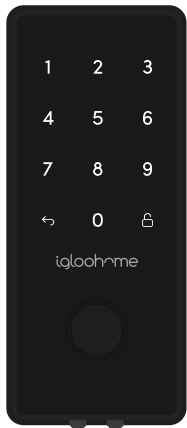


Front Assembly
& Rubber Gasket

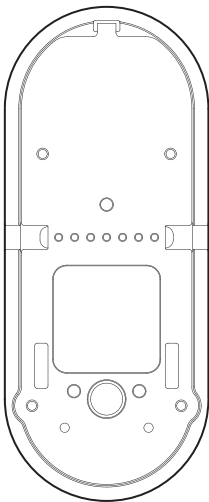


Back Assembly
Rubber Gasket




Back Assembly

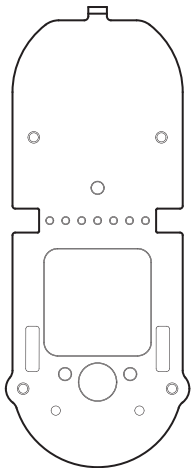


Back Plate



AA Alkaline Batteries x8



Bolt Assembly



Strike Plate Housing &
Strike Plate



Screw Holder



6mm (0.24")
Bolt Screw x1




4mm (0.16")
Bolt Screw x2




8mm (0.31")
Bolt Screw x4




Keyhole
Cover x1




Construction Keys x4
Permanent Keys x4




Drill Sheet



40mm (1.57")
Bolt Screw x3




22mm (0.87")
Wood Screw x6



Door Sensor & Magnet

Specifications


Model	igloohome Smart IoT Deadbolt
Battery Type	8 x AA* Alkaline
Battery Life	Up to 1 Year
Emergency Power	9V Alkaline Battery
Operation Temp	-25°C to 55°C
Storage Temp	-40°C to 70°C
IP Rating	IP65
Material	Al, Zinc Alloy, ABS
Weight	Net: 450g, Gross: g
Unlock Mechanism	Bluetooth, PIN code, Physical Keys, Thumbturn

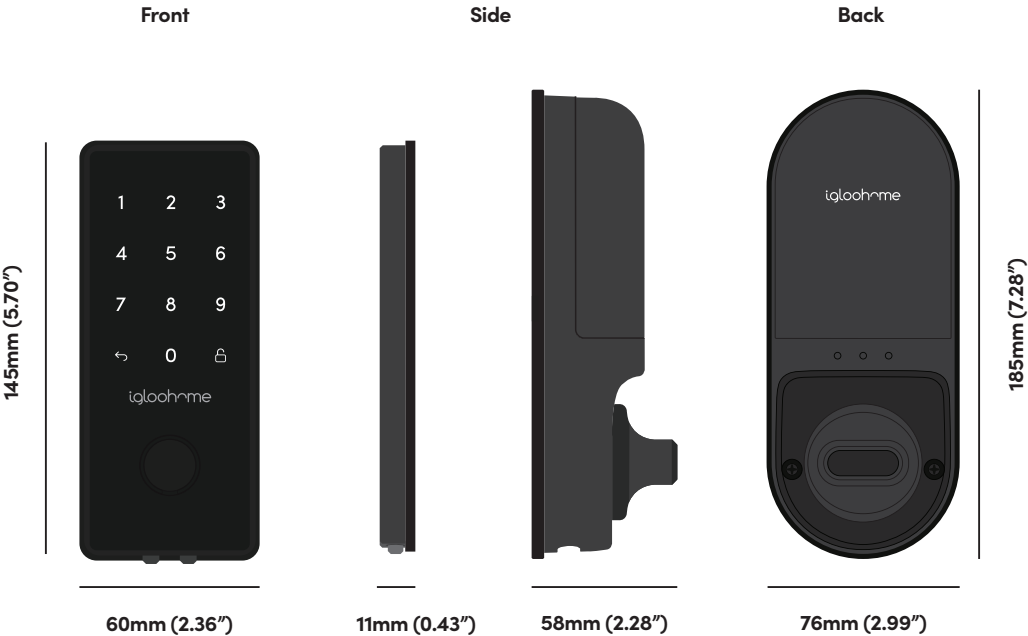

* **DO NOT USE:** Heavy Duty, Eveready, GP, or rechargeable batteries. Please note that using recommended battery brands such as Panasonic, Duracell, or Energizer will improve the performance and lifespan of the lock.

Installation Guide

Requirements

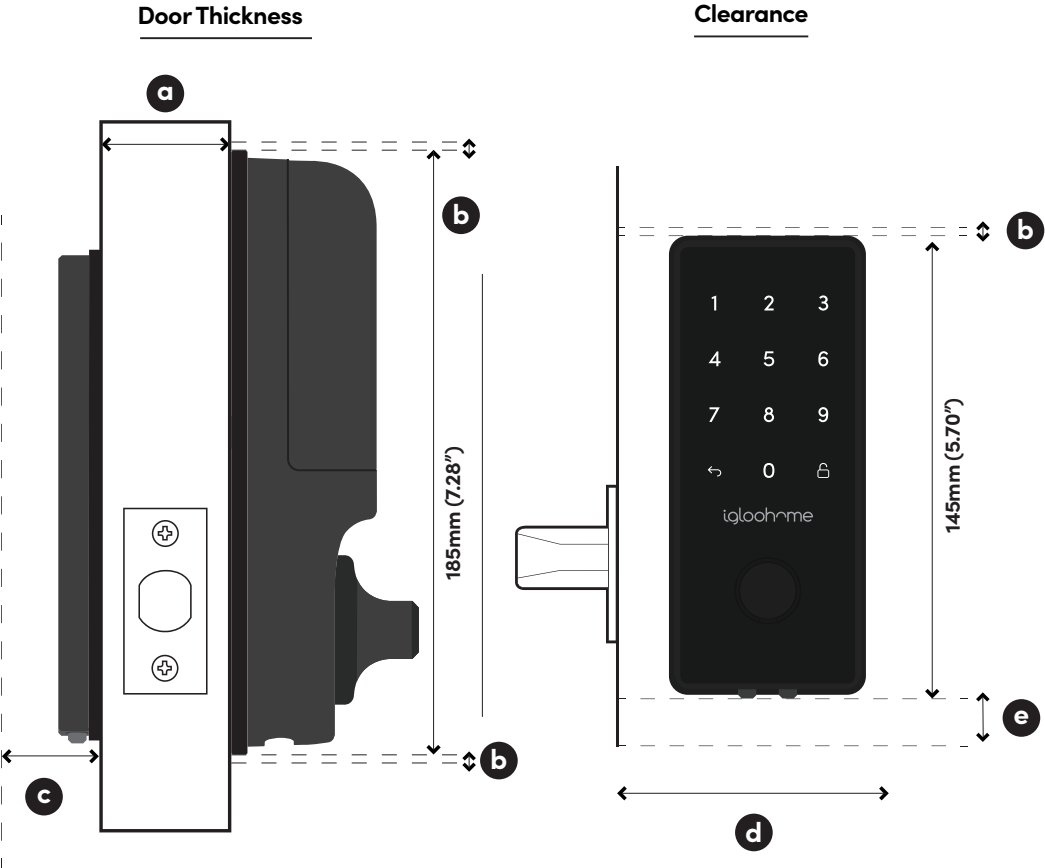


Measurements

- a** 45mm (1.77") to 80mm (3.15")
- b** 10mm (0.39")
- c** 20mm (0.78")
- d** >110mm (4.33") for 60mm (2.36") / >120mm (4.72") for 70mm (2.75") backset
- e** 50mm (1.96")

Prepare Door for Installation

Items needed:



Drill Sheet




Drill



10mm (0.39")
Drill Bit




54mm (2.12")
Hole Saw



#2 Phillips Screw Driver



25mm (0.98")
Spade Bit




20mm (0.78")
Chisel



Hammer


Recommended

Door and door frame material : **Wood**



Recommended

Gap between door and door frame: **<3mm (0.01")**

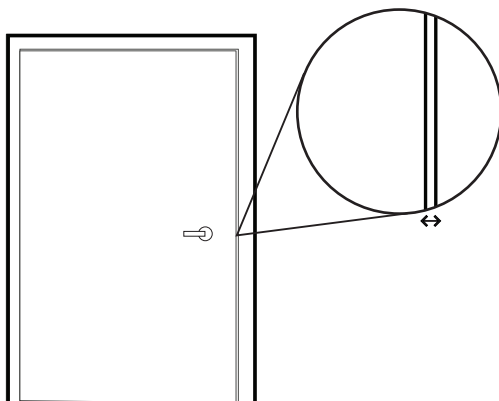


Please ensure that there is an existing handle on your door for push - pull access.

Not for: metal gates, glass doors or sliding doors.


If you are unsure if your door is suitable, send us web links to your door pictures to info@igloohome.co

How to use the Drill Sheet

Drilling (Door)

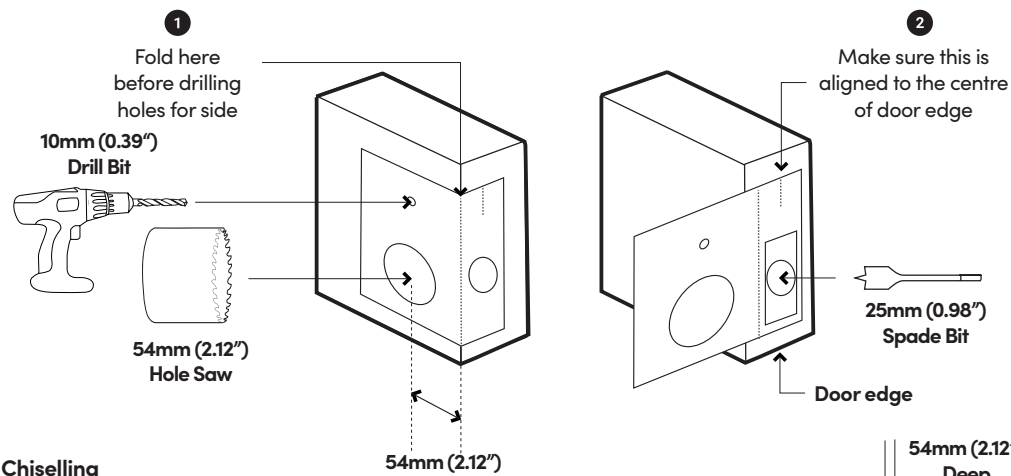

Chiselling

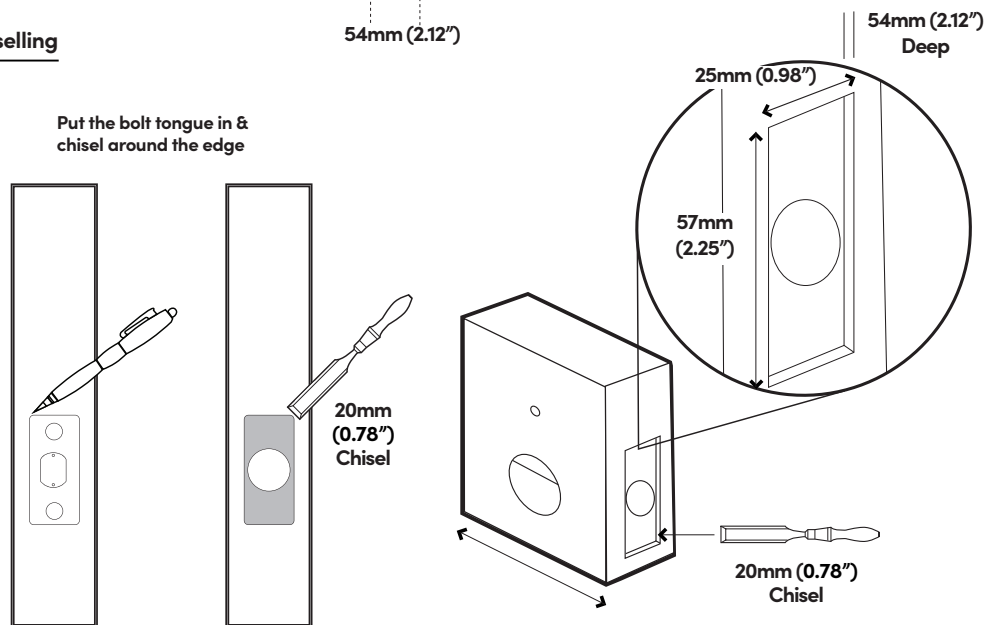

 Mark the center of the holes and then drill for accuracy.


Prepare Lock For Installation

1 Set Back Assembly for Left / Right Hand Installation

Left Hand Installation

Set the toggle to 'L' for left-hand installation



** Hinge is on your left.*




Right Hand Installation

Set the toggle to 'R' for right-hand installation

** Hinge is on your right.*

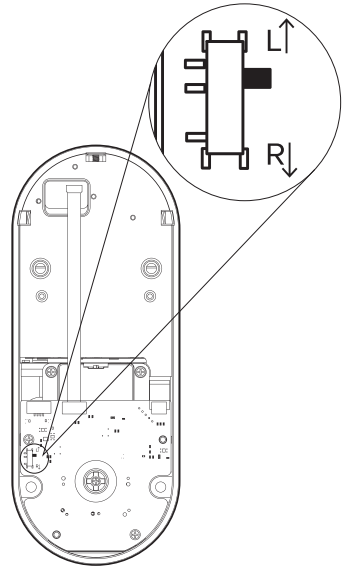


2 Remove Battery Cover from the Back Assembly

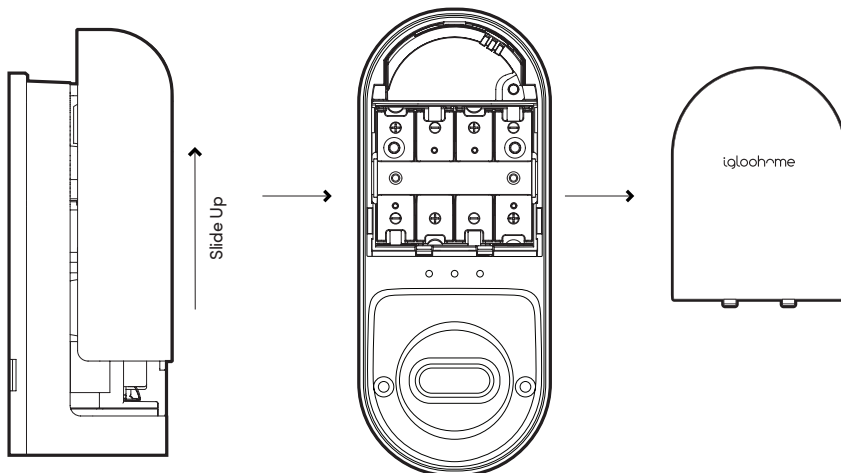

Installation Instructions


1 Measure

If you are replacing your current deadbolt lock, industry standards are 60mm (2.36") or 70mm (2.75") backset. To determine which backset length you should use, so measure the distance (x) between the center of 54mm (2.12") hole to door edge.

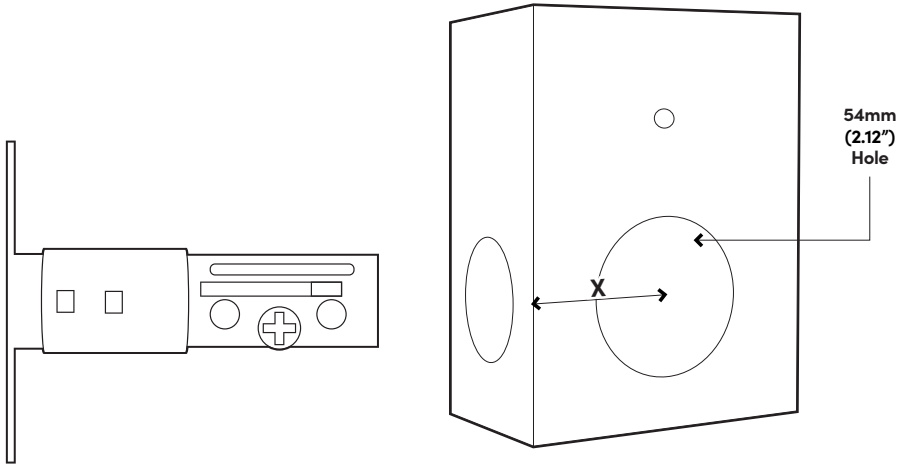


Prepare bolt assembly based on the distance (x)

Bolt ships with bolt assembly in 60mm (2.36") position. If required, twist the bolt and pull to extend (Simultaneously) to 70mm (2.75") backset position.

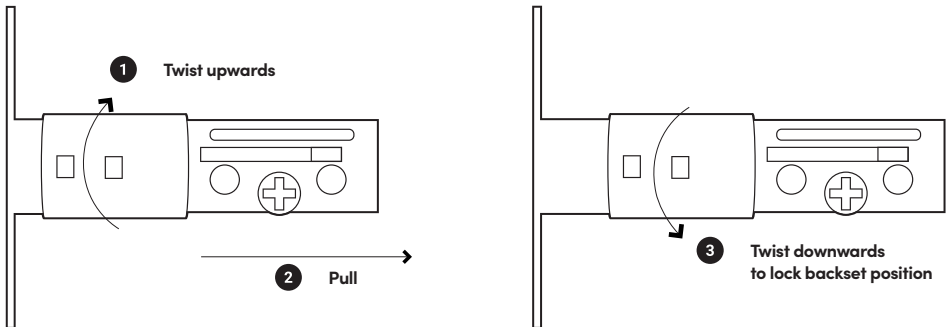

2 Insert bolt and front assembly into door edge


The '+' hole on the backset should be in the middle of the hole.

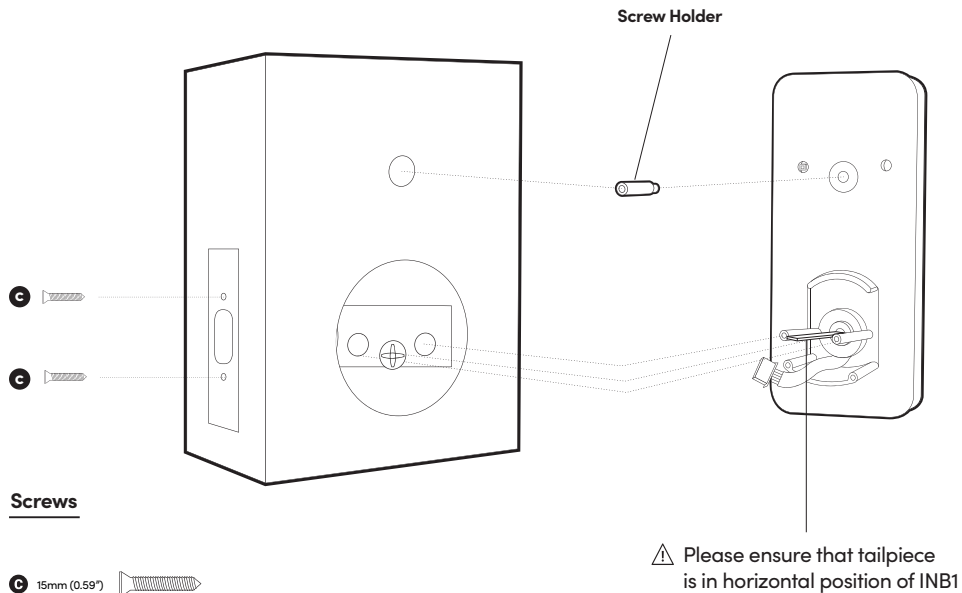

3 Measure and cut the tailpiece if necessary

After inserting the tailpiece, measure the distance of protrusion from the door.

If the door thickness is 70–80mm, you will not need to cut tailpiece during installation.

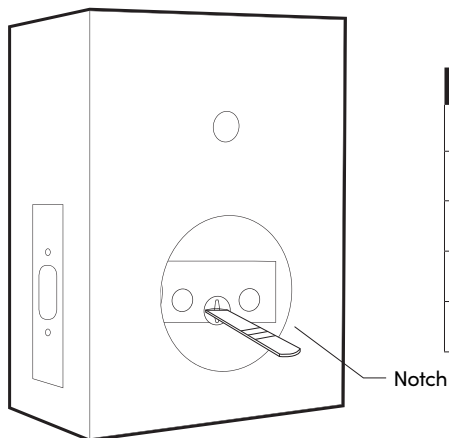


Door thickness (mm)	No. of notch to cut
65	1
60	2
55	3
50	4
45	5

⚠ The recommended tailpiece protrusion from the door is 15mm (0.6").

4 Secure the Front Assembly using the Back Plate.

To do this, place the Back Plate (ensuring the correct side placement).

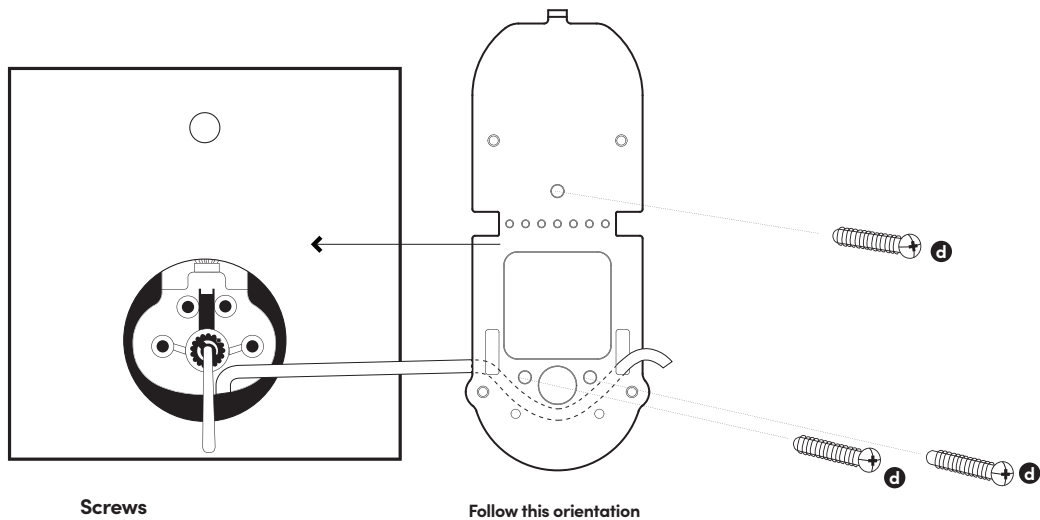

d 40mm (1.57")




5 Door Sensor Installation

Adjust the position of the door sensor according to the door handling (left or right hand installation). Use the 2 x 5mm (0.24") screws to secure the door sensor to the back plate.

Right-hand Installation

Left-hand Installation

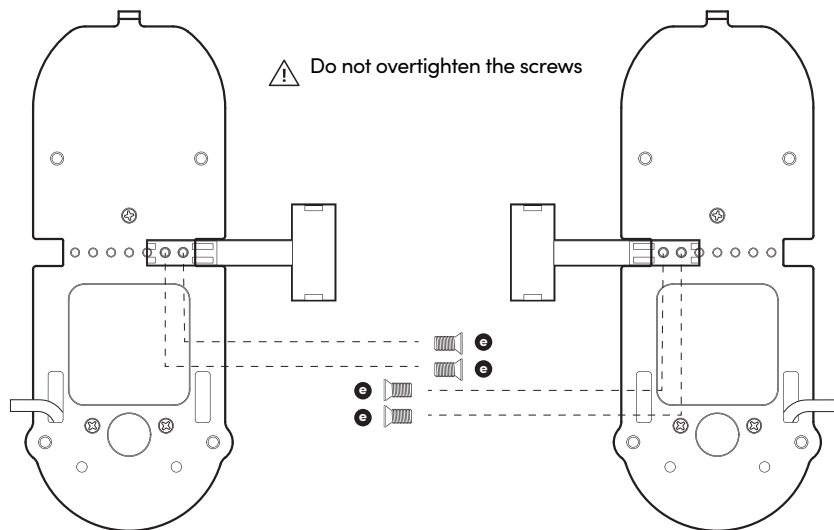


e 4mm (0.16")




6 Fit in the Rubber Gasket

Insert the front assembly cable through the rectangular hole on the rubber gasket. The hole should be on the right side of the rubber gasket.

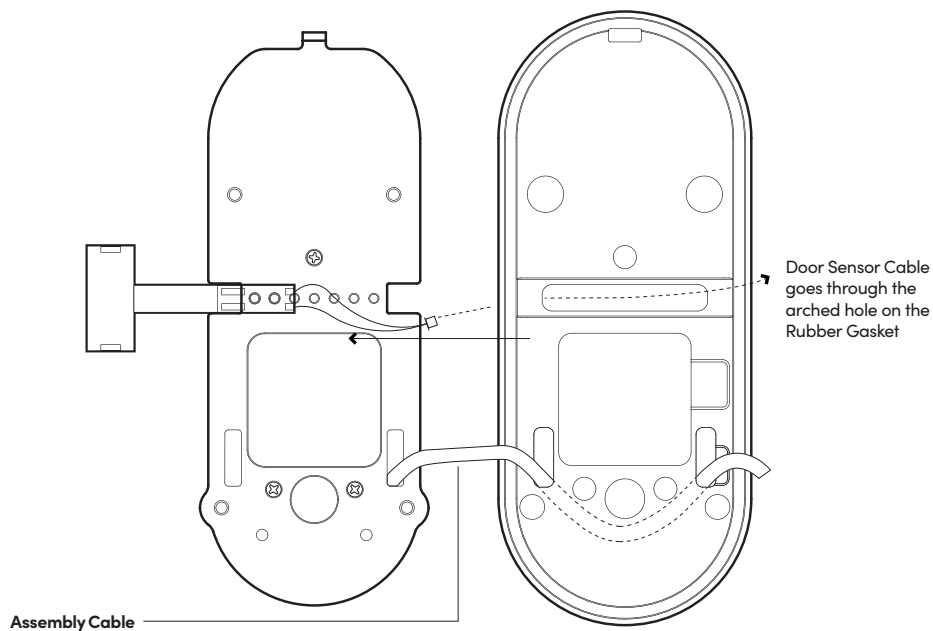


Right-hand Installation

Left-hand Installation

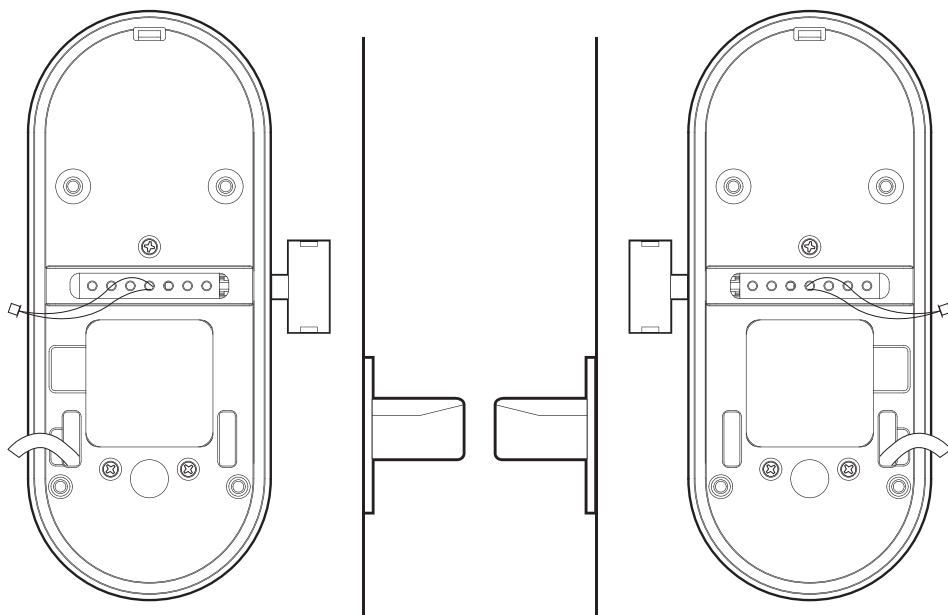

7 Connect Assembly Cable


Connect the sensor cable to the Back Assembly then connect the assembly cable from the Front assembly through the 54mm (2.12") hole to the Back Assembly. Ensure that the wire is installed properly and securely.

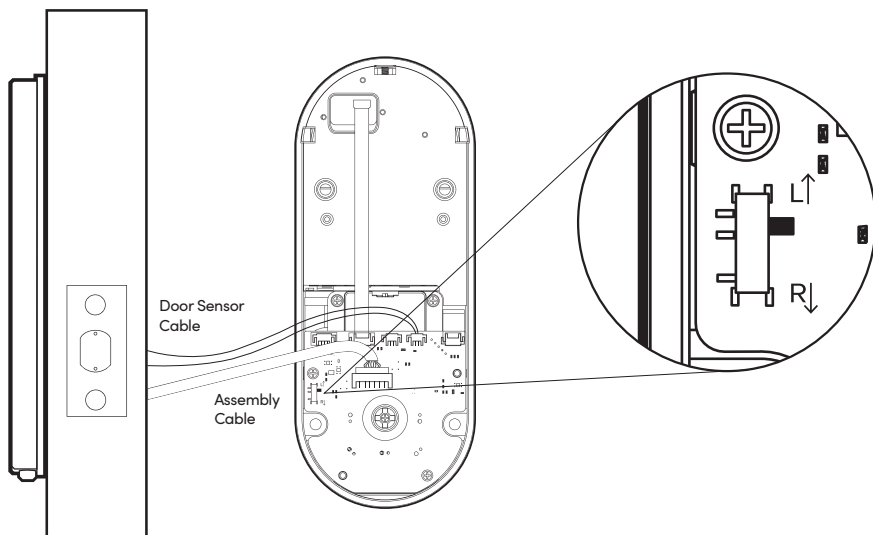


8 Fit Back Assembly to the Door Tailpiece

Ensure thumbturn position is turned to 'unlock' position.

Right-hand Installation

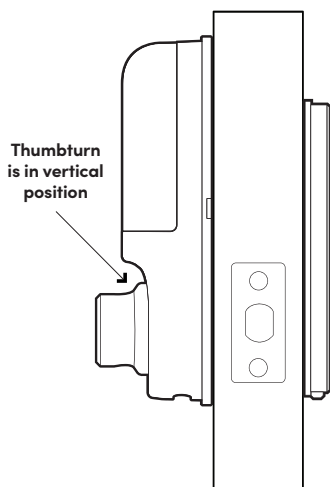

Left-hand Installation

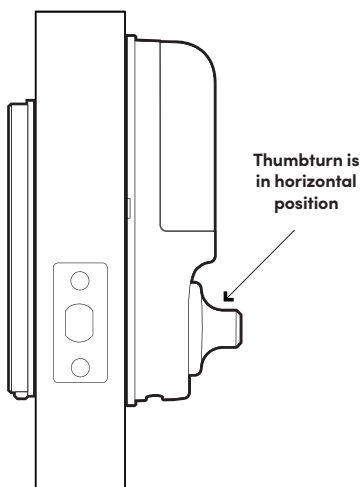


9 Secure the Back Assembly

 Do not overtighten the screws


Screws

 8mm (0.31")

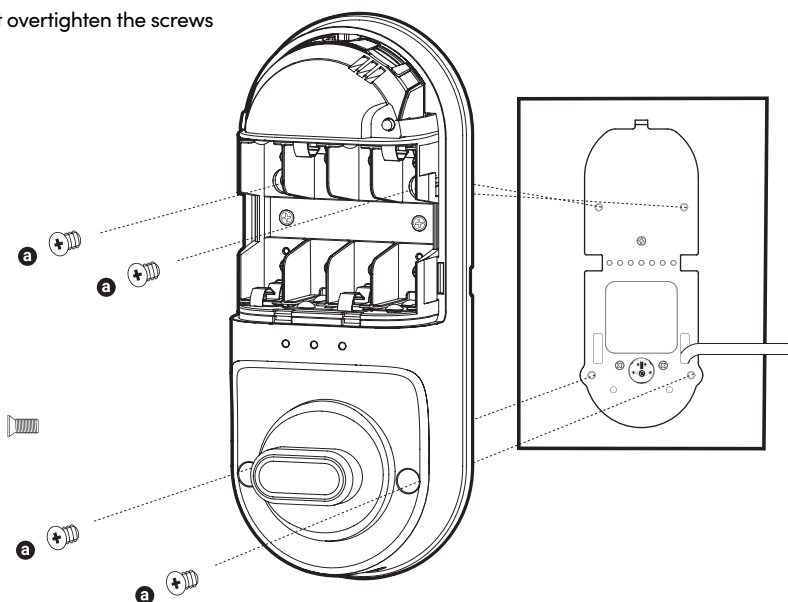


10 Install SIM Card to the Communications Module


Remove the communications module from the top of the unit. On the bottom of the communications module, you'll see a SIM card sticker label and a SIM card slot. Insert your SIM card into the SIM card slot following the SIM card sticker label direction.

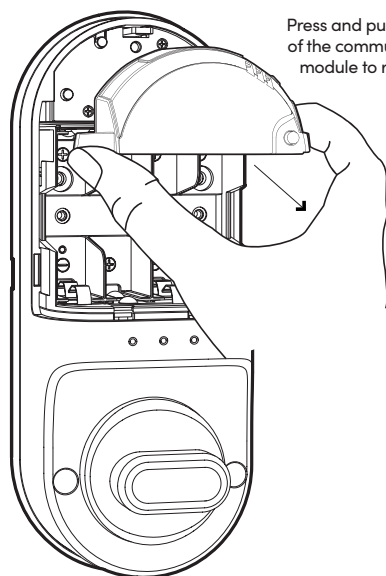

Press and pull the ends of the communications module to release it



Insert SIM card according to the Sticker Label direction





The SIM card has to be an IoT SIM card, please reach out to your local internet service providers for getting the IoT SIM cards.


11

Insert 8 AA Alkaline Batteries and slide the battery cover downwards to close

Before inserting the batteries, please ensure the ribbon is spread across the battery compartment for easier battery removal in the future. It is optional to secure the battery cover further with the additional screw.

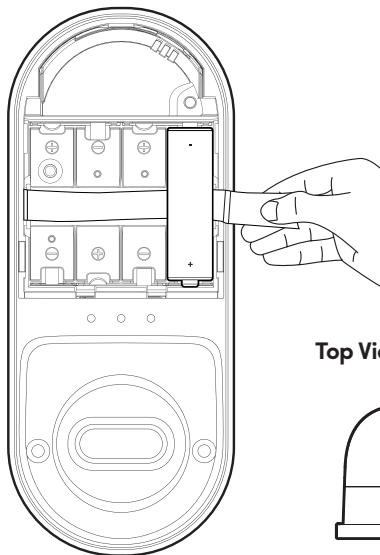
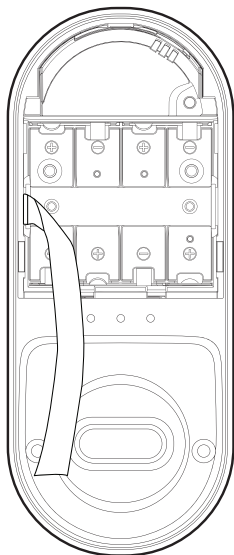


Top View of Battery Cover




Tighten the screw from the top to further secure the battery cover

Side View

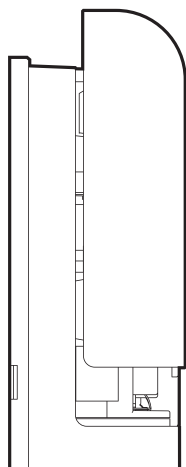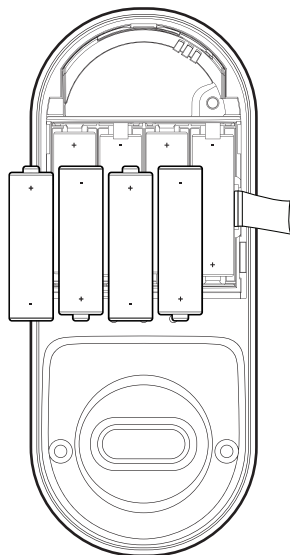

Slide Down

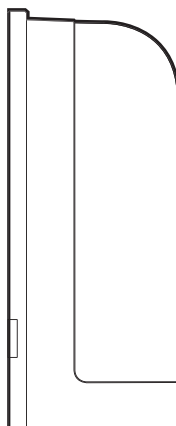


Screws

6mm (0.24")



Test Lock

Place hand over your lock to activate touchpad and hold 'Unlock' icon to lock.

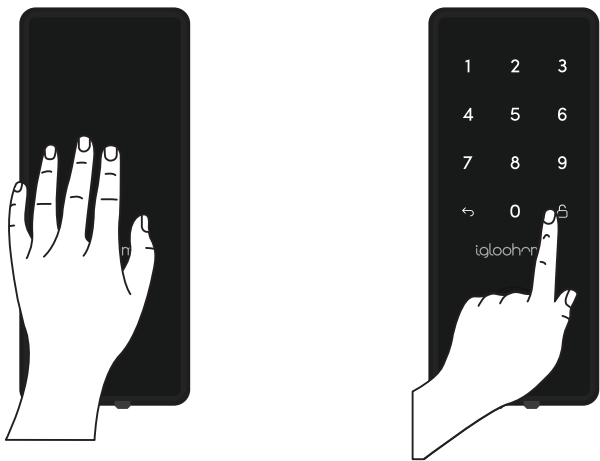

Does your bolt lock?

Yes

Congrats!
Your lock is correctly installed.
Proceed to next steps.


No

Bummer!
Does the bolt lock and unlock
when you turn the thumbturn?

Yes

Left-Right toggle
incorrectly set

Troubleshoot: Try Setting the
left-right toggle on your back
assembly to the correct side.
(See Pg. 10)



No

Tailpiece and/or thumbturn
incorrectly set

Troubleshoot: Disassemble lock
and install it again.


Still experiencing issues?
Go to igloohome.co/support for more help

Prepare the Door Frame

- 1

Ensure to align the lock to the door frame and mark it down.
- 2



Mark out where the bolt tongue locks then drill a corresponding hole on door frame. Chisel to fit the strike plate in as well.

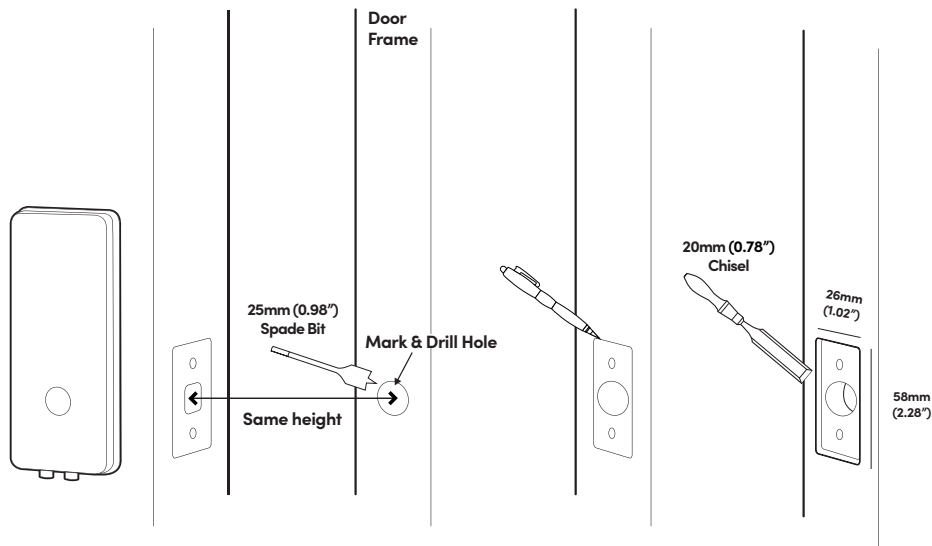

- 3

Secure strike plate housing and strike plate using 2x 25mm (0.98") wood screws.
- 4


Paste the magnet opposite the door sensor.

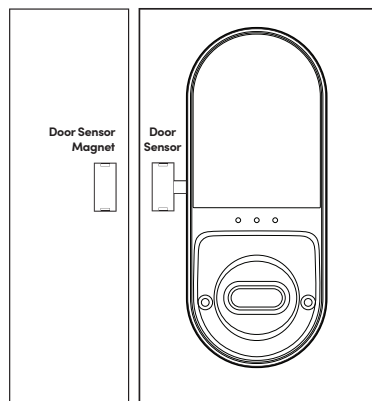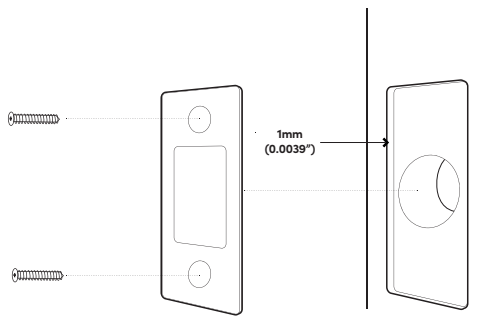

User Guide

Lock Anatomy

Front & Back Assembly

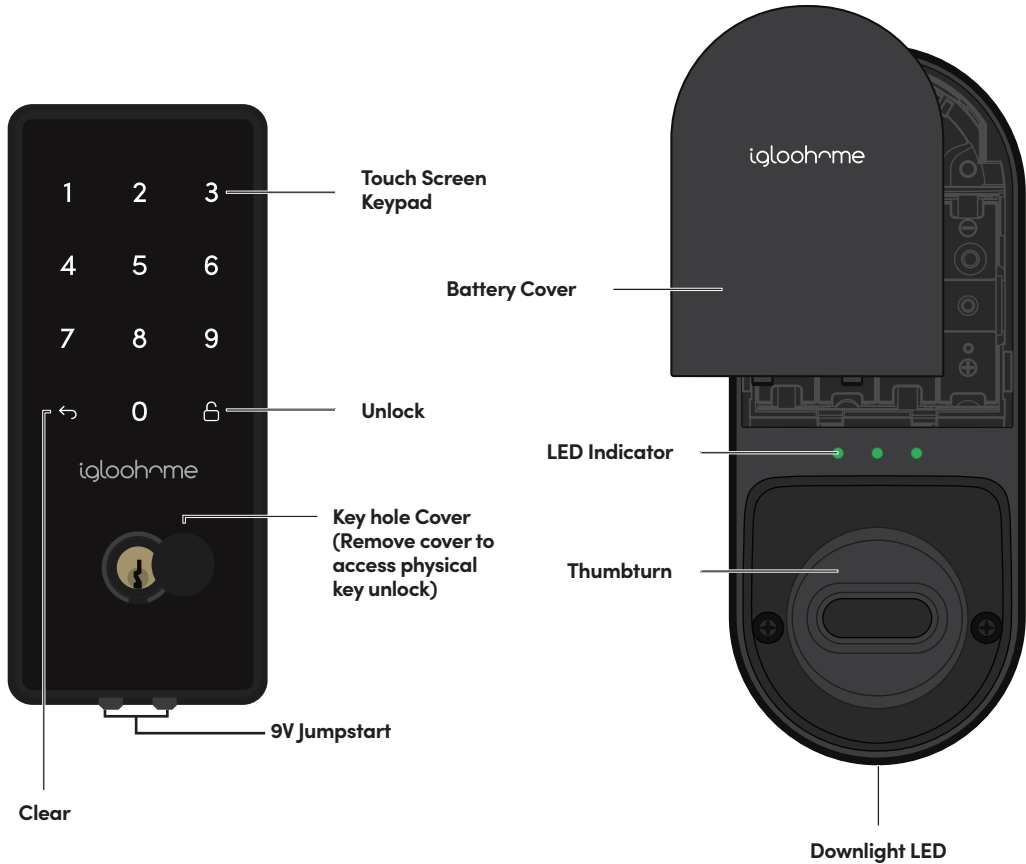

Features

PIN / Bluetooth Unlock



Master PIN Code

The igloohome Smart IoT Deadbolt unlocks with a permanent Master PIN Code.



User PIN Code

The iglooworks management dashboard can generate multiple types of User Pin codes, e.g. One-Time, Permanent & Duration.



Bluetooth Key

The igloohome Smart IoT Deadbolt unlocks with Bluetooth via the app.

Lock



Auto Re-lock

The igloohome Smart IoT Deadbolt relocks automatically when door is closed. User can configure the delay or deactivate relock if they prefer to. Do note that function will only work when Sensor is installed.



Manual Locking

Hold the 'Unlock' button for 1 second to manually lock the Smart IoT Deadbolt. It also can be locked by manually rotating the thumbturn from the inner side of the door.

Battery



Emergency Jump-Start

If battery power is drained, an external 9 Volt battery can be used to provide emergency power. The 2 contact points of the battery must be aligned with the 2 contact points on the Smart IoT Deadbolt for 2 seconds.

Features

Security / Alarms



Keypad Security Lockout

Be assured with an additional layer of security with the keypad lockout if the keypad is being tampered. User can configure number of incorrect attempts to trigger lockout.



Activity Logs

Entry via PIN codes and Bluetooth Key will be logged in the app.

Bluetooth key access logs are updated in real-time and PIN code access logs are updated when the owner uses a bluetooth key or update logs.



Masking Security Code


Enter up to 8 digits before your PIN Code to reduce risk of intruders checking fingerprints.



Tamper Alarm

The lock will sound if intruders try to pry the lock from the door.

Unlocking & Locking

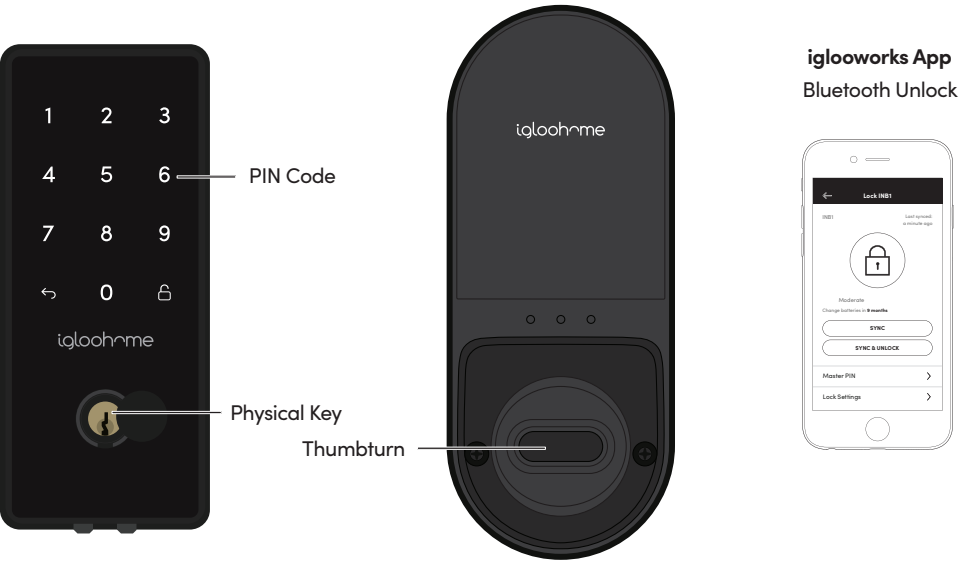

Unlocking



PIN Code
Key in your PIN code and press 'Unlock' icon



Bluetooth Unlock
On your app, click on the Bluetooth Unlock button and tap on your lock



Thumbturn
Use thumbturn at the back of lock



Physical Key
Use the physical key to unlock the door

Locking



'Unlock' Key
Press and hold 'Unlock'



Physical Key
Use the physical key to lock the door



Auto Re-Lock
Works only with the Re-lock Sensor



Thumbturn
Use thumbturn at the back of lock

Lock Pairing & Provisioning

1 Test Factory PIN Unlock

In the factory mode (before pairing), the PIN to unlock is ↩1234567890 🗝

2 Register as a Admin/Owner

- a) Use the iglooworks management dashboard to send invitation of registration to the user.
- b) Create the account via the link in the invitation and login.

3 Pairing

- a) Click on the 3 dashes on the top left of the screen, and select **[Pair New Lock]**.
- b) Select which property you would like to pair the lock with
- c) Select IoT Deadbolt
- d) Follow the instruction displayed on the screen to pair the lock.




4 Connect to the IoT Network

You can either connect to the IoT network right after the pairing is completed or click on the top banner on the lock's page to initiate the network connection.

- a) the lock will attempt to connect to the IoT network automatically
- b) If the automatic connection is failed, you may manually set up the network parameters.
Please contact your IoT SIM card service provider for these information.

Note: please make sure you have already inserted a valid IoT SIM card to the lock.
If not, refer to point 10.

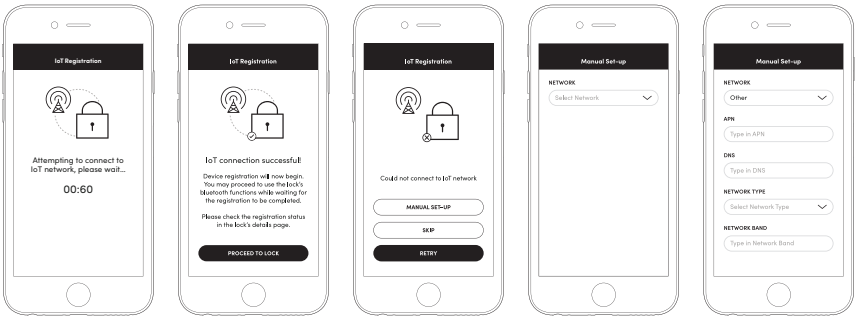

iglooworks App Functions

1 Setting Master PIN code

Before proceeding, turn on your Bluetooth and ensure that you are within Bluetooth range of the lock.

Go to the lock page and select **[Master PIN]**.

2 Setting the Lock's Beep Volume

Go to the lock's page, select **[Lock Settings]**, select **[Set beep volume]**,

Choose your preferred volume from the choices provided, click on the Apply Changes button on the bottom of the page.

3 Enabling or Disabling the Auto Relock Function

Go to the lock's page, select **[Lock Settings]**, select **[Auto Relock]**,

Switch the function on or off, click on the Apply Changes button on the bottom of the page.

4 Setting the Auto Relock Timer

Go to the lock's page, select **[Lock Settings]**, select **[Set relock timer]**,

Choose the length of time that suits you the most, click on the Apply Changes button on the bottom of the page.

5 Setting the Security Lockout Function

Go to the lock's page, select **[Lock Settings]**, select **[Security Lockout]**,

Choose the amount of failed attempts that you would allow, click on the Apply Changes button on the bottom of the page.

Lock Behaviour

Keypad Security Lockout

After several incorrect PIN code attempts, the igloohome Smart Smart IoT Deadbolt keypad will be locked out and the security alarm will be triggered.


Note: Physical key and Bluetooth Unlock can be used to unlock in this mode.

Keypad Security Lockout	
Triggered by	5 consecutive PIN Code attempts by default (Configurable via Bluetooth)
Disable By	After 1 / 5 / 10 Minutes or Any other unlocking methods
Behaviour	Single flash when keypad is triggered.
Duration	Please refer to table below.

Triggered	Security Alarm	Keypad Lockout
1st Time	30 Sec	1 Min
2nd Time	60 Sec	5 Min
3rd and Consecutive Time	90 Sec	10 Min

9V Jumpstart Feature

1. Touch and hold the battery contacts against the 9V jumpstart pin on the lock and you will hear a series of beeps and the keypad will light up.
2. While holding the 9V battery to the jumpstart, key in your PIN code on the keypad followed by the 'Unlock' icon

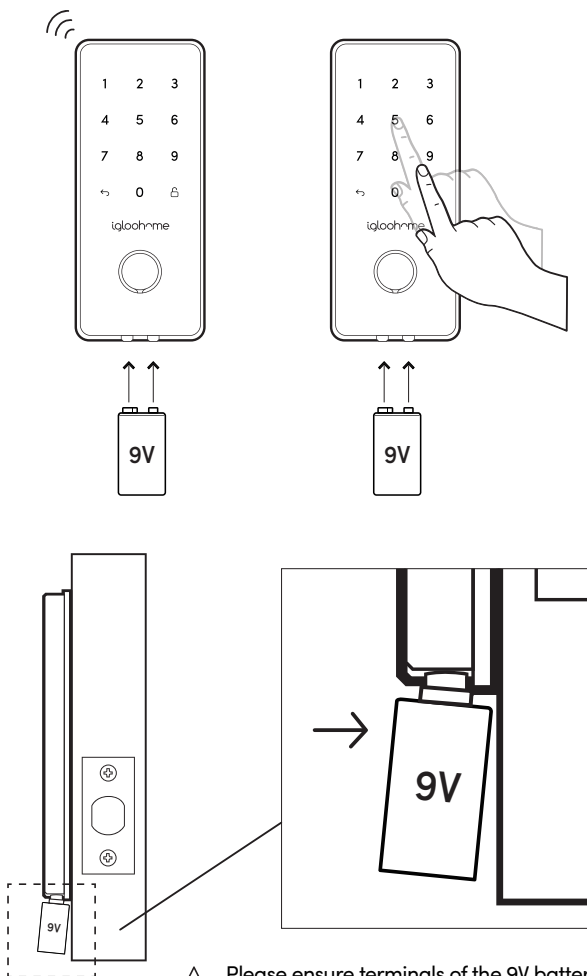

Please ensure terminals of the 9V battery are in contact with the Jump Start contact points of the lock for **2 seconds** to activate your Smart IoT Deadbolt.

Audio and LED indications

Actions	Indications
Bluetooth Connection	'Unlock' icon flashes Blue
Successfully Unlocked	4 fast ascending tones after unlocked
Successfully Locked	1 long beep after lock is locked
Incorrect PIN	4 short beeps
Deleted PIN	3 sets of 4 short beeps
Obstruction Alarm	6 sets of 4 short beeps
Keypad Disabled Mode Activated	Very long beep
Keypad Disabled Mode Deactivated	2 short beeps
Keypad Security Lockout Alarm	Low-high siren for 30 / 60 / 90 seconds
Keypad Security Lockout Deactivated	2 long beeps
Low Battery Alert	3 fast descending tones when keypad is woken up
Tamper Alarm	Keep long beep
Hard Reset / Unpair	4 slow descending tones

Troubleshoot

The lock is not responding at all.

- The lock's battery is flat.
- Use an Alkaline 9V Battery to jumpstart the lock and unlock the lock to replace the batteries once you are able to access the battery compartment.

The deadbolt keypad flashes when I activate the keypad.

- If the keypad flashes once, the Keypad Security Lockout is triggered.
- If the keypad flashes twice, the Keypad Disabled Mode is activated.
- Refer to page 25 for details.

I tried to use a 9V Battery to jump start the lock but was unable to.

- Please ensure terminals of the 9V Battery are in contact with the jump-start contact points of the lock for 2 seconds to activate the lock.
- The 9V Battery terminals must be in constant contact with the lock 9V contact pins while unlocking it with PIN code or Bluetooth.

The deadbolt is locking when it is supposed to unlock or unlock when it is supposed to lock.

- Check the L/R toggle and ensure that it is at the correct side.
- Refer to page 9 for details.

The deadbolt failed to connect to the IoT network.

- Check if your IoT SIM card provider has IoT Network coverage at the lock's place
- Check if you have inserted an [IoT SIM Card] in the correct direction.
- Check with your IoT SIM card provider about the network setting details and try manually setting up the connection

I have generated my PINs from the app but it doesn't work.

- Do a Bluetooth Unlock or sync and try again.
- Make sure that the generated PIN codes are activated within the activation period before it expires.

Auto Relock is not working.

- Check if the Relock Sensor is installed correctly.
- Check if Auto Relock is switched on in the mobile app.
- Check if Keypad Disabled Mode or Passage Mode is deactivated.

My lock gives a 3 descending tones every time I activate the keypad.

- The battery is low in battery.
- Unlock the lock to replace the batteries once you are able to access the battery compartment.

I can't scan the QR sticker as it's worn out.

- Use the spare QR sticker that is provided in the igloohome Smart IoT Deadbolt box.

The lock is beeping loudly continuously and none of the functions work.

- The tamper alarm is triggered.
- Please ensure that cable between the front and back body are well connected.

Warning:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE: This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter

RF Exposure Statement

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance of 20cm the radiator your body. This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter

For enquiries go to:
igloohome.co/support