



FCC Part 15, Subpart B, Class B

ARTIKA FOR LIVING INC.

Denali Pendant 3CCT

Test Model: PDT-DEC-BL (MD7981-1)

Additional Model No.: PDT-DEC-XXXXXX("XXXXXX" can be A to Z and/or 0 to 9 and/or blank
(commercial code))

Prepared for : ARTIKA FOR LIVING INC.
Address : 1756 50th avenue, Lachine, Qc, Canada H8T 2V5

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : March 11, 2022
Number of tested samples : 2
Sample No. : 220301139A
Serial number : Prototype
Date of Test : March 11, 2022 ~ March 30, 2022
Date of Report : April 07, 2022



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: (+86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



FCC Part 15, Subpart B, Class B
FCC 47 CFR Part 15 Subpart B, Class B, ANSI C63.4 -2014

Report Reference No. : LCS220301139AE

Date Of Issue : April 07, 2022

Testing Laboratory Name : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China

Testing Location/ Procedure : Full application of Harmonised standards ■
Partial application of Harmonised standards □
Other standard testing method □

Applicant's Name : **ARTIKA FOR LIVING INC.**

Address : 1756 50th avenue, Lachine, Qc, Canada H8T 2V5

Test Specification

Standard : FCC 47 CFR Part 15 Subpart B, Class B, ANSI C63.4 -2014

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. is acknowledged as copyright owner and source of the material. SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description : **Denali Pendant 3CCT**

Test Model : PDT-DEC-BL (MD7981-1)

Trade Mark : HIFLY, ARTIKA

Ratings : Input: AC 120V, 60Hz, 27W

Result : **Positive**

Compiled by:

Vera Deng/ Administrator

Supervised by:

Jin Wang/ Technique principal

Approved by:

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**FCC -- TEST REPORT**

Test Report No. :	LCS220301139AE	<u>April 07, 2022</u> Date of issue
--------------------------	-----------------------	--

Test Model	: PDT-DEC-BL (MD7981-1)
EUT.....	: Denali Pendant 3CCT
Applicant.....	: ARTIKA FOR LIVING INC.
Address.....	: 1756 50th avenue, Lachine, Qc, Canada H8T 2V5
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: HIFLY ILLUMINATION CO.,LIMITED
Address.....	: No. 2, Nanfeng Second Street, Guzhen Town, Zhongshan City
Telephone.....	: /
Fax.....	: /
Factory.....	: HIFLY ILLUMINATION CO.,LIMITED
Address.....	: No. 2, Nanfeng Second Street, Guzhen Town, Zhongshan City
Telephone.....	: /
Fax.....	: /

Test Result according to the standards on page 6:	Positive
--	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Revision History

Report Version	Issue Date	Revision Content	Revised By
000	April 07, 2022	Initial Issue	--



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



TABLE OF CONTENTS

Test Report Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	6
1.1. Description of Standards and Results.....	6
2. GENERAL INFORMATION	7
2.1. Description of Device (EUT)	7
2.2. Support Equipment List.....	7
2.3. Description of Test Facility	8
2.4. Statement of the Measurement Uncertainty	8
2.5. Measurement Uncertainty	8
3. TEST RESULTS	9
3.1. POWER LINE CONDUCTED EMISSION MEASUREMENT.....	9
3.2. Radiated emission Measurement	13
4. TEST SETUP PHOTOGRAPHS OF EUT.....	17
5. EXTERIOR PHOTOGRAPHS OF THE EUT	17
6. INTERIOR PHOTOGRAPHS OF THE EUT	17





1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	FCC 47 CFR Part 15 Subpart B, Class B, ANSI C63.4 -2014	Class B	PASS
Radiated disturbance	FCC 47 CFR Part 15 Subpart B, Class B, ANSI C63.4 -2014	Class B	PASS
N/A is an abbreviation for Not Applicable.			

Test mode:		
Mode	Lighting	Record
***Note: All test modes were tested, but we only recorded the worst case in this report.		



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT	: Denali Pendant 3CCT
Trade Mark	: HIFLY, ARTIKA
Test Model	: PDT-DEC-BL (MD7981-1)
Additional Model	: PDT-DEC-XXXXXXX("XXXXXXX" can be A to Z and/or 0 to 9 and/or blank (commercial code))
Model Declaration	: PCB board, structure and internal of these model(s) are the same, So no additional models were tested
Power Supply	: Input: AC 120V, 60Hz, 27W
Highest internal frequency (Fx)	: $F_x \leq 108 \text{ MHz}$

Highest internal frequency (Fx)	Highest measured frequency
$F_x \leq 108 \text{ MHz}$	1 GHz
$108 \text{ MHz} < F_x \leq 500 \text{ MHz}$	2 GHz
$500 \text{ MHz} < F_x \leq 1 \text{ GHz}$	5 GHz
$F_x > 1 \text{ GHz}$	$5 \times F_x$ up to a maximum of 6 GHz
NOTE 1 For FM and TV broadcast receivers, Fx is determined from the highest frequency generated or used excluding the local oscillator and tuned frequencies. Where Fx is unknown, the radiated emission measurements shall be performed up to 6 GHz.	

2.2. Support Equipment List

Name	Manufacturers	M/N	S/N
--	--	--	--





2.3. Description of Test Facility

Site Description

EMC Lab.

: NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

Test Firm Registration Number: 254912.

2.4. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

2.5. Measurement Uncertainty

Test	Parameters	Expanded Uncertainty (U _{lab})	Expanded Uncertainty (U _{cispr})
Conducted Emission	Level accuracy (9kHz to 150kHz)	± 2.63 dB	± 3.8 dB
	(150kHz to 30MHz)	± 2.35 dB	± 3.4 dB
Radiated Emission	Level accuracy (30MHz to 1000MHz)	± 3.48 dB	± 5.3 dB
Radiated Emission	Level accuracy (above 1000MHz)	± 3.90 dB	± 5.2 dB

(1) Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus.

(2) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.





3. TEST RESULTS


3.1. POWER LINE CONDUCTED EMISSION MEASUREMENT

3.1.1. Test Equipment

The following test equipments are used during the power line conducted measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Receiver	R&S	ESCI	101142	2021-06-08	2022-06-08
2	10dB Attenuator	SCHWARZBECK	VTSD9561-F	9561-F159	2021-06-08	2022-06-08
3	Artificial Mains Network	SCHWARZBECK	NSLK8127	8127716	2021-06-08	2022-06-08
4	EMI Test Software	EZ	EZ EMC	N/A	/	/
5	Asymmetric Artificial Network	SCHWARZBECK	NTFM 8158	NTFM8158#120	2021-06-08	2022-06-08
6	Voltage Probe	SCHWARZBECK	KT 9420	9420401	2021-06-08	2022-06-08
7	No. 2 shielded Room	CHENGYU	843	/	2020-06-16	2023-06-16

3.1.2. Block Diagram of Test Setup

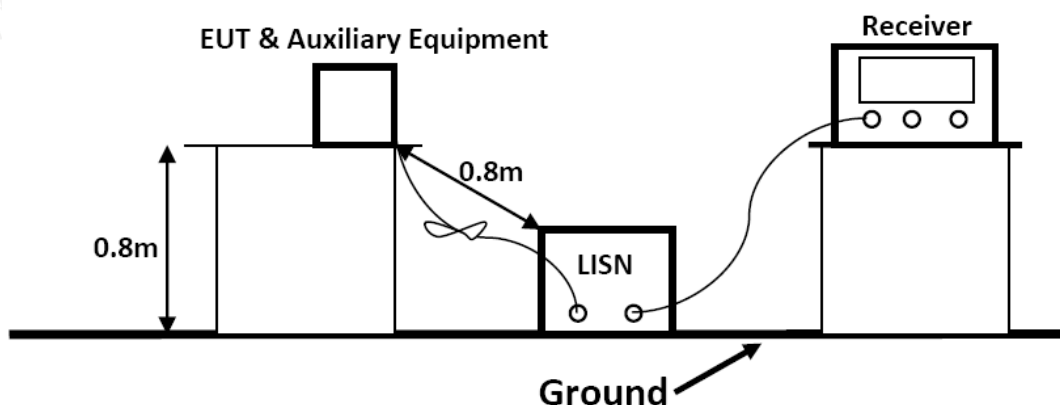

3.1.3. Test Standard

Power Line Conducted Emission Limits (Class B)

Frequency (MHz)			Limit (dBμV)	
			Quasi-peak Level	Average Level
0.15	~	0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50	~	5.00	56.0	46.0
5.00	~	30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.

NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

3.1.4. EUT Configuration on Test

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



3.1.5. Operating Condition of EUT

3.1.5.1. Setup the EUT as shown on Section 3.1.2

3.1.5.2. Turn on the power of all equipments.

3.1.5.3. Let the EUT work in measuring Lighting and measure it.

3.1.6. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC/ANSI C63.4-2014 on Conducted Emission Measurement.

The bandwidth of the test receiver is set at 9kHz.

The frequency range from 150kHz to 30MHz is investigated

3.1.7. Test Results


PASS.

The test result please refer to the next page.





Test Model	PDT-DEC-BL(MD7981-1)	Test Mode	Lighting
Environmental Conditions	23.9℃, 53% RH	Test Engineer	Monkey Li
Pol	Line	Test Voltage	AC 120V/60Hz

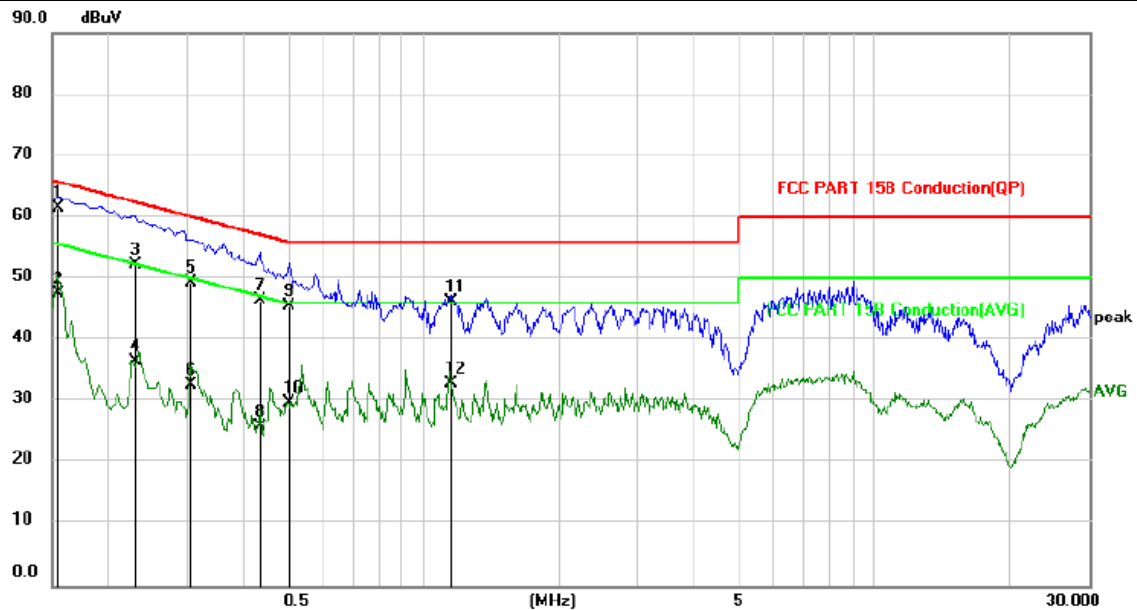


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1	*	0.1548	51.36	10.24	61.60	65.74	-4.14	QP	
2		0.1548	37.36	10.24	47.60	55.74	-8.14	AVG	
3		0.2308	42.15	10.22	52.37	62.42	-10.05	QP	
4		0.2308	26.45	10.22	36.67	52.42	-15.75	AVG	
5		0.3045	39.25	10.20	49.45	60.12	-10.67	QP	
6		0.3045	22.53	10.20	32.73	50.12	-17.39	AVG	
7		0.4333	36.27	10.20	46.47	57.19	-10.72	QP	
8		0.4333	15.76	10.20	25.96	47.19	-21.23	AVG	
9		0.5043	35.36	10.20	45.56	56.00	-10.44	QP	
10		0.5043	19.62	10.20	29.82	46.00	-16.18	AVG	
11		1.1548	35.96	10.20	46.16	56.00	-9.84	QP	
12		1.1548	22.85	10.20	33.05	46.00	-12.95	AVG	





Test Model	PDT-DEC-BL (MD7981-1)	Test Mode	Lighting
Environmental Conditions	23.9℃, 53% RH	Test Engineer	Monkey Li
Pol	Neutral	Test Voltage	AC 120V/60Hz

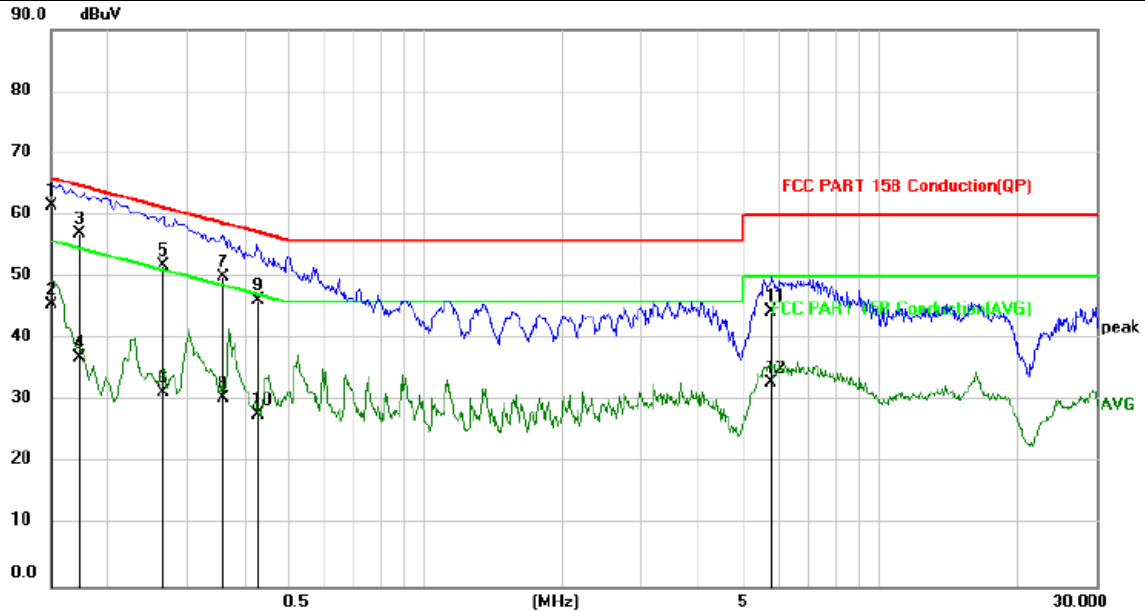

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1500	51.26	10.24	61.50	66.00	-4.50	QP	
2		0.1500	35.36	10.24	45.60	56.00	-10.40	AVG	
3		0.1736	46.75	10.23	56.98	64.79	-7.81	QP	
4		0.1736	26.76	10.23	36.99	54.79	-17.80	AVG	
5		0.2639	41.69	10.21	51.90	61.31	-9.41	QP	
6		0.2639	21.26	10.21	31.47	51.31	-19.84	AVG	
7		0.3585	39.79	10.20	49.99	58.76	-8.77	QP	
8		0.3585	20.32	10.20	30.52	48.76	-18.24	AVG	
9		0.4302	35.99	10.20	46.19	57.25	-11.06	QP	
10		0.4302	17.66	10.20	27.86	47.25	-19.39	AVG	
11		5.7493	34.21	10.20	44.41	60.00	-15.59	QP	
12		5.7493	22.86	10.20	33.06	50.00	-16.94	AVG	

***Note: 1) Pre-scan all modes and recorded the worst case results in this report.

2) Margin=Reading level + Correct - Limit



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




3.2. Radiated emission Measurement

3.2.1. Test Equipment


The following test equipments are used during the radiated emission measurement:

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2021-06-15	2024-06-15
2	EMI Test Receiver	R&S	ESCI3	101010	2021-06-08	2022-06-08
3	Spectrum Analyzer	Agilent	N9020A	MY49100699	2021-06-08	2022-06-08
4	Log-periodic Antenna	SCHWARZBECK	VULB9163	5094	2019-06-23	2022-06-23
5	Horn Antenna	ETS-LINDGREN	3115	00034771	2019-06-23	2022-06-23
6	EMI Test Software	EZ	EZ EMC	N/A	/	/
7	Positioning Controller	MF	BK8807-4A-2T	2016-0808-008	/	/
8	EMI Test Software	AUDIX	E3	/	N/A	N/A
9	Broadband Preamplifier	SCHWARZBECK	BBV9745	9719-025	2021-06-21	2022-06-20

3.2.2. Block Diagram of Test Setup

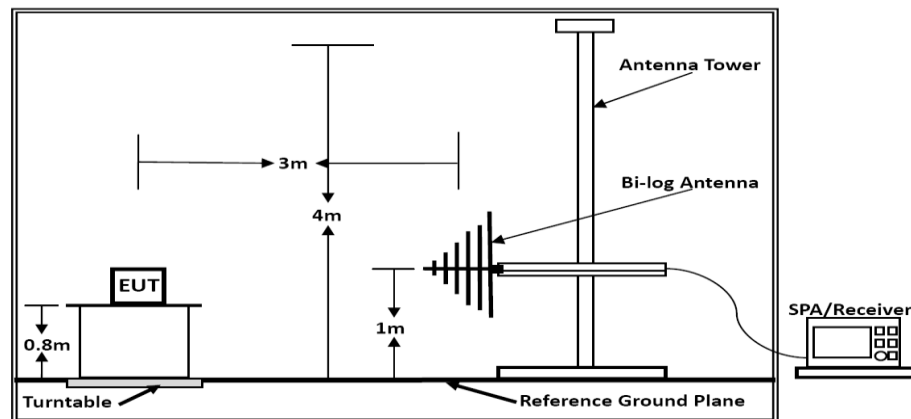

Below 1GHz

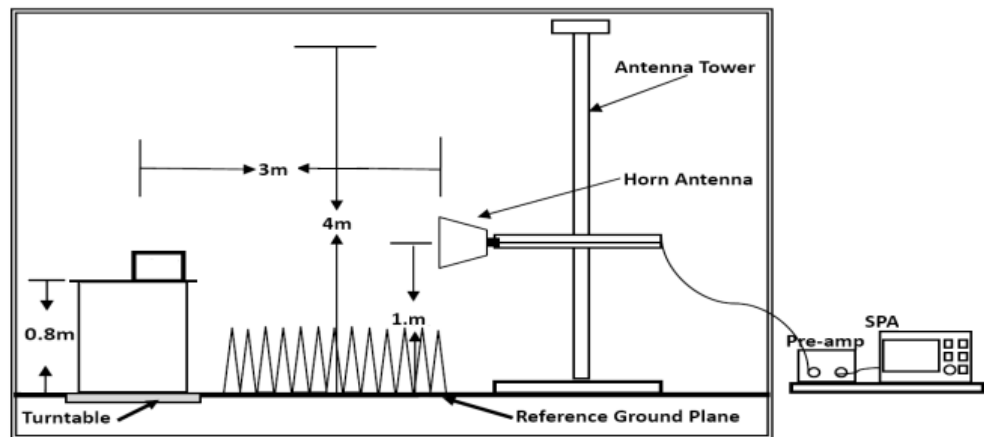

Above 1GHz





3.2.3. Radiated Emission Limit (Class B)

Limits for Radiated Disturbance Below 1GHz

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46
960 ~ 1000	3	500	54
Remark: (1) Emission level $(\text{dB})\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$ (2) The smaller limit shall apply at the cross point between two frequency bands. (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.			
Limits for Radiated Emission Above 1GHz			
Frequency (MHz)	Distance (Meters)	Peak Limit ($\text{dB}\mu\text{V/m}$)	Average Limit ($\text{dB}\mu\text{V/m}$)
Above 1000	3	74	54
***Note: The lower limit applies at the transition frequency.			

3.2.4. EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.2.5. Operating Condition of EUT

3.2.5.1. Setup the EUT as shown in Section 3.2.2.

3.2.5.2. Let the EUT work in test Lighting and measure it.

3.2.6. Test Procedure

EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated by-log antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2014 on radiated emission measurement.

The bandwidth of the EMI test receiver is set at 120kHz, 300kHz.

The frequency range from 30MHz to 1000MHz is checked.

3.2.7. Radiated Emission Noise Measurement Result

PASS.

The scanning waveforms please refer to the next page.



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Test Model	PDT-DEC-BL(MD7981-1)	Test Mode	Lighting
Environmental Conditions	23.9°C, 51% RH	Detector Function	Quasi-peak
Pol	Vertical	Distance	3m
Test Engineer	Monkey Li	Test Voltage	AC 120V/60Hz

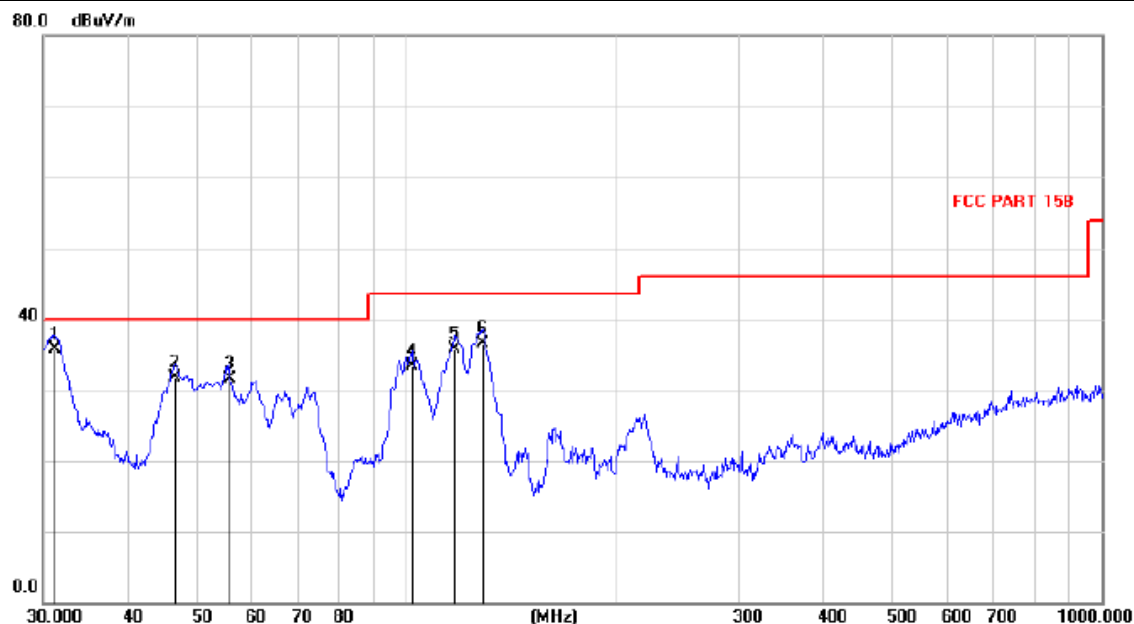

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
		MHz	Level	Factor	ment			Detector
			dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	31.2345	25.09	10.67	35.76	40.00	-4.24	QP
2		46.5642	19.51	12.10	31.61	40.00	-8.39	QP
3		55.6337	18.83	12.61	31.44	40.00	-8.56	QP
4		101.6889	22.68	10.72	33.40	43.50	-10.10	QP
5		117.6693	24.32	11.34	35.66	43.50	-7.84	QP
6		128.9015	25.64	10.91	36.55	43.50	-6.95	QP





Test Model	PDT-DEC-BL (MD7981-1)	Test Mode	Lighting
Environmental Conditions	23.9℃, 51% RH	Detector Function	Quasi-peak
Pol	Horizontal	Distance	3m
Test Engineer	Monkey Li	Test Voltage	AC 120V/60Hz



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		73.1987	14.97	10.26	25.23	40.00	-14.77	QP
2		119.2791	22.60	10.50	33.10	43.50	-10.40	QP
3	*	126.8835	24.74	9.61	34.35	43.50	-9.15	QP
4		179.3863	14.68	10.68	25.36	43.50	-18.14	QP
5		220.9074	13.84	12.38	26.22	46.00	-19.78	QP
6		353.5627	13.75	14.93	28.68	46.00	-17.32	QP

Note: Pre-Scan all mode, Thus record worse case mode result in this report.





4. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

5. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

6. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF TEST REPORT-----



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity