



DENSO International America, Inc.

BCM Module 125kHz, Model: B1NA5

FCC 2.1091:2021

Inductive

Report: ENTI0008.9



This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. This Report shall not be reproduced, except in full without written approval of the laboratory.

EAR-Controlled Data - This document contains technical data whose export and reexport/retransfer is subject to control by the U.S. Department of Commerce under the Export Administration Act and the Export Administration Regulations. The Department of Commerce's prior written approval may be required for the export or re-export/retransfer of such technical data to any foreign person, foreign entity or foreign organization whether in the United States or abroad.

More: <https://www.bis.doc.gov/index.php/forms-documents/regulations-docs/14-commerce-country-chart/fileT>

CERTIFICATE OF EVALUATION

Last Date of Evaluation: Monday, May 3, 2021
DENSO International America, Inc.
EUT: BCM Module 125kHz , Model: B1NA5

RF Exposure Evaluation

Standards

Specification	Method
FCC 2.1091:2021	FCC 447498 D01 General RF Exposure Guidance v06

Results

Method Clause	Description	Applied	Results	Comments
7.1	Maximum Permissible Exposure	Yes	Pass	None

Deviations From Evaluation Standards

None

Approved By:



Donald Facteau, Process Architect

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information. As indicated in the Statement of Work sent with the quotation, Element's standard process is to always use the latest published version of the test methods even when earlier versions are cited in the test specification. Issuance of a purchase order was de facto acceptance of this approach. Otherwise, the client would have advised Element in writing of the specific version of the test methods they wanted applied to the subject testing

REVISION HISTORY



Revision Number	Description	Date (yyyy-mm-dd)	Page Number
00	None		

ACCREDITATIONS AND AUTHORIZATIONS



United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB) and as a CAB for the acceptance of test data.

European Union

European Commission – Recognized as an EU Notified Body validated for the EMCD and RED Directives.

United Kingdom

BEIS – Recognized by the UK as an Approved Body under the UK Radio Equipment and UK EMC Regulations.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIT / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.



SCOPE

For details on the Scopes of our Accreditations, please visit:
<https://www.nwemc.com/emc-testing-accreditations>

FACILITIES



California Labs OC01-17 41 Tesla Irvine, CA 92618 (949) 861-8918	Minnesota Labs MN01-11 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	Oregon Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066	Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600
NVLAP				
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code:201049-0	NVLAP Lab Code: 200629-0
Innovation, Science and Economic Development Canada				
2834B-1, 2834B-3	2834E-1, 2834E-3	2834D-1	2834G-1	2834F-1
BSMI				
SL2-IN-E-1154R	SL2-IN-E-1152R	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI				
A-0029	A-0109	A-0108	A-0201	A-0110
Recognized Phase I CAB for ISED, ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA				
US0158	US0175	US0017	US0191	US0157

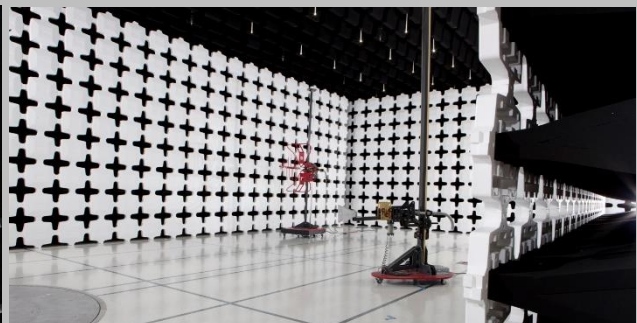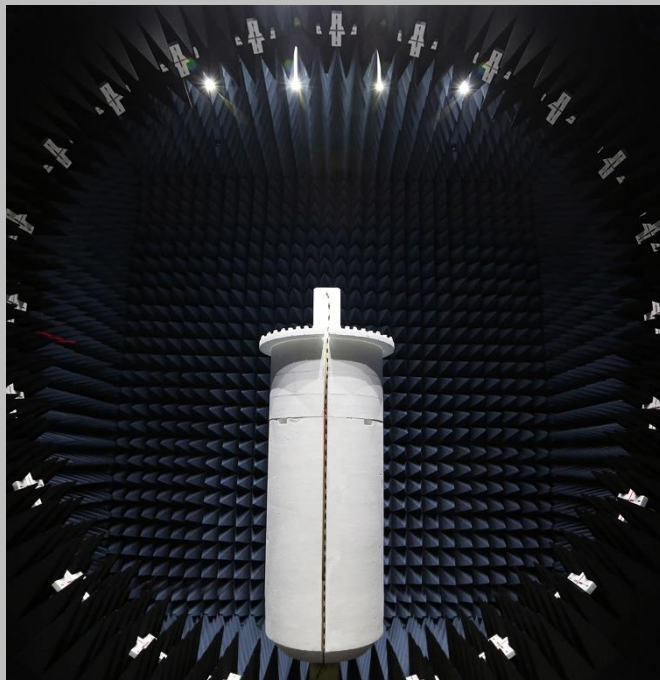

PRODUCT DESCRIPTION



Client and Equipment Under Evaluation Information

Company Name:	DENSO International America, Inc.
Address:	24777 Denso Drive
City, State, Zip:	Southfield, MI 48033
Evaluation Requested By:	Jason Summerford
EUT:	BCM Module 125kHz, Model: B1NA5
Date of Evaluation:	Monday, May 3, 2021

Information Provided by the Party Requesting the Evaluation

Functional Description of the Equipment:

The Passive Entry Passive Start System (PEPS) system is comprised of a BCM (Body control module), a maximum of 8 antennas, an UID (User Identification Device), and a RF Receiver, and is used for locking or unlocking the vehicle's door or starting the vehicle's engine.

Objective:

To demonstrate compliance with FCC RF exposure requirements for 2.1091 mobile devices.

RF Exposure Condition



The following RF Exposure conditions were used for the assessment documented in this report:	
Intended Use	Mobile
Location on Body (if applicable)	N/A
How is the Device Used	The B1NA5 is installed in a vehicle at a distance of greater than 20cm from the user.
Radios Contained in the Same Host Device	Inductive
Simultaneous Transmitting Radios	None
Body Worn Accessories	N/A
Environment	General Population/Uncontrolled Exposure

MAXIMUM PERMISSIBLE EXPOSURE (MPE)

OVERVIEW

Human exposure to RF emissions from mobile devices (47 CFR §2.1091) may be evaluated based on the MPE limits adopted by the FCC for electric and magnetic field strength and/or power density, as appropriate, since exposures are assumed to occur at distances of 20 cm or more from persons. ANSI C95.1:2005 + Amd 1:2010 specifies a minimum separation distance of 20 cm for performing reliable field measurements to determine adherence to MPE limits. If the minimum separation distance between a transmitter and nearby persons is more than 20 cm under normal operating conditions, compliance with MPE limits may be determined at such distance from the transmitter. When applicable, operation instructions and prominent warning labels may be used to alert the exposed persons to maintain a specified distance from the transmitter or to limit their exposure durations and usage conditions to ensure compliance. If the use of warning labels on a transmitter is not effective or desirable, the alternative of performing SAR evaluation with the device at its closest range to persons under normal operating conditions may be used. The field strength and power density limits adopted by the FCC are based on whole-body averaged exposure and the assumption of RF field levels relate most accurately to estimating whole-body averaged SAR. This means some local values of exposures exceeding the stated field strength and power density limits may not necessarily imply non-compliance if the spatial average of spatially averaged RF fields over the exposed portions of a person's body does not exceed the limits.

COMPLIANCE WITH FCC 2.1091

"A mobile device is defined as a transmitting device designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the RF source's radiating structure(s) and the body of the user or nearby persons. In this context, the term "fixed location" means that the device is physically secured at one location and is not able to be easily moved to another location while transmitting. Transmitting devices designed to be used by consumers or workers that can be easily re-located, such as wireless devices associated with a personal desktop computer, are considered to be mobile devices if they meet the 20-centimeter separation requirement.

Evaluation of compliance with the exposure limits in §1.1310 of this chapter, and preparation of an EA if the limits are exceeded, is necessary for mobile devices with single RF sources having either more than an available maximum time-averaged power of 1 mW or more than the ERP listed in Table 1 to §1.1307(b)(3)(i)(C), whichever is greater. For mobile devices not exempt by §1.1307(b)(3)(i)(C) at distances from 20 centimeters to 40 centimeters and frequencies from 0.3 GHz to 6 GHz, evaluation of compliance with the exposure limits in §1.1310 of this chapter is necessary if the ERP of the device is greater than ERP_{20cm} in the formula below. If the ERP of a single RF source at distances from 20 centimeters to 40 centimeters and frequencies from 0.3 GHz to 6 GHz is not easily obtained, then the available maximum time-averaged power may be used (i.e., without consideration of ERP) in comparison with the following formula only if the physical dimensions of the radiating structure(s) do not exceed the electrical length of $\lambda/4$ or if the antenna gain is less than that of a half-wave dipole (1.64 linear value).

Unless otherwise specified in this chapter, any other single mobile or multiple mobile and portable RF source(s) associated with a device is exempt from routine environmental evaluation for RF exposure prior to equipment authorization or use, except as specified in §1.1307(c) and (d) of this chapter."

The device will only be used with a separation distance between the antenna and the body of the user or nearby persons as shown in the table below and can therefore be considered a mobile transmitter per 47 CFR 2.1091(b).

MAXIMUM PERMISSIBLE EXPOSURE (MPE)



LIMITS

Limits for General Population /Uncontrolled Exposure: 47 CFR 1.1310

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3 - 1.34	614	1.63	*(100)	30
1.34 - 30	824/f	2.19/f	*(180/f ²)	30
30 - 300	27.5	0.073	0.2	30
300 - 1500			f/1500	30
1500 - 100000			1	30

f = frequency in MHz

* = Plane-wave equivalent power density

ASSESSMENT

The radio equipment operation is summarized in the table below. The fundamental frequency of the transmitter is below 300 MHz, the lowest frequency provided in the limits for Maximum Permissible Exposure. FCC 47 CFR section 2.1091(c.) (3), defines this equipment as exempt from routine environmental evaluation for RF exposure.

The duty cycle of 10% is the worst-case. Sebastian Medranda, Technical Lead at DENSO, provided the following information,

“Approach mode transmits RF signal with 60ms packet length at every 600ms in the first 24 hrs.”

The radio information is summarized in the following table:

Radio	Transmit Frequency (MHz)	Measured Field Strength	Tune-up Tolerance	Duty Cycle	Minimum Separation Distance (cm)	Power Density (mW/cm ²)	Limit (mW/cm ²)	Compliant
Inductive	0.125	21.5 dBuV/m @ 300m	1 dB	10.0%	20	0.0	None	Yes

The information in the table above was obtained from:

From customer supplied information and Element report number: ENT10008. The maximum measured value is considered the maximum rated power.

End of Test Report