2/F., Garment Centre,
576 Castle Peak Road, Kowloon,
Hong Kong.

Telephone: (852) 2173 8888
Facsimile: (852) 2785 5487
www.intertek.com

TEST REPORT

Report Number: 20050780HKG-001

Application for Original Grant of 47 CFR Part 15 Certification

FCC ID: 2AYGYOF7-53827WF

PREPARED AND CHECKED BY:	APPROVED BY:
Signed On File Wong Cheuk Ho, Herbert Lead Engineer	Digitally signed by Kenneth Wong Location: Intertek Testing Services Hong Kong Limited Wong Kwok Yeung, Kenneth Senior Lead Engineer Date: December 16, 2020

Intertek's standard Terms and Conditions can be obtained at our website http://www.intertek.com/terms/.
The test report only allows to be revised within the retention period unless further standard or the requirement was noticed
This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
© 2017 Intertek

TEST REPORT

GENERAL INFORMATION

Applicant Name:	Gentherm Electronics Shenzhen Co.,Ltd.Longgang Branch
Applicant Address:	Block 9,Xiang Yuer Industrial Park, Longgang Community Guangdong Probince 51800 China
FCC Specification Standard:	FCC Part 15, October 1, 2019 Edition
FCC ID:	2AYGYOF7-53827WF
FCC Model(s):	53827 – TEMP-P 8 Station with wi-fi
Type of EUT:	Spread Spectrum Transmitter
Description of EUT:	Irrigation controller with external power supply
Serial Number:	N/A
Sample Receipt Date:	August 04, 2020
Date of Test:	August 04, 2020 to September 04, 2020
Report Date:	December 16, 2020
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%
Conclusion:	Test was conducted by client submitted sample. The submitted sample complied with the 47 CFR Part 15 Certification.

TABLE OF CONTENTS

1.0 Test Results Summary & Statement of Compliance 4
1.1 Summary of Test Results 4
1.2 Statement of Compliance 4

2.0 General Description 5
2.1 Product Description 5
2.2 Test Methodology 5
2.3 Test Facility 5
2.4 Related Submittal(s) Grants 5

3.0 System Test Configuration 6
3.1 Justification 6
3.2 EUT Exercising Software 7
3.3 Details of EUT and Description of Accessories 8
3.4 Measurement Uncertainty 8

4.0 Test Results 9
4.1 Maximum Conducted Output Power at Antenna Terminals 9
4.2 Minimum 6dB RF Bandwidth 11
4.3 Maximum Power Spectral Density 20
4.4 Out of Band Conducted Emissions 29
4.5 Field Strength Calculation 46
4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions 47
4.6.1 Radiated Emission Configuration Photograph 47
4.6.2 Radiated Emission Data 47
4.6.3 Radiated Emission Test Setup 61
4.6.4 Transmitter Duty Cycle Calculation 62
4.7 AC Power Line Conducted Emission 63
4.7.1 AC Power Line Conducted Emission Configuration Photograph 63
4.7.2 AC Power Line Conducted Emission Data 63
4.7.3 Conducted Emission Test Setup 65

5.0 Equipment List 66

EXHIBIT 1 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE

1.0 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE

1.1 Summary of Test Results

TEST ITEMS	FCC PART 15 SECTION	RESULTS	DETAILS SEE SECTION
Antenna Requirement	15.203	Pass	2.1
Max. Conducted Output Power (Peak)	15.247(b)(3)&(4)	Pass	4.1
Min. 6dB RF Bandwidth	15.247(a)(2)	Pass	4.2
Max. Power Density (average)	15.247(e)	Pass	4.3
Out of Band Antenna Conducted Emission	15.247(d)	Pass	4.4
Radiated Emission in Restricted Bands and Spurious Emissions	15.247(d), 15.209 & 15.109	Pass	4.6
AC Power Line Conducted Emission	15.207 & 15.107	Pass	4.7

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

1.2 Statement of Compliance

The equipment under test is found to be complying with the following standard:

FCC Part 15, October 1, 2019 Edition

EXHIBIT 2 GENERAL DESCRIPTION

2.0 GENERAL DESCRIPTION

2.1 Product Description

The Equipment Under Test (EUT) is a Irrigation controller with external power supply for home garden. The EUT contains a wifi module for an associated mobile apps.

This report contains the test data of Wifi portion only.

For 802.11b mode, it operates at frequency range of 2412MHz to 2462MHz with 11 channels. It transmits via direct sequence spread spectrum (DSSS) modulation. Maximum bit rate can be up to 11Mbps. For 802.11g mode, it operates at frequency range of 2412MHz to 2462MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can be up to 54Mbps. For 802.11n (HT20 with 20MHz bandwidth) mode, it operates at frequency range of 2412MHz to 2462MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation (mcs0 to mcs7). Maximum bit rate can support up to 65Mbps. For 802.11n (HT40 with 40MHz bandwidth) mode, it operates at frequency range of 2422MHz to 2452MHz with 9 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation (mcs0 to mcs7). Maximum bit rate can support up to 130Mbps.

The EUT is powered by an 24VAC.

The antenna(s) used in the EUT is integral, internal.

The circuit description is saved with filename: descri.pdf.

2.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Preliminary radiated scans and all radiated measurements were performed in radiated emission test sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. Antenna port conducted measurements were performed according to ANSI C63.10 (2013) and KDB Publication No.558074 D01 v05r01 (11-February-2019). All other measurements were made in accordance with the procedures in 47 CFR Part 2.

2.3 Test Facility

The radiated emission test site and antenna port conducted measurement facility used to collect the radiated data and conductive data are at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been fully placed on file with the FCC.

2.4 Related Submittal(s) Grants

This is a single application for certification of a transceiver (WiFi portion).

EXHIBIT 3 SYSTEM TEST CONFIGURATION

3.0 SYSTEM TEST CONFIGURATION

3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was powered by 24VAC.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the base unit attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209. Digital circuitries used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109 Limits.

3.1 Justification – Cont'd

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.8.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF.* The effective period (Teff) was referred to Exhibit 4.8.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

For AC line conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

All setting of data rate for 802.11b/g/n(HT20)/n(HT40) of WiFi mode had been considered, and worst case test data are shown on this test report.

3.2 EUT Exercising Software

The EUT exercise program (if any) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

3.3 Details of EUT and Description of Accessories

Details of EUT:

(1) The EUT is powered by 24VAC

Description of Accessories:

(1) An AC transformer (AC Input: 120V / Output: 24VAC)
(Provided by Applicant)

3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test at a level of confidence of 95% has been considered. The values of the Measurement uncertainty for radiated emission test and RF conducted measurement test are ± 5.3dB and ±0.99dB respectively. The value of the Measurement uncertainty for conducted emission test is ±4.2dB.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

EXHIBIT 4 TEST RESULTS

4.0 TEST RESULTS

4.1 Maximum Conducted (peak) Output Power at Antenna Terminals

RF Conduct Measurement Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

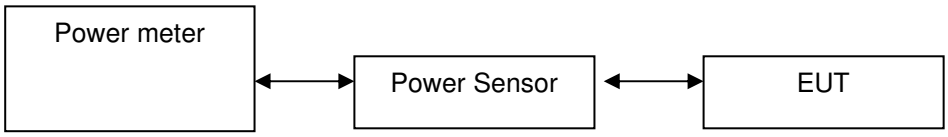

The antenna port of the EUT was connected to the input of a spectrum analyzer.

☒ The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to the obtain power at the EUT antenna terminals. The measurement procedure 9.1.3 was used.

☐ The EUT should be configured to transmit continuously (at a minimum duty cycle of 98%) at full power over the measurement duration. The measurement procedure AVG1 was used.

IEEE 802.11b (DSSS, 11 Mbps) Antenna Gain = 2 dBi

Frequency (MHz)		Output in dBm	Output in mWatt
Low Channel:	2412	15.8	38.0
Middle Channel:	2437	14.6	28.8
High Channel:	2462	12.8	19.1

IEEE 802.11g (OFDM, 54 Mbps) Antenna Gain = 2 dBi

Frequency (MHz)		Output in dBm	Output in mWatt
Low Channel:	2412	14.5	28.2
Middle Channel:	2437	14.2	26.3
High Channel:	2462	12.5	17.8

IEEE 802.11n (20MHz) (OFDM, MCS0) Antenna Gain = 2 dBi

Frequency (MHz)		Output in dBm	Output in mWatt
Low Channel:	2412	14.8	30.2
Middle Channel:	2437	14.4	27.5
High Channel:	2462	12.8	19.1

4.1 Maximum Conducted Output Power at Antenna Terminals – Cont'd

IEEE 802.11n (40MHz) (OFDM, MCS0) Antenna Gain = 2 dBi

Frequency (MHz)		Output in dBm	Output in mWatt
Low Channel:	2422	14.6	28.8
Middle Channel:	2437	14.5	28.2
High Channel:	2452	12.6	18.2

Cable loss : 0.5 dB External Attenuation : 0 dB

Cable loss, external attenuation: ☒ included in OFFSET function
☐ added to SA raw reading

IEEE 802.11b (DSSS, 1 Mbps)
max. conducted (peak) output level = 15.8 dBm

IEEE 802.11g (OFDM, 9 Mbps)
max. conducted (peak) output level = 14.5 dBm

IEEE 802.11n (20MHz) (OFDM, MCS0)
max. conducted (peak) output level = 14.8 dBm

IEEE 802.11n (40MHz) (OFDM, MCS0)
max. conducted (peak) output level = 14.6 dBm

Limits:
☒ 1W (30dBm) for antennas with gains of 6dBi or less

☐ ___W (___dBm) for antennas with gains more than 6dBi

4.2 Minimum 6dB RF Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 6dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

IEEE 802.11b (DSSS, 1 Mbps)

	Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel:	2412	10.28
Middle Channel:	2437	10.24
High Channel:	2462	10.12

IEEE 802.11g (OFDM, 6 Mbps)

	Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel:	2412	16.48
Middle Channel:	2437	16.48
High Channel:	2462	16.44

IEEE 802.11n (20MHz) (OFDM, MCS0)

	Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel:	2412	17.72
Middle Channel:	2437	17.72
High Channel:	2462	17.76

IEEE 802.11n (40MHz) (OFDM, MCS0)

	Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel:	2422	36.84
Middle Channel:	2437	36.84
High Channel:	2452	36.84

Limits
6 dB bandwidth shall be at least 500kHz

The plots of 6dB RF bandwidth are saved as below.

PLOTS OF 6dB RF BANDWIDTH

802.11b, Lowest Channel

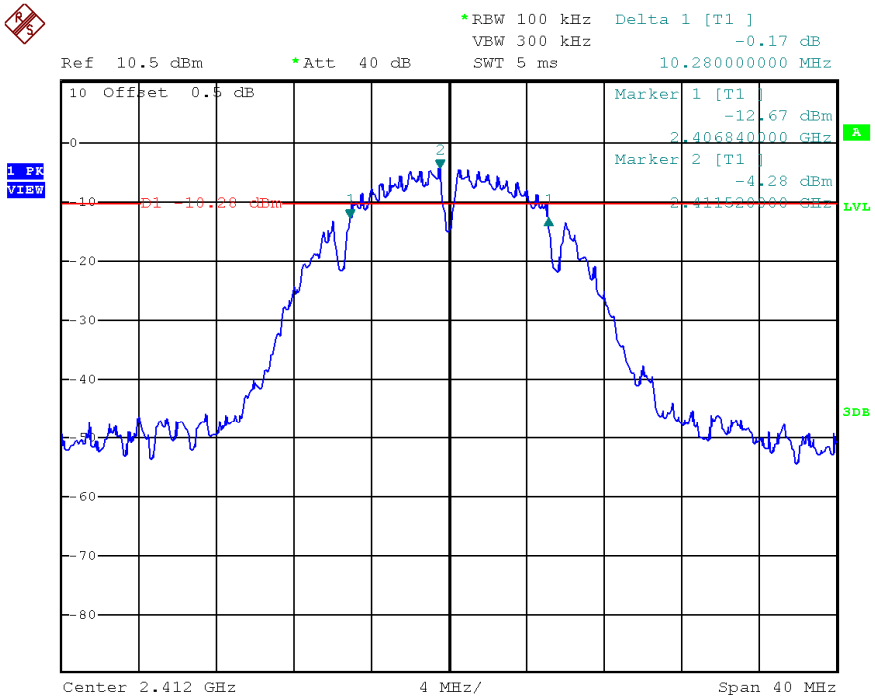

Date: 1.SEP.2020 07:55:26

802.11b, Middle Channel

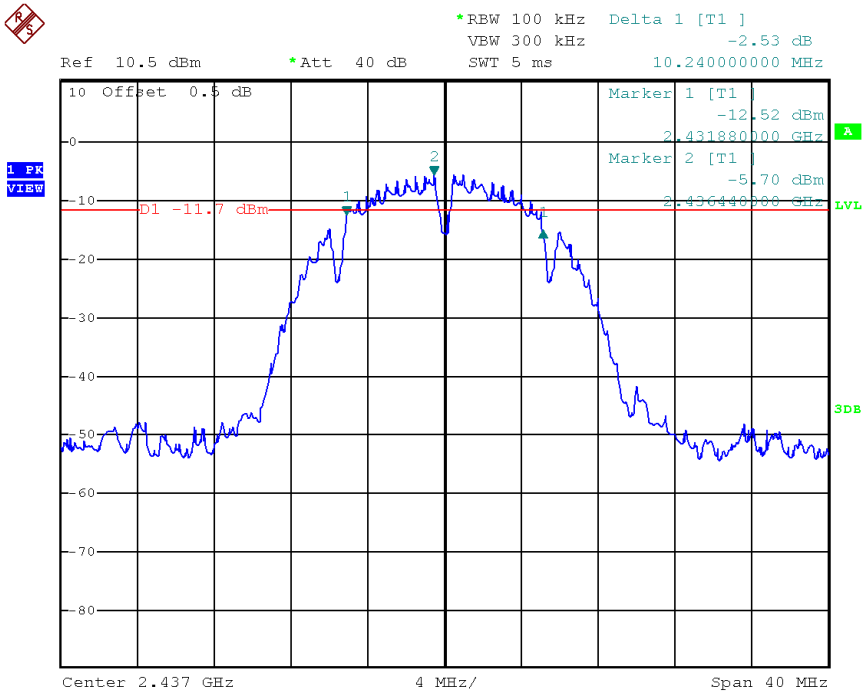

Date: 1.SEP.2020 07:54:14

TEST REPORT

PLOTS OF 6dB RF BANDWIDTH

802.11b, Highest Channel

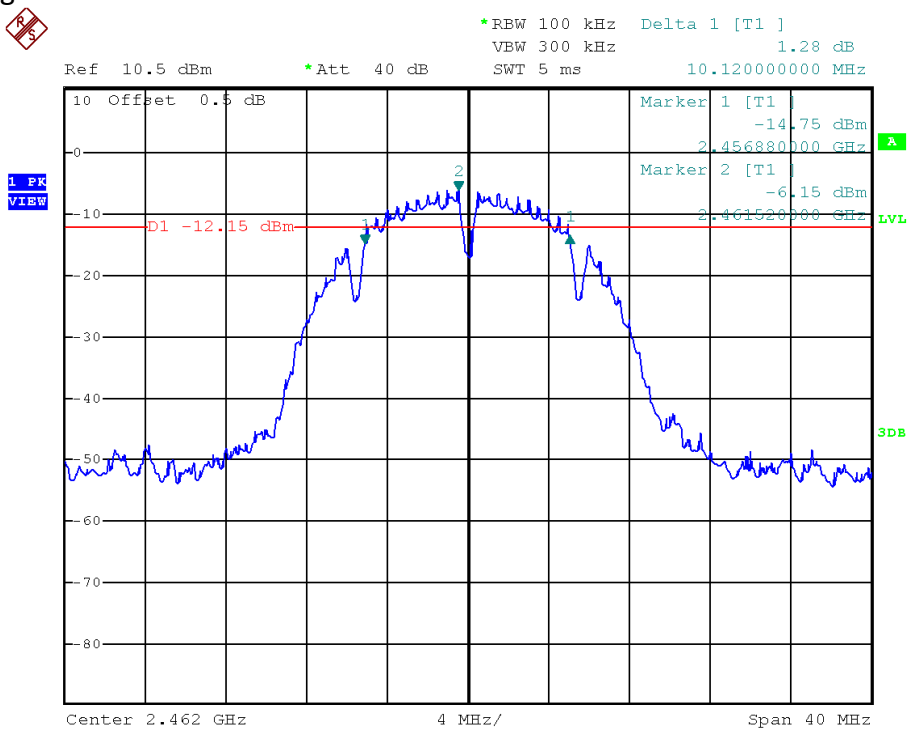

Date: 1.SEP.2020 08:00:17

PLOTS OF 6dB RF BANDWIDTH

802.11g, Lowest Channel

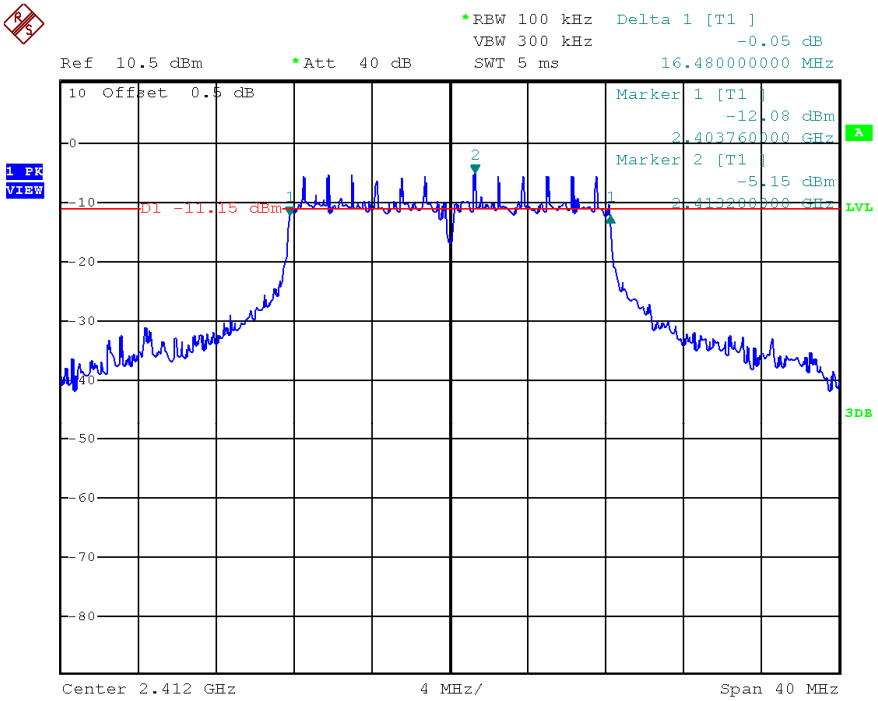

Date: 1.SEP.2020 08:15:28

802.11g, Middle Channel

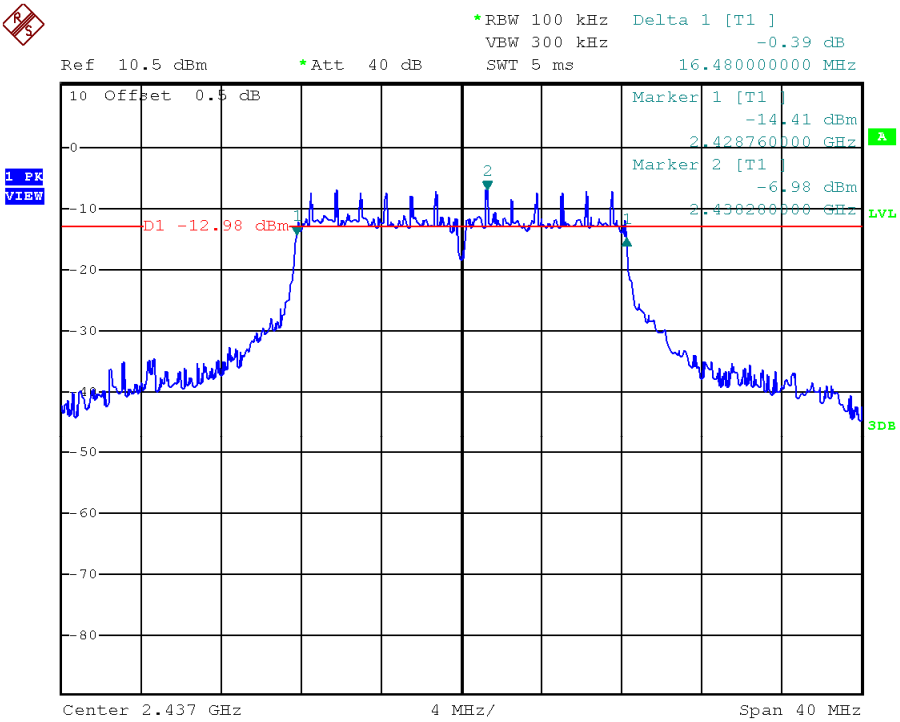

Date: 1.SEP.2020 08:17:25

TEST REPORT

PLOTS OF 6dB RF BANDWIDTH

802.11g, Highest Channel

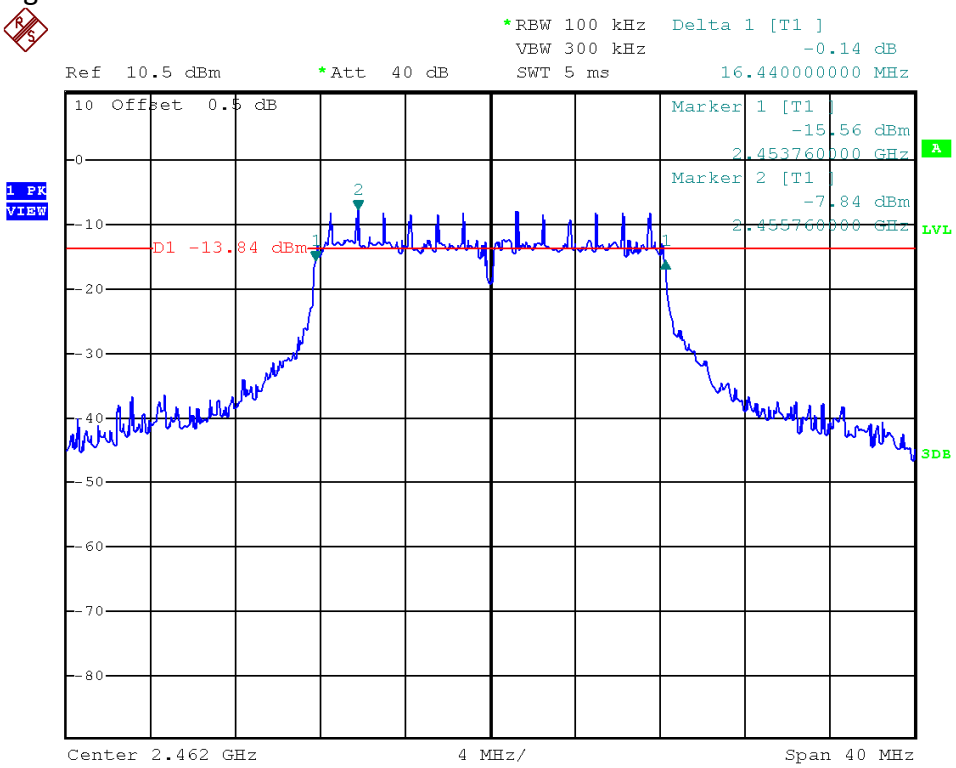

Date: 1.SEP.2020 08:20:00

PLOTS OF 6dB RF BANDWIDTH

802.11n (20MHz), Lowest Channel

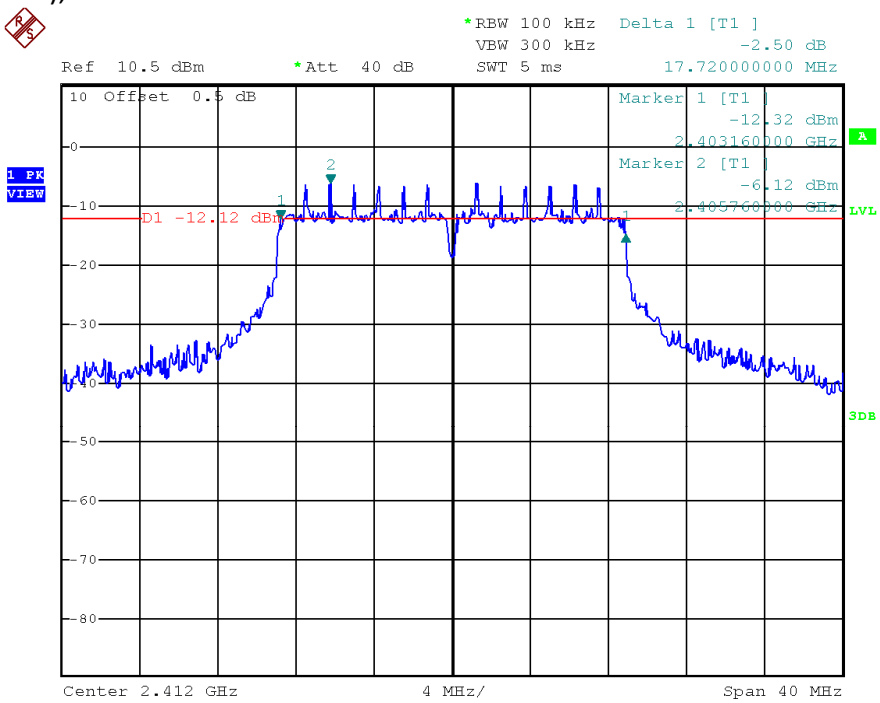

Date: 1.SEP.2020 08:31:58

802.11n (20MHz), Middle Channel

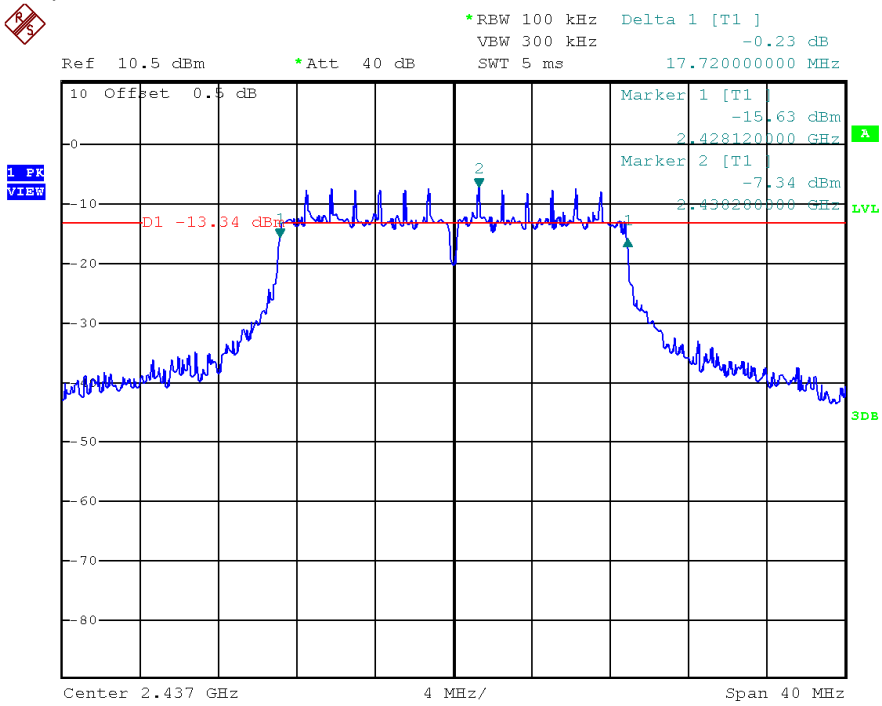

Date: 1.SEP.2020 08:28:13

TEST REPORT

PLOTS OF 6dB RF BANDWIDTH

802.11n (20MHz), Highest Channel

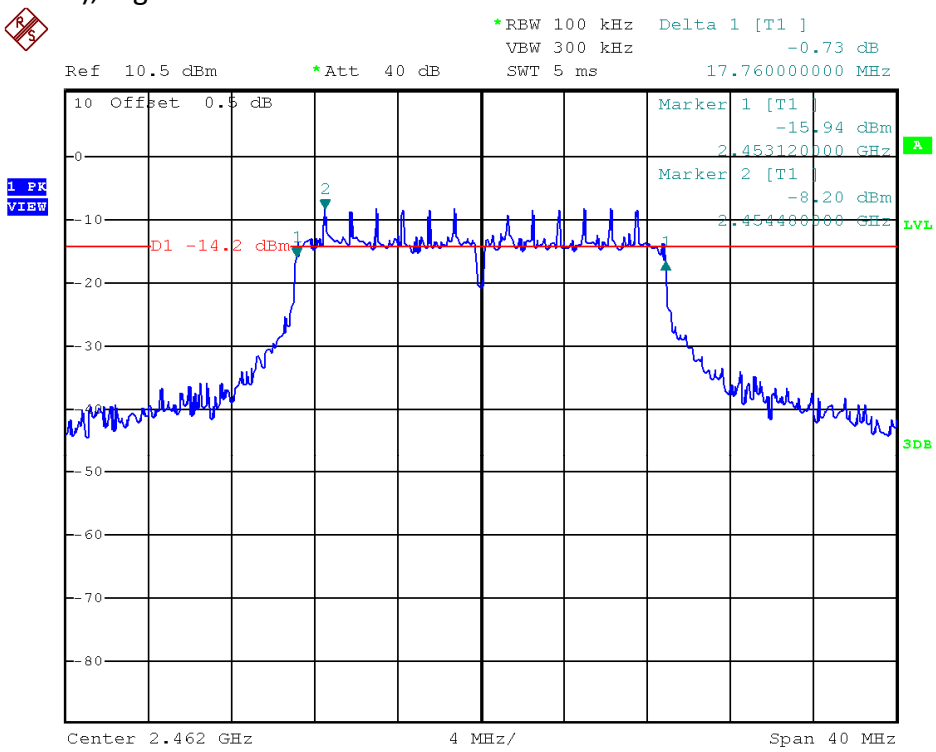

Date: 1.SEP.2020 08:33:16

TEST REPORT

PLOTS OF 6dB RF BANDWIDTH

802.11n (40MHz), Lowest Channel

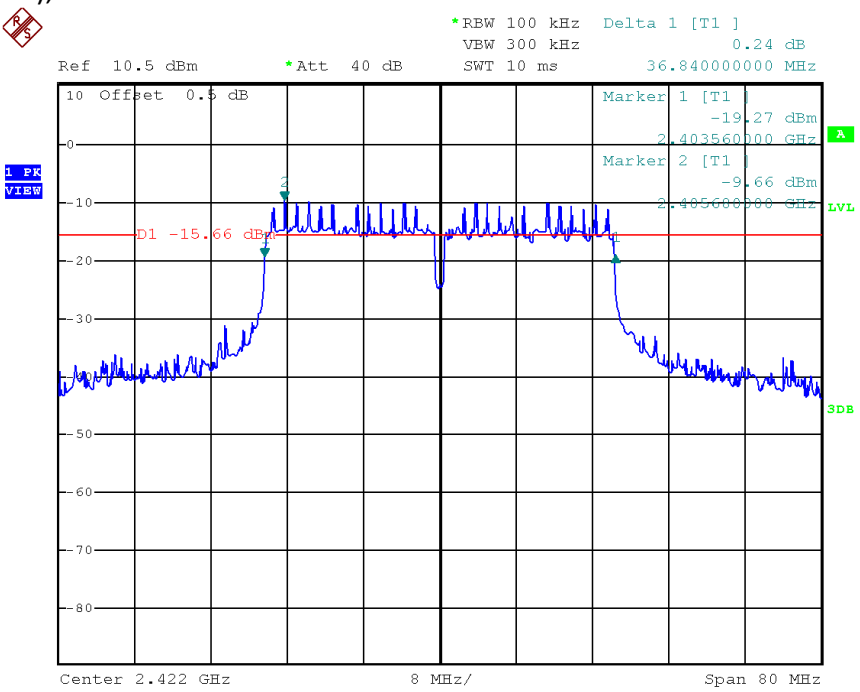

Date: 1.SEP.2020 08:37:59

802.11n (40MHz), Middle Channel

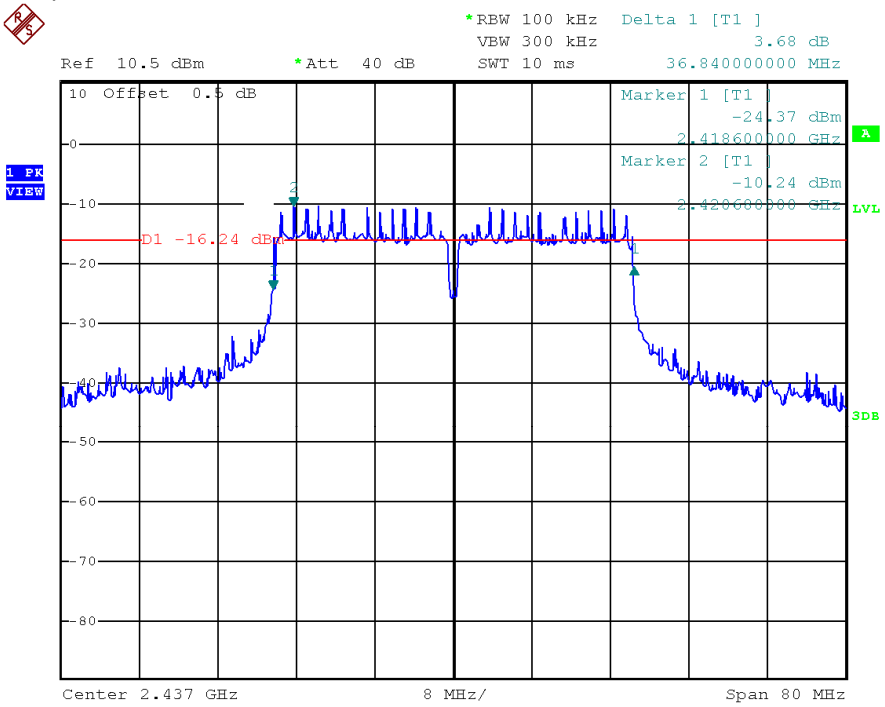

Date: 1.SEP.2020 08:39:24

TEST REPORT

PLOTS OF 6dB RF BANDWIDTH

802.11n (40MHz), Highest Channel

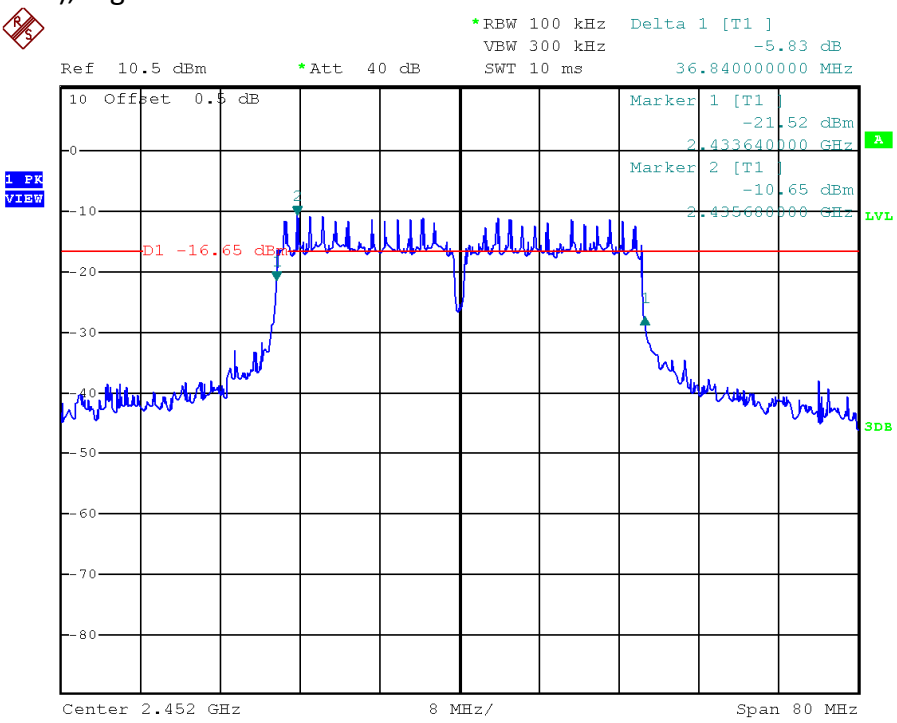

Date: 1.SEP.2020 08:41:02

4.3 Maximum Power Spectral Density

Antenna output of the EUT was coupled directly to spectrum analyzer. The measurement procedure 10.2 PKPSD was used. If an external attenuator and/or cable was used, these losses are compensated for using the OFFSET function of the analyser.

Frequency (MHz)		PSD in 100kHz (dBm)
Low Channel:	2412	-3.75
Middle Channel:	2437	-4.98
High Channel:	2462	-5.80

IEEE 802.11g (OFDM, 6 Mbps)

Frequency (MHz)		PSD in 100kHz (dBm)
Low Channel:	2412	-6.22
Middle Channel:	2437	-7.05
High Channel:	2462	-7.76

IEEE 802.11n (20MHz) (OFDM, MCS0)

Frequency (MHz)		PSD in 100kHz (dBm)
Low Channel:	2412	-6.02
Middle Channel:	2437	-6.98
High Channel:	2462	-7.96

IEEE 802.11n (40MHz) (OFDM, MCS0)

Frequency (MHz)		PSD in 100kHz (dBm)
Low Channel:	2422	-9.48
Middle Channel:	2437	-10.14
High Channel:	2452	-10.72

Cable Loss: 0.5 dB

Limit:
8dBm

The plots of power spectral density are as below.

TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY (3kHz RBW)

802.11b, Lowest channel

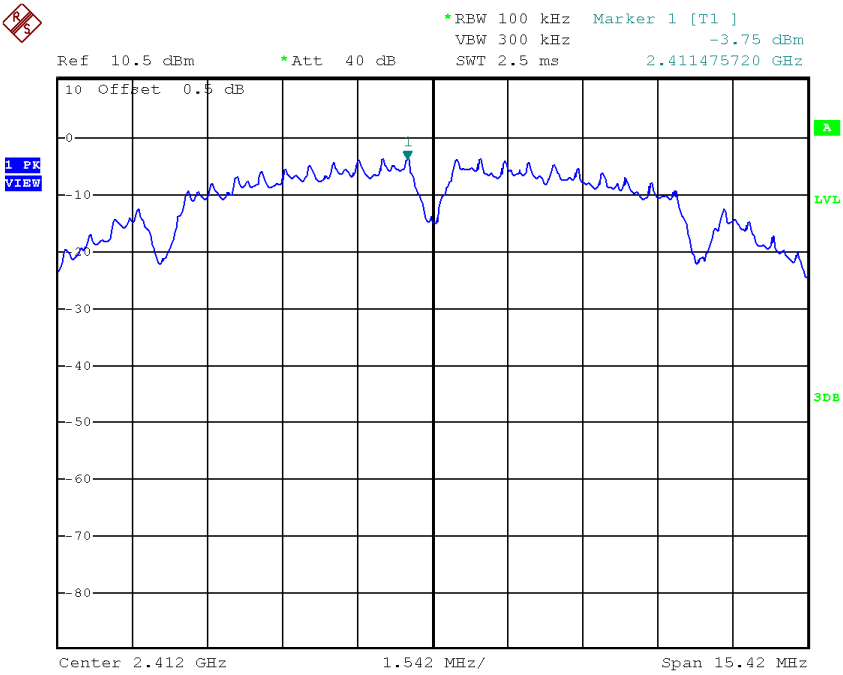

Date: 1.SEP.2020 09:04:19

802.11b, Middle channel

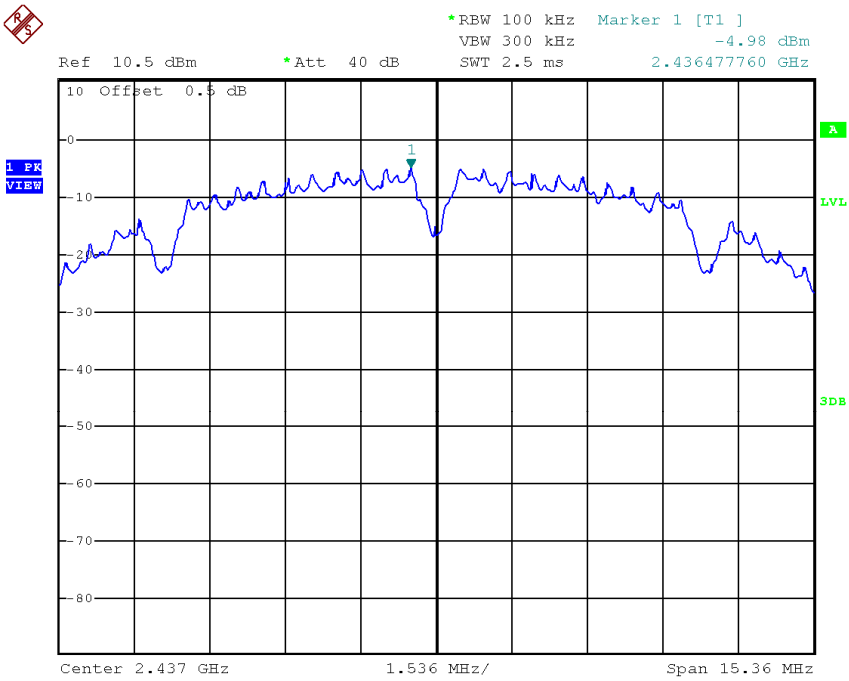

Date: 1.SEP.2020 09:05:41

TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY (3kHz RBW)

802.11b, Highest channel

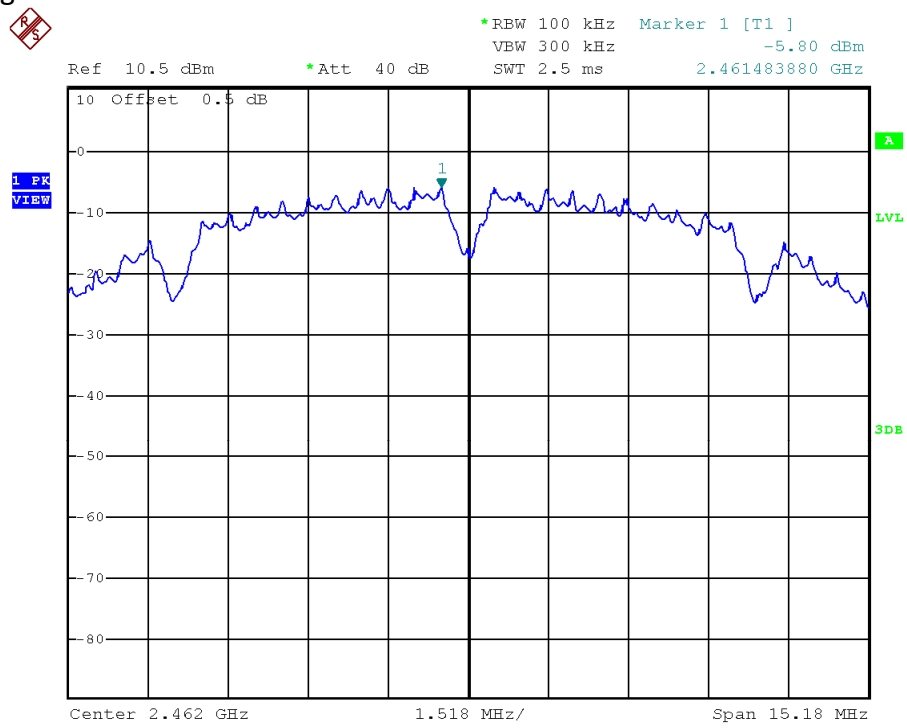

Date: 1.SEP.2020 09:06:48

TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY

802.11g, Lowest channel

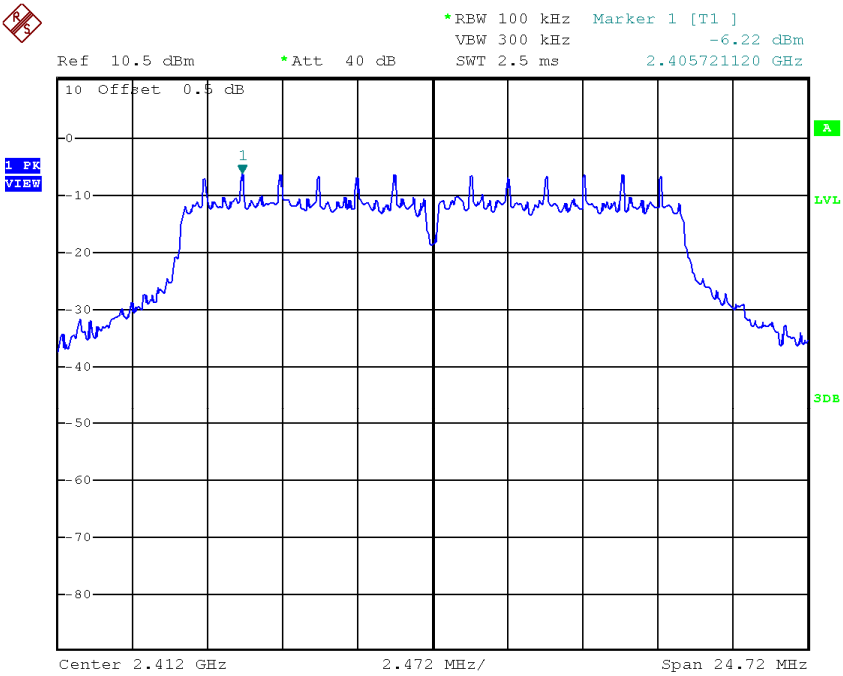

Date: 1.SEP.2020 09:12:26

802.11g, Middle channel

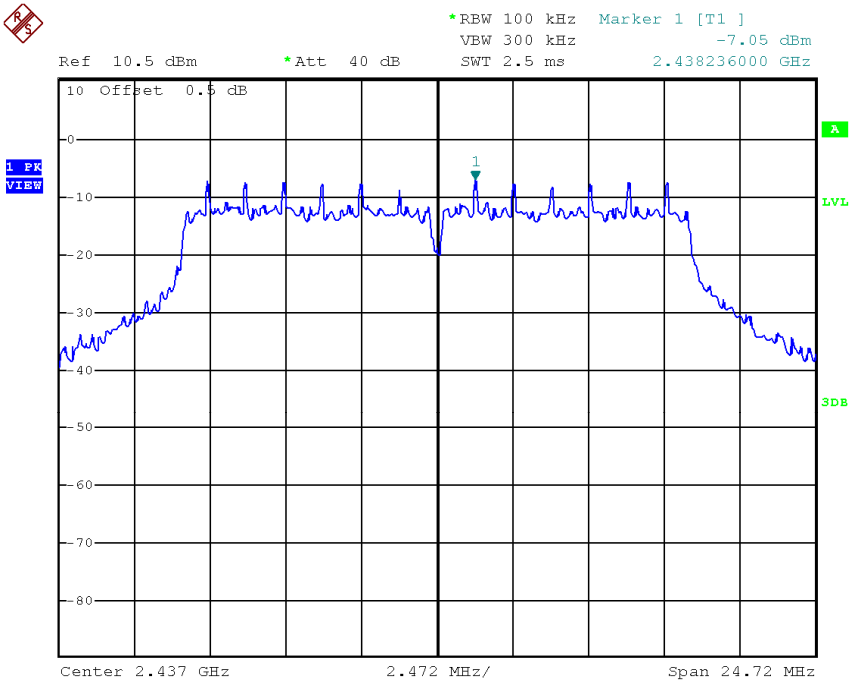

Date: 1.SEP.2020 09:13:49

TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY

802.11g, Highest channel

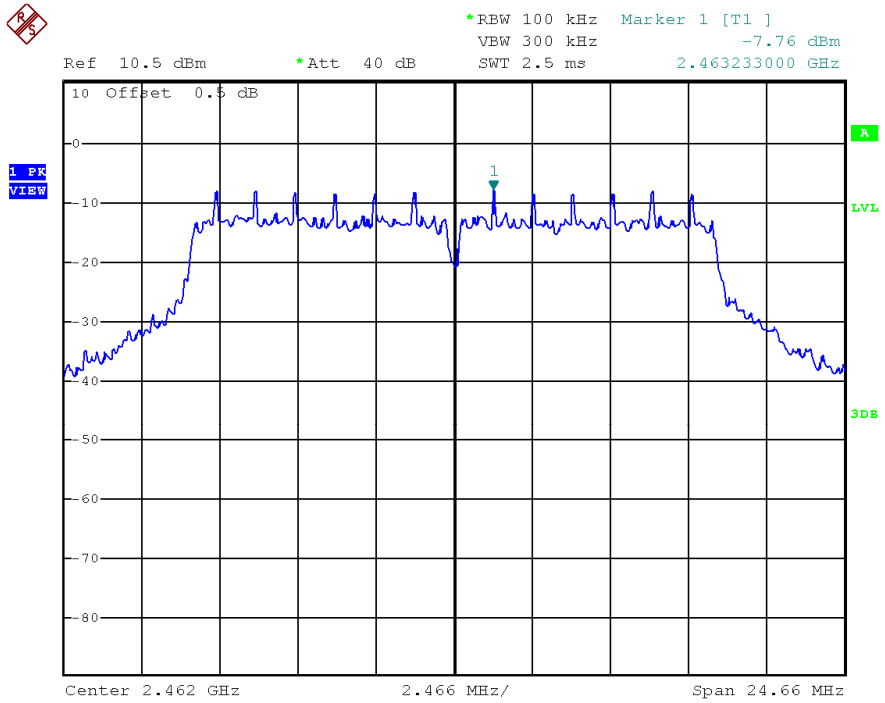

Date: 1.SEP.2020 09:15:29

TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY

802.11n (20MHz), Lowest channel

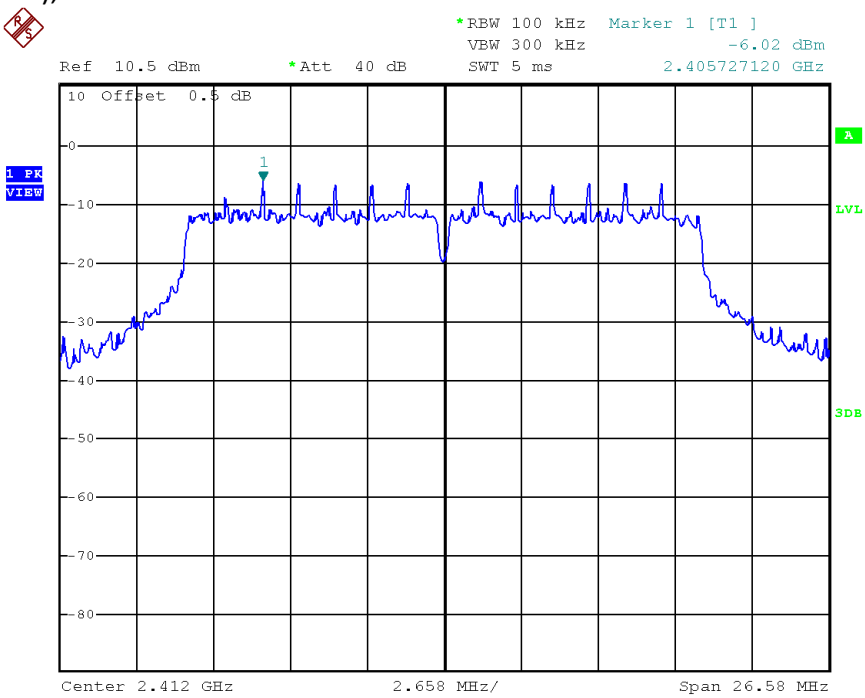

Date: 1.SEP.2020 09:19:17

802.11n (20MHz), Middle channel

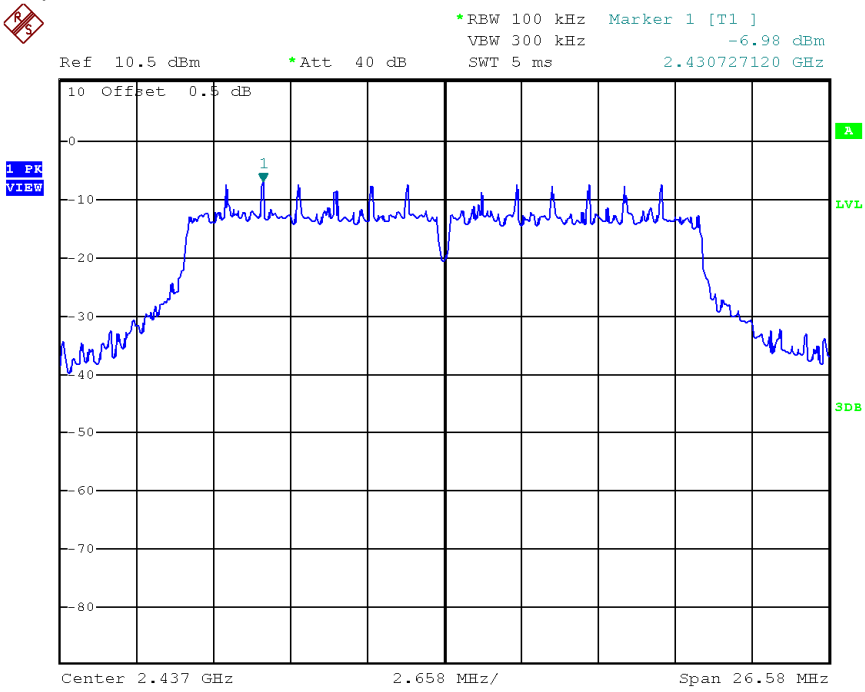

Date: 1.SEP.2020 09:20:20

TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY

802.11n (20MHz), Highest channel

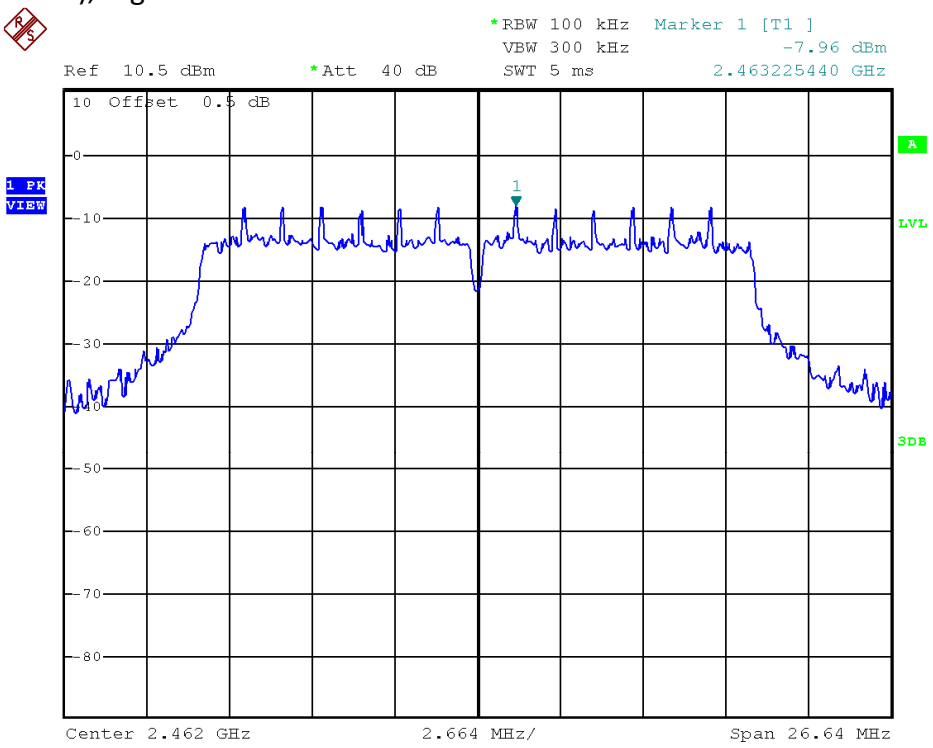

Date: 1.SEP.2020 09:21:17

TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY

802.11n (40MHz), Lowest channel

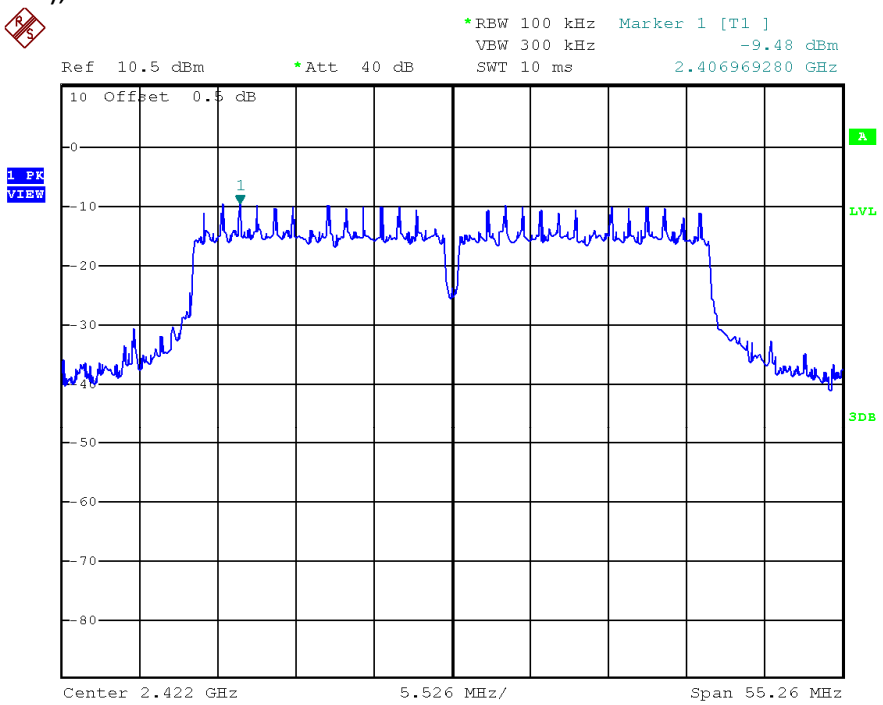

Date: 1.SEP.2020 09:22:35

802.11n (40MHz), Middle channel

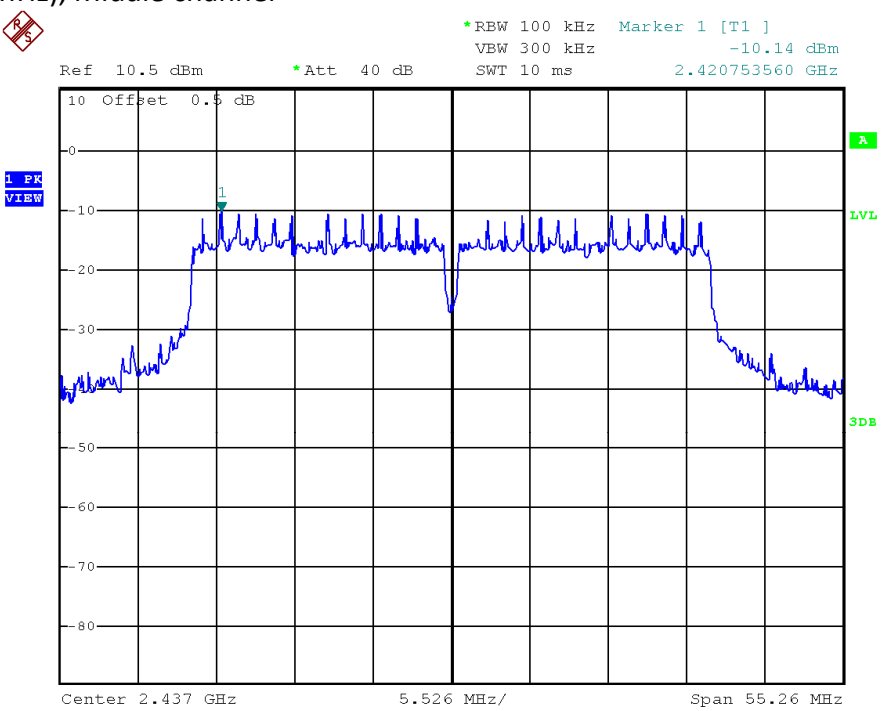

Date: 1.SEP.2020 09:24:14

TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY

802.11n (20MHz), Highest channel

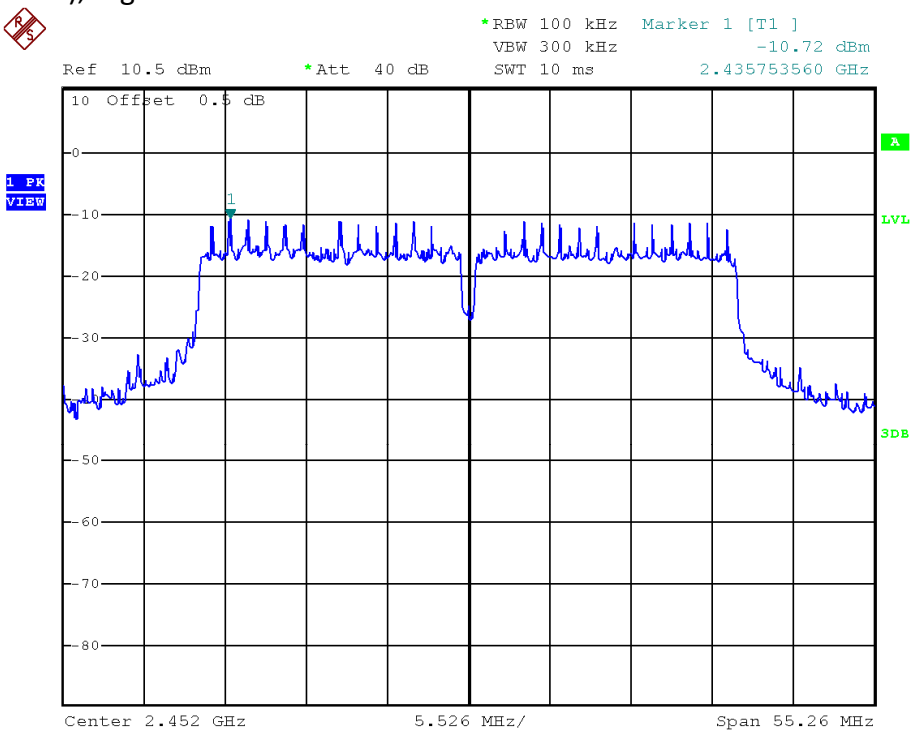

Date: 1.SEP.2020 09:25:59

4.4 Out of Band Conducted Emissions

For 802.11b/g/n20/n40MHz, the maximum conducted (peak) output power was used to demonstrate compliance as described in 9.1. Then the display line (in red) shown in the following plots denotes the limit at 20dB below maximum measured in-band peak PSD level in 100 KHz bandwidth for 802.11b/g/n20/n40MHz.

The measurement procedures under sections 11 of KDB Publication No.558074 D01 v05r01 (11-February-2019) were used.

Furthermore, delta measurement technique for measuring bandedge emissions was incorporated in the test of the edge at 2483.5MHz.

Limits:
All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB for 802.11b/g/n20/n40MHz below the maximum measured in-band peak PSD level.

TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11b, Lowest Channel, Bandedge

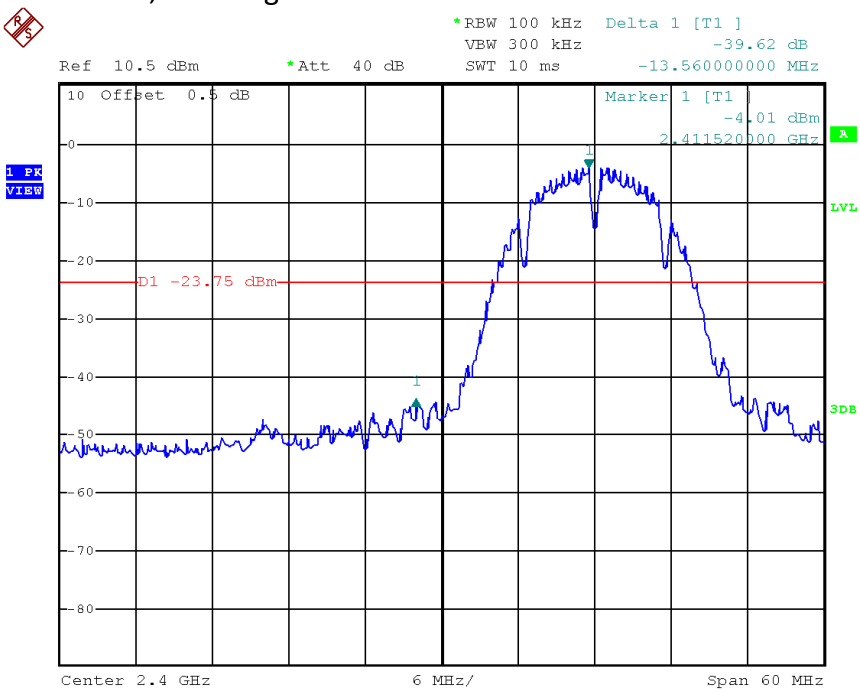

Date: 1.SEP.2020 09:35:53

802.11b, Highest Channel, Bandedge

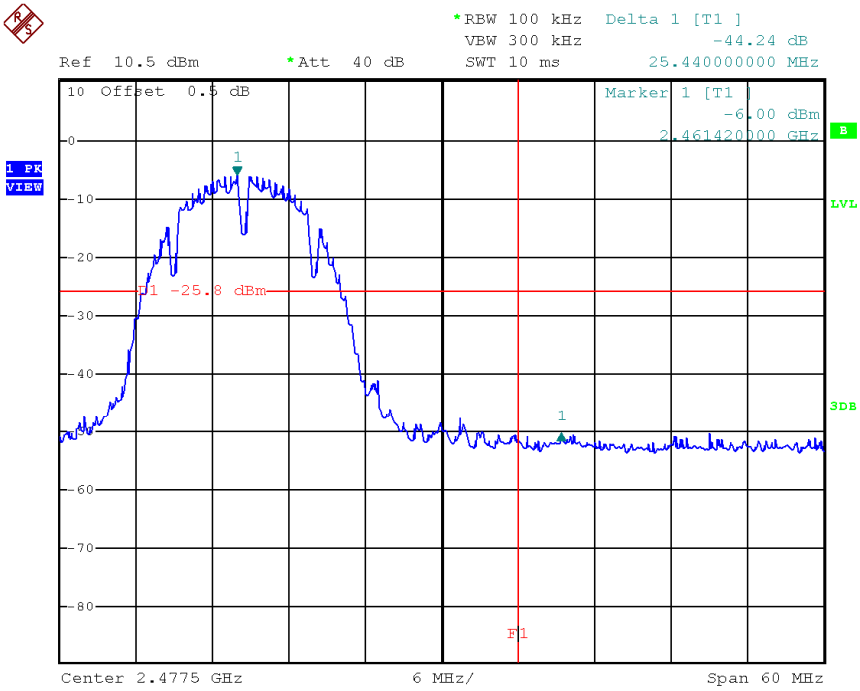

Date: 1.SEP.2020 09:37:05

TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11b, Lowest Channel, Plot A

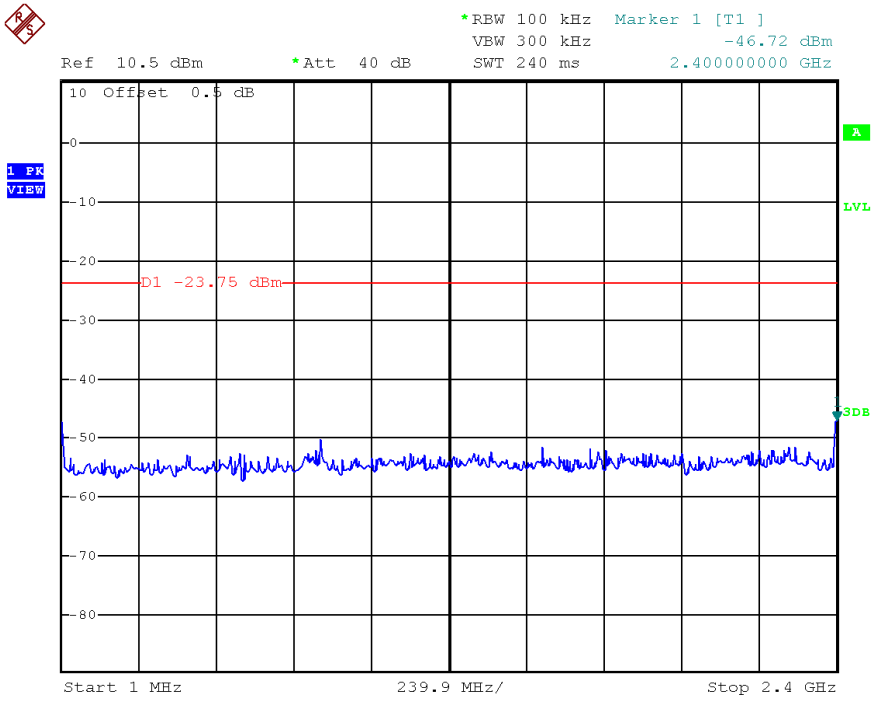

Date: 1.SEP.2020 09:59:49

802.11b, Lowest Channel, Plot B

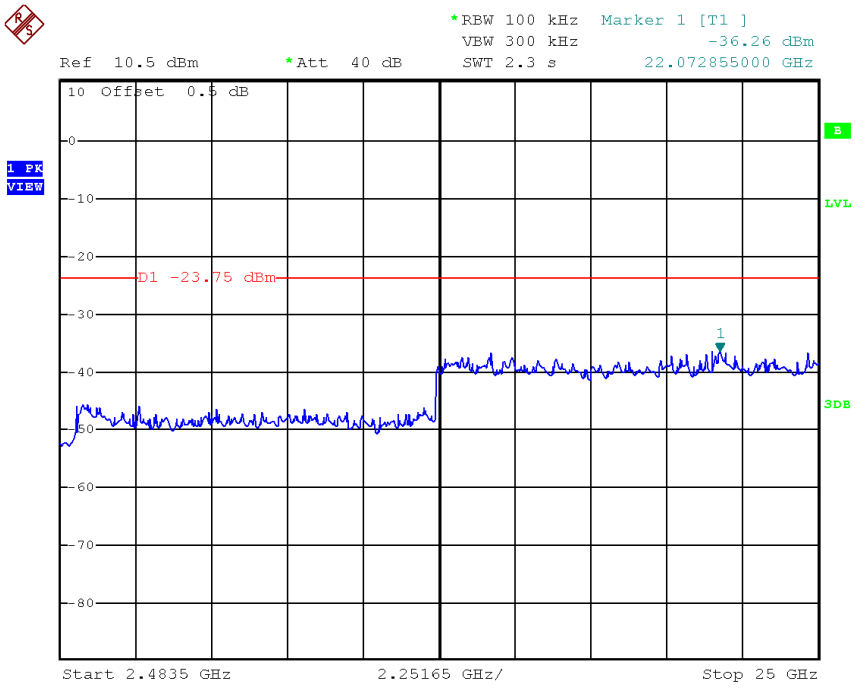

Date: 1.SEP.2020 10:01:25

TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11b, Middle Channel, Plot A

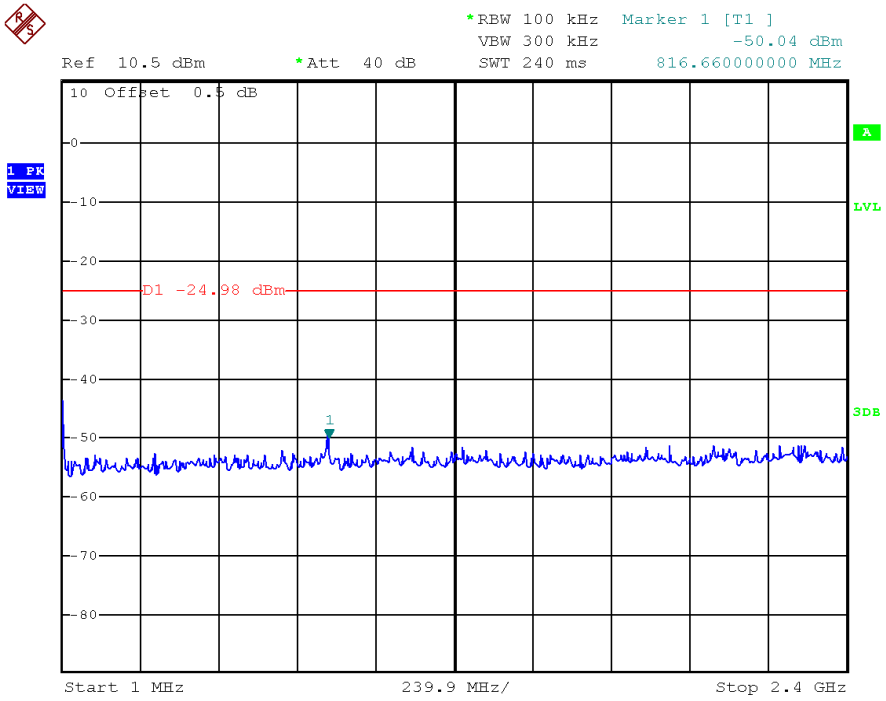

Date: 1.SEP.2020 10:03:44

802.11b, Middle Channel, Plot B

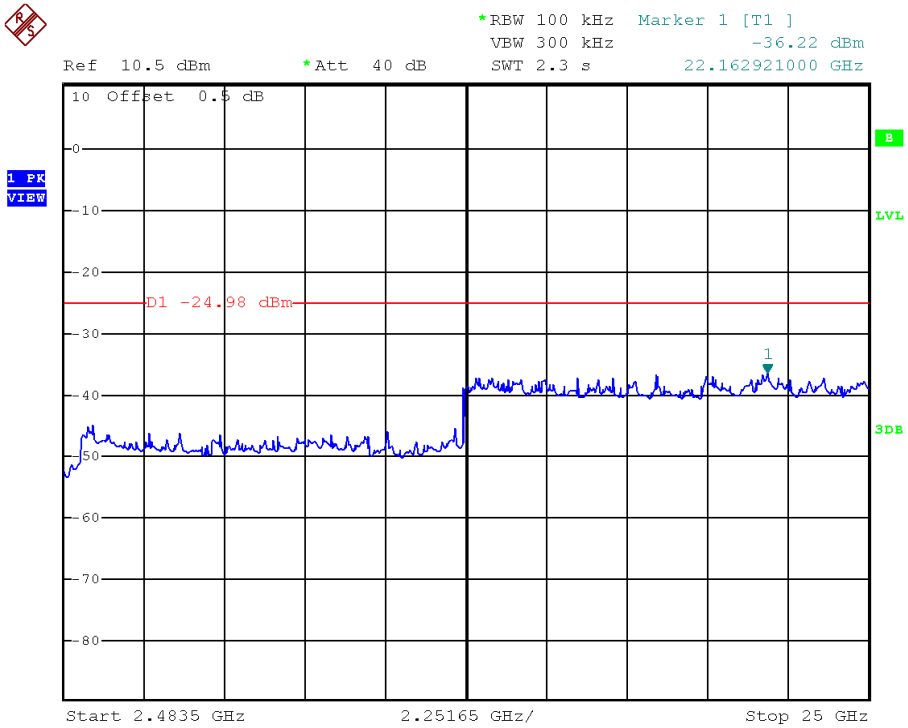

Date: 1.SEP.2020 10:04:39

TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11b, Highest Channel, Plot A

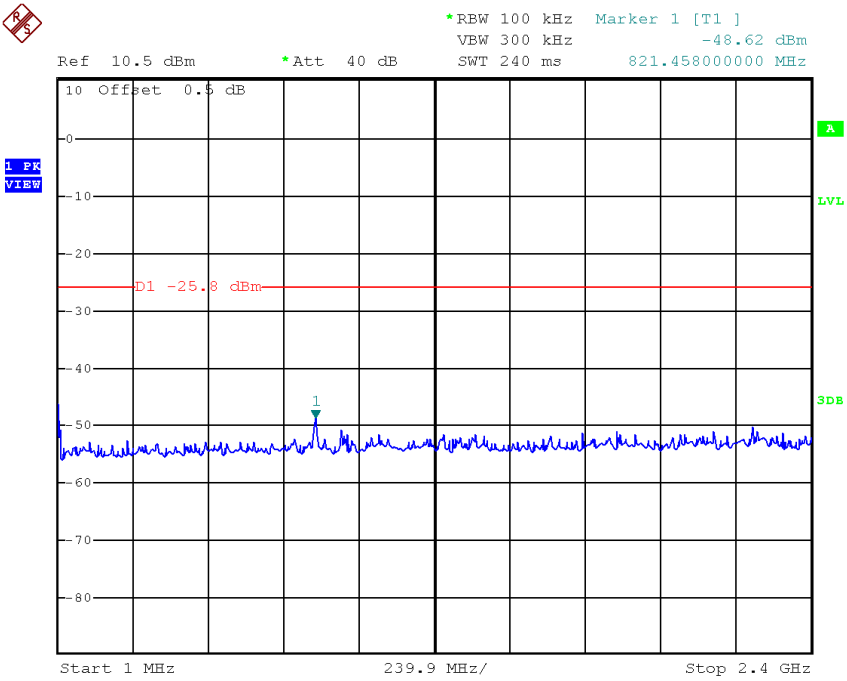

Date: 1.SEP.2020 10:07:13

802.11b, Highest Channel, Plot B

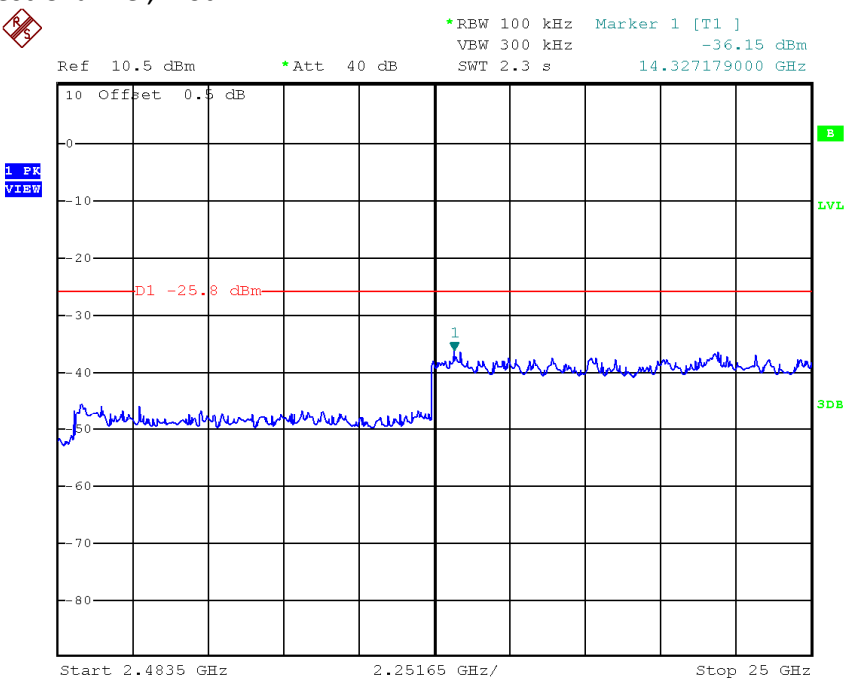

Date: 1.SEP.2020 10:08:08

TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11g, Lowest Channel, Bandedge

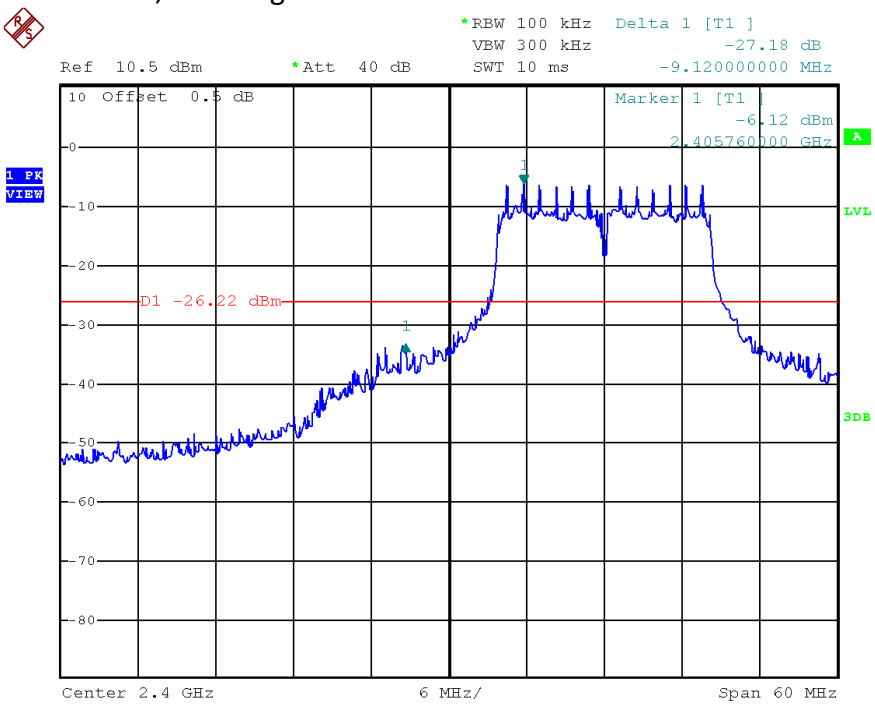

Date: 1.SEP.2020 09:40:03

802.11g, Highest Channel, Bandedge

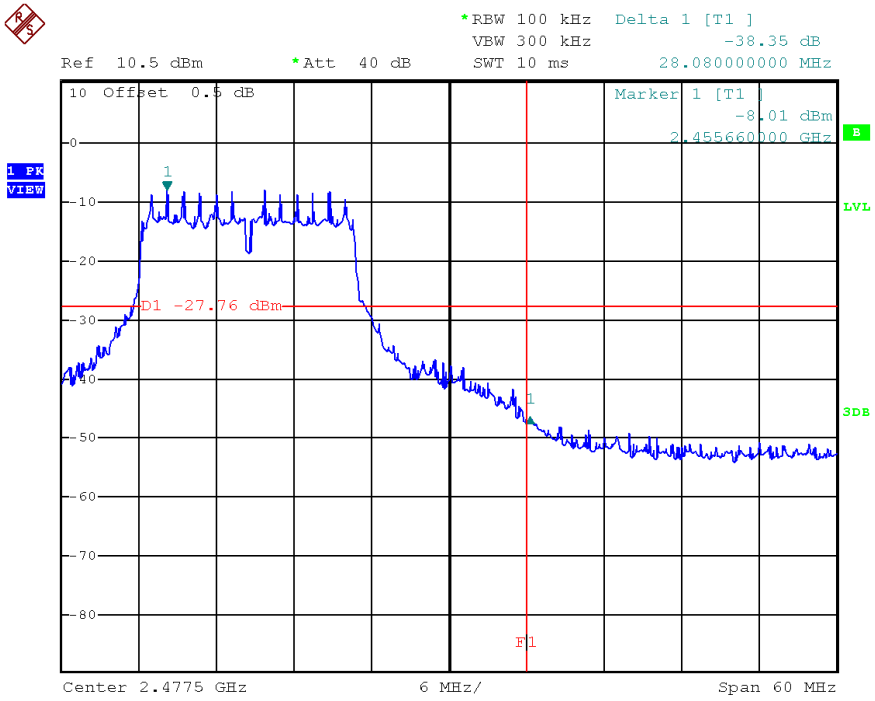

Date: 1.SEP.2020 09:38:47

TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11g, Lowest Channel, Plot A

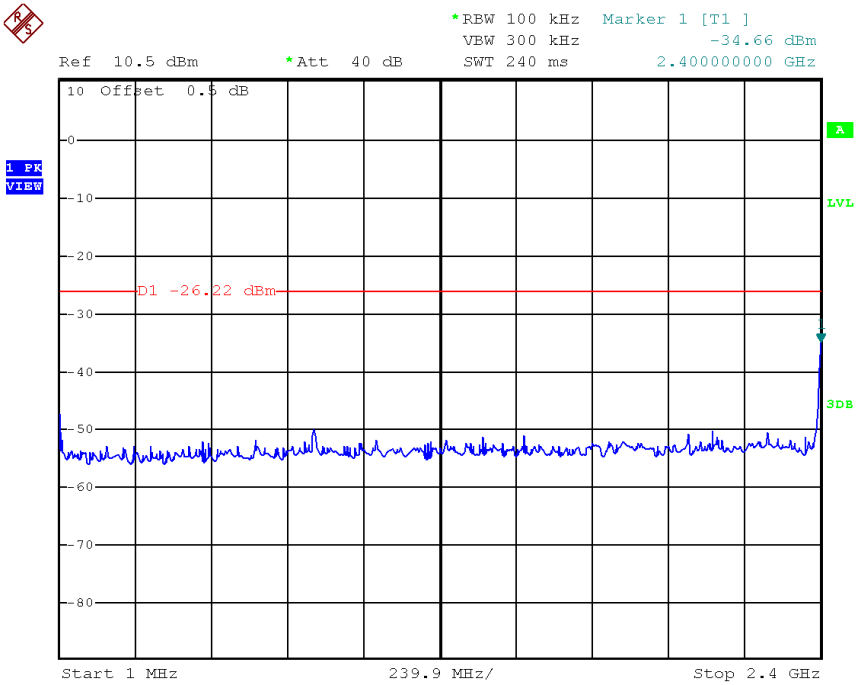

Date: 1.SEP.2020 10:13:07

802.11g, Lowest Channel, Plot B

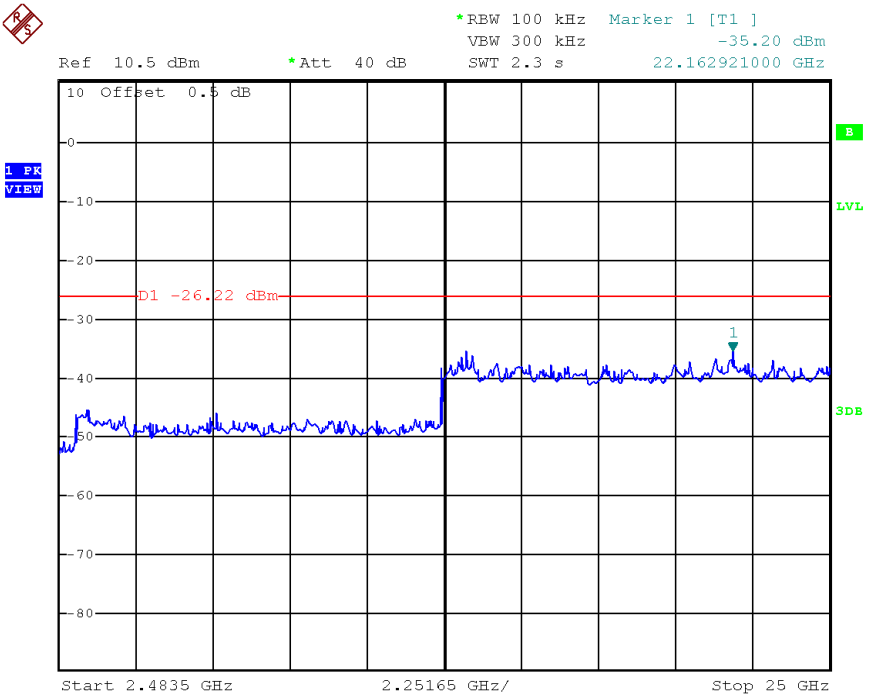

Date: 1.SEP.2020 10:14:03

TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11g, Middle Channel, Plot A

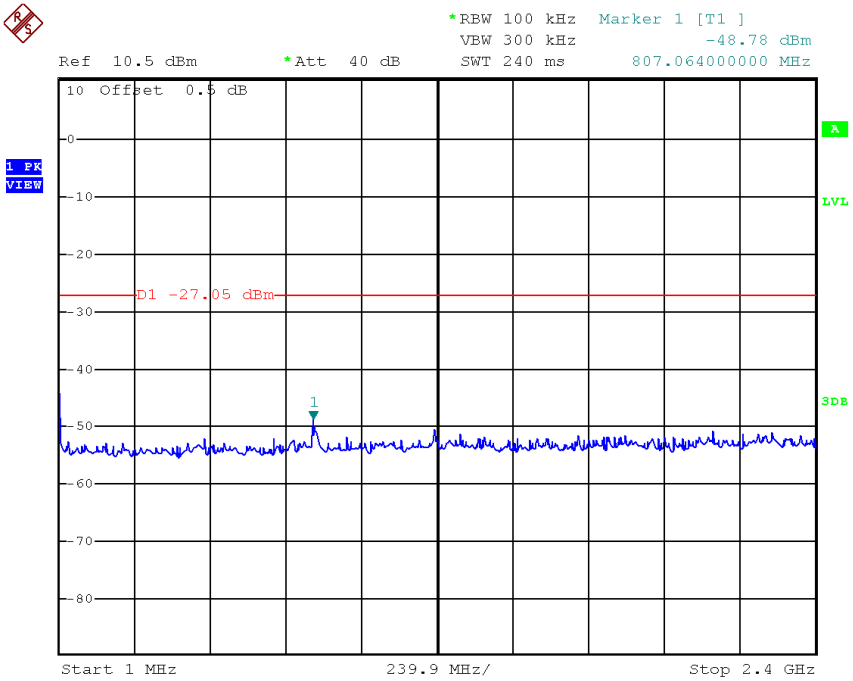

Date: 1.SEP.2020 10:15:12

802.11g, Middle Channel, Plot B

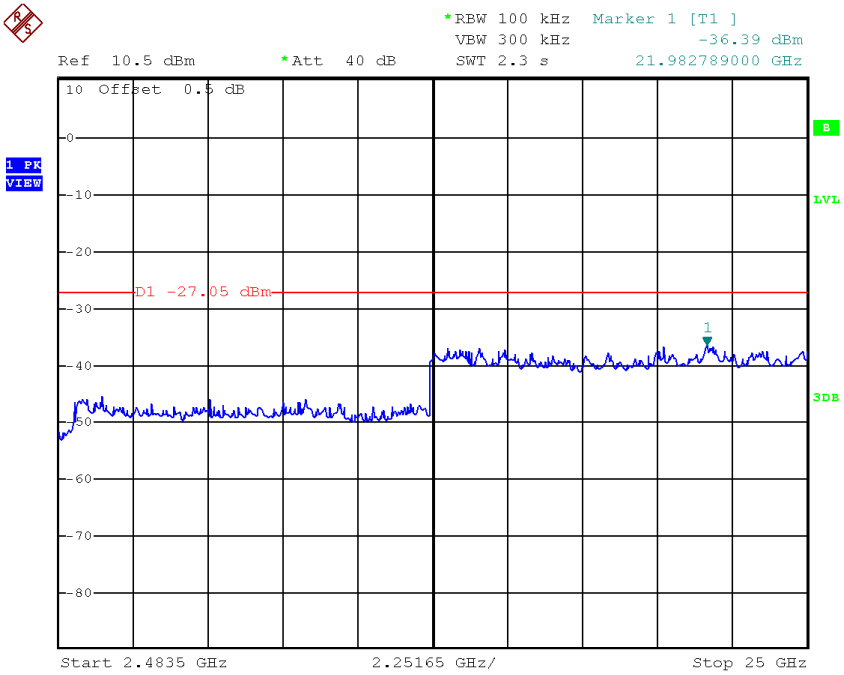

Date: 1.SEP.2020 10:16:05

TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11g, Highest Channel, Plot A

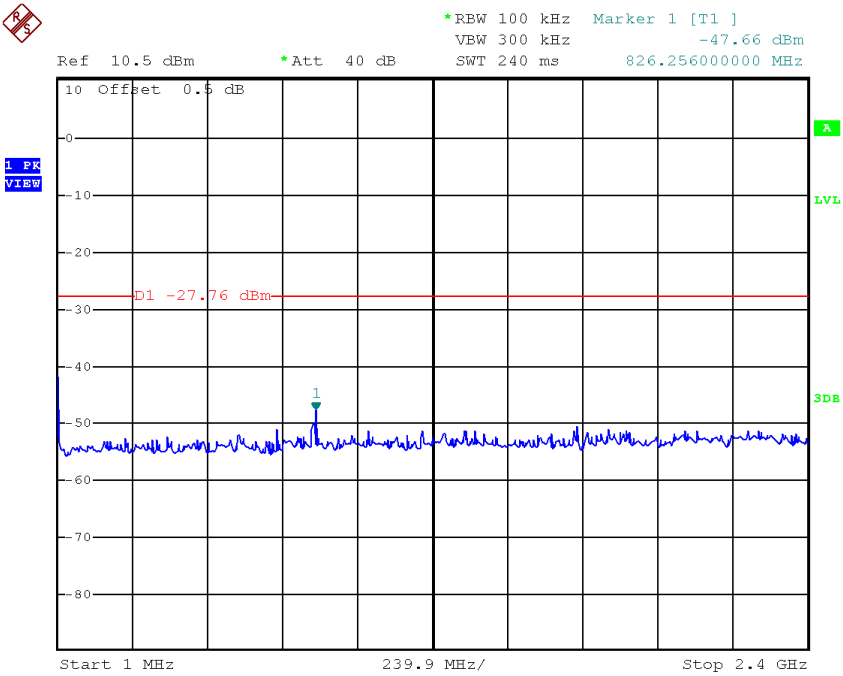

Date: 1.SEP.2020 10:18:05

802.11g, Highest Channel, Plot B

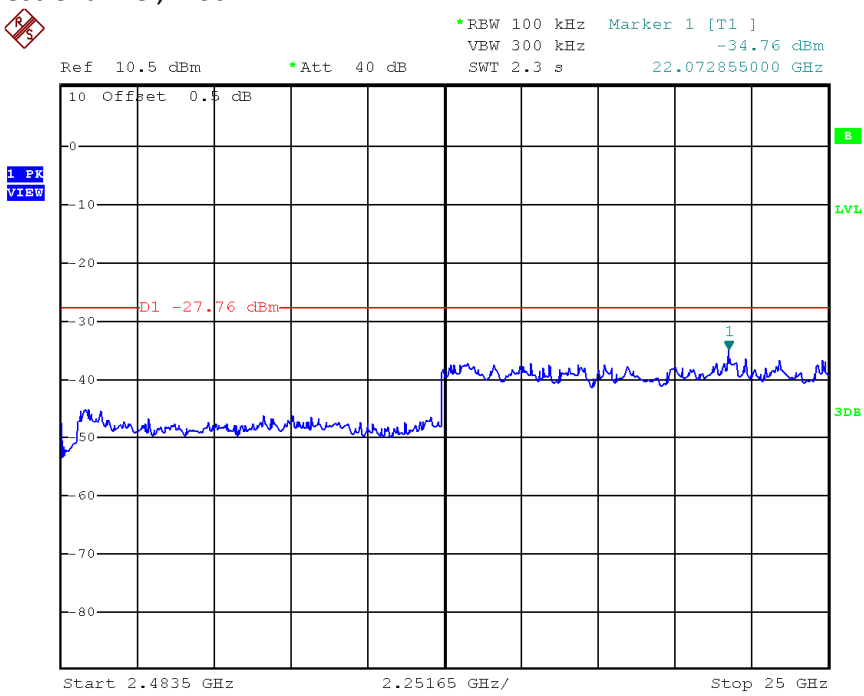

Date: 1.SEP.2020 10:17:13

TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802. 11n (20MHz), Lowest Channel, Bandedge

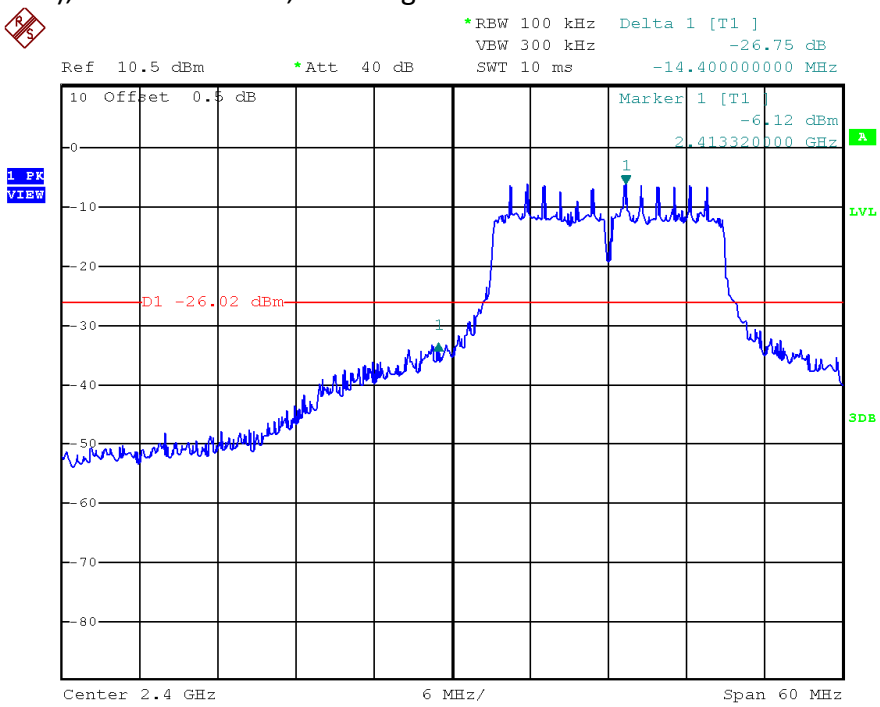

Date: 1.SEP.2020 09:46:45

802. 11n (20MHz), Highest Channel, Bandedge

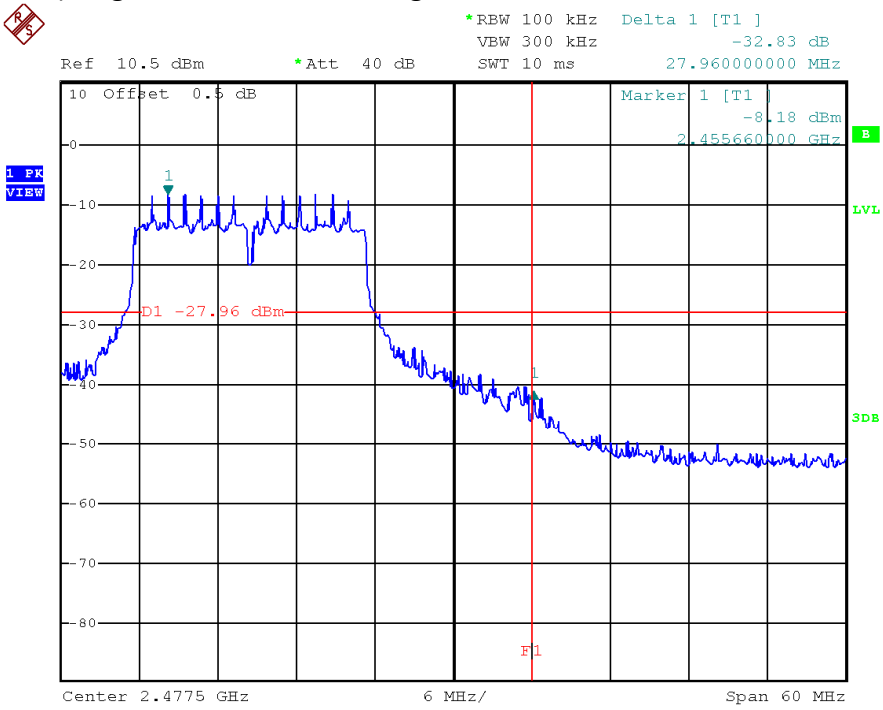

Date: 1.SEP.2020 09:47:52

TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (20MHz), Lowest Channel, Plot A

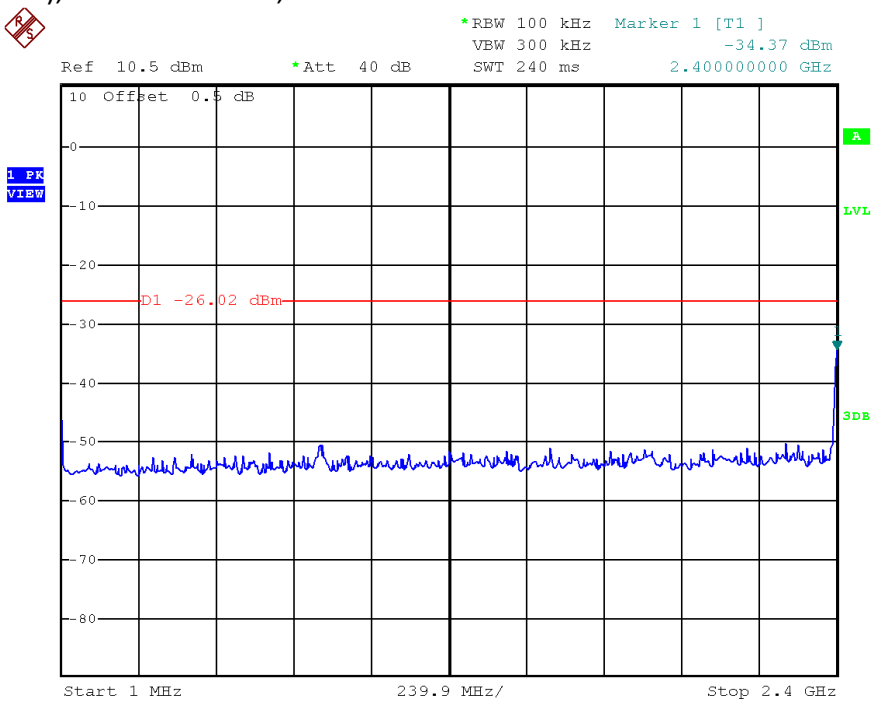

Date: 1.SEP.2020 10:19:13

802.11n (20MHz), Lowest Channel, Plot B

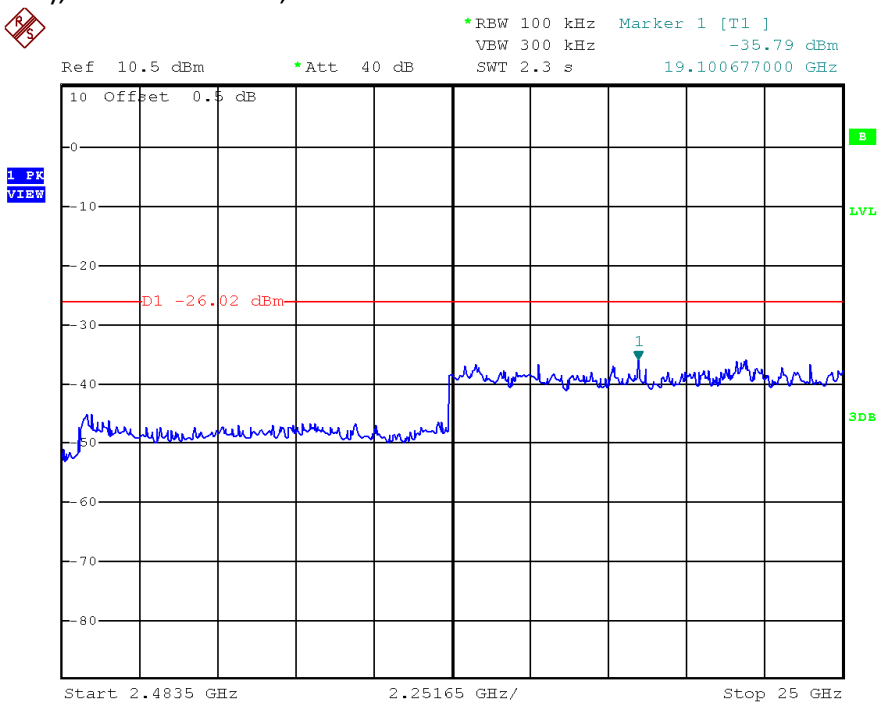

Date: 1.SEP.2020 10:20:10

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (20MHz), Middle Channel, Plot A

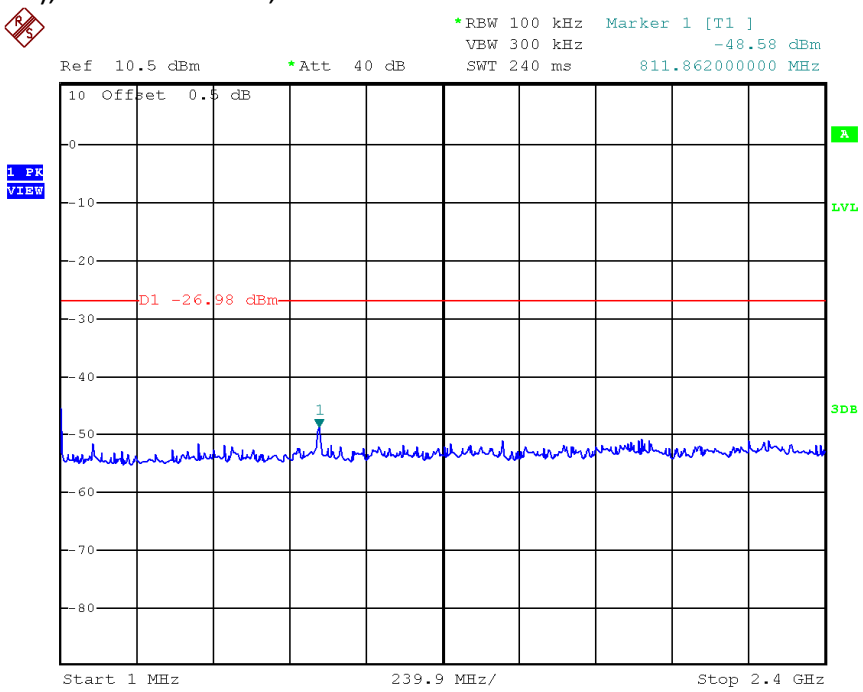

Date: 1.SEP.2020 10:21:30

802.11n (20MHz), Middle Channel, Plot B

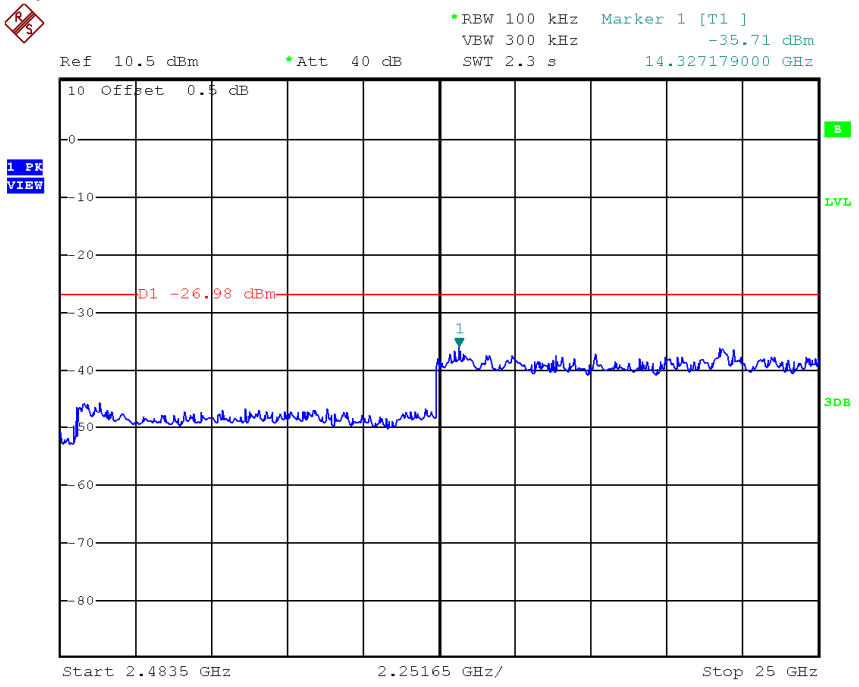

Date: 1.SEP.2020 10:22:23

TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (20MHz), Highest Channel, Plot A

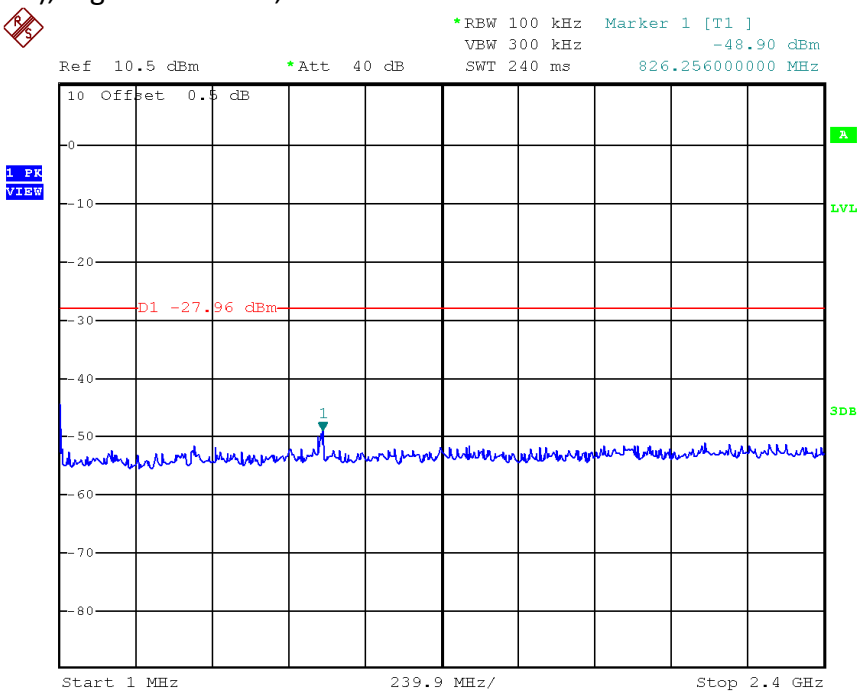

Date: 1.SEP.2020 10:24:22

802.11n (20MHz), Highest Channel, Plot B

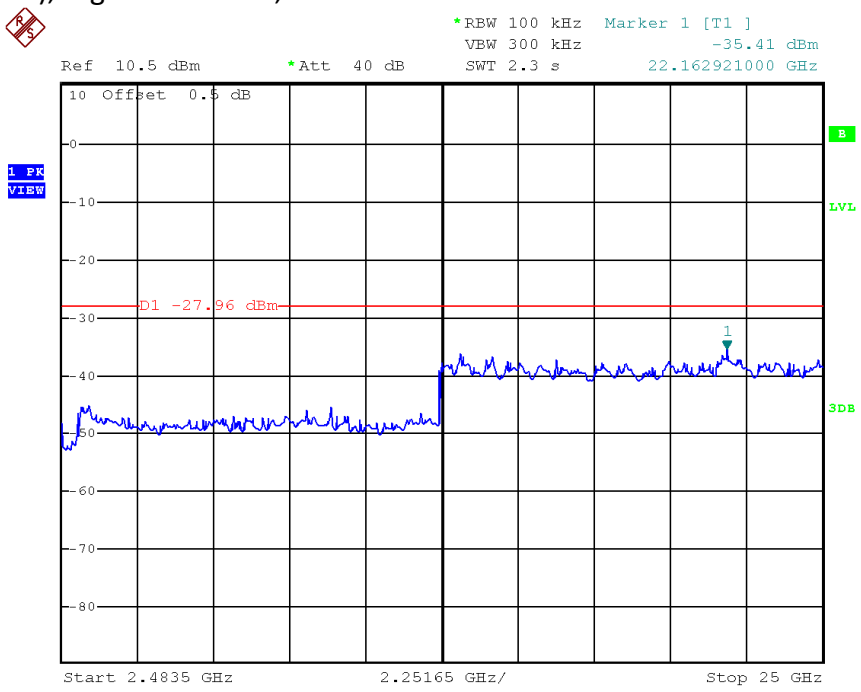

Date: 1.SEP.2020 10:26:12

TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802. 11n (40MHz), Lowest Channel, Bandedge

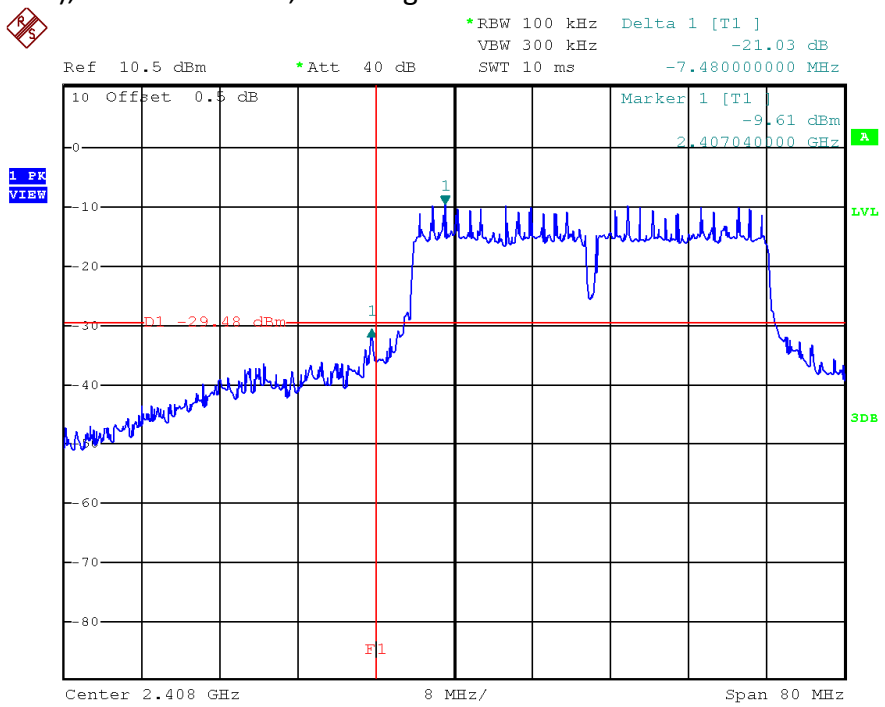

Date: 1.SEP.2020 09:49:38

802. 11n (40MHz), Highest Channel, Bandedge

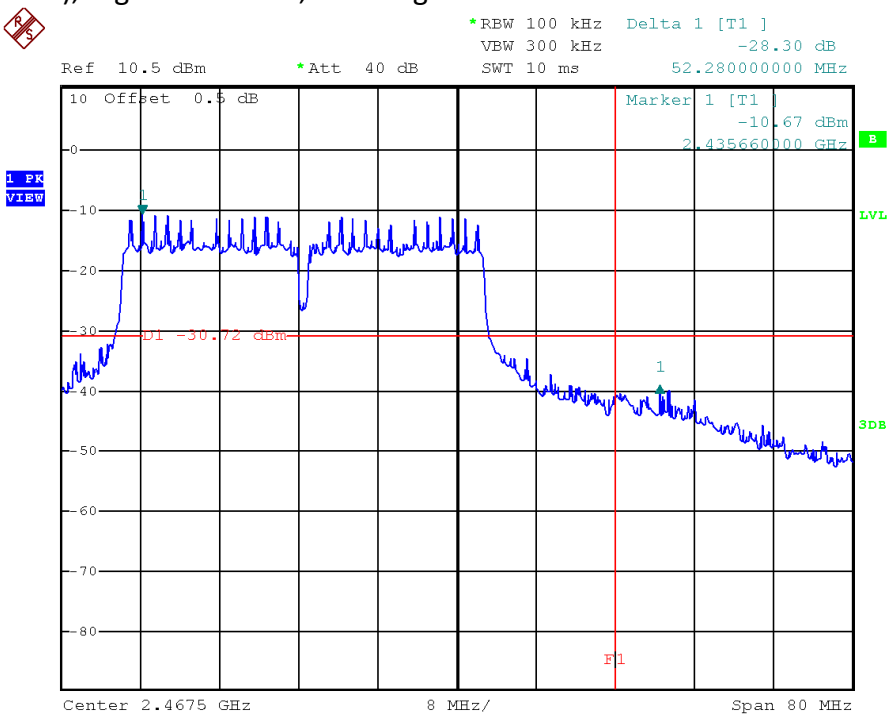

Date: 1.SEP.2020 09:52:33

TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (40MHz), Lowest Channel, Plot A

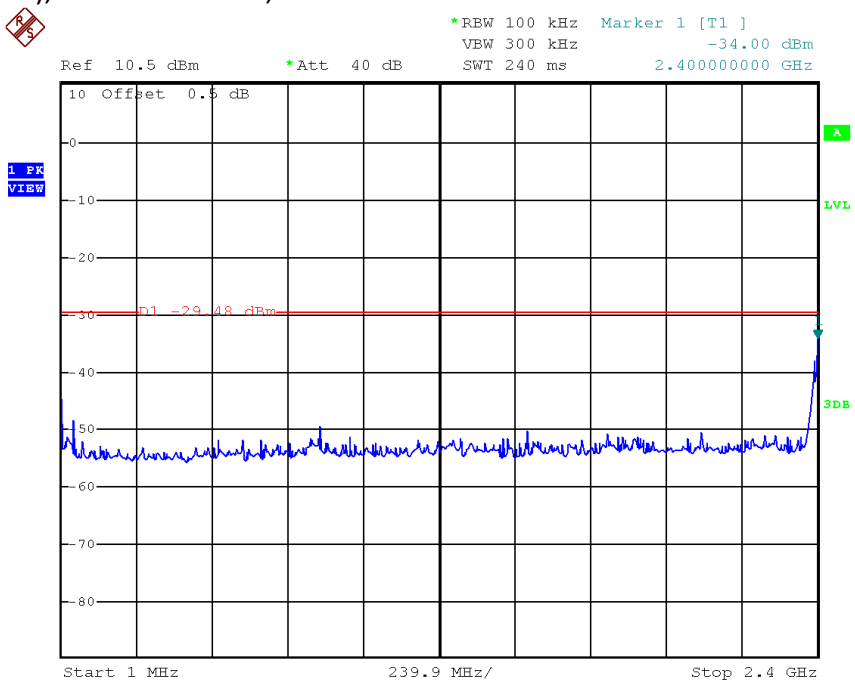

Date: 1.SEP.2020 10:27:58

802.11n (40MHz), Lowest Channel, Plot B

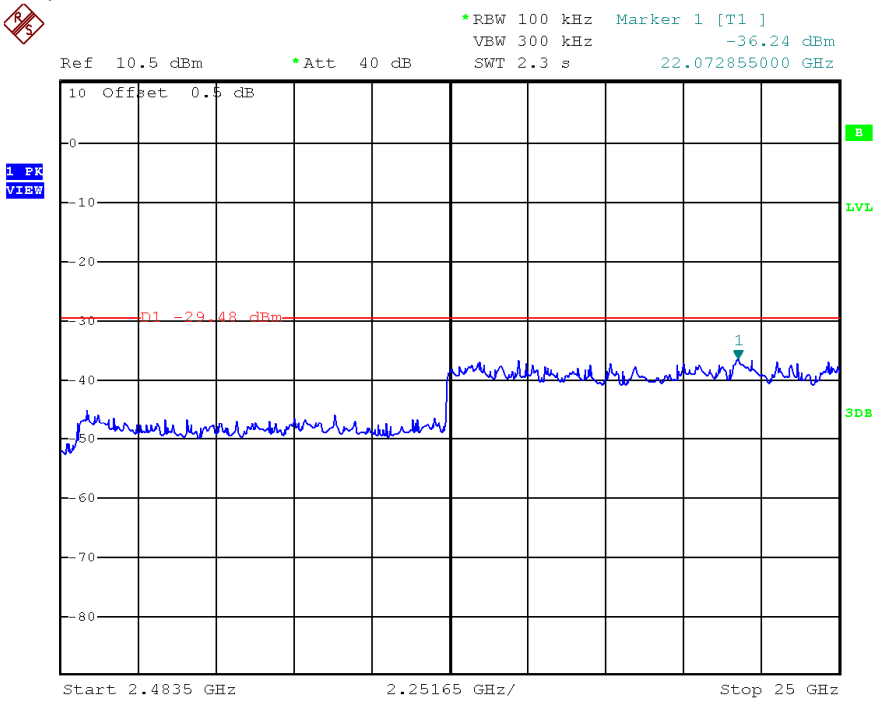

Date: 1.SEP.2020 10:30:16

TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (40MHz), Middle Channel, Plot A

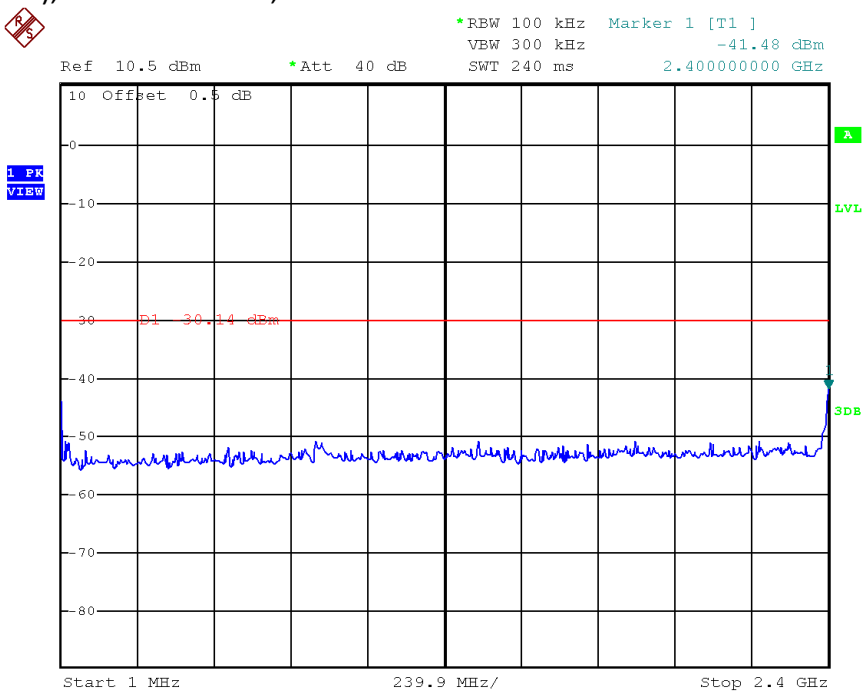

Date: 1.SEP.2020 10:33:06

802.11n (40MHz), Middle Channel, Plot B

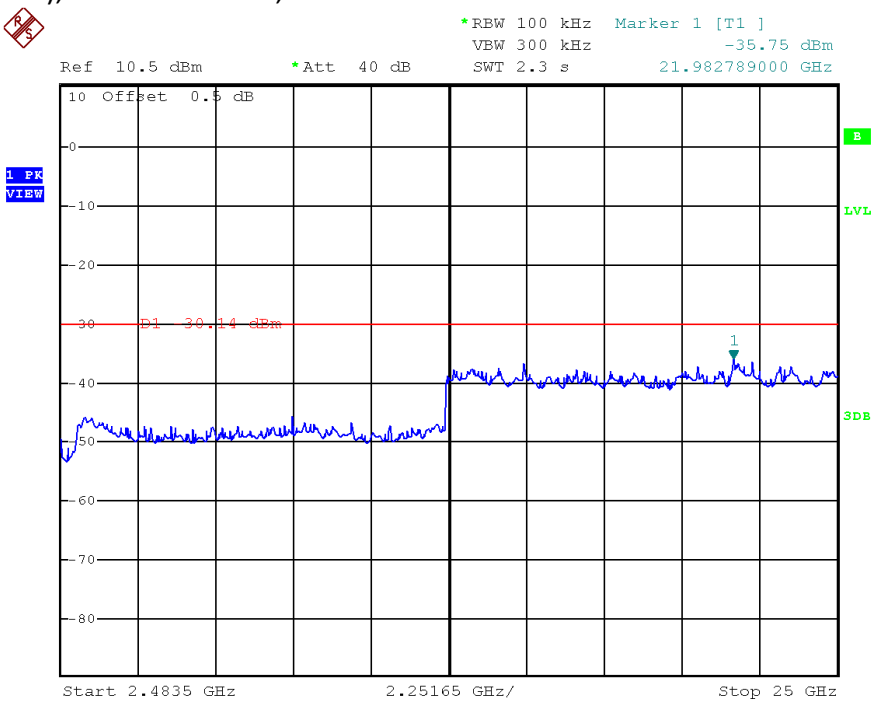

Date: 1.SEP.2020 10:31:31

TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (40MHz), Highest Channel, Plot A

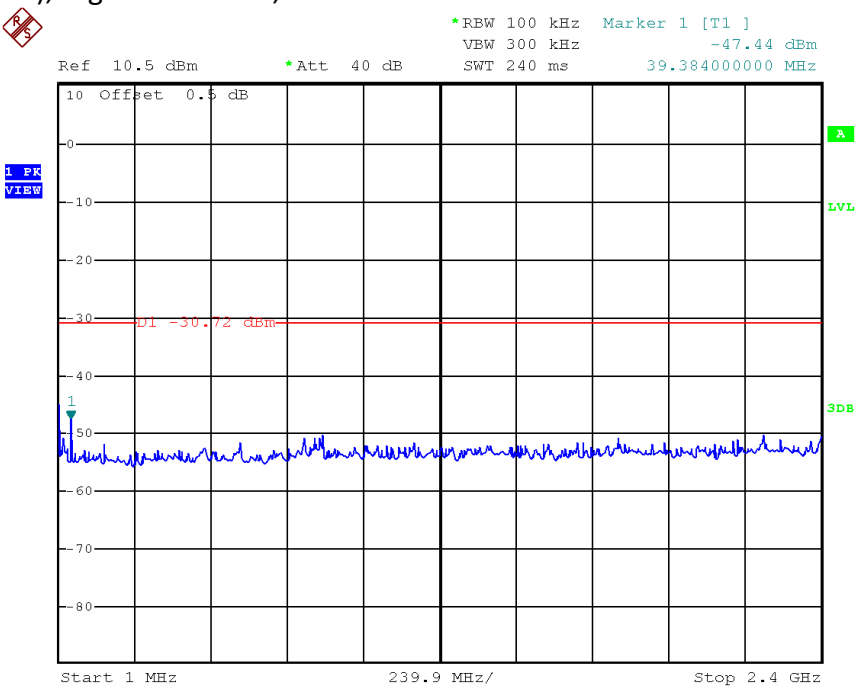

Date: 1.SEP.2020 10:34:23

802.11n (40MHz), Highest Channel, Plot B

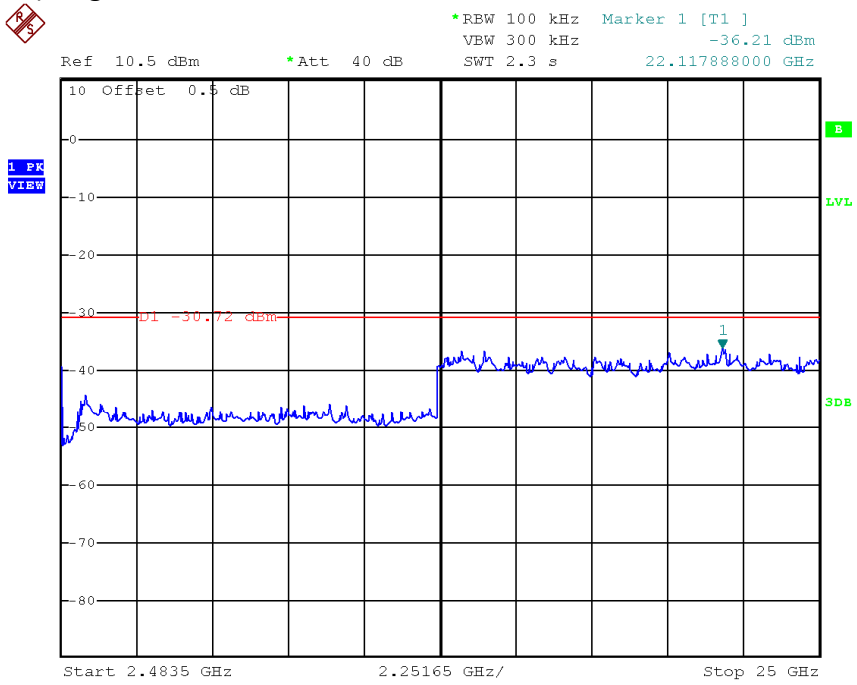

Date: 1.SEP.2020 10:35:39

4.5 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

FS = RA + AF + CF - AG + PD + AV

Where FS = Field Strength in dBµV/m
RA = Receiver Amplitude (including preamplifier) in dBµV
CF = Cable Attenuation Factor in dB
AF = Antenna Factor in dB
AG = Amplifier Gain in dB
PD = Pulse Desensitization in dB
AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

FS = RA + AF + CF - AG + PD + AV

<u>Example</u>
Assume a receiver reading of 62.0 dBµV is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0 dBµV/m. This value in dBµV/m is converted to its corresponding level in µV/m.

RA = 62.0 dBµV
AF = 7.4 dB
CF = 1.6 dB
AG = 29.0 dB
PD = 0.0 dB
AV = -10 dB

FS = 62.0 + 7.4 + 1.6 – 29.0 + 0.0 + (-10.0) = 32.0 dBµV/m

Level in µV/m = Common Antilogarithm [(32.0 dBµV/m)/20] = 39.8 µV/m

4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst-case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

4.6.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission
at

2390.000 MHz

The worst-case radiated emission configuration photographs are saved with filename: config photos.pdf

4.6.2 Radiated Emission Data

The data in tables 1-13 list the significant emission frequencies, the limit and the margin of compliance.

Judgement -

Passed by 0.2 dB margin

RADIATED EMISSION DATA

Mode: TX-Channel 01

Table 1
IEEE 802.11b (DSSS, 1 Mbps)

Polari-zation	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBµV/m)	Average Limit at 3m (dBµV/m)	Margin (dB)
H	***2390.000***	***50.8***	***33***	***29.4***	***47.2***	***54.0***	***-6.8***
V	***4824.000***	***40.9***	***33***	***34.9***	***42.8***	***54.0***	***-11.2***
H	***12060.000***	***30.7***	***33***	***40.5***	***38.2***	***54.0***	***-15.8***

Polari-zation	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBµV/m)	Peak Limit at 3m (dBµV/m)	Margin (dB)
H	***2390.000***	***63.4***	***33***	***29.4***	***59.8***	***74.0***	***-14.2***
V	***4824.000***	***51.1***	***33***	***34.9***	***53.0***	***74.0***	***-21.0***
H	***12060.000***	***33.0***	***33***	***40.5***	***40.5***	***74.0***	***-33.5***

NOTES:
1. Peak detector is used for the peak emission measurement.
2. Average measurement method is according to ANSI C63.10
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

Mode: TX-Channel 06

Table 2
IEEE 802.11b (DSSS, 1 Mbps)

Polari-zation	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBµV/m)	Average Limit at 3m (dBµV/m)	Margin (dB)
V	***4874.000***	***41.6***	***33***	***34.9***	***43.5***	***54.0***	***-10.5***
V	***7311.000***	***30.3***	***33***	***37.9***	***35.2***	***54.0***	***-18.8***
H	***12185.000***	***35.7***	***33***	***40.5***	***43.2***	***54.0***	***-10.8***

Polari-zation	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBµV/m)	Peak Limit at 3m (dBµV/m)	Margin (dB)
V	***4874.000***	***51.7***	***33***	***34.9***	***53.6***	***74.0***	***-20.4***
V	***7311.000***	***35.3***	***33***	***37.9***	***40.2***	***74.0***	***-33.8***
H	***12185.000***	***41.3***	***33***	***40.5***	***48.8***	***74.0***	***-25.2***

NOTES:
1. Peak detector is used for the peak emission measurement.
2. Average measurement method is according to ANSI C63.10
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

Mode: TX-Channel 11

Table 3
IEEE 802.11b (DSSS, 1 Mbps)

Polari-zation	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	***2483.500***	***43.0***	***33***	***29.4***	***39.4***	***54.0***	***-14.6***
V	***4924.000***	***40.5***	***33***	***34.9***	***42.4***	***54.0***	***-11.6***
V	***7386.000***	***29.3***	***33***	***37.9***	***34.2***	***54.0***	***-19.8***
H	***12310.000***	***30.7***	***33***	***40.5***	***38.2***	***54.0***	***-15.8***

Polari-zation	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	***2483.500***	***55.1***	***33***	***29.4***	***51.5***	***74.0***	***-22.5***
V	***4924.000***	***48.7***	***33***	***34.9***	***50.6***	***74.0***	***-23.4***
V	***7386.000***	***37.6***	***33***	***37.9***	***42.5***	***74.0***	***-31.5***
H	***12310.000***	***39.3***	***33***	***40.5***	***46.8***	***74.0***	***-27.2***

NOTES:
1. Peak detector is used for the peak emission measurement.
2. Average measurement method is according to ANSI C63.10
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

Mode: TX-Channel 01

Table 4
IEEE 802.11g (OFDM, 6 Mbps)

Polari-zation	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	***2390.000***	***57.4***	***33***	***29.4***	***53.8***	***54.0***	***-0.2***
V	***4824.000***	***32.6***	***33***	***34.9***	***34.5***	***54.0***	***-19.5***
H	***12060.000***	***26.7***	***33***	***40.5***	***34.2***	***54.0***	***-19.8***

Polari-zation	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	***2390.000***	***74.1***	***33***	***29.4***	***70.5***	***74.0***	***-3.5***
V	***4824.000***	***45.5***	***33***	***34.9***	***47.4***	***74.0***	***-26.6***
H	***12060.000***	***37.7***	***33***	***40.5***	***45.2***	***74.0***	***-28.8***

NOTES:
1. Peak detector is used for the peak emission measurement.
2. Average measurement method is according to ANSI C63.10
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

Mode: TX-Channel 06

Table 5
IEEE 802.11g (OFDM, 6 Mbps)

Polari-zation	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBµV/m)	Average Limit at 3m (dBµV/m)	Margin (dB)
V	***4874.000***	***35.6***	***33***	***34.9***	***37.5***	***54.0***	***-16.5***
V	***7311.000***	***33.7***	***33***	***37.9***	***38.6***	***54.0***	***-15.4***
H	***12185.000***	***32.9***	***33***	***40.5***	***40.4***	***54.0***	***-13.6***

Polari-zation	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBµV/m)	Peak Limit at 3m (dBµV/m)	Margin (dB)
V	***4874.000***	***46.9***	***33***	***34.9***	***48.8***	***74.0***	***-25.2***
V	***7311.000***	***35.7***	***33***	***37.9***	***40.6***	***74.0***	***-33.4***
H	***12185.000***	***41.1***	***33***	***40.5***	***48.6***	***74.0***	***-25.4***

NOTES:
1. Peak detector is used for the peak emission measurement.
2. Average measurement method is according to ANSI C63.10
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

Mode: TX-Channel 11

Table 6
IEEE 802.11g (OFDM, 6 Mbps)

Polari-zation	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBµV/m)	Average Limit at 3m (dBµV/m)	Margin (dB)
H	***2483.500***	***50.4***	***33***	***29.4***	***46.8***	***54.0***	***-7.2***
V	***4924.000***	***32.9***	***33***	***34.9***	***34.8***	***54.0***	***-19.2***
V	***7386.000***	***31.9***	***33***	***37.9***	***36.8***	***54.0***	***-17.2***
H	***12310.000***	***31.3***	***33***	***40.5***	***38.8***	***54.0***	***-15.2***

Polari-zation	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBµV/m)	Peak Limit at 3m (dBµV/m)	Margin (dB)
H	***2483.500***	***66.2***	***33***	***29.4***	***62.6***	***74.0***	***-11.4***
V	***4924.000***	***45.5***	***33***	***34.9***	***47.4***	***74.0***	***-26.6***
V	***7386.000***	***44.9***	***33***	***37.9***	***49.8***	***74.0***	***-24.2***
H	***12310.000***	***42.9***	***33***	***40.5***	***50.4***	***74.0***	***-23.6***

NOTES:
1. Peak detector is used for the peak emission measurement.
2. Average measurement method is according to ANSI C63.10
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

Mode: TX-Channel 01

Table 7
IEEE 802.11n (20MHz) (OFDM, MCS0)

Polari-zation	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBµV/m)	Average Limit at 3m (dBµV/m)	Margin (dB)
H	***2390.000***	***57.4***	***33***	***29.4***	***53.8***	***54.0***	***-0.2***
V	***4824.000***	***32.7***	***33***	***34.9***	***34.6***	***54.0***	***-19.4***
H	***12060.000***	***35.1***	***33***	***40.5***	***42.6***	***54.0***	***-11.4***

Polari-zation	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBµV/m)	Peak Limit at 3m (dBµV/m)	Margin (dB)
H	***2390.000***	***77.0***	***33***	***29.4***	***73.4***	***74.0***	***-0.6***
V	***4824.000***	***44.9***	***33***	***34.9***	***46.8***	***74.0***	***-27.2***
H	***12060.000***	***51.1***	***33***	***40.5***	***58.6***	***74.0***	***-15.4***

NOTES:
1. Peak detector is used for the peak emission measurement.
2. Average measurement method is according to ANSI C63.10
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

Mode: TX-Channel 06

Table 8
IEEE 802.11n (20MHz) (OFDM, MCS0)

Polari-zation	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBµV/m)	Average Limit at 3m (dBµV/m)	Margin (dB)
V	***4874.000***	***35.3***	***33***	***34.9***	***37.2***	***54.0***	***-16.8***
V	***7311.000***	***31.9***	***33***	***37.9***	***36.8***	***54.0***	***-17.2***
H	***12185.000***	***36.1***	***33***	***40.5***	***43.6***	***54.0***	***-10.4***

Polari-zation	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBµV/m)	Peak Limit at 3m (dBµV/m)	Margin (dB)
V	***4874.000***	***49.5***	***33***	***34.9***	***51.4***	***74.0***	***-22.6***
V	***7311.000***	***43.7***	***33***	***37.9***	***48.6***	***74.0***	***-25.4***
H	***12185.000***	***45.1***	***33***	***40.5***	***52.6***	***74.0***	***-21.4***

NOTES:
1. Peak detector is used for the peak emission measurement.
2. Average measurement method is according to ANSI C63.10
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

Mode: TX-Channel 11

Table 9
IEEE 802.11n (20MHz) (OFDM, MCS0)

Polari-zation	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBµV/m)	Average Limit at 3m (dBµV/m)	Margin (dB)
H	***2483.500***	***49.8***	***33***	***29.4***	***46.2***	***54.0***	***-7.8***
V	***4924.000***	***38.5***	***33***	***34.9***	***40.4***	***54.0***	***-13.6***
V	***7386.000***	***36.3***	***33***	***37.9***	***41.2***	***54.0***	***-12.8***
H	***12310.000***	***37.1***	***33***	***40.5***	***44.6***	***54.0***	***-9.4***

Polari-zation	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBµV/m)	Peak Limit at 3m (dBµV/m)	Margin (dB)
H	***2483.500***	***65.4***	***33***	***29.4***	***61.8***	***74.0***	***-12.2***
V	***4924.000***	***50.7***	***33***	***34.9***	***52.6***	***74.0***	***-21.4***
V	***7386.000***	***45.5***	***33***	***37.9***	***50.4***	***74.0***	***-23.6***
H	***12310.000***	***46.3***	***33***	***40.5***	***53.8***	***74.0***	***-20.2***

NOTES:
1. Peak detector is used for the peak emission measurement.
2. Average measurement method is according to ANSI C63.10
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

Mode: TX-Channel 03

Table 10
IEEE 802.11n (40MHz) (OFDM, MCS0)

Polari-zation	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBµV/m)	Average Limit at 3m (dBµV/m)	Margin (dB)
H	***2390.000***	***57.4***	***33***	***29.4***	***53.8***	***54.0***	***-0.2***
V	***4844.000***	***34.1***	***33***	***34.9***	***36.0***	***54.0***	***-18.0***
H	***12110.000***	***35.9***	***33***	***40.5***	***43.4***	***54.0***	***-10.6***

Polari-zation	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBµV/m)	Peak Limit at 3m (dBµV/m)	Margin (dB)
H	***2390.000***	***77.2***	***33***	***29.4***	***73.6***	***74.0***	***-0.4***
V	***4844.000***	***45.6***	***33***	***34.9***	***47.5***	***74.0***	***-26.5***
H	***12110.000***	***41.1***	***33***	***40.5***	***48.6***	***74.0***	***-25.4***

NOTES:
1. Peak detector is used for the peak emission measurement.
2. Average measurement method is according to ANSI C63.10
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

Mode: TX-Channel 06

Table 11
IEEE 802.11n (40MHz) (OFDM, MCS0)

Polari-zation	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBµV/m)	Average Limit at 3m (dBµV/m)	Margin (dB)
V	***4874.000***	***36.9***	***33***	***34.9***	***38.8***	***54.0***	***-15.2***
V	***7311.000***	***35.3***	***33***	***37.9***	***40.2***	***54.0***	***-13.8***
H	***12185.000***	***39.1***	***33***	***40.5***	***46.6***	***54.0***	***-7.4***

Polari-zation	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBµV/m)	Peak Limit at 3m (dBµV/m)	Margin (dB)
V	***4874.000***	***48.7***	***33***	***34.9***	***50.6***	***74.0***	***-23.4***
V	***7311.000***	***38.5***	***33***	***37.9***	***43.4***	***74.0***	***-30.6***
H	***12185.000***	***41.3***	***33***	***40.5***	***48.8***	***74.0***	***-25.2***

NOTES:
1. Peak detector is used for the peak emission measurement.
2. Average measurement method is according to ANSI C63.10
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

Mode: TX-Channel 09

Table 12
IEEE 802.11n (40MHz) (OFDM, MCS0)

Polari-zation	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBµV/m)	Average Limit at 3m (dBµV/m)	Margin (dB)
H	***2483.500***	***52.1***	***33***	***29.4***	***48.5***	***54.0***	***-5.5***
V	***4904.000***	***36.7***	***33***	***34.9***	***38.6***	***54.0***	***-15.4***
V	***7356.000***	***31.7***	***33***	***37.9***	***36.6***	***54.0***	***-17.4***
H	***12260.000***	***35.1***	***33***	***40.5***	***42.6***	***54.0***	***-11.4***

Polari-zation	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBµV/m)	Peak Limit at 3m (dBµV/m)	Margin (dB)
H	***2483.500***	***67.1***	***33***	***29.4***	***63.5***	***74.0***	***-10.5***
V	***4904.000***	***48.7***	***33***	***34.9***	***50.6***	***74.0***	***-23.4***
V	***7356.000***	***43.9***	***33***	***37.9***	***48.8***	***74.0***	***-25.2***
H	***12260.000***	***42.7***	***33***	***40.5***	***50.2***	***74.0***	***-23.8***

NOTES:
1. Peak detector is used for the peak emission measurement.
2. Average measurement method is according to ANSI C63.10
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

Mode: Wifi Operating

Table 13

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	71.556	41.2	16	7.0	32.2	40.0	-7.8
V	95.444	40.8	16	12.0	36.8	43.5	-6.7
V	143.706	36.5	16	14.0	34.5	43.5	-9.0
H	239.988	31.2	16	19.0	34.2	46.0	-11.8
V	***279.962***	***28.5***	***16***	***22.0***	***34.5***	***46.0***	***-11.5***
H	319.998	31.6	16	23.0	38.6	46.0	-7.4

NOTES:

1. Quasi-Peak detector is used for the emission measurement.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

4.6.3 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

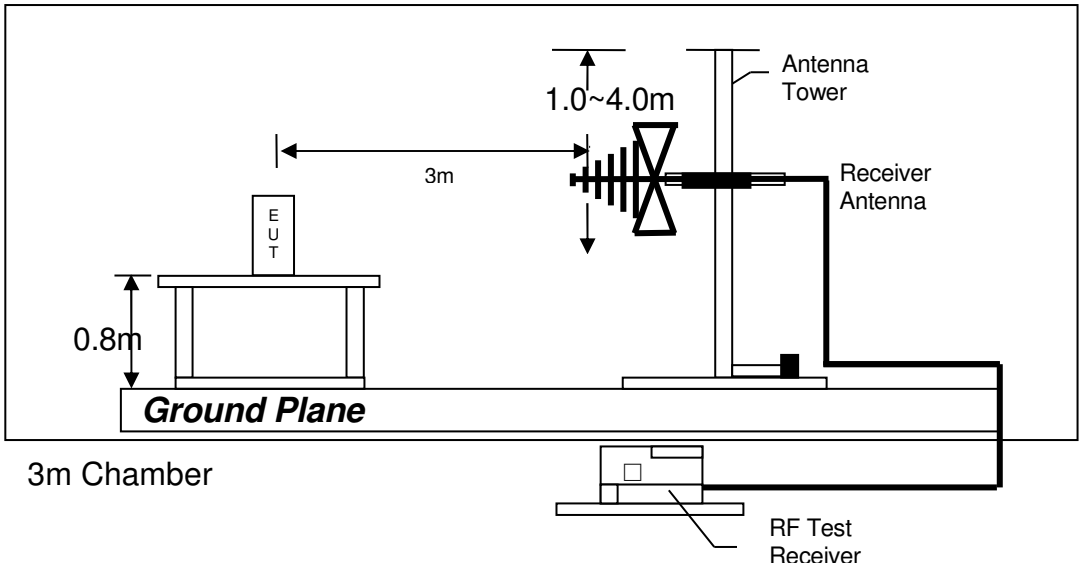

Test setup of radiated emissions up to 1GHz

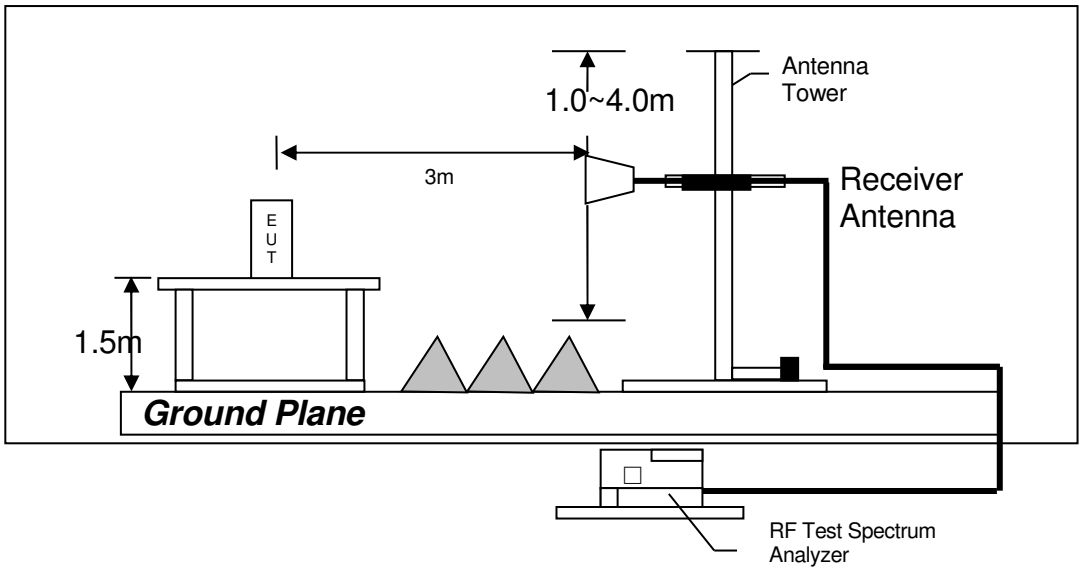

Test setup of radiated emissions above 1GHz

4.6.4 Transmitter Duty Cycle Calculation

Not applicable – No average factor is required.

4.7 AC Power Line Conducted Emission

☐ Not applicable – EUT is only powered by battery for operation.

☒ EUT connects to AC power line. Emission Data is listed in following pages.

☐ Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

4.7.1 AC Power Line Conducted Emission Configuration Photograph

The worst-case line conducted configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

4.7.2 AC Power Line Conducted Emission Data

The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

Passed by over 20 dB margin

TEST REPORT

AC POWER LINE CONDUCTED EMISSION

Worst Case: Wifi Operating

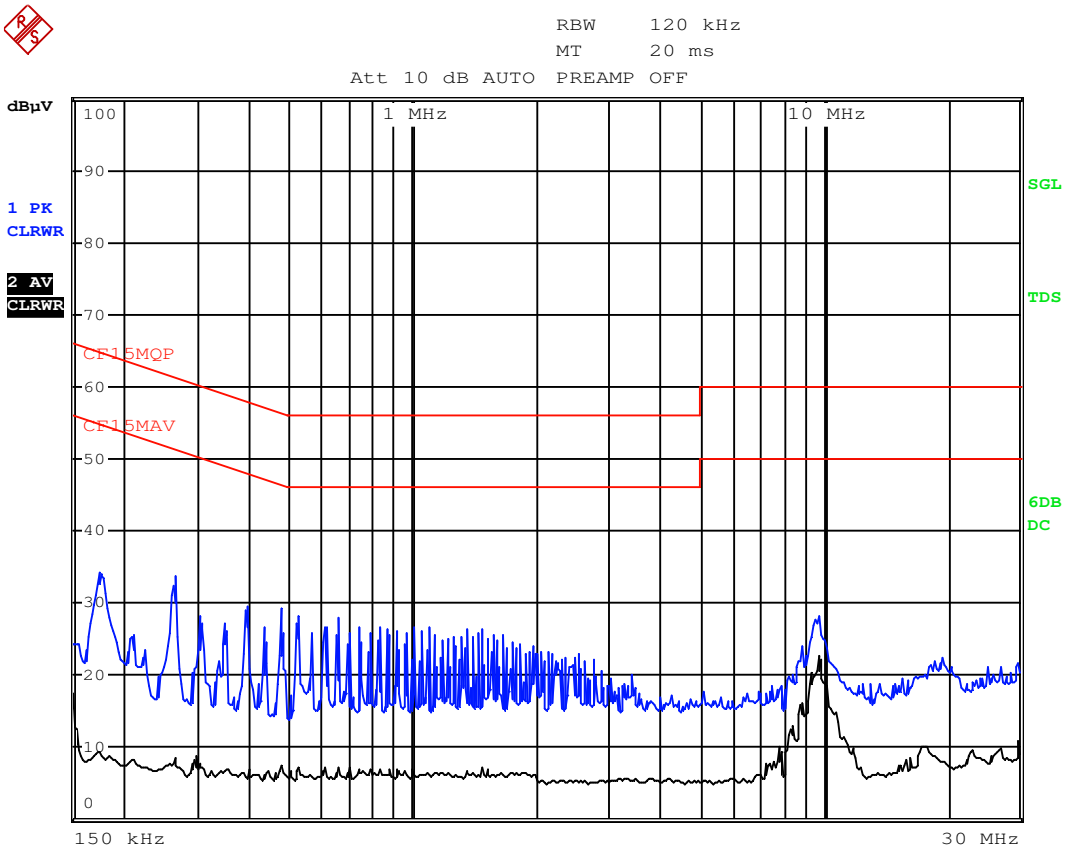

20050780HKG-001 (OPERATING, 2 SOLENOLD)

Date: 5.AUG.2020 11:52:02

4.7.3 Conducted Emission Test Setup

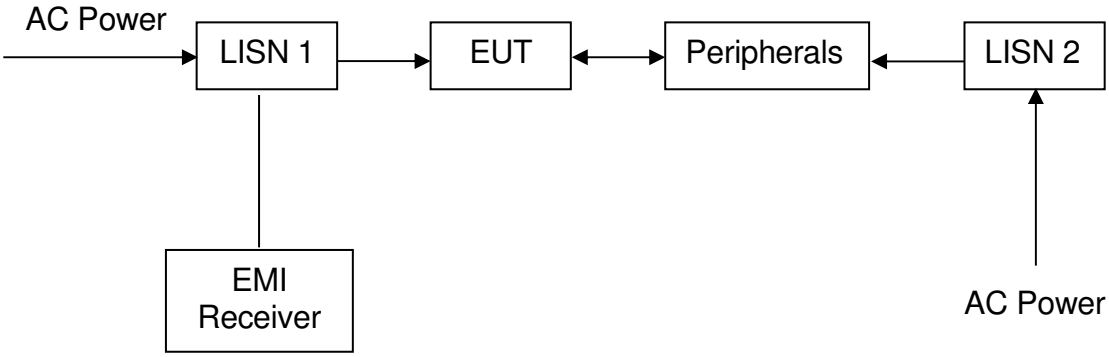

EXHIBIT 5 EQUIPMENT LIST

5.0 EQUIPMENT LIST

1) Radiated Emissions Test

Equipment	EMI Test Receiver	Spectrum Analyzer	Biconical Antenna
Registration No.	EW-2500	EW-2253	EW-0571
Manufacturer	R&S	ROHDESCHWARZ	EMCO
Model No.	ESCI	FSP40	3104C
Calibration Date	January 09, 2020	18 Nov 2019	July 23, 2019
Calibration Due Date	January 09, 2021	18 Nov 2020	July 23, 2021

Equipment	Log Periodic Antenna	Double Ridged Guide Antenna	14m Double Shield RF Cable (20MHz - 6GHz)
Registration No.	EW-0447	EW-1015	EW-2528
Manufacturer	EMCO	EMCO	RADIALL
Model No.	3146	3115	Nm-RG142-
Calibration Date	September 25, 2019	16 May 2019	30 Sep 2019
Calibration Due Date	March 25, 2021	16 Nov 2020	30 Sep 2020

Equipment	Active Loop H-field (9kHz to 30MHz)	RF Preamplifier (9kHz to 6000MHz)	RF Cable 14m (1GHz to 26.5GHz)
Registration No.	EW-3326	EW-3006b	EW-3151
Manufacturer	EMCO	SCHWARZBECK	GREATBILLION
Model No.	6502	BBV9718	SMA m/SHF5MPU /SMA m ra14m,26G
Calibration Date	March 21, 2019	25 Nov 2019	March 04, 2020
Calibration Due Date	September 21, 2020	25 Nov 2020	March 04, 2021

Equipment	2.4GHz Notch Filter	Pyramidal Horn Antenna
Registration No.	EW-3435	EW-0905
Manufacturer	MICROWAVE	EMCO
Model No.	N0324413	3160-09
Calibration Date	16 Nov 2019	July 23, 2019
Calibration Due Date	16 Nov 2020	January 23, 2021

2) Conducted Emissions Test

Equipment	RF Cable 80cm (RG142) (9kHz to 30MHz)	Artificial Mains Network	EMI Test Receiver
Registration No.	EW-2451	EW-3360	EW-2500
Manufacturer	RADIALL	ROHDESCHWARZ	R&S
Model No.	RF Cable 80cm (RG142) (9kHz to 30MHz)	ENV-216	ESCI
Calibration Date	December 08, 2019	August 29, 2019	January 09, 2020
Calibration Due Date	December 08, 2020	August 29, 2020	January 09, 2021

3) Conductive Measurement Test

Equipment	Spectrum Analyzer	RF Power Meter with Power Sensor	14m Double Shield RF Cable (20MHz - 6GHz)
Registration No.	EW-2253	EW-3309	EW-2528
Manufacturer	ROHDESCHWARZ	ROHDESCHWARZ	RADIALL
Model No.	FSP40	NRP-Z81	Nm-RG142-
Calibration Date	18 Nov 2019	May 18, 2020	30 Sep 2019
Calibration Due Date	18 Nov 2020	May 18, 2021	30 Sep 2020

4) Bandwith/Bandedge Measurement Test

Equipment	Spectrum Analyzer	14m Double Shield RF Cable (20MHz - 6GHz)
Registration No.	EW-2253	EW-2528
Manufacturer	ROHDESCHWARZ	RADIALL
Model No.	FSP40	Nm-RG142-
Calibration Date	18 Nov 2019	30 Sep 2019
Calibration Due Date	18 Nov 2020	30 Sep 2020

- End of Report -