



Test Report No.:
FCC2021-0029-RF1

RF Test Report

EUT : Environment Monitoring Sensor
MODEL : EM300-SLD-915M
BRAND NAME : Milesight
APPLICANT : Xiamen Milesight IoT Co., Ltd.
Classification Of Test : N/A

CVC Testing Technology Co., Ltd.



Applicant		Name : Xiamen Milesight IoT Co., Ltd.	
		Address : 4/F,NO. 63-2 Wanghai Road, 2nd Software Park,Xiamen ,China	
Manufacturer		Name : Xiamen Milesight IoT Co., Ltd.	
		Address : 4/F,NO. 63-2 Wanghai Road, 2nd Software Park,Xiamen ,China	
Equipment Under Test		Name : Environment Monitoring Sensor	
		Model/Type: EM300-SLD-915M	
		Trade mark : Milesight	
		Serial NO.:N/A	
		Sample NO.:6-1	
Date of Receipt.	2021.09.8	Date of Testing	2021.09.08~2021.11.04
Test Specification		Test Result	
FCC Part 15, Subpart C, Section 15.247		PASS	
Evaluation of Test Result		The equipment under test was found to comply with the requirements of the standards applied.	
		Issue Date: 2021.11.04	
Tested by:	Reviewed by:	Approved by:	
			
Xu ZhenFei	Liu YongHai	Chen HuaWen	
Name Signature	Name Signature	Name Signature	
Other Aspects: NONE.			
Abbreviations:OK, Pass= passed Fail = failed N/A= not applicable EUT= equipment, sample(s) under tested			

This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC.



TABLE OF CONTENTS

1	SUMMARY OF TEST RESULTS.....	6
1.1	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	7
1.2	MEASUREMENT UNCERTAINTY.....	7
1.3	TEST LOCATION.....	7
2	GENERAL INFORMATION.....	8
2.1	GENERAL PRODUCT INFORMATION.....	8
2.2	OTHER INFORMATION.....	9
2.3	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	10
2.4	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	12
2.5	DESCRIPTION OF SUPPORT UNITS.....	12
3	TEST TYPES AND RESULTS.....	13
3.1	RADIATED EMISSIONS.....	13
3.1.1	Limits.....	13
3.1.2	Measurement procedure.....	13
3.1.3	Test setup.....	14
3.1.4	Test results.....	16
3.2	NUMBER OF HOPPING FREQUENCY USED.....	21
3.2.1	Limits.....	21
3.2.2	Measurement procedure.....	21
3.2.3	Test setup.....	21
3.2.4	Test result.....	22
3.3	DWELL TIME ON EACH CHANNEL.....	23
3.3.1	Limits.....	23
3.3.2	Measurement procedure.....	23
3.3.3	Test setup.....	23
3.3.4	Test result.....	24
3.4	20dB EMISSION BANDWIDTH.....	25
3.4.1	Limits.....	25
3.4.2	Measurement procedure.....	25
3.4.3	Test setup.....	25
3.4.4	Test result.....	26
3.5	HOPPING CHANNEL SEPARATION.....	27
3.5.1	Limits.....	27
3.5.2	Measurement procedure.....	27
3.5.3	Test setup.....	27
3.5.4	Test result.....	28
3.6	CONDUCTED OUTPUT POWER.....	29
3.6.1	Limits.....	29
3.6.2	Measurement procedure.....	29
3.6.3	Test setup.....	29
3.6.4	Test result.....	30
3.7	POWER SPECTRAL DENSITY MEASUREMENT.....	31
3.7.1	Limits.....	31
3.7.2	Measurement procedure.....	31
3.7.3	Test setup.....	31
3.7.4	Test result.....	32



3.8	OUT OF BAND EMISSION MEASUREMENT.....	33
3.8.1	Limits.....	33
3.8.2	Measurement procedure.....	33
3.8.3	Test setup.....	33
3.8.4	Test result.....	34
4	PHOTOGRAPHS OF TEST SETUP.....	36
5	PHOTOGRAPHS OF THE EUT.....	37
	APPENDIX A.....	38



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FCC2021-0029-RF1	Original release	2021.11.04



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C

FCC STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	N/A	Power from battery
15.247(a)(1) (i)	Number of Hopping Frequency Used	PASS	Meet the requirement of limit.
15.247(a)(1)	Hopping Channel Separation	PASS	Meet the requirement of limit.
15.247(a)(1) (i)	20dB EMISSION BANDWIDTH	PASS	Meet the requirement of limit.
15.247(f)	Average time of Occupancy for hybrid System	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output Power	PASS	Meet the requirement of limit.
15.247(e)(f)	Power Spectral Density	PASS	Meet the requirement of limit.
15.247(d), 15.209,15.205	Radiated Emissions	PASS	Meet the requirement of limit.
15.247(d)	Out of band Emission Measurement	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.



1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS

Refer to Appendix A.

1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

No.	ITEM	FREQUENCY	UNCERTAINTY
1	Conducted Emissions	9kHz~30MHz	2.7dB
2	Radiated Spurious Emissions	9KHz ~ 30MHz	5.6dB
		30MHz ~ 1GMHz	4.6dB
		1GHz ~ 18GHz	4.4dB
		18GHz ~ 40GHz	4.6dB

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

1.3 TEST LOCATION

The tests and measurements refer to this report were performed by EMC testing Lab. of CVC Testing Technology Co., Ltd.

Address: No.3,TiantaiyiRoad,KaitaiAvenue,ScienceCity,Guangzhou,China

Post Code: 510663 Tel: 020-32293888

FAX: 020-32293889 E-mail: office@cvc.org.cn

Test Firm Registration Number: 937273

CN Number: 26239 Wireless Test Site Registration Number: CN0103



2 GENERAL INFORMATION

2.1 GENERAL PRODUCT INFORMATION

PRODUCT	Environment Monitoring Sensor
BRAND	Milesight
MODEL	EM300-SLD-915M
ADDITIONAL MODEL	EM300-ZLD-915M,EM300-MCS-915M,EM300-TH-915M
FCC ID	2AYHY-EM300
POWER SUPPLY	DC 3.6V(ER18505*1*3.6V) From Battey
MODULATION TYPE	Chirp Spread Spectrum
OPERATING FREQUENCY	Hybrid 125kHz, 902.3MHz~914.9MHz
NUMBER OF CHANNEL	64
PEAK OUTPUT POWER	17.99dBm (Max. Measured)
ANTENNA TYPE	PCB antenna, 1dBi Gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

Remark:

1. For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. Additional models (see about table) are identical with the test model EM300-SLD-915M only difference between models is that some function devices paste or not paste.
4. EUT photo refer to the report (Report NO.: FCC2021-0029-E).
5. The EUT have SISO function, provides 1 completed transmitter and 1 receiver.



2.2 OTHER INFORMATION

Operation Frequency Each of Channel							
CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	902.3	18	905.9	36	909.5	54	913.1
1	902.5	19	906.1	37	909.7	55	913.3
2	902.7	20	906.3	38	909.9	56	913.5
3	902.9	21	906.5	39	910.1	57	913.7
4	903.1	22	906.7	40	910.3	58	913.9
5	903.3	23	906.9	41	910.5	59	914.1
6	903.5	24	907.1	42	910.7	60	914.3
7	903.7	25	907.3	43	910.9	61	914.5
8	903.9	26	907.5	44	911.1	62	914.7
9	904.1	27	907.7	45	911.3	63	914.9
10	904.3	28	907.9	46	911.5		
11	904.5	29	908.1	47	911.7		
12	904.7	30	908.3	48	911.9		
13	904.9	31	908.5	49	912.1		
14	905.1	32	908.7	50	912.3		
15	905.3	33	908.9	51	912.5		
16	905.5	34	909.1	52	912.7		
17	905.7	35	909.3	53	912.9		

2.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, xyz axis and antenna ports

The worst case was found when positioned on xaxis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	APPLICABLE TEST ITEMS				DESCRIPTION
	RSE<1G	RSE≥1G	PLC	APCM	
A	√	√	-	√	LORA link

Where **RSE<1G**: Radiated Emission below 1GHz.

RSE≥1G: Radiated Emission above 1GHz.

PLC: Power Line Conducted Emission.

APCM: Antenna Port Conducted Measurement.

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	PACKET TYPE
A	0 to 63	0	Chirp Spread Spectrum	DR0

For the test results, only the worst case was shown in test report.

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	PACKET TYPE
A	0 to 63	0,36,63	Chirp Spread Spectrum	DR0



ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	PACKET TYPE
A	0 to 63	0,36,63	Chirp Spread Spectrum	DR0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE (SYSTEM)	TESTED BY
RSE<1G	25deg. C, 55%RH	DC 3.6V From Full Battery	Li JiaLing
RSE≥1G	25deg. C, 55%RH	DC 3.6V From Full Battery	Li JiaLing
PLC	-	-	-
APCM	25deg. C, 60%RH	DC 3.6V From Full Battery	Liu ShiWei



2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product, according to the specifications of the manufacturers. It must comply with the requirements of the following standards:

FCC PART 15, Subpart C. Section 15.247
KDB 558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10-2020

All test items have been performed and recorded as per the above standards

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support Equipment							
NO	Description	Brand	Model No.	Serial Number	Supplied by		
1	Laptop	Lenovo	V14	PFNXB1628023	Lab		
Support Cable							
NO	Description	Quantity (Number)	Length (m)	Detachable (Yes/ No)	Shielded (Yes/ No)	Cores (Number)	Supplied by
1	N/A	N/A	N/A	N/A	N/A	N/A	N/A

3 TEST TYPES AND RESULTS

3.1 RADIATED EMISSIONS

3.1.1 Limits

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a). Other emissions shall be at least 20dB below the highest level of the desired power.

FREQUENCIES (MHz)	FIELD STRENGTH (Microvolts/Meter)	MEASUREMENT DISTANCE (Meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE: 1. The lower limit shall apply at the transition frequencies.
NOTE: 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
NOTE: 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

3.1.2 Measurement procedure


- The EUT was placed on the top of a rotating table 1.5 meters(above 1GHz) and 0.8 meters(below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

3.1.3 Test setup


Below 30MHz Test Setup:

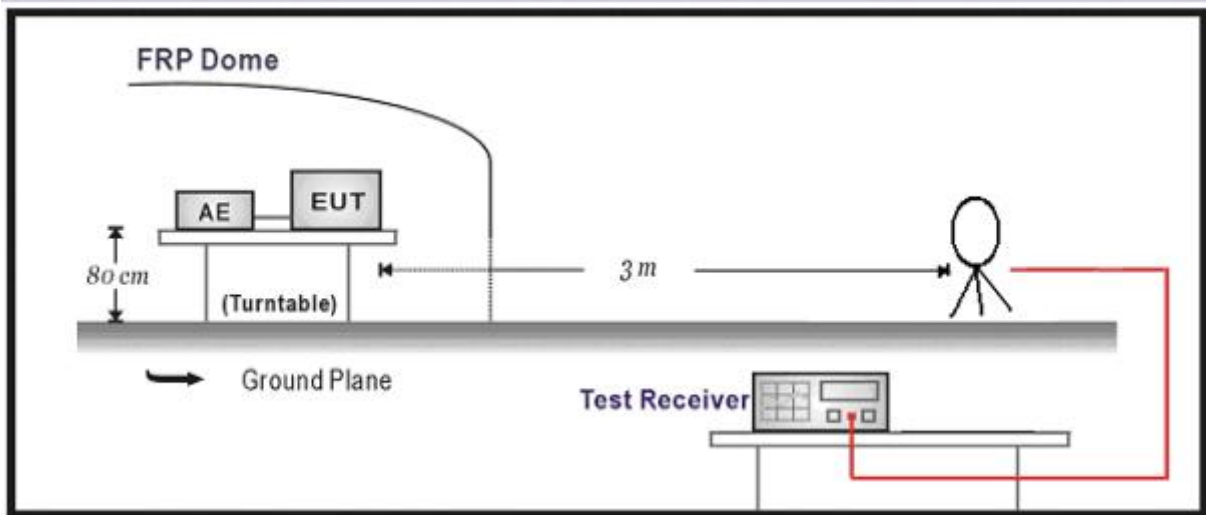

Below 1GHz Test Setup:

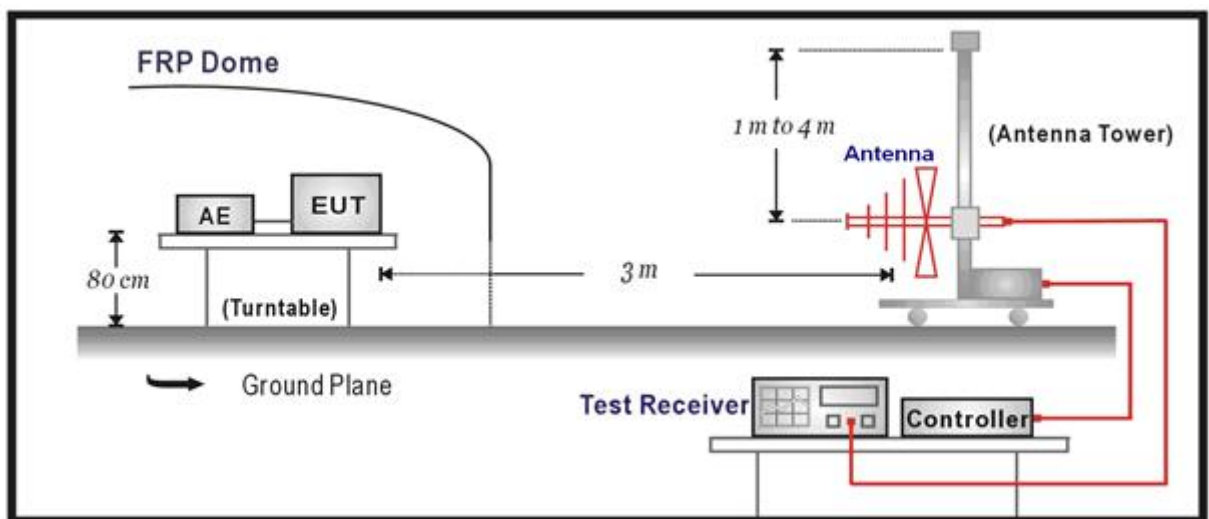


Above 1GHz Test Setup:

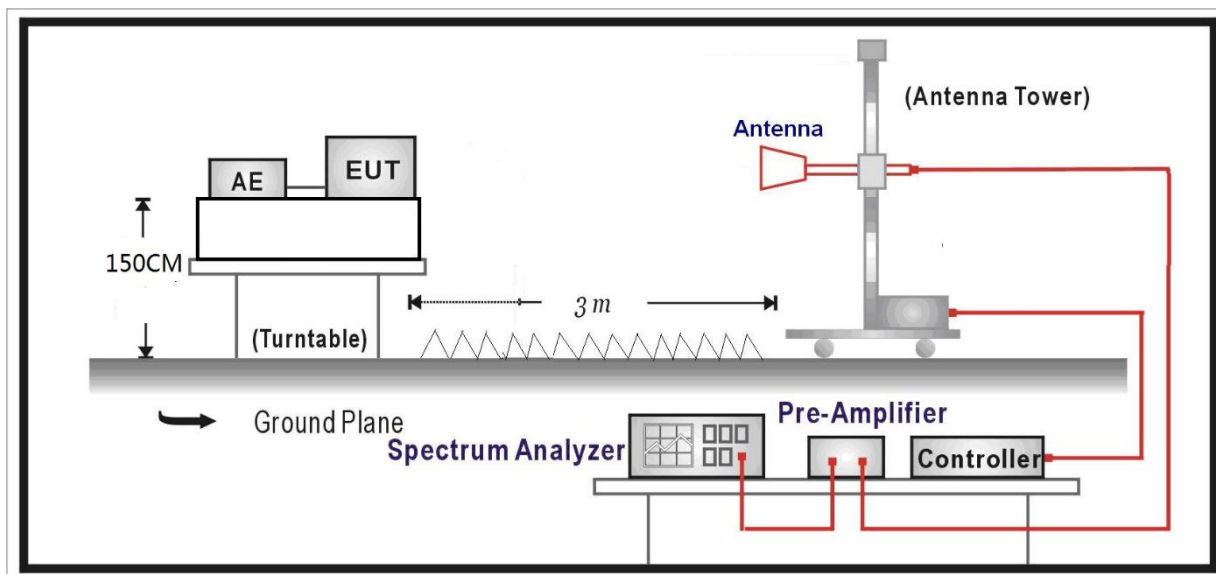

3.1.4 Test results


BELOW 1GHz WORST-CASE DATA:

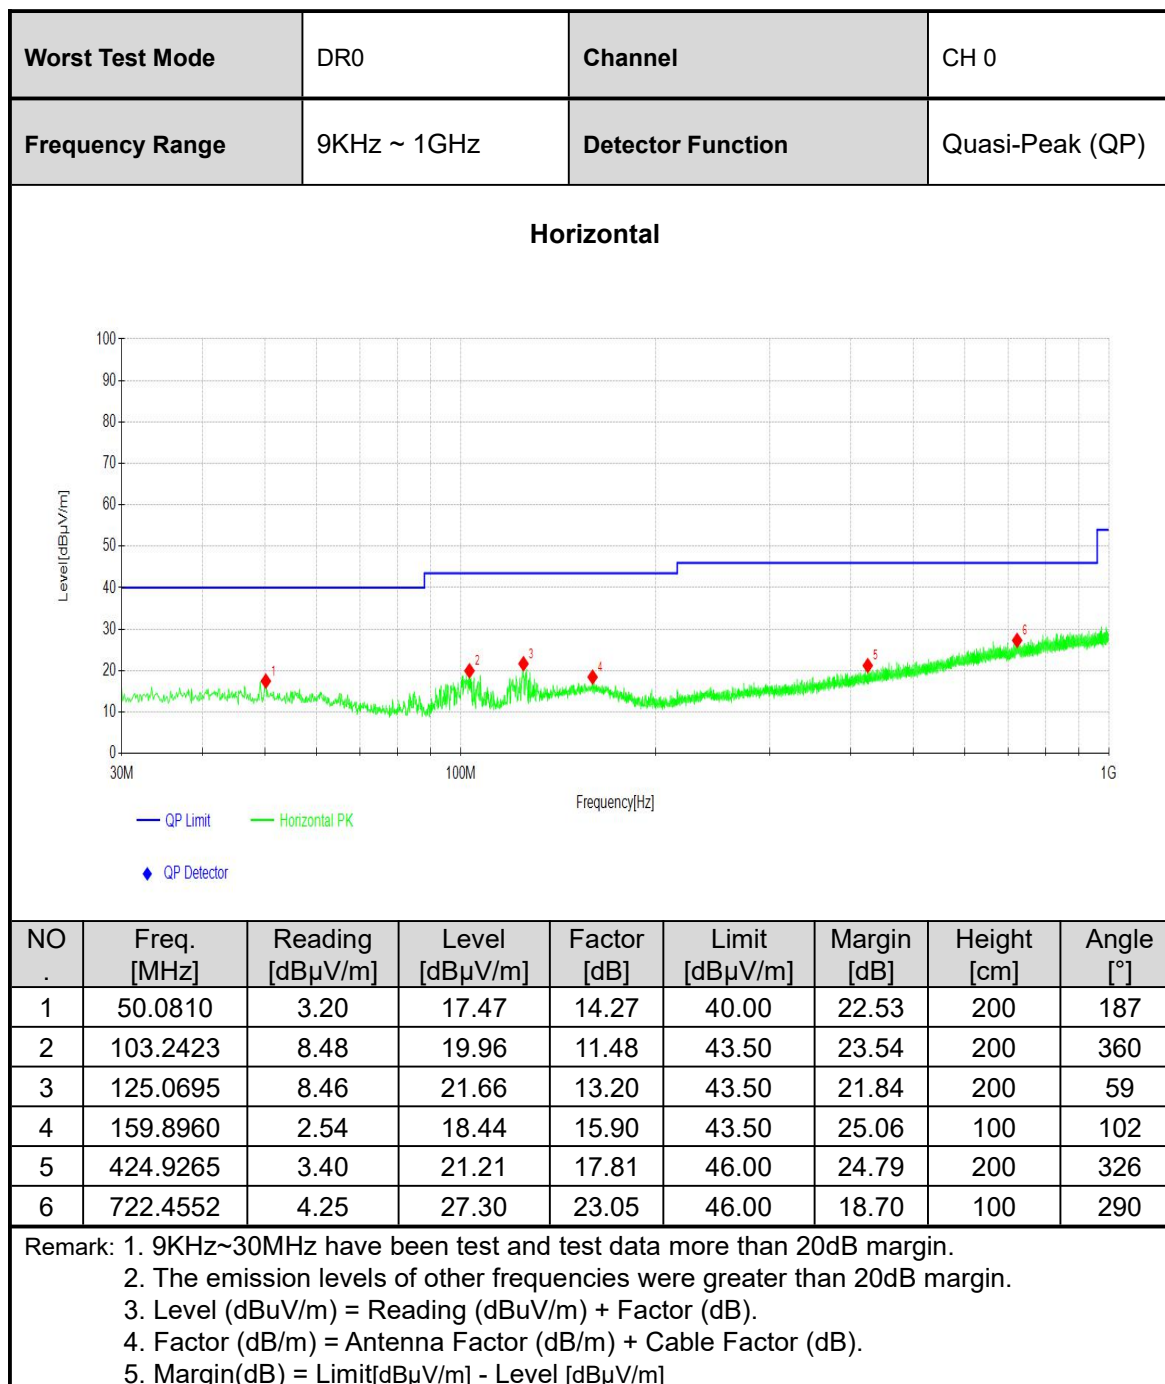



Worst Test Mode	DR0	Channel	CH 0
Frequency Range	9KHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Vertical

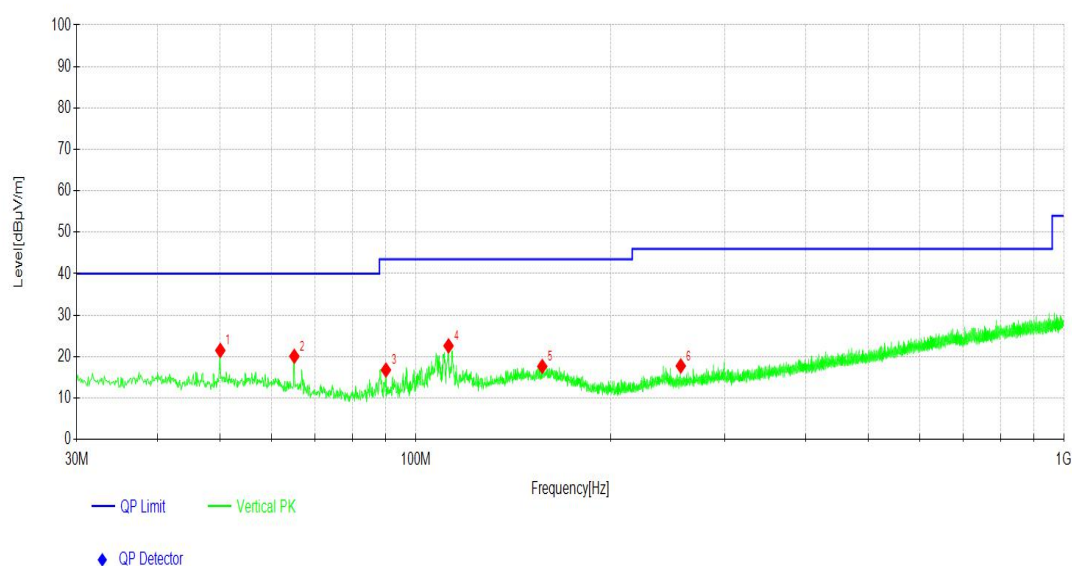

NO	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]
1	49.9840	7.23	21.50	14.27	40.00	18.50	100	64
2	65.0205	7.19	20.08	12.89	40.00	19.92	100	273
3	90.0490	6.22	16.78	10.56	43.50	26.72	200	190
4	112.4582	10.56	22.60	12.04	43.50	20.90	200	221
5	156.8887	1.86	17.63	15.77	43.50	25.87	200	168
6	256.6147	4.52	17.75	13.23	46.00	28.25	200	248

Remark: 1. 9KHz~30MHz have been test and test data more than 20dB margin.
2. The emission levels of other frequencies were greater than 20dB margin.
3. Level (dBμV/m) = Reading (dBμV/m) + Factor (dB).
4. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
5. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



ABOVE 1GHz DATA

Channel		CH 0		Frequency		902.3MHz			
Frequency Range		1GHz~9.3G		Detector Function		PK/AV			
Horizontal									
NO	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	1804.6	45.59	53.32	7.73	74.00	20.68	120	300	PK
2	1804.6	43.82	51.55	7.73	54.00	2.45	120	300	AV
3	2706.9	37.03	48.23	11.20	54.00	5.77	172	108	AV
4	2706.9	40.22	51.42	11.20	74.00	22.58	172	261	PK
5	3609.2	38.45	53.31	14.86	74.00	20.69	125	286	PK
6	3609.2	35.95	50.81	14.86	54.00	3.19	125	294	AV
Vertical									
NO	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	1804.6	43.49	51.22	7.73	54.00	2.78	117	308	AV
2	1804.6	45.14	52.87	7.73	74.00	21.13	117	301	PK
3	2706.9	37.19	48.39	11.20	54.00	5.61	106	119	AV
4	2706.9	39.88	51.08	11.20	74.00	22.92	106	301	PK
5	3609.2	35.43	50.29	14.86	54.00	3.71	170	294	AV
6	3609.2	38.88	53.74	14.86	74.00	20.26	170	294	PK
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dBuV/m] - Level [dBuV/m]									



Channel		CH 36		Frequency		909.5MHz			
Frequency Range		1GHz~9.3G		Detector Function		PK/AV			
Horizontal									
NO	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	1819	45.27	53.07	7.80	74.00	20.93	163	130	PK
2	1819	43.27	51.07	7.80	54.00	2.93	163	136	AV
3	2728.5	37.73	49.18	11.45	54.00	4.82	158	116	AV
4	2728.5	40.61	52.06	11.45	74.00	21.94	158	294	PK
5	3638	37.87	52.91	15.04	74.00	21.09	153	287	PK
6	3638	35.44	50.48	15.04	54.00	3.52	153	294	AV
Vertical									
NO	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	1819	45.95	53.75	7.80	74.00	20.25	198	135	PK
2	1819	43.42	51.22	7.80	54.00	2.78	198	135	AV
3	2728.5	37.30	48.75	11.45	54.00	5.25	146	122	AV
4	2728.5	40.74	52.19	11.45	74.00	21.81	146	301	PK
5	3638	39.02	54.06	15.04	74.00	19.94	116	293	PK
6	3638	35.37	50.41	15.04	54.00	3.59	116	293	AV
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]									



Channel		CH 63		Frequency		914.2MHz			
Frequency Range		1GHz~9.3G		Detector Function		PK/AV			
Horizontal									
NO	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	1829.8	43.96	51.82	7.86	54.00	2.18	141	295	AV
2	1829.8	45.96	53.82	7.86	74.00	20.18	141	131	PK
3	2744.7	36.53	48.59	12.06	54.00	5.41	150	323	AV
4	2744.7	40.20	52.24	12.04	74.00	21.76	150	323	PK
5	3659.6	34.46	49.61	15.15	54.00	4.39	196	288	AV
6	3659.6	37.59	52.74	15.15	74.00	21.26	196	288	PK
Vertical									
NO	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	1829.8	44.40	52.26	7.86	54.00	1.74	132	307	AV
2	1829.8	46.25	54.11	7.86	74.00	19.89	132	307	PK
3	2744.7	36.45	48.51	12.06	54.00	5.49	161	328	AV
4	2744.7	39.74	51.78	12.04	74.00	22.22	161	300	PK
5	3659.6	37.85	52.99	15.14	74.00	21.01	164	300	PK
6	3659.6	34.43	49.58	15.15	54.00	4.42	164	294	AV
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dBuV/m] - Level [dBuV/m]									

3.2 NUMBER OF HOPPING FREQUENCY USED


3.2.1 Limits

At least 50 channels frequencies, and should be equally spaced.

3.2.2 Measurement procedure

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were completed.


3.2.3 Test setup

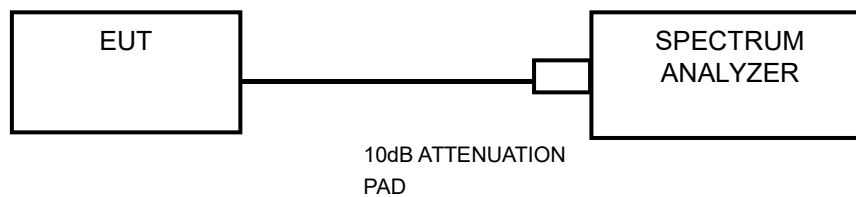



3.2.4 Test result

There are 64 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

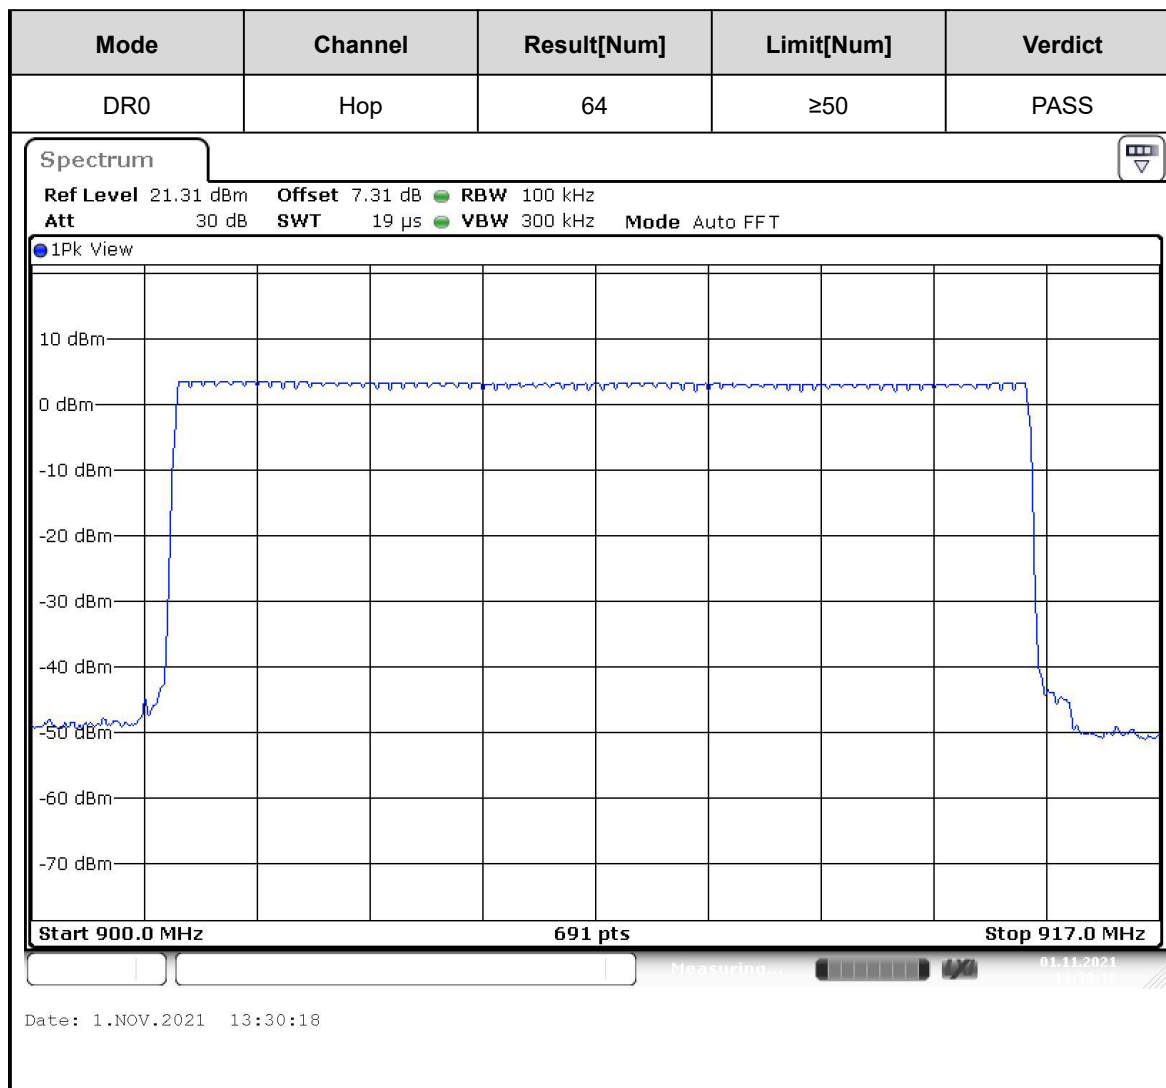

3.3 DWELL TIME ON EACH CHANNEL


3.3.1 Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.3.2 Measurement procedure



- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

3.3.3 Test setup

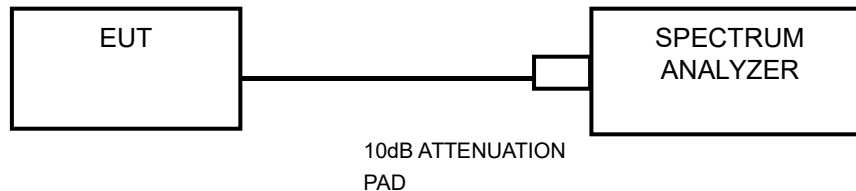



Mode	Number of Hopping Channel	Number of transmission in a period(channel number*0.4 sec)	Length of transmission time (msec)	Result (sec)	Limit (sec)	Verdict
DR0	64	25.6	0.371	0.371	≤0.4	PASS

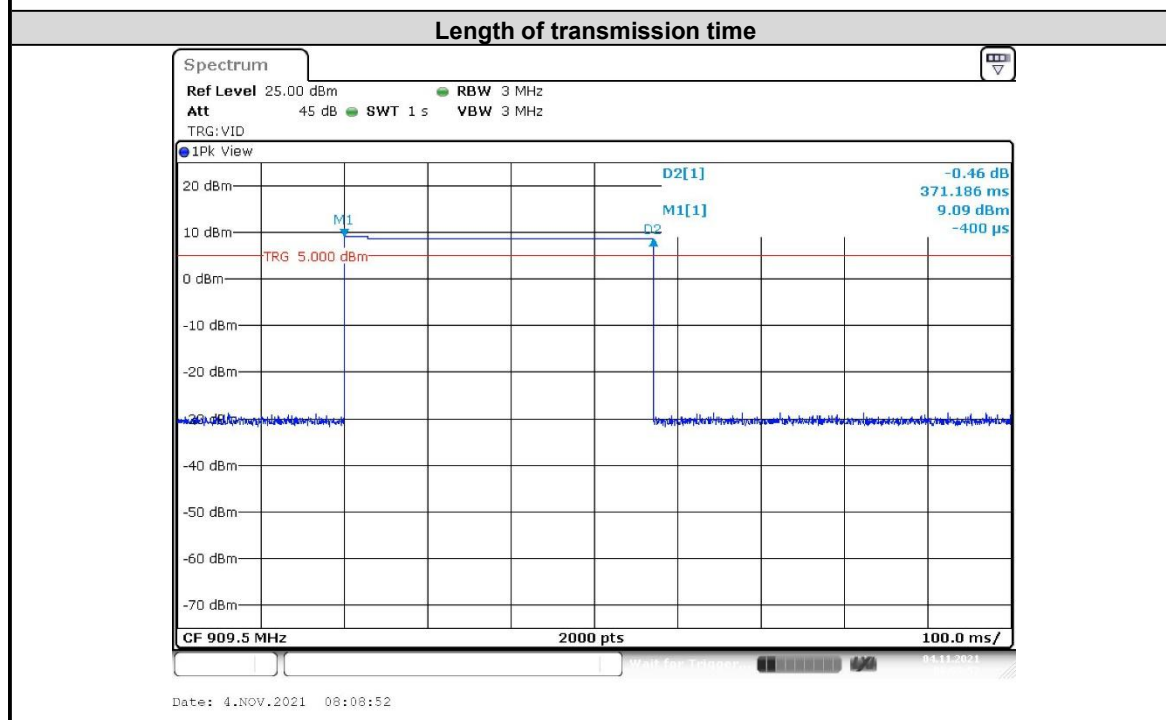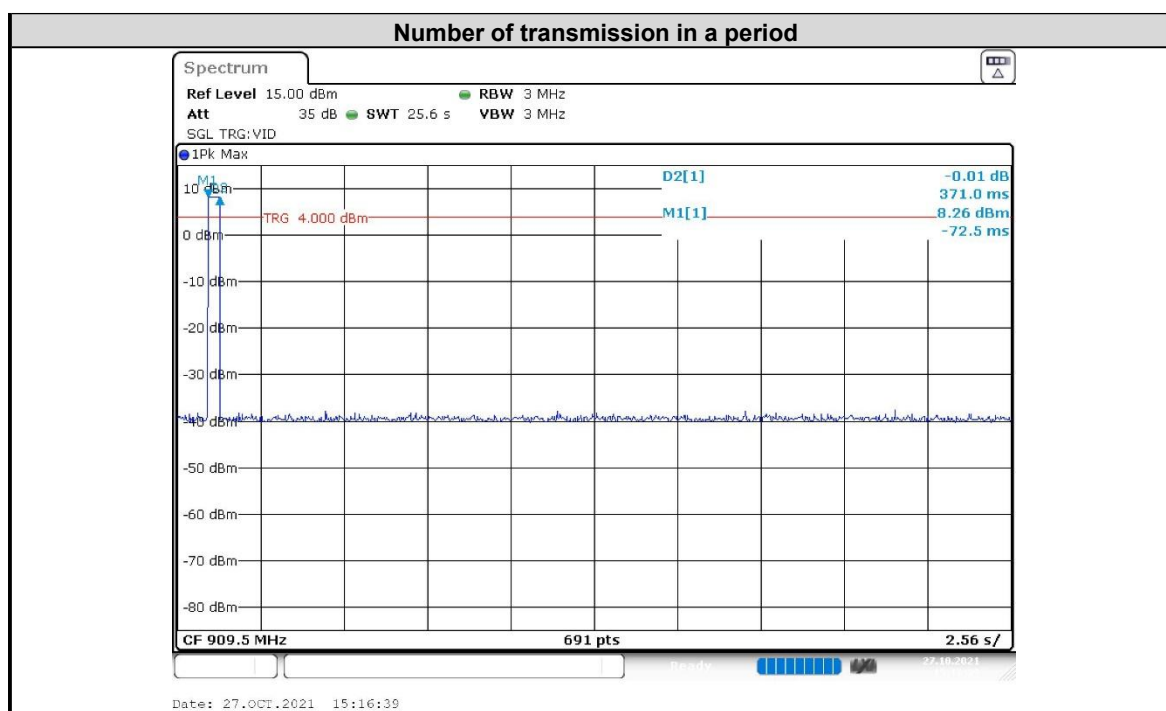

3.4 20dB EMISSION BANDWIDTH


3.4.1 Limits

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz

3.4.2 Measurement procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.


3.4.3 Test setup

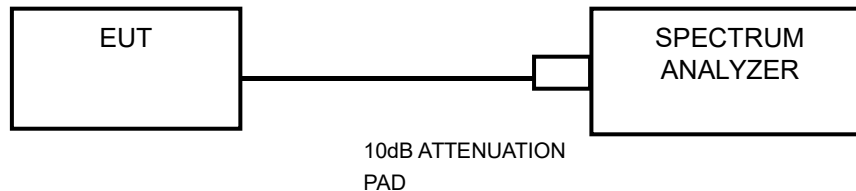



3.4.4 Test result

Mode	Channel	Channel Frequency (MHz)	20dB Emission Bandwidth(kHz)	Limit (kHz)
DH0	0	902.3	139.125	≤250
	36	909.5	141.750	≤250
	63	914.9	139.125	≤250

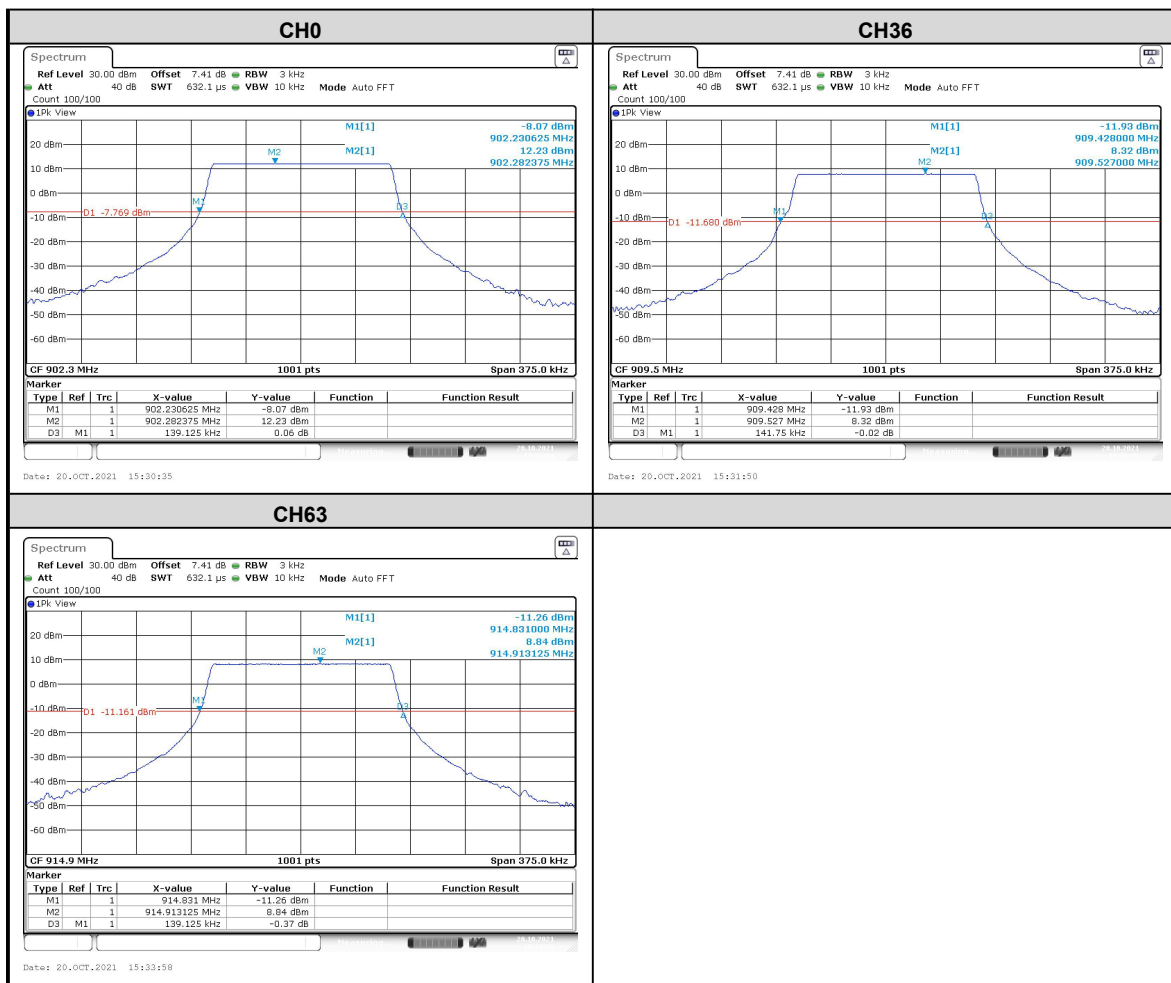

3.5 HOPPING CHANNEL SEPARATION


3.5.1 Limits

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

3.5.2 Measurement procedure

- Span: Wide enough to capture the peaks of two adjacent channels.
- RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- Video (or average) bandwidth (VBW) $\geq$ RBW.
- Sweep: Auto.
- Detector function: Peak.
- Trace: Max hold.
- Allow the trace to stabilize.

3.5.3 Test setup

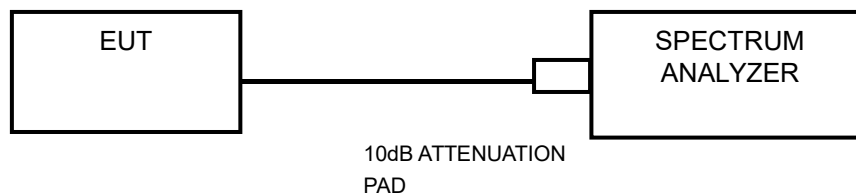




3.5.4 Test result

Mode	Adjacent Channel Separation (kHz)	Minimum Limit 20dB Bandwidth (kHz)	Verdict
DR0	200.00	139.125	PASS

Test Plot:

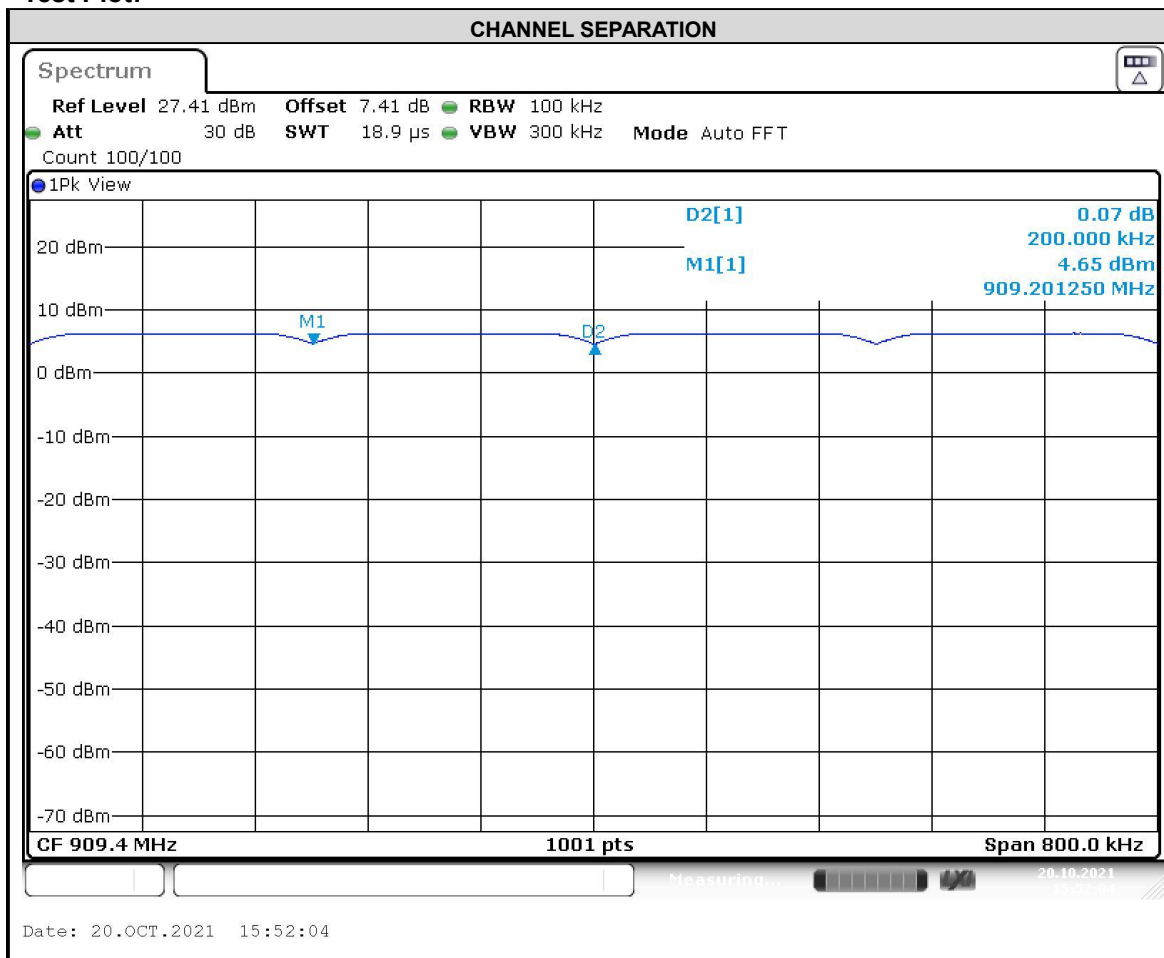

3.6 CONDUCTED OUTPUT POWER


3.6.1 Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

3.6.2 Measurement procedure

- A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor and set the detector to PEAK. Record the power level.
- An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor and set the detector to AVERAGE. Record the power level.

3.6.3 Test setup

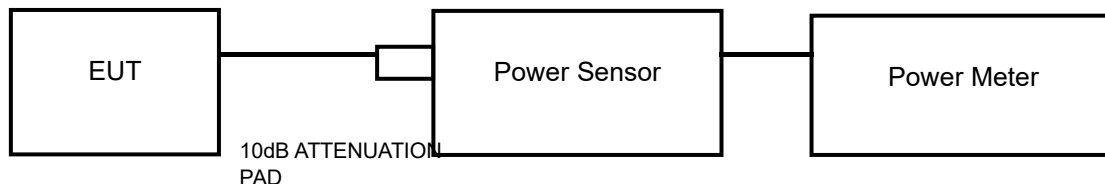



3.6.4 Test result

PEAK OUTPUT POWER

GFSK

CHANNEL	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power (mW)	Peak Power Limit (mW)	Verdict
0	902.3	17.99	62.95	1000	PASS
36	909.5	17.75	59.57	1000	PASS
63	914.9	17.74	59.43	1000	PASS

AVERAGE OUTPUT POWER(For reference)

Mode	Channel Frequency (MHz)	Average Power (dBm)	Average Power (mW)	Average Power Limit (mW)	Verdict
0	902.3	3.24	2.11	1000	PASS
36	909.5	2.73	1.87	1000	PASS
63	914.9	2.99	1.99	1000	PASS

3.7 POWER SPECTRAL DENSITY MEASUREMENT


3.7.1 Limits

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

3.7.2 Measurement procedure

1. Set instrument center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set RBW to: 3KHz
4. Set VBW $\geq 3 \times$ RBW.
5. Detector = peak
6. Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
7. Sweep time = auto couple.
8. Use the peak marker function to determine the maximum amplitude level.

3.7.3 Test setup

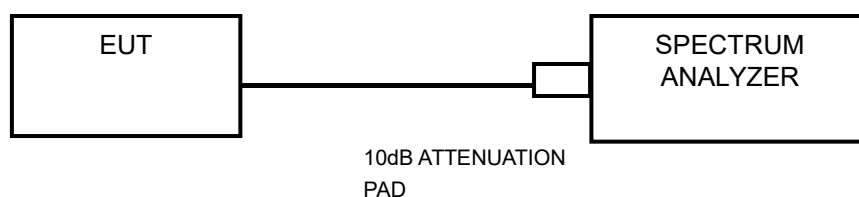




3.7.4 Test result

CHANNEL	CHANNEL FREQUENCY (MHz)	PSD(dBm/3kHz)	Limit (dBm/3kHz)	PASS / FAIL
0	902.3	2.90	8	PASS
36	909.5	2.54	8	PASS
63	914.9	2.66	8	PASS

Test Plot:

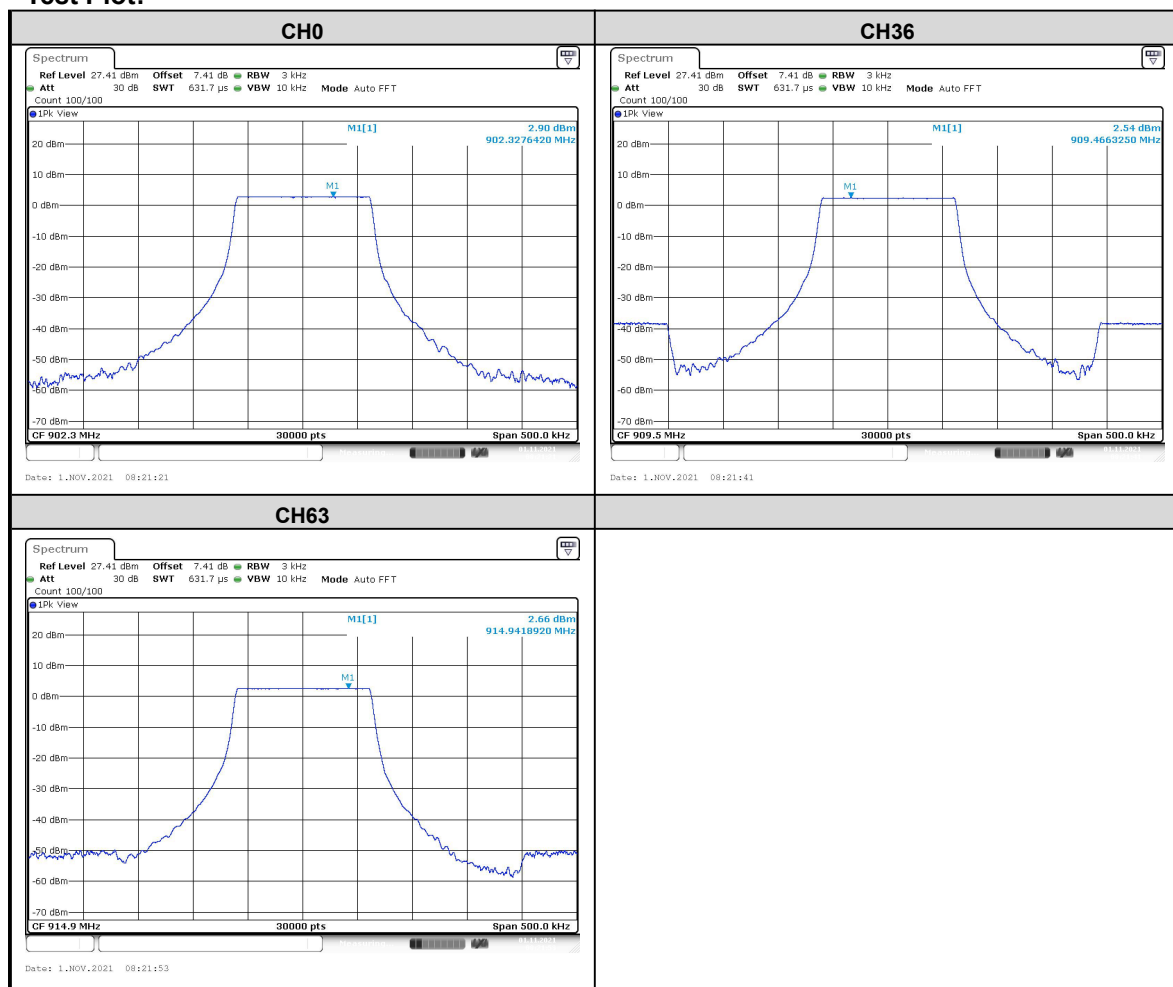

3.8 OUT OF BAND EMISSION MEASUREMENT


3.8.1 Limits

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

3.8.2 Measurement procedure

The transmitter output was connected to the spectrum analyzer via a low loss cable. of Spectrum Analyzer was set RBW to 100 kHz and VBW to 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. Detector = PEAK and Trace mode = Max Hold. The band edges was measured and recorded.


3.8.3 Test setup

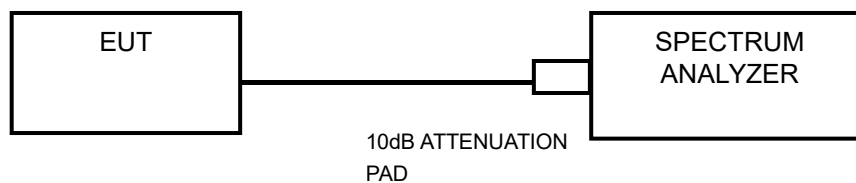

3.8.4 Test result


The spectrum plots are attached on the following images.

DR0

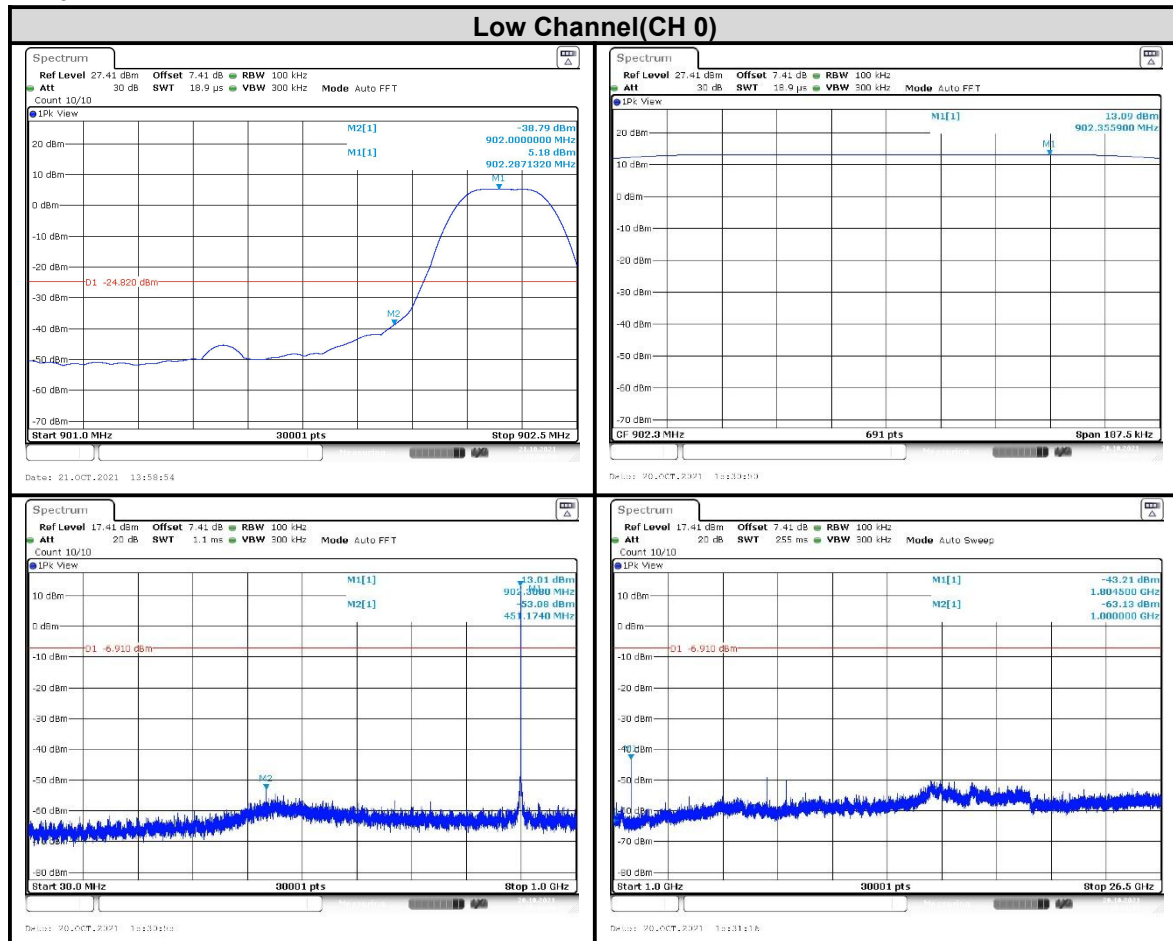




DR0

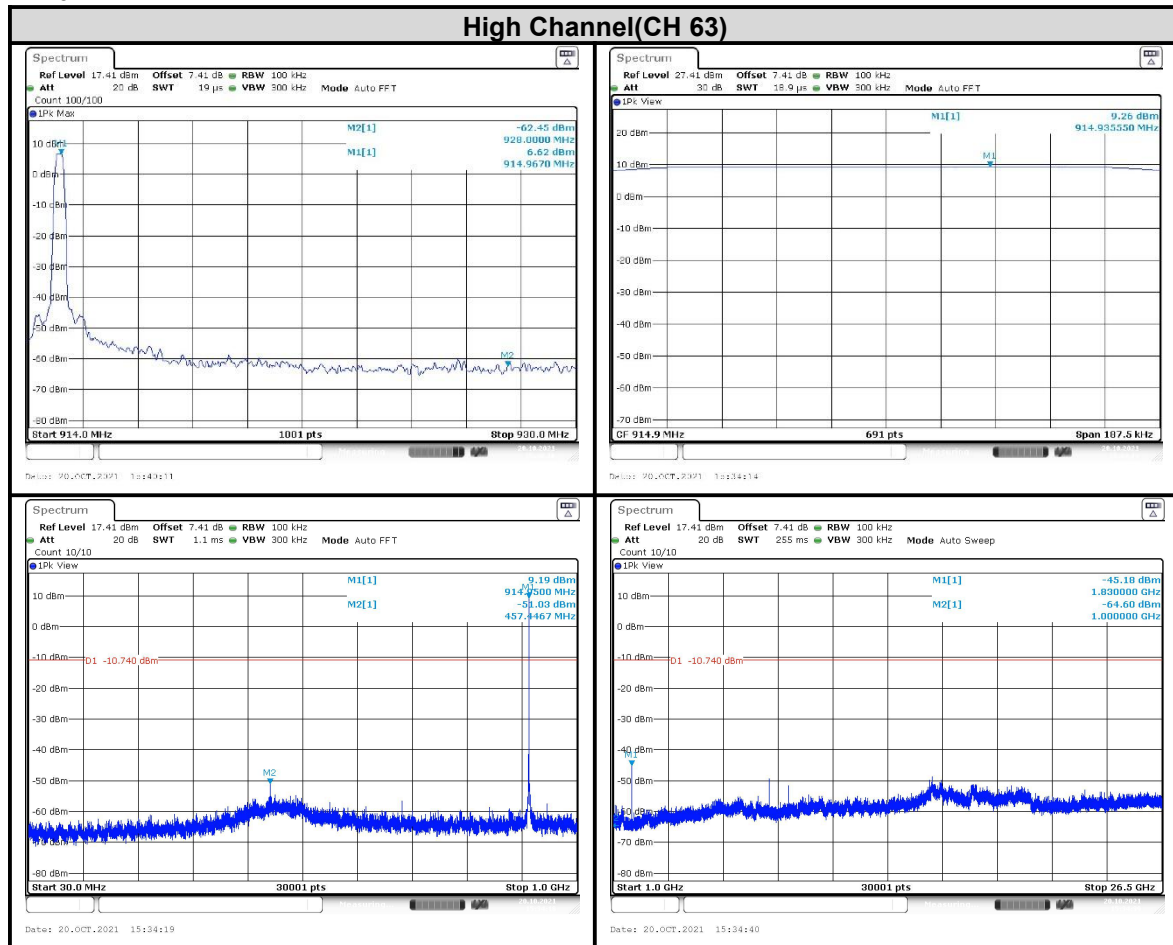

DR0-HOPPING

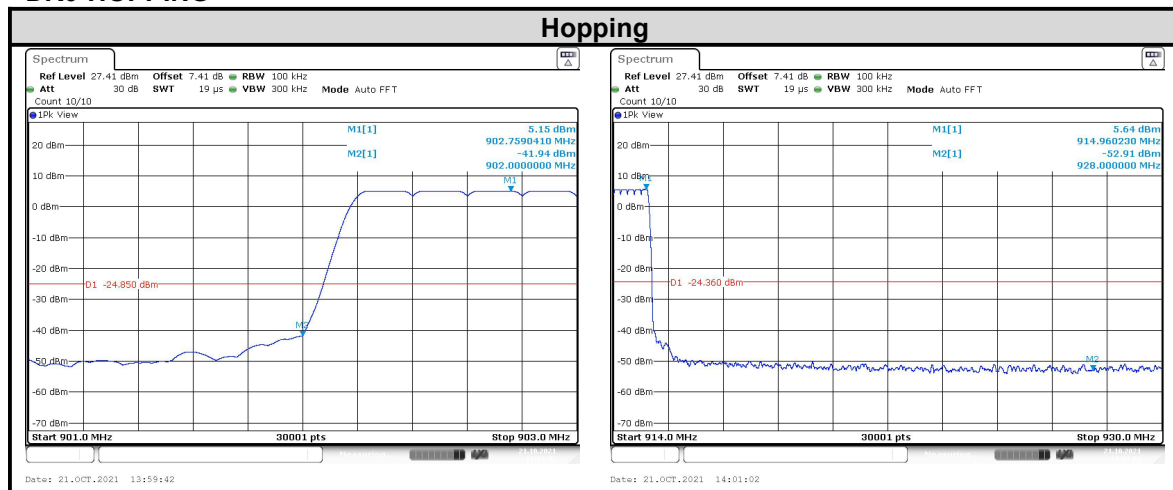



4 PHOTOGRAPHS OF TEST SETUP

Please refer to the attached file (Test Photos).



5 PHOTOGRAPHS OF THE EUT

Please refer to the attached file (External Photos report and Internal Photos).



Appendix A

Antenna Port Conducted Test				
Equipment	Model No.	Serial Number	Manufacturer	Cal. Due
Communication Shielded Room 2	4m*3m*3m	CRTDSWKS44301	CRT	2023/04/25
Spectrum Analyzer	FSV40	101580	R&S	2022/06/30
Comprehensive Test Instrument	CMW270	100304	R&S	2021/12/08
Analog Signal Generator	SMB100A	181858	R&S	2022/06/30
Vector Signal Generator	SGT100A	111661	R&S	2022/06/30
RF Radio Frequency Switch	JS0806-2	19H9080187	Tonscend	2022/06/30
Programmable DC Power Supply	E3644A	MY58036222	KEYSIGHT	2022/04/22

Radiated Emission Test - 3M Chamber				
Equipment	Model No.	Serial Number	Manufacturer	Cal. Due
3m Semi-Anechoic Chamber	FACT-4	ST08035	ETS	2024/12/12
Spectrum Analyzer	N9010B	MY57470323	KEYSIGHT	2022/03/05
EMI Test Receiver	N9038A-508	MY532290079	Agilent	2022/03/05
Broadband Antenna	VULB 9163	9163-530	SCHWARZBECK	2022/06/26
Waveguide Horn Antenna	HF906	360306/008	R&S	2022/03/05
Waveguide Horn Antenna	BBHA9170	00949	SCHWARZBECK	2022/03/05
Preamplifier	BBV 9721	9721-050	SCHWARZBECK	2022/06/30
5G Bandstop Filters	WRCJV12-4900-5100-5900-6100-50EE	1	WI	2021/12/16
Comprehensive tester	CMW500	159000	R&S	2022/01/04

Important

- (1) The test report is valid with the official seal of the laboratory and the signatures of Test engineer, Author and Reviewer simultaneously.
- (2) The test report is invalid if altered.
- (3) Any photocopies or part photocopies in the test report are forbidden without the written permission from the laboratory.
- (4) Objections to the test report must be submitted to the laboratory within 15 days.
- (5) Generally, commission test is responsible for the tested samples only.

Address of the laboratory:

CVC Testing Technology Co., Ltd.

Address: No.3,TiantaiyiRoad,KaitaiAvenue,ScienceCity,Guangzhou,China

Post Code: 510663 Tel: 020-32293888

FAX: 020-32293889 E-mail: office@cvc.org.cn