




QUICK START GUIDE

Wireless AI Occupancy Sensor


VS321



1. Packing List

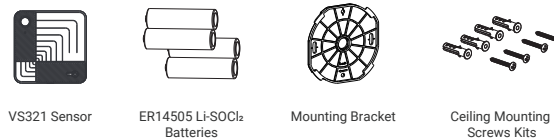

2. Hardware Introduction

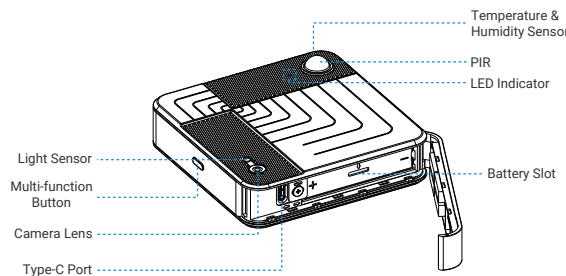


3. Button and LED Descriptions


Function	Action&Description	LED Indicator
Power On	Put the batteries in	/
Power Off	Remove batteries	
Confirm Device Status	Short press the Multi-function button once	Power On: Lights up Power Off: Lights off
Turn On Bluetooth	Press and hold the multi-function button for over 3s	Blinks Slowly
Turn Off Bluetooth		Stays on
Reset to Factory Defaults	Press and hold the multi-function button for over 10s	Blink Quick
Device Upgrade	Upgrading (takes about 4~5 mins)	Upgrading & Upgrade failed: Stays On
		Upgrade Success: Lights off

4. Power Supply


Step 1:




Step 2:

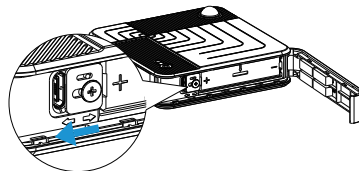


Step 3:

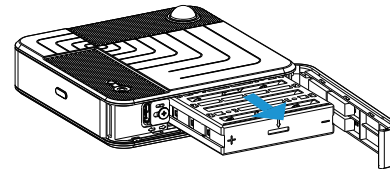


Step 4:



Step 5:

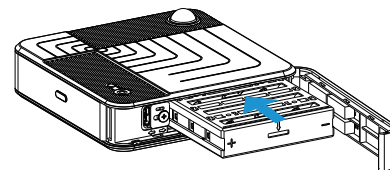

Step 6:

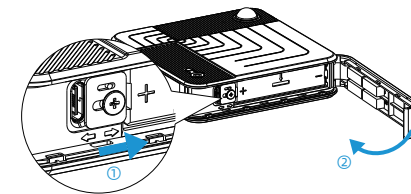

Note:

- The device only supports ER14505 Li-SO₂ batteries, and does not support the use of alkaline batteries.
- If the device has not been used for a long period of time, please remove the battery, otherwise it may cause battery leakage and damage internal components.
- When replacing the batteries, make sure that all batteries are new; otherwise it may result in shorter battery life or abnormal power calculations.

5. Configuration

Once the device is powered on, it can be configured via Bluetooth.



Android




iOS

- Scan the code to download the Milesight ToolBox App.
- Open the APP and switch the reading mode to "Bluetooth." Enable Bluetooth and location services on your phone. Tap "Bluetooth Read" to automatically search for nearby devices. Once the target device is found, connect and enter the default Bluetooth password: 123456.



Quick Start Guide



3. When connecting to Bluetooth for the first time, you need to set the Bluetooth password. After the setup is completed, you can get the basic information of the product. After configuring the relevant parameters on the App, click "Write" to complete the configuration.


6. Installation

Installation Conditions: Ceiling Thickness>3cm


Recommended Height: For sedentary targets, recommended height > 2.2m; for standing targets, recommended height > 3m

Screw Installation


Step 1:

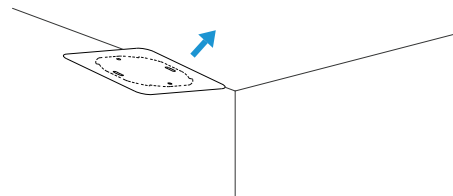


Step 2:

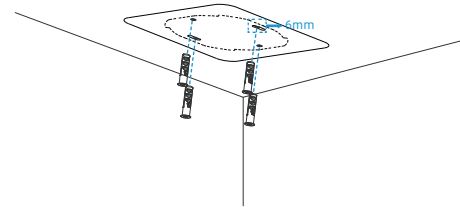


Step 3:

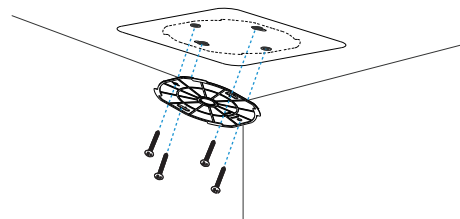


Step 4:

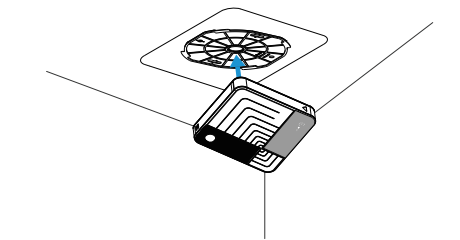

Step 5:

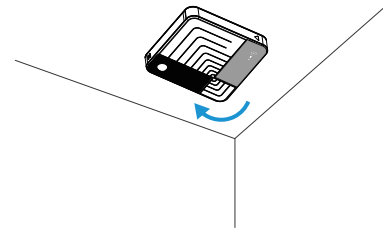


Step 6:

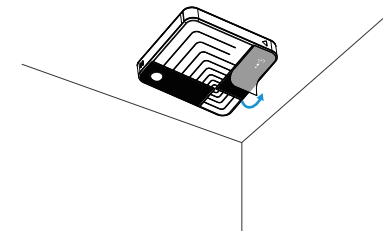


Adhesive Backed Installation


Step 1:

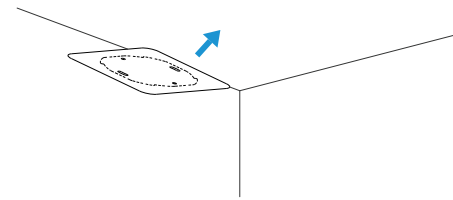


Step 2:

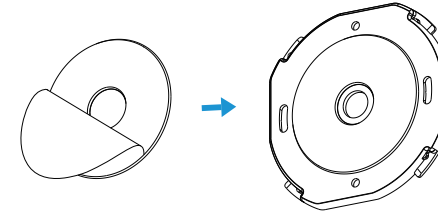


Step 3:




Step 4:

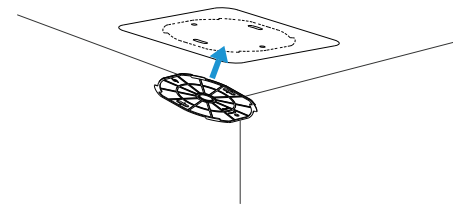


Step 5:

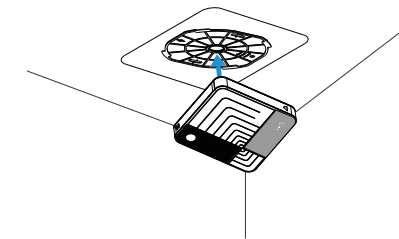

Step 6:

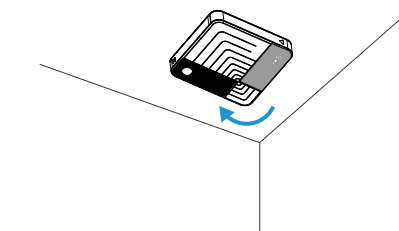

Step 7:

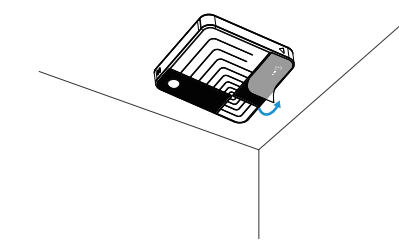

Installation Note:

- Do not install the device too close to doors or mirrors.
- Ensure that the device is facing downwards towards the detection area.
- Ensure that the surrounding environment is well-lit, while avoiding interference from bright lights.

7. FCC Statement

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and,

(2) This device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

—Reorient or relocate the receiving antenna.

—Increase the separation between the equipment and receiver.

—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

—Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator& your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.