


AAN3216F0V01

Applications


1. Bluetooth
2. Wireless LAN
3. ISM band 2.4GHz wireless applications
4. High stability and low tolerance.
5. Antenna Gain: 0dBi
6. Antenna type: Ceramic antenna



Evaluation Board Reference

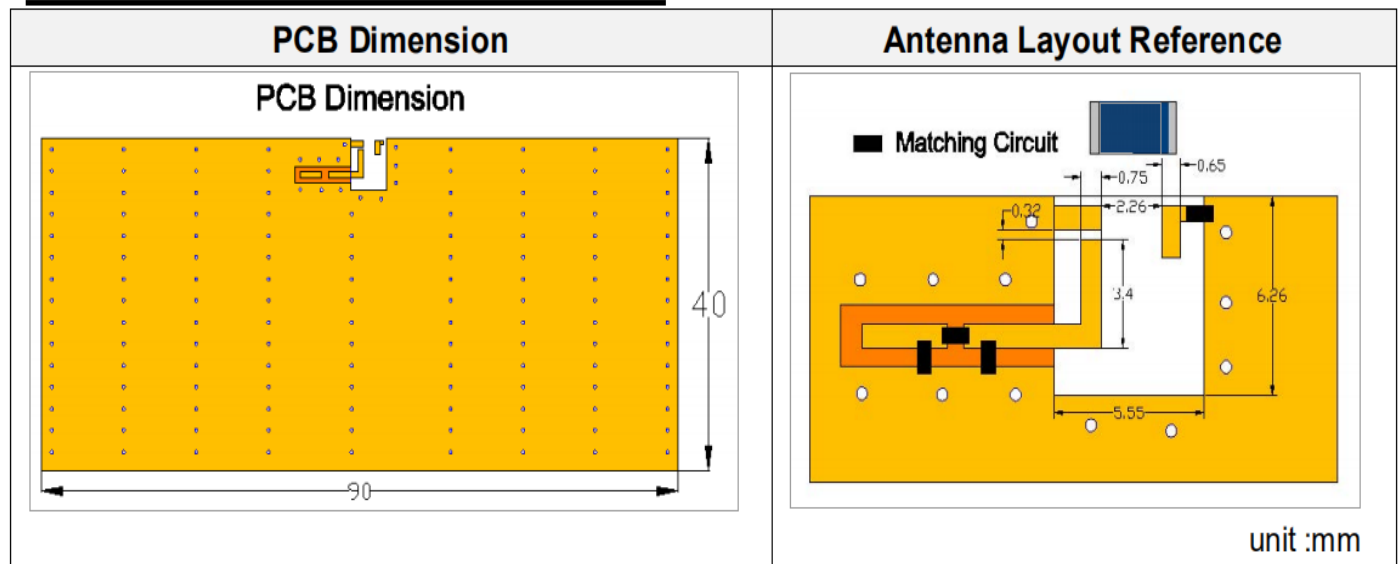

Dimension and Terminal Configuration

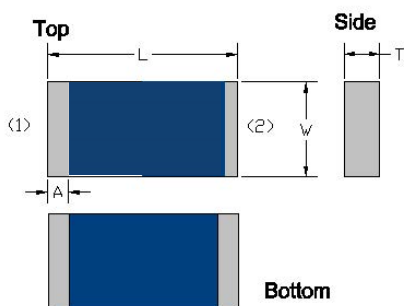


Dimension (mm)	
L	3.15 $\pm$ 0.15
W	1.55 $\pm$ 0.15
T	0.50 $\pm$ 0.10
A	0.35 $\pm$ 0.10

Taping Specifications


Reel and Taping Specification

Reel Specification

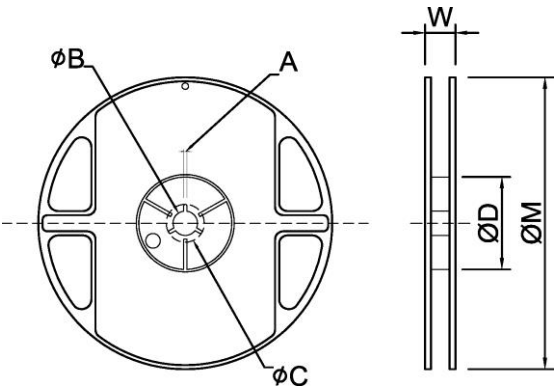

TYPE	SIZE		A	φ B	φ C	φ D	W	φ M
3216	7"	5K/Reel	2.0±0.5	13.5±1.0	21±1.0	60±1.0	11.5±2.0	178±2.0

Taping Specification

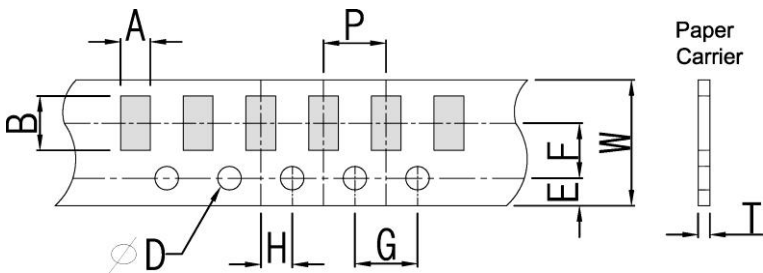



Packaging	Type	A	B	W	E	F	G	H	T	φD	P
Paper Type	3216	1.90±0.20	3.50±0.20	8.0±0.20	1.75±0.10	3.5±0.05	4.0±0.10	2.0±0.05	0.75±0.10	1.50 +0.10 -0	4.0±0.1

Reliability Table




Test Item	Procedure	Requirements Ceramic Type	Remark (Reference)
Electrical Characterization		Fulfill the electrical specification	User Spec.
Thermal Shock	1. Preconditioning: $50 \pm 10^{\circ}\text{C}$ / 1 hr , then keep for 24 ± 1 hrs at room temp. 2. Initial measure: Spec: refer Initial spec. 3. Rapid change of temperature test: -30°C to $+85^{\circ}\text{C}$; 100 cycles; 15 minutes at Lower category temperature; 15 minutes at Upper category temperature.	No Visible Damage. Fulfill the electrical specification.	MIL-STD-202 107
Temperature Cycling	1. Initial measure: Spec: refer Initial spec. 2. 100 Cycles (-30°C to $+85^{\circ}\text{C}$), Soak Mode=1 (2 Cycle/hours). 3. Measurement at 24 ± 2 Hours after test condition.	No Visible Damage. Fulfill the electrical specification.	JESD22 JA104
High Temperature Exposure	1. Initial measure: Spec: refer Initial spec. 2. Unpowered; 500hours @ $T=+85^{\circ}\text{C}$. 3. Measurement at 24 ± 2 hours after test.	No Visible Damage. Fulfill the electrical specification.	MIL-STD-202 108
Low Temperature Storage	1. Initial measure: Spec: refer Initial spec. 2. Unpowered: 500hours @ $T= -30^{\circ}\text{C}$. 3. Measurement at 24 ± 2 hours after test.	No Visible Damage. Fulfill the electrical specification.	MIL-STD-202 108
Solderability (SMD Bottom Side)	Dipping method: a. Temperature: $235 \pm 5^{\circ}\text{C}$ b. Dipping time: $3 \pm 0.5\text{s}$	The solder should cover over 95% of the critical area of bottom side.	IEC 60384-21/22 4.10
Soldering Heat Resistance (RSH)	Preheating temperature: $150 \pm 10^{\circ}\text{C}$. Preheating time: 1~2 min. Solder temperature: $260 \pm 5^{\circ}\text{C}$. Dipping time: $5 \pm 0.5\text{s}$	No Visible Damage.	IEC 60384-21/22 4.10
Vibration	5g's for 20 min., 12 cycles each of 3 orientations Note: Use 8"X5" PCB .031" thick 7 secure points on, one long side and 2 secure points at corners of opposite sides. Parts mounted within 2" from any secure point. Test from 10-2000 Hz.	No Visible Damage.	MIL-STD-202 Method 204
Mechanical Shock	Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen (18 shocks) Peak value: 1,500g's Duration: 0.5ms Velocity change: 15.4 ft/s Waveform: Half-sine	No Visible Damage.	MIL-STD-202 Method 213
Humidity Bias	1. Humidity: 85% R.H., Temperature: $85 \pm 2^{\circ}\text{C}$. 2. Time: 500 ± 24 hours. 3. Measurement at 24 ± 2 hrs after test condition.	No Visible Damage. Fulfill the electrical specification.	MIL-STD-202 Method 106

Manufacturer: Shenzhen Yongyun Technology Co., Ltd

Address: A608, Hongdu Business Building, Fanshen Road, Bao'an District, Shenzhen

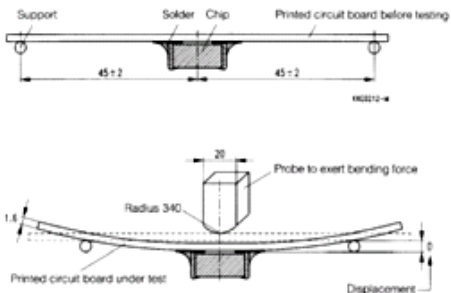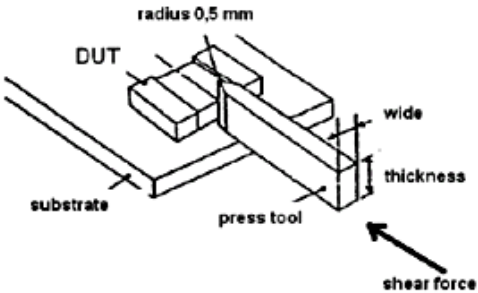
Board Flex (SMD)	1. Mounting method: IR-Reflow. PCB Size (L:100 × W:40 × T:1.6mm) 2. Apply the load in direction of the arrow until bending reaches 2 mm. 	No Visible Damage.	AEC-Q200 005
Adhesion	Force of 1.8Kg for 60 seconds. 	No Visible Damage Magnification of 20X or greater may be employed for inspection of the mechanical integrity of the device body terminals and body/terminal junction.	AEC-Q200 006
Physical Dimension	Any applicable method using x10 magnification, micrometers, calipers, gauges, contour projectors, or other measuring equipment, capable of determining the actual specimen dimensions.	In accordance with specification.	JESD22 JB100

Electrical Characteristics

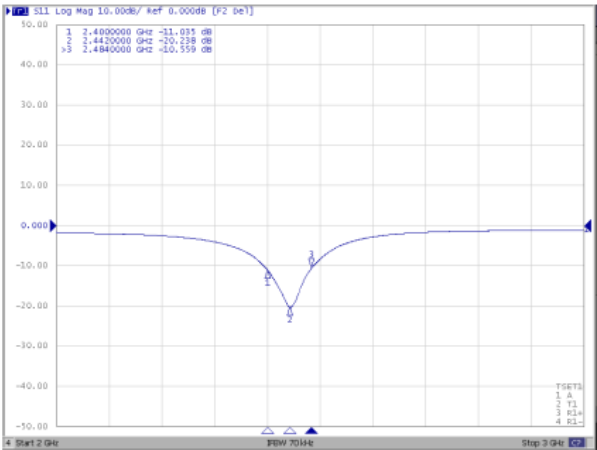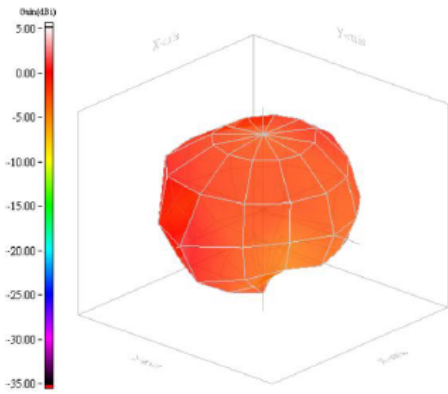Return Loss & Radiation									
Return Loss 	<table><tr><th>Frequency (MHz)</th><th>S11 (dB)</th></tr><tr><td>2400</td><td>-11.0</td></tr><tr><td>2441</td><td>-20.2</td></tr><tr><td>2480</td><td>-10.6</td></tr></table>	Frequency (MHz)	S11 (dB)	2400	-11.0	2441	-20.2	2480	-10.6
Frequency (MHz)	S11 (dB)								
2400	-11.0								
2441	-20.2								
2480	-10.6								
Radiation 									


3D 增益模式 3D Gain Pattern (2400 MHz)

2400.000MHz




2D 增益模式 2D Gain Pattern (2400 MHz)


2400.000MHz H



2400.000MHz E1




2400.000MHz E2




3D 增益模式 3D Gain Pattern (2450 MHz)

2450.000MHz

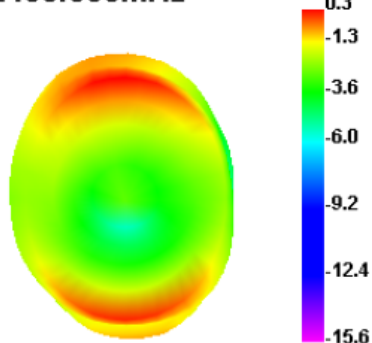


2D 增益模式 2D Gain Pattern (2450 MHz)


2450.000MHz H

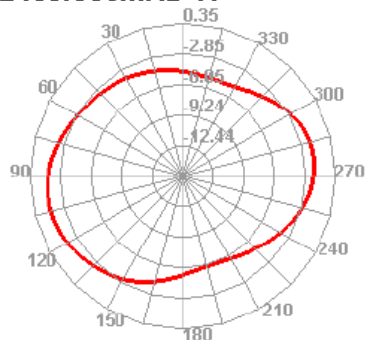

2450.000MHz E1

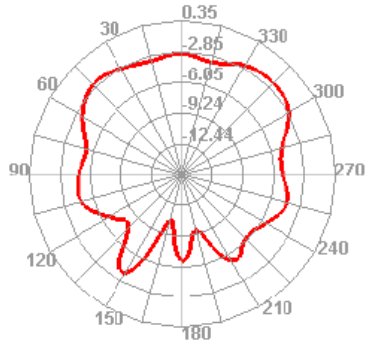


2450.000MHz E2

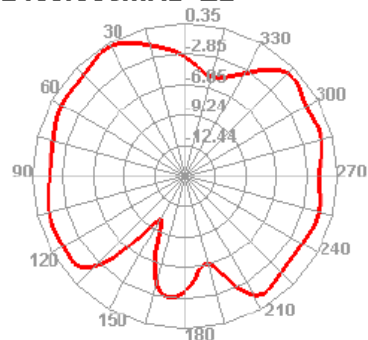


3D 增益模式 3D Gain Pattern (2500 MHz)

2500.000MHz




2D 增益模式 2D Gain Pattern (2500 MHz)

2500.000MHz H



2500.000MHz E1



2500.000MHz E2

