RADIO TEST REPORT
FCC ID: 2AYL6-ST006

Product: TWS ENC GAMING EARBUDS

Trade Mark: MOYO

Model No.: ST006

Family Model: 7197-54WH

Report No.: S21051103402001

Issue Date: 27 May. 2021

Prepared for

Shenzhen Moyoworld electronics Development Limited

16th Floor, Building C6, HengFeng Industrial Park, No. 739 Zhou Shi Road, Bao'an District, Shenzhen, China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street Bao'an District, Shenzhen 518126 P.R. China
Tel. 400-800-6106, 0755-3699 5508
Website: http://www.ntek.org.cn

TABLE OF CONTENTS

1 TEST RESULT CERTIFICATION 4

2 SUMMARY OF TEST RESULTS 5

3 FACILITIES AND ACCREDITATIONS 6

3.1 FACILITIES 6
3.2 LABORATORY ACCREDITATIONS AND LISTINGS 6
3.3 MEASUREMENT UNCERTAINTY 6

4 GENERAL DESCRIPTION OF EUT 7

5 DESCRIPTION OF TEST MODES 9

6 SETUP OF EQUIPMENT UNDER TEST 10

6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM 10
6.2 SUPPORT EQUIPMENT 11
6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS 12

7 TEST REQUIREMENTS 14

7.1 CONDUCTED EMISSIONS TEST 14
7.1.1 Applicable Standard 14
7.1.2 Conformance Limit 14
7.1.3 Measuring Instruments 14
7.1.4 Test Configuration 14
7.1.5 Test Procedure 14
7.1.6 Test Results 15
7.2 RADIATED SPURIOUS EMISSION 19
7.2.1 Applicable Standard 19
7.2.2 Conformance Limit 19
7.2.3 Measuring Instruments 20
7.2.4 Test Configuration 20
7.2.5 Test Procedure 21
7.2.6 Test Results 22
7.3 6DB BANDWIDTH 33
7.3.1 Applicable Standard 33
7.3.2 Conformance Limit 33
7.3.3 Measuring Instruments 33
7.3.4 Test Setup 33
7.3.5 Test Procedure 33
7.3.6 Test Results 33
7.4 DUTY CYCLE 34
7.4.1 Applicable Standard 34
7.4.2 Conformance Limit 34
7.4.3 Measuring Instruments 34
7.4.4 Test Setup 34
7.4.5 Test Procedure 34
7.4.6 Test Results 35
7.5 PEAK OUTPUT POWER 36
7.5.1 Applicable Standard 36
7.5.2 Conformance Limit 36
7.5.3 Measuring Instruments 36
7.5.4 Test Setup 36
7.5.5 Test Procedure 36
7.5.6 Test Results 36
7.6 POWER SPECTRAL DENSITY 37

7.6.1 Applicable Standard 37
7.6.2 Conformance Limit 37
7.6.3 Measuring Instruments 37
7.6.4 Test Setup 37
7.6.5 Test Procedure 37
7.6.6 Test Results 38
7.7 CONDUCTED BAND EDGE MEASUREMENT 39
7.7.1 Applicable Standard 39
7.7.2 Conformance Limit 39
7.7.3 Measuring Instruments 39
7.7.4 Test Setup 39
7.7.5 Test Procedure 39
7.7.6 Test Results 39
7.8 SPURIOUS RF CONDUCTED EMISSIONS 40
7.8.1 Conformance Limit 40
7.8.2 Measuring Instruments 40
7.8.3 Test Setup 40
7.8.4 Test Procedure 40
7.8.5 Test Results 40
7.9 ANTENNA APPLICATION 41
7.9.1 Antenna Requirement 41
7.9.2 Result 41

8 TEST RESULTS 42

LEFT(1M): 42
8.1.1 MAXIMUM CONDUCTED OUTPUT POWER 42
8.1.2 OCCUPIED CHANNEL BANDWIDTH 44
8.1.3 MAXIMUM POWER SPECTRAL DENSITY LEVEL 48
8.1.4 BAND EDGE 50
8.1.5 CONDUCTED RF SPURIOUS EMISSION 53
LEFT(2M): 57
8.1.6 MAXIMUM CONDUCTED OUTPUT POWER 57
8.1.7 OCCUPIED CHANNEL BANDWIDTH 59
8.1.8 MAXIMUM POWER SPECTRAL DENSITY LEVEL 63
8.1.9 BAND EDGE 65
8.1.10 CONDUCTED RF SPURIOUS EMISSION 68
RIGHT(1M): 72
8.1.11 MAXIMUM CONDUCTED OUTPUT POWER 72
8.1.12 OCCUPIED CHANNEL BANDWIDTH 74
8.1.13 MAXIMUM POWER SPECTRAL DENSITY LEVEL 78
8.1.14 BAND EDGE 80
8.1.15 CONDUCTED RF SPURIOUS EMISSION 83
RIGHT(2M): 87
8.1.16 MAXIMUM CONDUCTED OUTPUT POWER 87
8.1.17 OCCUPIED CHANNEL BANDWIDTH 89
8.1.18 MAXIMUM POWER SPECTRAL DENSITY LEVEL 93
8.1.19 BAND EDGE 95
8.1.20 CONDUCTED RF SPURIOUS EMISSION 98

1 TEST RESULT CERTIFICATION

Applicant's name .....:	Shenzhen Moyoworld electronics Development Limited
Address .....:	16th Floor, Building C6, HengFeng Industrial Park, No. 739 Zhou Shi Road, Bao'an District, Shenzhen, China
Manufacturer's Name .....:	Shenzhen Moyoworld electronics Development Limited
Address .....:	16th Floor, Building C6, HengFeng Industrial Park, No. 739 Zhou Shi Road, Bao'an District, Shenzhen, China
Product description	
Product name .....:	TWS ENC GAMING EARBUDS
Model and/or type reference .....:	ST006
Family Model .....:	7197-54WH

Measurement Procedure Used:

APPLICABLE STANDARDS	
APPLICABLE STANDARD/ TEST PROCEDURE	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02	Complied

This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.
This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.
The test results of this report relate only to the tested sample identified in this report.

Date of Test : 11 May. 2021 ~ 26 May. 2021

Testing Engineer : Allen Liu
(Allen Liu)

Technical Manager : Jason Chen
(Jason Chen)

Authorized Signatory : Alex
(Alex Li)

2 SUMMARY OF TEST RESULTS

FCC Part15 (15.247), Subpart C			
Standard Section	**Test Item**	**Verdict**	**Remark**
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.209 (a) 15.205 (a)	Radiated Spurious Emission	PASS	
15.247 (e)	Power Spectral Density	PASS	
15.247 (d)	Band Edge Emission	PASS	
15.247 (d)	Spurious RF Conducted Emission	PASS	
15.203	Antenna Requirement	PASS	

Remark:
1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.

3 FACILITIES AND ACCREDITATIONS

3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.
The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab.	:	The Certificate Registration Number is L5516.
IC-Registration		The Certificate Registration Number is 9270A. CAB identifier:CN0074
FCC- Accredited		Test Firm Registration Number: 463705. Designation Number: CN1184
A2LA-Lab.		The Certificate Registration Number is 4298.01
Name of Firm	:	Shenzhen NTEK Testing Technology Co., Ltd.
Site Location	:	1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y±*U*, where expended uncertainty *U* is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	±2.80dB
2	RF power, conducted	±0.16dB
3	Spurious emissions, conducted	±0.21dB
4	All emissions, radiated(30MHz~1GHz)	±2.64dB
5	All emissions, radiated(1GHz~6GHz)	±2.40dB
6	All emissions, radiated(＞6GHz)	±2.52dB
7	Temperature	±0.5°C
8	Humidity	±2%

4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification	
Equipment	TWS ENC GAMING EARBUDS
Trade Mark	MOYO
FCC ID	2AYL6-ST006
Model No.	ST006
Family Model	7197-54WH
Model Difference	All models are the same circuit and RF module, except the model name.
Operating Frequency	2402MHz~2480MHz
Modulation	GFSK
Number of Channels	40 Channels
Antenna Type	chip Antenna
Antenna Gain	1.75 dBi
Power supply	Earphone: DC 3.7V from Battery or DC 5V form Charging case Charging case: DC 3.7V from Battery or DC 5V from Type-C port
Battery	Earphone: DC 3.7V, 40mAh Charging Case: DC 3.7V, 400mAh
Adapter	N/A
HW Version	2017/09/18
SW Version	US301A_FCC(ATS301X)_V1029

Note 1: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.

Revision History

Report No.	Version	Description	Issued Date
S21051103402001	Rev.01	Initial issue of report	27 May. 2021

5 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps for GFSK modulation) were used for all test.

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

Carrier Frequency and Channel list:

Channel	Frequency(MHz)
0	2402
1	2404
…	…
19	2440
20	2442
…	…
38	2478
39	2480

Note: fc=2402MHz+k×2MHz k=0 to 39

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Test Cases	
Test Item	Data Rate/ Modulation
AC Conducted Emission	Mode 1: normal link mode
Radiated Test Cases	Mode 1: normal link mode
	Mode 2: GFSK Tx Ch00_2402MHz_1Mbps/2Mbps
	Mode 3: GFSK Tx Ch19_2440MHz_1Mbps/2Mbps
	Mode 4: GFSK Tx Ch39_2480MHz_1Mbps/2Mbps
Conducted Test Cases	Mode 2: GFSK Tx Ch00_2402MHz_1Mbps/2Mbps
	Mode 3: GFSK Tx Ch19_2440MHz_1Mbps/2Mbps
	Mode 4: GFSK Tx Ch39_2480MHz_1Mbps/2Mbps

Note:
1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
2. AC power line Conducted Emission was tested under maximum output power.
3. For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.
4. EUT built-in battery-powered, the battery is fully-charged.

6 SETUP OF EQUIPMENT UNDER TEST

6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

For AC Conducted Emission Mode

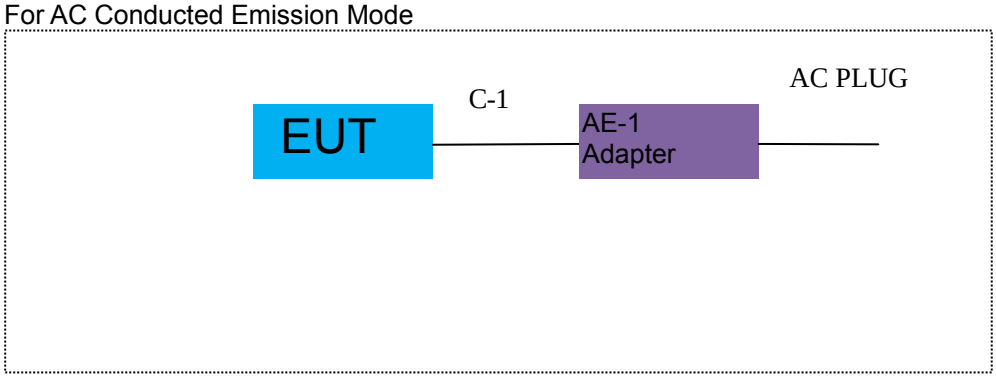

For Radiated Test Cases

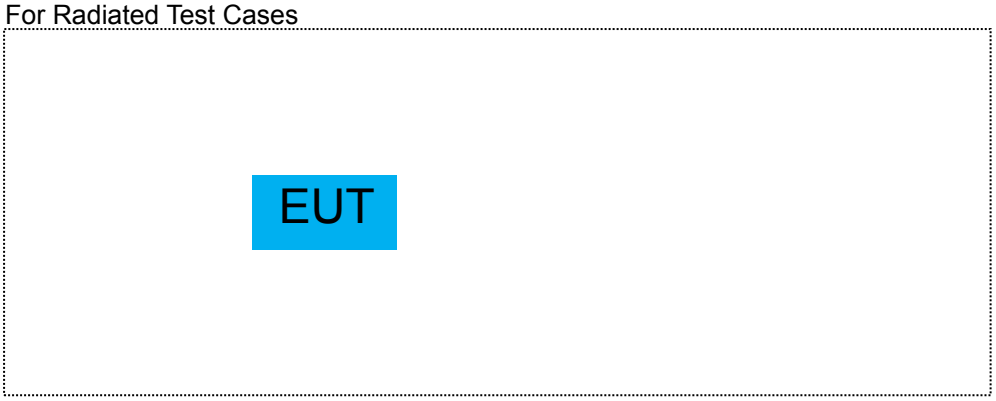

For Conducted Test Cases

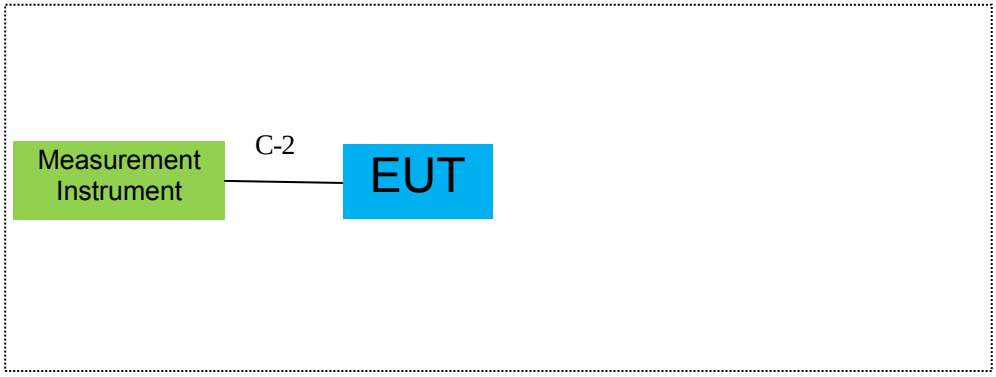

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
AE-1	Adapter	N/A	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	USB Cable	YES	NO	1.0m
C-2	RF Cable	YES	NO	0.1m

Notes:

(1) The support equipment was authorized by Declaration of Confirmation.
(2) For detachable type I/O cable should be specified the length in cm in『Length』column.
(3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation& Conducted Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Aglient	E4407B	MY45108040	2021.04.27	2022.04.26	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2020.07.13	2021.07.12	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2020.07.13	2021.07.12	1 year
4	Test Receiver	R&S	ESPI7	101318	2021.04.27	2022.04.26	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2021.03.29	2022.03.28	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2021.03.29	2022.03.28	1 year
8	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2020.12.10	2021.12.09	1 year
9	Amplifier	EMC	EMC051835SE	980246	2020.07.13	2021.07.12	1 year
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519 B	055	2020.12.10	2021.12.09	1 year
11	Power Meter	DARE	RPR3006W	15I00041SNO84	2020.07.13	2021.07.12	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2019.08.6	2022.08.05	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2019.08.6	2022.08.05	3 year
14	High Test Cable(1G-40GHz)	N/A	R-03	N/A	2019.06.28	2022.06.27	3 year
15	High Test Cable(1G-40GHz)	N/A	R-04	N/A	2021.03.29	2022.03.28	1 year
16	Filter	TRILTHIC	2400MHz	29	2020.07.13	2021.07.12	1 year
17	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2021.04.27	2022.04.26	1 year
2	LISN	R&S	ENV216	101313	2021.04.27	2022.04.26	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2021.04.27	2022.04.26	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2020.05.11	2023.05.10	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2020.05.11	2023.05.10	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2020.05.11	2023.05.10	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Aux Equipment & Test Cable which is scheduled for calibration every 2 or 3 years.

7 TEST REQUIREMENTS

7.1 CONDUCTED EMISSIONS TEST

7.1.1 Applicable Standard

According to FCC Part 15.207(a)

7.1.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
2. The lower limit shall apply at the transition frequencies
3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

7.1.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.1.4 Test Configuration

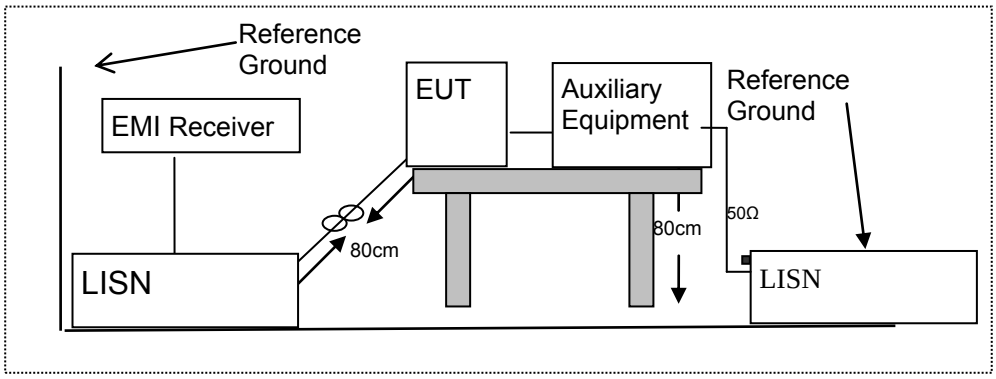

7.1.5 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

7.1.6 Test Results

EUT：	TWS ENC GAMING EARBUDS	Model Name ：	ST006
Temperature：	20.9 ℃	Relative Humidity：	40%
Pressure：	1010hPa	Phase :	L
Test Voltage ：	DC 5V from Adapter AC 120V/60Hz	Test Mode：	Mode 1(left)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1711	25.67	9.56	35.23	64.90	-29.67	QP
0.1711	15.77	9.56	25.33	54.90	-29.57	AVG
0.3996	20.43	9.55	29.98	57.86	-27.88	QP
0.3996	9.70	9.55	19.25	47.86	-28.61	AVG
0.5698	25.32	9.55	34.87	56.00	-21.13	QP
0.5698	14.47	9.55	24.02	46.00	-21.98	AVG
1.1140	19.83	9.56	29.39	56.00	-26.61	QP
1.1140	9.88	9.56	19.44	46.00	-26.56	AVG
1.6338	18.77	9.58	28.35	56.00	-27.65	QP
1.6338	8.57	9.58	18.15	46.00	-27.85	AVG
15.6219	19.40	9.79	29.19	60.00	-30.81	QP
15.6219	9.54	9.79	19.33	50.00	-30.67	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

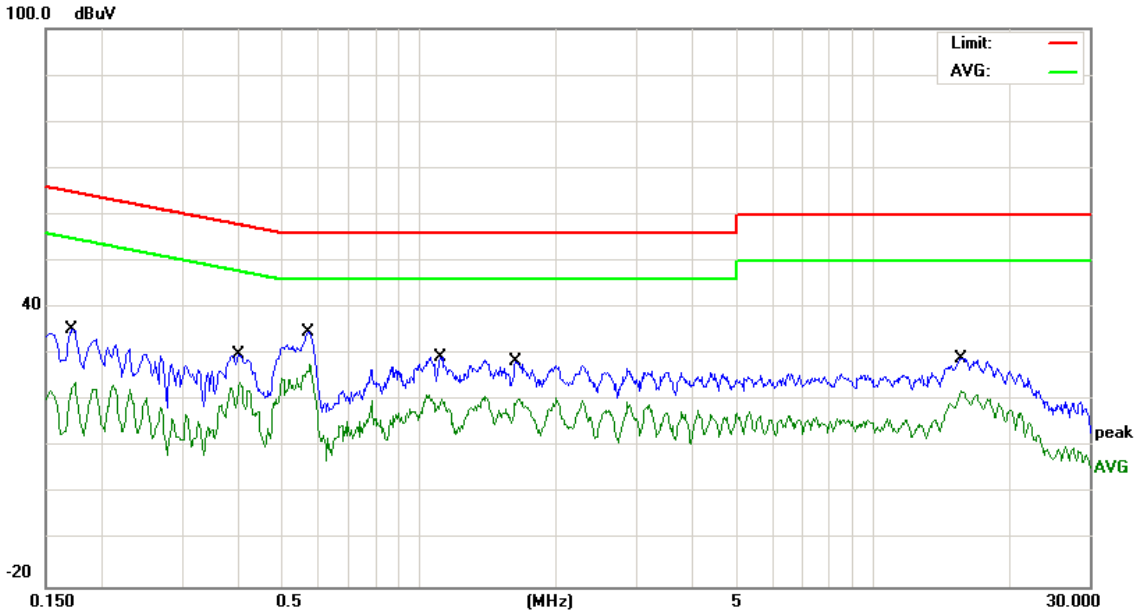

EUT：	TWS ENC GAMING EARBUDS	Model Name ：	ST006
Temperature：	20.9 ℃	Relative Humidity：	40%
Pressure：	1010hPa	Phase :	N
Test Voltage ：	DC 5V from Adapter AC 120V/60Hz	Test Mode：	Mode 1(left)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1555	26.13	9.55	35.68	65.70	-30.02	QP
0.1555	15.67	9.55	25.22	55.70	-30.48	AVG
0.3699	20.31	9.54	29.85	58.50	-28.65	QP
0.3699	8.48	9.54	18.02	48.50	-30.48	AVG
0.5738	26.73	9.54	36.27	56.00	-19.73	QP
0.5738	16.79	9.54	26.33	46.00	-19.67	AVG
0.7539	21.34	9.54	30.88	56.00	-25.12	QP
0.7539	10.60	9.54	20.14	46.00	-25.86	AVG
1.6619	22.85	9.57	32.42	56.00	-23.58	QP
1.6619	12.78	9.57	22.35	46.00	-23.65	AVG
16.4338	18.71	9.80	28.51	60.00	-31.49	QP
16.4338	8.45	9.80	18.25	50.00	-31.75	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

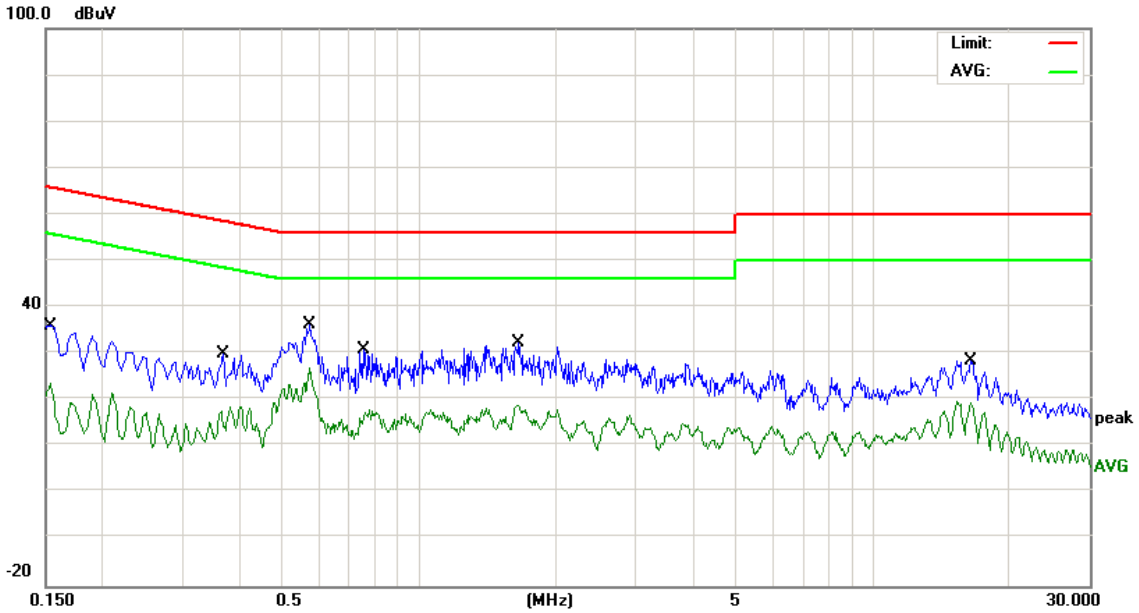

EUT：	TWS ENC GAMING EARBUDS	Model Name ：	ST006
Temperature：	20.9 ℃	Relative Humidity：	40%
Pressure：	1010hPa	Phase :	L
Test Voltage ：	DC 5V from Adapter AC 120V/60Hz	Test Mode：	Mode 1(right)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1700	23.72	9.56	33.28	64.96	-31.68	QP
0.1700	13.77	9.56	23.33	54.96	-31.63	AVG
0.4060	19.61	9.55	29.16	57.73	-28.57	QP
0.4060	9.70	9.55	19.25	47.73	-28.48	AVG
0.5700	28.82	9.55	38.37	56.00	-17.63	QP
0.5700	18.48	9.55	28.03	46.00	-17.97	AVG
0.7860	19.23	9.55	28.78	56.00	-27.22	QP
0.7860	8.78	9.55	18.33	46.00	-27.67	AVG
1.0580	19.17	9.56	28.73	56.00	-27.27	QP
1.0580	7.69	9.56	17.25	46.00	-28.75	AVG
1.6340	17.27	9.58	26.85	56.00	-29.15	QP
1.6340	6.97	9.58	16.55	46.00	-29.45	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

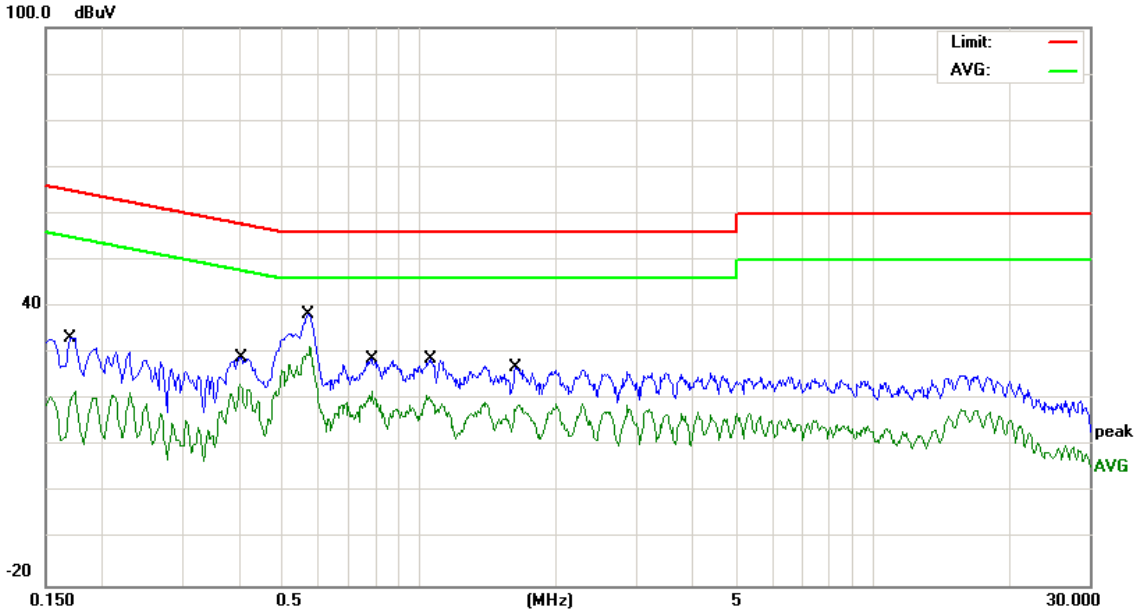

EUT：	TWS ENC GAMING EARBUDS	Model Name ：	ST006
Temperature：	20.9 ℃	Relative Humidity：	40%
Pressure：	1010hPa	Phase :	N
Test Voltage ：	DC 5V from Adapter AC 120V/60Hz	Test Mode：	Mode 1(right)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1539	26.07	9.55	35.62	65.78	-30.16	QP
0.1539	16.65	9.55	26.20	55.78	-29.58	AVG
0.4060	18.52	9.54	28.06	57.73	-29.67	QP
0.4060	8.71	9.54	18.25	47.73	-29.48	AVG
0.5740	26.23	9.54	35.77	56.00	-20.23	QP
0.5740	15.48	9.54	25.02	46.00	-20.98	AVG
0.7539	21.84	9.54	31.38	56.00	-24.62	QP
0.7539	11.79	9.54	21.33	46.00	-24.67	AVG
1.0140	21.46	9.55	31.01	56.00	-24.99	QP
1.0140	11.59	9.55	21.14	46.00	-24.86	AVG
16.4338	16.71	9.80	26.51	60.00	-33.49	QP
16.4338	6.89	9.80	16.69	50.00	-33.31	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

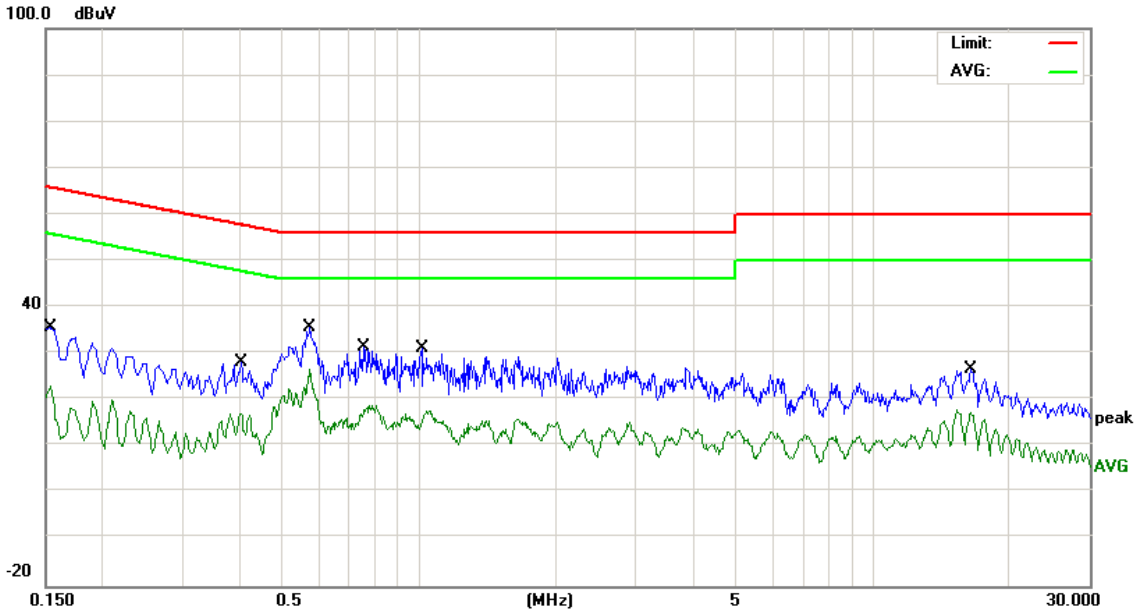

7.2 RADIATED SPURIOUS EMISSION

7.2.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and ANSI C63.10-2013

7.2.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	24000/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (uV/m)
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
3. For Frequency 9kHz~30MHz: Distance extrapolation factor =40log(Specific distance/ test distance)(dB); Limit line=Specific limits(dBuV) + distance extrapolation factor.
For Frequency above 30MHz: Distance extrapolation factor =20log(Specific distance/ test distance)(dB);
Limit line=Specific limits(dBuV) + distance extrapolation factor.

7.2.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.2.4 Test Configuration

(a) For radiated emissions below 30MHz

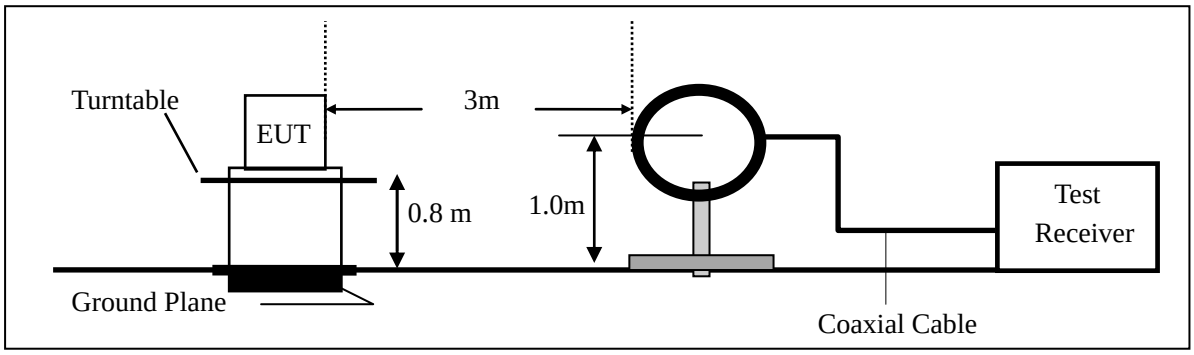

(b) For radiated emissions from 30MHz to 1000MHz

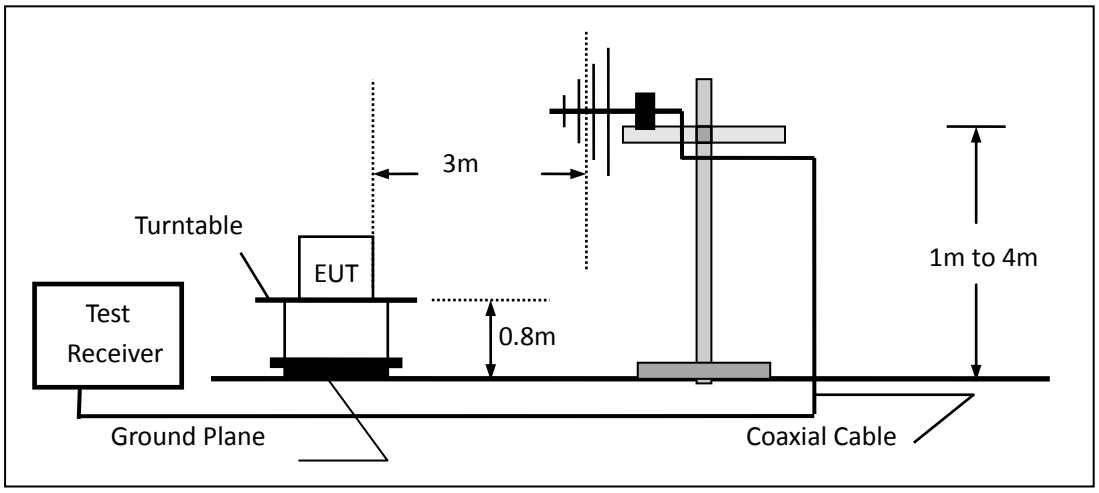

(c) For radiated emissions above 1000MHz

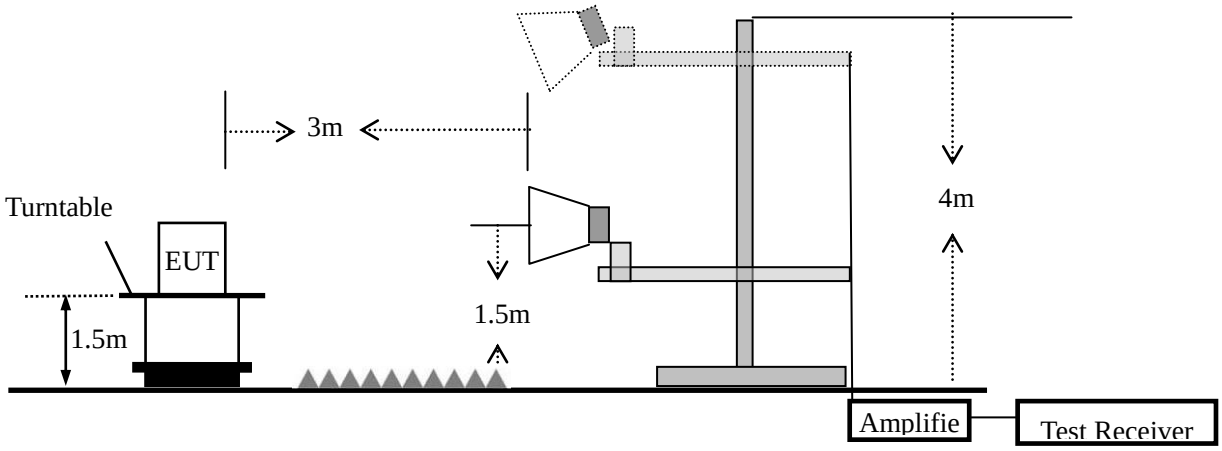

7.2.5 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m.The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.
This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.
Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 1MHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
d. For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
e. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
f. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
g. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	1 MHz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where RBWCF [dB] =10*lg(100 [kHz]/narrower RBW [kHz]). , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.2.6 Test Results

Spurious Emission below 30MHz (9KHz to 30MHz)

EUT:	TWS ENC GAMING EARBUDS	Model No.:	ST006
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Allen Liu

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Spurious Emission below 1GHz (30MHz to 1GHz)
All the modulation modes have been tested, and the worst result was report as below:

EUT：	TWS ENC GAMING EARBUDS	Model Name ：	ST006
Temperature：	23.2 ℃	Relative Humidity：	55%
Pressure：	1010hPa	Test Mode：	Mode 1(left)
Test Voltage ：	DC 3.7V		

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	32.0667	6.54	17.18	23.72	40.00	-16.28	QP
V	53.5052	9.09	6.62	15.71	40.00	-24.29	QP
V	105.6414	7.28	10.21	17.49	43.50	-26.01	QP
V	144.8418	7.02	11.01	18.03	43.50	-25.47	QP
V	280.0237	6.50	14.49	20.99	46.00	-25.01	QP
V	504.7062	7.14	18.70	25.84	46.00	-20.16	QP

Remark:
Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

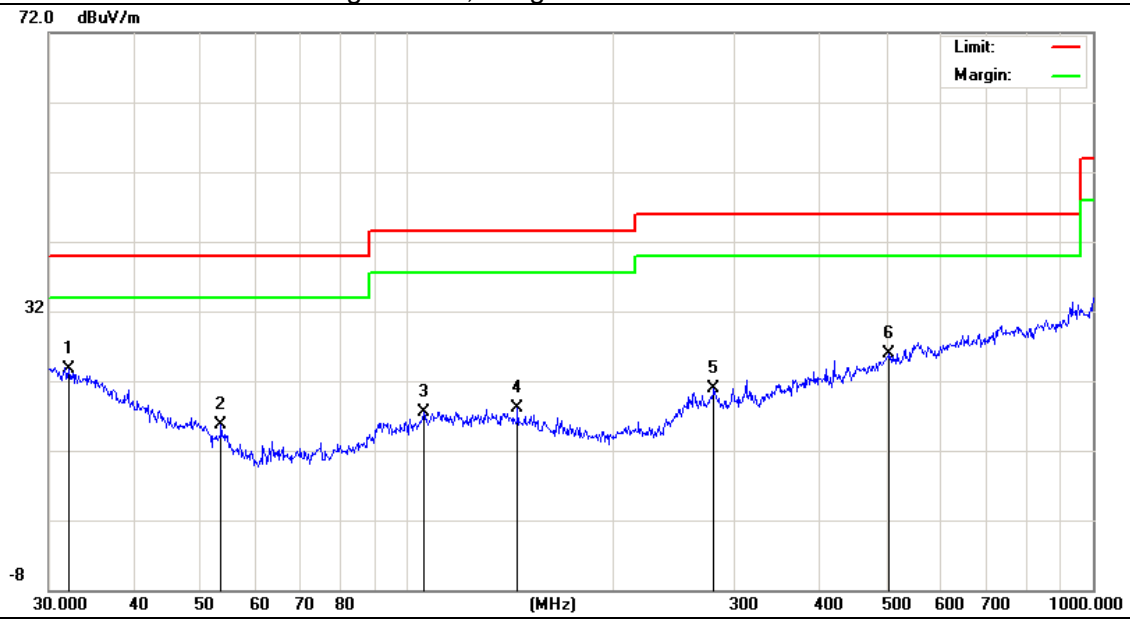

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
H	35.0048	7.78	16.05	23.83	40.00	-16.17	QP
H	48.5016	8.51	9.77	18.28	40.00	-21.72	QP
H	66.0340	9.86	5.40	15.26	40.00	-24.74	QP
H	131.7575	8.99	11.56	20.55	43.50	-22.95	QP
H	304.6099	9.67	13.52	23.19	46.00	-22.81	QP
H	545.1825	7.91	20.12	28.03	46.00	-17.97	QP

Remark:
Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

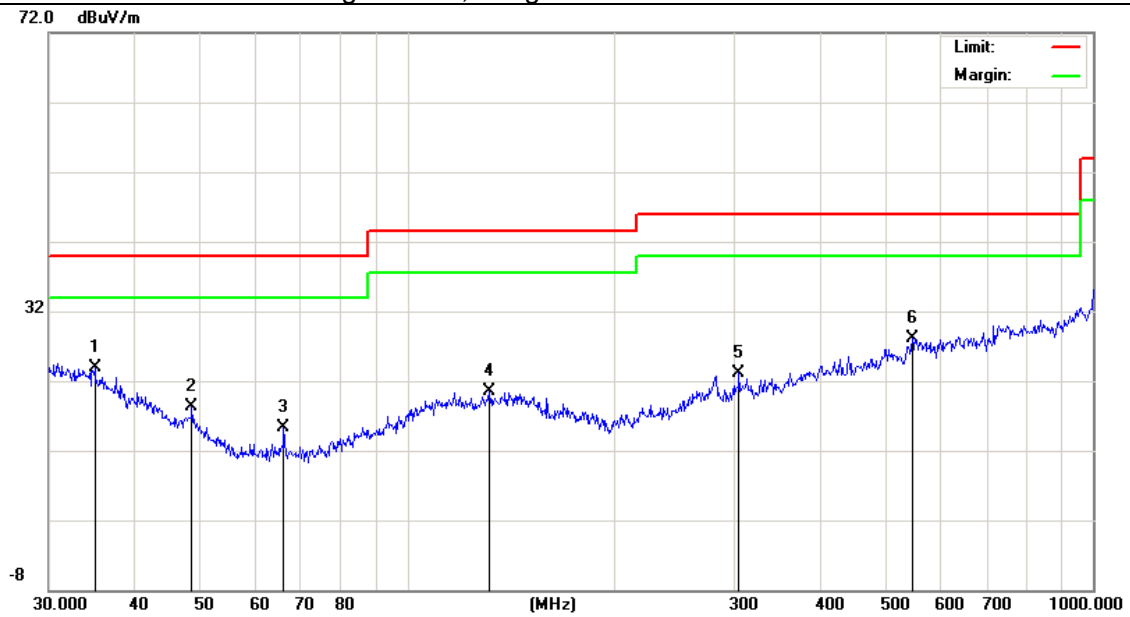

EUT：	TWS ENC GAMING EARBUDS	Model Name ：	ST006
Temperature：	23.2 ℃	Relative Humidity：	55%
Pressure：	1010hPa	Test Mode：	Mode 1(right)
Test Voltage ：	DC 3.7V		

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	53.5052	8.09	6.62	14.71	40.00	-25.29	QP
V	117.7725	5.47	11.50	16.97	43.50	-26.53	QP
V	153.2004	5.84	10.71	16.55	43.50	-26.95	QP
V	280.0237	5.50	14.49	19.99	46.00	-26.01	QP
V	517.2480	5.89	18.48	24.37	46.00	-21.63	QP
V	633.9073	6.35	20.30	26.65	46.00	-19.35	QP

Remark:
Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

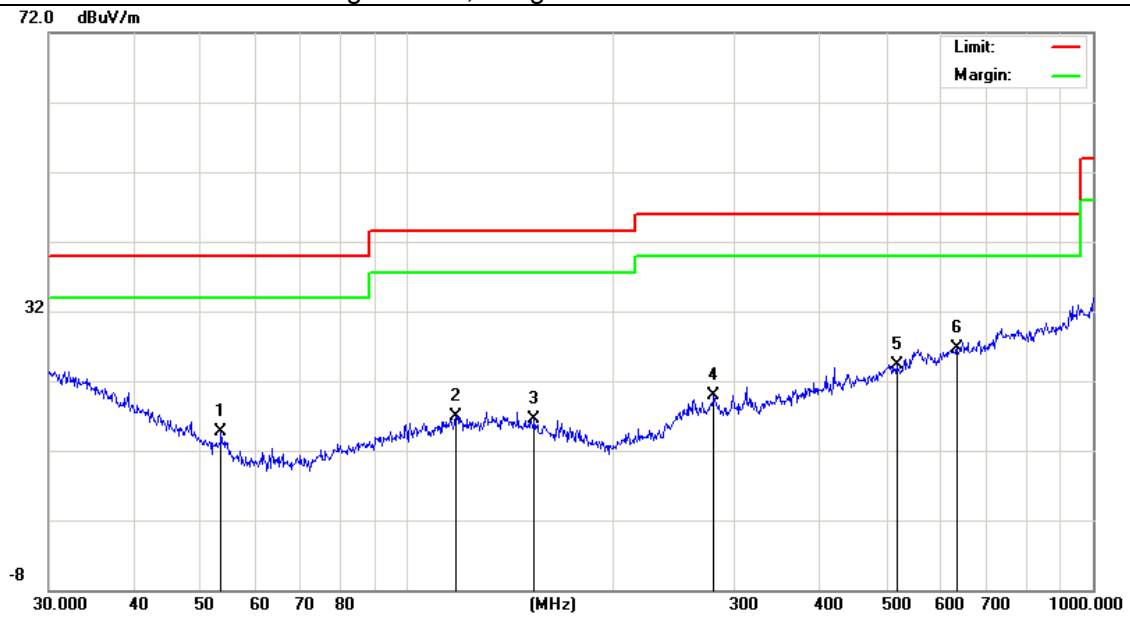

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
H	37.5479	6.47	14.55	21.02	40.00	-18.98	QP
H	66.0342	7.86	5.40	13.26	40.00	-26.74	QP
H	110.1816	5.51	10.34	15.85	43.50	-27.65	QP
H	140.3421	6.03	11.37	17.40	43.50	-26.10	QP
H	304.6099	7.17	13.52	20.69	46.00	-25.31	QP
H	545.1826	6.41	20.12	26.53	46.00	-19.47	QP

Remark:
Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

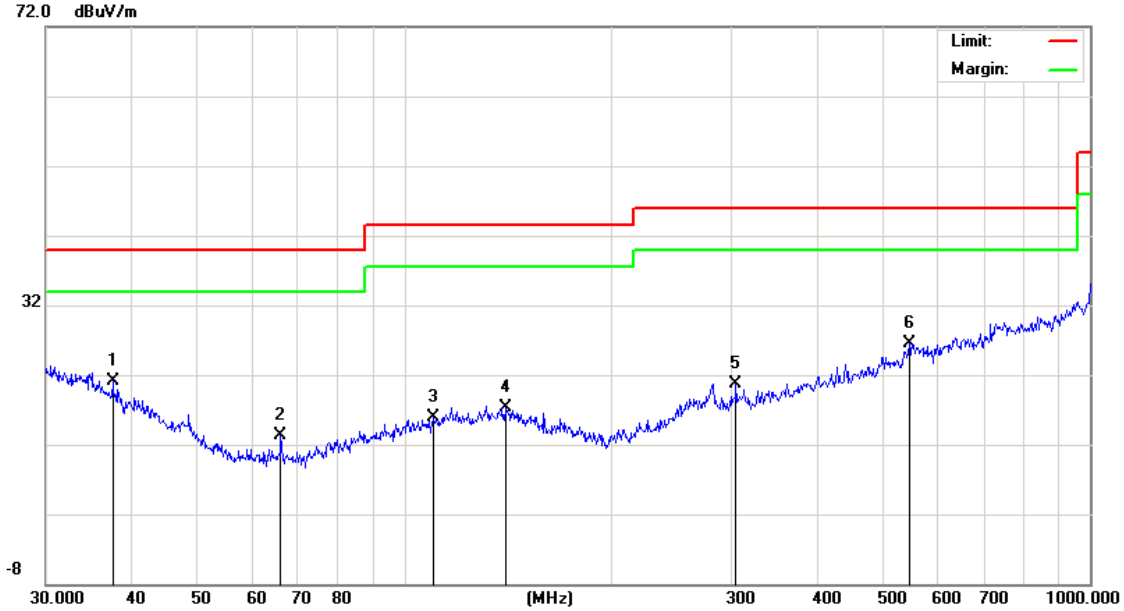

Spurious Emission Above 1GHz (1GHz to 25GHz)

EUT:	TWS ENC GAMING EARBUDS	Model No.:	ST006
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Allen Liu

left:

Frequency	Read Level	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)		
Low Channel (2402 MHz)(GFSK)--Above 1G									
4804.338	63.18	5.21	35.59	44.30	59.68	74.00	-14.32	Pk	Vertical
4804.338	41.86	5.21	35.59	44.30	38.36	54.00	-15.64	AV	Vertical
7206.107	61.34	6.48	36.27	44.60	59.49	74.00	-14.51	Pk	Vertical
7206.107	40.83	6.48	36.27	44.60	38.98	54.00	-15.02	AV	Vertical
4804.169	63.70	5.21	35.55	44.30	60.16	74.00	-13.84	Pk	Horizontal
4804.169	42.64	5.21	35.55	44.30	39.10	54.00	-14.90	AV	Horizontal
7206.214	61.71	6.48	36.27	44.52	59.94	74.00	-14.06	Pk	Horizontal
7206.214	41.90	6.48	36.27	44.52	40.13	54.00	-13.87	AV	Horizontal
Mid Channel (2440 MHz)(GFSK)--Above 1G									
4880.473	62.81	5.21	35.66	44.20	59.48	74.00	-14.52	Pk	Vertical
4880.473	44.05	5.21	35.66	44.20	40.72	54.00	-13.28	AV	Vertical
7320.265	65.11	7.10	36.50	44.43	64.28	74.00	-9.72	Pk	Vertical
7320.265	41.45	7.10	36.50	44.43	40.62	54.00	-13.38	AV	Vertical
4880.366	61.86	5.21	35.66	44.20	58.53	74.00	-15.47	Pk	Horizontal
4880.366	41.46	5.21	35.66	44.20	38.13	54.00	-15.87	AV	Horizontal
7320.234	59.78	7.10	36.50	44.43	58.95	74.00	-15.05	Pk	Horizontal
7320.234	43.43	7.10	36.50	44.43	42.60	54.00	-11.40	AV	Horizontal
High Channel (2480 MHz)(GFSK)-- Above 1G									
4960.482	63.02	5.21	35.52	44.21	59.54	74.00	-14.46	Pk	Vertical
4960.482	42.83	5.21	35.52	44.21	39.35	54.00	-14.65	AV	Vertical
7440.131	64.75	7.10	36.53	44.60	63.78	74.00	-10.22	Pk	Vertical
7440.131	49.00	7.10	36.53	44.60	48.03	54.00	-5.97	AV	Vertical
4960.326	63.78	5.21	35.52	44.21	60.30	74.00	-13.70	Pk	Horizontal
4960.326	44.98	5.21	35.52	44.21	41.50	54.00	-12.50	AV	Horizontal
7440.199	65.45	7.10	36.53	44.60	64.48	74.00	-9.52	Pk	Horizontal
7440.199	45.91	7.10	36.53	44.60	44.94	54.00	-9.06	AV	Horizontal

Note:

(1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor
(2)All other emissions more than 20dB below the limit.
(3)Only the worst data is recorded in the report, the data rates (1Mbps for GFSK modulation) test result is the worst

right:

Frequency	Read Level	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)		
Low Channel (2402 MHz)(GFSK)--Above 1G									
4804.338	62.59	5.21	35.59	44.30	59.09	74.00	-14.91	Pk	Vertical
4804.338	42.21	5.21	35.59	44.30	38.71	54.00	-15.29	AV	Vertical
7206.107	61.09	6.48	36.27	44.60	59.24	74.00	-14.76	Pk	Vertical
7206.107	41.74	6.48	36.27	44.60	39.89	54.00	-14.11	AV	Vertical
4804.169	64.35	5.21	35.55	44.30	60.81	74.00	-13.19	Pk	Horizontal
4804.169	41.79	5.21	35.55	44.30	38.25	54.00	-15.75	AV	Horizontal
7206.214	60.84	6.48	36.27	44.52	59.07	74.00	-14.93	Pk	Horizontal
7206.214	41.84	6.48	36.27	44.52	40.07	54.00	-13.93	AV	Horizontal
Mid Channel (2440 MHz)(GFSK)--Above 1G									
4880.473	62.77	5.21	35.66	44.20	59.44	74.00	-14.56	Pk	Vertical
4880.473	44.03	5.21	35.66	44.20	40.70	54.00	-13.30	AV	Vertical
7320.265	66.19	7.10	36.50	44.43	65.36	74.00	-8.64	Pk	Vertical
7320.265	41.99	7.10	36.50	44.43	41.16	54.00	-12.84	AV	Vertical
4880.366	63.64	5.21	35.66	44.20	60.31	74.00	-13.69	Pk	Horizontal
4880.366	40.73	5.21	35.66	44.20	37.40	54.00	-16.60	AV	Horizontal
7320.234	61.21	7.10	36.50	44.43	60.38	74.00	-13.62	Pk	Horizontal
7320.234	44.72	7.10	36.50	44.43	43.89	54.00	-10.11	AV	Horizontal
High Channel (2480 MHz)(GFSK)-- Above 1G									
4960.482	64.21	5.21	35.52	44.21	60.73	74.00	-13.27	Pk	Vertical
4960.482	41.87	5.21	35.52	44.21	38.39	54.00	-15.61	AV	Vertical
7440.131	64.46	7.10	36.53	44.60	63.49	74.00	-10.51	Pk	Vertical
7440.131	48.22	7.10	36.53	44.60	47.25	54.00	-6.75	AV	Vertical
4960.326	63.82	5.21	35.52	44.21	60.34	74.00	-13.66	Pk	Horizontal
4960.326	45.27	5.21	35.52	44.21	41.79	54.00	-12.21	AV	Horizontal
7440.199	65.43	7.10	36.53	44.60	64.46	74.00	-9.54	Pk	Horizontal
7440.199	45.50	7.10	36.53	44.60	44.53	54.00	-9.47	AV	Horizontal

Note:

(1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor
(2)All other emissions more than 20dB below the limit.
(3)Only the worst data is recorded in the report, the data rates (1Mbps for GFSK modulation) test result is the worst

Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

EUT:	TWS ENC GAMING EARBUDS	Model No.:	ST006
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/ Mode4	Test By:	Allen Liu

left:

Frequency	Meter Reading	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
1Mbps(GFSK)									
2310.00	63.03	2.97	27.80	43.80	50.00	74	-24.00	Pk	Horizontal
2310.00	42.78	2.97	27.80	43.80	29.75	54	-24.25	AV	Horizontal
2310.00	62.26	2.97	27.80	43.80	49.23	74	-24.77	Pk	Vertical
2310.00	42.85	2.97	27.80	43.80	29.82	54	-24.18	AV	Vertical
2390.00	63.77	3.14	27.21	43.80	50.32	74	-23.68	Pk	Vertical
2390.00	43.97	3.14	27.21	43.80	30.52	54	-23.48	AV	Vertical
2390.00	63.64	3.14	27.21	43.80	50.19	74	-23.81	Pk	Horizontal
2390.00	42.38	3.14	27.21	43.80	28.93	54	-25.07	AV	Horizontal
2483.50	61.51	3.58	27.70	44.00	48.79	74	-25.21	Pk	Vertical
2483.50	43.03	3.58	27.70	44.00	30.31	54	-23.69	AV	Vertical
2483.50	66.04	3.58	27.70	44.00	53.32	74	-20.68	Pk	Horizontal
2483.50	44.77	3.58	27.70	44.00	32.05	54	-21.95	AV	Horizontal

Note: (1) All other emissions more than 20dB below the limit.
(2)Only the worst data is recorded in the report, the data rates (1Mbps for GFSK modulation) test result is the worst

right:

Frequency	Meter Reading	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
1Mbps(GFSK)									
2310.00	63.12	2.97	27.80	43.80	50.09	74	-23.91	Pk	Horizontal
2310.00	43.67	2.97	27.80	43.80	30.64	54	-23.36	AV	Horizontal
2310.00	61.99	2.97	27.80	43.80	48.96	74	-25.04	Pk	Vertical
2310.00	42.84	2.97	27.80	43.80	29.81	54	-24.19	AV	Vertical
2390.00	64.66	3.14	27.21	43.80	51.21	74	-22.79	Pk	Vertical
2390.00	42.64	3.14	27.21	43.80	29.19	54	-24.81	AV	Vertical
2390.00	63.89	3.14	27.21	43.80	50.44	74	-23.56	Pk	Horizontal
2390.00	41.57	3.14	27.21	43.80	28.12	54	-25.88	AV	Horizontal
2483.50	62.18	3.58	27.70	44.00	49.46	74	-24.54	Pk	Vertical
2483.50	43.28	3.58	27.70	44.00	30.56	54	-23.44	AV	Vertical
2483.50	65.67	3.58	27.70	44.00	52.95	74	-21.05	Pk	Horizontal
2483.50	44.35	3.58	27.70	44.00	31.63	54	-22.37	AV	Horizontal

Note: (1) All other emissions more than 20dB below the limit.
(2)Only the worst data is recorded in the report, the data rates (1Mbps for GFSK modulation) test result is the worst

Spurious Emission in Restricted Band 3260MHz-18000MHz

EUT:	TWS ENC GAMING EARBUDS	Model No.:	ST006
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/ Mode4	Test By:	Allen Liu

left:

Frequency	Reading Level	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
3260	64.34	4.04	29.57	44.70	53.25	74	-20.75	Pk	Vertical
3260	58.10	4.04	29.57	44.70	47.01	54	-6.99	AV	Vertical
3260	65.24	4.04	29.57	44.70	54.15	74	-19.85	Pk	Horizontal
3260	58.33	4.04	29.57	44.70	47.24	54	-6.76	AV	Horizontal
3332	66.21	4.26	29.87	44.40	55.94	74	-18.06	Pk	Vertical
3332	56.58	4.26	29.87	44.40	46.31	54	-7.69	AV	Vertical
3332	65.16	4.26	29.87	44.40	54.89	74	-19.11	Pk	Horizontal
3332	52.71	4.26	29.87	44.40	42.44	54	-11.56	AV	Horizontal
17797	45.96	10.99	43.95	43.50	57.40	74	-16.60	Pk	Vertical
17797	35.96	10.99	43.95	43.50	47.40	54	-6.60	AV	Vertical
17788	44.22	11.81	43.69	44.60	55.12	74	-18.88	Pk	Horizontal
17788	37.06	11.81	43.69	44.60	47.96	54	-6.04	AV	Horizontal

Note: (1) All other emissions more than 20dB below the limit.
(2)Only the worst data is recorded in the report, the data rates (1Mbps for GFSK modulation) test result is the worst

right::

Frequency	Reading Level	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
3260	63.08	4.04	29.57	44.70	51.99	74	-22.01	Pk	Vertical
3260	56.62	4.04	29.57	44.70	45.53	54	-8.47	AV	Vertical
3260	66.90	4.04	29.57	44.70	55.81	74	-18.19	Pk	Horizontal
3260	57.59	4.04	29.57	44.70	46.50	54	-7.50	AV	Horizontal
3332	65.73	4.26	29.87	44.40	55.46	74	-18.54	Pk	Vertical
3332	57.08	4.26	29.87	44.40	46.81	54	-7.19	AV	Vertical
3332	65.13	4.26	29.87	44.40	54.86	74	-19.14	Pk	Horizontal
3332	53.50	4.26	29.87	44.40	43.23	54	-10.77	AV	Horizontal
17797	46.36	10.99	43.95	43.50	57.80	74	-16.20	Pk	Vertical
17797	34.83	10.99	43.95	43.50	46.27	54	-7.73	AV	Vertical
17788	45.48	11.81	43.69	44.60	56.38	74	-17.62	Pk	Horizontal
17788	36.35	11.81	43.69	44.60	47.25	54	-6.75	AV	Horizontal

Note: (1) All other emissions more than 20dB below the limit.
(2)Only the worst data is recorded in the report, the data rates (1Mbps for GFSK modulation) test result is the worst

7.3 6DB BANDWIDTH

7.3.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.2.

7.3.2 Conformance Limit

The minimum permissible 6dB bandwidth is 500 kHz.

7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.3.4 Test Setup

Please refer to Section 6.1 of this test report.

7.3.5 Test Procedure

The testing follows Subclause 11.8 of ANSI C63.10
The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
Set to the maximum power setting and enable the EUT transmit continuously.
The EUT was operating in controlled its channel.
Use the following spectrum analyzer settings:

a) Set RBW = 100 kHz.
b) Set the video bandwidth (VBW) ≥ 3*RBW.
c) Detector = Peak.
d) Trace mode = max hold.
e) Sweep = auto couple.
f) Allow the trace to stabilize.
g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3.6 Test Results

EUT:	TWS ENC GAMING EARBUDS	Model No.:	ST006
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Allen Liu

Test data reference attachment.

7.4 DUTY CYCLE

7.4.1 Applicable Standard

According to KDB 558074 D01 15.247 Meas Guidance v05r02s Section 6.

7.4.2 Conformance Limit

No limit requirement.

7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

7.4.5 Test Procedure

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW ≥ OBW if possible; otherwise, set RBW to the largest available value. Set VBW ≥ RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are > 50/T and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if T ≤ 16.7 microseconds.)

The transmitter output is connected to the Spectrum Analyzer. We tested accroding to the zero-span measurement method, 6.0)b) in KDB 558074

The largest availble value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if T ≤ 6.25 microseconds. (50/6.25 = 8)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are > 50/T.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
Set to the maximum power setting and enable the EUT transmit continuously.
The EUT was operating in controlled its channel.
Use the following spectrum analyzer settings:
Span = Zero Span
RBW = 8MHz(the largest available value)
VBW = 8MHz (≥ RBW)
Number of points in Sweep >100
Detector function = peak
Trace = Clear write
Measure T_{total} and T_{on}
Calculate Duty Cycle = T_{on} / T_{total}

7.4.6 Test Results

EUT:	TWS ENC GAMING EARBUDS	Model No.:	ST006
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	N/A	Test By:	N/A

Note：Not Applicable

7.5 PEAK OUTPUT POWER

7.5.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.3.1.

7.5.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm). If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

7.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.5.4 Test Setup

Please refer to Section 6.1 of this test report.

7.5.5 Test Procedure

The testing follows Subclause 11.9.1.1 of ANSI C63.10
The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
Set to the maximum power setting and enable the EUT transmit continuously.
The EUT was operating in controlled its channel.
Use the following spectrum analyzer settings:
Set the RBW ≧DTS bandwidth.
Set VBW =3*RBW.
Set the span ≧3*RBW
Set Sweep time = auto couple.
Set Detector = peak.
Set Trace mode = max hold.
Allow trace to fully stabilize.
Use peak marker function to determine the peak amplitude level.

7.5.6 Test Results

EUT:	TWS ENC GAMING EARBUDS	Model No.:	ST006
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Allen Liu

Test data reference attachment.

7.6 POWER SPECTRAL DENSITY

7.6.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.4.

7.6.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

7.6.5 Test Procedure

The testing follows Measurement Procedure Subclause 11.10.2 of ANSI C63.10
This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
Set to the maximum power setting and enable the EUT transmit continuously.
The EUT was operating in controlled its channel.
a) Set analyzer center frequency to DTS channel center frequency.
b) Set the span to 1.5*DTS bandwidth.
c) Set the RBW to: 3 kHz ≤ RBW ≤ 100 kHz.
d) Set the VBW ≥ 3 RBW.
e) Detector = peak.
f) Sweep time = auto couple.
g) Trace mode = max hold.
h) Allow trace to fully stabilize.
i) Use the peak marker function to determine the maximum amplitude level within the RBW.
j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.6.6 Test Results

EUT:	TWS ENC GAMING EARBUDS	Model No.:	ST006
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Allen Liu

Test data reference attachment.

7.7 CONDUCTED BAND EDGE MEASUREMENT

7.7.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.7.

7.7.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

7.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.7.4 Test Setup

Please refer to Section 6.1 of this test report.

7.7.5 Test Procedure

The testing follows FCC KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.7.
The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
Set to the maximum power setting and enable the EUT transmit continuously.
The EUT was operating in controlled its channel.
Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
Repeat above procedures until all measured frequencies were complete.

7.7.6 Test Results

EUT:	TWS ENC GAMING EARBUDS	Model No.:	ST006
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode4	Test By:	Allen Liu

Test data reference attachment.

7.8 SPURIOUS RF CONDUCTED EMISSIONS

7.8.1 Conformance Limit

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

7.8.2 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.8.3 Test Setup

Please refer to Section 6.1 of this test report.

7.8.4 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength , and measure frequency range from 30MHz to 26.5GHz.

7.8.5 Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandege measurement data.

Test data reference attachment.

7.9 ANTENNA APPLICATION

7.9.1 Antenna Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.9.2 Result

The EUT antenna is permanent attached chip antenna (Gain: 1.75 dBi). It comply with the standard requirement.

8 TEST RESULTS

LEFT(1M):

8.1.1 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant 1	-1.776	30	Pass
NVNT	BLE	2440	Ant 1	-1.584	30	Pass
NVNT	BLE	2480	Ant 1	-1.619	30	Pass

Power NVNT BLE 2402MHz Ant1

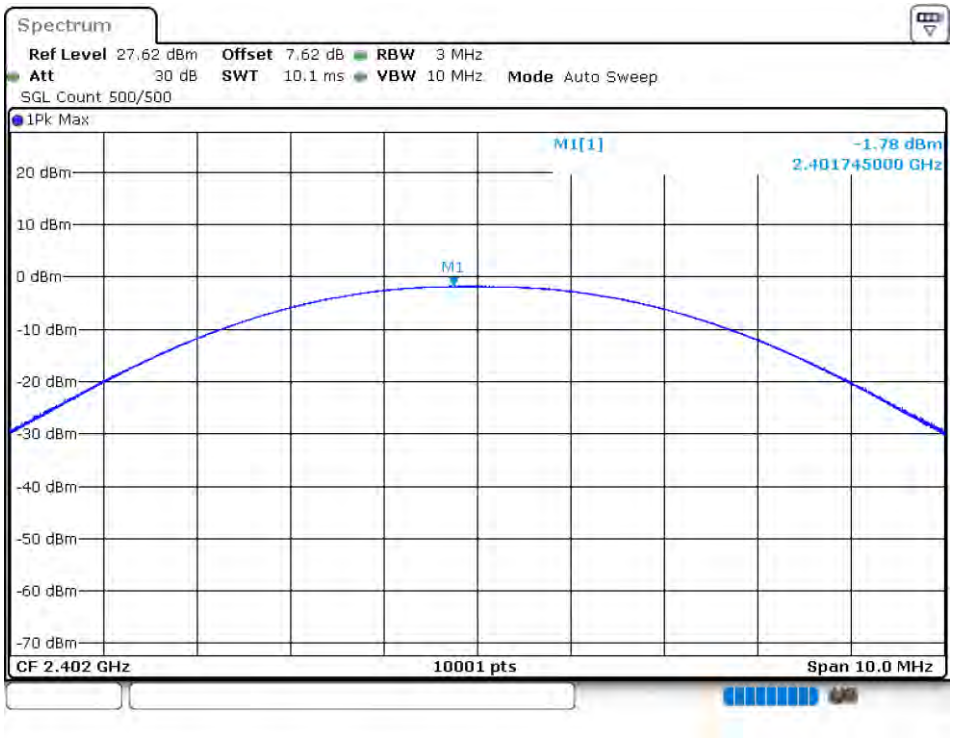

Power NVNT BLE 2440MHz Ant1

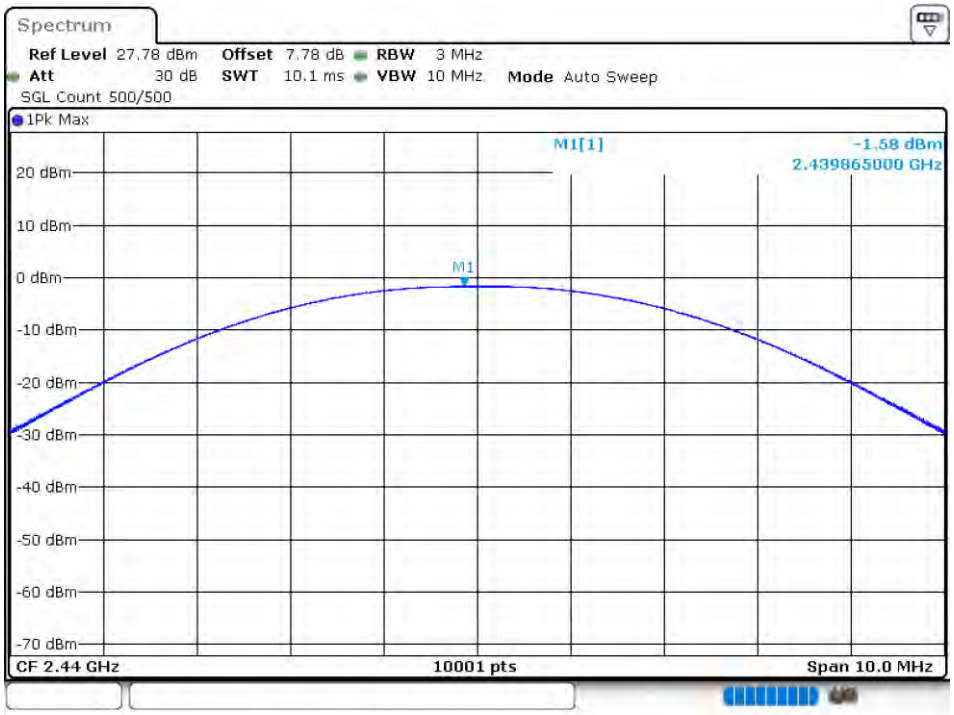

Power NVNT BLE 2480MHz Ant1

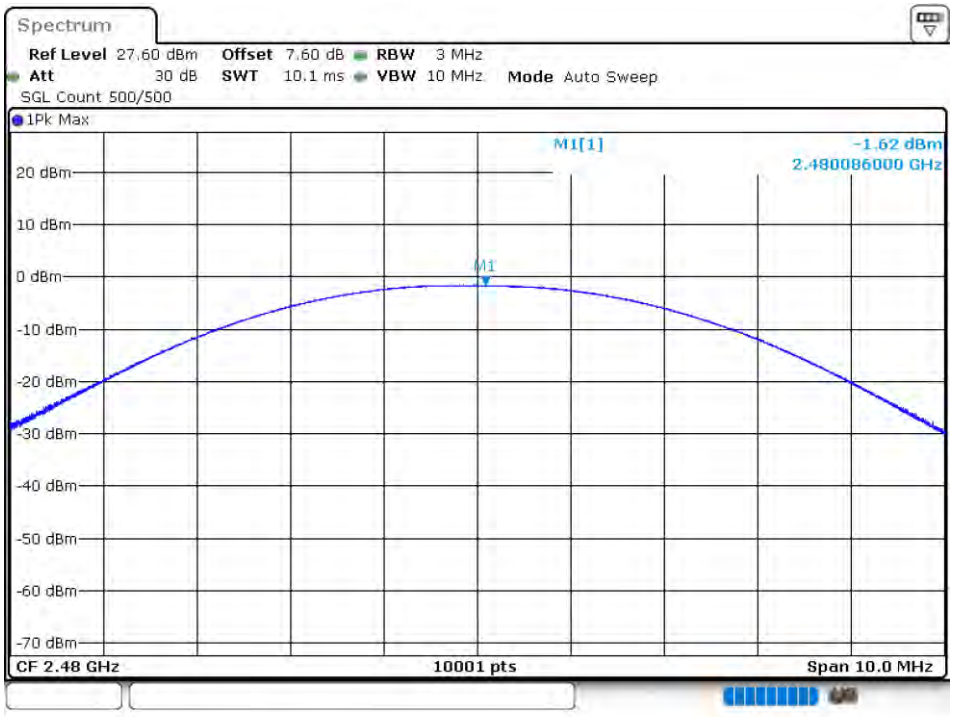

8.1.2 OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant 1	1.0397	0.7108	0.5	Pass
NVNT	BLE	2440	Ant 1	1.0467	0.656	0.5	Pass
NVNT	BLE	2480	Ant 1	1.0407	0.6726	0.5	Pass

OBW NVNT BLE 2402MHz Ant1

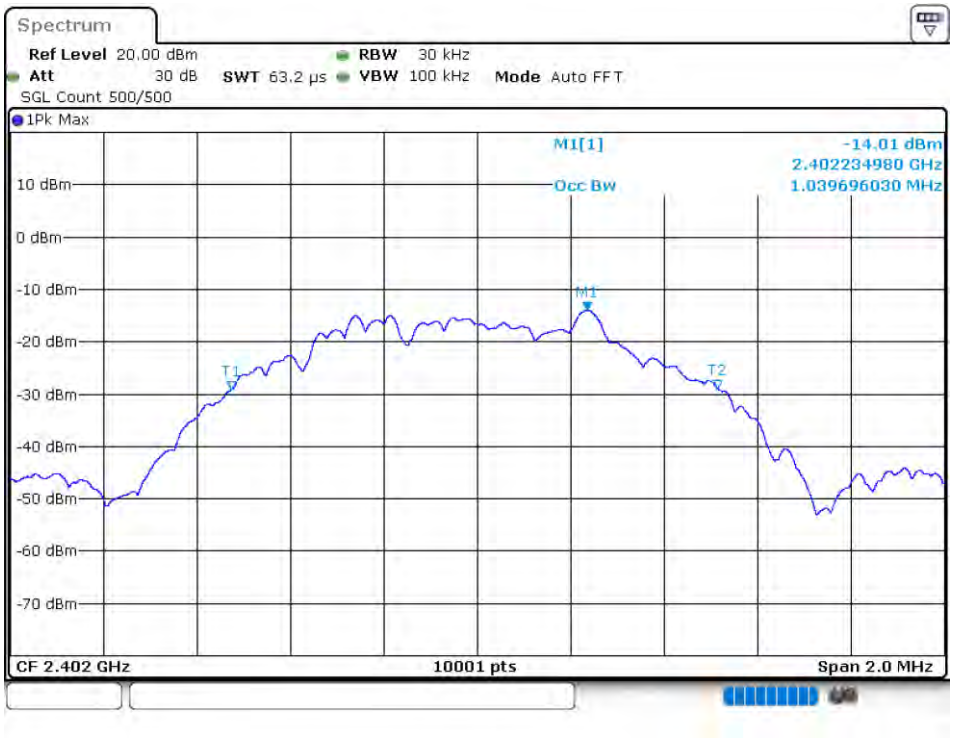

-6 dB BW NVNT BLE 2402MHz Ant1

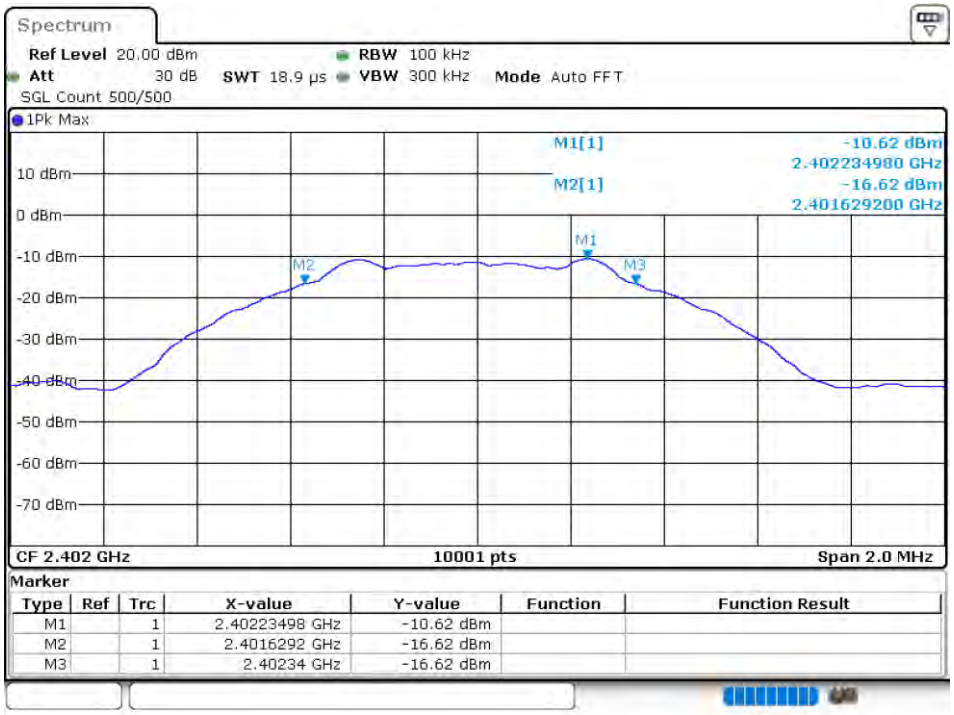

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.40223498 GHz	-10.62 dBm		
M2		1	2.4016292 GHz	-16.62 dBm		
M3		1	2.40234 GHz	-16.62 dBm		

OBW NVNT BLE 2440MHz Ant1

-6 dB BW NVNT BLE 2440MHz Ant1

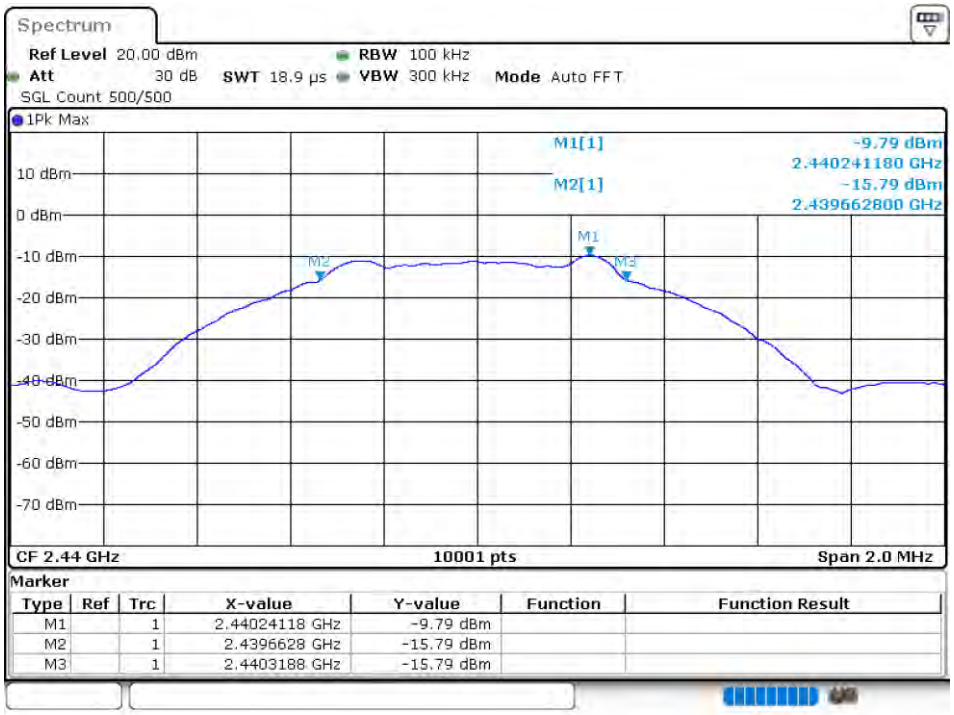

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.44024118 GHz	-9.79 dBm		
M2		1	2.4396628 GHz	-15.79 dBm		
M3		1	2.4403188 GHz	-15.79 dBm		

OBW NVNT BLE 2480MHz Ant1

-6 dB BW NVNT BLE 2480MHz Ant1

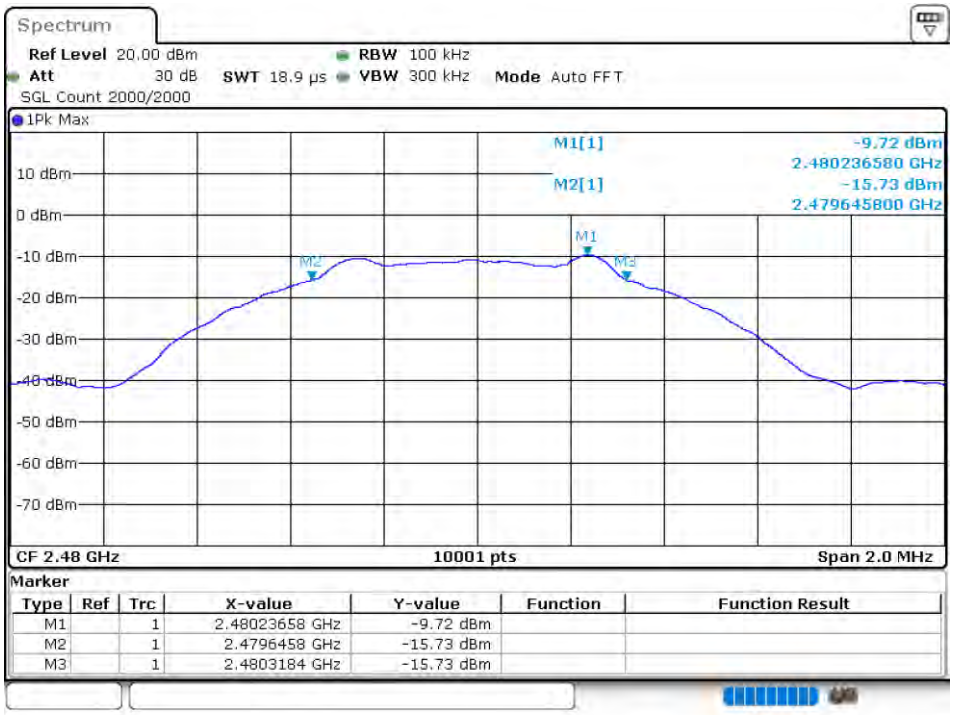

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.48023658 GHz	-9.72 dBm		
M2		1	2.4796458 GHz	-15.73 dBm		
M3		1	2.4803184 GHz	-15.73 dBm		

8.1.3 MAXIMUM POWER SPECTRAL DENSITY LEVEL

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE	2402	Ant 1	-18.706	8	Pass
NVNT	BLE	2440	Ant 1	-18.668	8	Pass
NVNT	BLE	2480	Ant 1	-18.78	8	Pass

PSD NVNT BLE 2402MHz Ant1

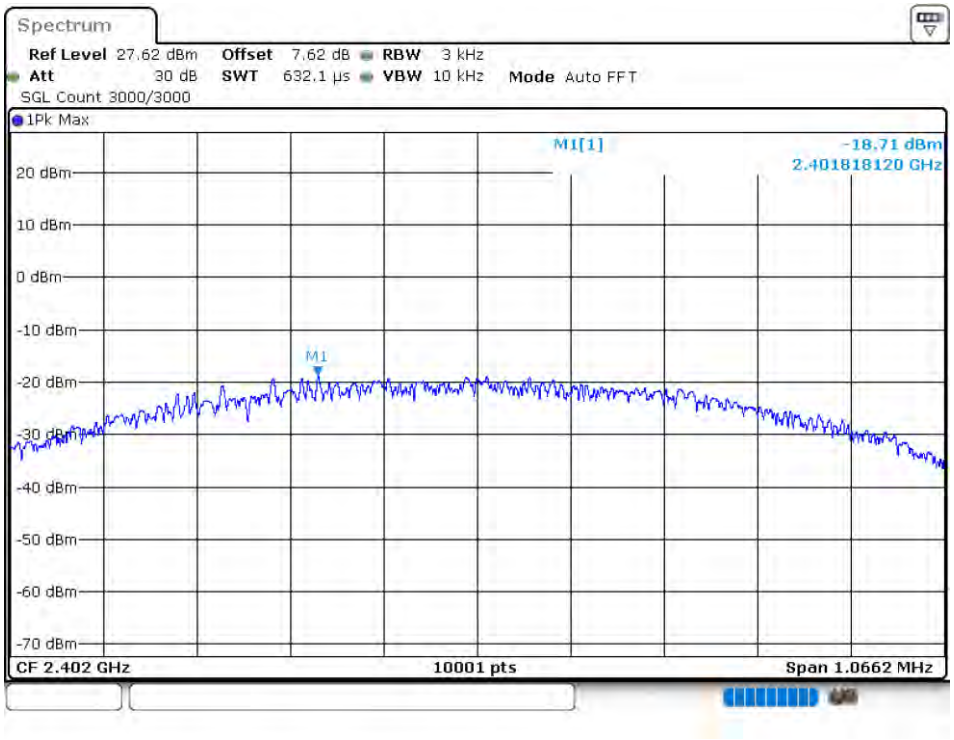

PSD NVNT BLE 2440MHz Ant1

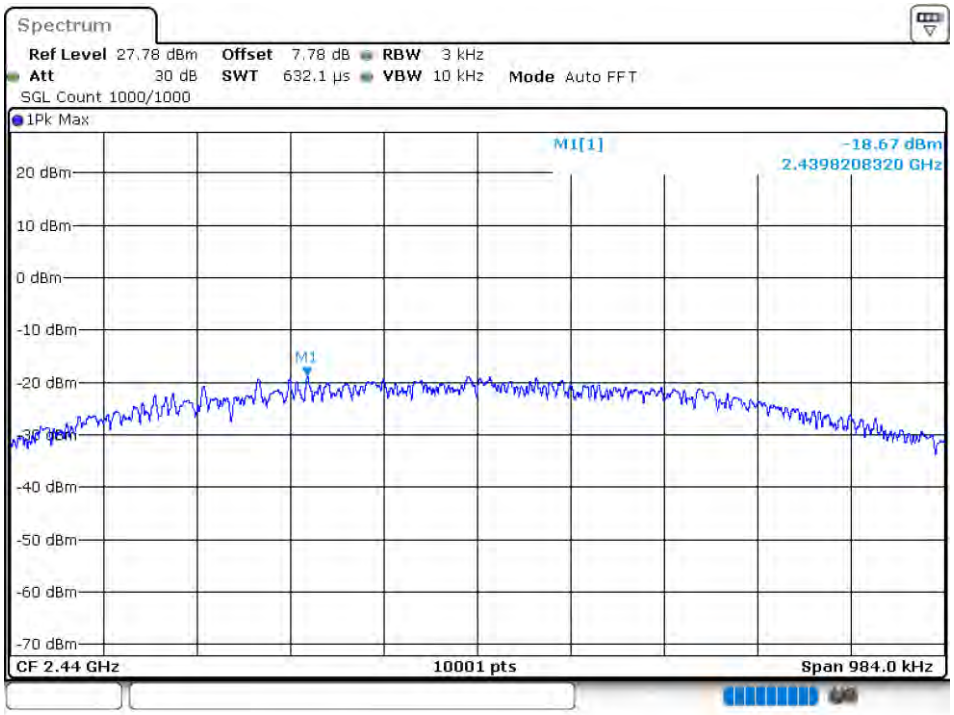

PSD NVNT BLE 2480MHz Ant1

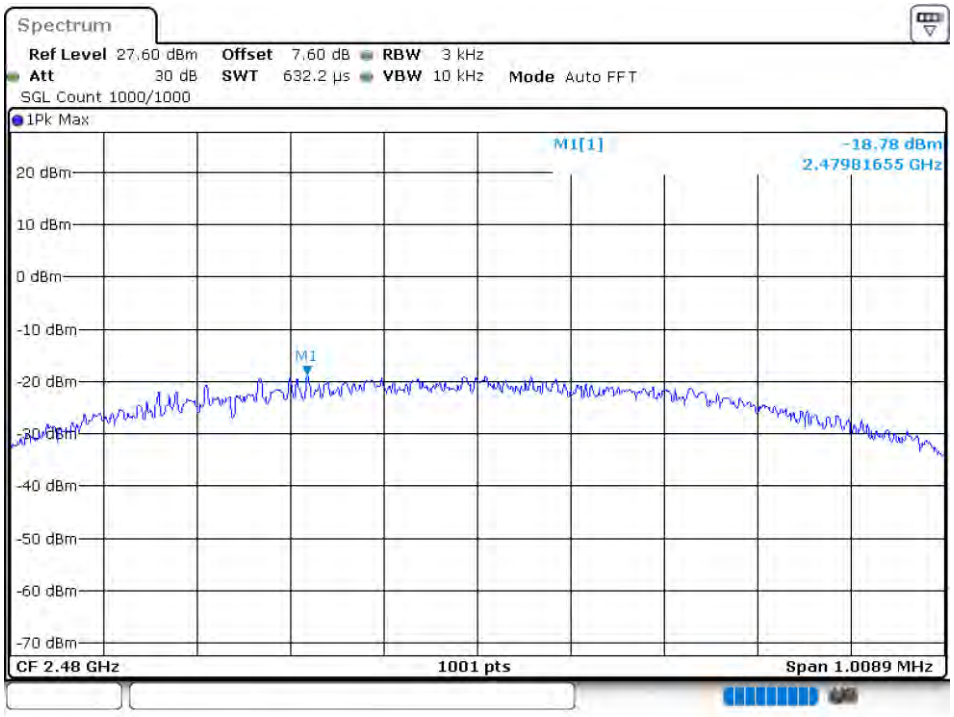

8.1.4 BAND EDGE

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant 1	-48.92	-20	Pass
NVNT	BLE	2480	Ant 1	-48.88	-20	Pass

Band Edge NVNT BLE 2402MHz Ant1 Ref

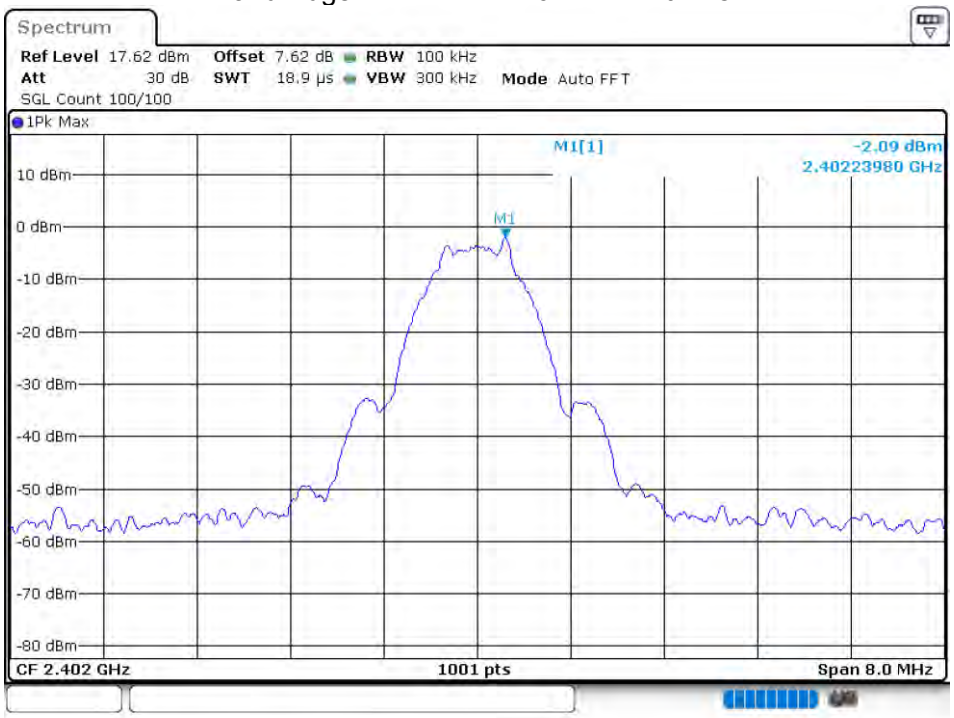

Band Edge NVNT BLE 2402MHz Ant1 Emission

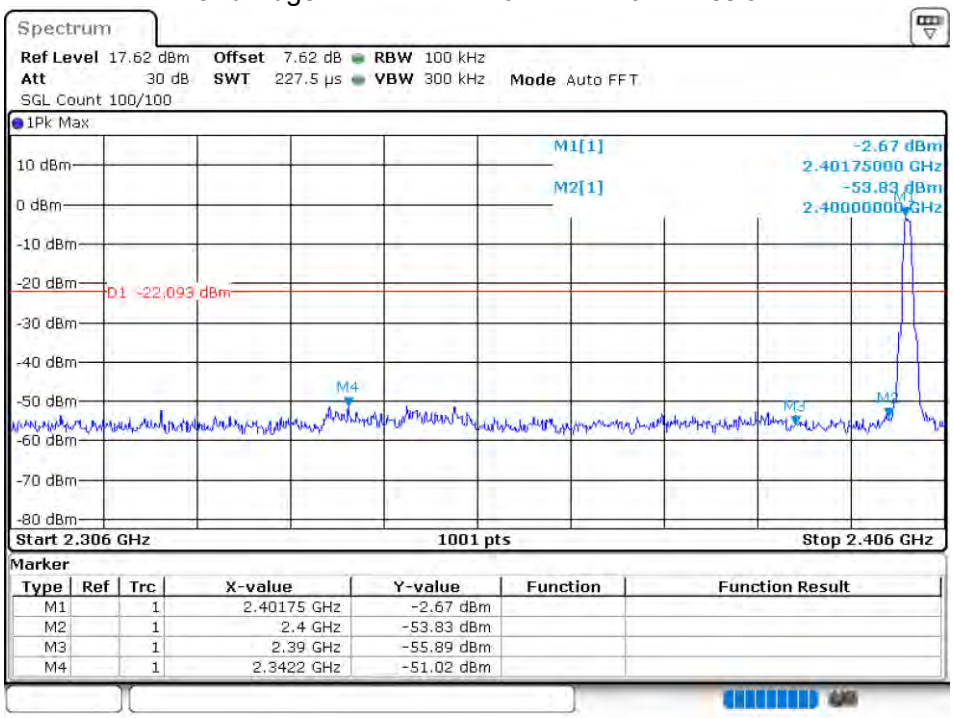

Band Edge NVNT BLE 2480MHz Ant1 Ref

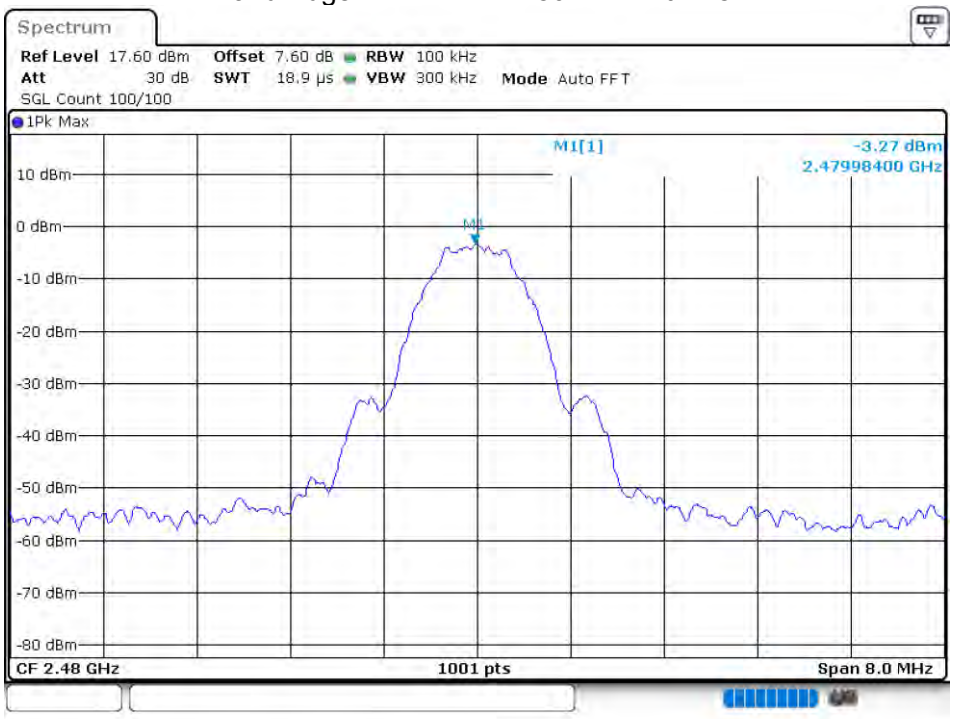

Band Edge NVNT BLE 2480MHz Ant1 Emission

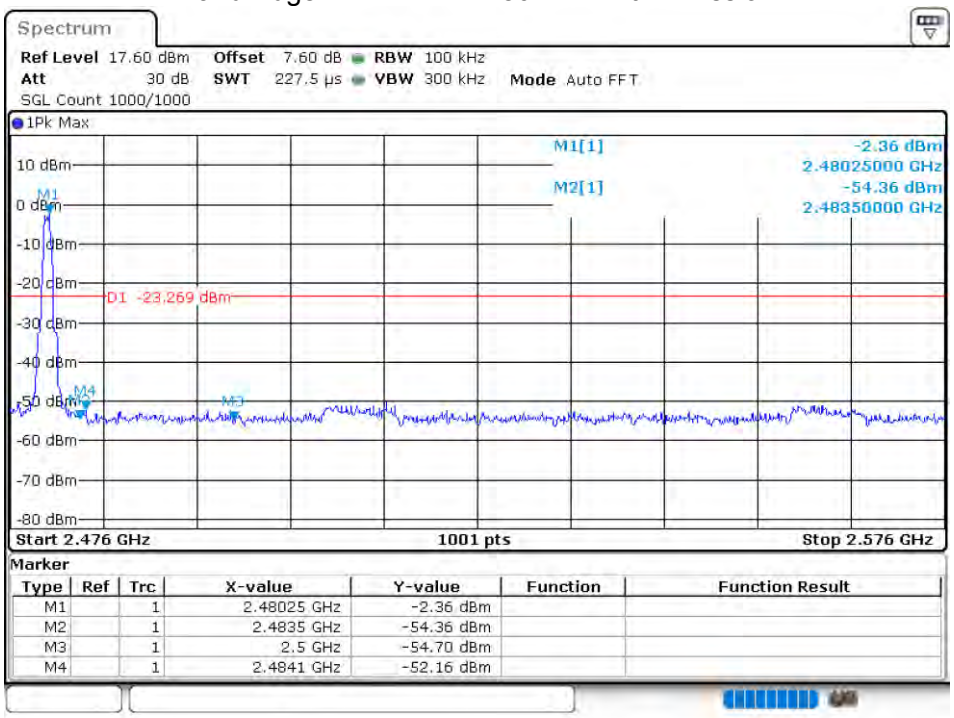

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.48025 GHz	-2.36 dBm		
M2		1	2.4835 GHz	-54.36 dBm		
M3		1	2.5 GHz	-54.70 dBm		
M4		1	2.4841 GHz	-52.16 dBm		

8.1.5 CONDUCTED RF SPURIOUS EMISSION

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant 1	-32.9	-20	Pass
NVNT	BLE	2440	Ant 1	-41.19	-20	Pass
NVNT	BLE	2480	Ant 1	-39.65	-20	Pass

Tx. Spurious NVNT BLE 2402MHz Ant1 Ref

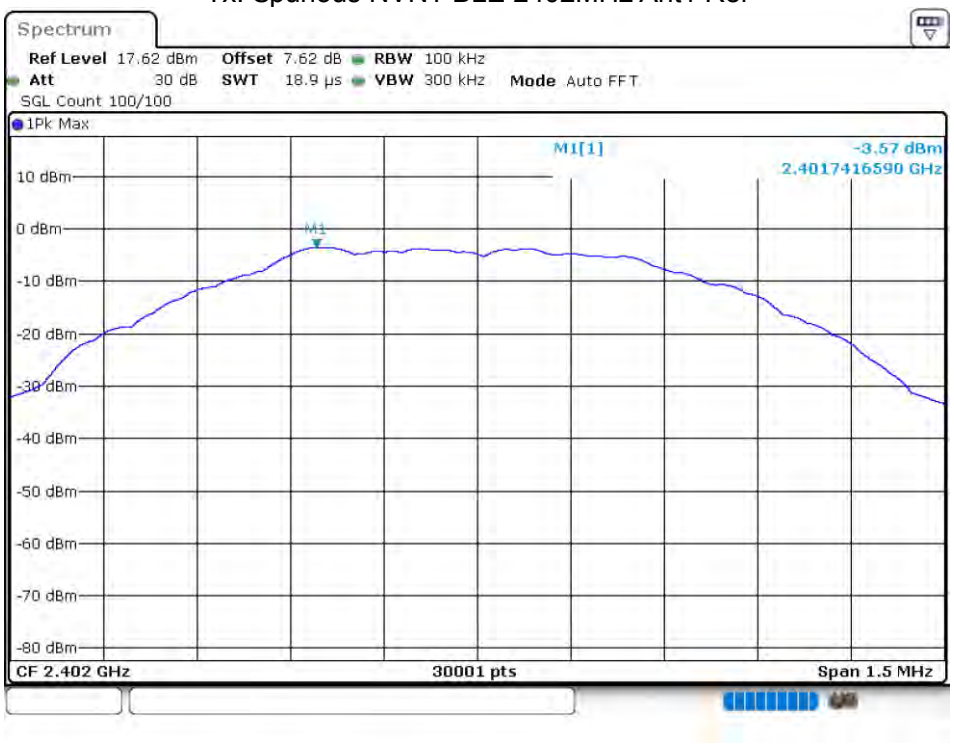

Tx. Spurious NVNT BLE 2402MHz Ant1 Emission

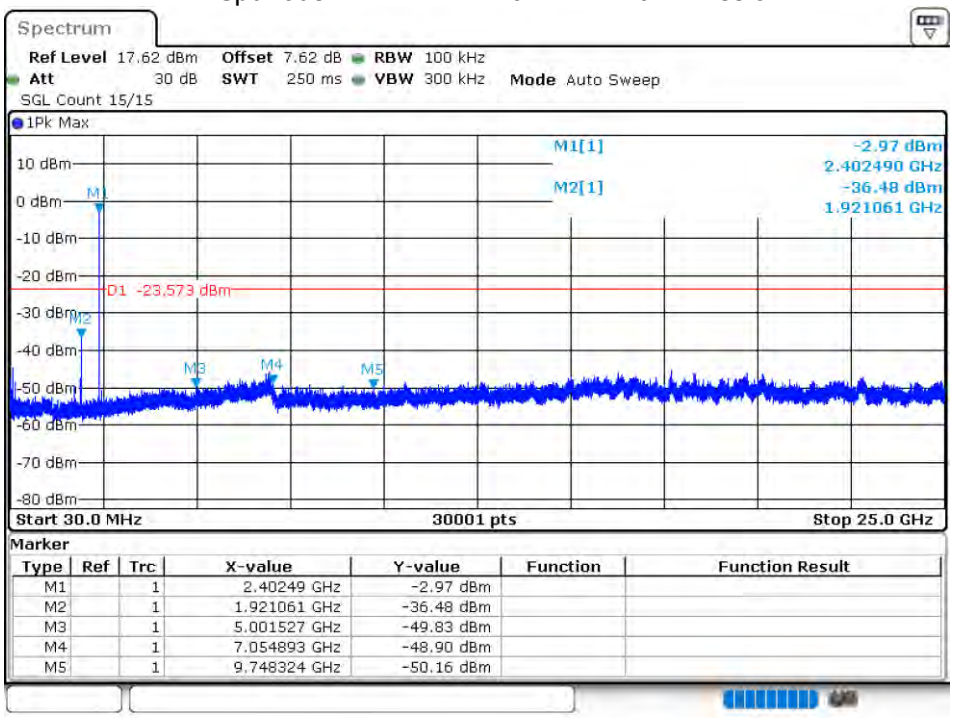

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.40249 GHz	-2.97 dBm		
M2		1	1.921061 GHz	-36.48 dBm		
M3		1	5.001527 GHz	-49.83 dBm		
M4		1	7.054893 GHz	-48.90 dBm		
M5		1	9.748324 GHz	-50.16 dBm		

Tx. Spurious NVNT BLE 2440MHz Ant1 Ref

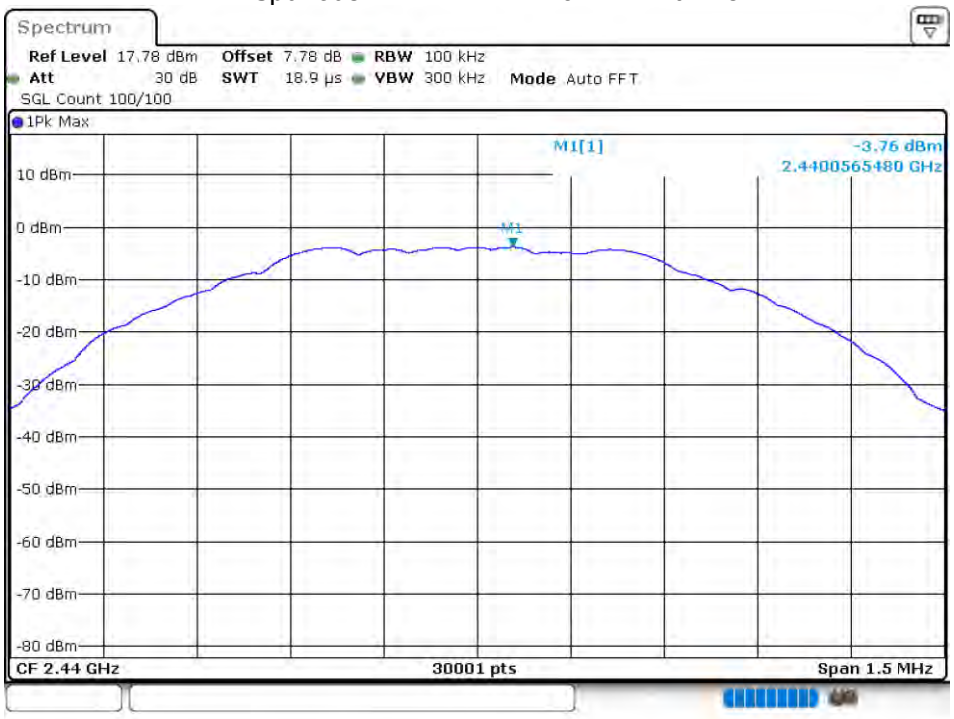

Tx. Spurious NVNT BLE 2440MHz Ant1 Emission

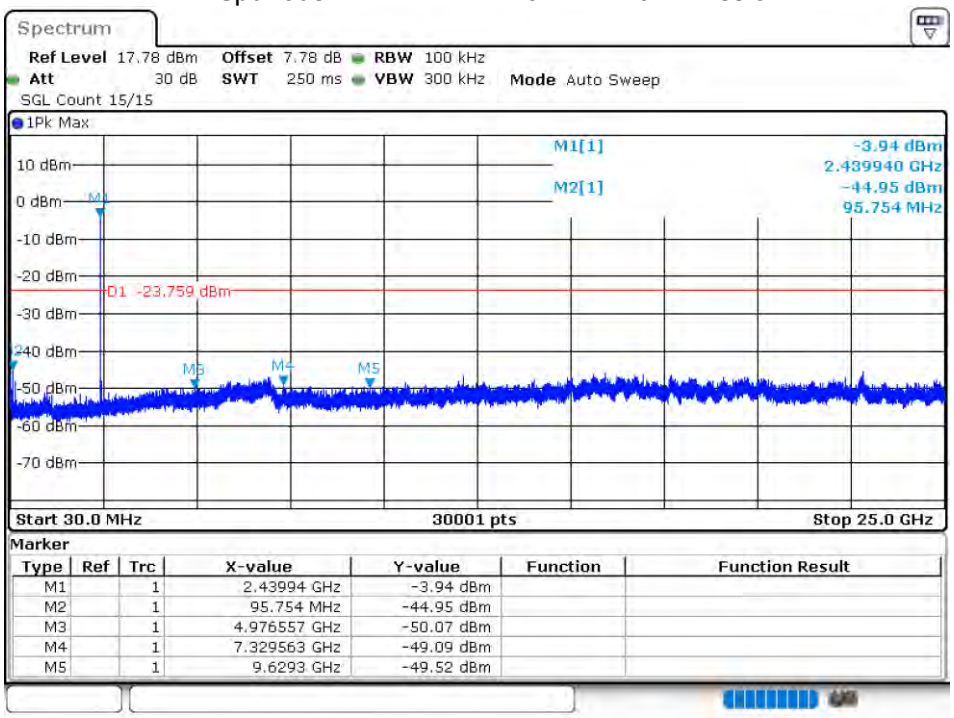

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.43994 GHz	-3.94 dBm		
M2		1	95.754 MHz	-44.95 dBm		
M3		1	4.976557 GHz	-50.07 dBm		
M4		1	7.329563 GHz	-49.09 dBm		
M5		1	9.6293 GHz	-49.52 dBm		

Tx. Spurious NVNT BLE 2480MHz Ant1 Ref

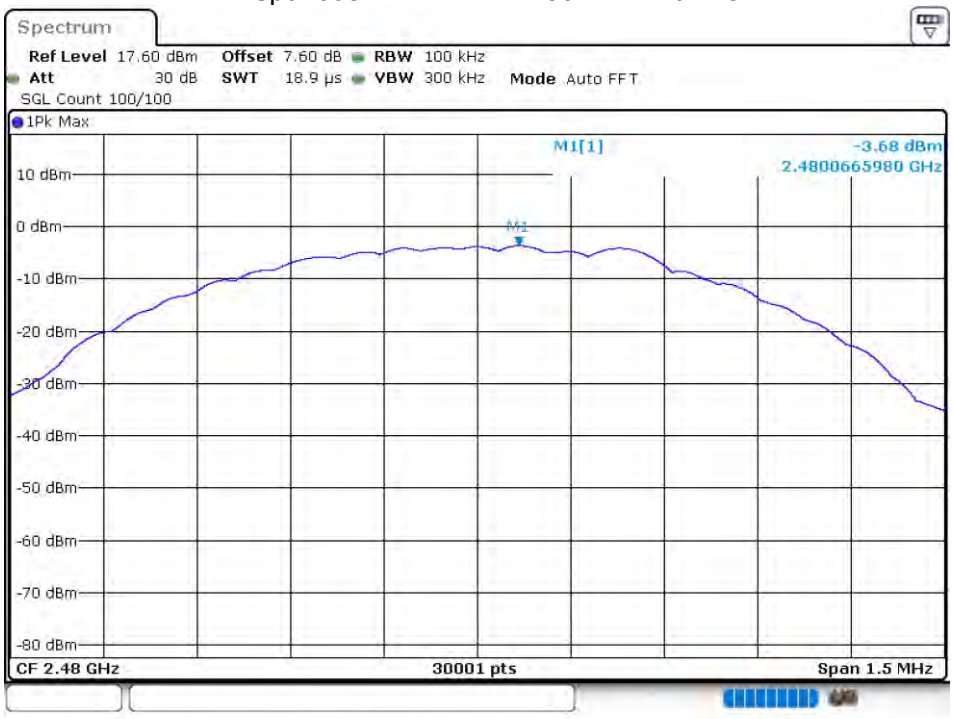

Tx. Spurious NVNT BLE 2480MHz Ant1 Emission

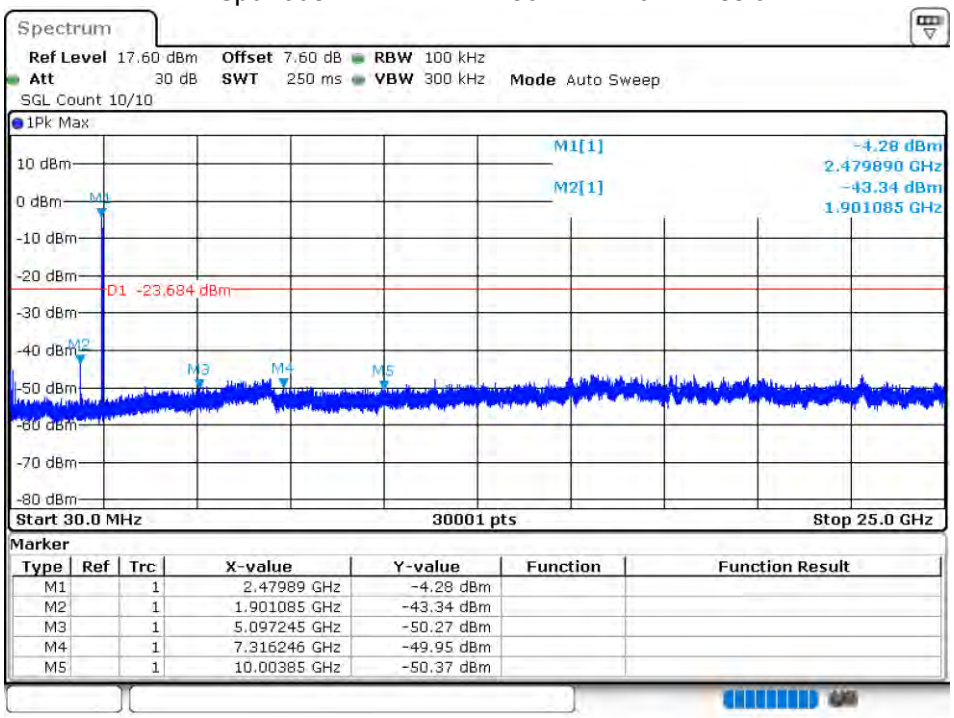

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.47989 GHz	-4.28 dBm		
M2		1	1.901085 GHz	-43.34 dBm		
M3		1	5.097245 GHz	-50.27 dBm		
M4		1	7.316246 GHz	-49.95 dBm		
M5		1	10.00385 GHz	-50.37 dBm		

LEFT(2M):

8.1.6 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant 1	-1.32	30	Pass
NVNT	BLE	2440	Ant 1	-1.403	30	Pass
NVNT	BLE	2480	Ant 1	-1.602	30	Pass

Power NVNT BLE 2402MHz Ant1

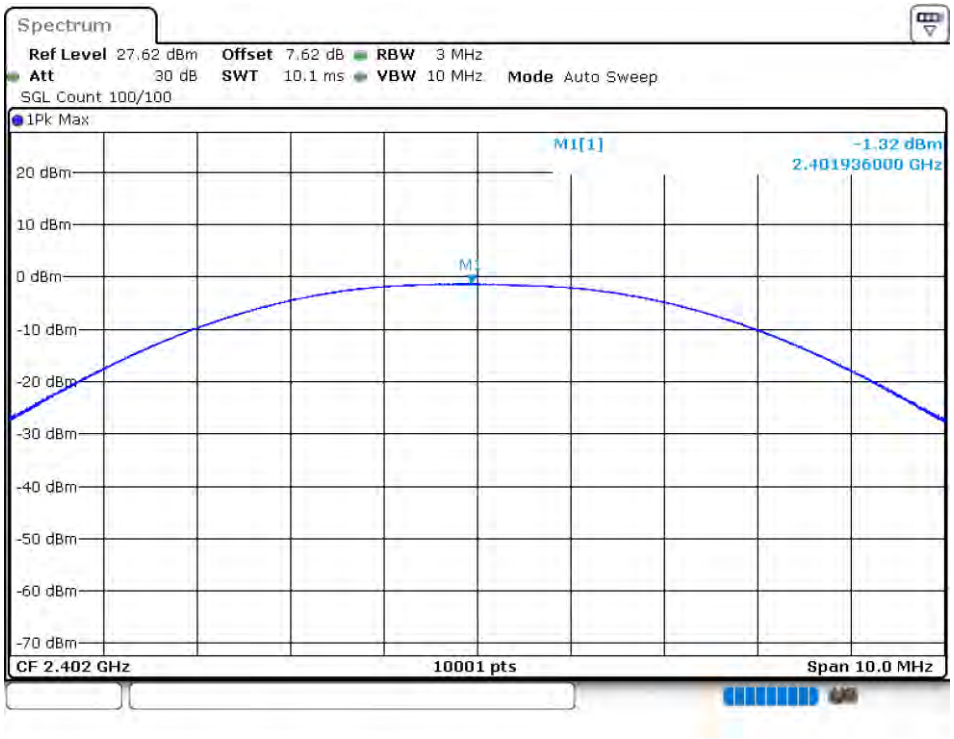

Power NVNT BLE 2440MHz Ant1

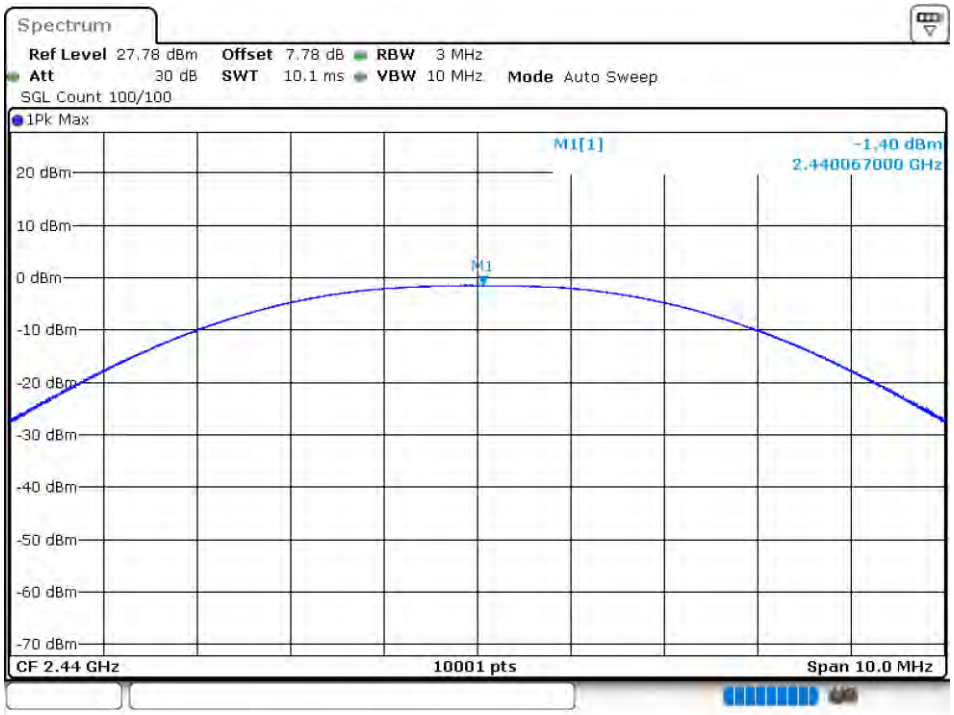

Power NVNT BLE 2480MHz Ant1

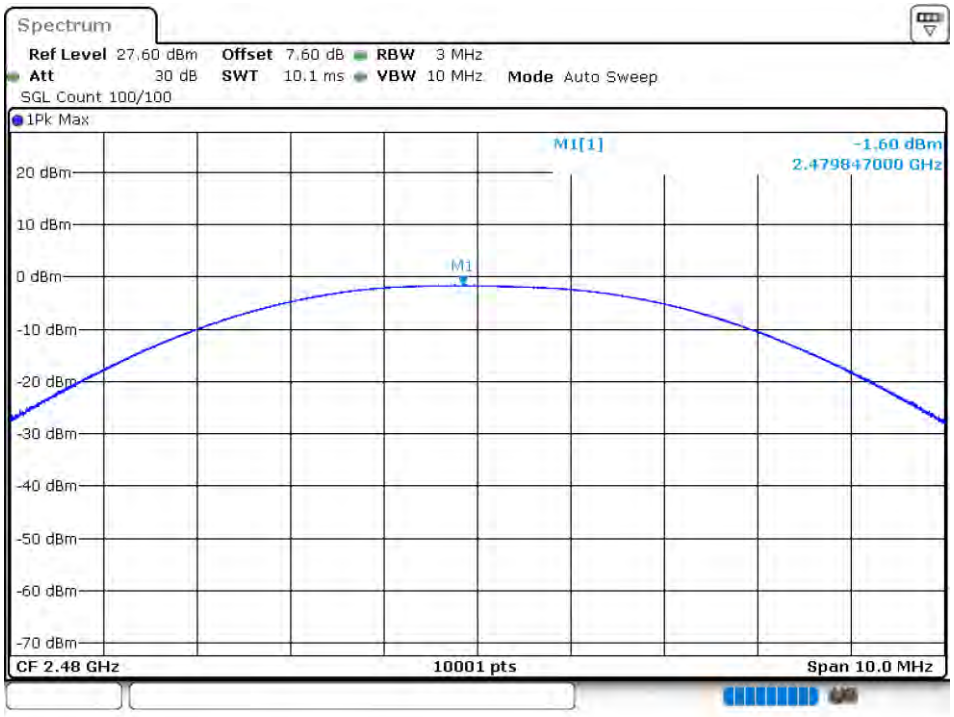

8.1.7 OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant 1	2.033	1.356	0.5	Pass
NVNT	BLE	2440	Ant 1	2.0366	1.2016	0.5	Pass
NVNT	BLE	2480	Ant 1	2.0386	1.2416	0.5	Pass

OBW NVNT BLE 2402MHz Ant1

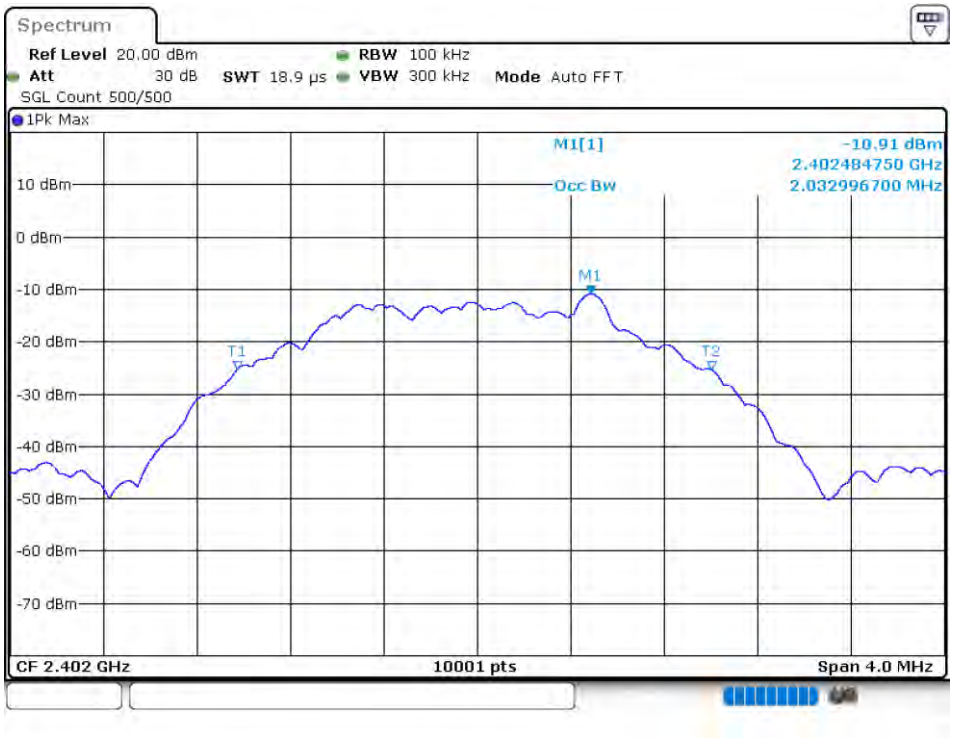

-6 dB BW NVNT BLE 2402MHz Ant1

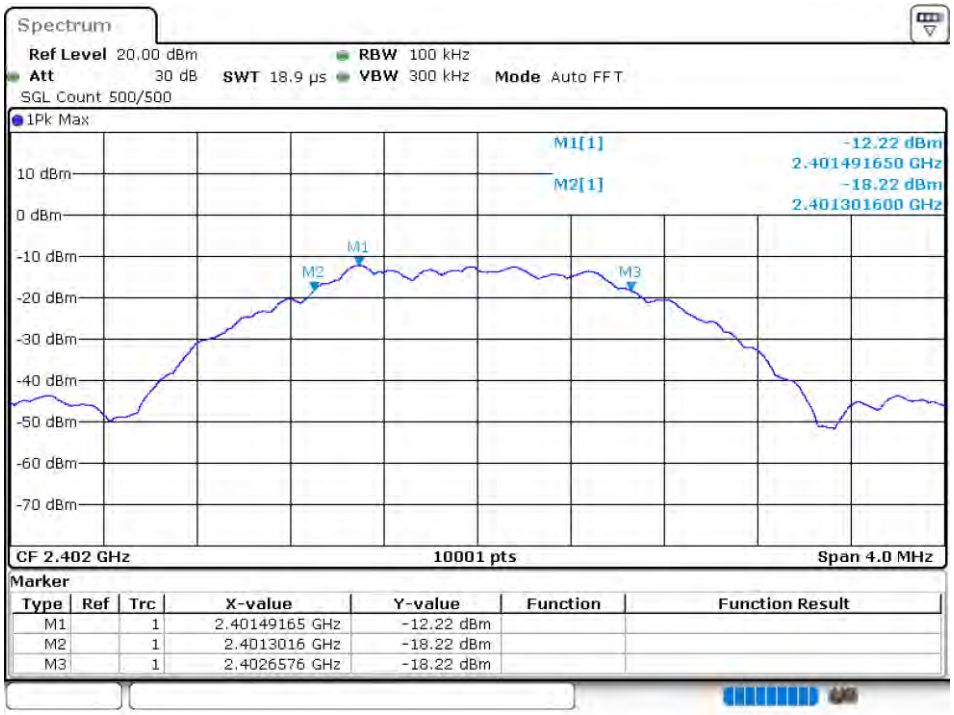

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.40149165 GHz	-12.22 dBm		
M2		1	2.4013016 GHz	-18.22 dBm		
M3		1	2.4026576 GHz	-18.22 dBm		

OBW NVNT BLE 2440MHz Ant1

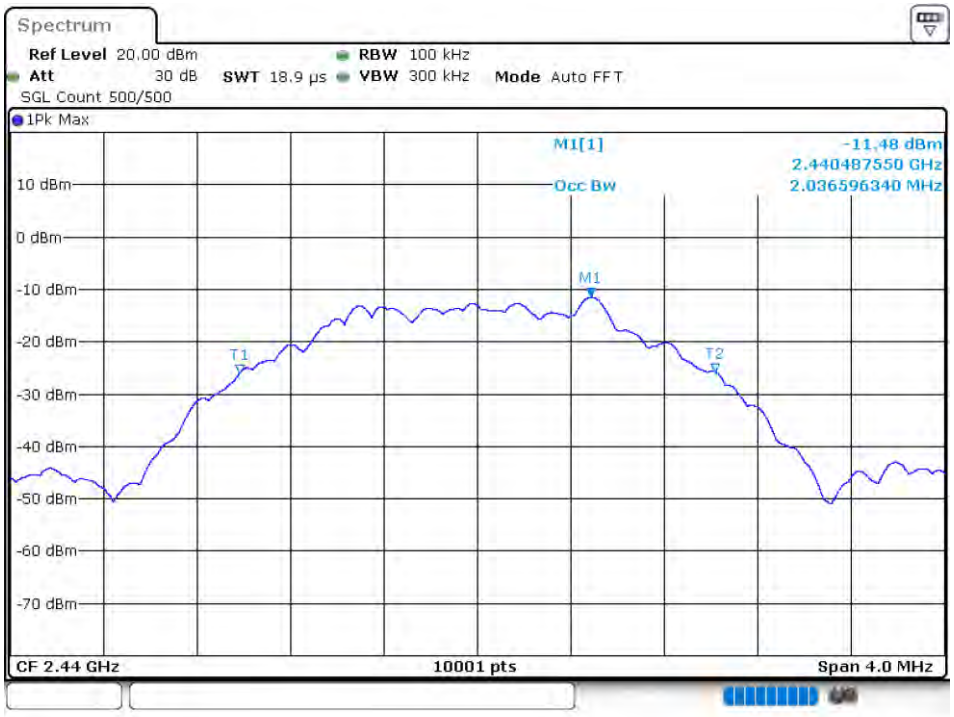

-6 dB BW NVNT BLE 2440MHz Ant1

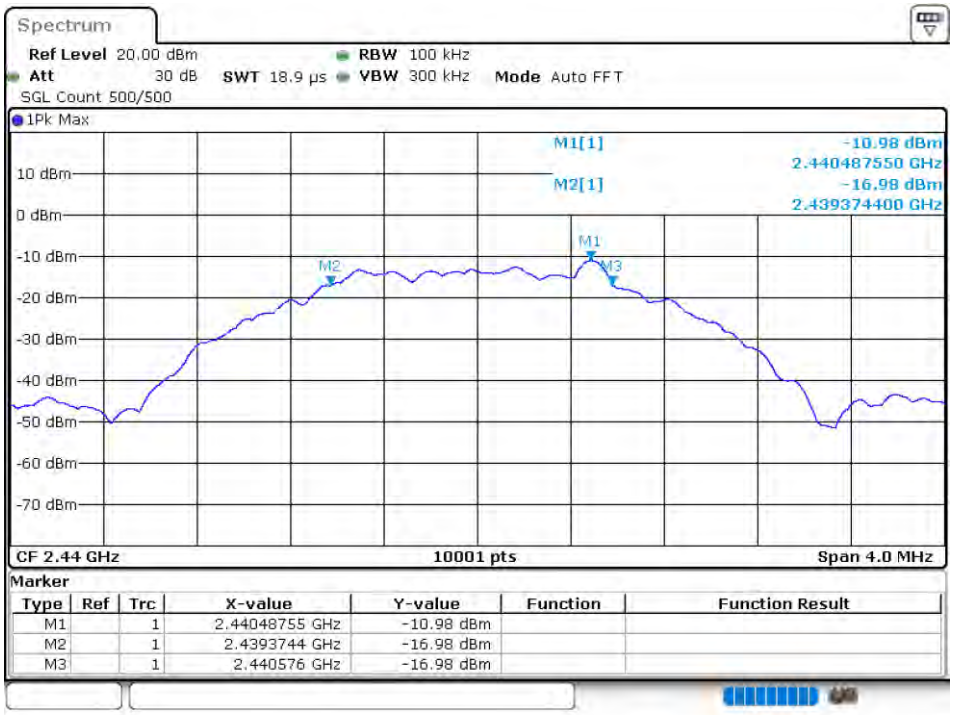

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.44048755 GHz	-10.98 dBm		
M2		1	2.4393744 GHz	-16.98 dBm		
M3		1	2.440576 GHz	-16.98 dBm		

OBW NVNT BLE 2480MHz Ant1

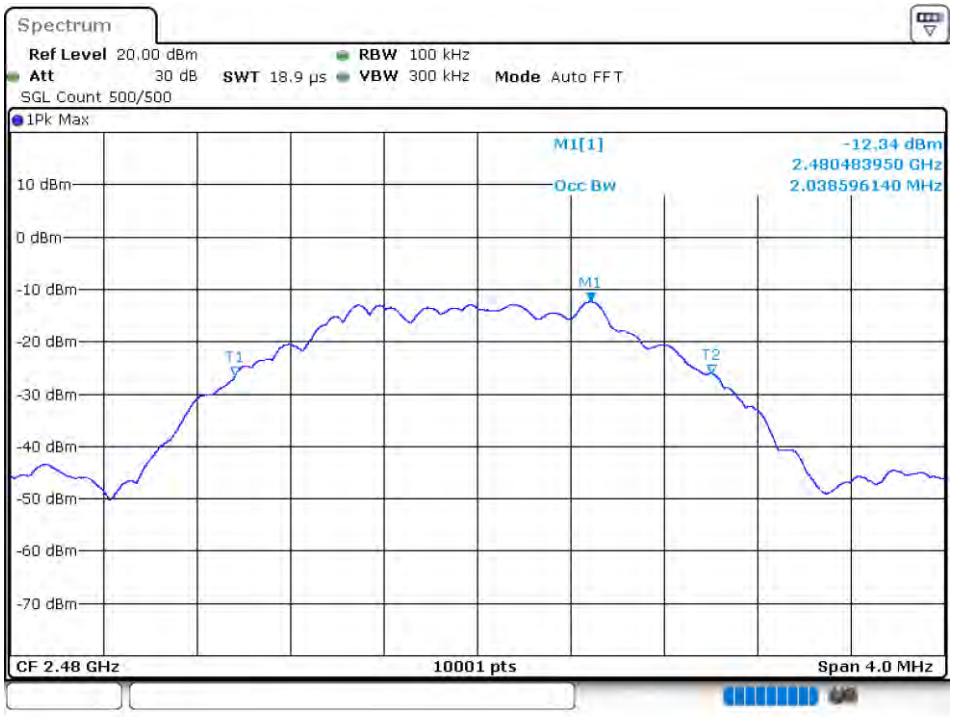

-6 dB BW NVNT BLE 2480MHz Ant1

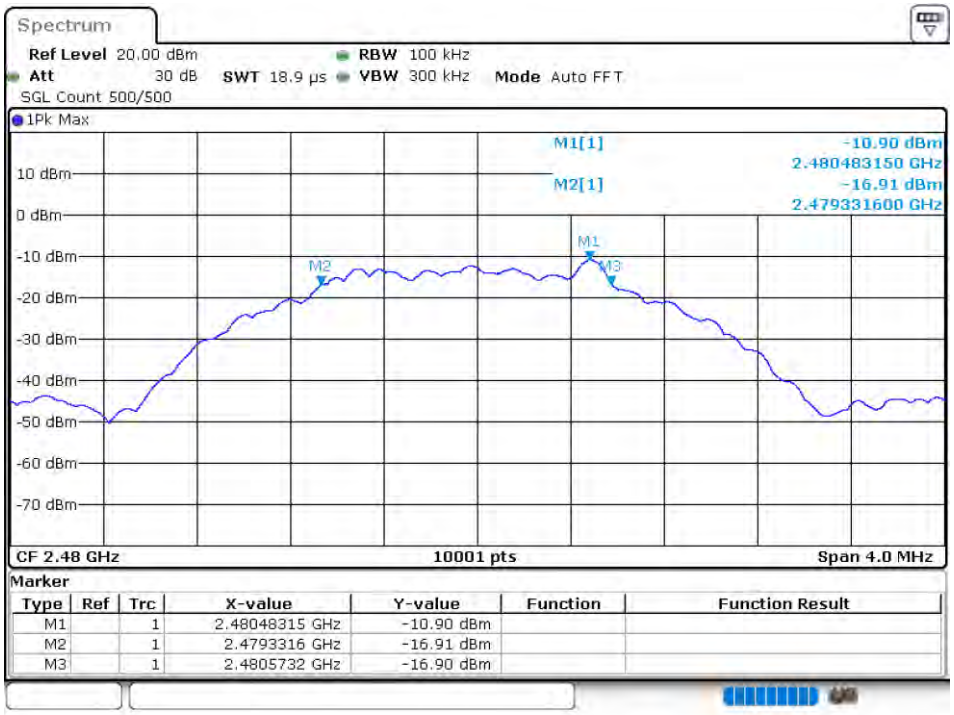

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.48048315 GHz	-10.90 dBm		
M2		1	2.4793316 GHz	-16.91 dBm		
M3		1	2.4805732 GHz	-16.90 dBm		

8.1.8 MAXIMUM POWER SPECTRAL DENSITY LEVEL

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE	2402	Ant 1	-22.227	8	Pass
NVNT	BLE	2440	Ant 1	-22.475	8	Pass
NVNT	BLE	2480	Ant 1	-22.377	8	Pass

PSD NVNT BLE 2402MHz Ant1

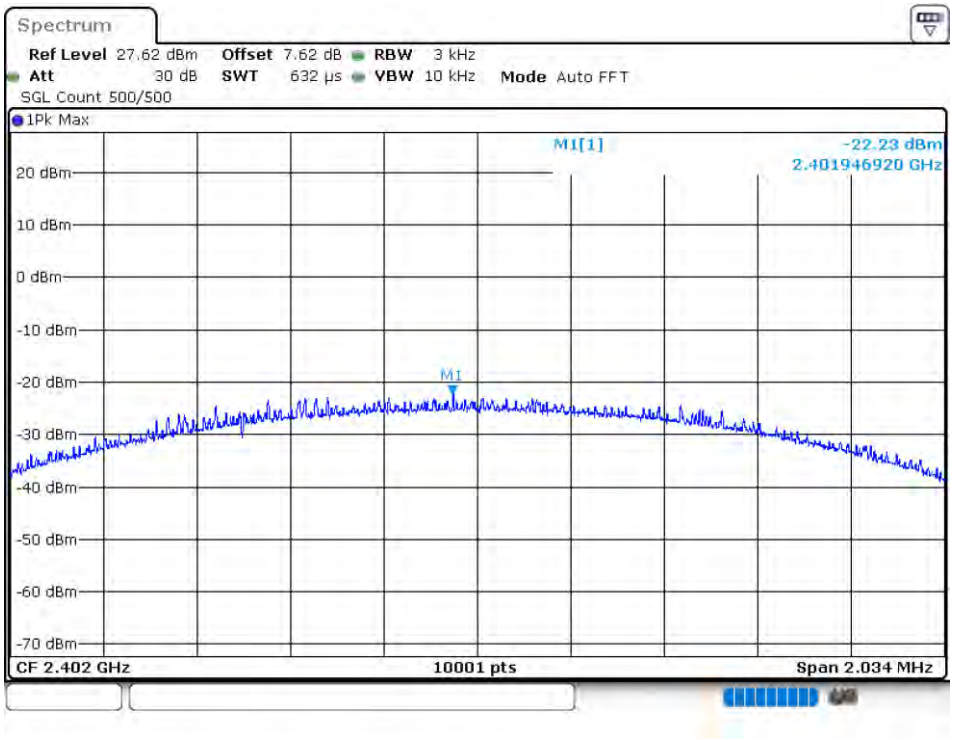

PSD NVNT BLE 2440MHz Ant1

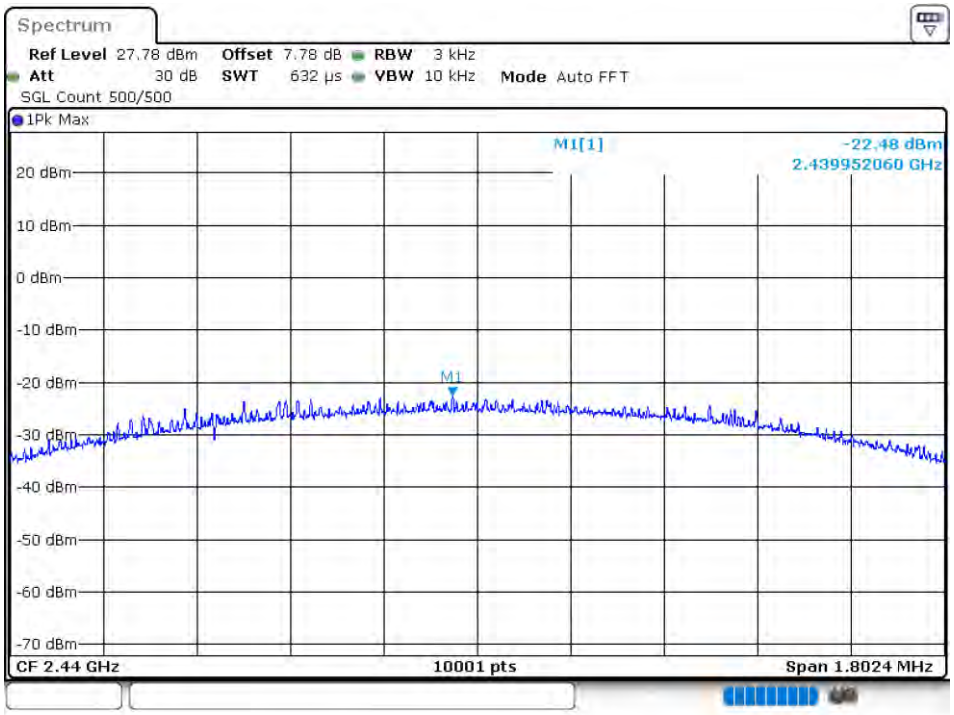

PSD NVNT BLE 2480MHz Ant1

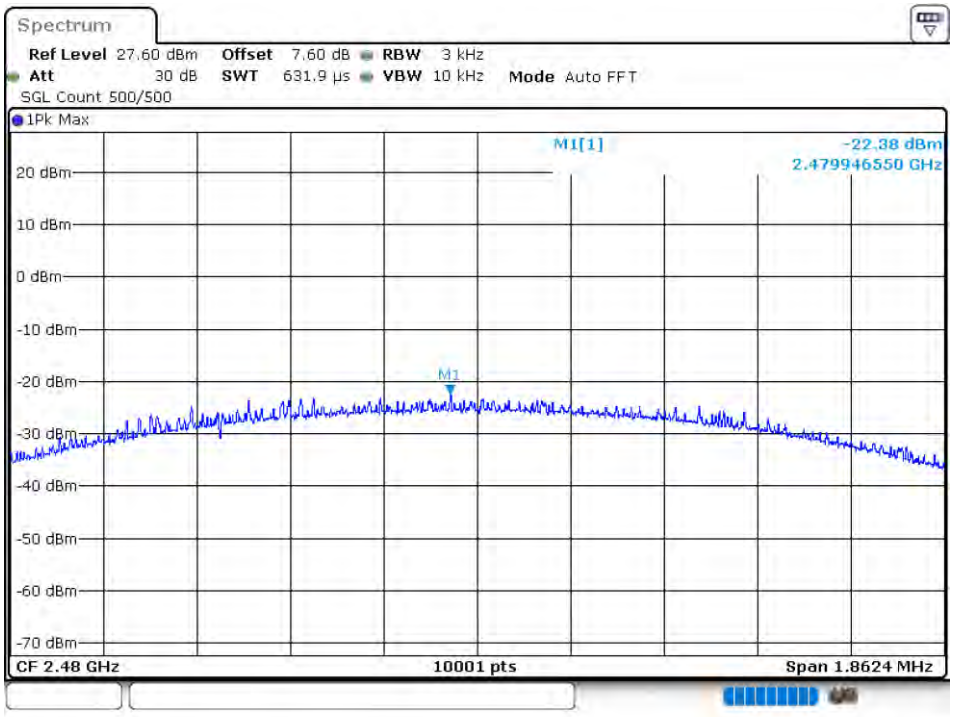

8.1.9 BAND EDGE

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant 1	-46.62	-20	Pass
NVNT	BLE	2480	Ant 1	-49.21	-20	Pass

Band Edge NVNT BLE 2402MHz Ant1 Ref

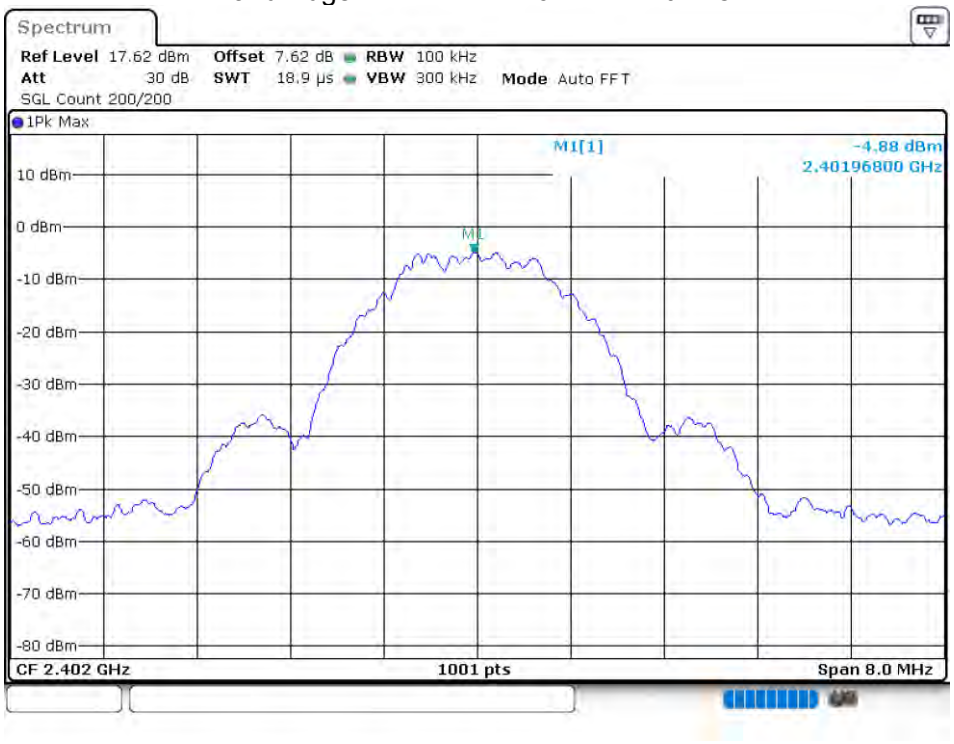

Band Edge NVNT BLE 2402MHz Ant1 Emission

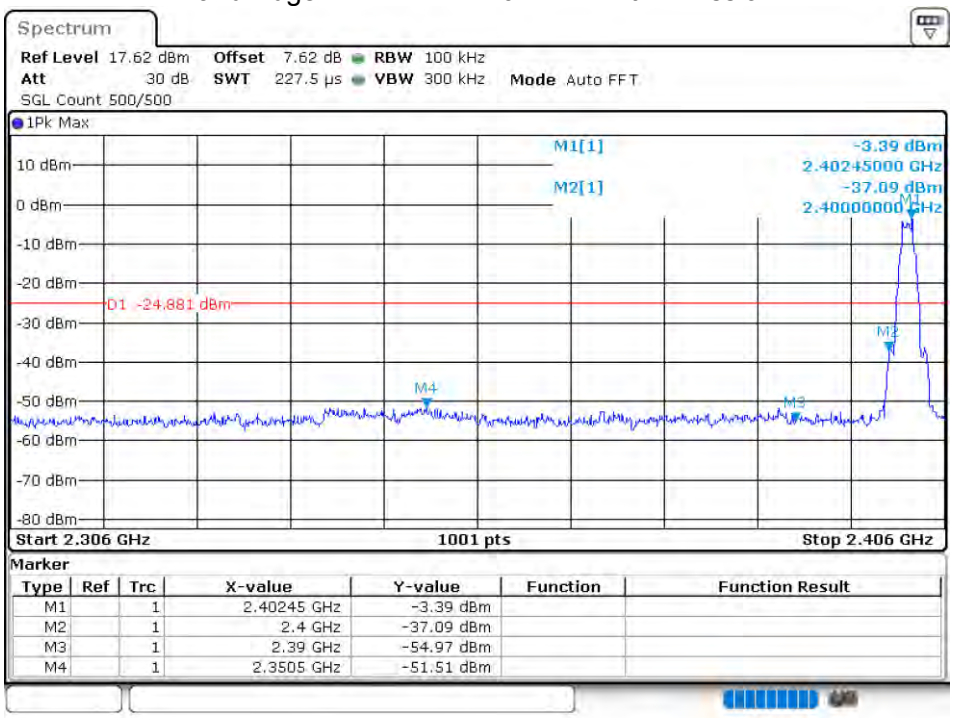

Band Edge NVNT BLE 2480MHz Ant1 Ref

Band Edge NVNT BLE 2480MHz Ant1 Emission

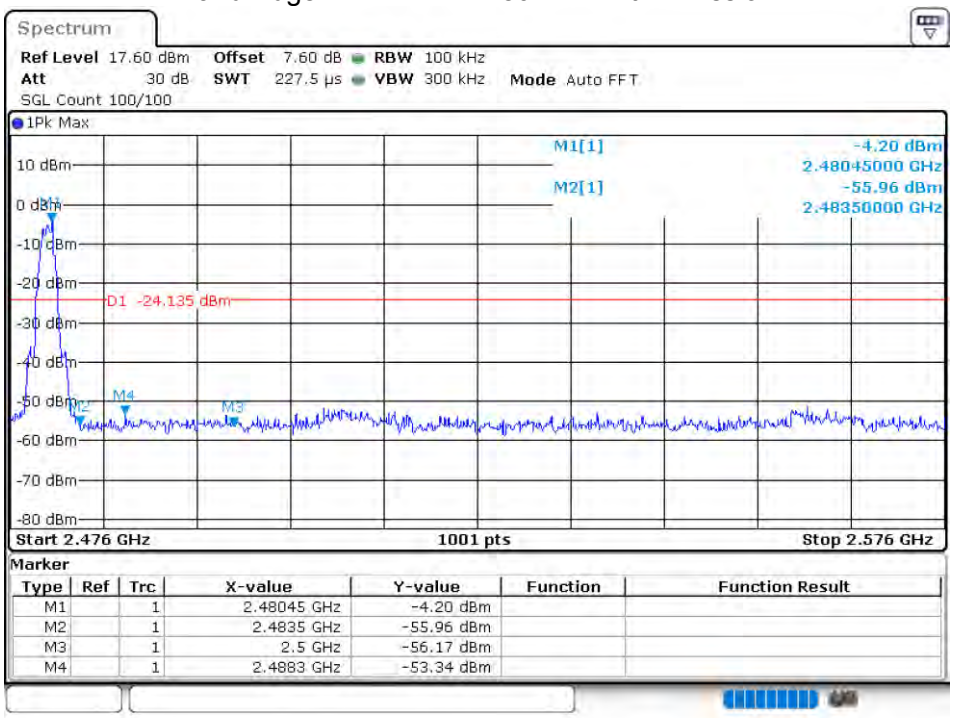

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.48045 GHz	-4.20 dBm		
M2		1	2.4835 GHz	-55.96 dBm		
M3		1	2.5 GHz	-56.17 dBm		
M4		1	2.4883 GHz	-53.34 dBm		

8.1.10 CONDUCTED RF SPURIOUS EMISSION

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant 1	-40.84	-20	Pass
NVNT	BLE	2440	Ant 1	-40.52	-20	Pass
NVNT	BLE	2480	Ant 1	-41.23	-20	Pass

Tx. Spurious NVNT BLE 2402MHz Ant1 Ref

Tx. Spurious NVNT BLE 2402MHz Ant1 Emission

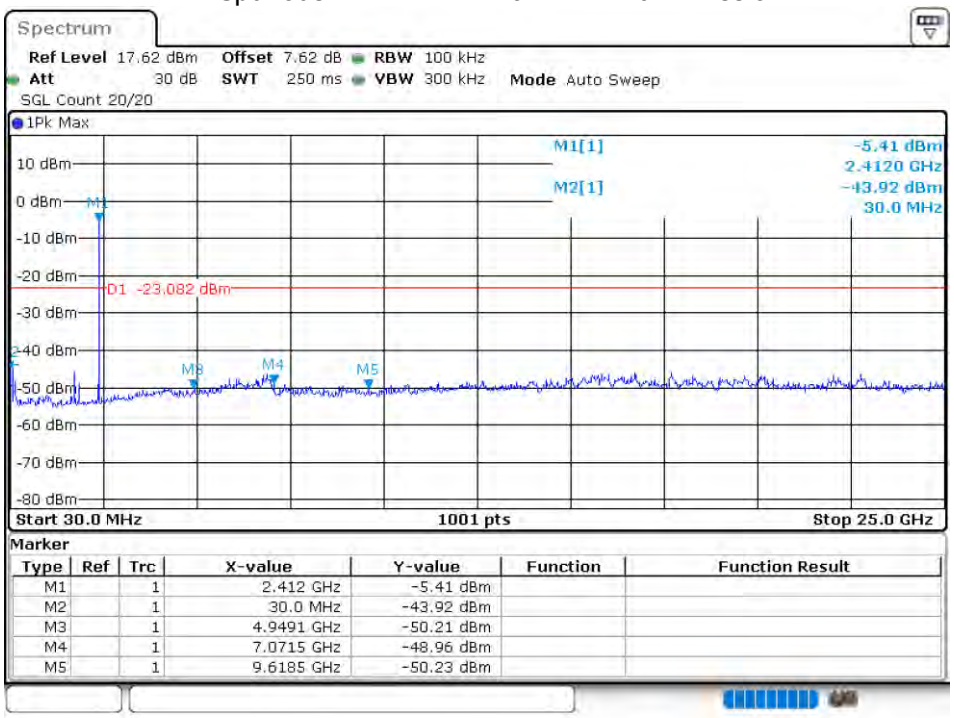

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.412 GHz	-5.41 dBm		
M2		1	30.0 MHz	-43.92 dBm		
M3		1	4.9491 GHz	-50.21 dBm		
M4		1	7.0715 GHz	-48.96 dBm		
M5		1	9.6185 GHz	-50.23 dBm		

Tx. Spurious NVNT BLE 2440MHz Ant1 Ref

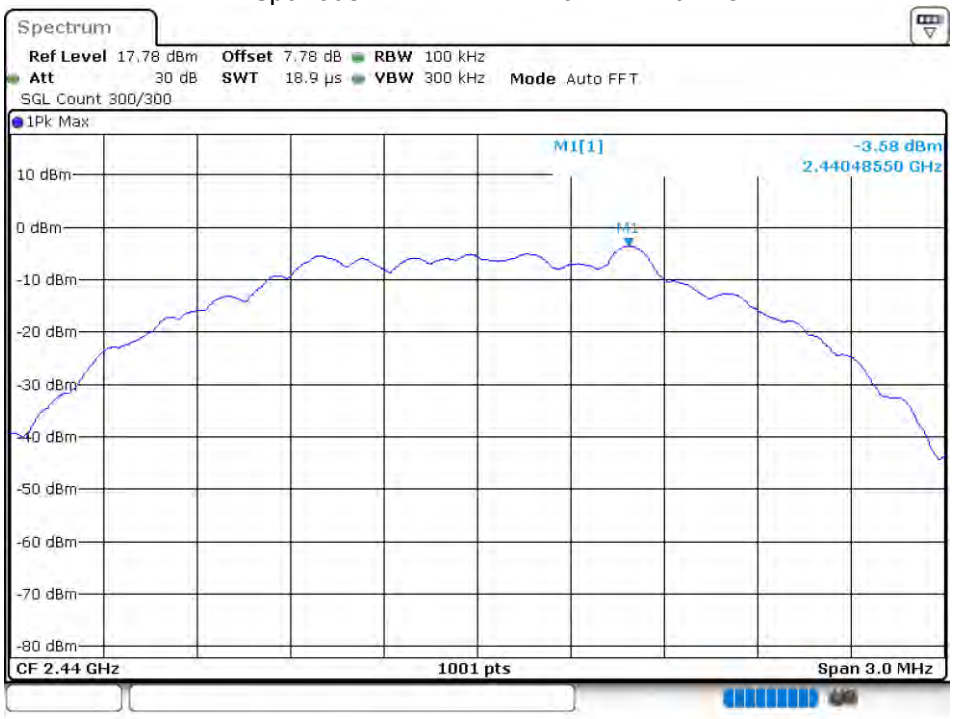

Tx. Spurious NVNT BLE 2440MHz Ant1 Emission

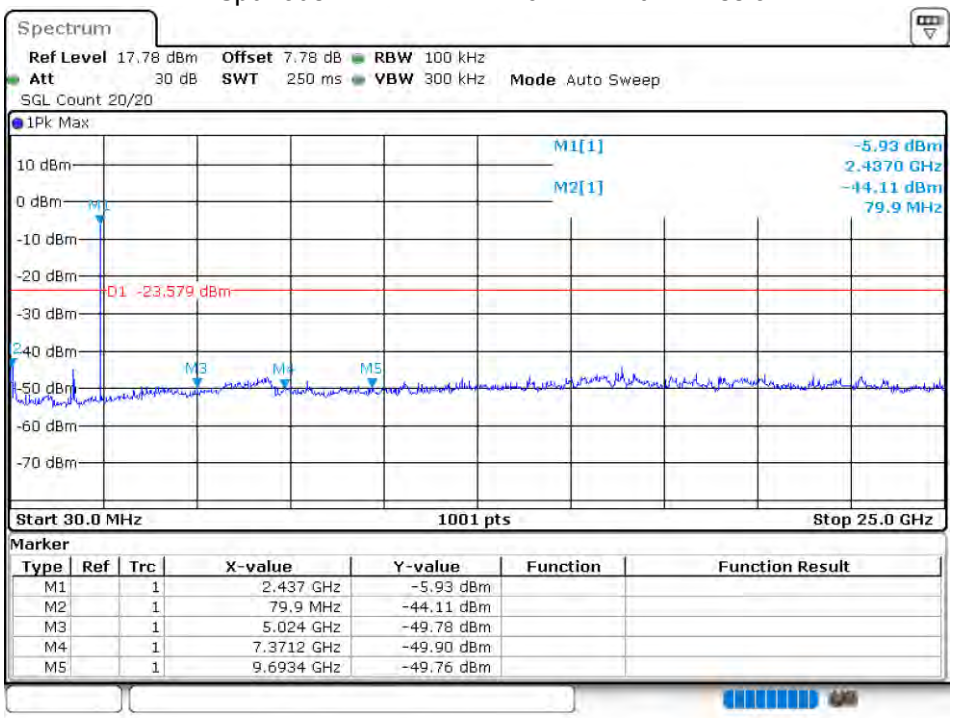

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.437 GHz	-5.93 dBm		
M2		1	79.9 MHz	-44.11 dBm		
M3		1	5.024 GHz	-49.78 dBm		
M4		1	7.3712 GHz	-49.90 dBm		
M5		1	9.6934 GHz	-49.76 dBm		

Tx. Spurious NVNT BLE 2480MHz Ant1 Ref

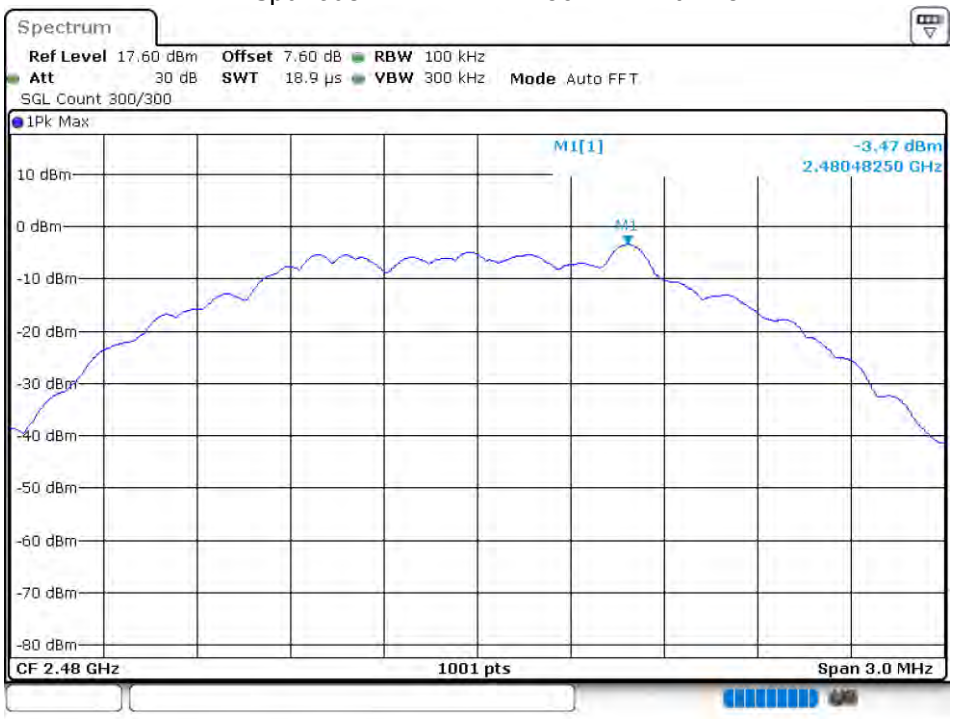

Tx. Spurious NVNT BLE 2480MHz Ant1 Emission

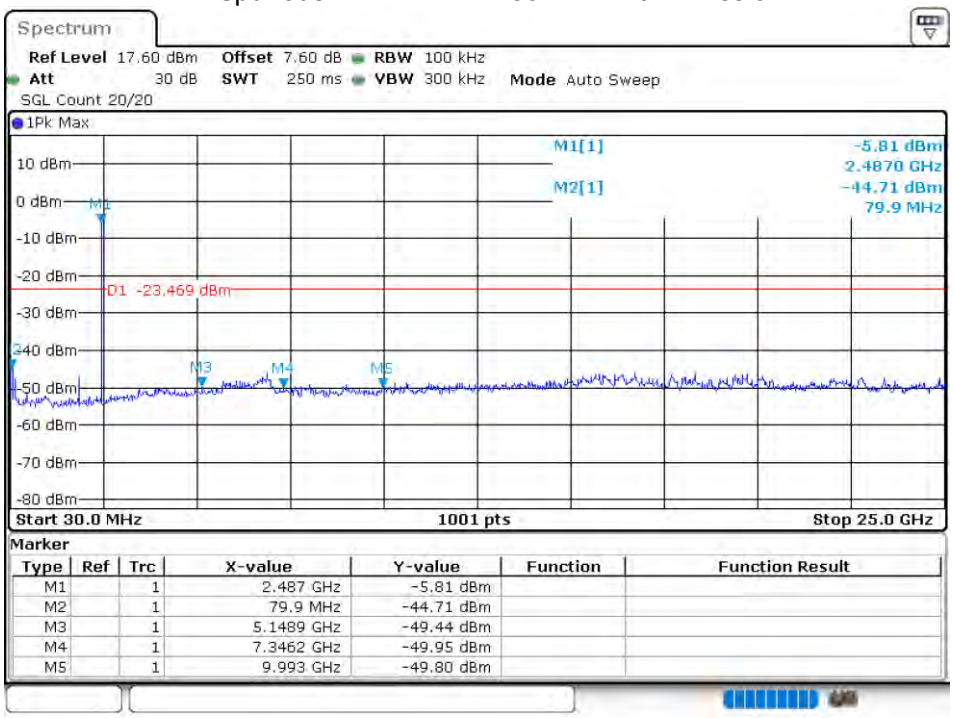

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.487 GHz	-5.81 dBm		
M2		1	79.9 MHz	-44.71 dBm		
M3		1	5.1489 GHz	-49.44 dBm		
M4		1	7.3462 GHz	-49.95 dBm		
M5		1	9.993 GHz	-49.80 dBm		

RIGHT(1M):

8.1.11 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant 1	-1.284	30	Pass
NVNT	BLE	2440	Ant 1	-1.437	30	Pass
NVNT	BLE	2480	Ant 1	-1.584	30	Pass

Power NVNT BLE 2402MHz Ant1

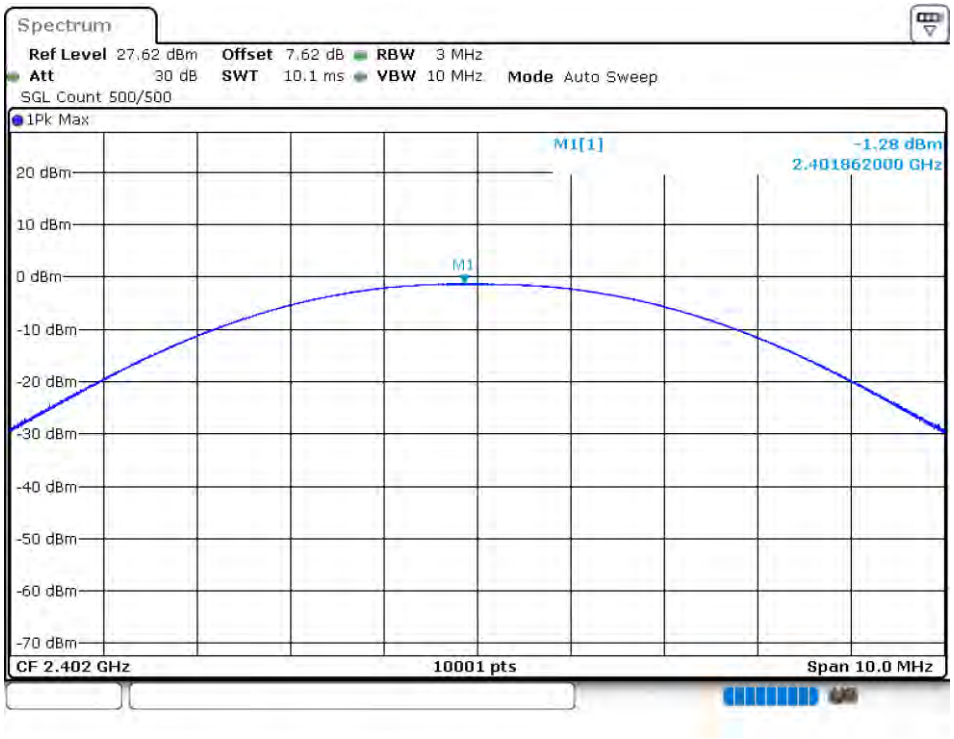

Power NVNT BLE 2440MHz Ant1

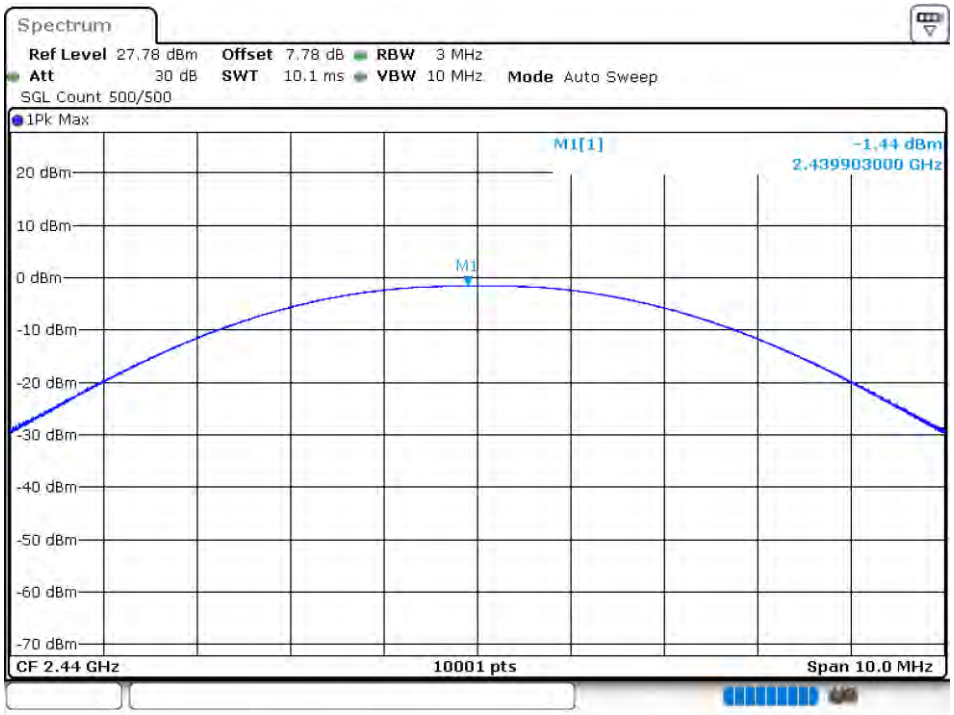

Power NVNT BLE 2480MHz Ant1

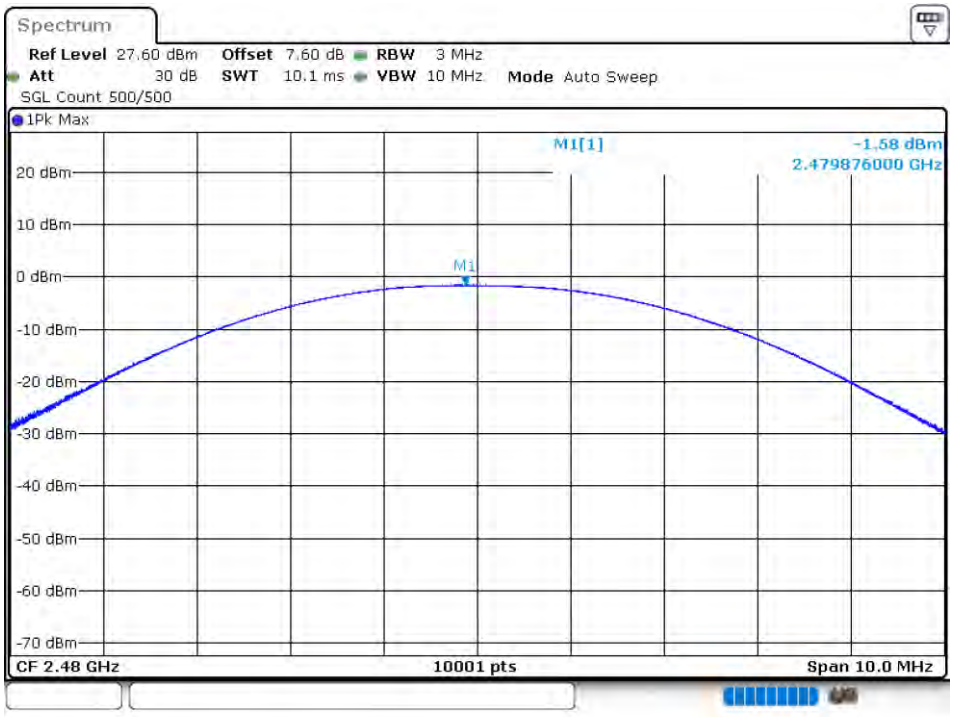

8.1.12 OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant 1	1.0421	0.717	0.5	Pass
NVNT	BLE	2440	Ant 1	1.0417	0.6624	0.5	Pass
NVNT	BLE	2480	Ant 1	1.0399	0.6726	0.5	Pass

OBW NVNT BLE 2402MHz Ant1

-6 dB BW NVNT BLE 2402MHz Ant1

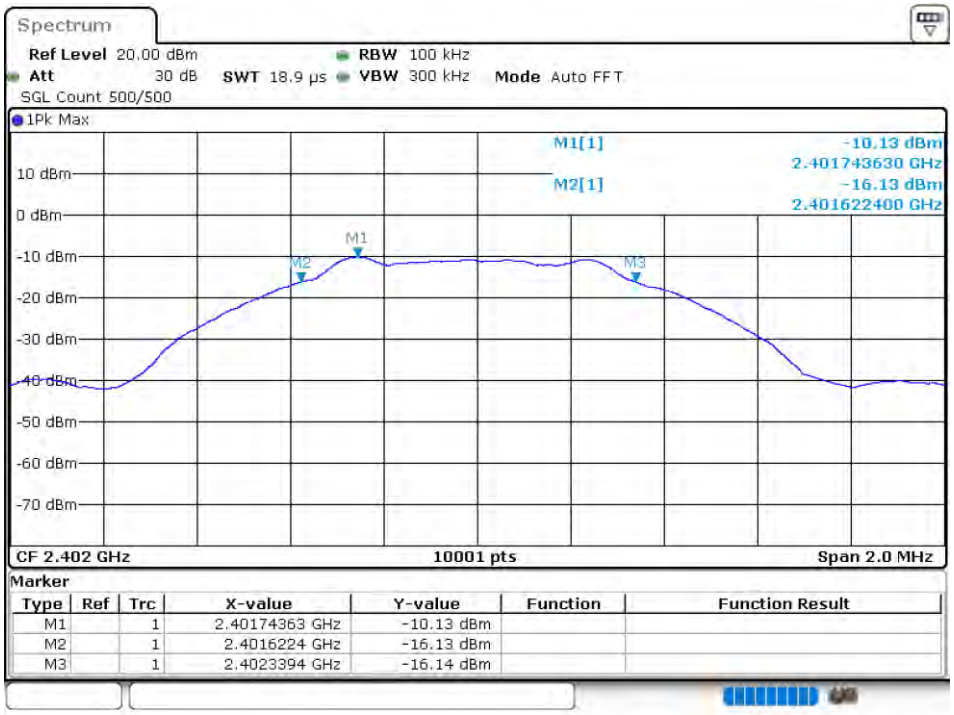

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.40174363 GHz	-10.13 dBm		
M2		1	2.4016224 GHz	-16.13 dBm		
M3		1	2.4023394 GHz	-16.14 dBm		

OBW NVNT BLE 2440MHz Ant1

-6 dB BW NVNT BLE 2440MHz Ant1

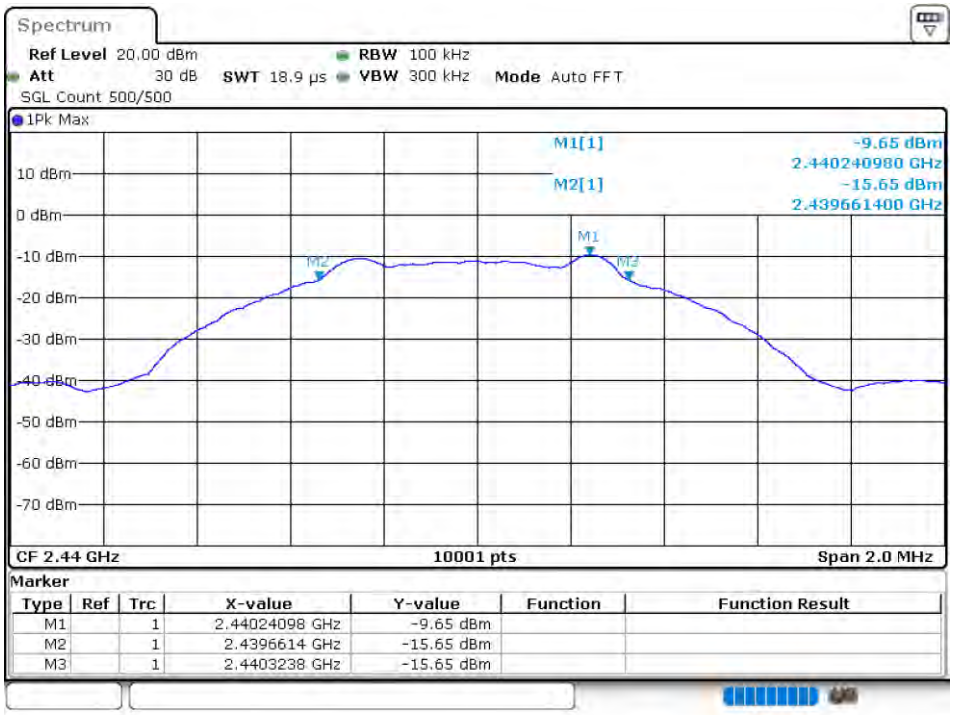

OBW NVNT BLE 2480MHz Ant1

-6 dB BW NVNT BLE 2480MHz Ant1

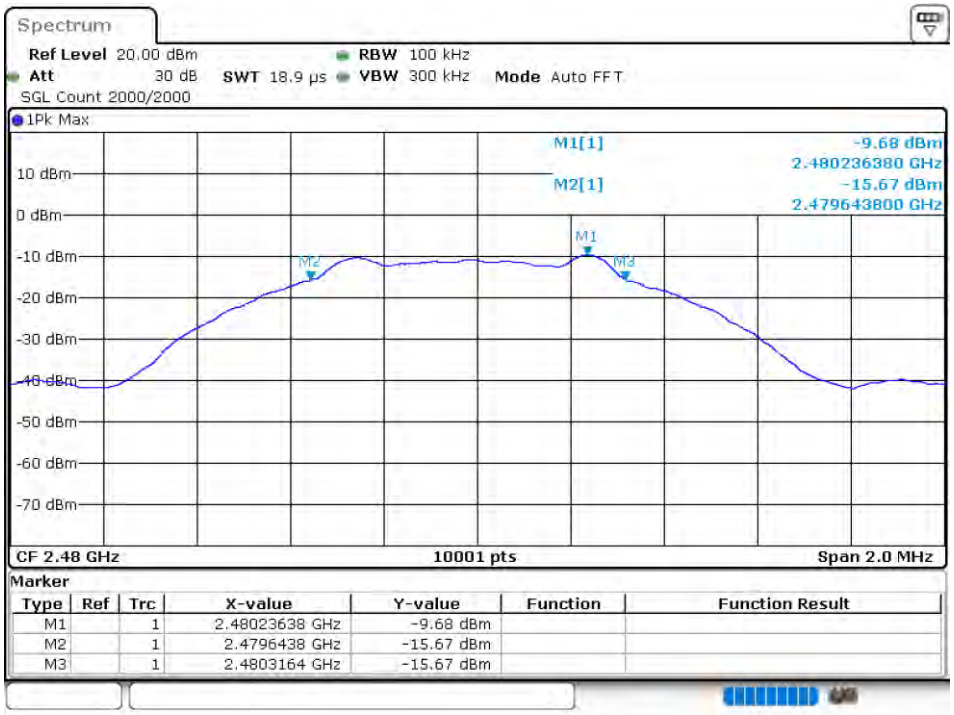

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.48023638 GHz	-9.68 dBm		
M2		1	2.4796438 GHz	-15.67 dBm		
M3		1	2.4803164 GHz	-15.67 dBm		

8.1.13 MAXIMUM POWER SPECTRAL DENSITY LEVEL

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE	2402	Ant 1	-18.338	8	Pass
NVNT	BLE	2440	Ant 1	-18.714	8	Pass
NVNT	BLE	2480	Ant 1	-18.695	8	Pass

PSD NVNT BLE 2402MHz Ant1

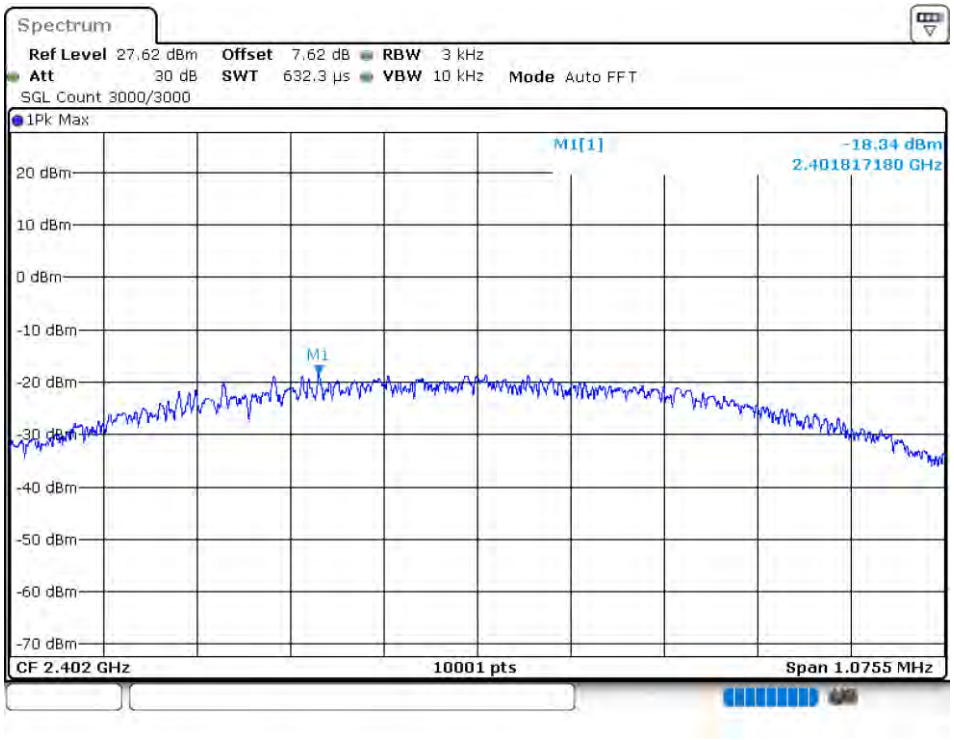

PSD NVNT BLE 2440MHz Ant1

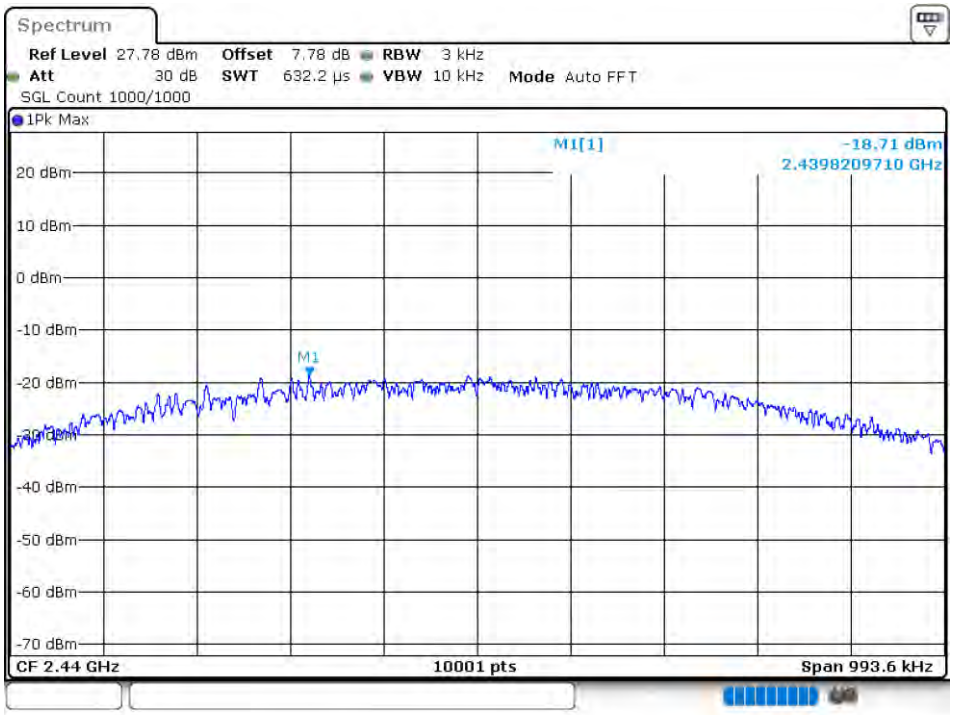

PSD NVNT BLE 2480MHz Ant1

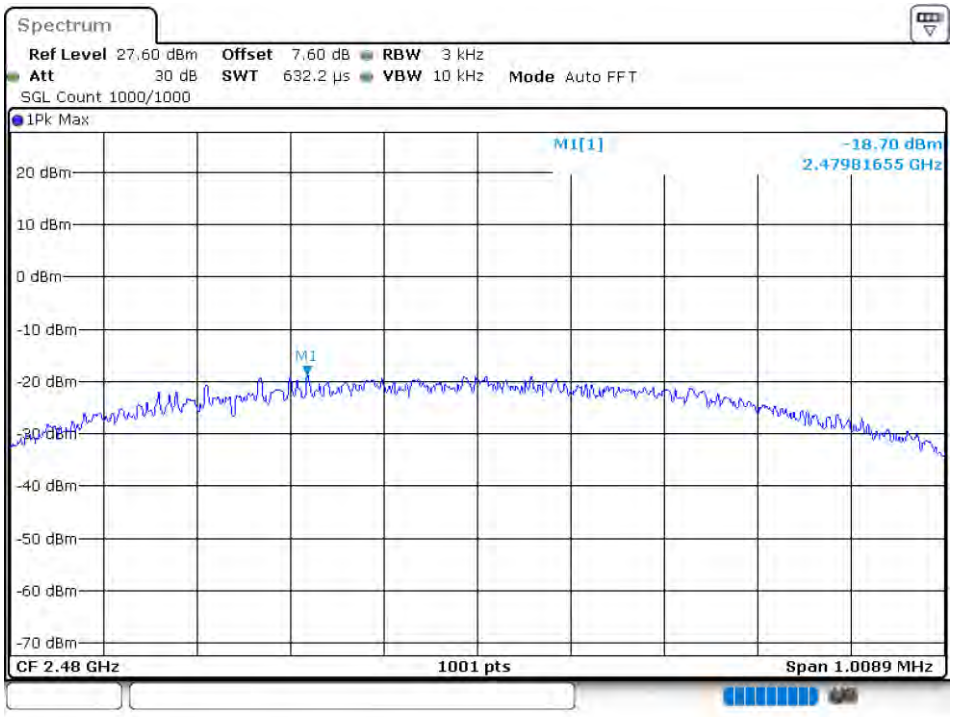

8.1.14 **BAND EDGE**

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant 1	-47.73	-20	Pass
NVNT	BLE	2480	Ant 1	-50.34	-20	Pass

Band Edge NVNT BLE 2402MHz Ant1 Ref

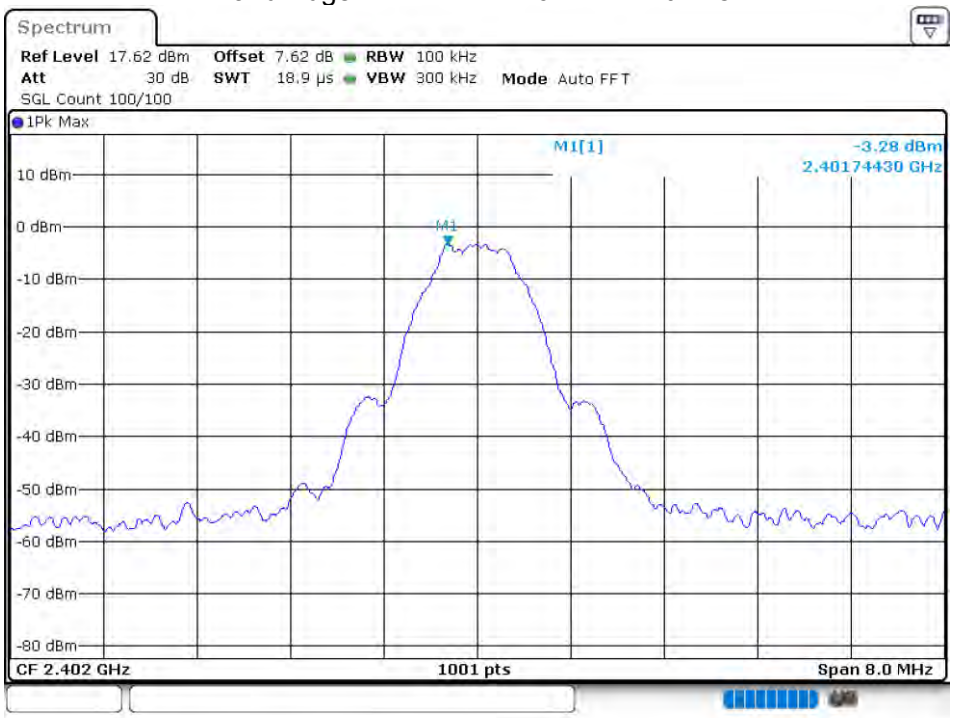

Band Edge NVNT BLE 2402MHz Ant1 Emission

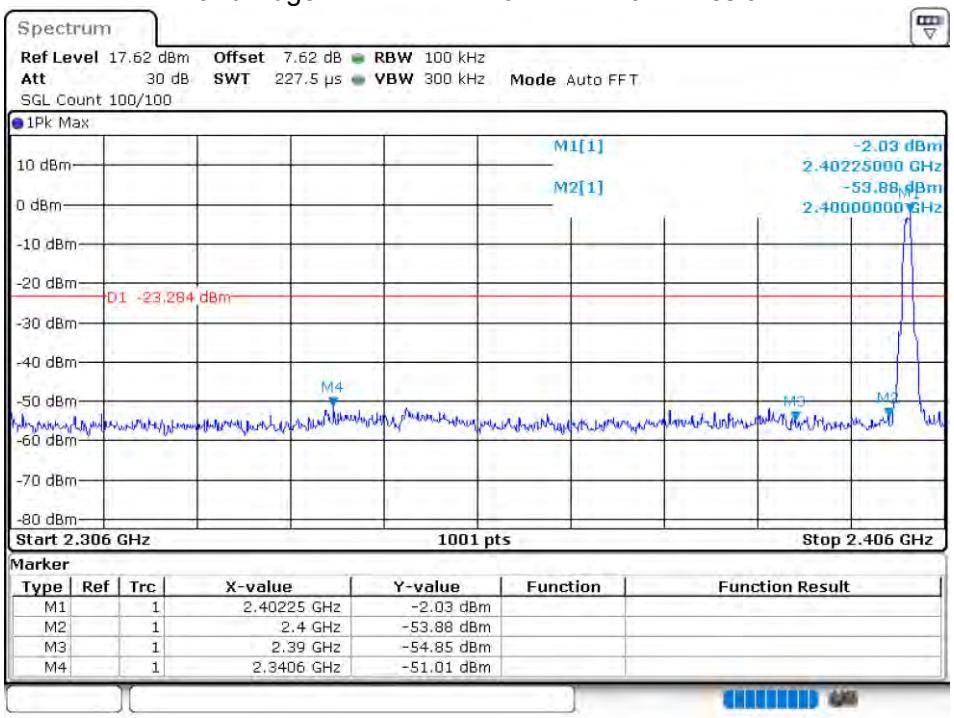

Band Edge NVNT BLE 2480MHz Ant1 Ref

Band Edge NVNT BLE 2480MHz Ant1 Emission

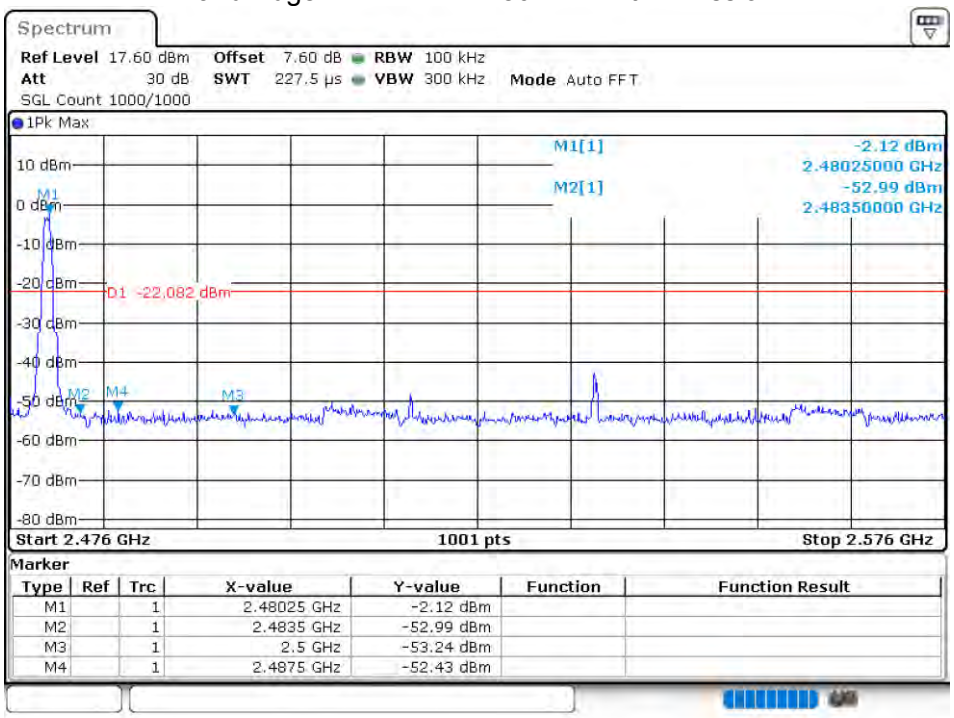

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.48025 GHz	-2.12 dBm		
M2		1	2.4835 GHz	-52.99 dBm		
M3		1	2.5 GHz	-53.24 dBm		
M4		1	2.4875 GHz	-52.43 dBm		

8.1.15 CONDUCTED RF SPURIOUS EMISSION

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant 1	-42.67	-20	Pass
NVNT	BLE	2440	Ant 1	-41.34	-20	Pass
NVNT	BLE	2480	Ant 1	-43.32	-20	Pass

Tx. Spurious NVNT BLE 2402MHz Ant1 Ref

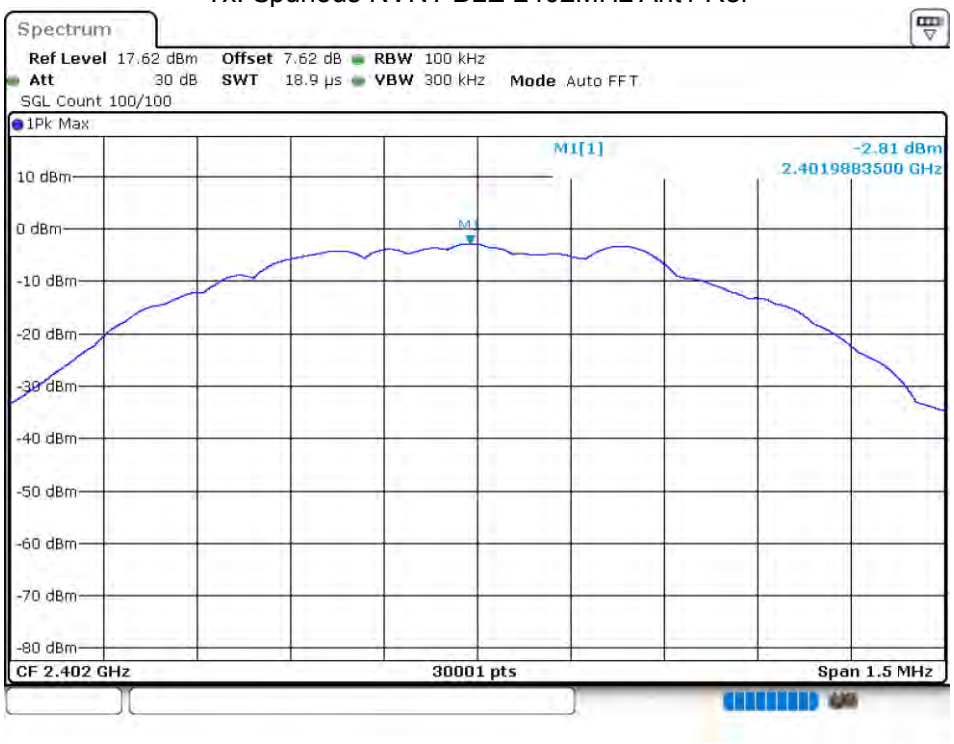

Tx. Spurious NVNT BLE 2402MHz Ant1 Emission

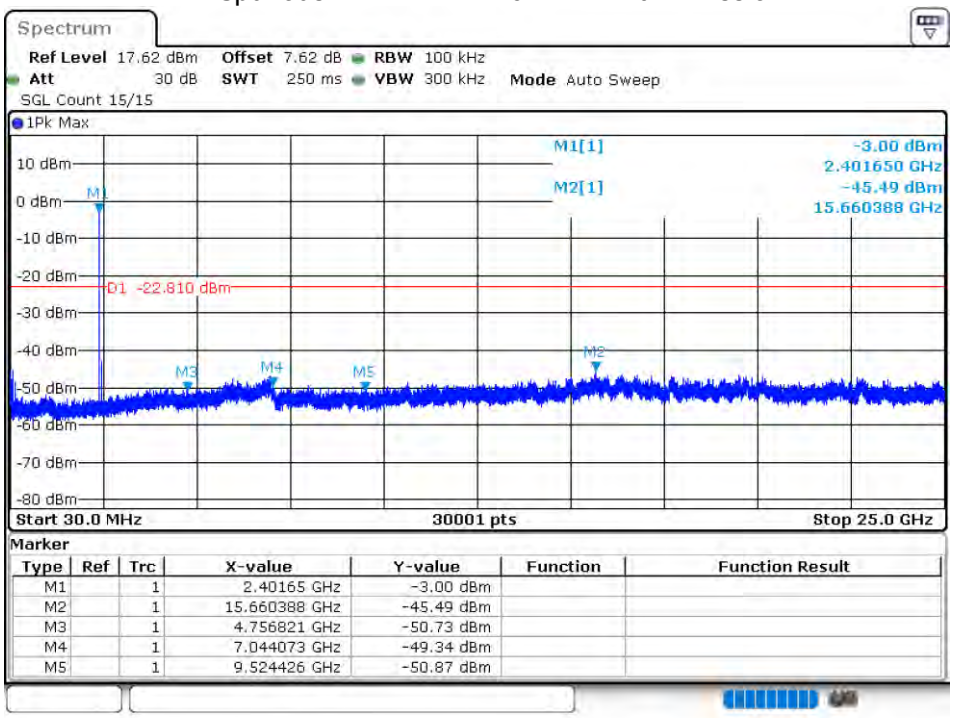

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.40165 GHz	-3.00 dBm		
M2		1	15.660388 GHz	-45.49 dBm		
M3		1	4.756821 GHz	-50.73 dBm		
M4		1	7.044073 GHz	-49.34 dBm		
M5		1	9.524426 GHz	-50.87 dBm		

Tx. Spurious NVNT BLE 2440MHz Ant1 Ref

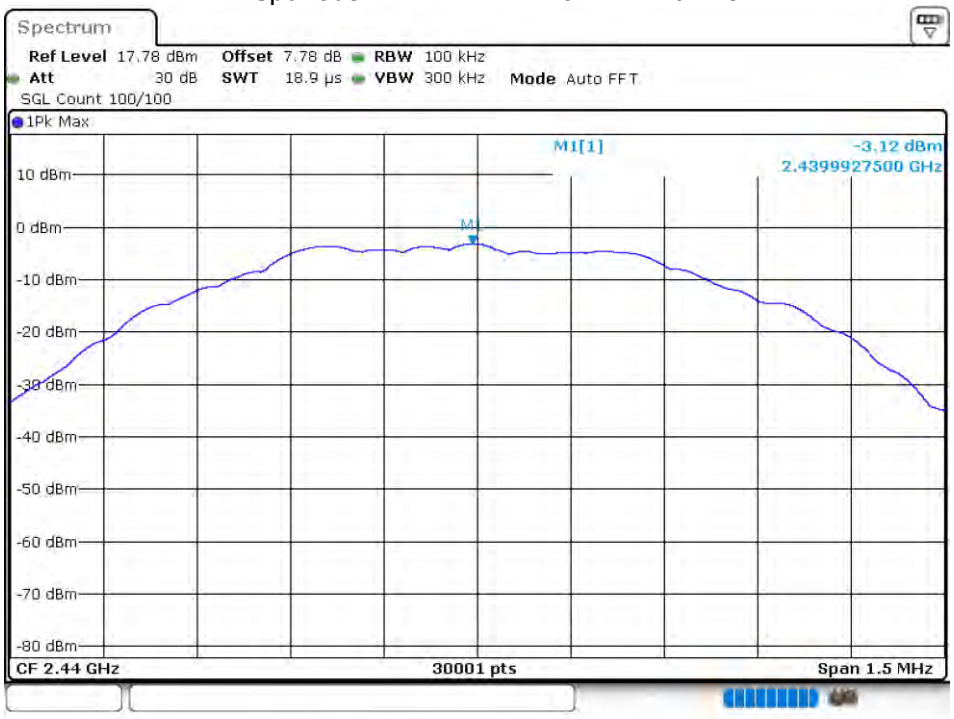

Tx. Spurious NVNT BLE 2440MHz Ant1 Emission

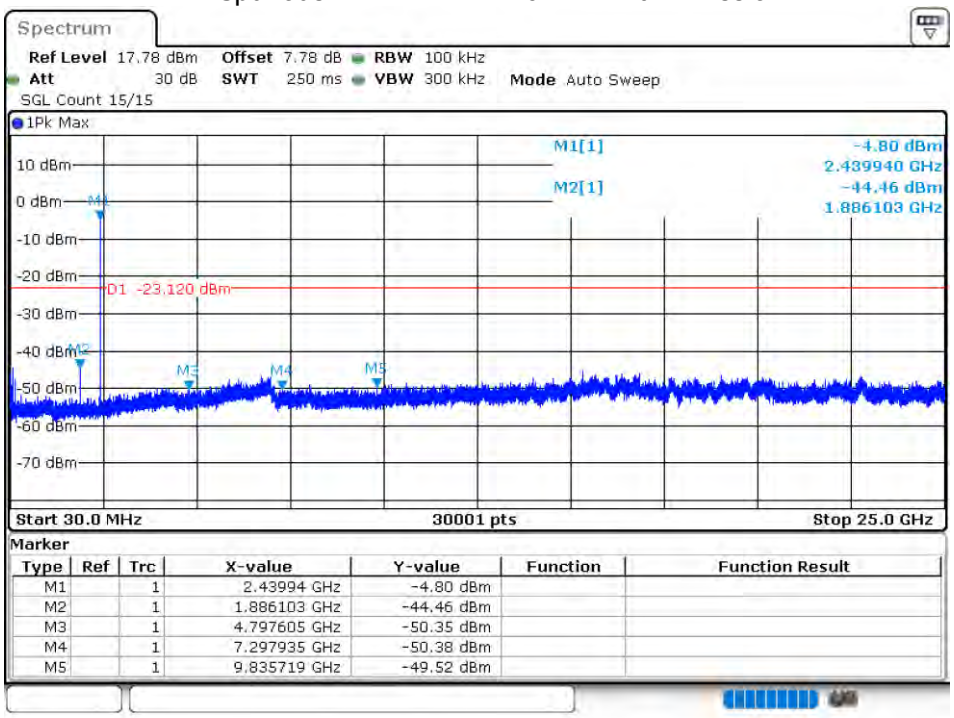

Tx. Spurious NVNT BLE 2480MHz Ant1 Ref

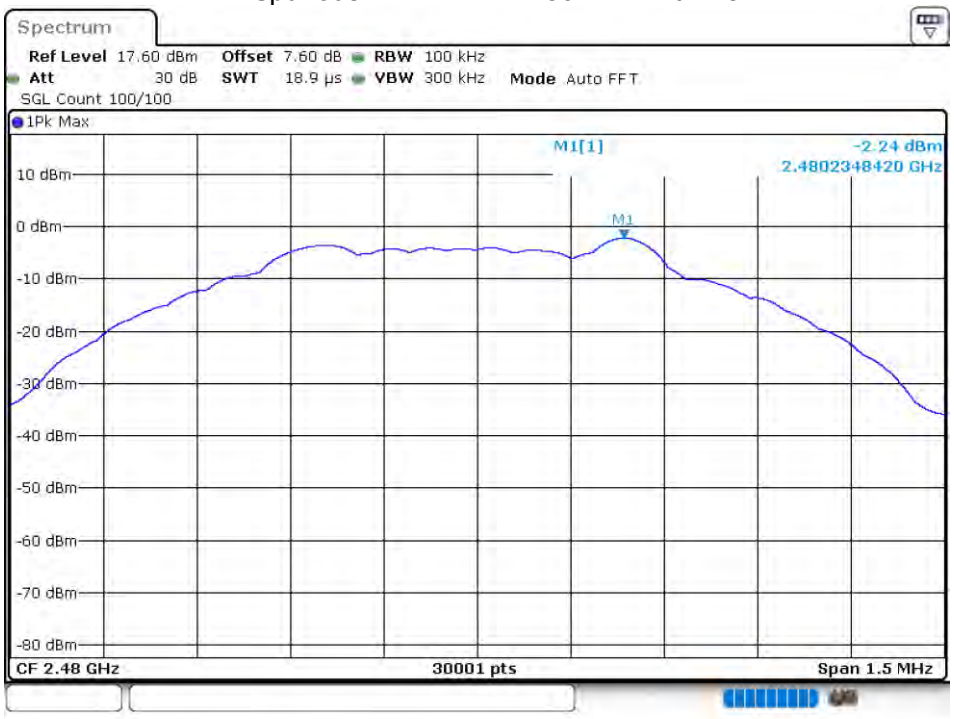

Tx. Spurious NVNT BLE 2480MHz Ant1 Emission

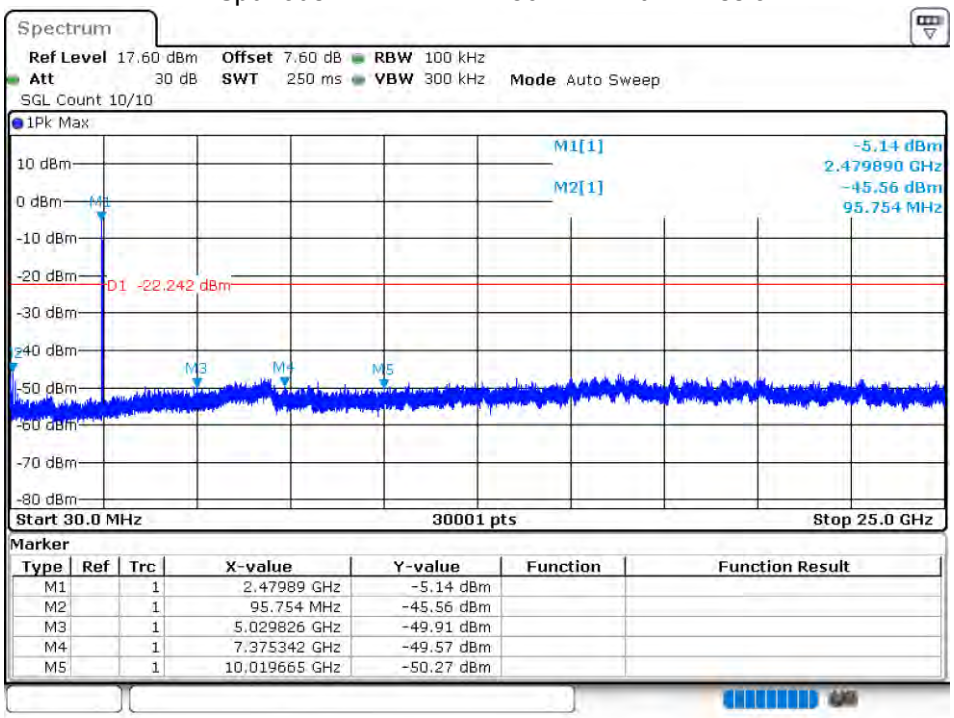

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.47989 GHz	-5.14 dBm		
M2		1	95.754 MHz	-45.56 dBm		
M3		1	5.029826 GHz	-49.91 dBm		
M4		1	7.375342 GHz	-49.57 dBm		
M5		1	10.019665 GHz	-50.27 dBm		

RIGHT(2M):

8.1.16 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant 1	-1.339	30	Pass
NVNT	BLE	2440	Ant 1	-1.587	30	Pass
NVNT	BLE	2480	Ant 1	-1.566	30	Pass

Power NVNT BLE 2402MHz Ant1

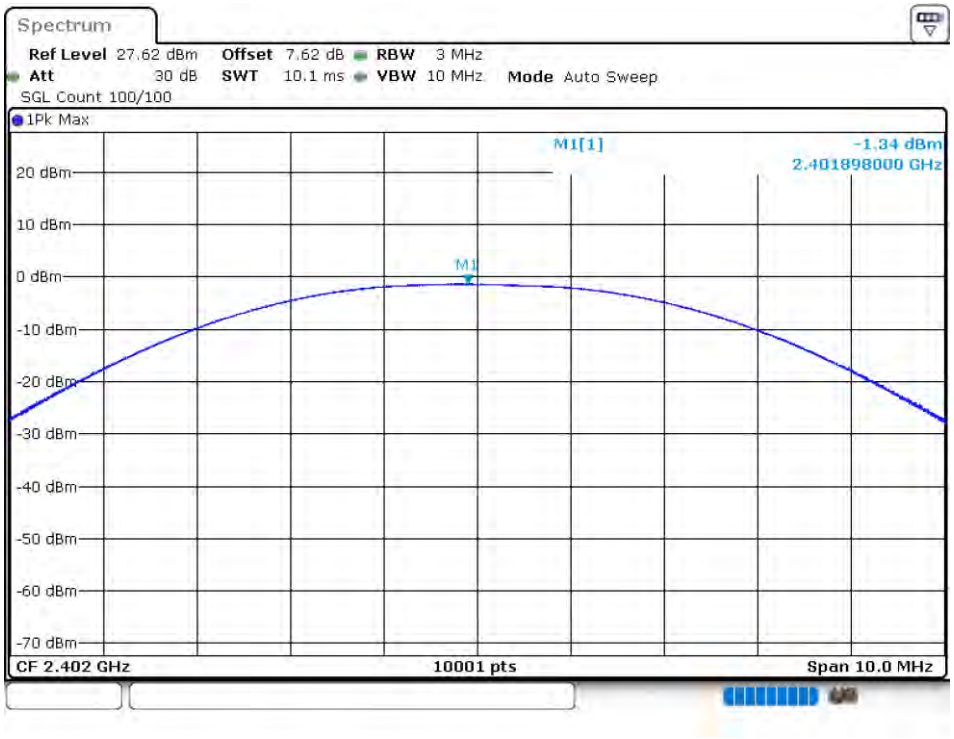

Power NVNT BLE 2440MHz Ant1

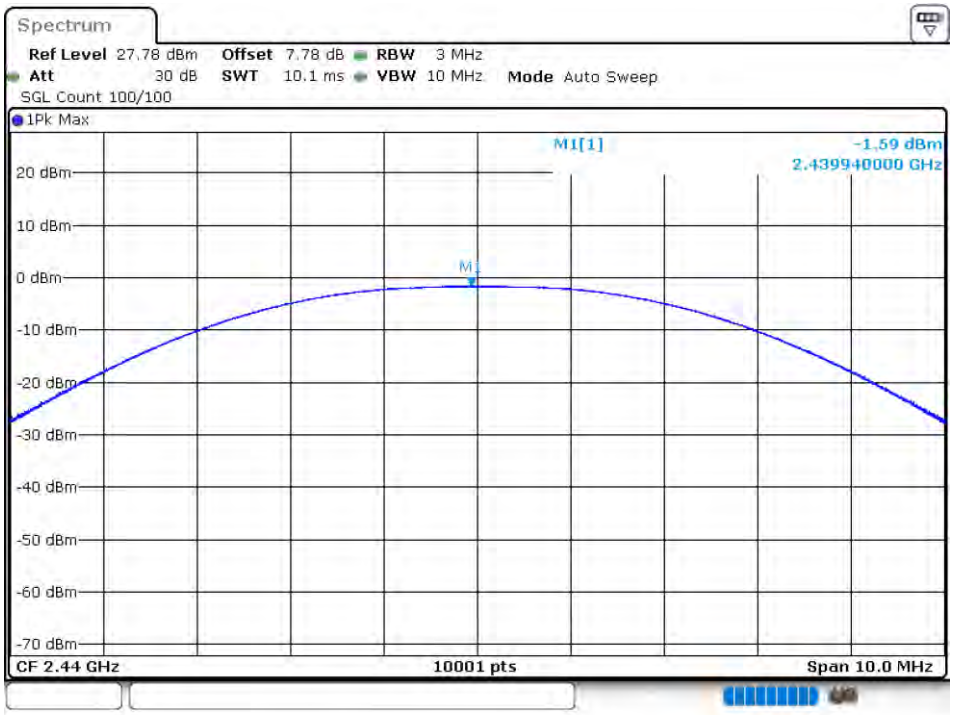

Power NVNT BLE 2480MHz Ant1

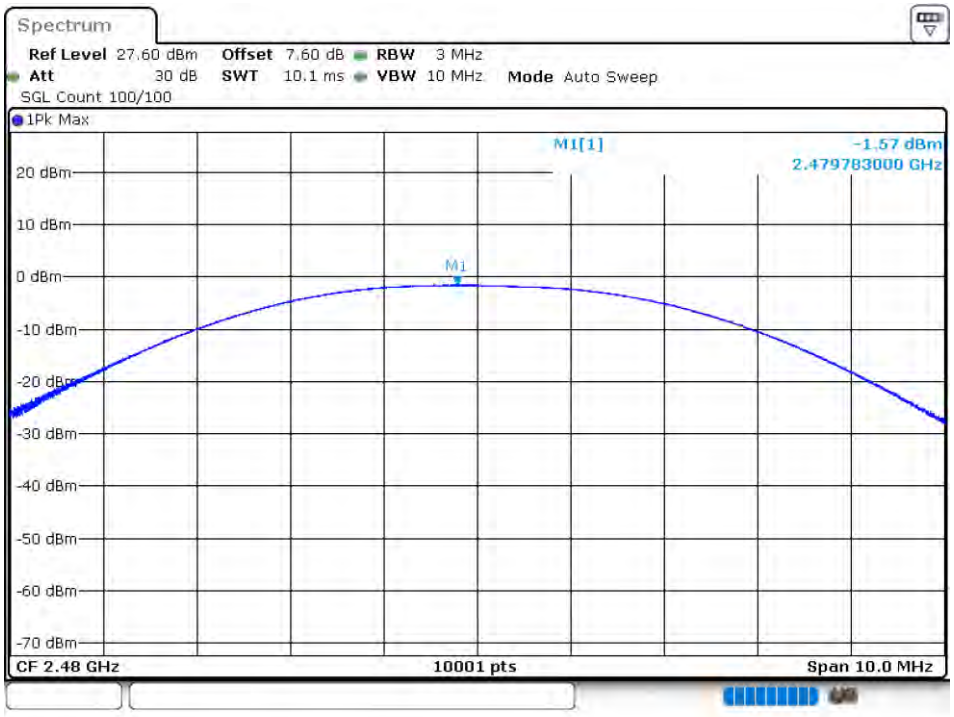

8.1.17 OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant 1	2.0294	1.3436	0.5	Pass
NVNT	BLE	2440	Ant 1	2.033	1.3604	0.5	Pass
NVNT	BLE	2480	Ant 1	2.0294	1.2412	0.5	Pass

OBW NVNT BLE 2402MHz Ant1

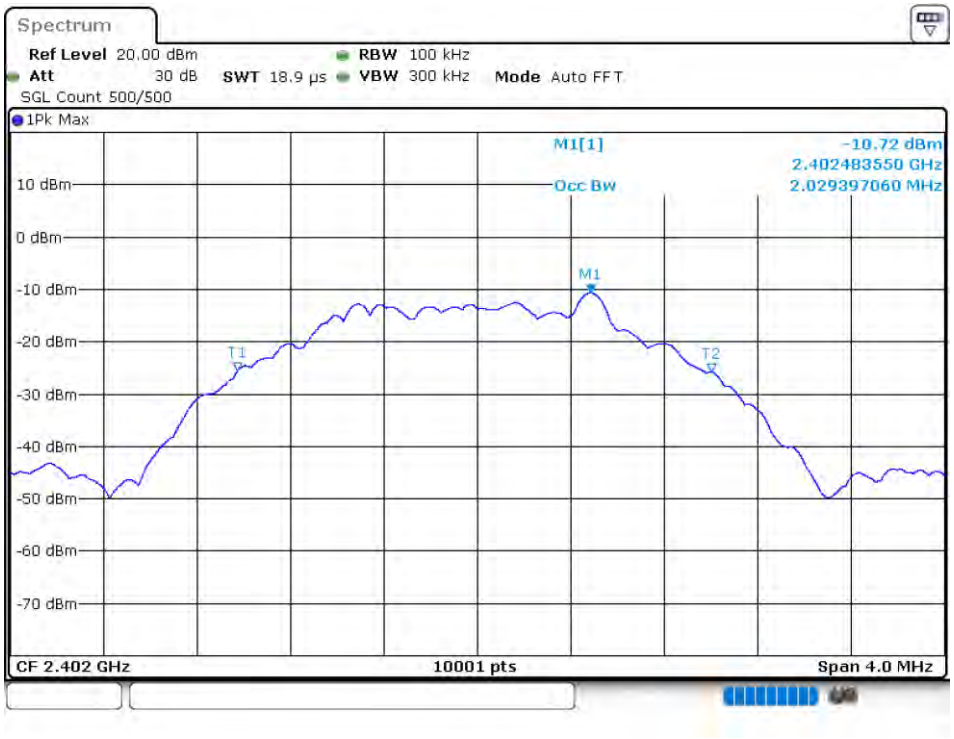

-6 dB BW NVNT BLE 2402MHz Ant1

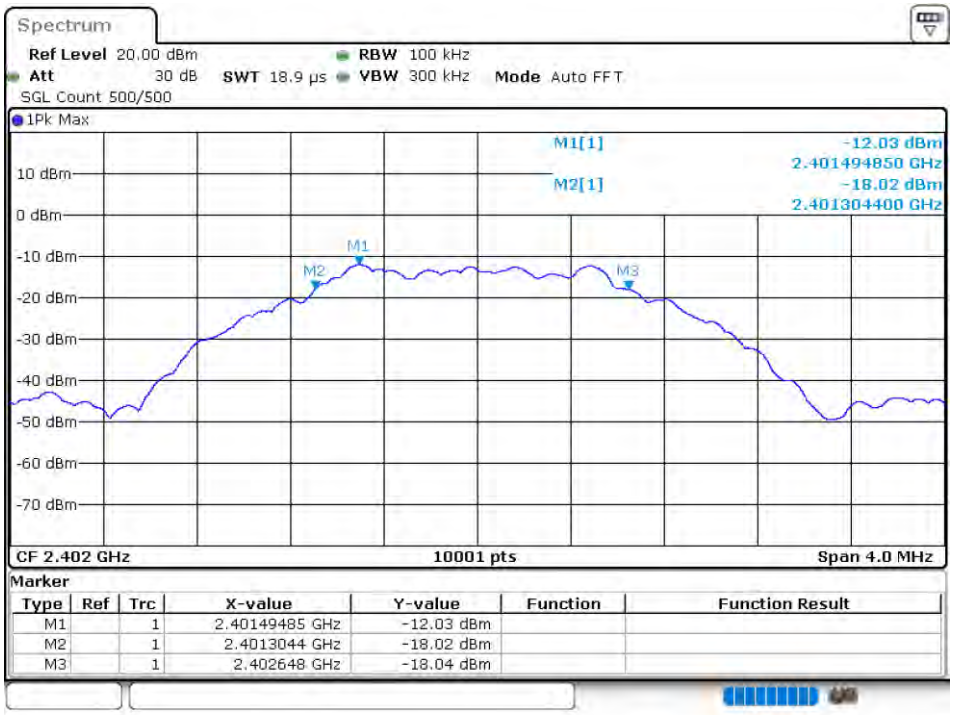

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.40149485 GHz	-12.03 dBm		
M2		1	2.4013044 GHz	-18.02 dBm		
M3		1	2.402648 GHz	-18.04 dBm		

OBW NVNT BLE 2440MHz Ant1

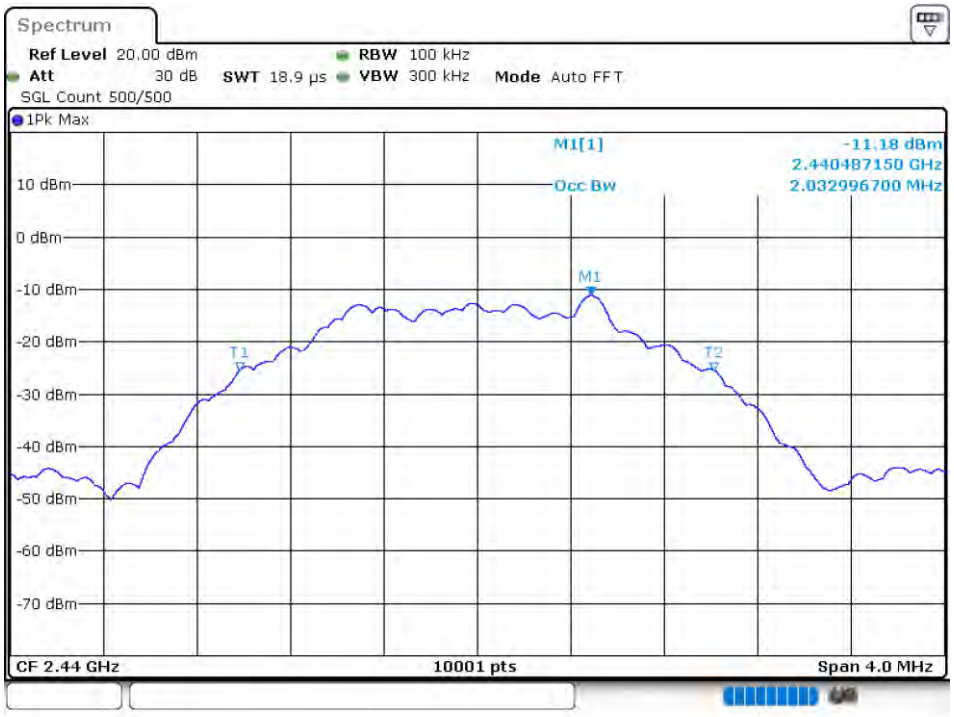

-6 dB BW NVNT BLE 2440MHz Ant1

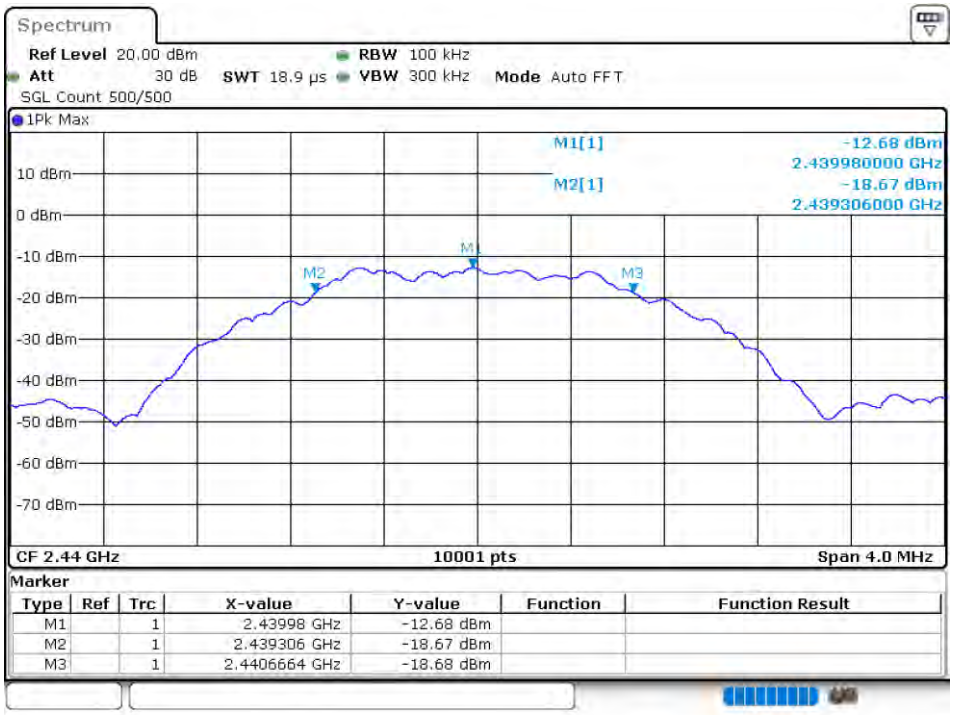

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.43998 GHz	-12.68 dBm		
M2		1	2.439306 GHz	-18.67 dBm		
M3		1	2.4406664 GHz	-18.68 dBm		

OBW NVNT BLE 2480MHz Ant1

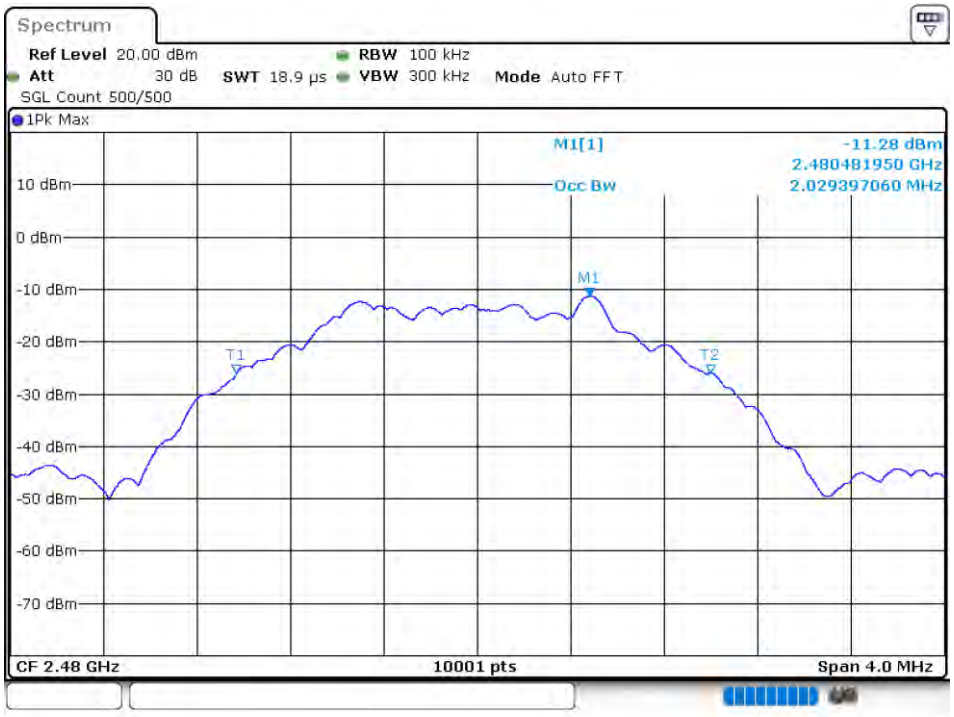

-6 dB BW NVNT BLE 2480MHz Ant1

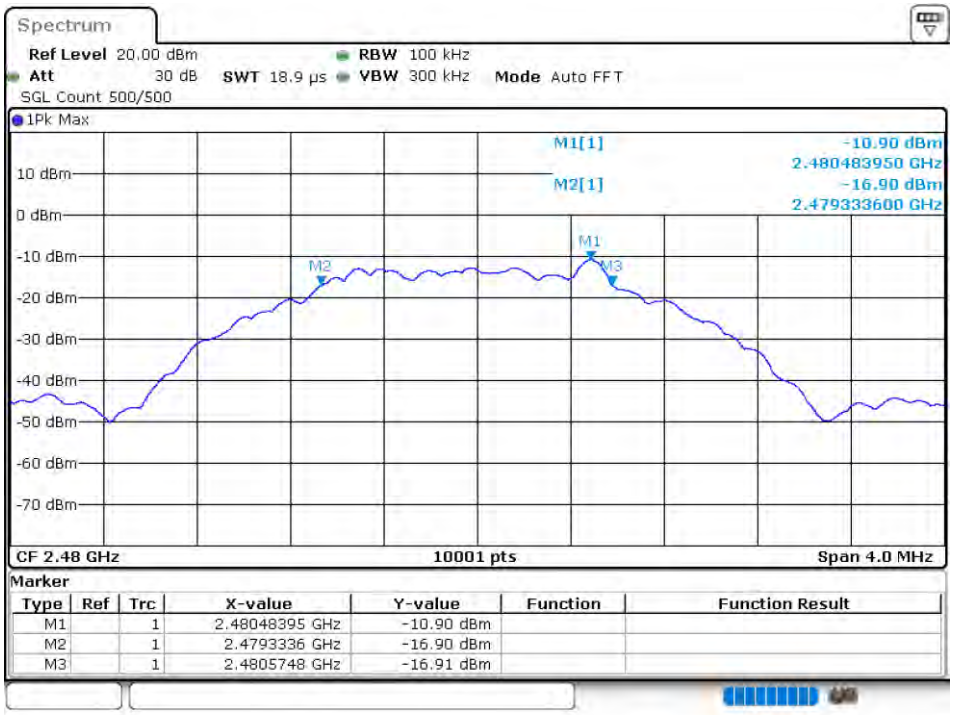

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.48048395 GHz	-10.90 dBm		
M2		1	2.4793336 GHz	-16.90 dBm		
M3		1	2.4805748 GHz	-16.91 dBm		

8.1.18 MAXIMUM POWER SPECTRAL DENSITY LEVEL

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE	2402	Ant 1	-22.364	8	Pass
NVNT	BLE	2440	Ant 1	-22.464	8	Pass
NVNT	BLE	2480	Ant 1	-22.534	8	Pass

PSD NVNT BLE 2402MHz Ant1

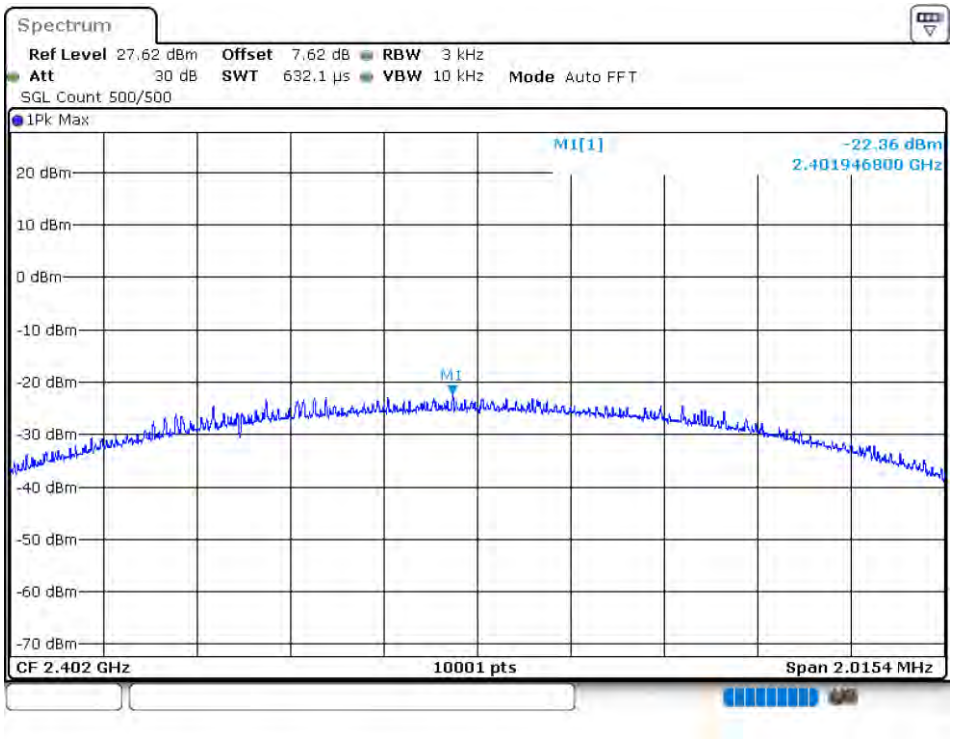

PSD NVNT BLE 2440MHz Ant1

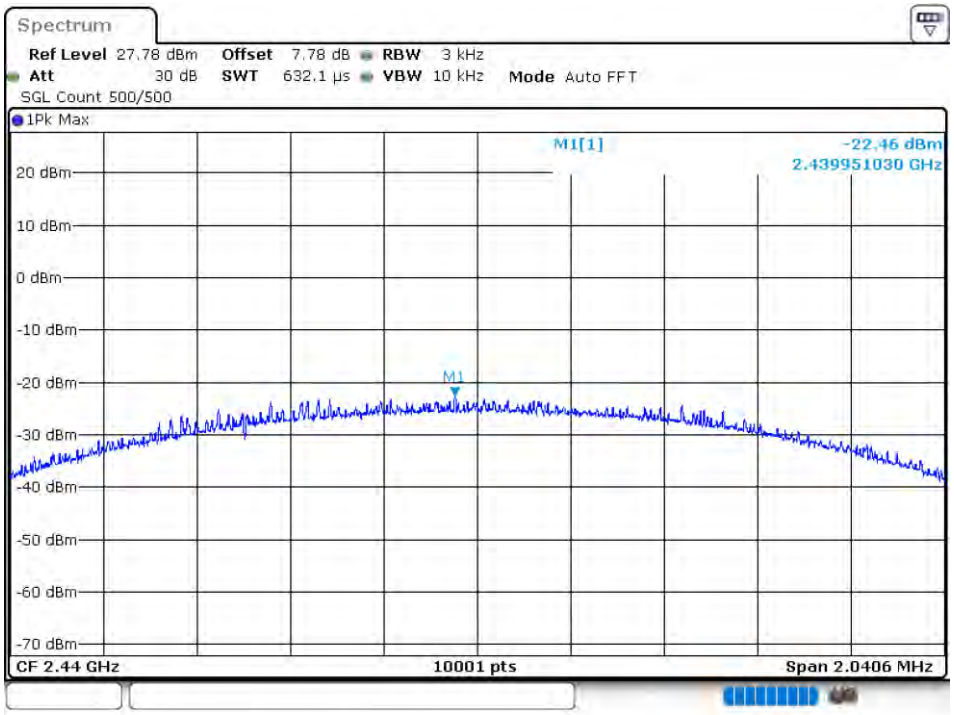

PSD NVNT BLE 2480MHz Ant1

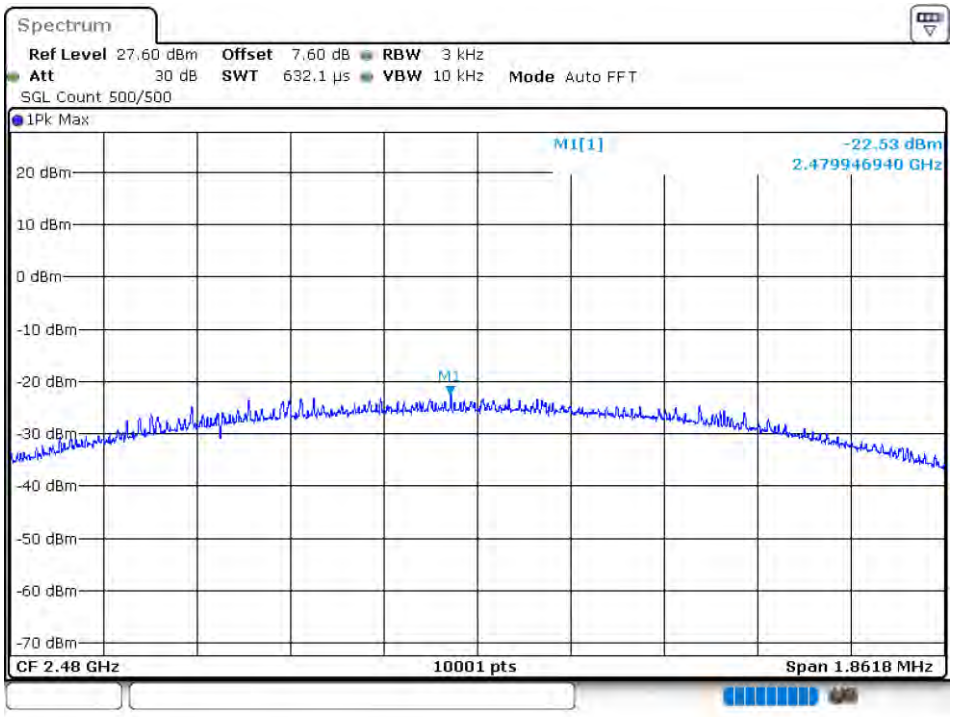

8.1.19 **BAND EDGE**

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant 1	-47.58	-20	Pass
NVNT	BLE	2480	Ant 1	-46.27	-20	Pass

Band Edge NVNT BLE 2402MHz Ant1 Ref

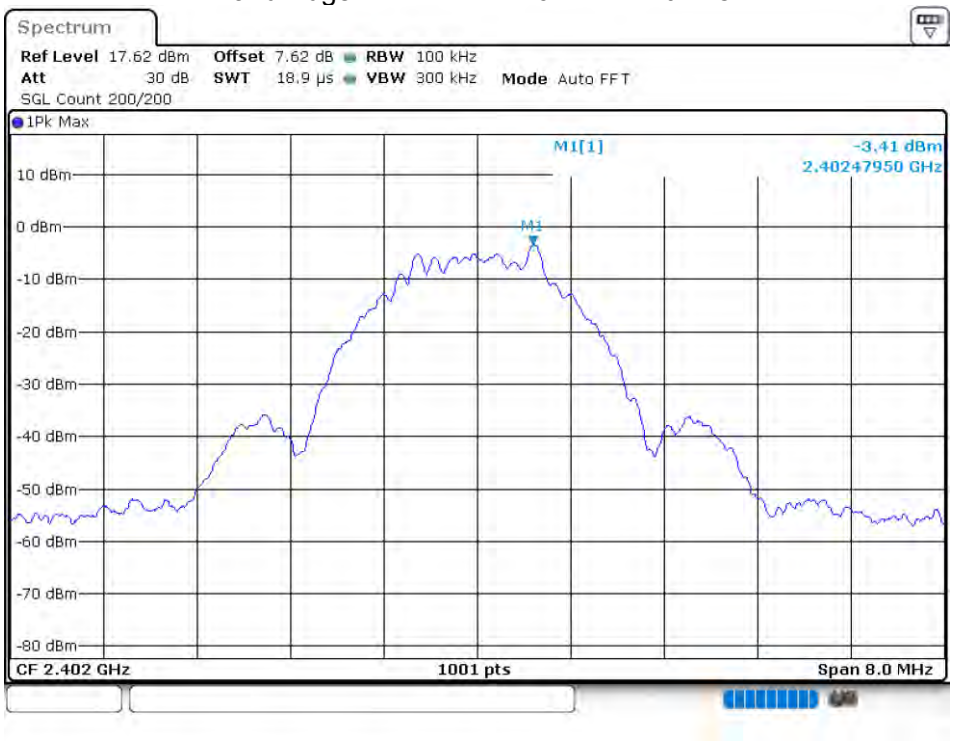

Band Edge NVNT BLE 2402MHz Ant1 Emission

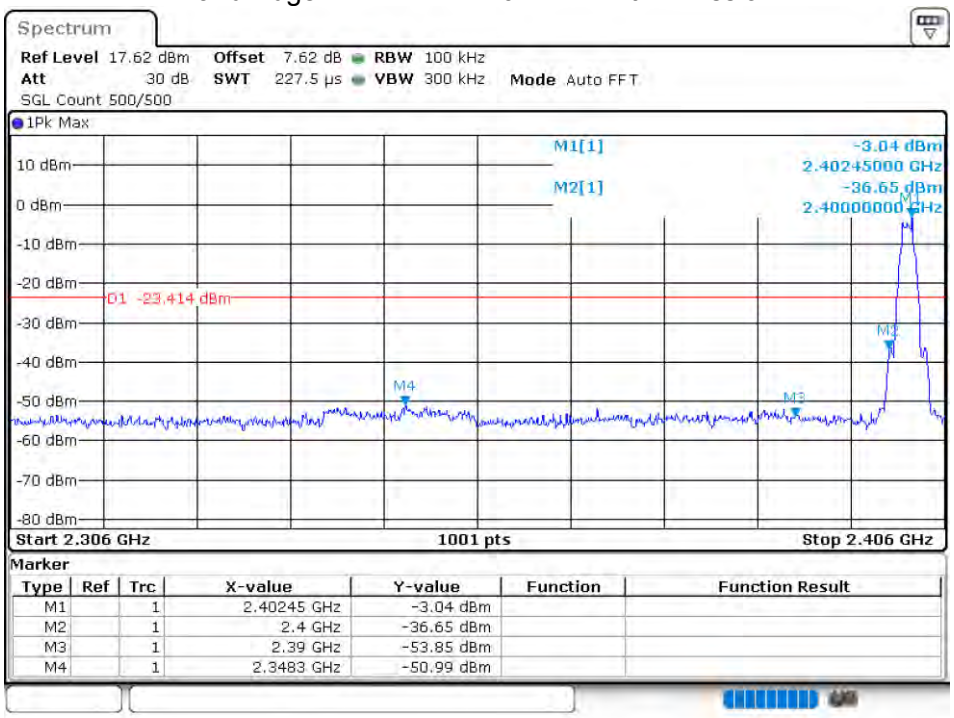

Band Edge NVNT BLE 2480MHz Ant1 Ref

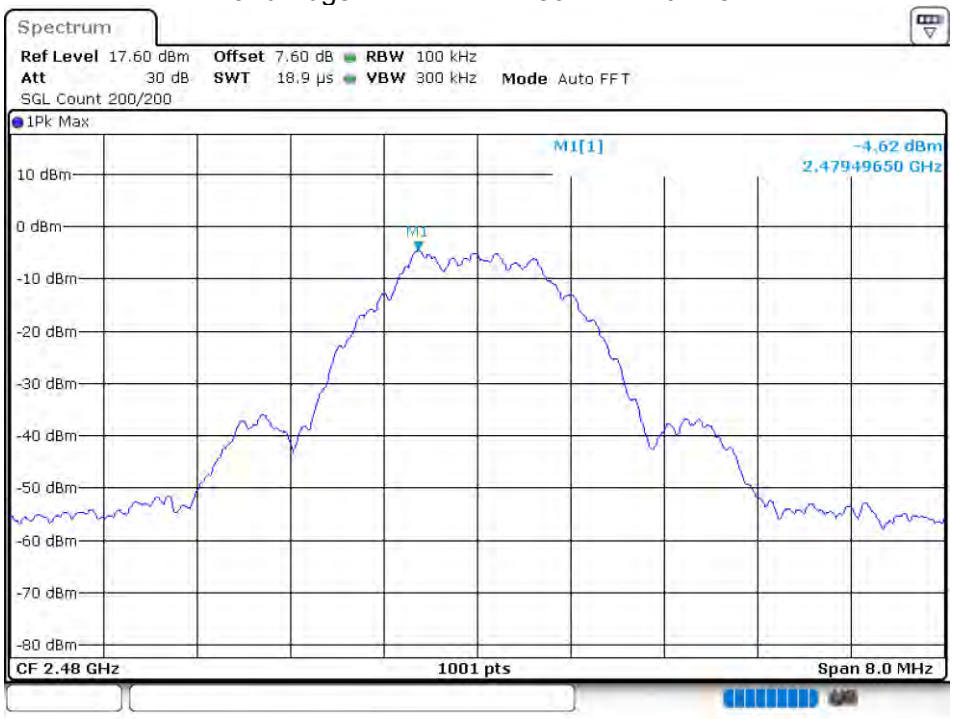

Band Edge NVNT BLE 2480MHz Ant1 Emission

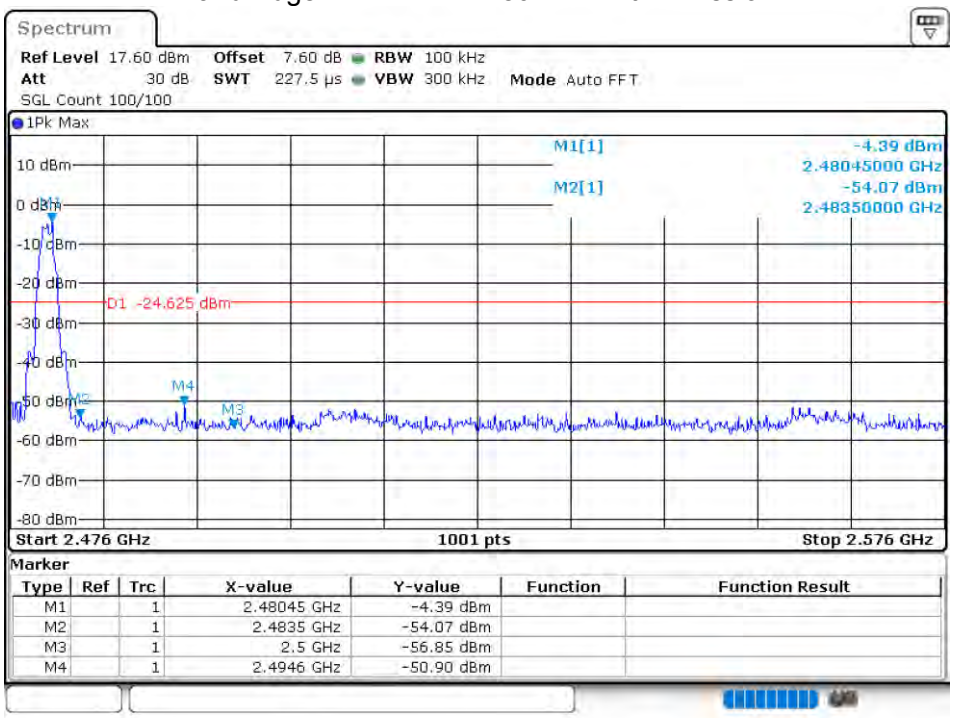

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.48045 GHz	-4.39 dBm		
M2		1	2.4835 GHz	-54.07 dBm		
M3		1	2.5 GHz	-56.85 dBm		
M4		1	2.4946 GHz	-50.90 dBm		

8.1.20 CONDUCTED RF SPURIOUS EMISSION

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant 1	-37.15	-20	Pass
NVNT	BLE	2440	Ant 1	-34	-20	Pass
NVNT	BLE	2480	Ant 1	-39.49	-20	Pass

Tx. Spurious NVNT BLE 2402MHz Ant1 Ref

Tx. Spurious NVNT BLE 2402MHz Ant1 Emission

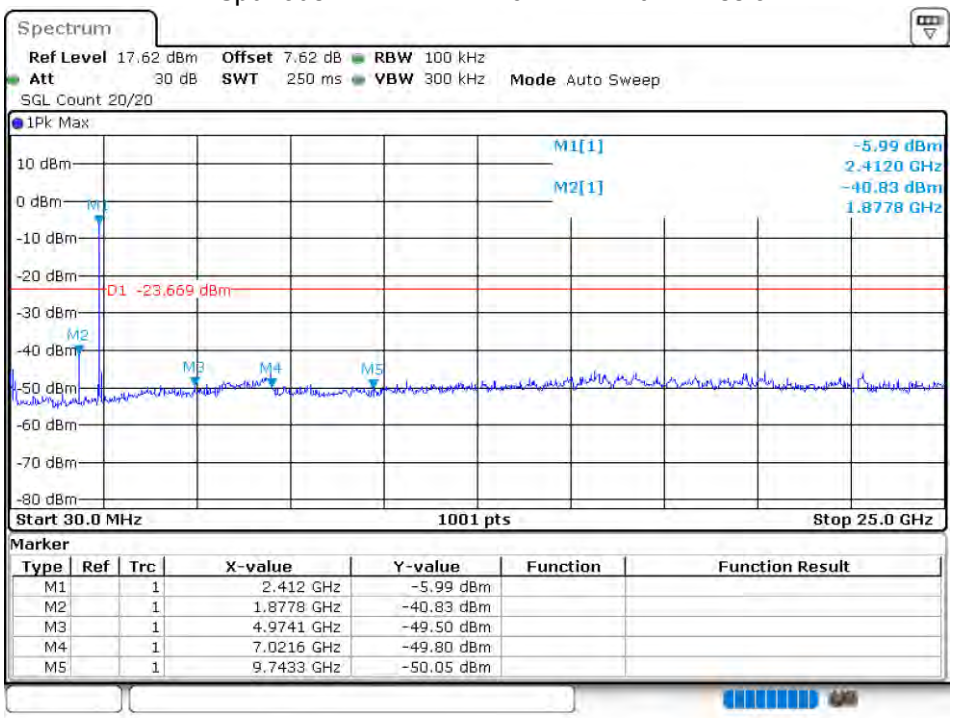

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.412 GHz	-5.99 dBm		
M2		1	1.8778 GHz	-40.83 dBm		
M3		1	4.9741 GHz	-49.50 dBm		
M4		1	7.0216 GHz	-49.80 dBm		
M5		1	9.7433 GHz	-50.05 dBm		

Tx. Spurious NVNT BLE 2440MHz Ant1 Ref

Tx. Spurious NVNT BLE 2440MHz Ant1 Emission

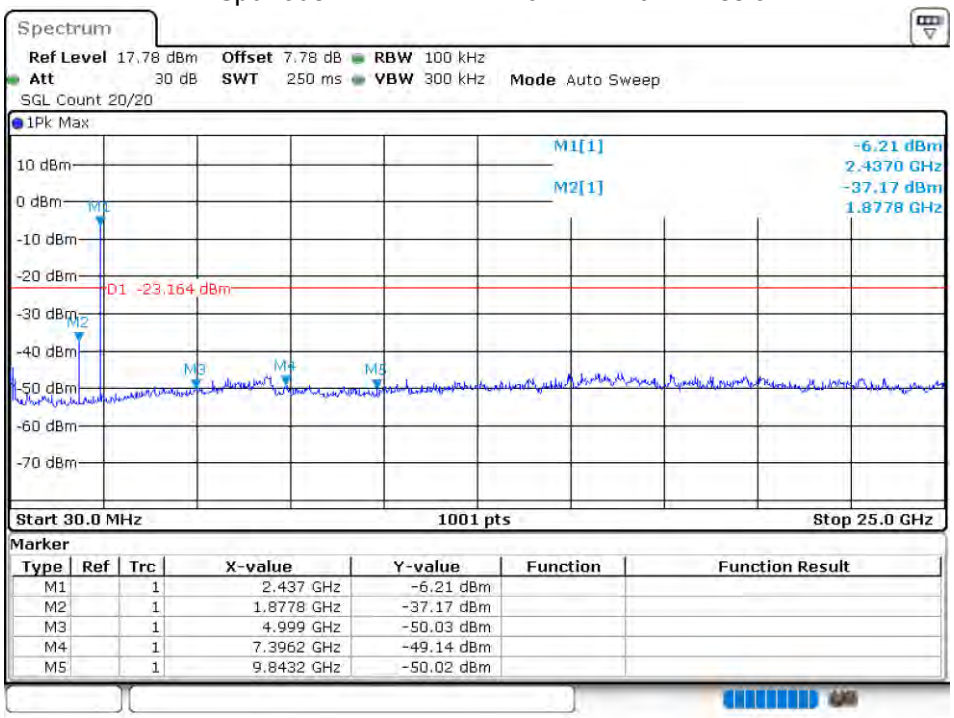

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.437 GHz	-6.21 dBm		
M2		1	1.8778 GHz	-37.17 dBm		
M3		1	4.999 GHz	-50.03 dBm		
M4		1	7.3962 GHz	-49.14 dBm		
M5		1	9.8432 GHz	-50.02 dBm		

Tx. Spurious NVNT BLE 2480MHz Ant1 Ref

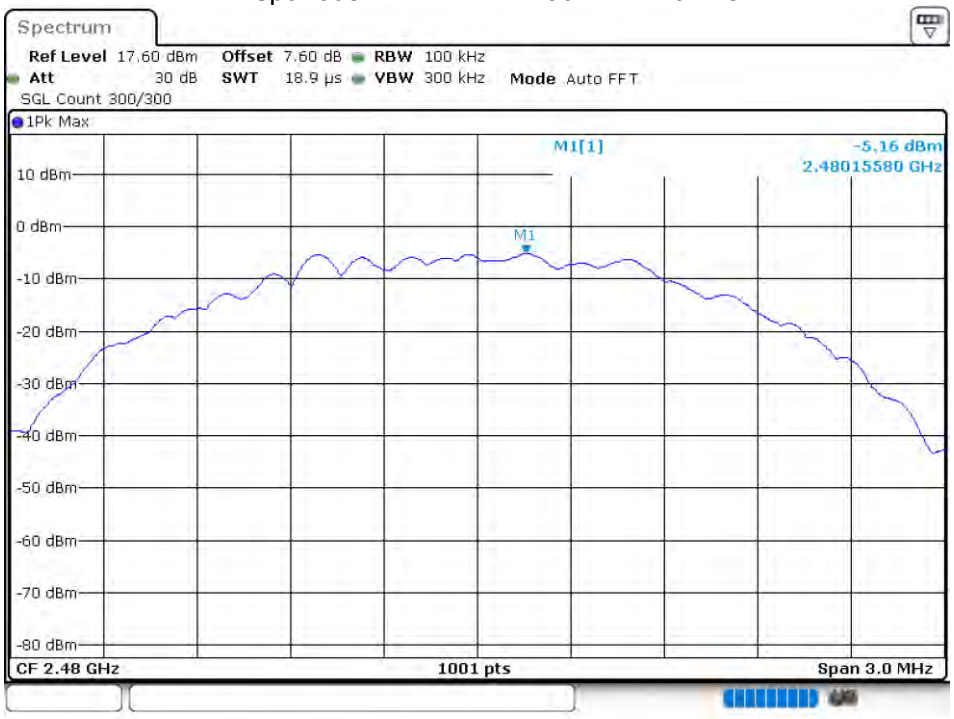

Tx. Spurious NVNT BLE 2480MHz Ant1 Emission

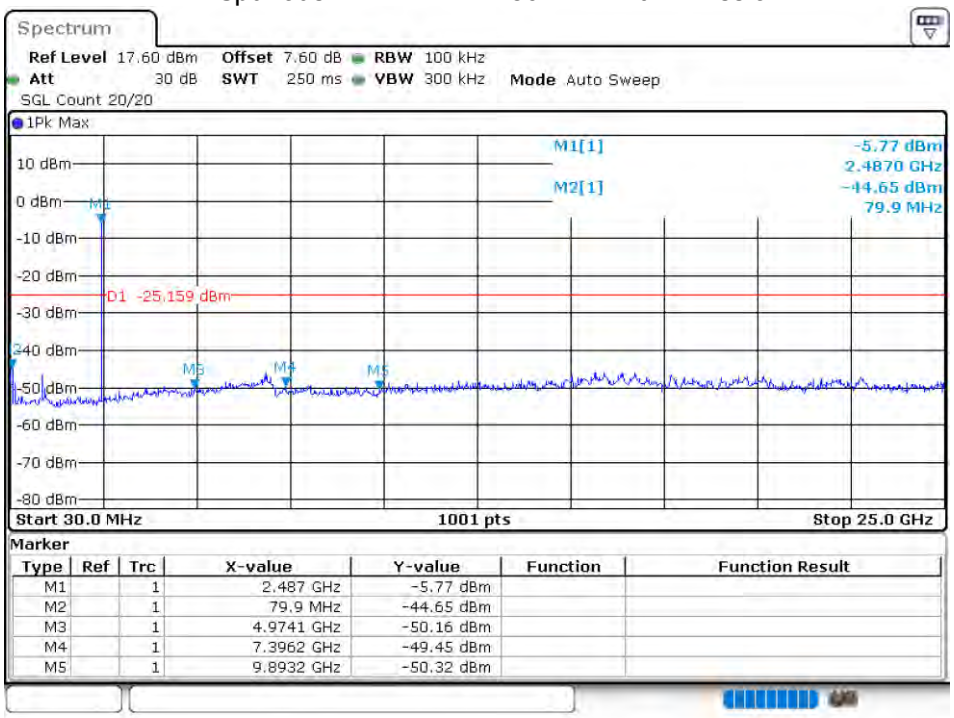

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.487 GHz	-5.77 dBm		
M2		1	79.9 MHz	-44.65 dBm		
M3		1	4.9741 GHz	-50.16 dBm		
M4		1	7.3962 GHz	-49.45 dBm		
M5		1	9.8932 GHz	-50.32 dBm		

END OF REPORT