

TEST REPORT

Applicant: HANSHOW TECHNOLOGY CO.,LTD.

Address of Applicant: Building 1(IF podium building and 4F) and Building 5 (7F) in Jiaxing Photovolta High-tech Park, No. 1288 Kanghe Rd., Xiuzhou District,Jiaxing,Zhejiang, China

Manufacturer/Factory: HANSHOW TECHNOLOGY CO.,LTD.

Address of Manufacturer/Factory: Building 1(IF podium building and 4F) and Building 5 (7F) in Jiaxing Photovolta High-tech Park, No. 1288 Kanghe Rd., Xiuzhou District,Jiaxing,Zhejiang, China

Equipment Under Test (EUT)

Product Name: ESL Controller

Model No.: HS_C09960, HS_C09962

FCC ID: 2AYMH-C09960

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: July 18, 2023

Date of Test: July 18, 2023-August 15, 2023

Date of report issued: August 16, 2023

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

A red circular stamp with a star in the center. The text around the star reads "Global United Technology Services Co., Ltd." and "Inspection/Testing Services". Below the star, it says "检验检测专用章".

Robinson Luo


Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	August 16, 2023	Original

Prepared By:




Project Engineer

Date:

August 16, 2023

Check By:



Reviewer

Date:

August 16, 2023

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	8
5.3 DESCRIPTION OF SUPPORT UNITS	8
5.4 DEVIATION FROM STANDARDS	8
5.5 ABNORMALITIES FROM STANDARD CONDITIONS	8
5.6 TEST FACILITY	8
5.7 TEST LOCATION	8
5.8 ADDITIONAL INSTRUCTIONS	8
6 TEST INSTRUMENTS LIST	9
7 TEST RESULTS AND MEASUREMENT DATA	11
7.1 ANTENNA REQUIREMENT	11
7.2 CONDUCTED EMISSIONS	12
7.3 CONDUCTED OUTPUT POWER	15
7.4 CHANNEL BANDWIDTH	16
7.5 POWER SPECTRAL DENSITY	17
7.6 SPURIOUS EMISSION IN NON-RESTRICTED & RESTRICTED BANDS	18
7.6.1 Conducted Emission Method	18
7.6.2 Radiated Emission Method	19
8 TEST SETUP PHOTO	28
9 EUT CONSTRUCTIONAL DETAILS	28

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Remarks:

1. Pass: The EUT complies with the essential requirements in the standard.
2. N/A: Not applicable.
3. Test according to ANSI C63.10:2013

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz-30MHz	3.1dB	(1)
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	ESL Controller
Model No.:	HS_C09960, HS_C09962
Test Model No:	HS_C09960
Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are appearance color and model name for commercial purpose.	
Test sample(s) ID:	GTS2023070206-1
Sample(s) Status:	Engineer sample
S/N:	N/A
Operation Frequency:	2402MHz~2480MHz
Channel Numbers:	157
Channel Separation:	0.5MHz
Modulation Type:	GFSK
Antenna Type:	PCB Antenna
Antenna Gain:	ANT1:1.9dBi ANT2:2.1dBi ANT3:1.6dBi ANT4:2.1dBi
Power Supply:	DC 12.0V by Adapter Or DC 36V~57V by POE

Note:

1. Antenna gain information provided by the customer.
2. The relevant information of the sample is provided by the entrusting company, and the laboratory is not responsible for its authenticity.
3. All 4 antennas transmitters were work in asynchronous status.
4. Both two power supply modes were tested and only reported the worst case adapter.

Operation Frequency each of channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2402.0	41	2422.0	81	2442.0	121	2462.0
2	2402.5	42	2422.5	82	2442.5	122	2462.5
3	2403.0	43	2423.0	83	2443.0	123	2463.0
4	2403.5	44	2423.5	84	2443.5	124	2463.5
5	2404.0	45	2424.0	85	2444.0	125	2464.0
6	2404.5	46	2424.5	86	2444.5	126	2464.5
7	2405.0	47	2425.0	87	2445.0	127	2465.0
8	2405.5	48	2425.5	88	2445.5	128	2465.5
9	2406.0	49	2426.0	89	2446.0	129	2466.0
10	2406.5	50	2426.5	90	2446.5	130	2466.5
11	2407.0	51	2427.0	91	2447.0	131	2467.0
12	2407.5	52	2427.5	92	2447.5	132	2467.5
13	2408.0	53	2428.0	93	2448.0	133	2468.0
14	2408.5	54	2428.5	94	2448.5	134	2468.5
15	2409.0	55	2429.0	95	2449.0	135	2469.0
16	2409.5	56	2429.5	96	2449.5	136	2469.5
17	2410.0	57	2430.0	97	2450.0	137	2470.0
18	2410.5	58	2430.5	98	2450.5	138	2470.5
19	2411.0	59	2431.0	99	2451.0	139	2471.0
20	2411.5	60	2431.5	100	2451.5	140	2471.5
21	2412.0	61	2432.0	101	2452.0	141	2472.0
22	2412.5	62	2432.5	102	2452.5	142	2472.5
23	2413.0	63	2433.0	103	2453.0	143	2473.0
24	2413.5	64	2433.5	104	2453.5	144	2473.5
25	2414.0	65	2434.0	105	2454.0	145	2474.0
26	2414.5	66	2434.5	106	2454.5	146	2474.5
27	2415.0	67	2435.0	107	2455.0	147	2475.0
28	2415.5	68	2435.5	108	2455.5	148	2475.5
29	2416.0	69	2436.0	109	2456.0	149	2476.0
30	2416.5	70	2436.5	110	2456.5	150	2476.5
31	2417.0	71	2437.0	111	2457.0	151	2477.0
32	2417.5	72	2437.5	112	2457.5	152	2477.5
33	2418.0	73	2438.0	113	2458.0	153	2478.0
34	2418.5	74	2438.5	114	2458.5	154	2478.5
35	2419.0	75	2439.0	115	2459.0	155	2479.0
36	2419.5	76	2439.5	116	2459.5	156	2479.5
37	2420.0	77	2440.0	117	2460.0	157	2480.0

38	2420.5	78	2440.5	118	2460.5		
39	2421.0	79	2441.0	119	2461.0		
40	2421.5	80	2441.5	120	2461.5		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
-------------------	---

5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
GTS	Adapter	TDX-1205000	N/A
ARAKNIS	Networks	AN-310-SW-R-24-POE	ST170300920C841A

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations: ● FCC—Registration No.: 381383 Designation Number: CN5029 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. ● ISED —Registration No.: 9079A CAB identifier: CN0091 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of ISED for radio equipment testing ● NVLAP (LAB CODE:600179-0) Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).

5.7 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

5.8 Additional Instructions

Test Software	Special test software provided by manufacturer
Power level setup	Default

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	June 23, 2021	June 22, 2024
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	April 14, 2023	April 13, 2024
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	GTS640	March 19, 2023	March 18, 2025
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	April 17, 2023	April 16, 2025
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Coaxial Cable	GTS	N/A	GTS213	April 21, 2023	April 20, 2024
8	Coaxial Cable	GTS	N/A	GTS211	April 21, 2023	April 20, 2024
9	Coaxial cable	GTS	N/A	GTS210	April 21, 2023	April 20, 2024
10	Coaxial Cable	GTS	N/A	GTS212	April 21, 2023	April 20, 2024
11	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	April 14, 2023	April 13, 2024
12	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov. 29, 2022	Nov. 28, 2023
13	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	April 14, 2023	April 13, 2024
14	Amplifier(1GHz-26.5GHz)	HP	8449B	GTS601	April 14, 2023	April 13, 2024
15	Horn Antenna (18-26.5GHz)	/	UG-598A/U	GTS664	Oct. 30, 2022	Oct. 29, 2023
16	Horn Antenna (26.5-40GHz)	A.H Systems	SAS-573	GTS665	Oct. 30, 2022	Oct. 29, 2023
17	FSV-Signal Analyzer (10Hz-40GHz)	Keysight	FSV-40-N	GTS666	March 13, 2023	March 12, 2024
18	Amplifier	/	LNA-1000-30S	GTS650	April 14, 2023	April 13, 2024
19	CDNE M2+M3-16A	HCT	30MHz-300MHz	GTS668	Dec. 20, 2022	Dec.19, 2023
20	Thermo meter	JINCHUANG	GSP-8A	GTS643	April 19, 2023	April 18, 2024

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	July 12, 2022	July 11, 2027
2	EMI Test Receiver	R&S	ESCI 7	GTS552	April 14, 2023	April 13, 2024
3	LISN	ROHDE & SCHWARZ	ENV216	GTS226	April 14, 2023	April 13, 2024
4	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
5	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
6	Thermo meter	JINCHUANG	GSP-8A	GTS642	April 19, 2023	April 18, 2024
7	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	April 14, 2023	April 13, 2024
8	ISN	SCHWARZBECK	NTFM 8158	GTS565	April 14, 2023	April 13, 2024
9	High voltage probe	SCHWARZBECK	TK9420	GTS537	April 14, 2023	April 13, 2024
10	Antenna end assembly	Weinschel	1870A	GTS560	April 14, 2023	April 13, 2024

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	April 14, 2023	April 13, 2024
2	EMI Test Receiver	R&S	ESCI 7	GTS552	April 14, 2023	April 13, 2024
3	PSA Series Spectrum Analyzer	Agilent	E4440A	GTS536	April 14, 2023	April 13, 2024
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	April 14, 2023	April 13, 2024
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	April 14, 2023	April 13, 2024
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	April 14, 2023	April 13, 2024
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	April 14, 2023	April 13, 2024
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	April 14, 2023	April 13, 2024
9	Thermo meter	JINCHUANG	GSP-8A	GTS641	April 19, 2023	April 18, 2024
10	EXA Signal Analyzer	Keysight	N9010B	MY6024116 8	Nov. 04, 2022	Nov. 03, 2023

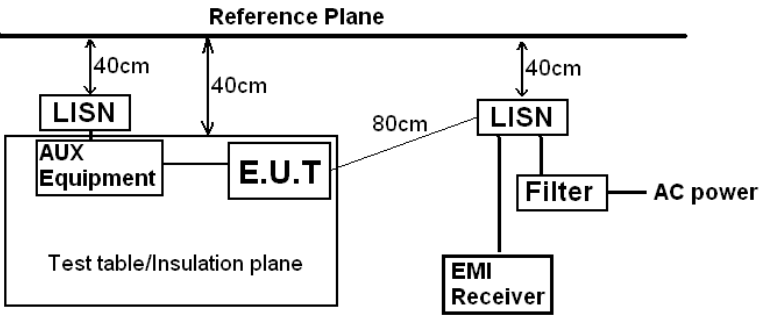
General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	KUMAO	SF132	GTS647	April 19, 2023	April 18, 2024

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
E.U.T Antenna:	
The antenna is PCB antenna, reference to the appendix II for details	

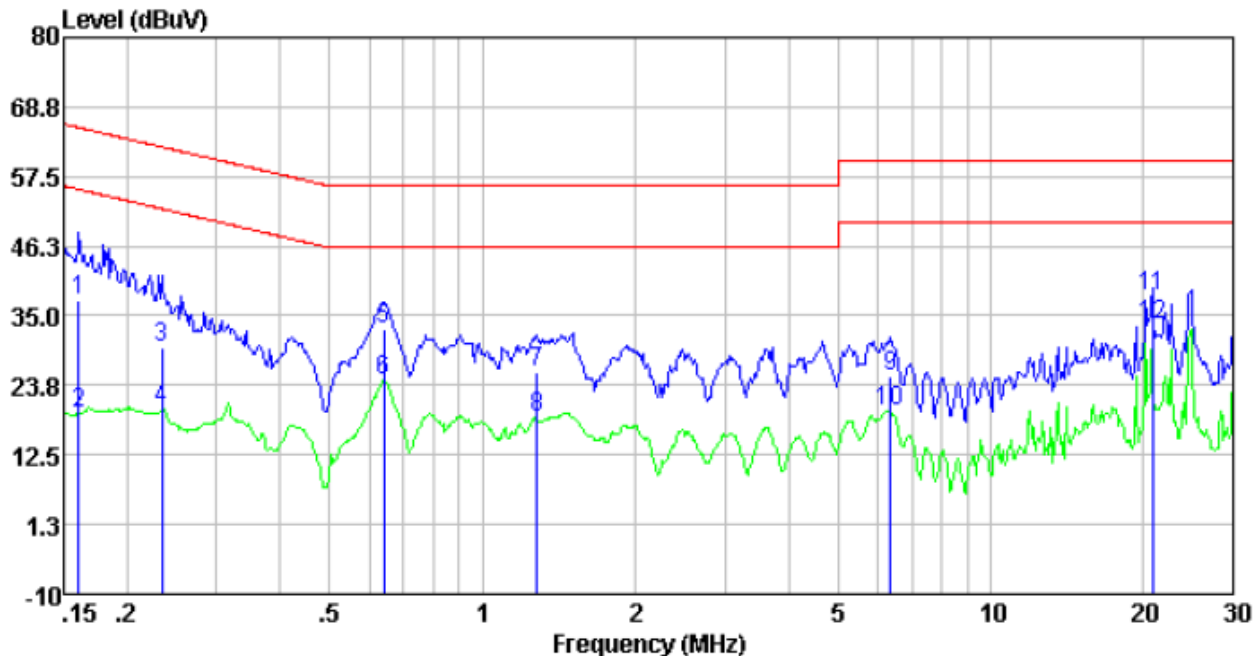
7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak		Average	
	0.15-0.5		66 to 56*		56 to 46*	
	0.5-5		56		46	
	5-30		60		50	
* Decreases with the logarithm of the frequency.						
Test setup:	 Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m					
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Measurement data:

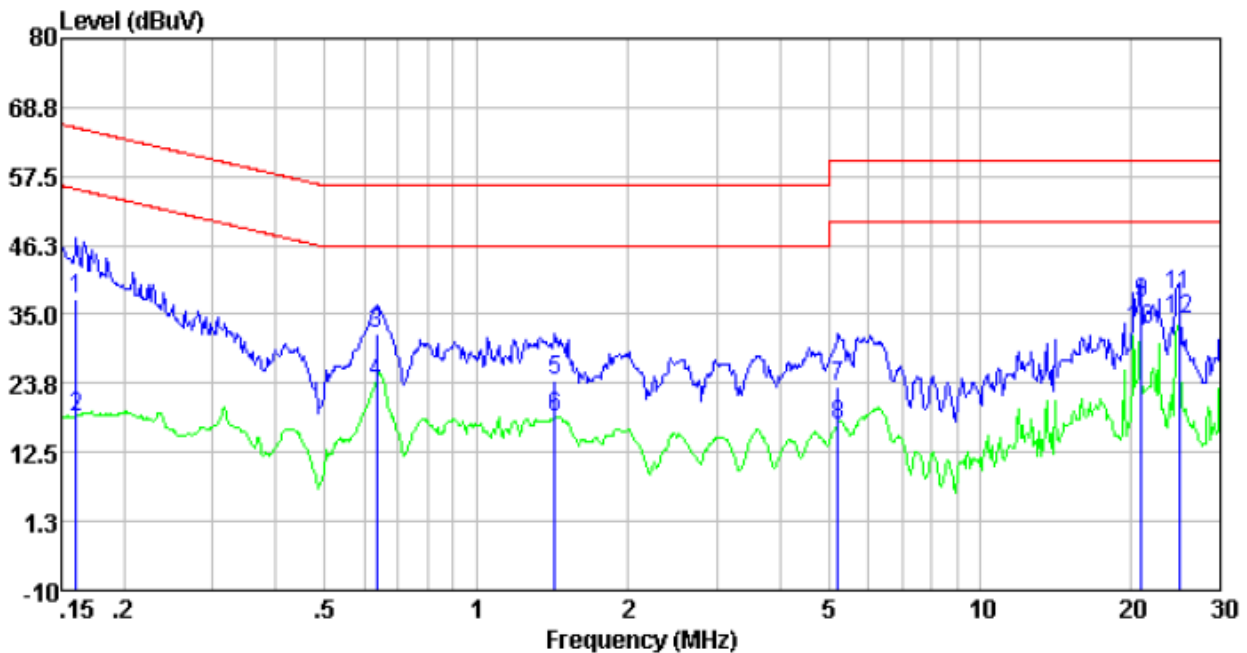
Pre-scan all test modes, found worst case at 2402MHz@ ANT 1, and so only show the test result of it.

Line:



Freq	Reading	LISN/ISN	Cable	Limit	Over		
level	factor	loss	Level	level	limit	Remark	
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.16	27.93	9.55	0.01	37.49	65.43	-27.94	QP
0.16	9.61	9.55	0.01	19.17	55.43	-36.26	Average
0.23	20.33	9.51	0.01	29.85	62.30	-32.45	QP
0.23	10.39	9.51	0.01	19.91	52.30	-32.39	Average
0.64	23.28	9.50	0.02	32.80	56.00	-23.20	QP
0.64	15.13	9.50	0.02	24.65	46.00	-21.35	Average
1.28	16.15	9.53	0.04	25.72	56.00	-30.28	QP
1.28	9.13	9.53	0.04	18.70	46.00	-27.30	Average
6.35	15.69	9.36	0.08	25.13	60.00	-34.87	QP
6.35	10.09	9.36	0.08	19.53	50.00	-30.47	Average
20.81	27.85	10.00	0.19	38.04	60.00	-21.96	QP
20.81	23.45	10.00	0.19	33.64	50.00	-16.36	Average

Neutral:

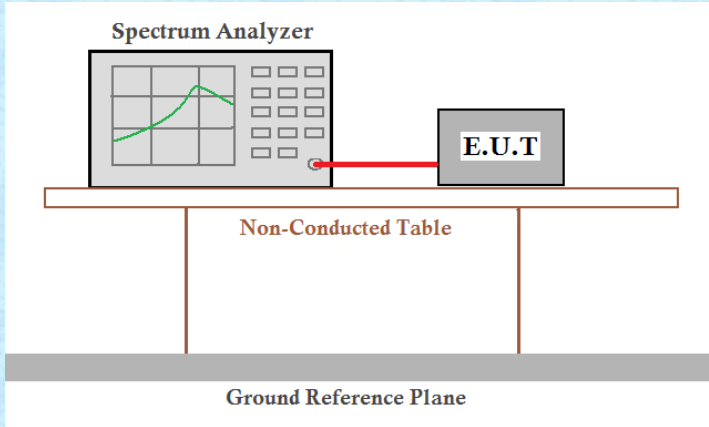


Freq	Reading	LISN/ISN	Cable	Level	Limit	Over	Remark
MHz	dBuV	factor	loss	dBuV	dBuV	limit	
		dB	dB			dB	
0.16	28.09	9.55	0.01	37.65	65.43	-27.78	QP
0.16	8.68	9.55	0.01	18.24	55.43	-37.19	Average
0.63	22.11	9.56	0.02	31.69	56.00	-24.31	QP
0.63	14.25	9.56	0.02	23.83	46.00	-22.17	Average
1.43	14.73	9.55	0.04	24.32	56.00	-31.68	QP
1.43	8.71	9.55	0.04	18.30	46.00	-27.70	Average
5.22	13.57	9.56	0.07	23.20	60.00	-36.80	QP
5.22	7.13	9.56	0.07	16.76	50.00	-33.24	Average
20.87	26.56	10.13	0.19	36.88	60.00	-23.12	QP
20.87	22.20	10.13	0.19	32.52	50.00	-17.48	Average
24.90	27.64	10.28	0.20	38.12	60.00	-21.88	QP
24.90	23.60	10.28	0.20	34.08	50.00	-15.92	Average

Notes:

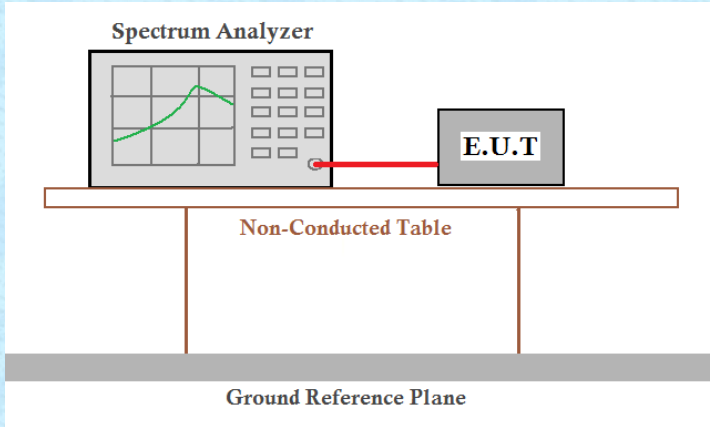
1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss

7.3 Conducted Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 15.247 Meas Guidance v05r02
Limit:	30dBm
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

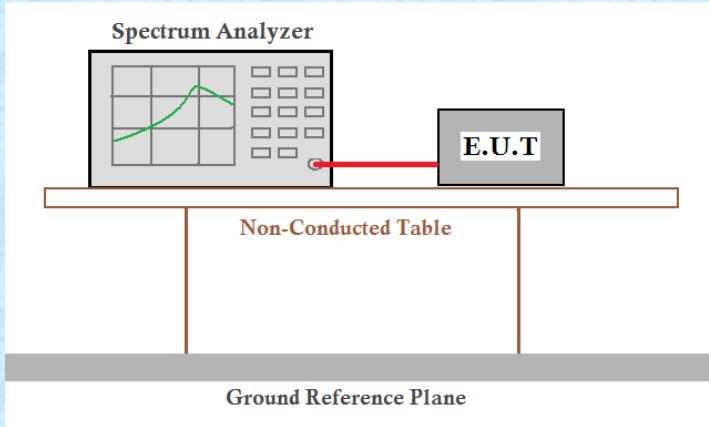
Measurement Data: The detailed test data see Appendix for 2.4G.

7.4 Channel Bandwidth

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 15.247 Meas Guidance v05r02
Limit:	>500KHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, showing a frequency spectrum on its screen, is connected to an Equipment Under Test (E.U.T.) by a red cable. Both the Spectrum Analyzer and the E.U.T. are positioned on a Non-Conducted Table. This table is supported by a Ground Reference Plane, which is represented by a thick grey bar at the bottom of the setup area.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix for 2.4G..

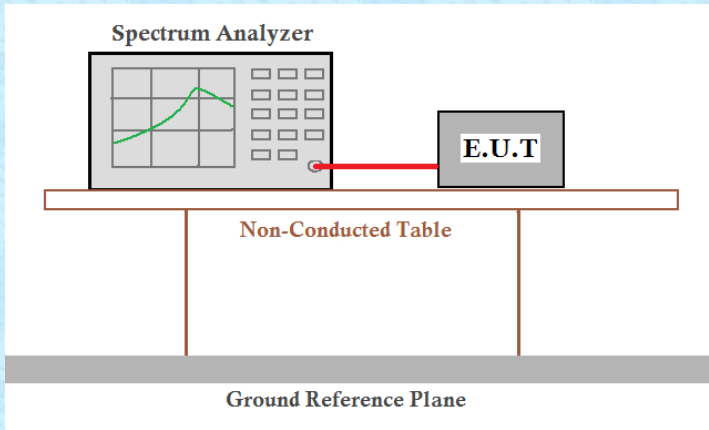
7.5 Power Spectral Density

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 15.247 Meas Guidance v05r02
Limit:	8dBm/3kHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a green trace on its screen, is connected to an E.U.T. (Equipment Under Test) by a red cable. Both the Spectrum Analyzer and the E.U.T. are positioned on a Non-Conducted Table. This table is supported by a Ground Reference Plane, which is represented by a thick grey bar at the bottom of the setup.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix for 2.4G..

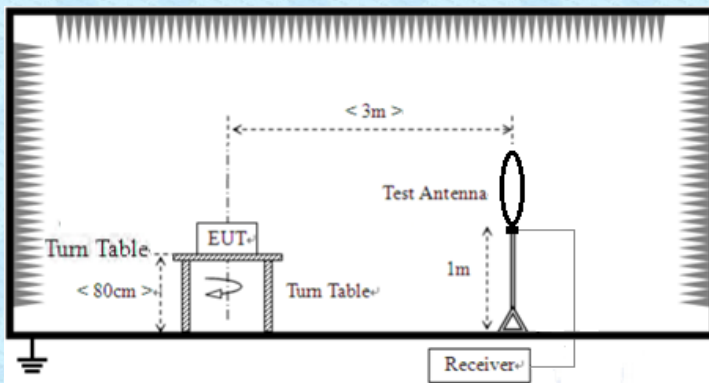
7.6 Spurious Emission in Non-restricted & restricted Bands

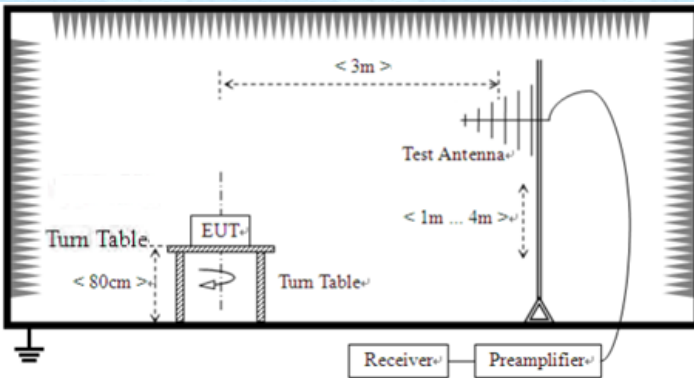
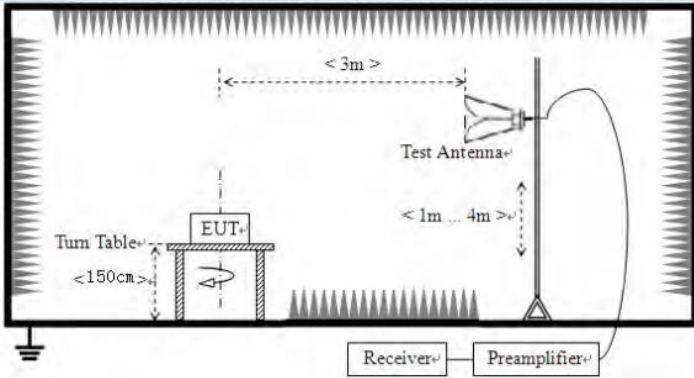
7.6.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 15.247 Meas Guidance v05r02
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs and sits on a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix for 2.4G..

7.6.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Note: For Duty cycle $\geq 98\%$, average detector set as above For Duty cycle $< 98\%$, average detector set as below: $VBW \geq 1 / T$					
Limit:	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	QP/PK/AV	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	30m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
		5000	Peak		
Test setup:	For radiated emissions from 9kHz to 30MHz				
					

	For radiated emissions from 30MHz to 1GHz  For radiated emissions above 1GHz 
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Measurement data:

Remark:

Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

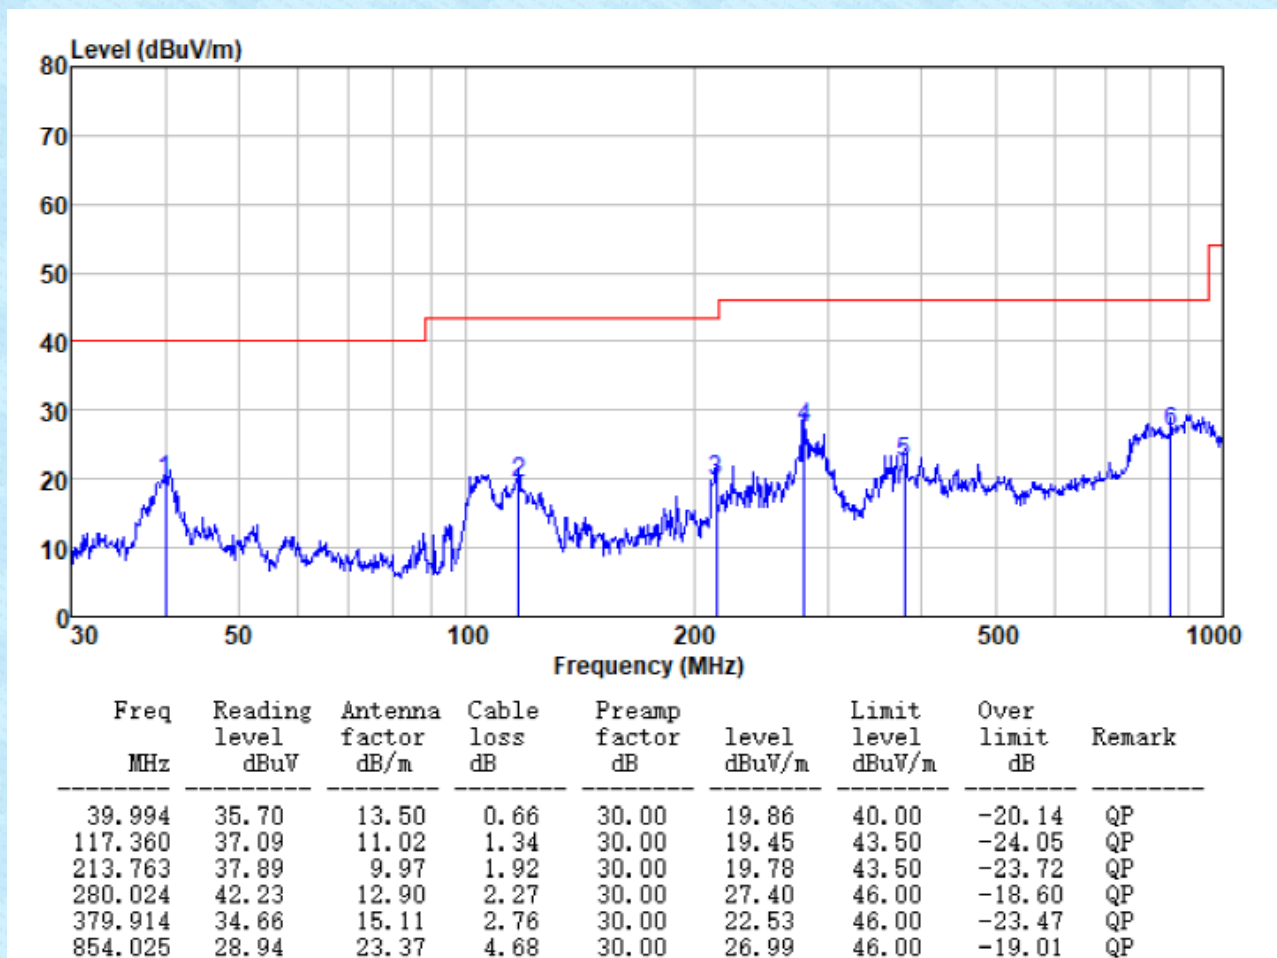
■ 9kHz~30MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

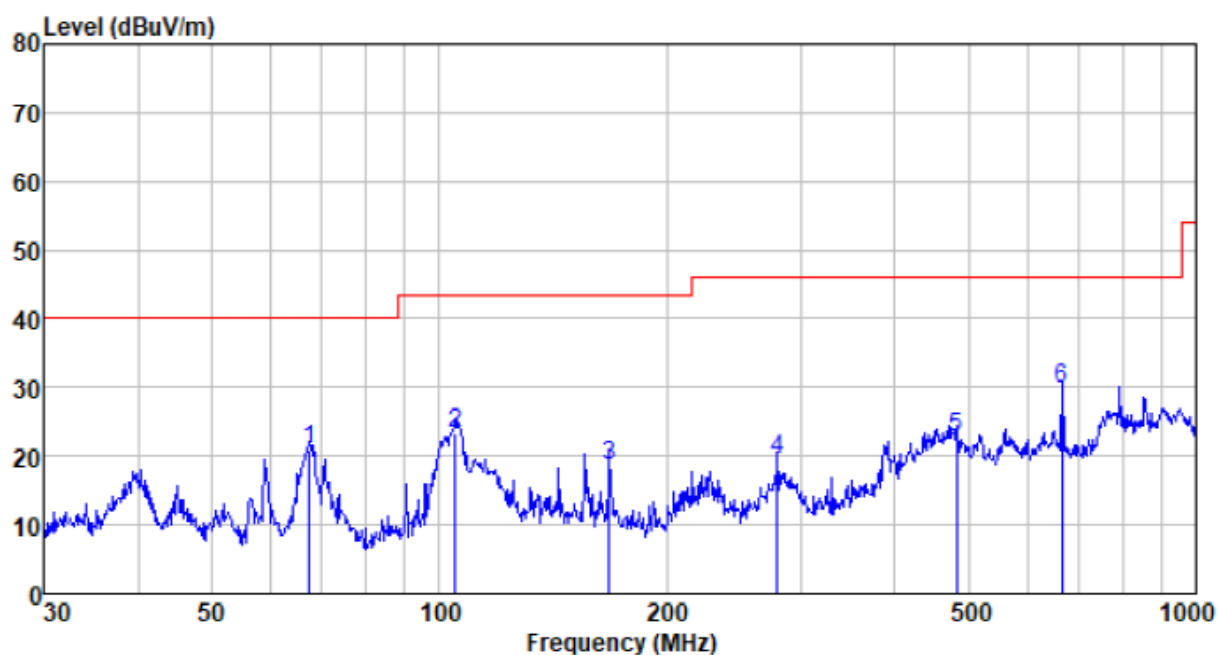
■ Below 1GHz

Pre-scan all test modes, found worst case at 2480MHz@ANT 1, and so only show the test result of it.

Horizontal:



Vertical:



Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
67.438	39.11	11.01	0.92	30.00	21.04	40.00	-18.96	QP
104.903	42.12	10.09	1.23	30.00	23.44	43.50	-20.06	QP
167.824	35.24	11.67	1.67	30.00	18.58	43.50	-24.92	QP
280.024	34.43	12.90	2.27	30.00	19.60	46.00	-26.40	QP
482.216	32.08	17.29	3.23	30.00	22.60	46.00	-23.40	QP
665.804	35.57	20.31	3.97	30.00	29.85	46.00	-16.15	QP

■ Above 1GHz

■ All 4 antennas were tested and found worst case at ANT 1, so only show the test result of ANT 1

■ Unwanted Emissions in Non-Restricted Frequency Bands

ANT 1:

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	35.69	31.22	4.63	37.68	33.86	74.00	-40.14	Vertical
7206.00	30.76	36.25	6.52	37.81	35.72	74.00	-38.28	Vertical
9608.00	30.52	37.97	7.98	37.93	38.54	74.00	-35.46	Vertical
4804.00	39.65	31.22	4.63	37.68	37.82	74.00	-36.18	Horizontal
7206.00	32.37	36.25	6.52	37.81	37.33	74.00	-36.67	Horizontal
9608.00	29.79	37.97	7.98	37.93	37.81	74.00	-36.19	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	24.81	31.22	4.63	37.68	22.98	54.00	-31.02	Vertical
7206.00	19.63	36.25	6.52	37.81	24.59	54.00	-29.41	Vertical
9608.00	18.81	37.97	7.98	37.93	26.83	54.00	-27.17	Vertical
4804.00	28.86	31.22	4.63	37.68	27.03	54.00	-26.97	Horizontal
7206.00	21.70	36.25	6.52	37.81	26.66	54.00	-27.34	Horizontal
9608.00	18.40	37.97	7.98	37.93	26.42	54.00	-27.58	Horizontal

Test channel:	Middle channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	35.53	31.33	4.69	37.62	33.93	74.00	-40.07	Vertical
7320.00	30.65	36.43	6.63	37.77	35.94	74.00	-38.06	Vertical
9760.00	30.42	38.10	8.03	37.95	38.60	74.00	-35.40	Vertical
4880.00	39.45	31.33	4.69	37.62	37.85	74.00	-36.15	Horizontal
7320.00	32.25	36.43	6.63	37.77	37.54	74.00	-36.46	Horizontal
9760.00	29.68	38.10	8.03	37.95	37.86	74.00	-36.14	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	24.69	31.33	4.69	37.62	23.09	54.00	-30.91	Vertical
7320.00	19.54	36.43	6.63	37.77	24.83	54.00	-29.17	Vertical
9760.00	18.73	38.10	8.03	37.95	26.91	54.00	-27.09	Vertical
4880.00	28.72	31.33	4.69	37.62	27.12	54.00	-26.88	Horizontal
7320.00	21.60	36.43	6.63	37.77	26.89	54.00	-27.11	Horizontal
9760.00	18.31	38.10	8.03	37.95	26.49	54.00	-27.51	Horizontal

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	35.89	31.41	4.77	37.56	34.51	74.00	-39.49	Vertical
7440.00	30.89	36.62	6.73	37.73	36.51	74.00	-37.49	Vertical
9920.00	30.64	38.27	8.08	37.98	39.01	74.00	-34.99	Vertical
4960.00	39.89	31.41	4.77	37.56	38.51	74.00	-35.49	Horizontal
7440.00	32.53	36.62	6.73	37.73	38.15	74.00	-35.85	Horizontal
9920.00	29.92	38.27	8.08	37.98	38.29	74.00	-35.71	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	25.02	31.41	4.77	37.56	23.64	54.00	-30.36	Vertical
7440.00	19.77	36.62	6.73	37.73	25.39	54.00	-28.61	Vertical
9920.00	18.93	38.27	8.08	37.98	27.30	54.00	-26.70	Vertical
4960.00	29.10	31.41	4.77	37.56	27.72	54.00	-26.28	Horizontal
7440.00	21.85	36.62	6.73	37.73	27.47	54.00	-26.53	Horizontal
9920.00	18.55	38.27	8.08	37.98	26.92	54.00	-27.08	Horizontal

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

■ Unwanted Emissions in Restricted Frequency Bands

ANT 1:

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	44.75	27.14	2.81	38.64	36.06	74.00	-37.94	Horizontal
2390.00	48.80	27.37	2.91	38.84	40.24	74.00	-33.76	Horizontal
2310.00	45.47	27.14	2.81	38.64	36.78	74.00	-37.22	Vertical
2390.00	50.04	27.37	2.91	38.84	41.48	74.00	-32.52	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	34.87	27.14	2.81	38.64	26.18	54.00	-27.82	Horizontal
2390.00	36.22	27.37	2.91	38.84	27.66	54.00	-26.34	Horizontal
2310.00	34.95	27.14	2.81	38.64	26.26	54.00	-27.74	Vertical
2390.00	37.05	27.37	2.91	38.84	28.49	54.00	-25.51	Vertical

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	47.07	27.82	2.99	39.05	38.83	74.00	-35.17	Horizontal
2500.00	45.89	27.70	3.01	39.10	37.50	74.00	-36.50	Horizontal
2483.50	48.23	27.82	2.99	39.05	39.99	74.00	-34.01	Vertical
2500.00	47.07	27.70	3.01	39.10	38.68	74.00	-35.32	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	35.72	27.82	2.99	39.05	27.48	54.00	-26.52	Horizontal
2500.00	35.46	27.70	3.01	39.10	27.07	54.00	-26.93	Horizontal
2483.50	35.90	27.82	2.99	39.05	27.66	54.00	-26.34	Vertical
2500.00	35.54	27.70	3.01	39.10	27.15	54.00	-26.85	Vertical

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----