EMC & RF Test Report

As per

RSS-247 Issue 2:2017
&
FCC Part 15 Subpart 15.247

Unlicensed Intentional Radiators

on the

BTSM1US-URU

Issued by: **TÜV SÜD Canada Inc.**
11 Gordon Collins Dr,
Gormley, ON, L0H 1G0
Canada
Ph: (905) 883-7255

Testing produced for

See Appendix A for full client & EUT details.

Prepared by:

Min Xie,
Sr. Project Engineer

Reviewed by:

Amir Emami,
Project Engineer

Innovation, Science and Economic Development Canada
Registration # 6844A-3

Testing Laboratory Certificate #2955.02

R-14023, G-20072
C-14498, T-20060

Registration # CA6844

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Table of Contents

Table of Contents 2

Report Scope 3

Summary 4

- Test Results Summary 5
- Notes, Justifications, or Deviations 6
- Sample Calculation(s) 7

Applicable Standards, Specifications and Methods 8

Document Revision Status 9

Definitions and Acronyms 10

Testing Facility 11

- Calibrations and Accreditations 11
- Testing Environmental Conditions and Dates 12

Detailed Test Results Section 13

- 6dB Bandwidth of Digitally Modulated Systems 14
- Maximum Conducted Power 20
- Antenna Spurious Conducted Emissions 26
- Transmitter Spurious Radiated Emissions 34
- Power Spectral Density 80
- Power Line Conducted Emissions 85

Appendix A – EUT Summary 91

Appendix B – EUT and Test Setup Photos 93

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Report Scope

This report addresses the EMC verification testing and test results of the **BTSM1US-URU / BTSM1CA-URU** and is herein referred to as EUT (Equipment Under Test). The EUT was tested for compliance against the following standards:

RSS-247 Issue 2:2017

FCC Part 15 Subpart C 15.247

Test procedures, results, justifications, and engineering considerations, if any, follow later in this report.

This report does not imply product endorsement by any government, accreditation agency, or TÜV SÜD Canada Inc.

Opinions or interpretations expressed in this report, if any, are outside the scope of TÜV SÜD Canada Inc. accreditations. Any opinions expressed do not necessarily reflect the opinions of TÜV SÜD Canada Inc., unless otherwise stated.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Summary

The results contained in this report relate only to the item(s) tested.

EUT:	**BTSM1US-URU/ BTSM1CA-URU**
FCC Certification #, FCC ID:	2AYNV-BTSM1URU
Industry Canada Certification #, IC:	26577-BTSM1URU
EUT passed all tests performed	Yes
Tests conducted by	Min Xie
Report reviewed by	Amir Emami

For testing dates, see "Testing Environmental Conditions and Dates".

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Test Results Summary

Standard/Method	Description	Class/Limit	Result
FCC 15.203	Antenna Requirement	Unique	Pass See Justification
FCC 15.205 RSS-GEN (Table 6)	Restricted Bands for Intentional Operation	QuasiPeak Average	Pass
FCC 15.207 RSS-GEN (Table 3)	Power Line Conducted Emissions	QuasiPeak Average	Pass
FCC 15.209 RSS-GEN (Table 4)	Spurious Radiated Emissions	QuasiPeak Average	Pass
FCC 15.247(a)2 RSS-247 5.2(a)	6 dB Bandwidth	> 500 kHz	Pass
FCC 15.247(b)2 RSS-247 5.4(d)	Max Output Power	< 1 Watt	Pass
FCC 15.247(b)4 RSS-247 5.4(d)	Antenna Gain	< 6 dBi	Pass See Justifications
FCC 15.247(d) RSS-247 5.5	Antenna Conducted Spurious	< 20 dBc	Pass
FCC 15.247(e) RSS-247 5.2(b)	Spectral Density	< 8 dBm (3 kHz BW)	Pass
Overall Result			**Pass**

If the product as tested or otherwise complies with the specification, the EUT is deemed to comply with the requirement and is deemed a ‘PASS’ grade. If not ‘FAIL’ grade will be issued. Note that ‘PASS’ / ‘FAIL’ grade is independent of any measurement uncertainties. A ‘PASS’ / ‘FAIL’ grade within measurement uncertainty is marked with a ‘*’.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Notes, Justifications, or Deviations

The following notes, justifications for tests not performed or deviations from the above listed specifications apply:

There is no hardware difference between **BTSM1US-URU** and **BTSM1CA-URU.** The only difference is the duty cycle.

For the Antenna requirement specified in FCC 15.203 (RSS-247 section 5.4(d)), the unit uses a ceramic chip antenna (1.9 dBi peak gain - Taiyo Yuden, Model AH316M245001-T) which is less than the 6 dBi maximum gain.

For the Restricted Bands of operation, the EUT is designed to only operate between 2400 – 2483.5 MHz.

The EUT is not a hybrid system and FCC 15.247 (f) does not apply to it. However, the 15.247 (d) requirement of power density were met and are detailed later in this test report.

The EUT was mounted in three orthogonal axes to determine the worst-case radiated emissions. The worst-case results were obtained with the EUT mounted in the X-axis orientation. Worst case results are presented. See Appendix B for axis details.

The EUT runs on a rechargeable battery and has a USB dock for charging. While charging, under normal operation, the transmitter does not stream any raw data.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Sample Calculation(s)

Radiated Emission Test

E-Field Level = Received Signal + Antenna Factor + Cable Loss – Pre-Amp Gain
E-Field Level = 50dBµV + 10dB/m + 2dB – 20dB
E-Field Level = 42dBµV/m

Margin = Limit – E-Field Level
Margin = 50dBµV/m – 42dBµV/m
Margin = 8.0 dB (pass)

Power Line Conducted Emission Test

E-Field Level = Received Signal + Attenuation Factor + Cable Loss + LISN Factor
E-Field Level = 50dBµV + 10dB + 2.5dB + 0.5dB
E-Field Level = 63dBµV

Margin = Limit – E-Field Level
Margin = 73dBµV – 63dBµV
Margin = 10.0 dB (pass)

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Applicable Standards, Specifications and Methods

ANSI C63.4:2014	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10:2013	American National Standard For Testing Unlicensed Wireless Devices
CFR 47 FCC 15 Subpart C	Code of Federal Regulations – Radio Frequency Devices, Intentional Radiators
CISPR 32:2012	Electromagnetic Compatibility of Multimedia Equipment – Emission Requirements
FCC KDB 558074: 2019	FCC KDB 558074 Digital Transmission Systems, measurements and procedures
FCC KDB 447498: 2015	RF exposure procedures and equipment authorization policies for mobile and portable devices
ICES-003 Issue 6 2019	Digital Apparatus - Spectrum Management and Telecommunications Policy Interference-Causing Equipment Standard
RSS-GEN Issue 5 2019	General Requirements and Information for the Certification of Radio Apparatus
RSS-247 Issue 2:2017	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
ISO 17025:2017	General Requirements for the Competence of Testing and Calibration Laboratories

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Document Revision Status

Revision	Date	Description	Initials
000	March 11, 2021	Initial release	MX
001	Jun 1, 2021	Added model BTSM1CA-URU to the test report. A justification explaining the model is added to the Notes section.	MX

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Definitions and Acronyms

The following definitions and acronyms are applicable in this report.
See also ANSI C63.14.

DTS – Digital Transmission System
LISN – Line Impedance Stabilization Network
NCR – No Calibration Required
NSA – Normalized Site Attenuation
N/A – Not Applicable
RF – Radio Frequency

AE – Auxiliary Equipment. A digital accessory that feeds data into or receives data from another device (host) that in turn, controls its operation.

Antenna Port – Port, other than a broadcast receiver tuner port, for connection of an antenna used for intentional transmission and/or reception of radiated RF energy.

BW – Bandwidth. Unless otherwise stated, this refers to the 6 dB bandwidth.

EMC – Electro-Magnetic Compatibility. The ability of an equipment or system to function satisfactorily in its electromagnetic environment without introducing intolerable electromagnetic disturbances to anything in that environment.

EMI – Electro-Magnetic Immunity. The ability to maintain a specified performance when the equipment is subjected to disturbance (unwanted) signals of specified levels.

EUT – Equipment Under Test. A device or system being evaluated for compliance that is representative of a product to be marketed.

ITE – Information Technology Equipment. Has a primary function of entry, storage, display, retrieval, transmission, processing, switching, or control of data and/or telecommunication messages and which may be equipped with one or more ports typically for information transfer.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Testing Facility

Testing for EMC on the EUT was carried out at TÜV SÜD Canada testing lab near Toronto, Ontario. The testing lab has calibrated 3m semi-anechoic chambers which allow measurements on a EUT that has a maximum width or length of up to 2m and a height of up to 3m. The testing lab also has a calibrated 10m Open Area Test Site (OATS). The chambers are equipped with a turntable that is capable of testing devices up to 5000lb in weight and are equipped with a mast that controls the polarization and height of the antenna. Control of the mast occurs in the control room adjoining the shielded chamber. This facility is capable of testing products that are rated for single phase or 3-phase AC input and DC capability is also available. Radiated emission measurements are performed using a BiLog antenna and a Horn antenna where applicable. Conducted emissions, unless otherwise stated, are performed using a LISN and using the vertical ground plane if applicable.

Calibrations and Accreditations

The 3m semi-anechoic chamber is registered with Federal Communications Commission (FCC, CA6844), Innovation, Science and Economic Development Canada (ISED, 6844A-3) and Voluntary Control Council for Interference (VCCI, R-14023, G-20072, C-14498, and T-20060). This chamber was calibrated for Normalized Site Attenuation (NSA) using test procedures outlined in ANSI C63.4 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The chamber is lined with ferrite tiles and absorption cones to minimize any undesired reflections. The NSA data is kept on file at TÜV SÜD Canada. For radiated susceptibility testing, a 16 point field calibration has been performed on the chamber. The field uniformity data is kept on file at TÜV SÜD Canada. TÜV SÜD Canada Inc. is accredited to ISO 17025 by A2LA with Testing Certificate #2955.02. The laboratory's current scope of accreditation listing can be found as listed on the A2LA website. All measuring equipment is calibrated on an annual or biennial basis as listed for each respective test.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Testing Environmental Conditions and Dates

Following environmental conditions were recorded in the facility during time of testing

Date	Test	Initials	Temperature (ºC)	Humidity (%)	Pressure (kPa)
Mar 25 & 27, 2020	Radiated Emissions	MX	22 – 24	23 – 27	101 – 102
Mar 14, 2021	Radiated Emissions	MX	21.5	19.1	99.2
Mar 31, 2020	Antenna Conducted (6 dB BW, 99% BW, PSD)	MX	20.8	34.2	101.6
Jan 16, 2021	Antenna Conducted (Avg Pwr, 30 dBc)	MX	22.5	23.8	100.7
Mar 16, 2021	Power Line Conducted Emissions	MX	21.2	18.2	97.7

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Detailed Test Results Section

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

6dB Bandwidth of Digitally Modulated Systems

Purpose

The purpose of this test is to ensure that the bandwidth occupied exceeds a stated minimum. This helps ensure the utilization of the frequency allocation is sufficiently wide. This also helps prevent corruption of data by ensuring adequate data separation to distinguish the reception of the intended information.

Limits and Method

The limit is as specified in FCC Part 15.247(a)2 and RSS-247 5.2(a).

Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz. This should be measured with a 100 kHz RBW and a 300 kHz VBW.

The method is given in FCC KDB 558074 Section 8.1 and ANSI C63.10.

Results

The EUT passed. The minimum measured 6 dB BW was of all modulations were greater than 500 kHz.

Additional 99% bandwidth were measured for information purpose. There is no limit on 99% bandwidth.

The EUT supports three modes of operation, 802.11 b/g/n. The n-mode only support 20 MHz nominal bandwidth. Three Channels for each mode were measured. The following tables show the 6 dB and 99% bandwidth: The external attenuator and cable loss were accounted for as reference offset in the spectrum analyzer.

Bandwidth - B-Mode					
Channel	Frequency (MHz)	6 dB BW (MHz)	99% BW (MHz)	6 dB BW Limit (kHz)	Pass/Fail
1	2412	9.551	14.30	500	Pass
6	2437	9.783	14.30	500	Pass
11	2462	9.262	14.30	500	Pass

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Bandwidth G-Mode					
Channel	Frequency (MHz)	6 dB BW (MHz)	99% BW (MHz)	6 dB BW Limit (kHz)	Pass/Fail
1	2412	15.687	16.44	500	Pass
6	2437	15.282	16.44	500	Pass
11	2462	15.398	16.44	500	Pass

Bandwidth N-Mode					
Channel	Frequency (MHz)	6 dB BW (MHz)	99% BW (MHz)	6 dB Limit (kHz)	Pass/Fail
1	2412	15.977	17.48	500	Pass
6	2437	15.919	17.48	500	Pass
11	2462	15.803	17.48	500	Pass

Graphs

The graphs shown below show the OBW of the device during the conducted measurement operation of the EUT. This is measured by a max hold on the spectrum analyzer.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

6 dB Bandwidth B- Mode, High Channel

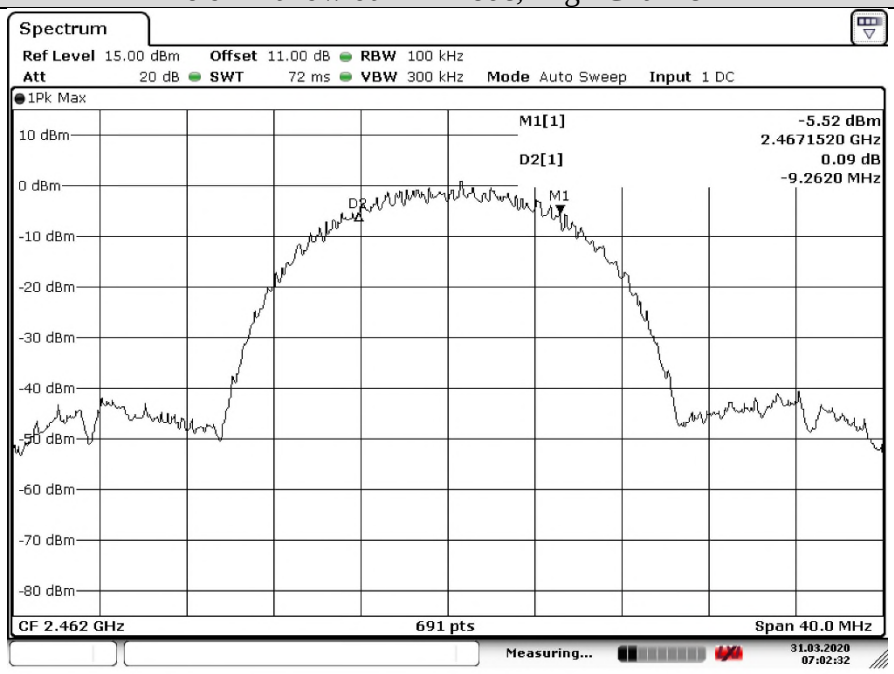

Date: 31.MAR.2020 07:02:32

99% Bandwidth B-Mode, High Channel

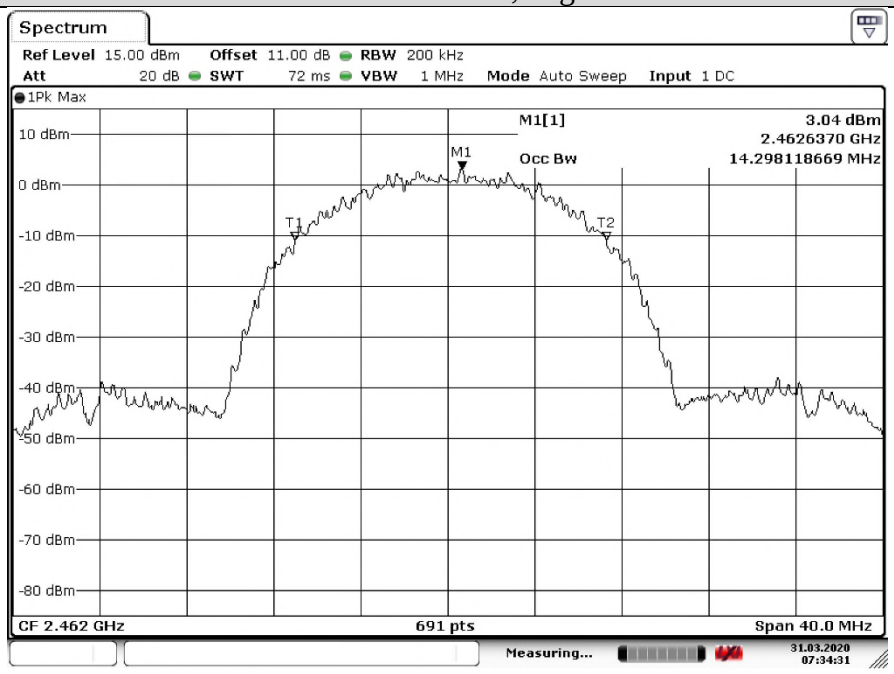

Date: 31.MAR.2020 07:34:32

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

6 dB Bandwidth G-Mode, Mid Channel

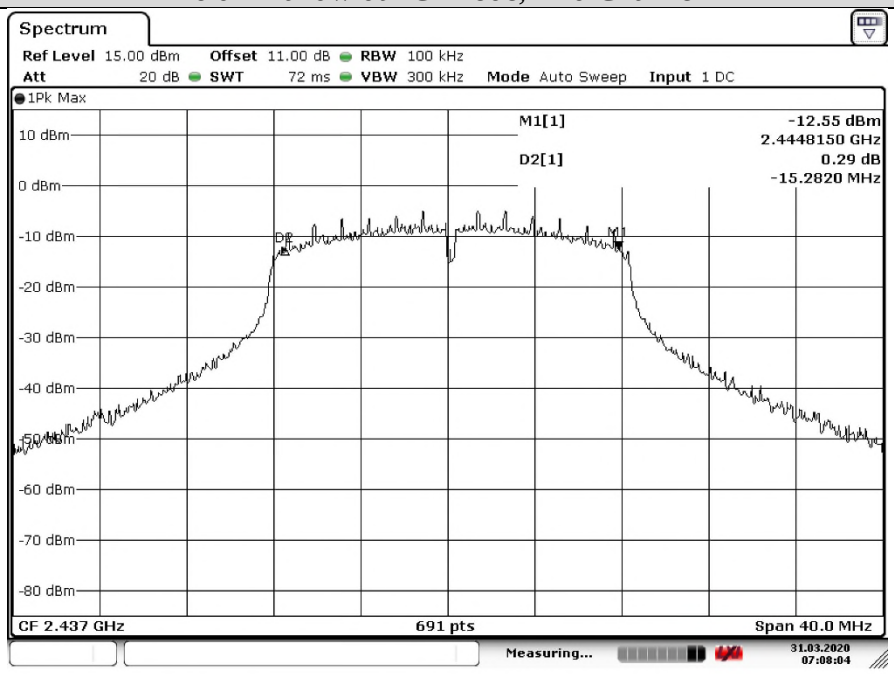

Date: 31.MAR.2020 07:08:04

99% Bandwidth G-Mode, Mid Channel

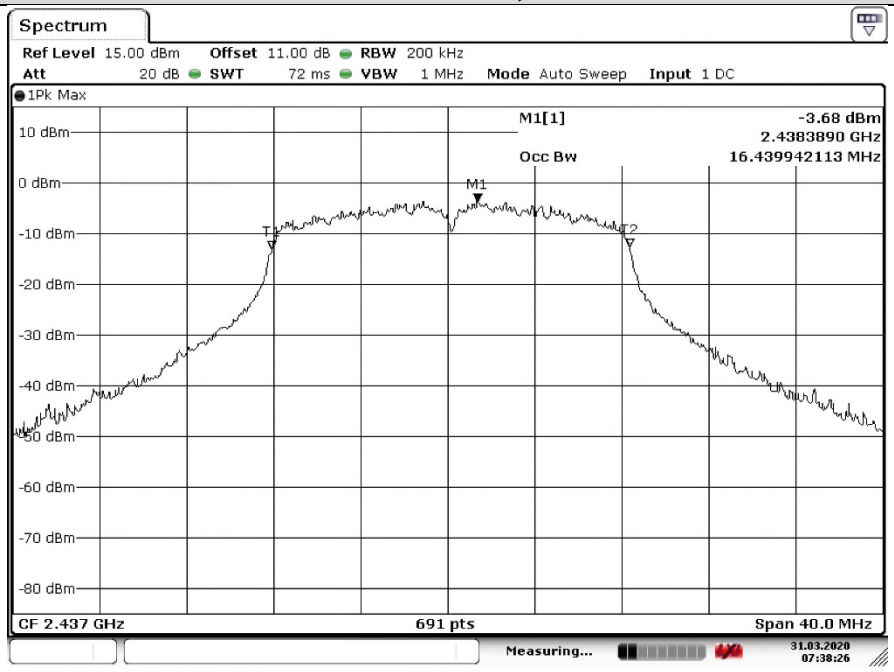

Date: 31.MAR.2020 07:38:26

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

6 dB Bandwidth N-Mode, High Channel

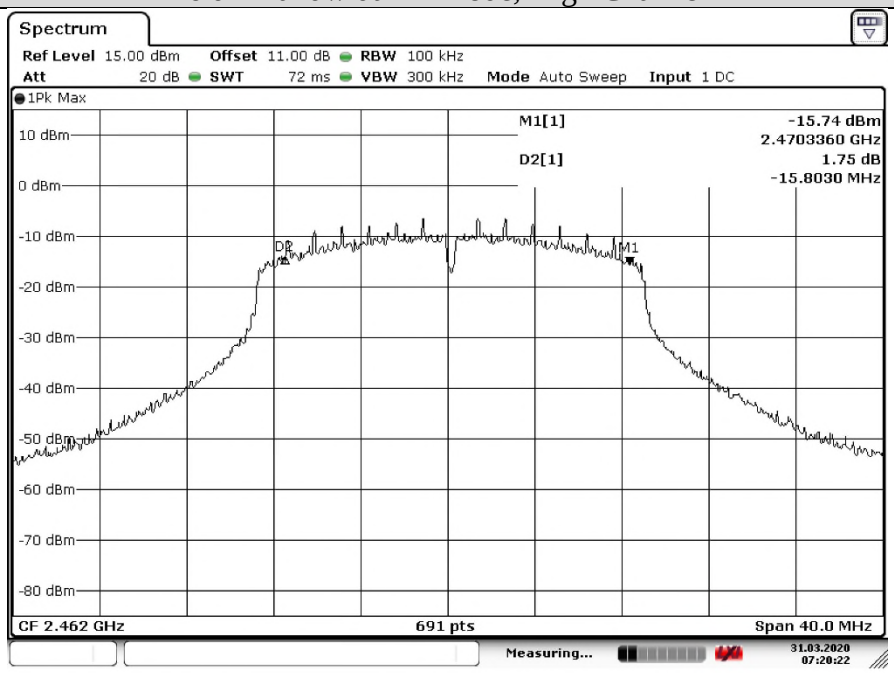

Date: 31.MAR.2020 07:20:22

99% Bandwidth N-Mode, High Channel

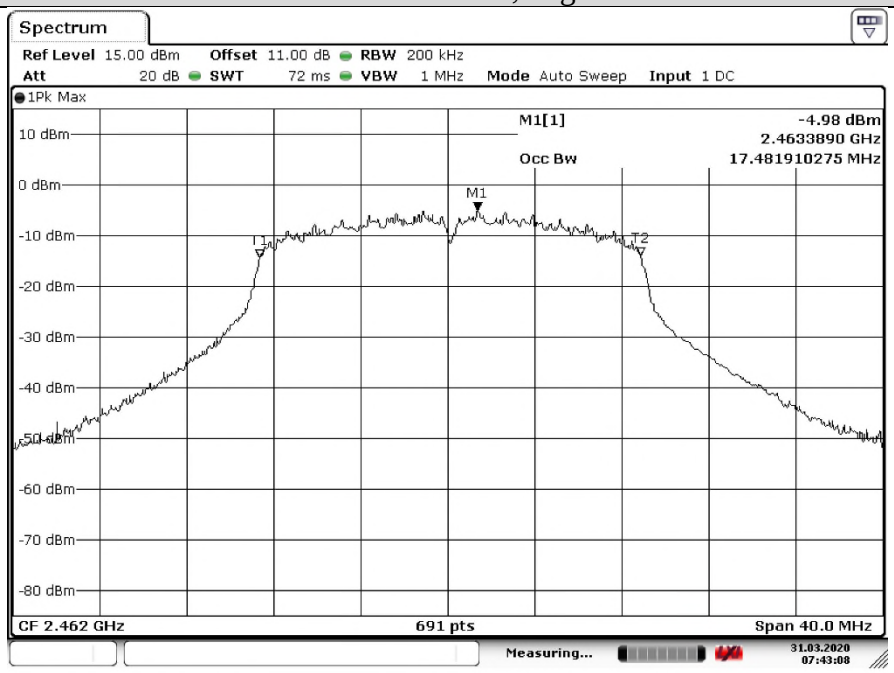

Date: 31.MAR.2020 07:43:08

Note: See 'Appendix B – EUT & Test Setup Photos' for photos showing the test set-up.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Test Equipment List

Equipment	Model No.	Manufacturer	Last Calibration Date	Next Calibration Date	Asset #
Spectrum Analyzer	ESR 26	Rohde & Schwarz	Mar. 6, 2020	Mar. 6, 2022	GEMC 341
Attenuator 10 dB	8493B	Agilent	NCR	NCR	GEMC 133

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Maximum Conducted Power

Purpose

The purpose of this test is to ensure that the maximum power conducted to the radiating element does not exceed the limits specified. This ensures that if the end-user replaces the antenna, the maximum power does not exceed an amount which may create an excessive power level.

Limits and Method

The limits are defined in FCC Part 15.247(b) and RSS-247 5.4(d).
For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands, the peak limit is 1 watt (30 dBm).

The method is given in ANSI C63.10 Clause 11.9.2.2.2 Integrated AVGSA-1.

Results

The EUT passed. The EUT was set to transmit at maximum power. The EUT supports three modes of operation, 802.11 b/g/n. The n-mode only support 20 MHz nominal bandwidth. Three Channels for each mode were measured. The following tables show the peak power: The external attenuator and cable loss were accounted for as reference offset in the spectrum analyzer.

Power B-Mode					
Channel	Frequency (MHz)	Average Power (dBm)	Average Power (mW)	Limit (mW)	Pass/Fail
1	2412	8.87	7.71	1000	Pass
6	2437	10.08	10.19	1000	Pass
11	2462	10.58	11.43	1000	Pass

Power G-Mode					
Channel	Frequency (MHz)	Average Power (dBm)	Average Power (mW)	Limit (mW)	Pass/Fail
1	2412	7.72	5.92	1000	Pass
6	2437	9.84	9.64	1000	Pass
11	2462	8.99	7.93	1000	Pass

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Power N-Mode					
Channel	Frequency (MHz)	Power (dBm)	Power (mW)	Limit (mW)	Pass/Fail
1	2412	6.77	4.75	1000	Pass
6	2437	8.73	7.46	1000	Pass
11	2462	8.26	6.70	1000	Pass

Graphs

The graphs shown below show the average power output of the device during the conducted measurement operation of the EUT.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Average Power, B-Mode

High Channel

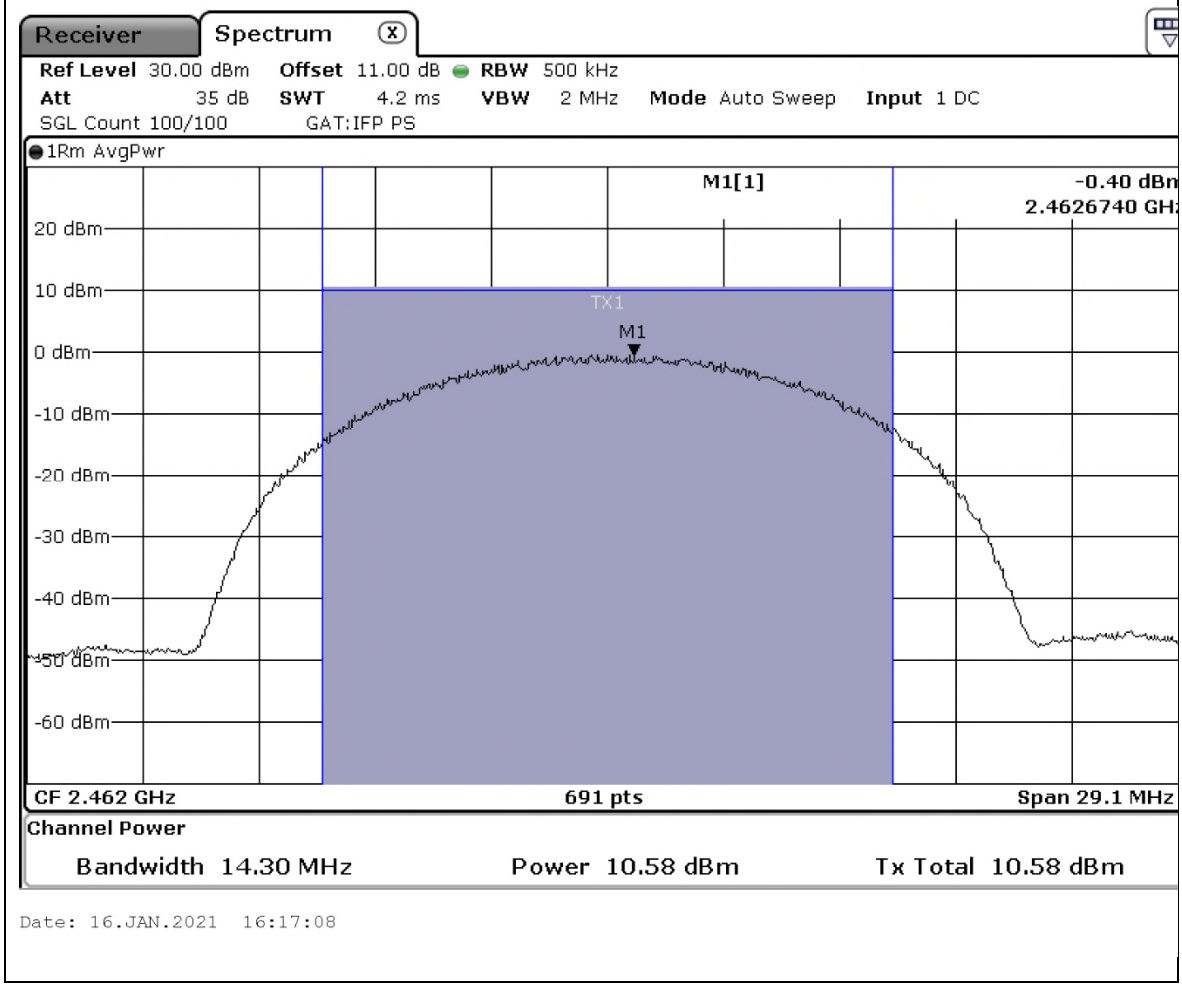

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Average Power, G-Mode

Mid Channel

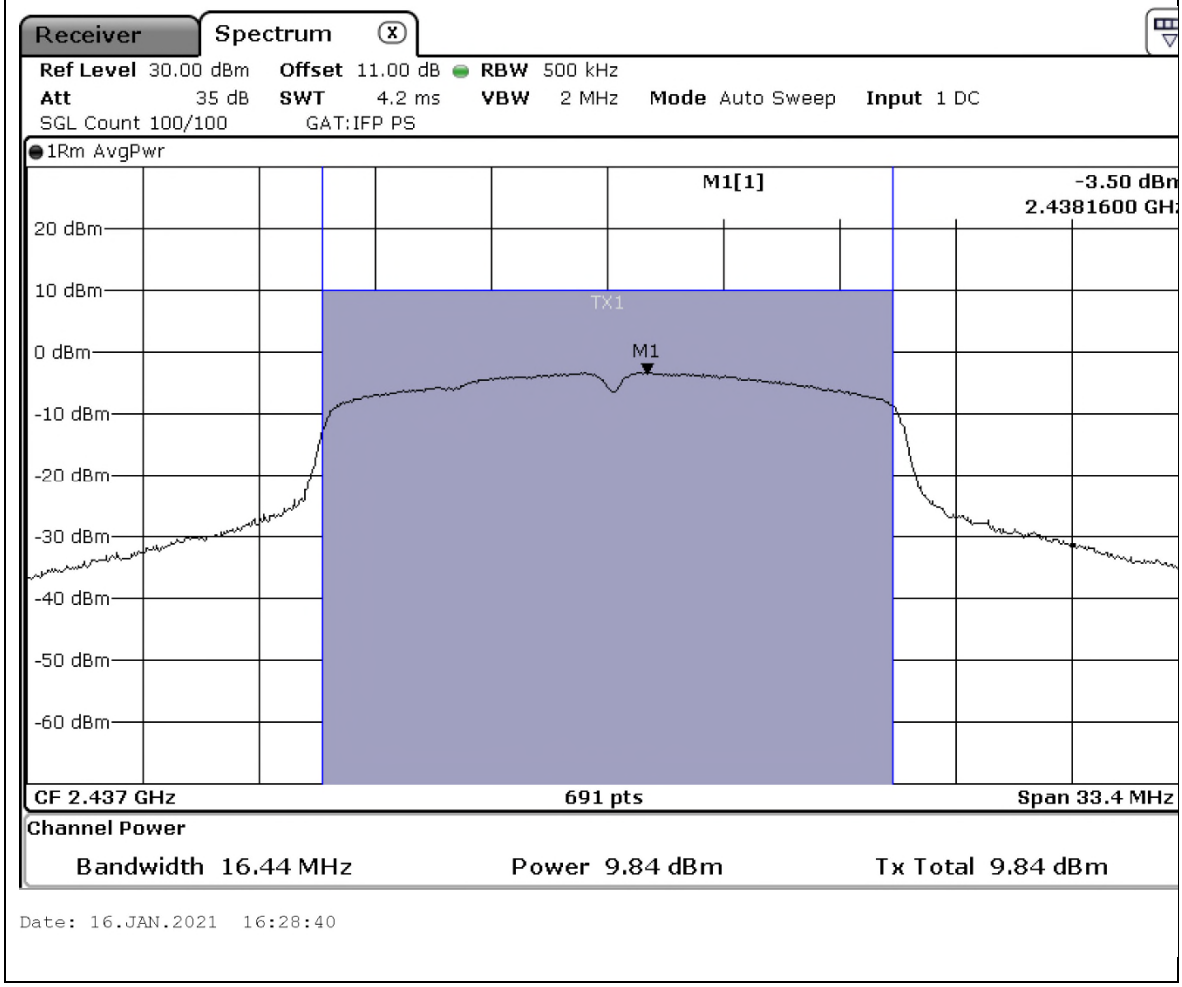

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Average Power, N-Mode

Mid Channel

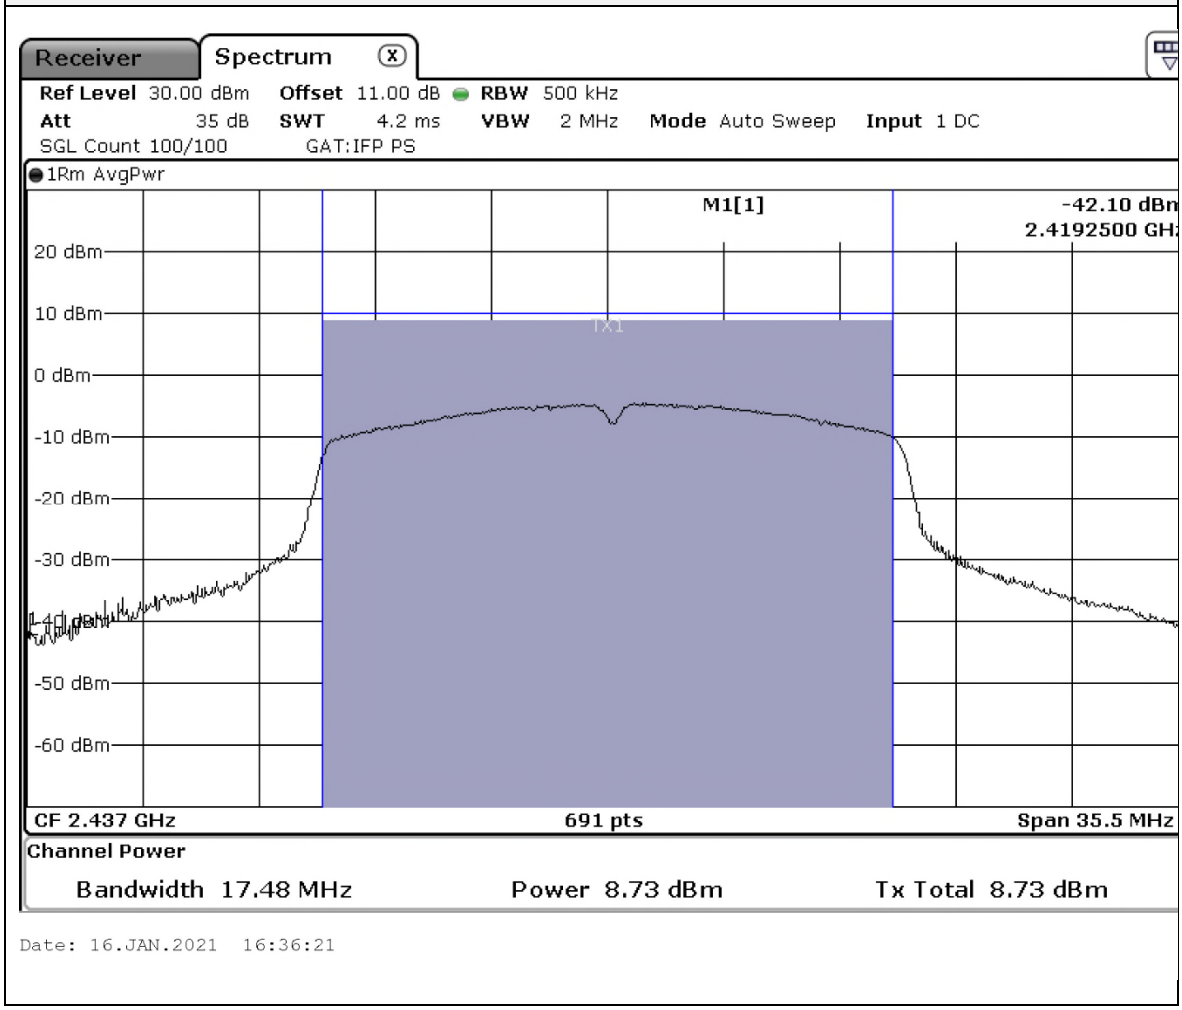

See 'Appendix B – EUT and Test Setup Photos' for photos showing the test set-up.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Test Equipment List

Equipment	Model No.	Manufacturer	Last Calibration Date	Next Calibration Date	Asset #
Spectrum Analyzer	ESR 26	Rohde & Schwarz	Mar. 6, 2020	Mar. 6, 2022	GEMC 341
Attenuator 10 dB	8493B	Agilent	NCR	NCR	GEMC 133

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Antenna Spurious Conducted Emissions

Purpose

The purpose of this test is to ensure that the maximum power conducted to the radiating element at frequencies outside of the authorized spectrum does not exceed the limits specified. This ensures that the only the intended signal is delivered to the radiating element.

Limits and Method

The limits are defined in 15.247(d) and RSS-247 5.5. In any 100 kHz band, the peak spurious harmonics emissions must be at least 30 dB below the fundamental. Spurious Conducted emissions are to be evaluated up to the 10th harmonic. This -30 dBc requirement also applies at the 'band edge' or 2.4 GHz and 2.4835 GHz.

The method is given in FCC KDB 558074 Section 11 and ANSI C63.10

Results

The EUT passed. Low, middle and high bands were measured. The worst case is presented as a graph for the spectrum. The -30 dBc requirement is shown for the lower band edge at 2.4 GHz in the low band and also for the higher band edge at 2.4835 GHz in the high band.

Graphs

The graphs shown below show the power output of the device during the conducted measurement operation of the EUT.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

B-Mode, Reference Level: 0.45 dBm

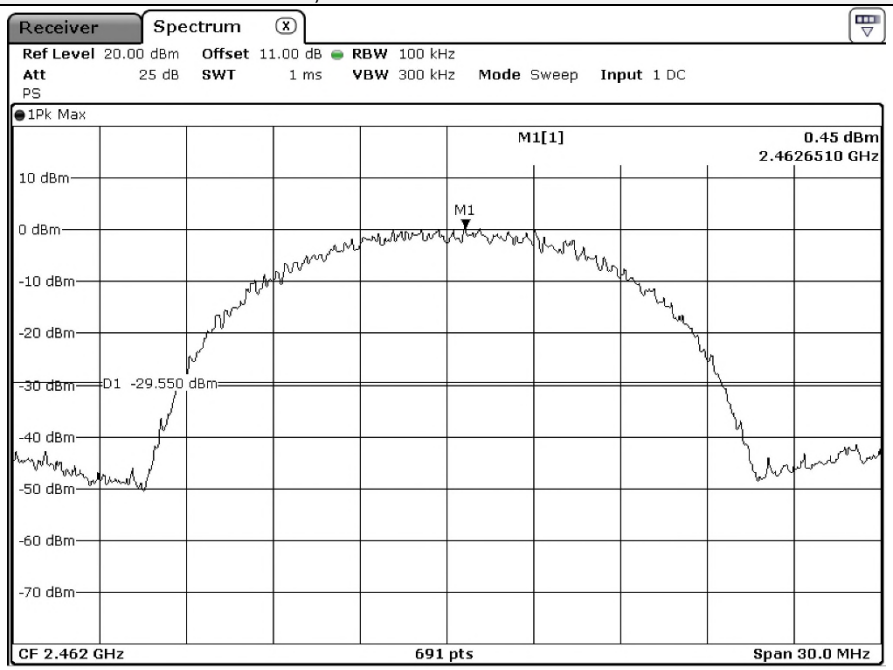

Date: 16.JAN.2021 17:24:07

B-Mode, 9kHz – 25GHz

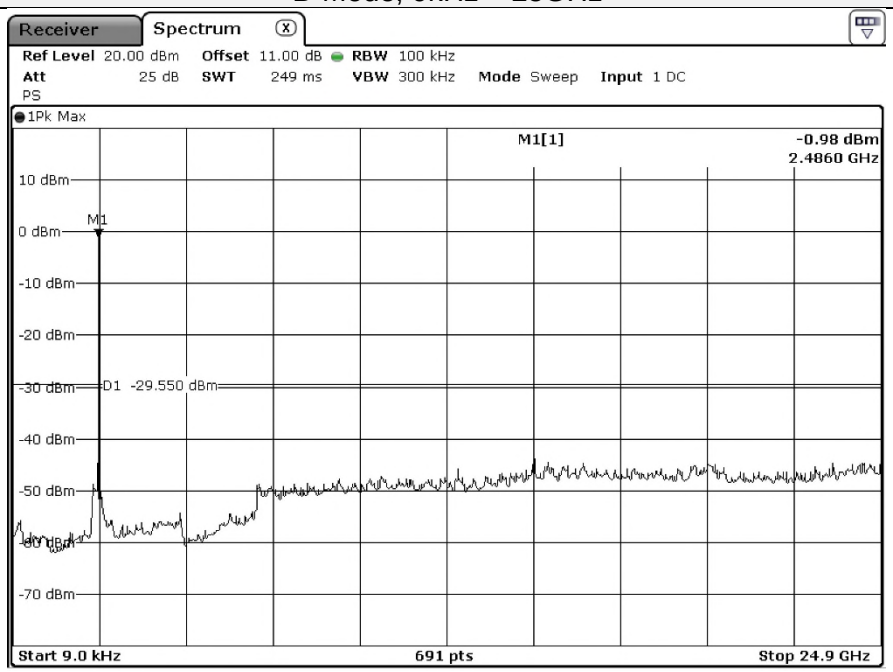

Date: 16.JAN.2021 17:26:28

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

B-Mode, 2400 MHz Band Edge

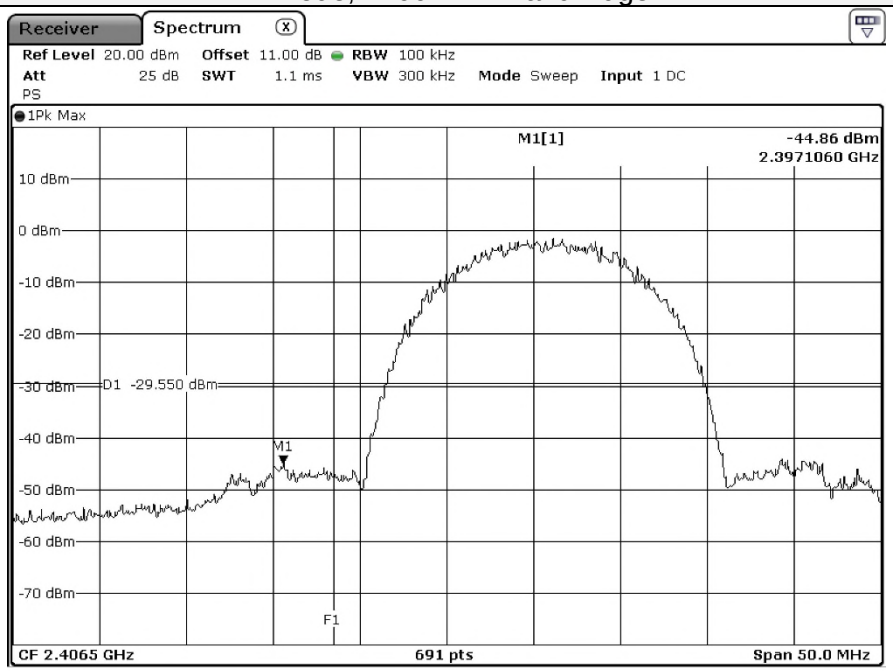

Date: 16.JAN.2021 17:30:40

B-Mode, 2483.5 MHz Band Edge

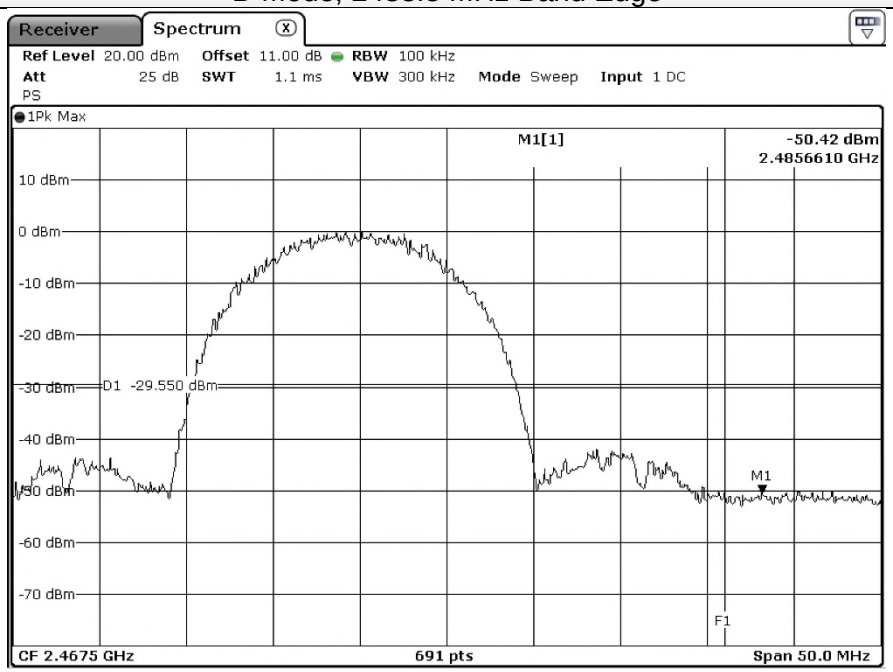

Date: 16.JAN.2021 17:25:35

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

G-Mode, Reference Level: -0.37 dBm

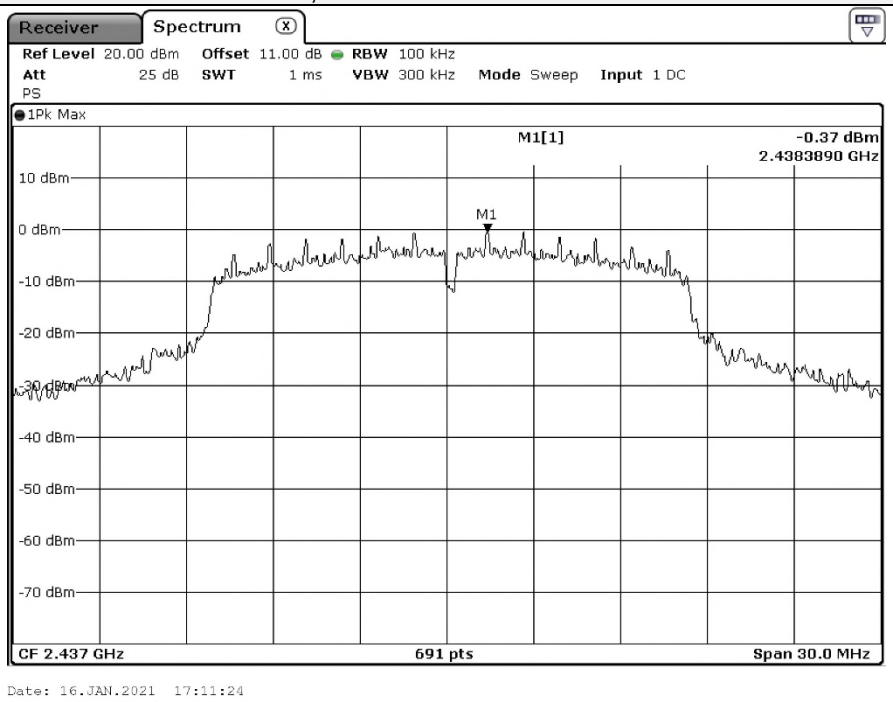

G-Mode, 9kHz – 25GHz

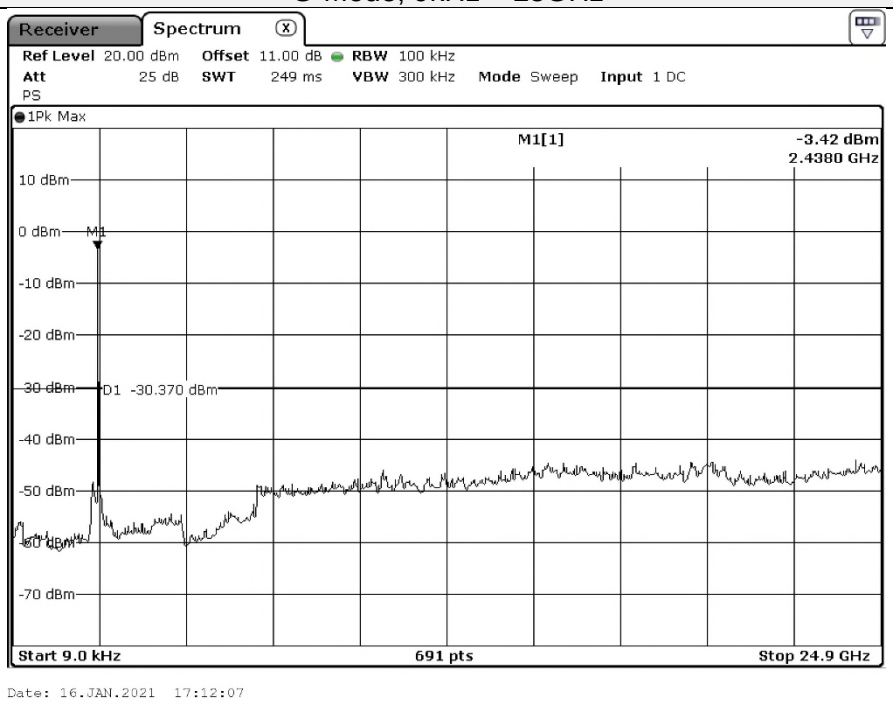

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

G-Mode, 2400 MHz Band Edge

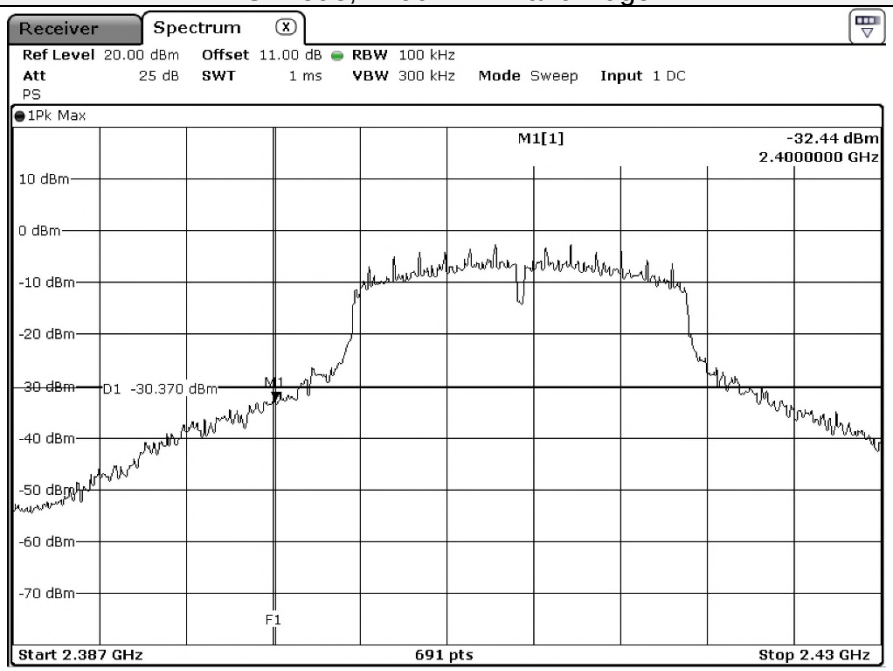

Date: 16.JAN.2021 17:16:39

G-Mode, 2483.5 MHz Band Edge

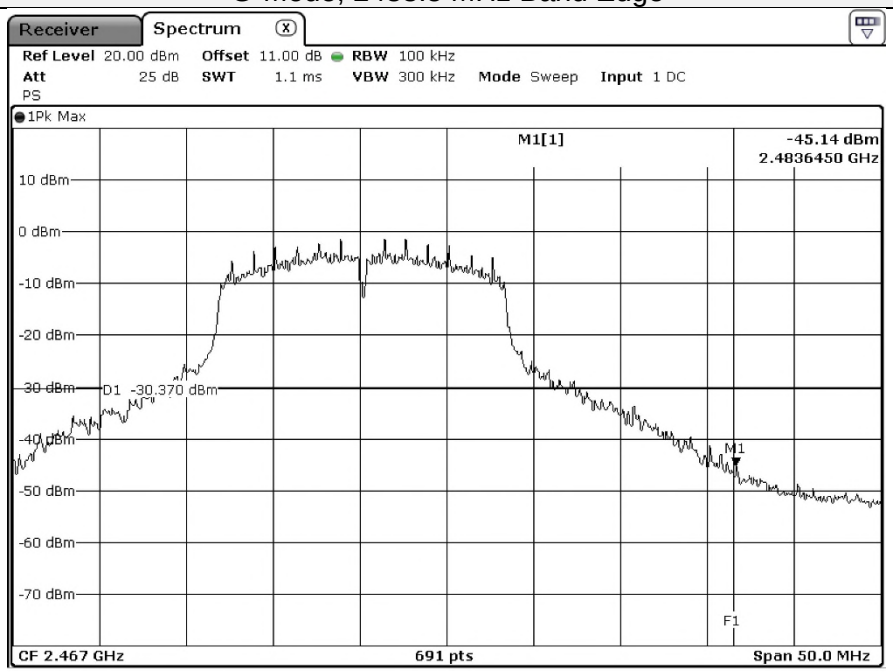

Date: 16.JAN.2021 17:21:58

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

N-Mode, Reference Level: -1.55 dBm

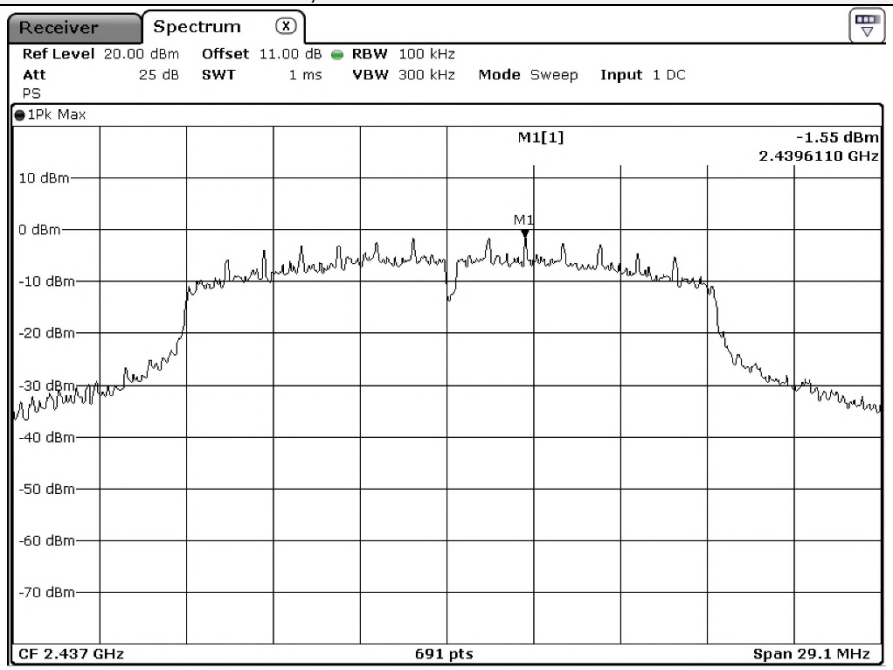

Date: 16.JAN.2021 16:57:55

N-Mode, 9kHz – 25GHz

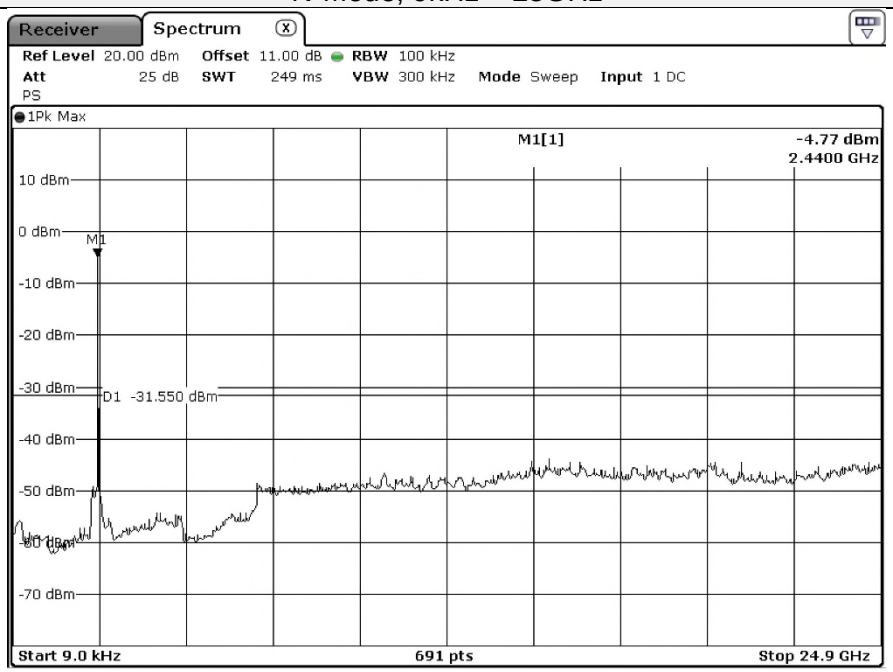

Date: 16.JAN.2021 16:59:17

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

N-Mode, 2400 MHz Band Edge

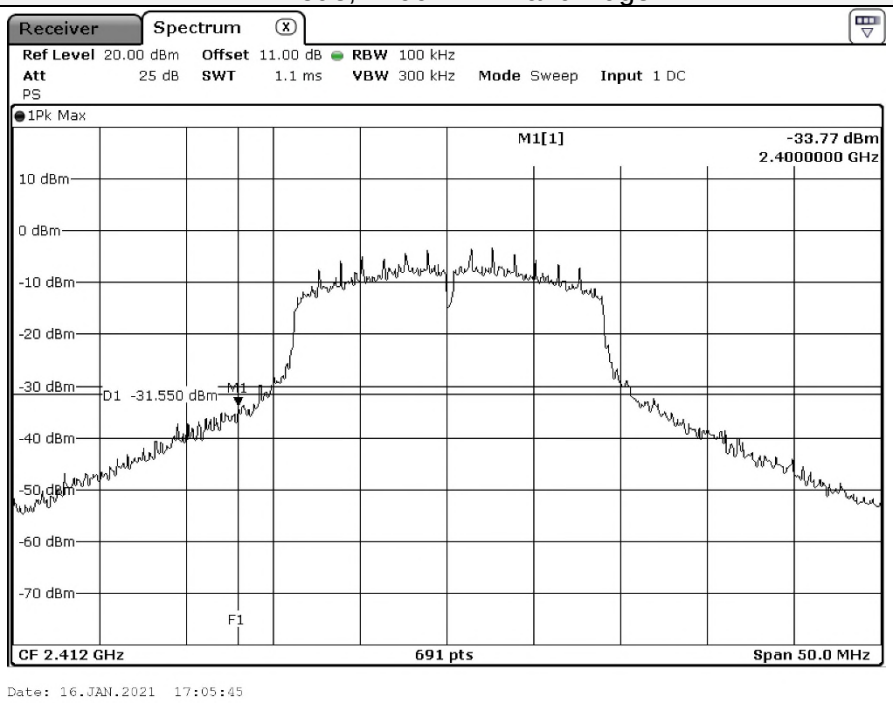

N-Mode, 2483.5 MHz Band Edge

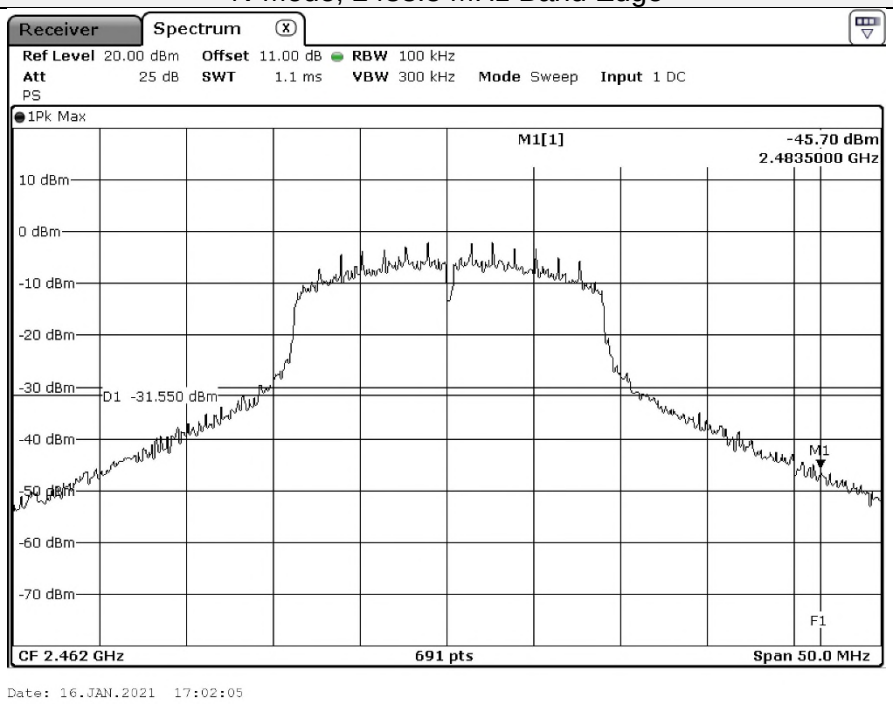

See 'Appendix B – EUT and Test Setup Photos' for photos showing the test set-up.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Test Equipment List

Equipment	Model No.	Manufacturer	Last Calibration Date	Next Calibration Date	Asset #
Spectrum Analyzer	ESR 26	Rohde & Schwarz	Mar. 6, 2020	Mar. 6, 2022	GEMC 341
Attenuator 10 dB	8493B	Agilent	NCR	NCR	GEMC 133

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Transmitter Spurious Radiated Emissions

Purpose

The purpose of this test is to ensure that the RF energy unintentionally emitted from the EUT does not exceed the limits listed below as defined in the applicable test standard, as measured from a receiving antenna. This helps protect broadcast radio services such as television, FM radio, pagers, cellular telephones, emergency services, and so on, from unwanted interference.

Limits and Method

The method is as defined in FCC KDB 558074 Section 12.2 and ANSI C63.10.

The limits, as defined in 15.247(d) for unintentional radiated emissions, apply for those emissions that fall in the restricted bands, as defined in Section 15.205(a). These emissions must comply with the radiated emission limits specified in Section 15.209(a).

All unintentional emissions must also meet the 'Spurious Conducted Emissions' requirements of -20 dBc or greater. See also 'Antenna Spurious Conducted Emissions (-20dBc)' for further details.

Frequency	Field Strength Limit (µV/m)	Field Strength at 3m (dBµV/m)
0.009 MHz – 0.490 MHz	2400/F(kHz) [a] (at 300m)	128.5 to 93.8[a]
0.490 MHz – 1.705 MHz	24000/F(kHz)[a] (at 30m)	73.8 to 63.0[a]
1.705 MHz – 30 MHz	30[a] (at 30m)	69.5[a]
30 MHz – 88 MHz	100[a] (at 3m)	40.0[a]
88 MHz – 216 MHz	150[a] (at 3m)	43.5[a]
216 MHz – 960 MHz	200[a] (at 3m)	46.0[a]
Above 960 MHz	500[a] (at 3m)	54.0[a]
Above 1000 MHz	500[b] (at 3m)	54.0[b]
Above 1000 MHz	5 mV/m[c] (at 3m)	74.0[c]

[a]Limit is with Quasi Peak detector with bandwidths as defined in CISPR-16-1-1
[b]Limit is with 1 MHz measurement bandwidth and using an Average detector
[c]Limit is with 1 MHz measurement bandwidth and using a Peak detector

Based on ANSI C63.4 Section 4.2, if the Peak detector measurements do not exceed the Quasi-Peak limits, where defined, then the EUT is deemed to have passed the requirements.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Typical Radiated Emissions Setup

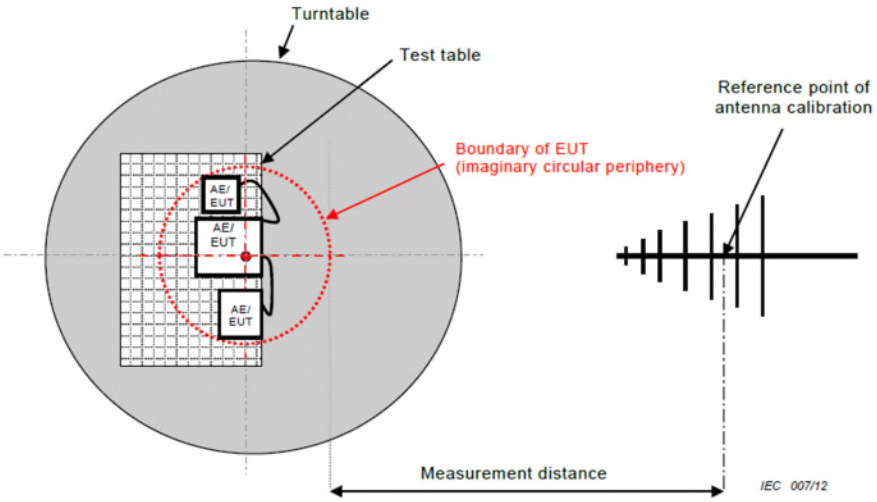

Measurement Uncertainty

The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2 and is ±5.67dB for 30MHz – 1GHz and ±4.58dB for 1GHz – 18GHz with a 'k=2' coverage factor and a 95% confidence level.

Preliminary Graphs

The graphs shown below are maximized peak measurement graphs measured with a resolution bandwidth greater than or equal to the final required detector over a full 0-360°. This peaking process is done as a worst case measurement and enables the detection of frequencies of concern for final measurement. For final measurements with the appropriate detector, where applicable, please refer to the tables under Final Measurements.

In accordance with FCC Part 15, Subpart A, Section 15.33, the device was scanned to the 10th harmonic (a minimum of 24.835 GHz).

Devices scanned may be scanned at alternate test distances and in accordance with FCC Part 15, Subpart A, Section 15.31, an extrapolation factor of 20 dB/decade was used above 30 MHz and 40 dB/decade below 30 MHz. For example for 1 meter measurements, an extrapolation factor 9.5 dB from 20 Log (1m / 3m) is applied.

Peak output power for low, middle and high channels and each in three orthogonal axes were checked. The worst case was used for the spurious emissions which was on the high channel and in the Z-axis.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Band-edge measurement graphs are shown for illustration purposes. See final measurement section for all measurements. Graphs for the worst-case, X-axis, are presented.

Spurious Emissions

9 kHz – 150 kHz
Peak Emission Graph

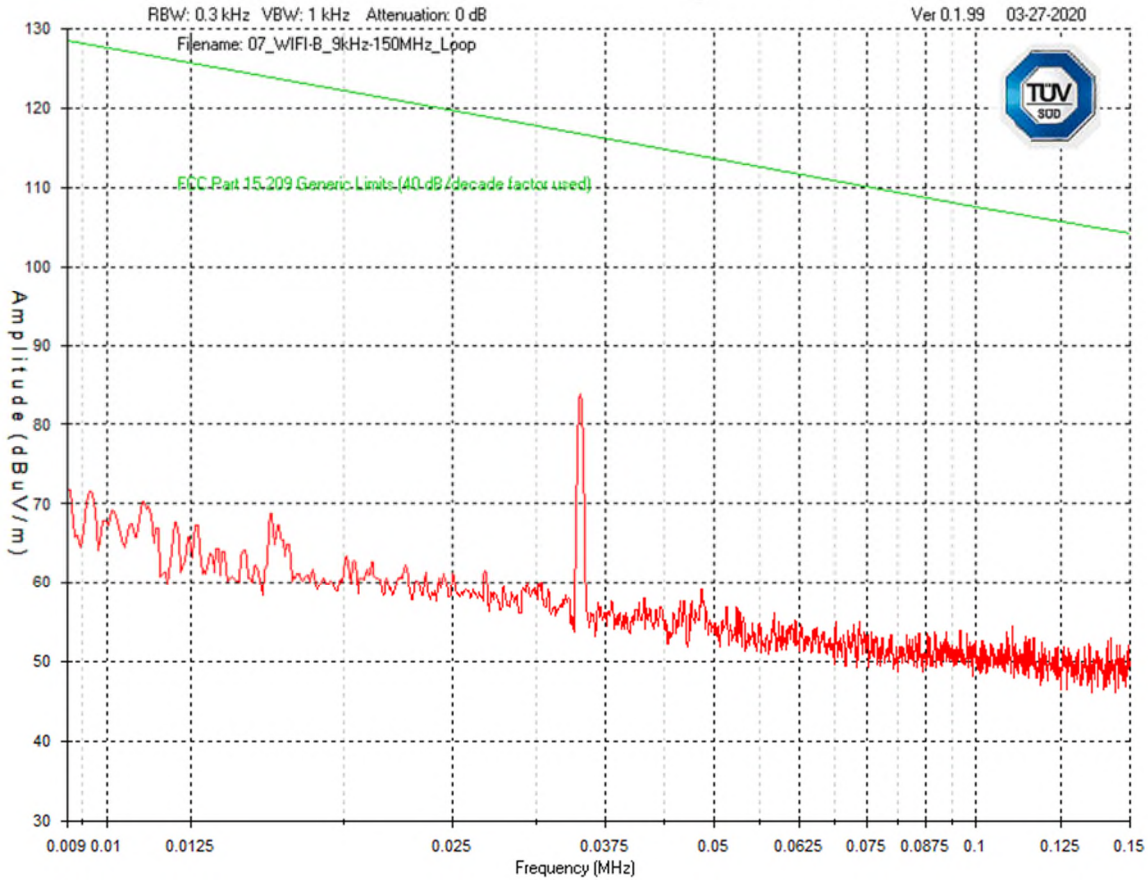

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

150 kHz – 30 MHz
Peak Emission Graph

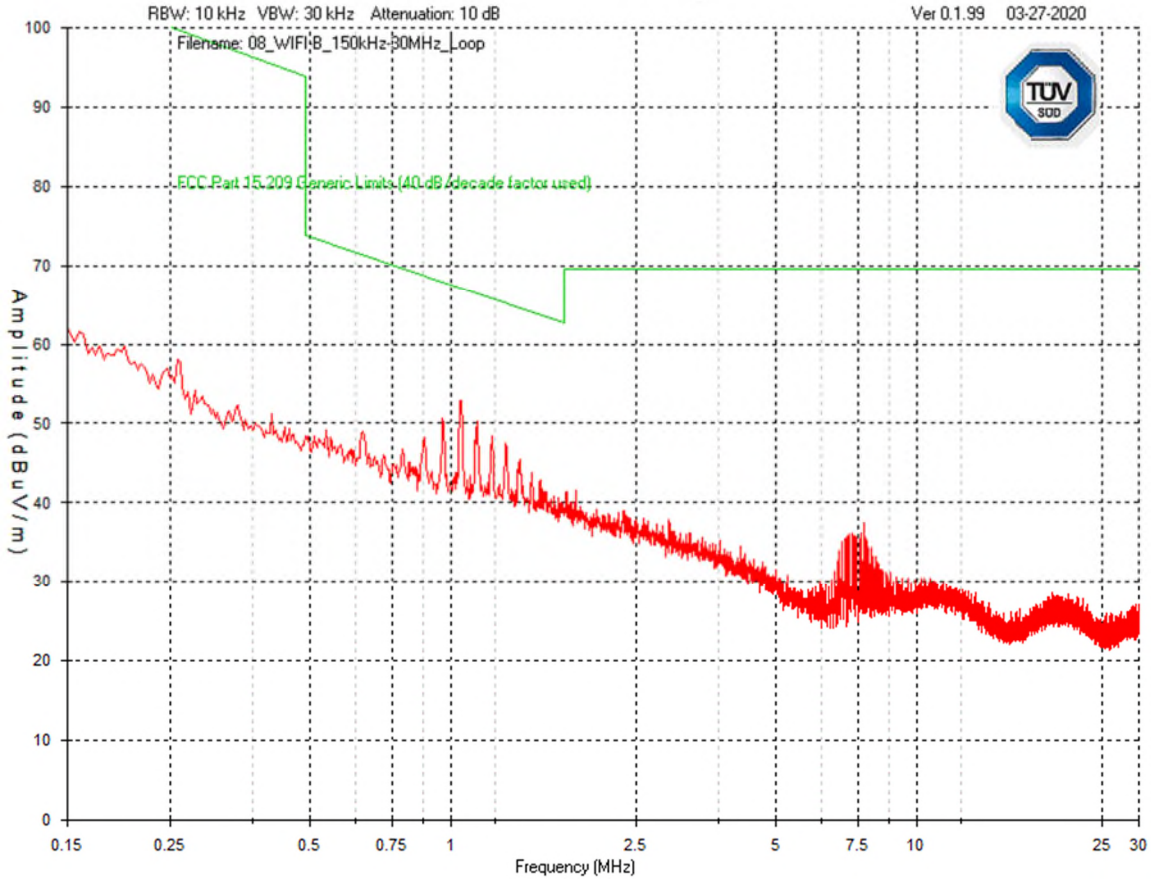

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

High Channel – 30 MHz – 1 GHz
Horizontal - Peak Emission Graph

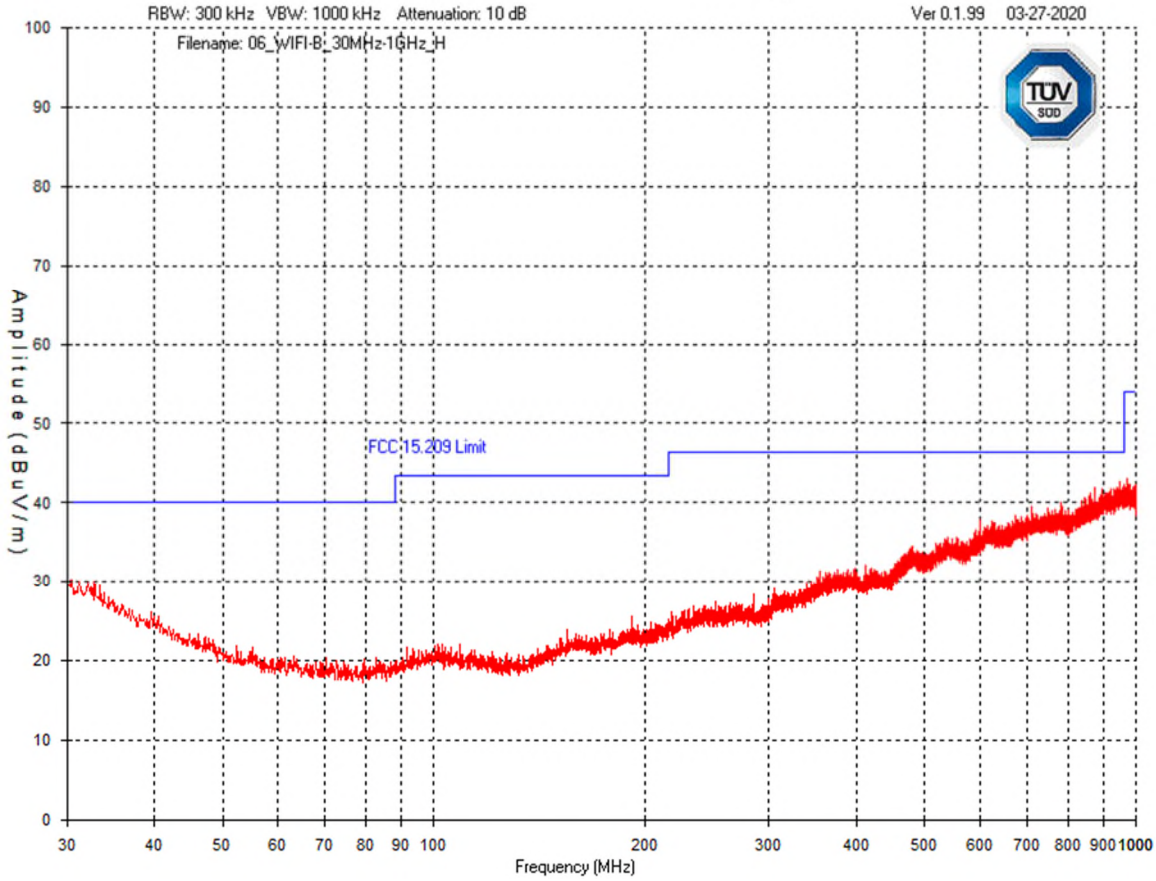

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

High Channel – 1 GHz – 6 GHz
Horizontal - Peak Emission Graph

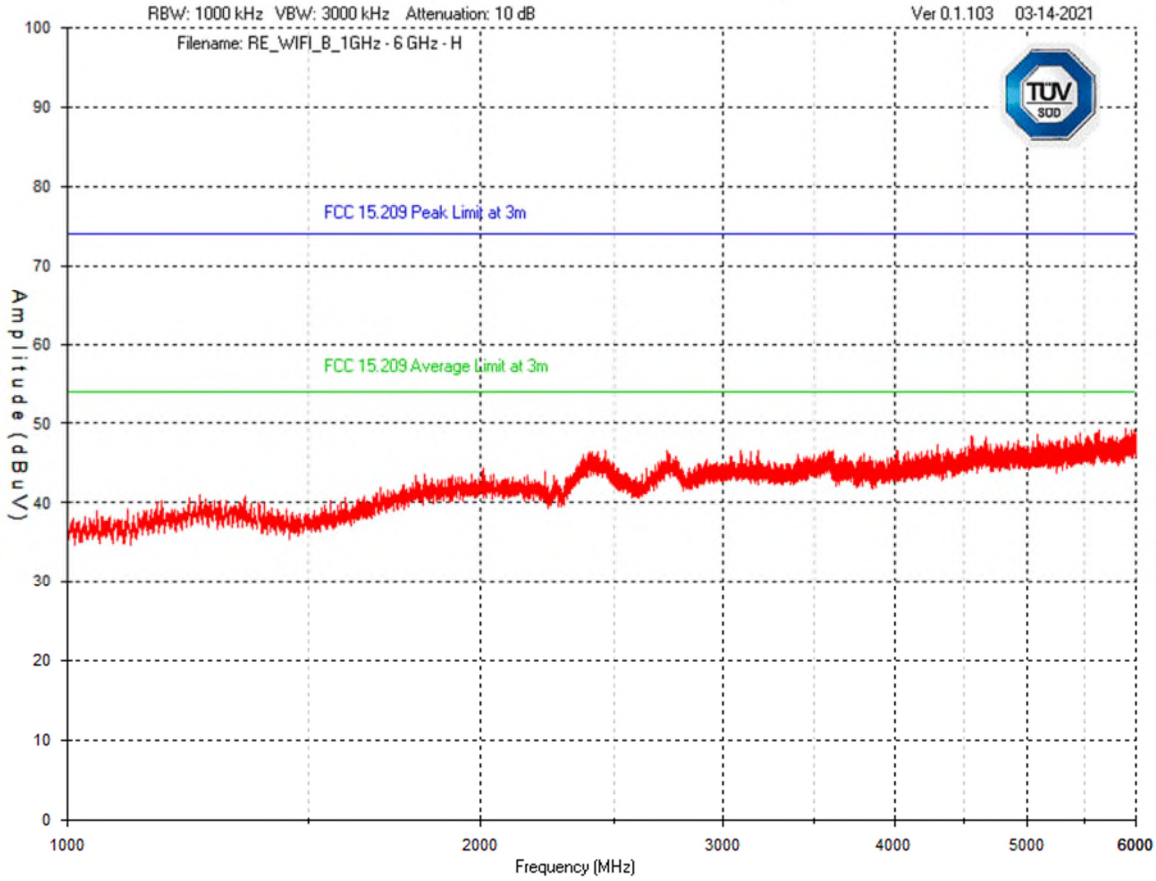

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

High Channel – 6 GHz – 12 GHz
Horizontal - Peak Emission Graph

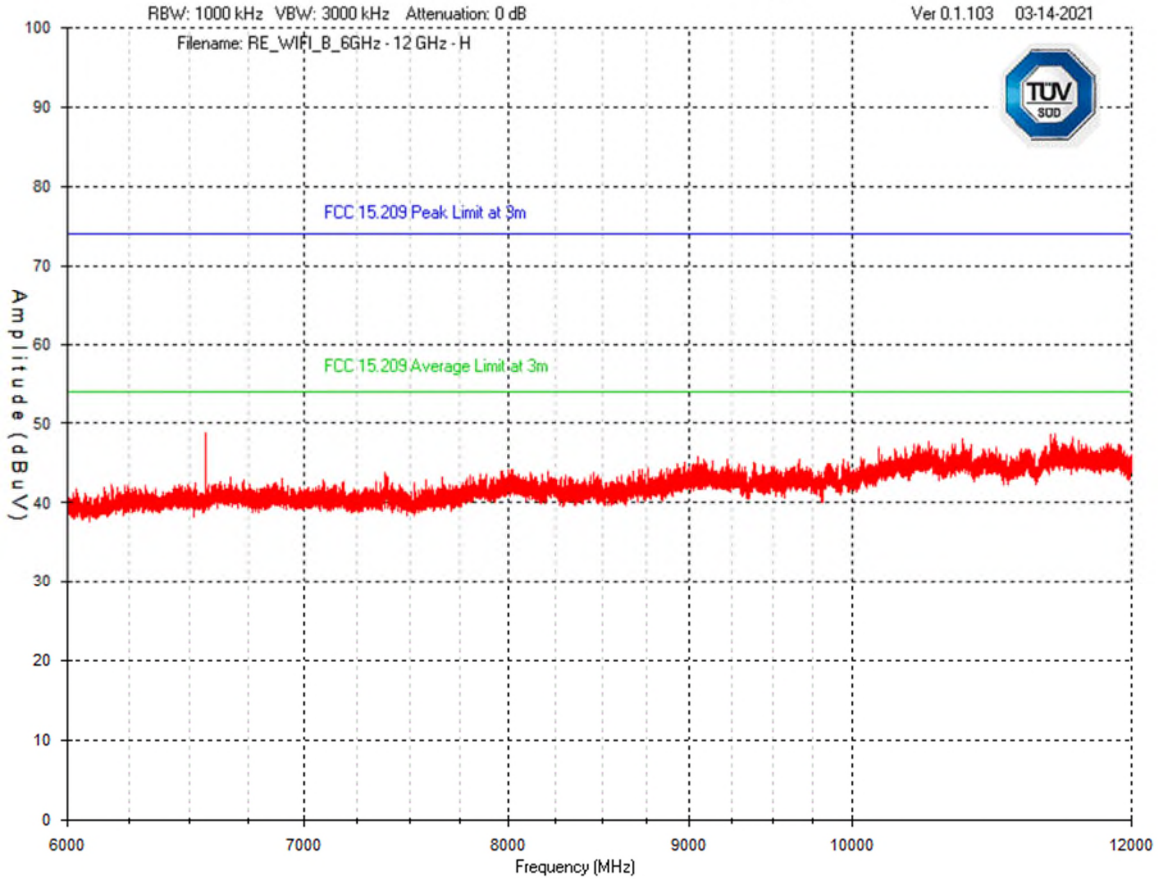

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

High Channel – 12 GHz – 18 GHz
Horizontal - Peak Emission Graph

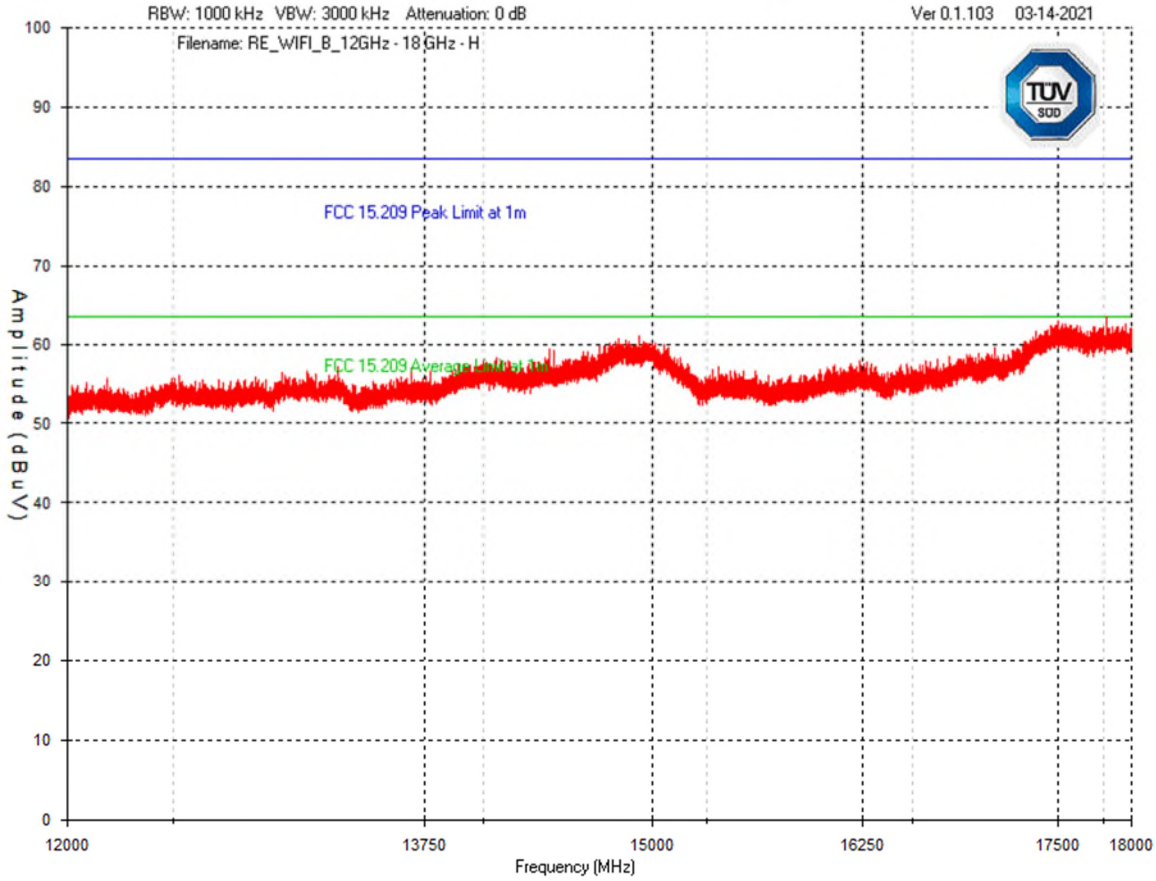

Plot was taken at a 1 meter distance. All emissions were noise floor of measurement instrument. No emissions were found in this frequency range.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

High Channel – 18 GHz – 25 GHz
Horizontal - Peak Emission Graph

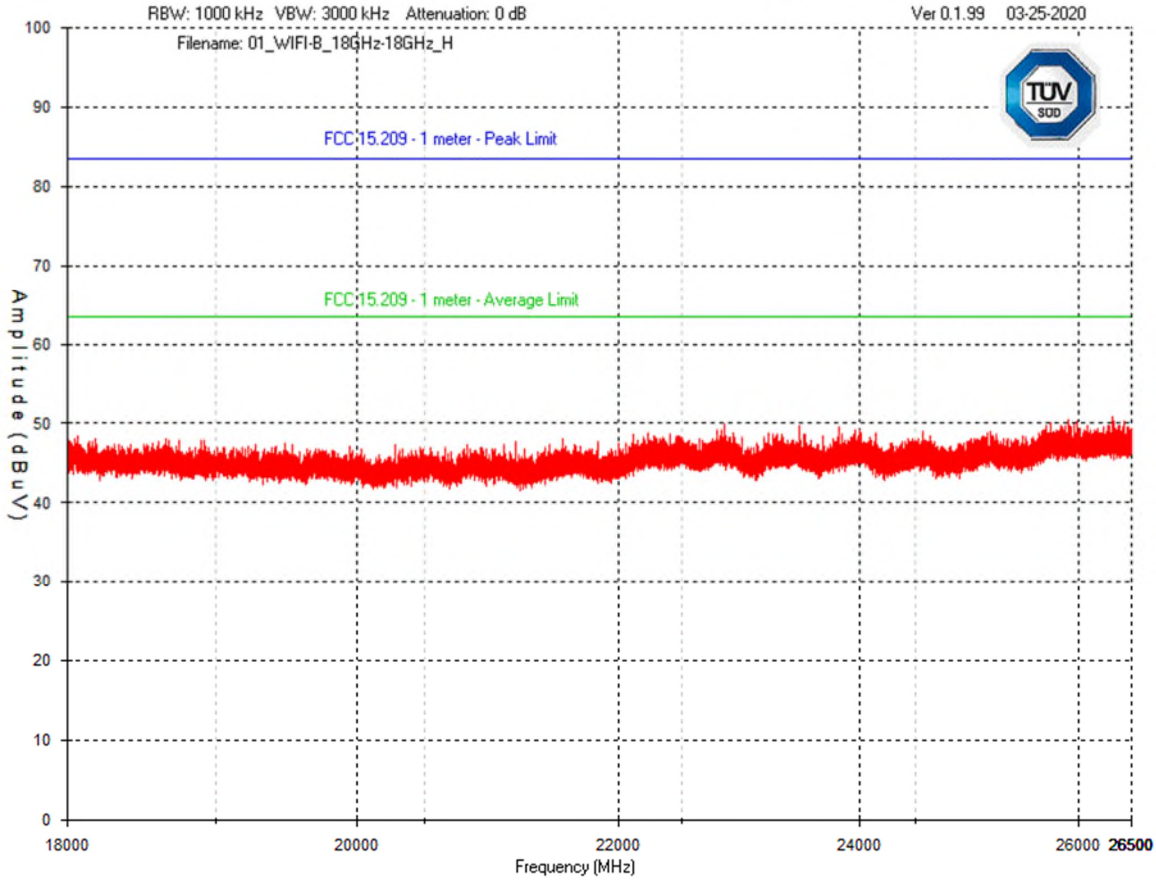

Plot was taken at a 1 meter distance. All emissions were noise floor of measurement instrument. No emissions were found in this frequency range.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

High Channel – 30 MHz – 1 GHz
Vertical - Peak Emission Graph

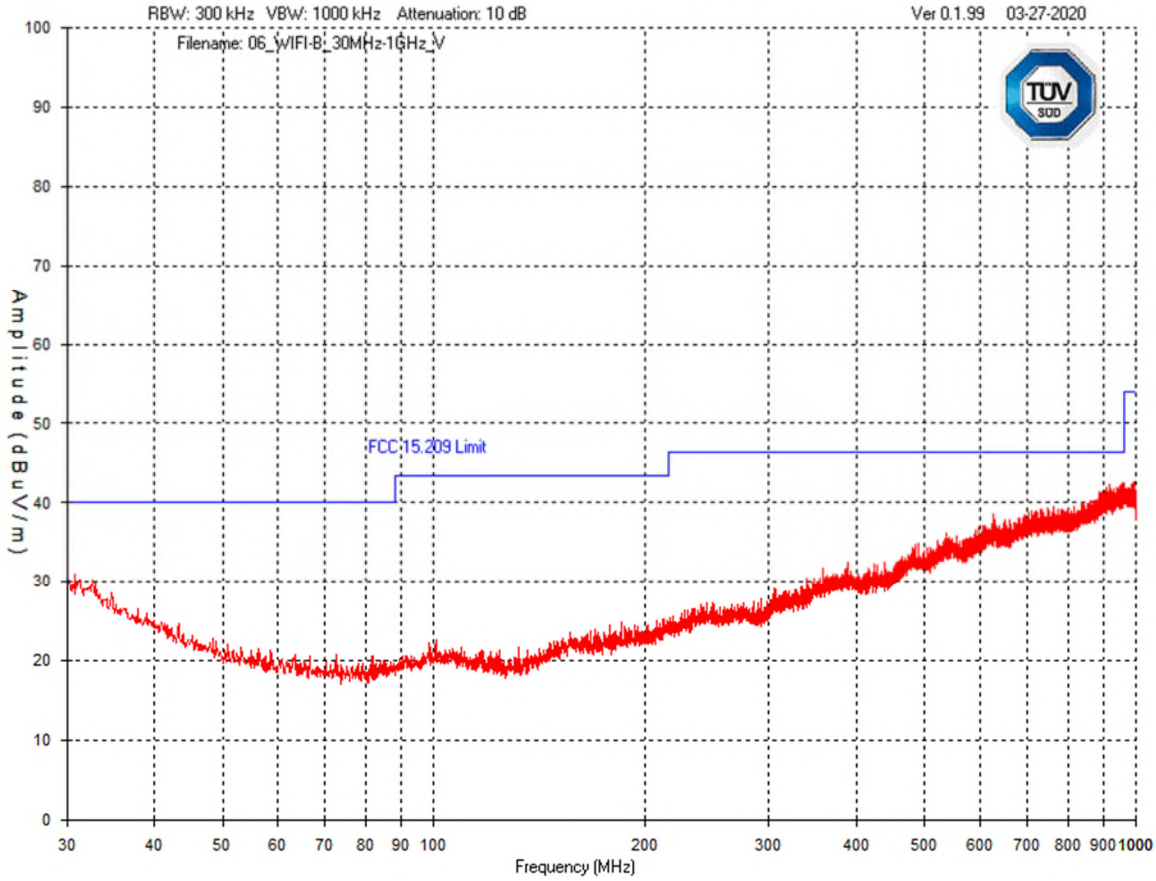

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

High Channel – 1 GHz – 6 GHz
Vertical - Peak Emission Graph

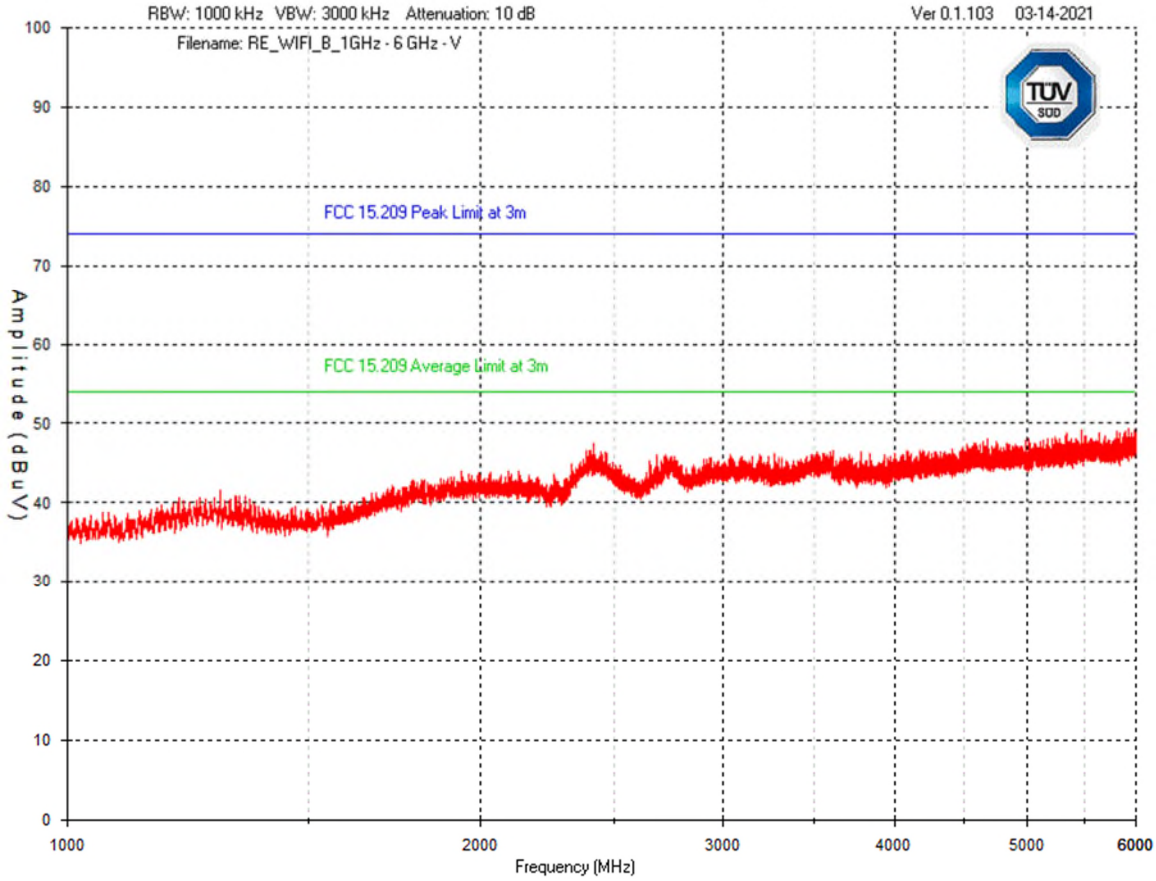

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

High Channel – 6 GHz – 12 GHz
Vertical - Peak Emission Graph

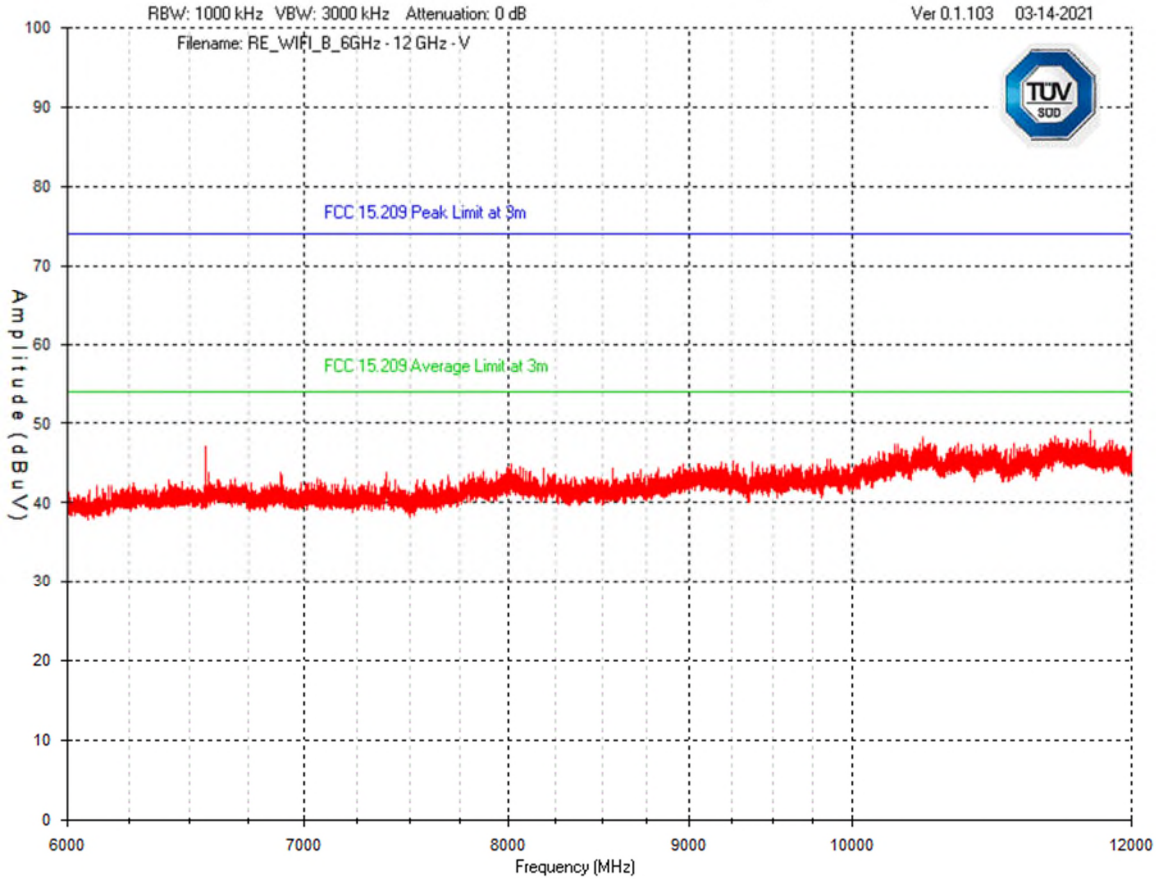

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

High Channel – 12 GHz – 18 GHz
Vertical - Peak Emission Graph

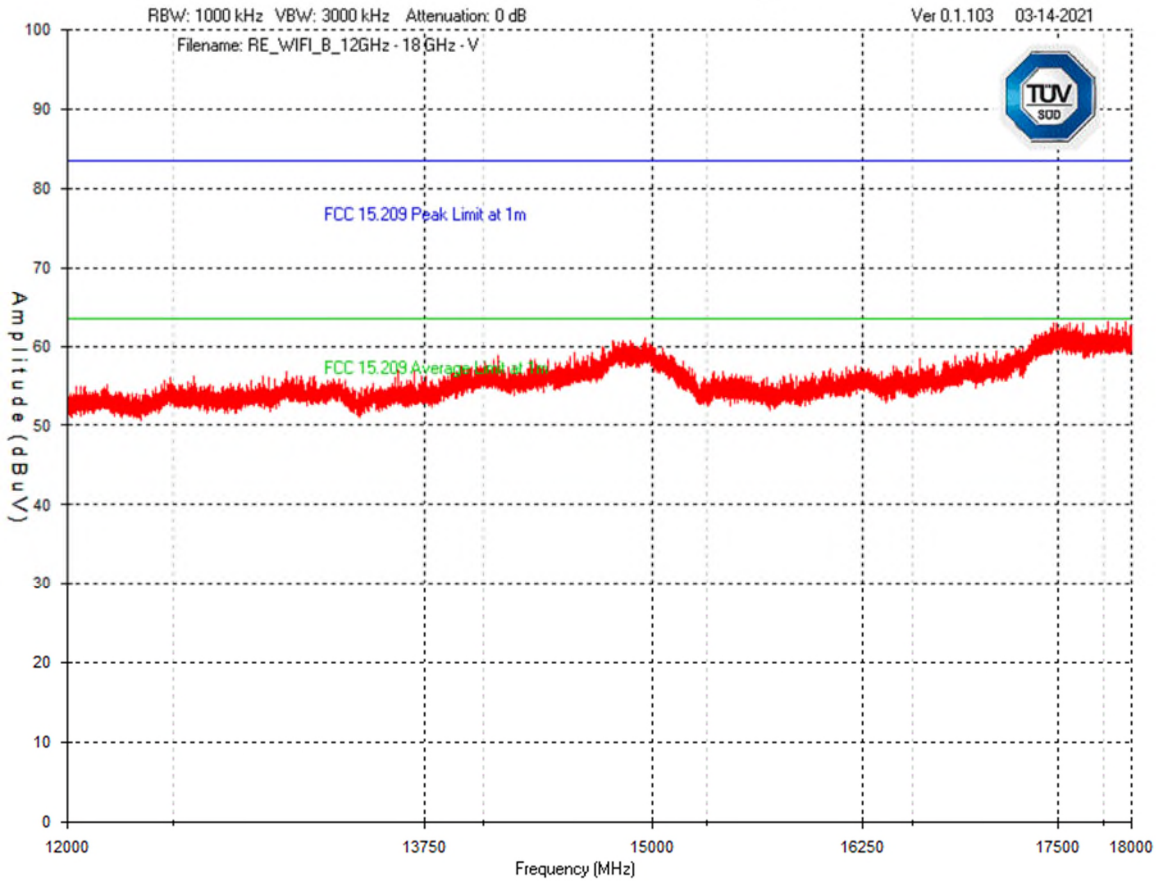

Plot was taken at a 1 meter distance. All emissions were noise floor of measurement instrument. No emissions were found in this frequency range.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

High Channel – 18 GHz – 25 GHz
Vertical - Peak Emission Graph

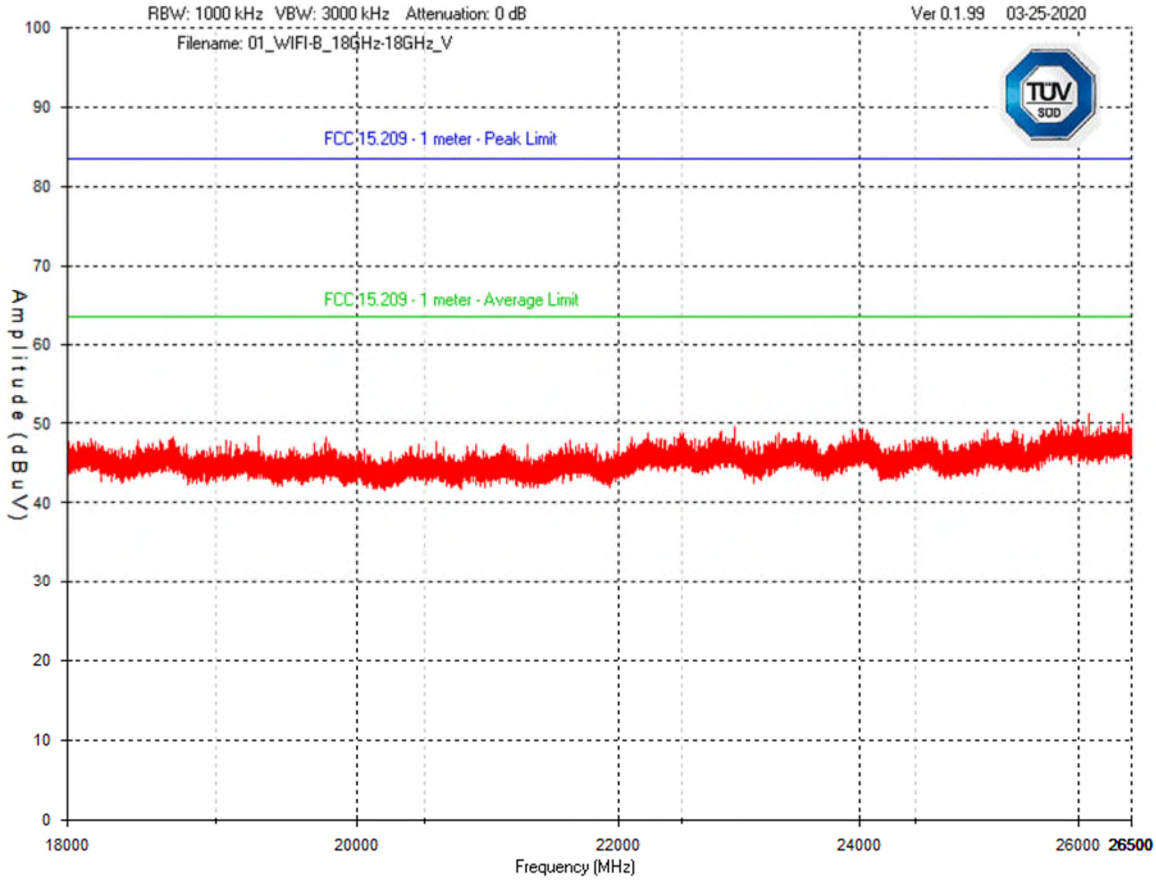

Plot was taken at a 1 meter distance. All emissions were noise floor of measurement instrument. No emissions were found in this frequency range.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

B-Mode, Band Edges

Band Edge – Low Channel
X-Axis
Horizontal - Peak Emission

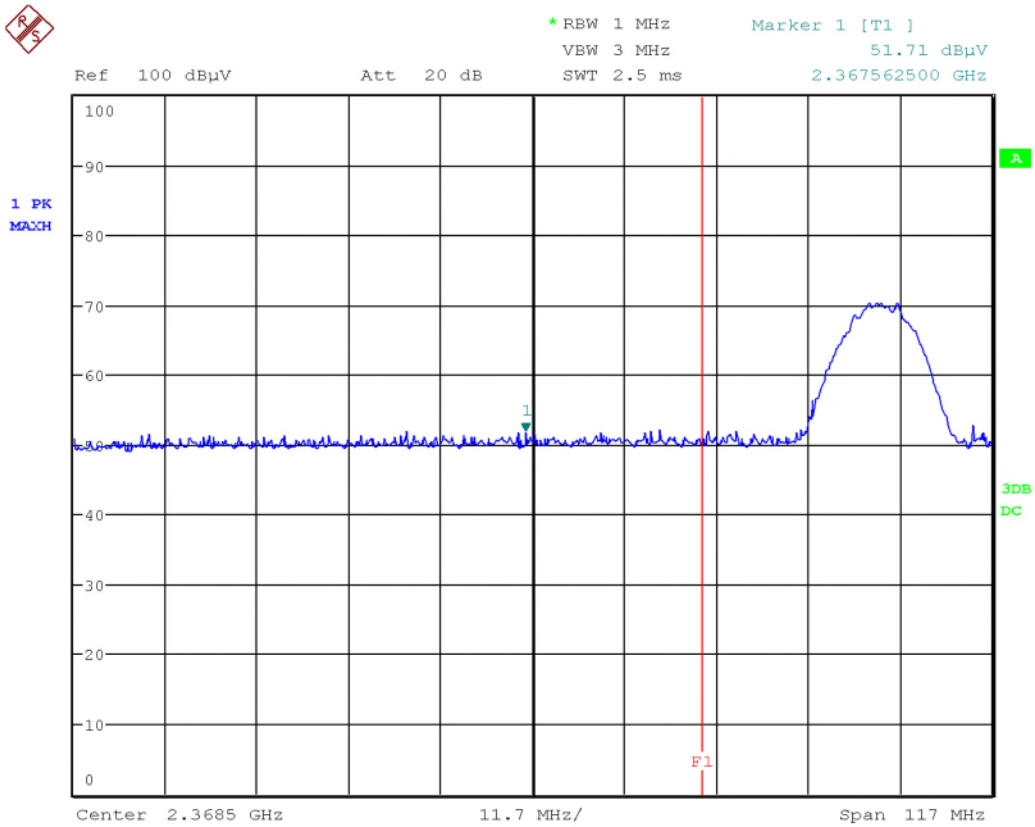

Date: 25.MAR.2020 17:39:05

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Band Edge – Low Channel
X-Axis
Vertical - Peak Emission

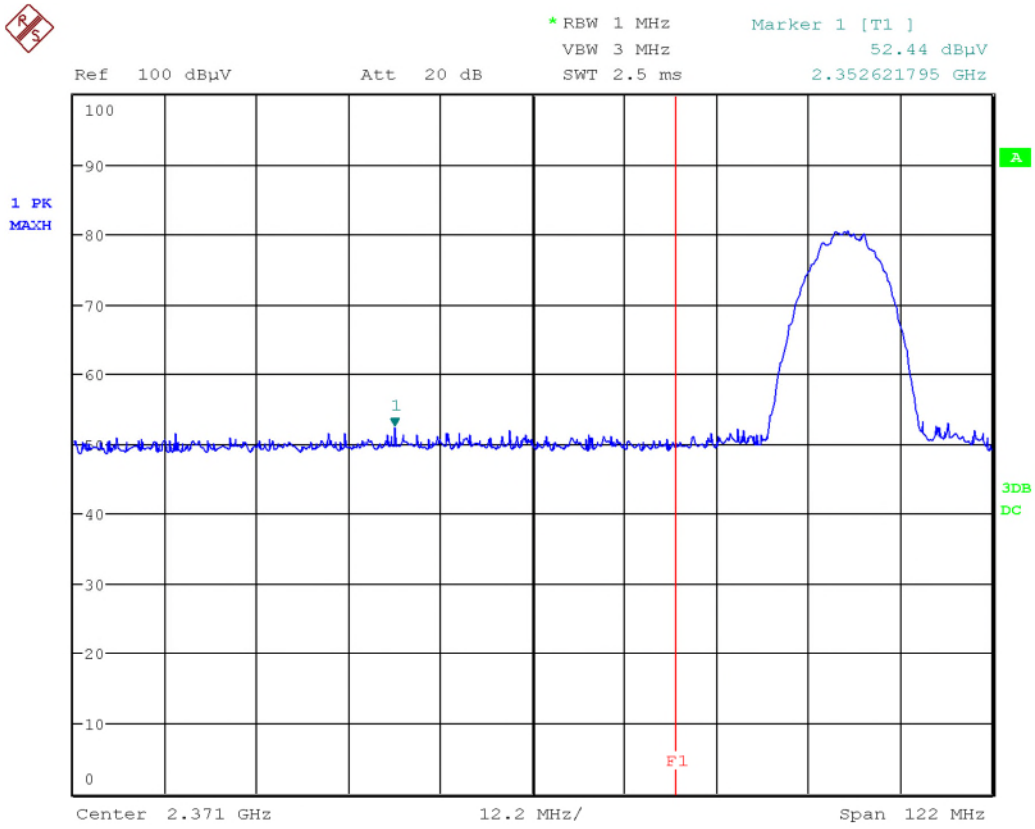

Date: 25.MAR.2020 17:44:33

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Band Edge – Low Channel
X-Axis
Horizontal - Average Emission

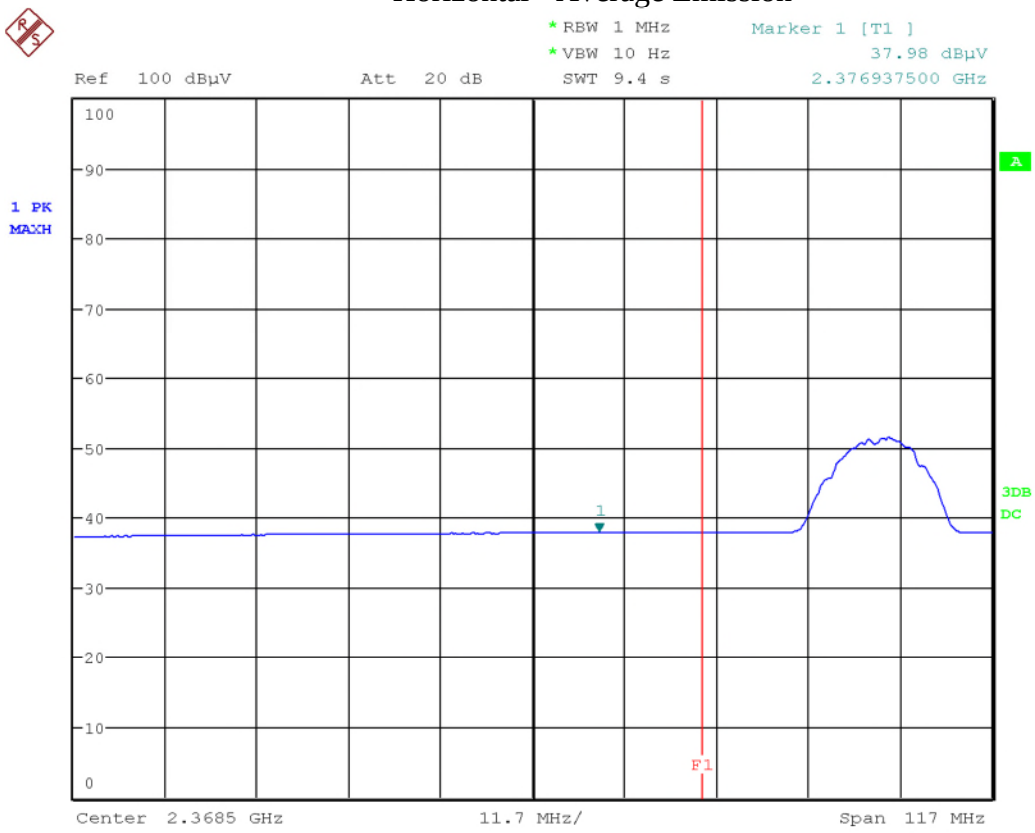

Date: 25.MAR.2020 17:38:18

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Band Edge – Low Channel
Z-Axis
Vertical – Average Emission

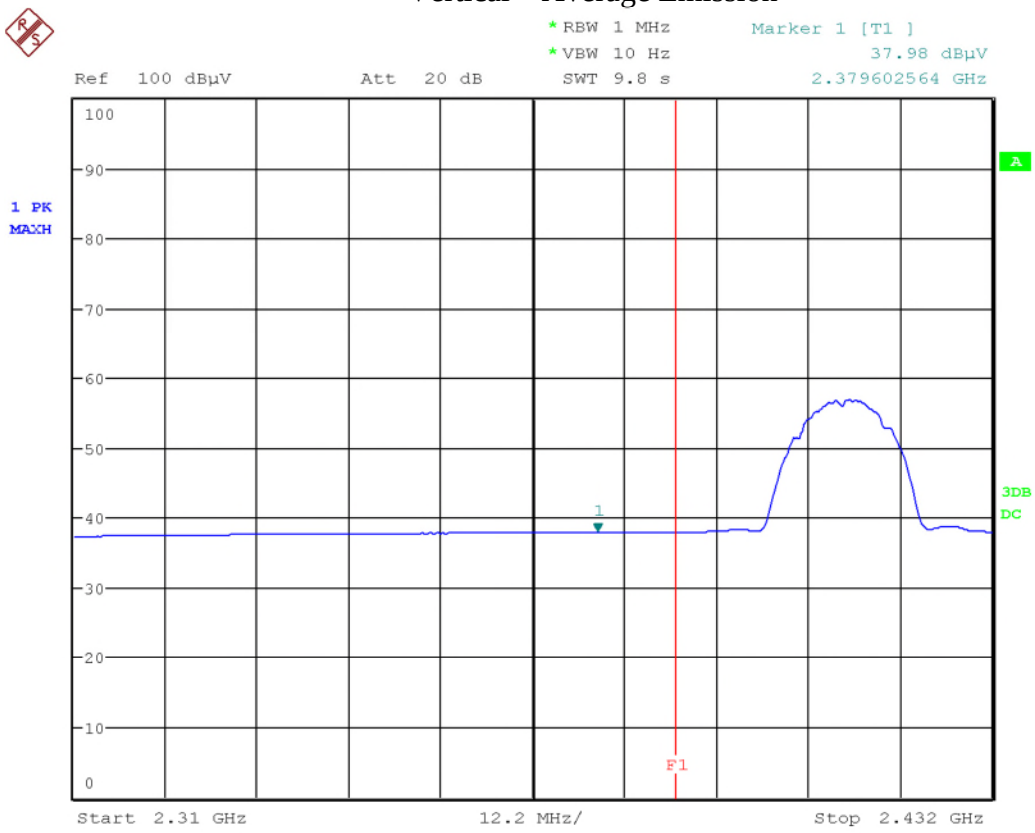

Date: 25.MAR.2020 17:44:10

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Band Edge – High Channel
X-Axis
Horizontal - Peak Emission

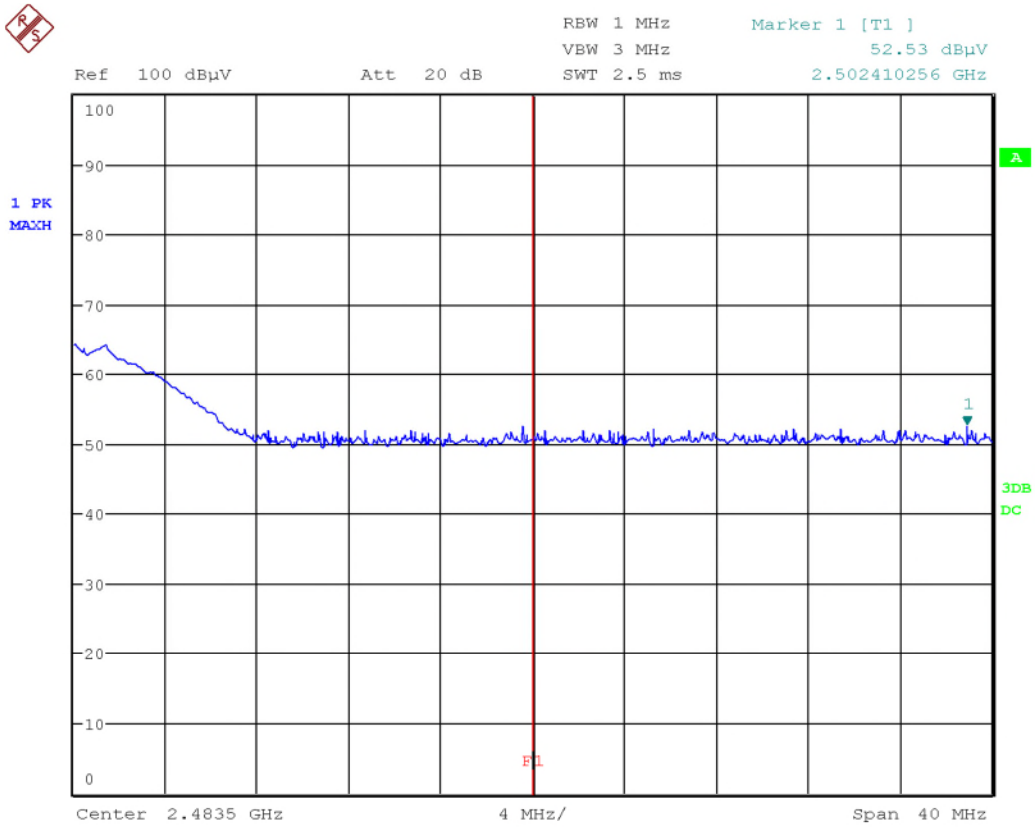

Date: 26.MAR.2020 13:02:42

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Band Edge – High Channel
X-Axis
Vertical - Peak Emission

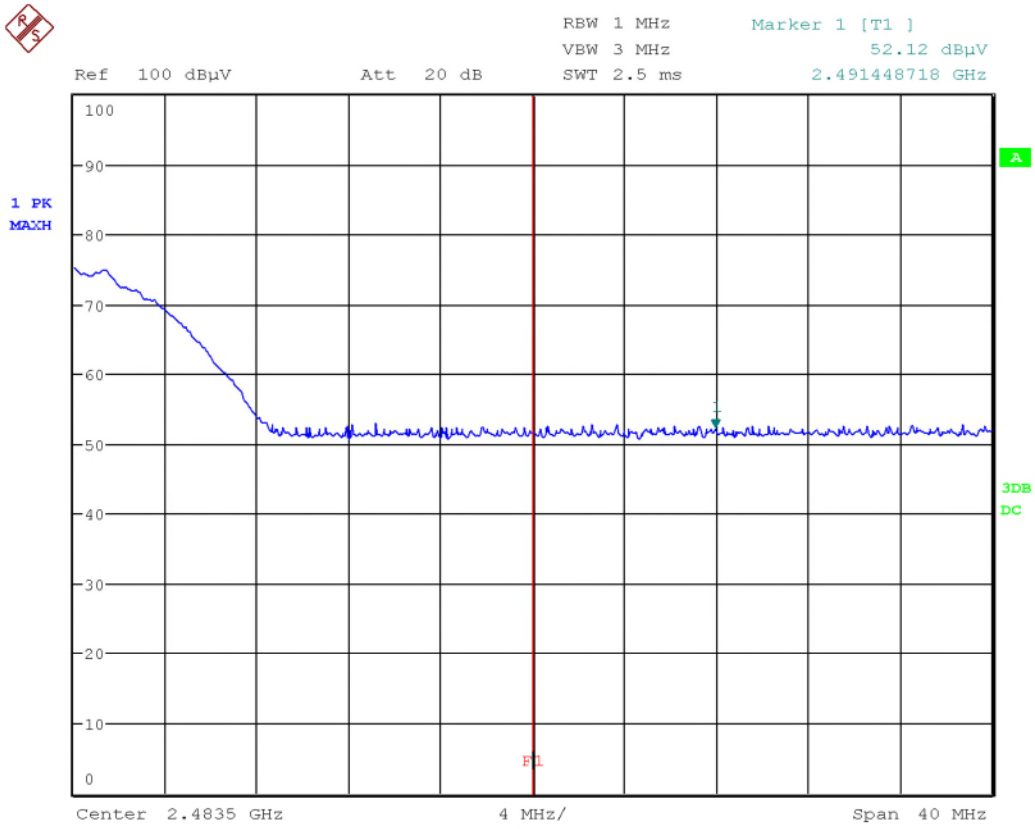

Date: 26.MAR.2020 13:18:31

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Band Edge – High Channel
X-Axis
Horizontal - Average Emission

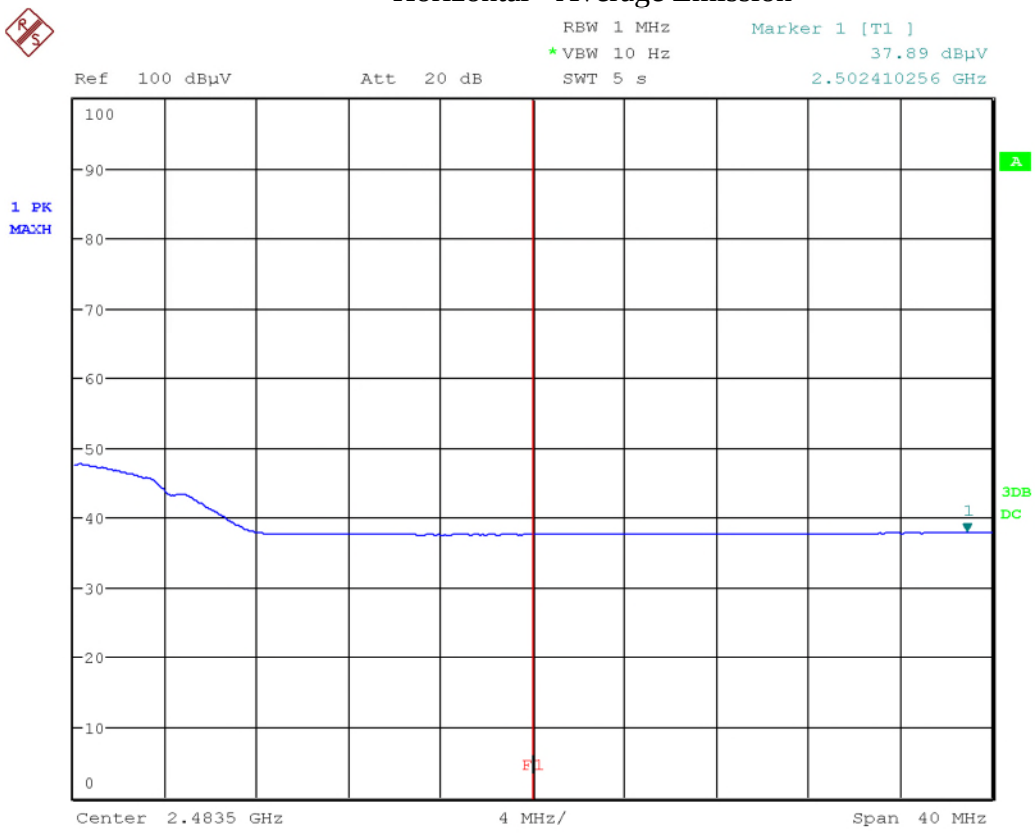

Date: 26.MAR.2020 13:03:46

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Band Edge – High Channel
X-Axis
Vertical – Average Emission

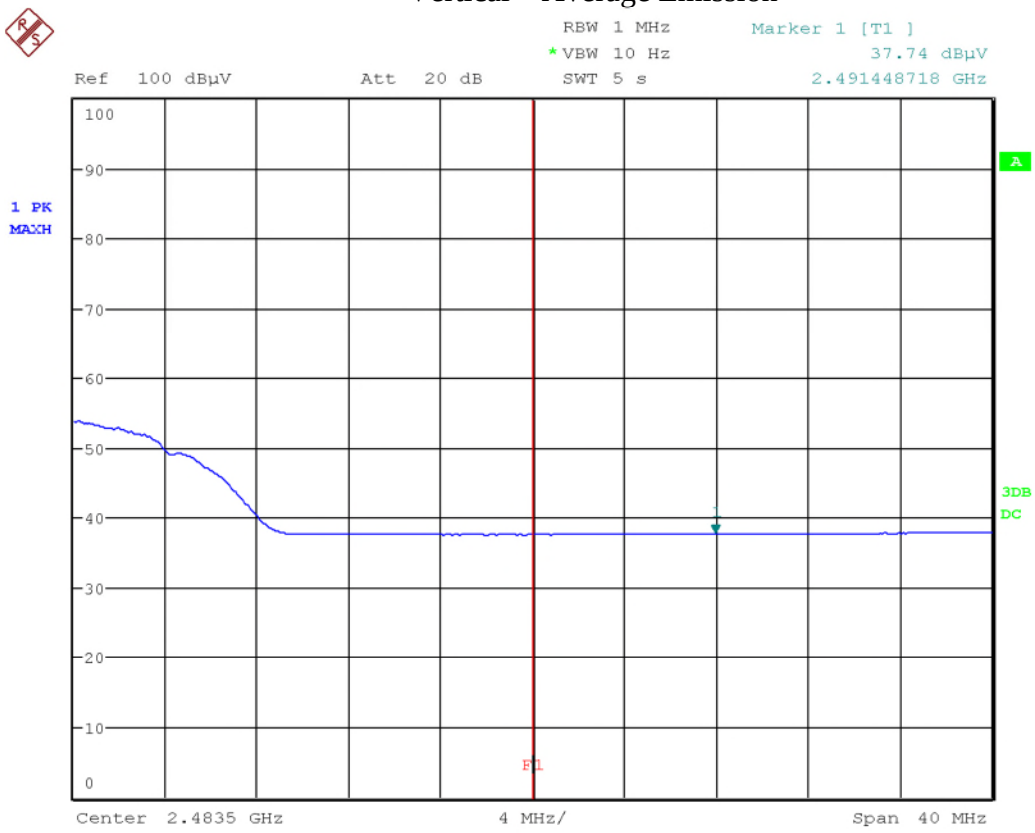

Date: 26.MAR.2020 13:19:21

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

G-Mode, Band Edges

Band Edge – Low Channel
X-Axis
Horizontal - Peak Emission

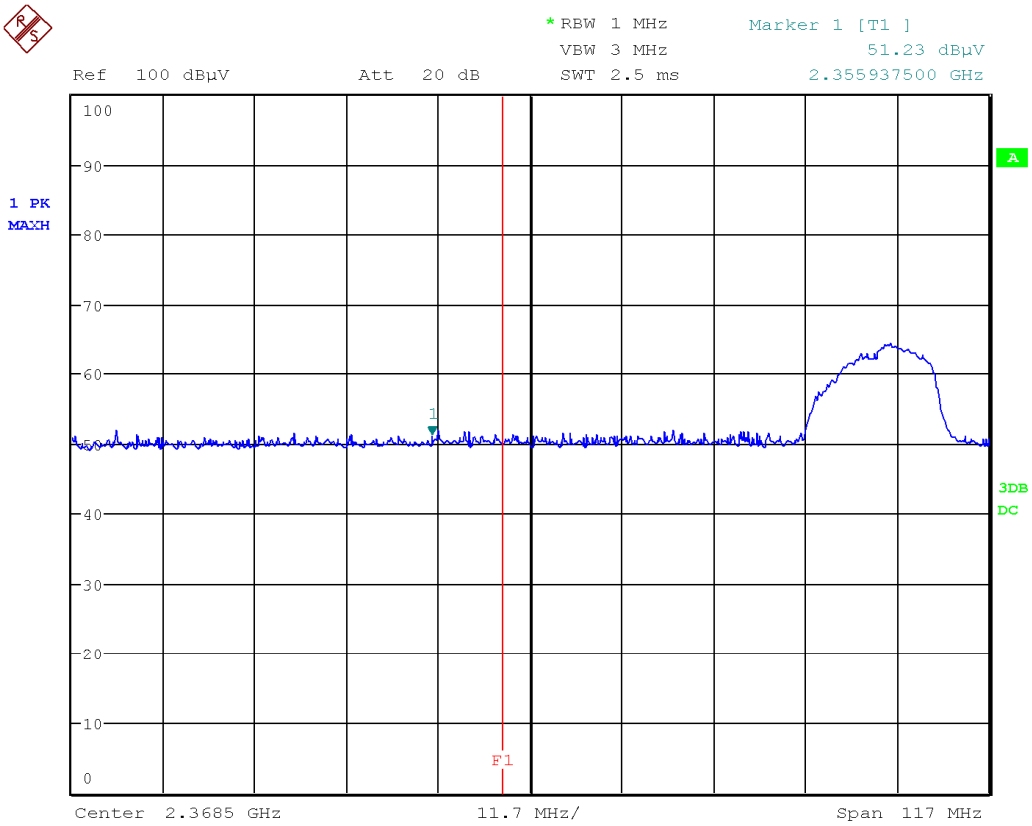

Date: 26.MAR.2020 15:18:19

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Band Edge – Low Channel
X-Axis
Vertical - Peak Emission

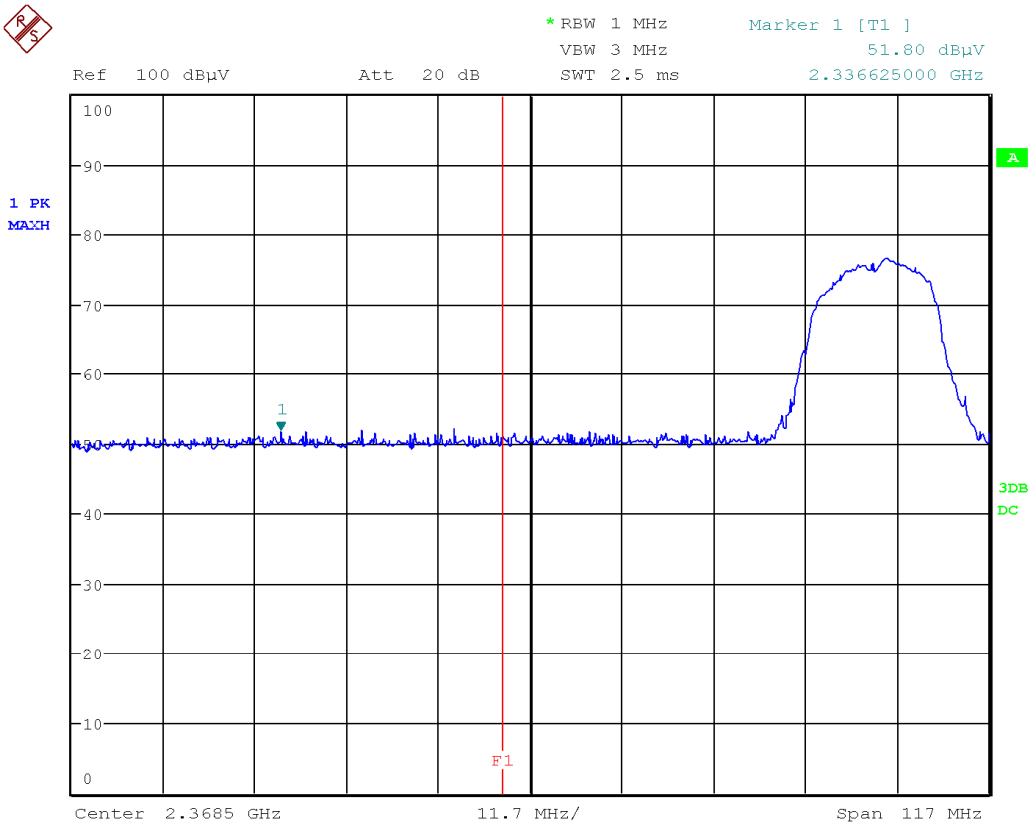

Date: 26.MAR.2020 15:26:27

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Band Edge – Low Channel
X-Axis
Horizontal - Average Emission

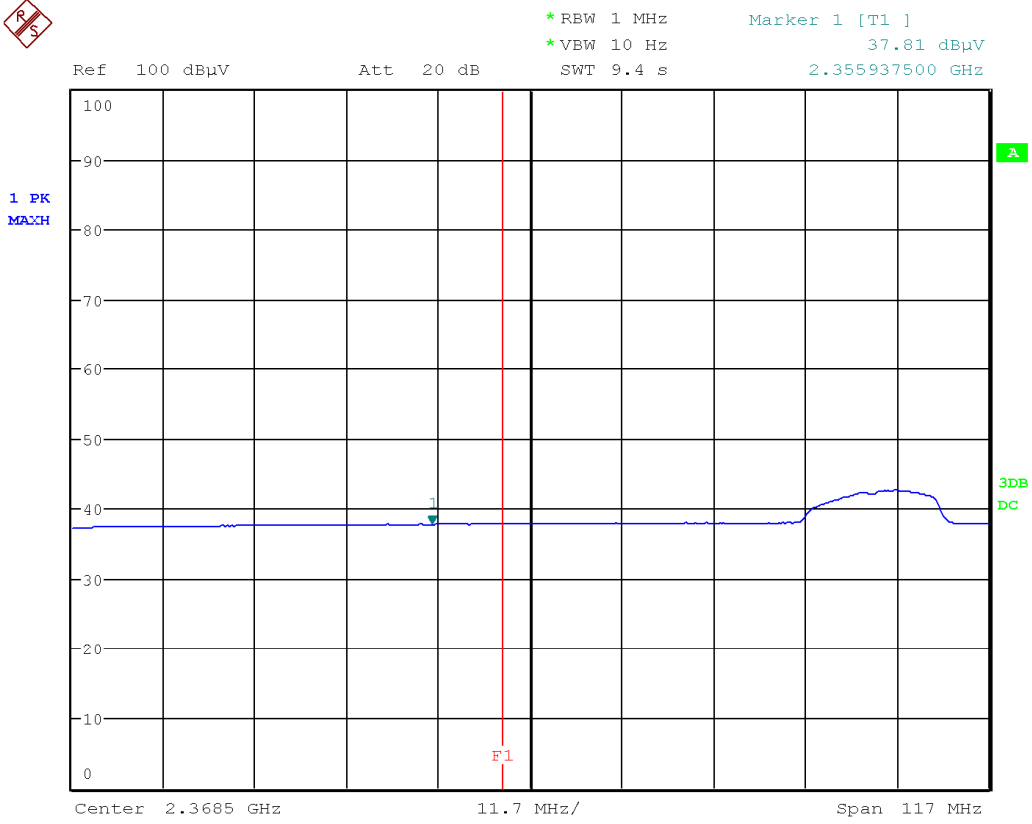

Date: 26.MAR.2020 15:18:59

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Band Edge – Low Channel
Z-Axis
Vertical – Average Emission

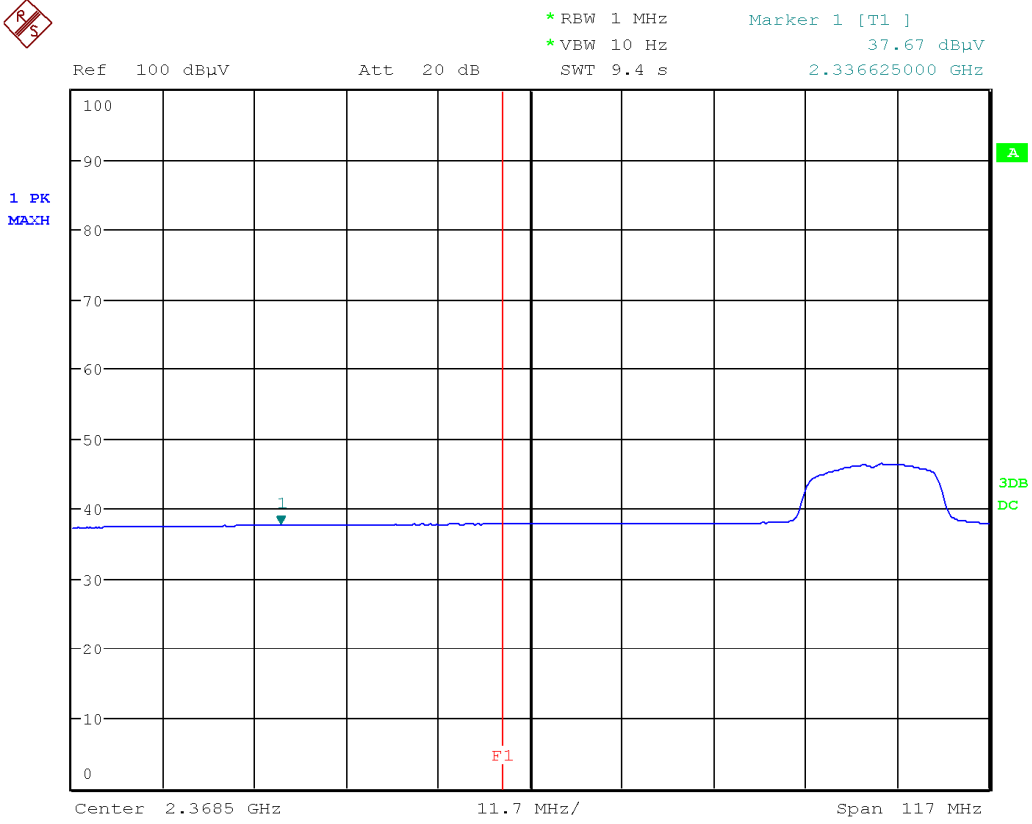

Date: 26.MAR.2020 15:26:52

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Band Edge – High Channel
X-Axis
Horizontal - Peak Emission

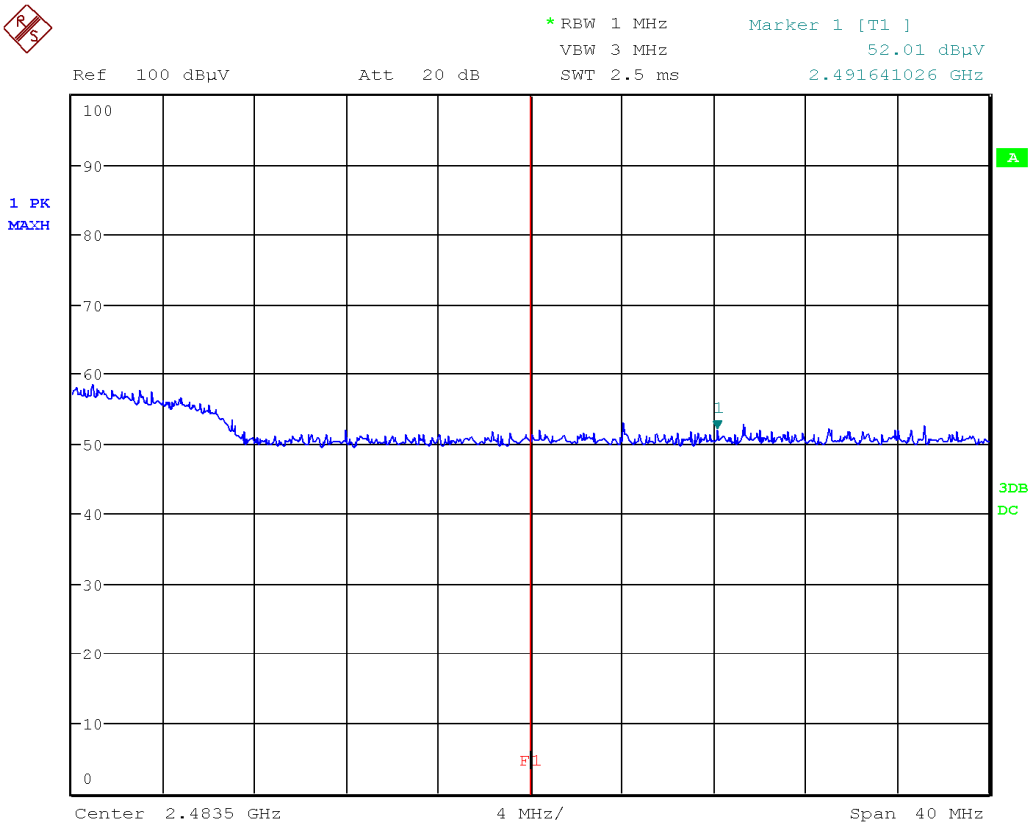

Date: 26.MAR.2020 17:41:39

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Band Edge – High Channel
X-Axis
Vertical - Peak Emission

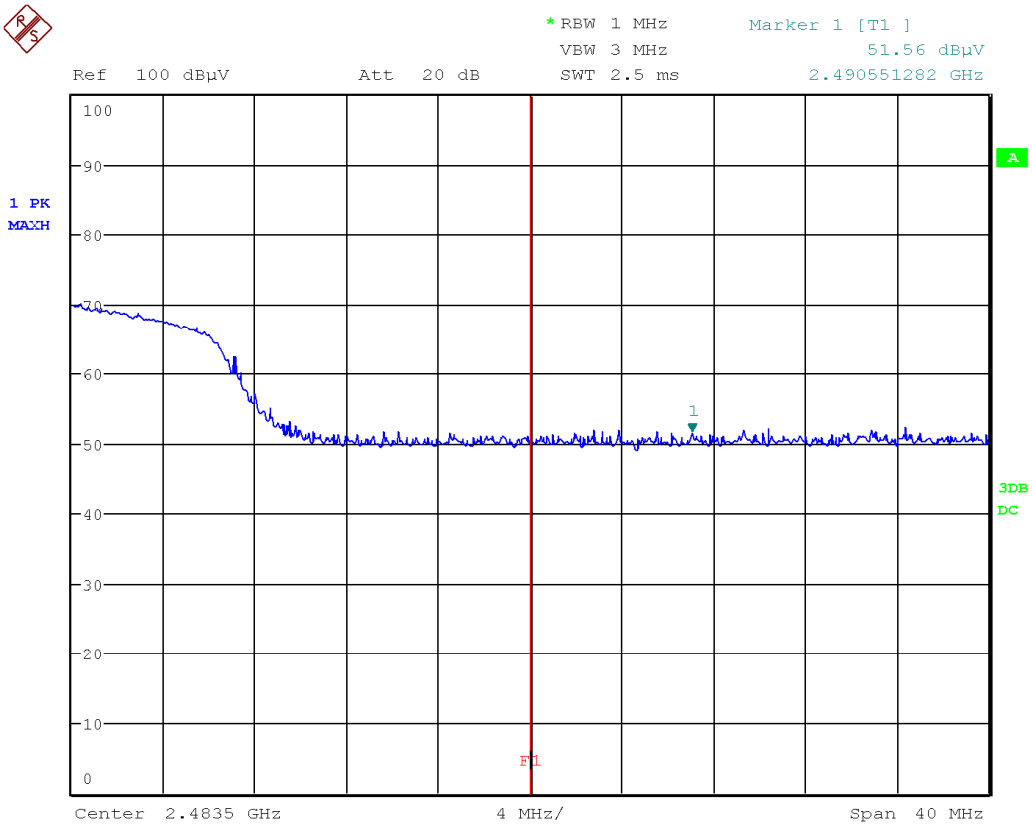

Date: 26.MAR.2020 17:48:22

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Band Edge – High Channel
X-Axis
Horizontal - Average Emission

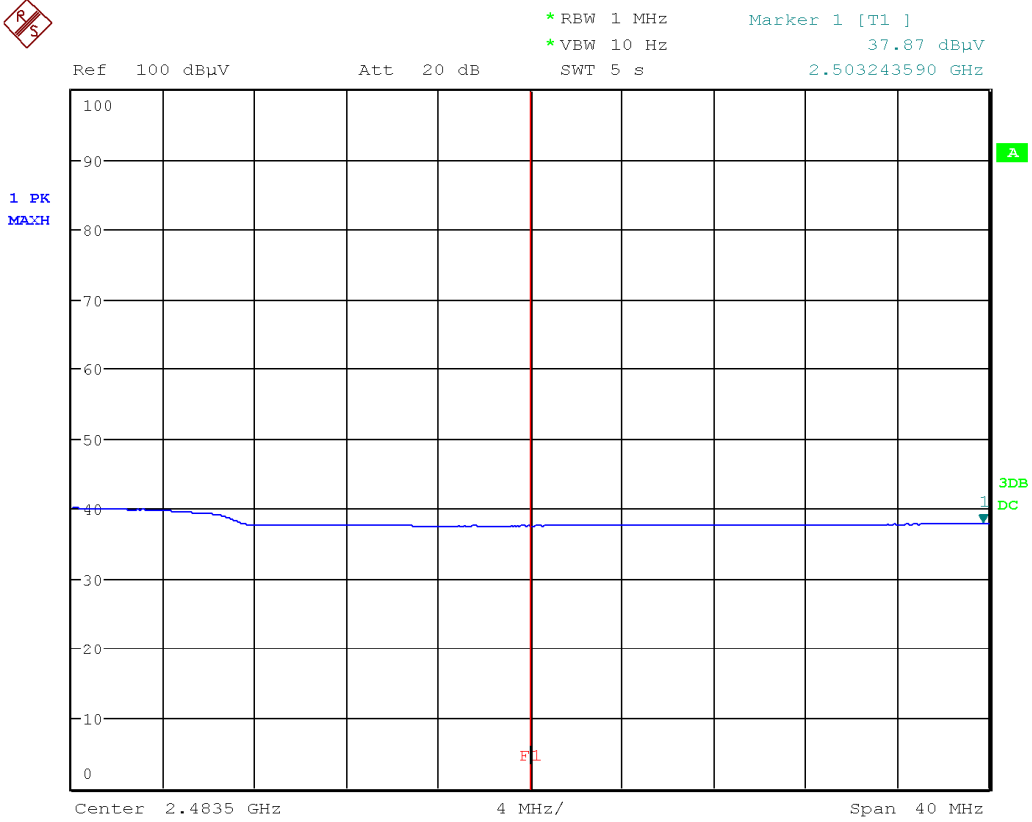

Date: 26.MAR.2020 17:41:00

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Band Edge – High Channel
X-Axis
Vertical – Average Emission

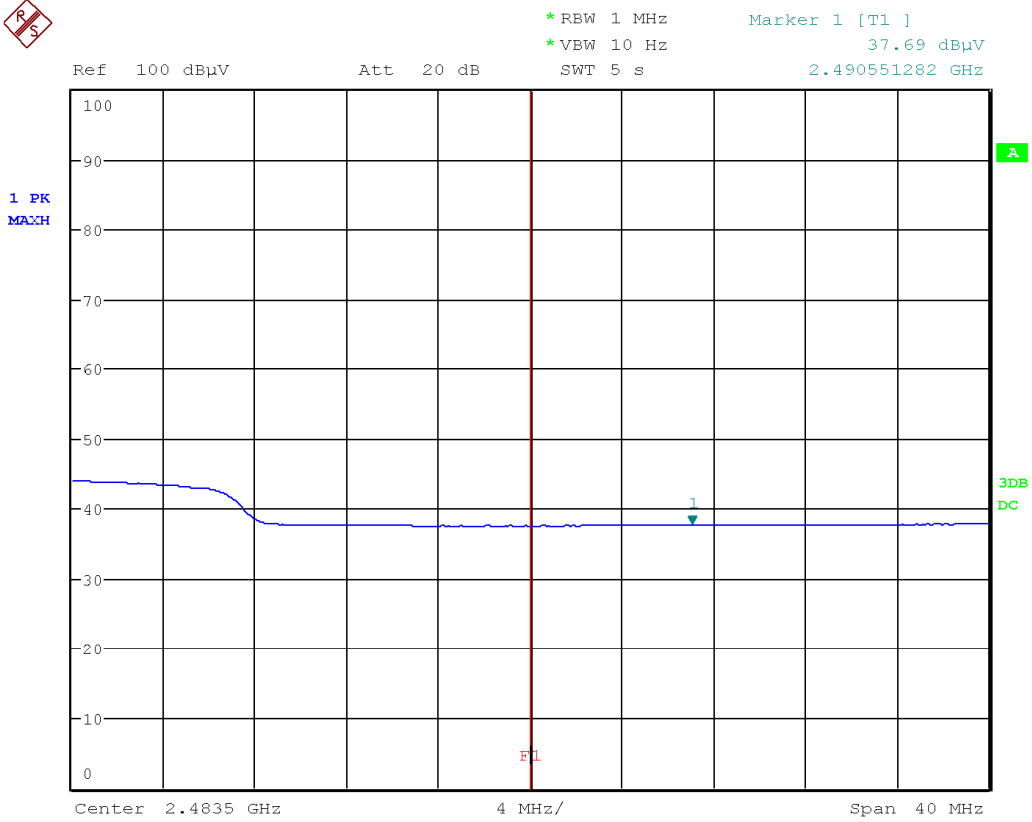

Date: 26.MAR.2020 17:48:51

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

N-Mode, Band Edges

Band Edge – Low Channel
X-Axis
Horizontal - Peak Emission

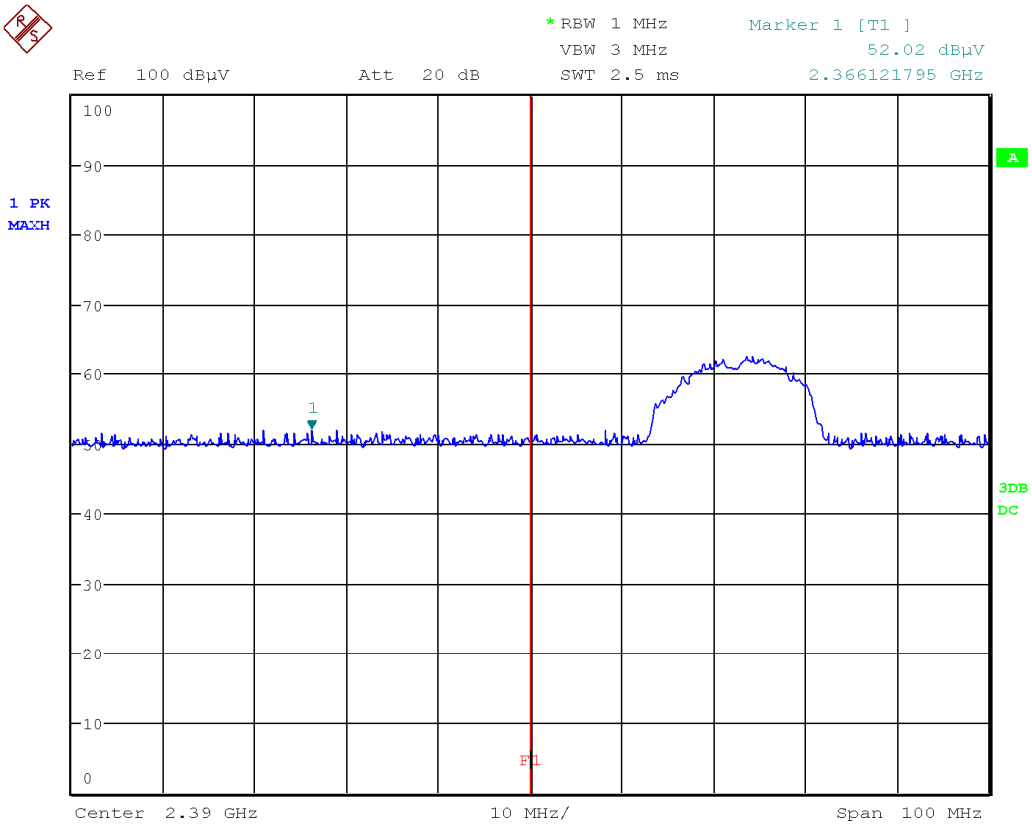

Date: 27.MAR.2020 13:26:35

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Band Edge – Low Channel
X-Axis
Vertical - Peak Emission

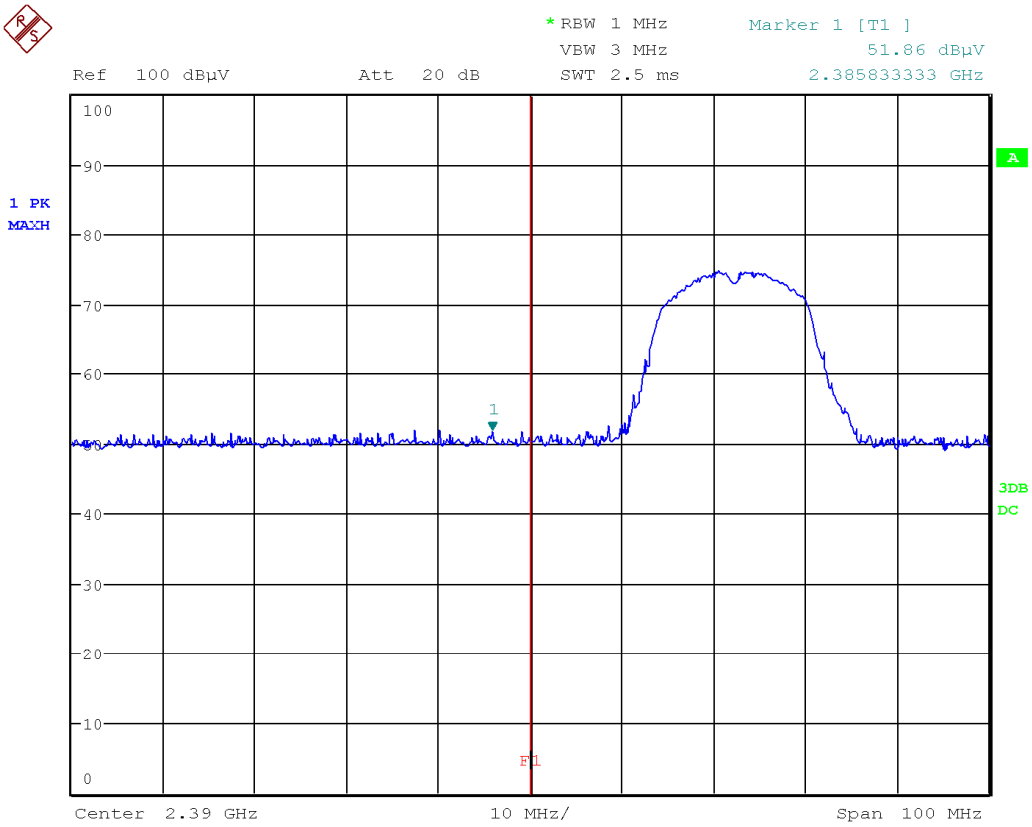

Date: 27.MAR.2020 13:31:47

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Band Edge – Low Channel
X-Axis
Horizontal - Average Emission

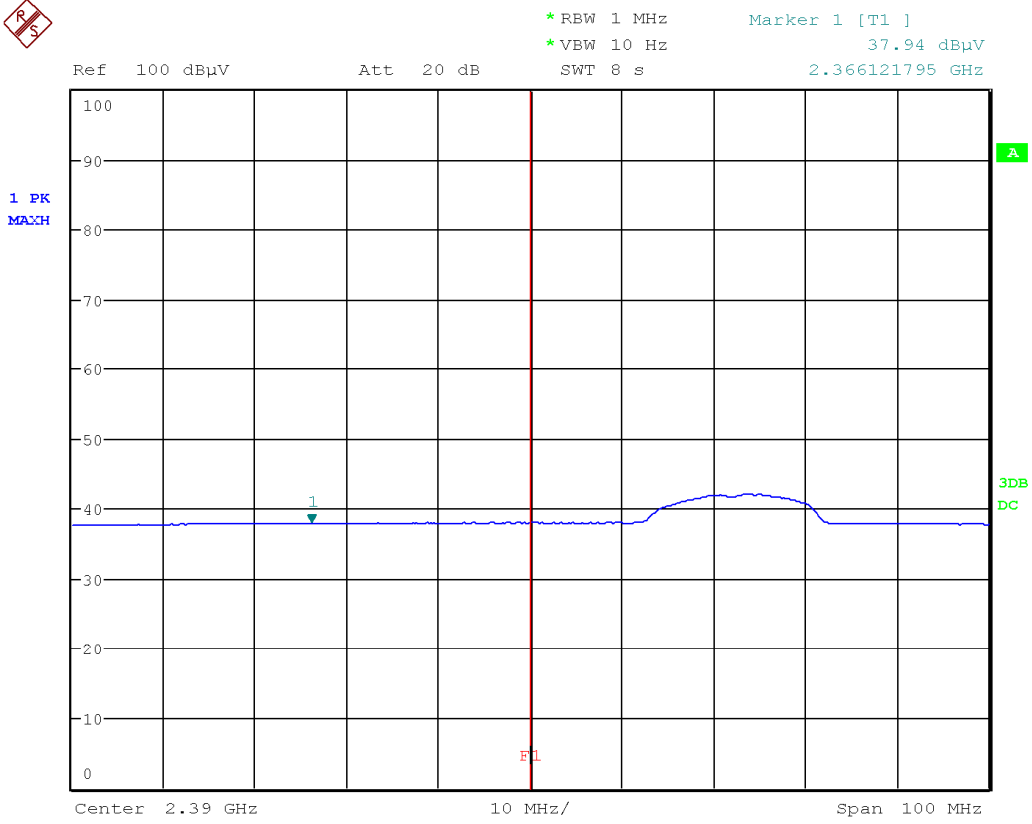

Date: 27.MAR.2020 13:26:52

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Band Edge – Low Channel
Z-Axis
Vertical – Average Emission

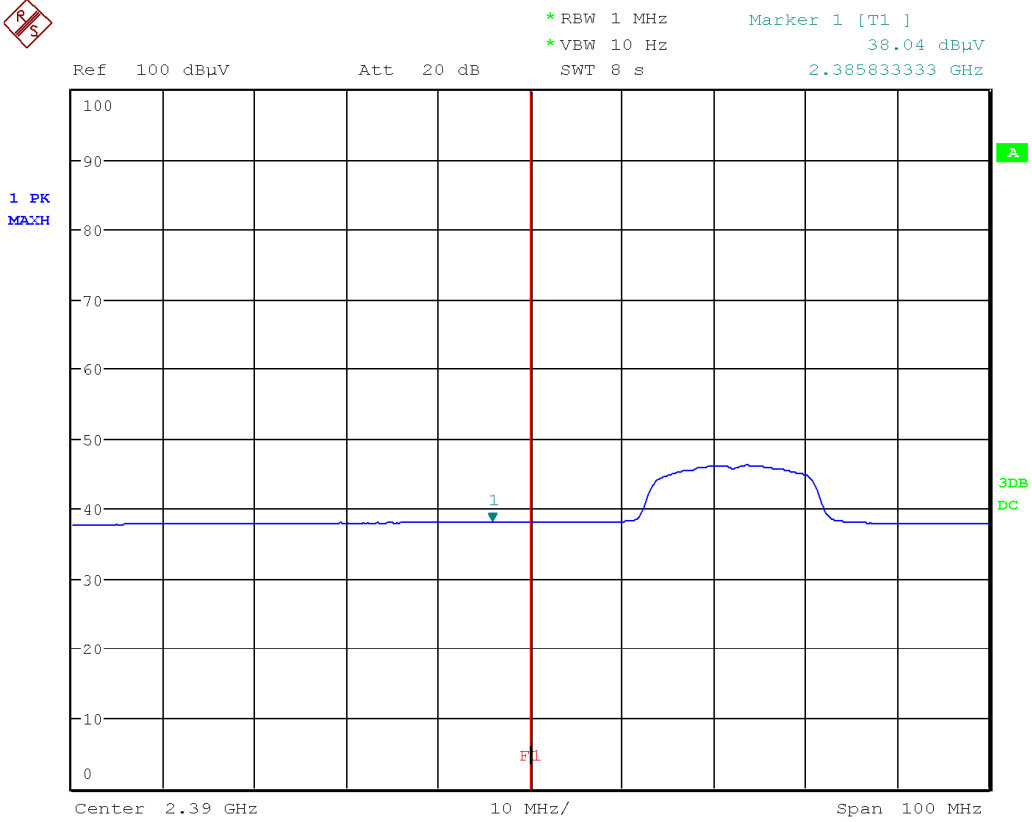

Date: 27.MAR.2020 13:35:51

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Band Edge – High Channel
X-Axis
Horizontal - Peak Emission

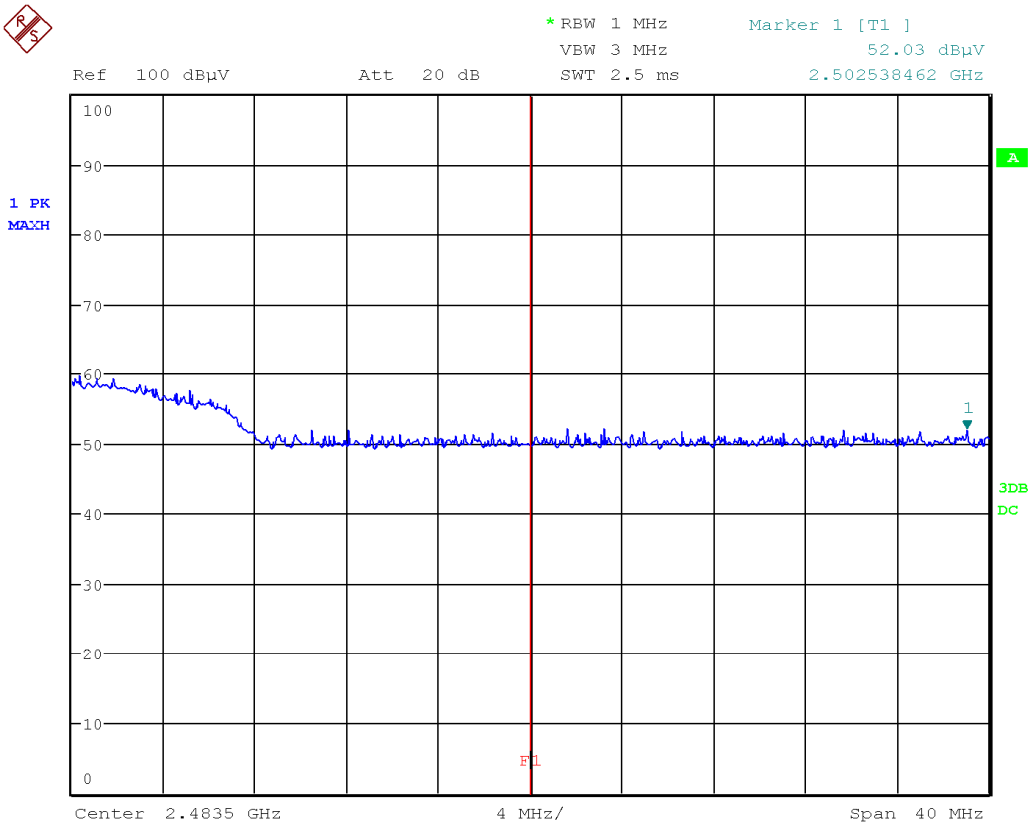

Date: 27.MAR.2020 15:07:32

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Band Edge – High Channel
X-Axis
Vertical - Peak Emission

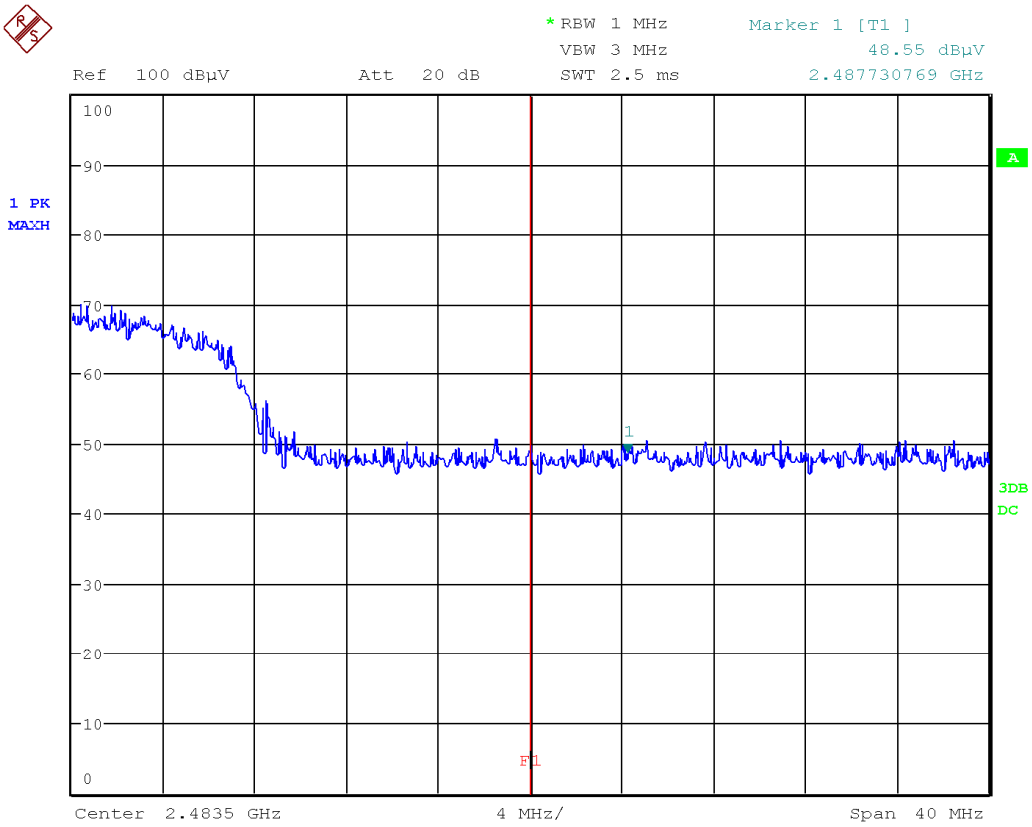

Date: 27.MAR.2020 15:14:29

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Band Edge – High Channel
X-Axis
Horizontal - Average Emission

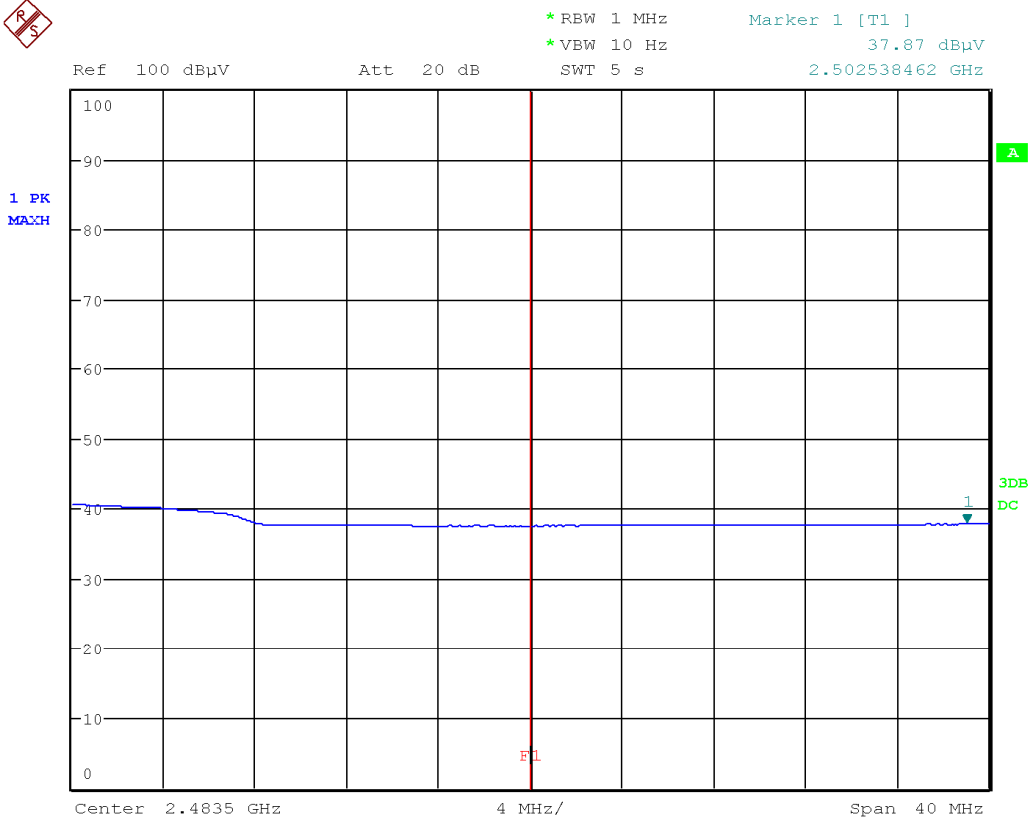

Date: 27.MAR.2020 15:07:46

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Band Edge – High Channel
X-Axis
Vertical – Average Emission

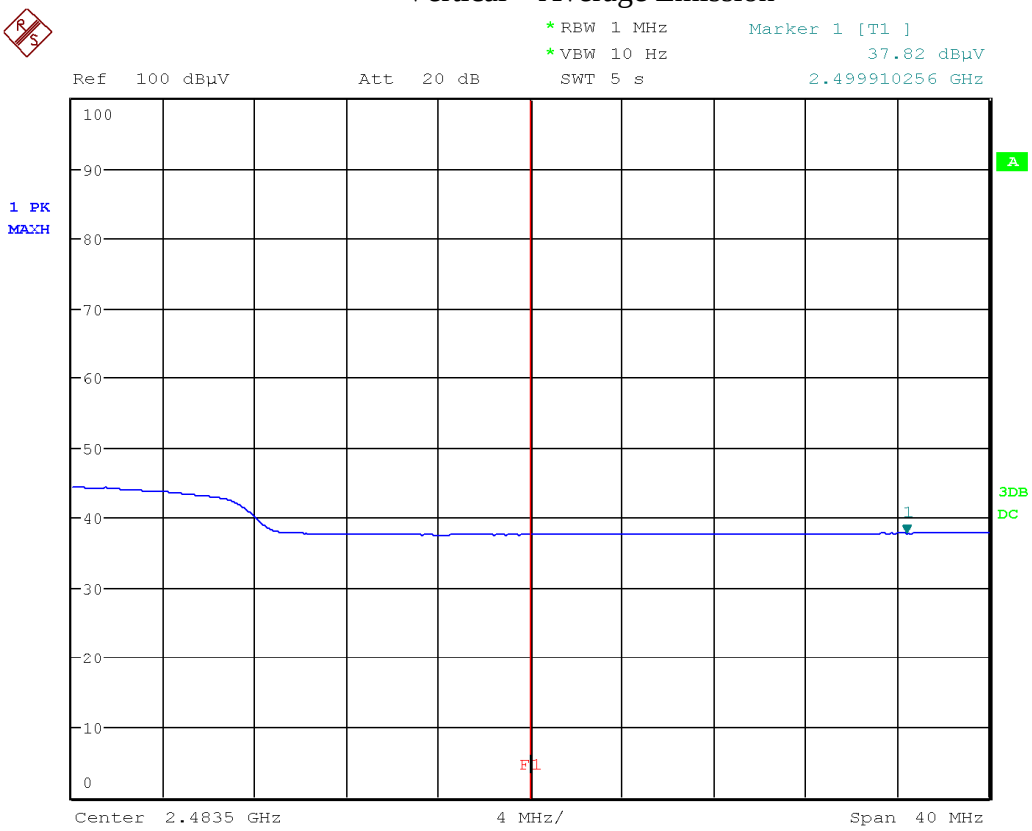

Date: 27.MAR.2020 15:14:00

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Final Measurements and Results

The EUT passed. Low, middle, and high bands were measured.

In accordance with 15.247(d), only frequencies exceeding the 15.209 limit that occur within the bands listed in 15.205 need to be verified with a final detector.

The measurements were maximized by rotating the turn table over a full 0-360 rotation and the antenna height was varied from 1 m to 4 m.

Product Category			FCC 15.209						
Supply			**Battery**						
Frequency (MHz)	**Detector**	**Received Signal (dBµV)**	**Antenna Factor (dB/m)**	**Cable Factor (dB)**	**Pre-Amp (dB)**	**Level (dBµV/m)**	**Limit (dBµV/m)**	**Margin (dB)**	**Test Result**
Horizontal Antenna Polarization									
6566.03	PEAK	46.5	28.6	8.8	-35.2	48.7	54.0	5.3	Pass
17823.80	AVG	25.0	44.0	14.1	-33.5	49.6	63.5	13.9	Pass
17506.00	AVG	26.1	43.9	13.8	-33.4	50.4	63.5	13.1	Pass
14926.20	AVG	25.5	43.5	12.7	-33.9	47.8	63.5	15.7	Pass
Vertical Antenna Polarization									
11685.50	PEAK	40.2	32.7	11.0	-34.8	49.1	54.0	4.9	Pass
6566.03	PEAK	44.8	28.7	8.8	-35.2	47.1	54.0	6.9	Pass
17842.10	AVG	25.3	43.8	14.1	-33.5	49.7	63.5	13.8	Pass
14951.70	AVG	26.2	43.4	12.7	-33.9	48.4	63.5	15.1	Pass
14139.00	AVG	25.5	40.8	12.5	-33.2	45.6	63.5	17.9	Pass

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

B-Mode, Band Edges

Test Frequency (MHz)	Detection Mode	Antenna Polarity (Horz/Vert)	Received Signal (dBµV)	Antenna Factor (dB/m)	Cable Factor (dB)	Attenuator (dB)	Pre-Amp Gain (dB)	Level (dBµV/m)	Emission Limit (dBµV/m)	Margin (dB)	Result
Low Channel - Z axis											
2412	Peak	Horz	82.5	28.3	4.7	10.0	-35.9	89.7			PASS
2412	Avg	Horz	56.5	28.3	4.7	10.0	-35.9	63.6			PASS
2412	Peak	Vert	67.8	28.3	4.7	10.0	-35.9	74.9			PASS
2412	Avg	Vert	48.4	28.3	4.7	10.0	-35.9	55.6			PASS
2390	Peak	Horz	48.8	28.2	4.7	10.0	-35.9	55.8	74.0	18.2	PASS
2390	Avg	Horz	34.5	28.2	4.7	10.0	-35.9	41.5	54.0	12.5	PASS
2390	Peak	Vert	48.1	28.2	4.7	10.0	-35.9	55.1	74.0	18.9	PASS
2390	Avg	Vert	34.4	28.2	4.7	10.0	-35.9	41.4	54.0	12.6	PASS
Low Channel - X axis											
2412	Peak	Horz	70.6	28.3	4.7	10.0	-35.9	77.7			PASS
2412	Avg	Horz	51.5	28.3	4.7	10.0	-35.9	58.6			PASS
2412	Peak	Vert	82.3	28.3	4.7	10.0	-35.9	89.4			PASS
2412	Avg	Vert	57.0	28.3	4.7	10.0	-35.9	64.2			PASS
2390	Peak	Horz	51.7	28.2	4.7	10.0	-35.9	58.7	74.0	15.3	PASS
2390	Avg	Horz	38.0	28.2	4.7	10.0	-35.9	45.0	54.0	9.0	PASS
2390	Peak	Vert	52.44	28.2	4.7	10.0	-35.9	59.4	74.0	14.6	PASS
2390	Avg	Vert	37.97	28.2	4.7	10.0	-35.9	45.0	54.0	9.0	PASS
Low Channel - Y axis											
2412	Peak	Horz	79.5	28.3	4.7	10.0	-35.9	86.6			PASS
2412	Avg	Horz	55.7	28.3	4.7	10.0	-35.9	62.9			PASS
2412	Peak	Vert	78.6	28.3	4.7	10.0	-35.9	85.7			PASS
2412	Avg	Vert	55.8	28.3	4.7	10.0	-35.9	62.9			PASS
2390	Peak	Horz	51.9	28.2	4.7	10.0	-35.9	58.9	74.0	15.1	PASS
2390	Avg	Horz	37.9	28.2	4.7	10.0	-35.9	44.9	54.0	9.1	PASS
2390	Peak	Vert	51.9	28.2	4.7	10.0	-35.9	58.9	74.0	15.1	PASS
2390	Avg	Vert	38.0	28.2	4.7	10.0	-35.9	45.0	54.0	9.0	PASS

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Test Frequency (MHz)	Detection Mode	Antenna Polarity (Horz/Vert)	Received Signal (dBµV)	Antenna Factor (dB/m)	Cable Factor (dB)	Attenuator (dB)	Pre-Amp Gain (dB)	Level (dBµV/m)	Emission Limit (dBµV/m)	Margin (dB)	Result
Mid Channel - Z axis											
2437	Peak	Horz	81.5	28.5	4.7	10.0	-35.8	88.8			PASS
2437	Avg	Horz	57.1	28.5	4.7	10.0	-35.8	64.4			PASS
2437	Peak	Vert	64.8	28.5	4.7	10.0	-35.8	72.1			PASS
2437	Avg	Vert	48.2	28.5	4.7	10.0	-35.8	55.6			PASS
Mid Channel - X axis											
2437	Peak	Horz	67.64	28.5	4.7	10.0	-35.8	75.0			PASS
2437	Avg	Horz	49.73	28.5	4.7	10.0	-35.8	57.1			PASS
2437	Peak	Vert	80.84	28.5	4.7	10.0	-35.8	88.2			PASS
2437	Avg	Vert	56.81	28.5	4.7	10.0	-35.8	64.2			PASS
Mid Channel - Y axis											
2437	Peak	Horz	78.6	28.5	4.7	10.0	-35.8	85.9			PASS
2437	Avg	Horz	55.5	28.5	4.7	10.0	-35.8	62.9			PASS
2437	Peak	Vert	74.7	28.5	4.7	10.0	-35.8	82.0			PASS
2437	Avg	Vert	53.6	28.5	4.7	10.0	-35.8	61.0			PASS
High Channel - Z axis											
2462	Peak	Horz	75.5	28.7	4.7	10.0	-35.8	83.0			PASS
2462	Avg	Horz	54.3	28.7	4.7	10.0	-35.8	61.8			PASS
2462	Peak	Vert	63.7	28.7	4.7	10.0	-35.8	71.2			PASS
2462	Avg	Vert	47.3	28.7	4.7	10.0	-35.8	54.8			PASS
2483.5	Peak	Horz	53.3	28.8	4.7	10.0	-35.8	61.0	74.0	13.0	PASS
2483.5	Avg	Horz	37.7	28.8	4.7	10.0	-35.8	45.5	54.0	8.5	PASS
2483.5	Peak	Vert	52.3	28.8	4.7	10.0	-35.8	60.0	74.0	14.0	PASS
2483.5	Avg	Vert	37.7	28.8	4.7	10.0	-35.8	45.5	54.0	8.5	PASS
High Channel - X axis											
2462	Peak	Horz	64.9	28.7	4.7	10.0	-35.8	72.5			PASS
2462	Avg	Horz	48.2	28.7	4.7	10.0	-35.8	55.7			PASS
2462	Peak	Vert	76.1	28.7	4.7	10.0	-35.8	83.6			PASS
2462	Avg	Vert	54.4	28.7	4.7	10.0	-35.8	61.9			PASS
2483.5	Peak	Horz	52.5	28.8	4.7	10.0	-35.8	60.3	74.0	13.7	PASS
2483.5	Avg	Horz	37.9	28.8	4.7	10.0	-35.8	45.6	54.0	8.4	PASS
2483.5	Peak	Vert	52.1	28.8	4.7	10.0	-35.8	59.8	74.0	14.2	PASS
2483.5	Avg	Vert	34.7	28.8	4.7	10.0	-35.8	42.5	54.0	11.5	PASS
High Channel - Y axis											
2462	Peak	Horz	71.8	28.7	4.7	10.0	-35.8	79.4			PASS
2462	Avg	Horz	51.9	28.7	4.7	10.0	-35.8	59.5			PASS
2462	Peak	Vert	70.4	28.7	4.7	10.0	-35.8	77.9			PASS
2462	Avg	Vert	51.2	28.7	4.7	10.0	-35.8	58.7			PASS
2483.5	Peak	Horz	52.6	28.8	4.7	10.0	-35.8	60.3	74.0	13.7	PASS
2483.5	Avg	Horz	37.8	28.8	4.7	10.0	-35.8	45.5	54.0	8.5	PASS
2483.5	Peak	Vert	52.7	28.8	4.7	10.0	-35.8	60.4	74.0	13.6	PASS
2483.5	Avg	Vert	37.7	28.8	4.7	10.0	-35.8	45.4	54.0	8.6	PASS

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

G-Mode, Band Edges

Test Frequency (MHz)	Detection Mode	Antenna Polarity (Horz/Vert)	Received Signal (dBµV)	Antenna Factor (dB/m)	Cable Factor (dB)	Attenuator (dB)	Pre-Amp Gain (dB)	Level (dBµV/m)	Emission Limit (dBµV/m)	Margin (dB)	Result
Low Channel - Z axis											
2412	Peak	Horz	78.1	28.3	4.7	10.0	-35.9	85.3			PASS
2412	Avg	Horz	46.7	28.3	4.7	10.0	-35.9	53.9			PASS
2412	Peak	Vert	63.1	28.3	4.7	10.0	-35.9	70.3			PASS
2412	Avg	Vert	42.1	28.3	4.7	10.0	-35.9	49.2			PASS
2390	Peak	Horz	51.5	28.2	4.7	10.0	-35.9	58.5	74.0	15.5	PASS
2390	Avg	Horz	37.9	28.2	4.7	10.0	-35.9	44.9	54.0	9.1	PASS
2390	Peak	Vert	52.52	28.2	4.7	10.0	-35.9	59.5	74.0	14.5	PASS
2390	Avg	Vert	37.59	28.2	4.7	10.0	-35.9	44.6	54.0	9.4	PASS
Low Channel - X axis											
2412	Peak	Horz	64.7	28.3	4.7	10.0	-35.9	71.9			PASS
2412	Avg	Horz	42.5	28.3	4.7	10.0	-35.9	49.6			PASS
2412	Peak	Vert	76.6	28.3	4.7	10.0	-35.9	83.8			PASS
2412	Avg	Vert	46.2	28.3	4.7	10.0	-35.9	53.4			PASS
2390	Peak	Horz	51.3	28.2	4.7	10.0	-35.9	58.2	74.0	15.8	PASS
2390	Avg	Horz	37.8	28.2	4.7	10.0	-35.9	44.8	54.0	9.2	PASS
2390	Peak	Vert	51.8	28.2	4.7	10.0	-35.9	58.8	74.0	15.2	PASS
2390	Avg	Vert	37.65	28.2	4.7	10.0	-35.9	44.6	54.0	9.4	PASS
Low Channel - Y axis											
2412	Peak	Horz	74.8	28.3	4.7	10.0	-35.9	81.9			PASS
2412	Avg	Horz	45.7	28.3	4.7	10.0	-35.9	52.8			PASS
2412	Peak	Vert	73.0	28.3	4.7	10.0	-35.9	80.2			PASS
2412	Avg	Vert	45.0	28.3	4.7	10.0	-35.9	52.2			PASS
2390	Peak	Horz	51.7	28.2	4.7	10.0	-35.9	58.7	74.0	15.3	PASS
2390	Avg	Horz	37.8	28.2	4.7	10.0	-35.9	44.8	54.0	9.2	PASS
2390	Peak	Vert	51.8	28.2	4.7	10.0	-35.9	58.8	74.0	15.2	PASS
2390	Avg	Vert	37.7	28.2	4.7	10.0	-35.9	44.7	54.0	9.3	PASS
Mid Channel - Z axis											
2437	Peak	Horz	76.9	28.5	4.7	10.0	-35.8	84.3			PASS
2437	Avg	Horz	46.4	28.5	4.7	10.0	-35.8	53.7			PASS
2437	Peak	Vert	63.5	28.5	4.7	10.0	-35.8	70.8			PASS
2437	Avg	Vert	42.1	28.5	4.7	10.0	-35.8	49.5			PASS
Mid Channel - X axis											
2437	Peak	Horz	62.84	28.5	4.7	10.0	-35.8	70.2			PASS
2437	Avg	Horz	41.92	28.5	4.7	10.0	-35.8	49.3			PASS
2437	Peak	Vert	76.78	28.5	4.7	10.0	-35.8	84.1			PASS
2437	Avg	Vert	46.34	28.5	4.7	10.0	-35.8	53.7			PASS
Mid Channel - Y axis											
2437	Peak	Horz	73.8	28.5	4.7	10.0	-35.8	81.1			PASS
2437	Avg	Horz	45.5	28.5	4.7	10.0	-35.8	52.8			PASS
2437	Peak	Vert	70.2	28.5	4.7	10.0	-35.8	77.6			PASS
2437	Avg	Vert	44.3	28.5	4.7	10.0	-35.8	51.6			PASS

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Test Frequency (MHz)	Detection Mode	Antenna Polarity (Horz/Vert)	Received Signal (dBµV)	Antenna Factor (dB/m)	Cable Factor (dB)	Attenuator (dB)	Pre-Amp Gain (dB)	Level (dBµV/m)	Emission Limit (dBµV/m)	Margin (dB)	Result
High Channel - Z axis											
2462	Peak	Horz	71.7	28.7	4.7	10.0	-35.8	79.3			PASS
2462	Avg	Horz	44.6	28.7	4.7	10.0	-35.8	52.2			PASS
2462	Peak	Vert	60.2	28.7	4.7	10.0	-35.8	67.7			PASS
2462	Avg	Vert	41.0	28.7	4.7	10.0	-35.8	48.5			PASS
2483.5	Peak	Horz	52.6	28.8	4.7	10.0	-35.8	60.3	74.0	13.7	PASS
2483.5	Avg	Horz	37.9	28.8	4.7	10.0	-35.8	45.6	54.0	8.4	PASS
2483.5	Peak	Vert	53.0	28.8	4.7	10.0	-35.8	60.7	74.0	13.3	PASS
2483.5	Avg	Vert	37.9	28.8	4.7	10.0	-35.8	45.6	54.0	8.4	PASS
High Channel - X axis											
2462	Peak	Horz	58.6	28.7	4.7	10.0	-35.8	66.2			PASS
2462	Avg	Horz	40.2	28.7	4.7	10.0	-35.8	47.8			PASS
2462	Peak	Vert	70.5	28.7	4.7	10.0	-35.8	78.1			PASS
2462	Avg	Vert	44.2	28.7	4.7	10.0	-35.8	51.8			PASS
2483.5	Peak	Horz	52.01	28.8	4.7	10.0	-35.8	59.7	74.0	14.3	PASS
2483.5	Avg	Horz	37.9	28.8	4.7	10.0	-35.8	45.6	54.0	8.4	PASS
2483.5	Peak	Vert	51.6	28.8	4.7	10.0	-35.8	59.3	74.0	14.7	PASS
2483.5	Avg	Vert	37.7	28.8	4.7	10.0	-35.8	45.4	54.0	8.6	PASS
High Channel - Y axis											
2462	Peak	Horz	69.5	28.7	4.7	10.0	-35.8	77.0			PASS
2462	Avg	Horz	43.9	28.7	4.7	10.0	-35.8	51.5			PASS
2462	Peak	Vert	65.4	28.7	4.7	10.0	-35.8	72.9			PASS
2462	Avg	Vert	42.4	28.7	4.7	10.0	-35.8	50.0			PASS
2483.5	Peak	Horz	51.7	28.8	4.7	10.0	-35.8	59.4	74.0	14.6	PASS
2483.5	Avg	Horz	37.7	28.8	4.7	10.0	-35.8	45.4	54.0	8.6	PASS
2483.5	Peak	Vert	51.9	28.8	4.7	10.0	-35.8	59.6	74.0	14.4	PASS
2483.5	Avg	Vert	37.9	28.8	4.7	10.0	-35.8	45.6	54.0	8.4	PASS

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

N-Mode, Band Edges

Test Frequency (MHz)	Detection Mode	Antenna Polarity (Horz/Vert)	Received Signal (dBµV)	Antenna Factor (dB/m)	Cable Factor (dB)	Attenuator (dB)	Pre-Amp Gain (dB)	Level (dBµV/m)	Emission Limit (dBµV/m)	Margin (dB)	Result
Low Channel - Z axis											
2412	Peak	Horz	76.3	28.3	4.7	10.0	-35.9	83.4			PASS
2412	Avg	Horz	46.5	28.3	4.7	10.0	-35.9	53.7			PASS
2412	Peak	Vert	64.4	28.3	4.7	10.0	-35.9	71.5			PASS
2412	Avg	Vert	42.4	28.3	4.7	10.0	-35.9	49.5			PASS
2390	Peak	Horz	56.7	28.2	4.7	10.0	-35.9	63.7	74.0	10.3	PASS
2390	Avg	Horz	42.0	28.2	4.7	10.0	-35.9	49.0	54.0	5.0	PASS
2390	Peak	Vert	51.8	28.2	4.7	10.0	-35.9	58.8	74.0	15.2	PASS
2390	Avg	Vert	38.0	28.2	4.7	10.0	-35.9	45.0	54.0	9.0	PASS
Low Channel - X axis											
2412	Peak	Horz	62.6	28.3	4.7	10.0	-35.9	69.8			PASS
2412	Avg	Horz	41.8	28.3	4.7	10.0	-35.9	49.0			PASS
2412	Peak	Vert	75.22	28.3	4.7	10.0	-35.9	82.4			PASS
2412	Avg	Vert	45.99	28.3	4.7	10.0	-35.9	53.1			PASS
2390	Peak	Horz	52.0	28.2	4.7	10.0	-35.9	59.0	74.0	15.0	PASS
2390	Avg	Horz	37.9	28.2	4.7	10.0	-35.9	44.9	54.0	9.1	PASS
2390	Peak	Vert	51.86	28.2	4.7	10.0	-35.9	58.8	74.0	15.2	PASS
2390	Avg	Vert	38.04	28.2	4.7	10.0	-35.9	45.0	54.0	9.0	PASS
Low Channel - Y axis											
2412	Peak	Horz	74.0	28.3	4.7	10.0	-35.9	81.2			PASS
2412	Avg	Horz	45.7	28.3	4.7	10.0	-35.9	52.9			PASS
2412	Peak	Vert	70.3	28.3	4.7	10.0	-35.9	77.4			PASS
2412	Avg	Vert	44.3	28.3	4.7	10.0	-35.9	51.4			PASS
2390	Peak	Horz	52.3	28.2	4.7	10.0	-35.9	59.2	74.0	14.8	PASS
2390	Avg	Horz	38.0	28.2	4.7	10.0	-35.9	45.0	54.0	9.0	PASS
2390	Peak	Vert	51.9	28.2	4.7	10.0	-35.9	58.9	74.0	15.1	PASS
2390	Avg	Vert	38.0	28.2	4.7	10.0	-35.9	45.0	54.0	9.0	PASS

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Test Frequency (MHz)	Detection Mode	Antenna Polarity (Horz/Vert)	Received Signal (dBµV)	Antenna Factor (dB/m)	Cable Factor (dB)	Attenuator (dB)	Pre-Amp Gain (dB)	Level (dBµV/m)	Emission Limit (dBµV/m)	Margin (dB)	Result
Mid Channel - Z axis											
2437	Peak	Horz	76.5	28.5	4.7	10.0	-35.8	83.8			PASS
2437	Avg	Horz	46.4	28.5	4.7	10.0	-35.8	53.8			PASS
2437	Peak	Vert	62.5	28.5	4.7	10.0	-35.8	69.8			PASS
2437	Avg	Vert	42.0	28.5	4.7	10.0	-35.8	49.3			PASS
Mid Channel - X axis											
2437	Peak	Horz	65.96	28.5	4.7	10.0	-35.8	73.3			PASS
2437	Avg	Horz	43	28.5	4.7	10.0	-35.8	50.3			PASS
2437	Peak	Vert	75.28	28.5	4.7	10.0	-35.8	82.6			PASS
2437	Avg	Vert	46.07	28.5	4.7	10.0	-35.8	53.4			PASS
Mid Channel - Y axis											
2437	Peak	Horz	73.1	28.5	4.7	10.0	-35.8	80.4			PASS
2437	Avg	Horz	45.5	28.5	4.7	10.0	-35.8	52.8			PASS
2437	Peak	Vert	70.1	28.5	4.7	10.0	-35.8	77.5			PASS
2437	Avg	Vert	44.2	28.5	4.7	10.0	-35.8	51.5			PASS
High Channel - Z axis											
2462	Peak	Horz	70.9	28.7	4.7	10.0	-35.8	78.4			PASS
2462	Avg	Horz	44.5	28.7	4.7	10.0	-35.8	52.0			PASS
2462	Peak	Vert	59.1	28.7	4.7	10.0	-35.8	66.6			PASS
2462	Avg	Vert	40.3	28.7	4.7	10.0	-35.8	47.8			PASS
2483.5	Peak	Horz	52.7	28.8	4.7	10.0	-35.8	60.4	74.0	13.6	PASS
2483.5	Avg	Horz	37.7	28.8	4.7	10.0	-35.8	45.4	54.0	8.6	PASS
2483.5	Peak	Vert	52.6	28.8	4.7	10.0	-35.8	60.3	74.0	13.7	PASS
2483.5	Avg	Vert	37.7	28.8	4.7	10.0	-35.8	45.4	54.0	8.6	PASS
High Channel - X axis											
2462	Peak	Horz	60.2	28.7	4.7	10.0	-35.8	67.7			PASS
2462	Avg	Horz	40.9	28.7	4.7	10.0	-35.8	48.4			PASS
2462	Peak	Vert	71.6	28.7	4.7	10.0	-35.8	79.2			PASS
2462	Avg	Vert	44.7	28.7	4.7	10.0	-35.8	52.3			PASS
2483.5	Peak	Horz	52.0	28.8	4.7	10.0	-35.8	59.8	74.0	14.2	PASS
2483.5	Avg	Horz	38.9	28.8	4.7	10.0	-35.8	46.6	54.0	7.4	PASS
2483.5	Peak	Vert	51.9	28.8	4.7	10.0	-35.8	59.6	74.0	14.4	PASS
2483.5	Avg	Vert	37.8	28.8	4.7	10.0	-35.8	45.5	54.0	8.5	PASS
High Channel - Y axis											
2462	Peak	Horz	69.7	28.7	4.7	10.0	-35.8	77.2			PASS
2462	Avg	Horz	44.1	28.7	4.7	10.0	-35.8	51.7			PASS
2462	Peak	Vert	66.5	28.7	4.7	10.0	-35.8	74.0			PASS
2462	Avg	Vert	43.0	28.7	4.7	10.0	-35.8	50.5			PASS
2483.5	Peak	Horz	52.0	28.8	4.7	10.0	-35.8	59.7	74.0	14.3	PASS
2483.5	Avg	Horz	37.9	28.8	4.7	10.0	-35.8	45.6	54.0	8.4	PASS
2483.5	Peak	Vert	52.0	28.8	4.7	10.0	-35.8	59.7	74.0	14.3	PASS
2483.5	Avg	Vert	37.8	28.8	4.7	10.0	-35.8	45.5	54.0	8.5	PASS

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Test Equipment List

Equipment	Model No.	Manufacturer	Last Calibration Date	Next Calibration Date	Asset #
Spectrum Analyzer	ESU 40	Rohde & Schwarz	Jan. 15, 2020	Jan. 15, 2022	GEMC 233
Loop Antenna	EM 6871	Electro-Metrics	Feb 15, 2019	Feb 15, 2021	GEMC 70
Loop Antenna	EM 6872	Electro-Metrics	Feb 15, 2019	Feb 15, 2021	GEMC 71
BiLog Antenna	3142-C	ETS-Lindgren	Oct. 19, 2018	Oct. 19, 2020	GEMC 8
Horn Antenna 1 – 4 GHz	3117	ETS-Lindgren	Feb. 17, 2020	Feb. 17, 2022	GEMC 340
Horn Antenna 4 – 18 GHz	WBH218HN	Q-par	Apr. 1, 2020	Apr. 1, 2022	GEMC 6375
Horn Antenna 18 - 26.5 GHz	SAS-572	A.H. Systems	Oct. 23, 2018	Oct. 23, 2020	GEMC 6371
Attenuator 6 dB	612-6-1	Meca Electronics, Inc	NCR	NCR	GEMC 287
Pre-Amp 9 kHz – 1 GHz	LNA 6901	Teseq	Feb. 25, 2019	Feb. 25, 2021	GEMC 168
Pre-Amp 1 – 26.5 GHz	HP 8449B	HP	Aug. 4, 2020	Aug. 4, 2022	GEMC 312
2.4Ghz-2.5GHz Notch Filter	BRM50702	Micro-Tronics	NCR	NCR	GEMC 230
RF Cable 10m	LMR-400-10M-50Ω-MN-MN	LexTec	NCR	NCR	GEMC 274
RF Cable 2m	Sucoflex 104A	Huber+Suhner	NCR	NCR	GEMC 271
Emissions Software	0.1.99	TUV SUD Canada, Inc.	NCR	NCR	GEMC 58

FCC - 15.209 -Radiated Emissions_Rev1

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Power Spectral Density

Purpose

The purpose of this test is to ensure that the maximum power spectral density to the radiating element does not exceed the limits specified. This ensures that the modulation is significantly wide enough, or low enough in power that it will allow for co-operation of other wireless devices operating within this frequency allocation.

Limits and Method

The limits are defined in 15.247(e) and RSS-247 5.2(b).

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

The method is given in FCC KDB 558074 Section 10.2.

Results

The EUT passed. The EUT was set to transmit at maximum power. The EUT supports three modes of operation, 802.11 b/g/n. The n-mode only support 20 MHz nominal bandwidth. Three Channels for each mode were measured. External attenuator and cable loss were accounted for as reference offset in the spectrum analyzer. The following tables show the peak power spectral density:

PSD: B-Mode				
Channel	Frequency (MHz)	PSD/3kHz (dBm)	Limit (dBm/3kHz)	Pass/Fail
1	2412	-14.48	8	Pass
6	2437	-15.26	8	Pass
11	2462	-14.44	8	Pass

PSD: G-Mode				
Channel	Frequency (MHz)	PSD/3kHz (dBm)	Limit (dBm/3kHz)	Pass/Fail
1	2412	-22.58	8	Pass
6	2437	-20.50	8	Pass
11	2462	-21.38	8	Pass

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

PSD: N-Mode				
Channel	Frequency (MHz)	PSD/3kHz (dBm)	Limit (dBm/3kHz)	Pass/Fail
1	2412	-22.57	8	Pass
6	2437	-20.66	8	Pass
11	2462	-21.32	8	Pass

Graphs

The graphs shown below show the power spectral density of the device during the conducted measurement operation of the EUT. The external attenuator and cable loss are accounted for as reference offset in the spectrum analyzer.

PSD – B Mode, Channel 11

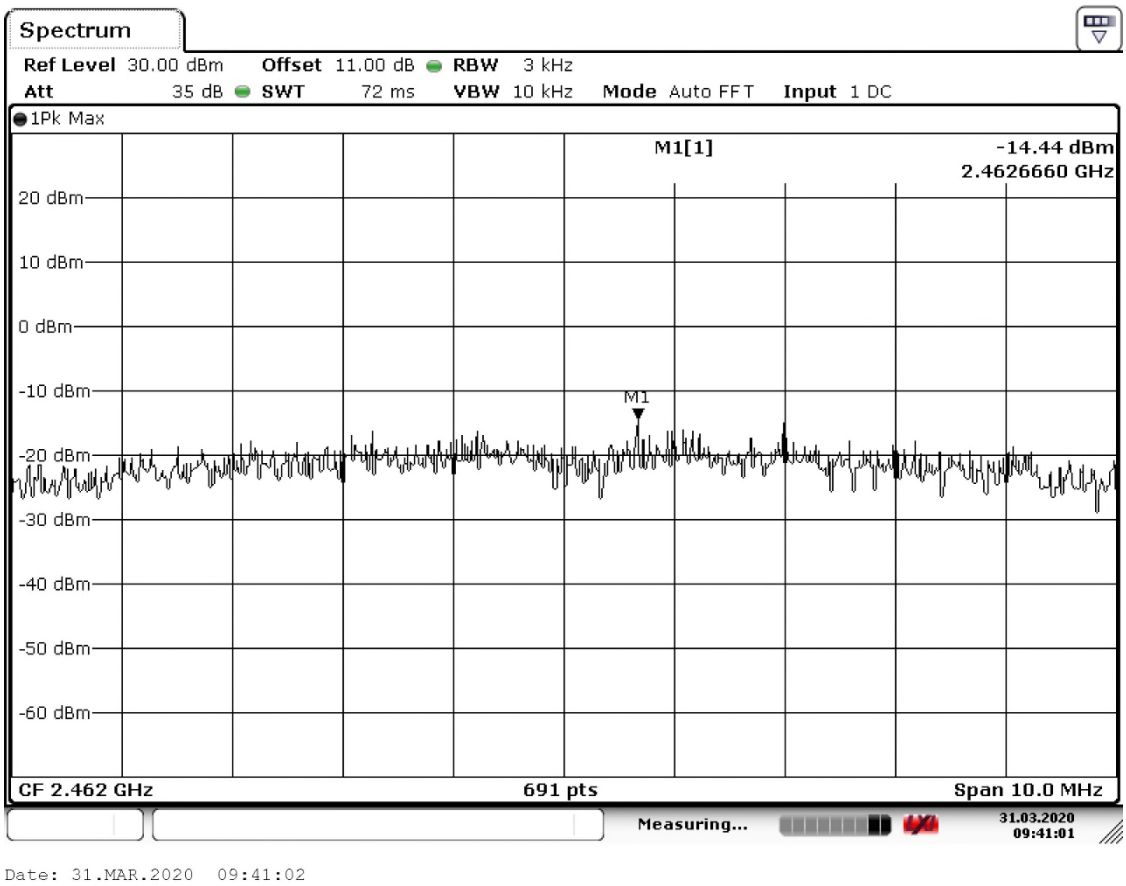

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

PSD – G Mode, Channel 6

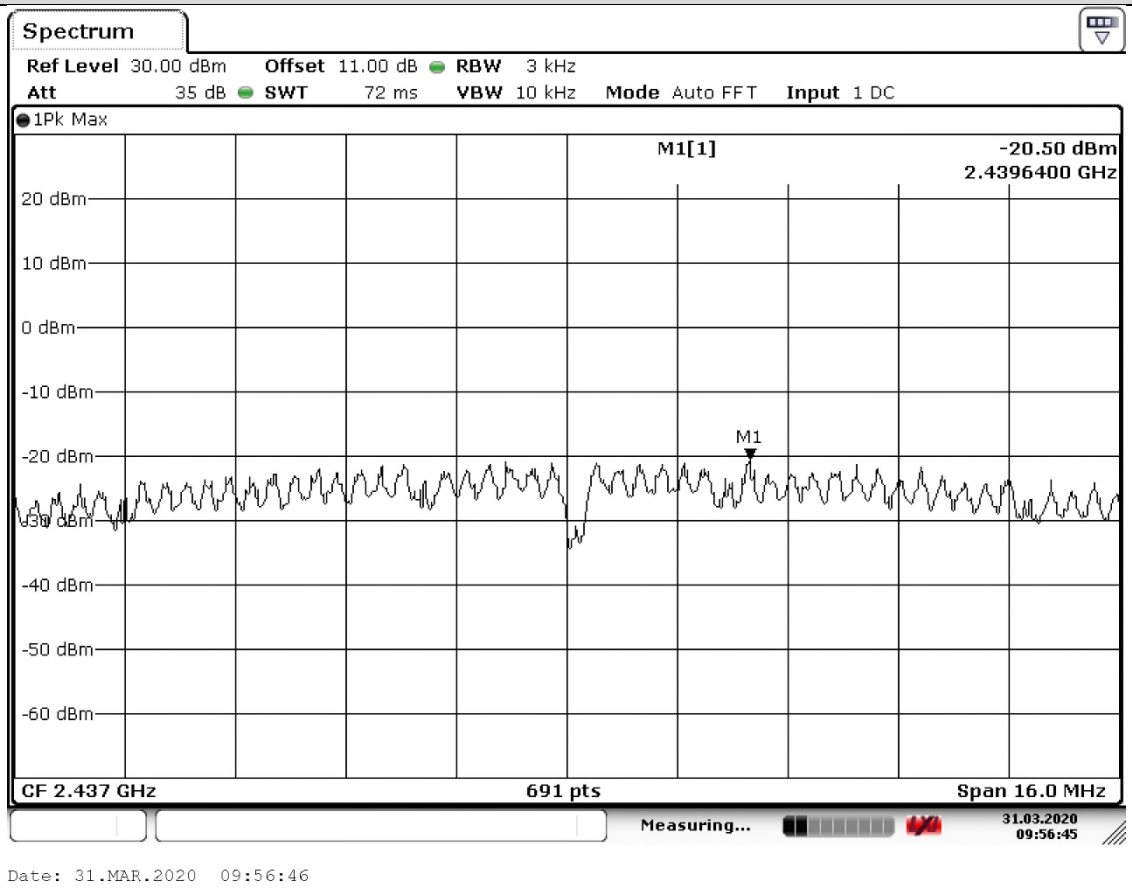

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

PSD – N Mode, Channel 6

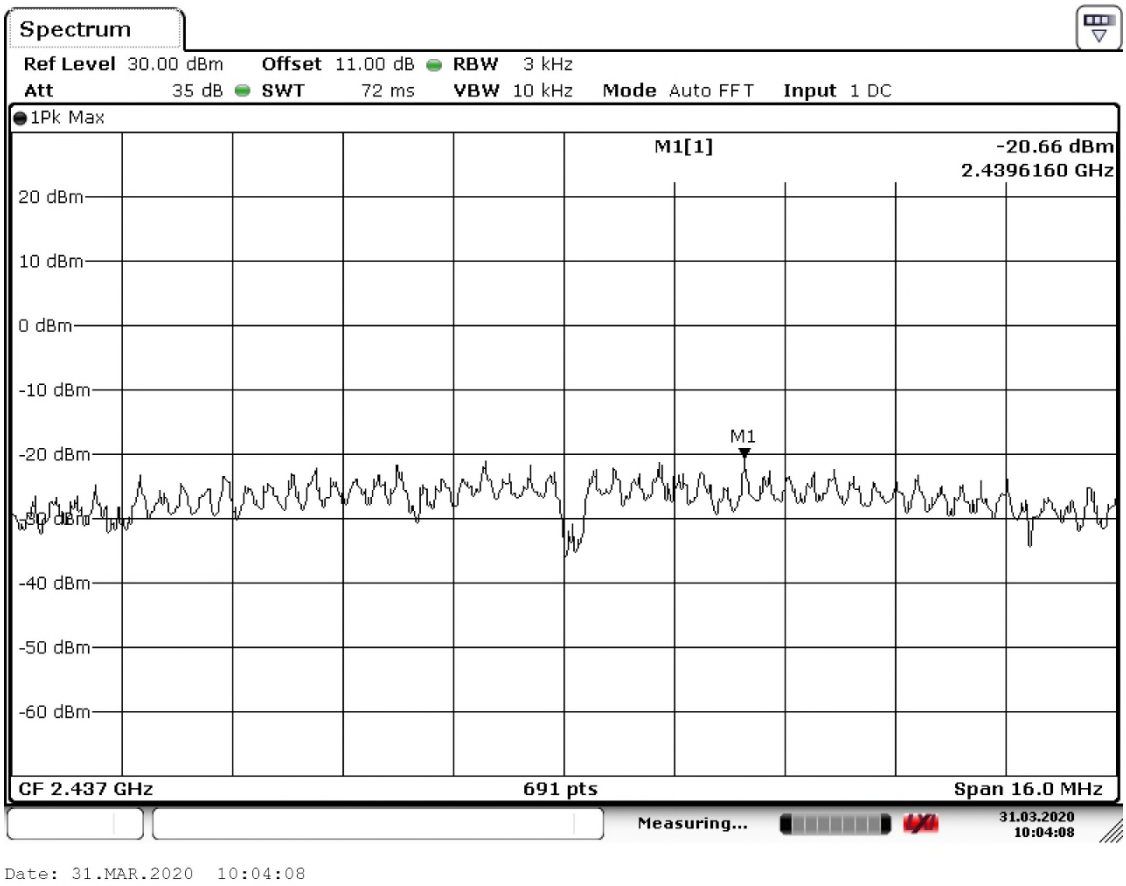

See 'Appendix B – EUT and Test Setup Photos' for photos showing the test set-up.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Test Equipment List

Equipment	Model No.	Manufacturer	Last Calibration Date	Next Calibration Date	Asset #
Spectrum Analyzer	ESR 26	Rohde & Schwarz	Mar. 6, 2020	Mar. 6, 2022	GEMC 341
Attenuator 10 dB	8493B	Agilent	NCR	NCR	GEMC 133

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Power Line Conducted Emissions

Purpose

The purpose of this test is to ensure that the RF energy unintentionally emitted from the EUT's power line does not exceed the limits listed below as defined in the applicable test standard and measured from a LISN. This helps protect lower frequency radio services such as AM radio, shortwave radio, amateur radio, maritime radio, CB radio, and so on, from unwanted interference.

Limits & Method

The method is as defined in ANSI C63.4. The limits are as defined in FCC Part 15 Section 15.207:

Average Limits		Quasi-Peak Limits	
150 kHz – 500 kHz	56 to 46* dBµV	150 kHz – 500 kHz	66 to 56* dBµV
500 kHz – 5 MHz	46 dBµV	500 kHz – 5 MHz	56 dBµV
5 MHz – 30 MHz	50 dBµV	5 MHz – 30 MHz	60 dBµV

* Decreases linearly with the logarithm of the frequency

Both Quasi-Peak and Average limits are applicable and each is specified as being measured with a resolution bandwidth of 9 kHz. For Quasi-Peak, a video bandwidth at least three times greater than the resolution bandwidth is used.

Based on ANSI C63.4 Section 4.2, if the Peak or Quasi-Peak detector measurements do not exceed the Average limits, then the EUT is deemed to have passed the requirements.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Typical Setup Diagram

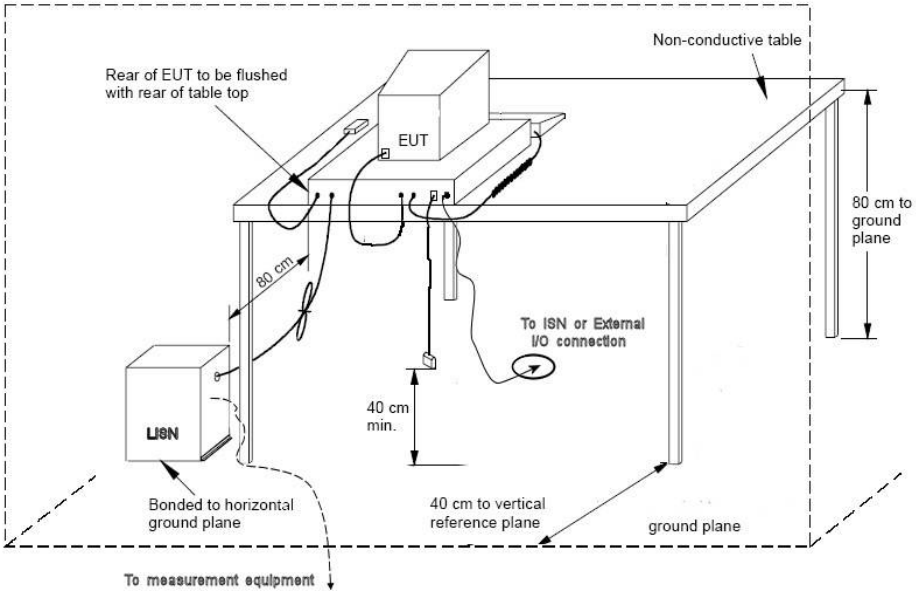

Measurement Uncertainty

The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2 and is ±2.27dB with a 'k=2' coverage factor and a 95% confidence level.

Preliminary Graphs

The graphs shown below are maximized peak measurement graphs measured with a resolution bandwidth greater than or equal to the final required detector. This peaking process is done as a worst-case measurement and enables the detection of frequencies of concern for final measurement. For final measurements with the appropriate detector, where applicable, please refer to the tables under Final Measurements.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Line 1 (L1) – 120Vac 60Hz

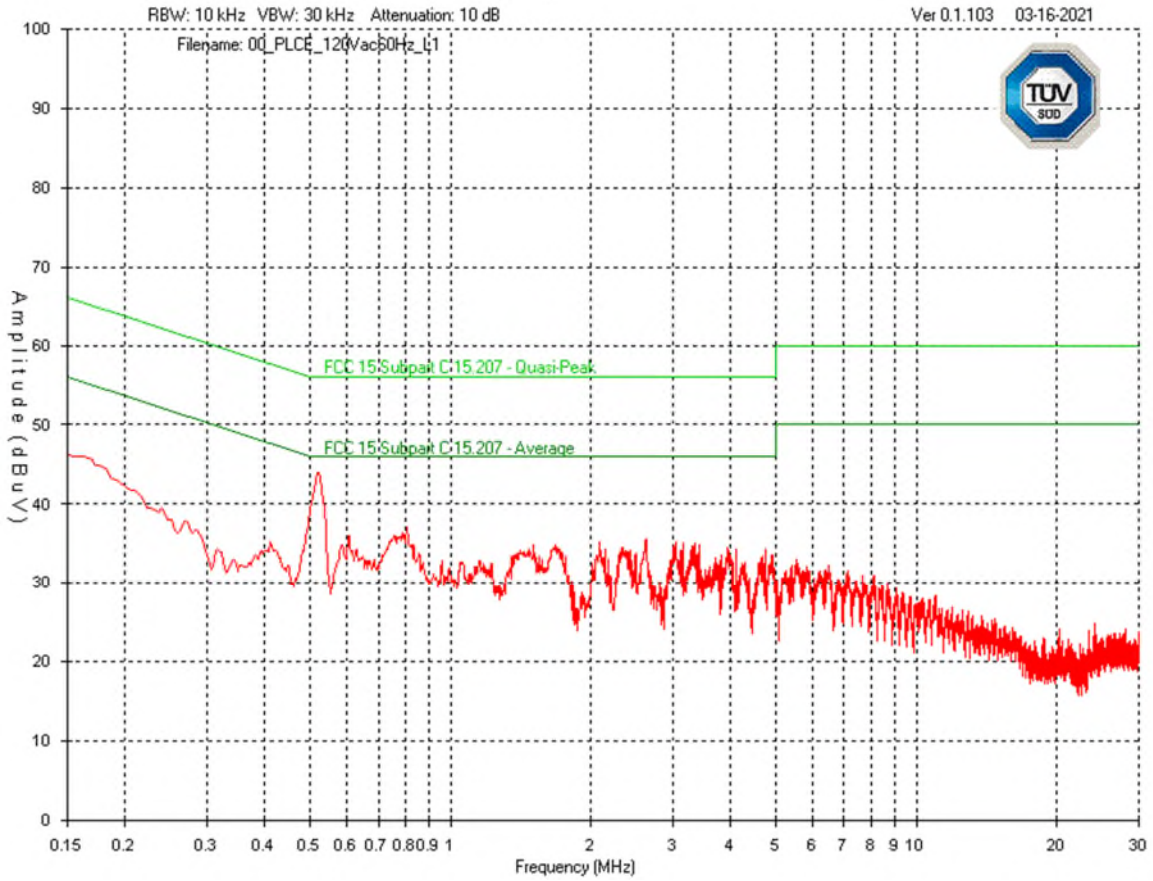

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Line 2 (L2) – 120Vac 60Hz

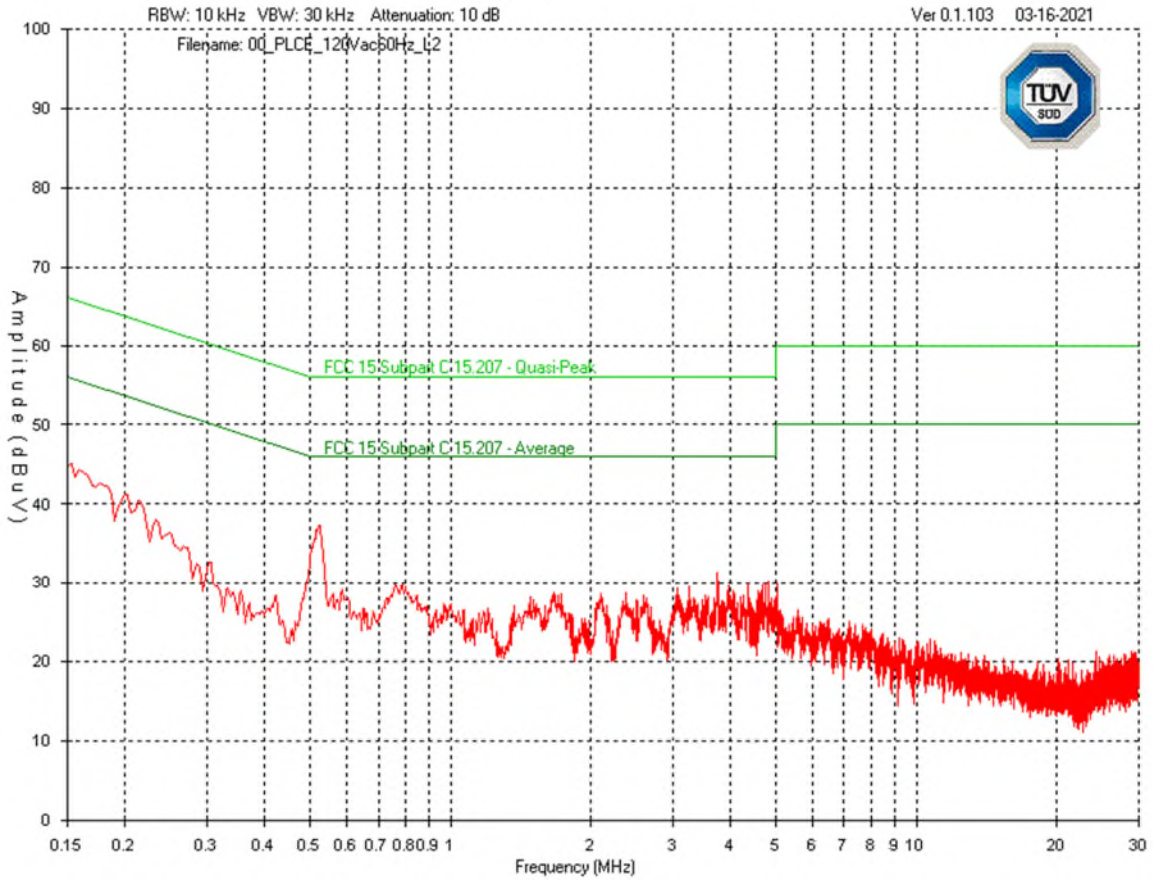

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Final Measurements

Supply			120Vac 60Hz								
Frequency (MHz)	**Detector**	**Received Signal (dBµV)**	**Atten Factor (dB)**	**Cable Factor (dB)**	**LISN Factor (dB)**	**Level (dBµV)**	**QP Limit (dBµV)**	**AVG Limit (dBµV)**	**QP Margin (dB)**	**AVG Margin (dB)**	**Test Result**
Line 1											
0.5189	AVG	21.9	10	0.1	0.1	32.1	--	46	--	13.9	Pass
0.8047	SCAN	26.9	10	0.1	0.1	37.1	56	46	18.9	8.9	Pass
0.1633	SCAN	36	10	0	0.1	46.1	65.3	55.3	19.2	9.2	Pass
2.6292	SCAN	25.4	10	0.1	0.1	35.6	56	46	20.4	10.4	Pass
3.0446	SCAN	25.2	10	0.1	0.1	35.4	56	46	20.6	10.6	Pass
2.0908	SCAN	25.1	10	0.1	0.1	35.3	56	46	20.7	10.7	Pass
Line 2											
0.5222	SCAN	27.1	10	0.1	0.1	37.3	56	46	18.7	8.7	Pass
0.1533	SCAN	35	10	0	0.1	45.1	65.8	55.8	20.7	10.7	Pass
3.7492	SCAN	21.2	10	0.1	0.1	31.4	56	46	24.6	14.6	Pass
4.8126	SCAN	20.1	10	0.1	0.1	30.3	56	46	25.7	15.7	Pass
4.354	SCAN	20	10	0.1	0.1	30.2	56	46	25.8	15.8	Pass
4.7495	SCAN	19.9	10	0.1	0.1	30.1	56	46	25.9	15.9	Pass

Average and Quasi-Peak Emissions Table

Note:

Peak = Peak measurement
AVG = Average measurement
QP = Quasi-Peak measurement

See 'Appendix B – EUT, Peripherals and Test Setup Photos' for photos showing the test set-up for the highest line conducted emission

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Test Equipment List

Equipment	Model No.	Manufacturer	Last Calibration Date	Next Calibration Date	Asset #
Spectrum Analyzer	ESL 6	Rohde & Schwarz	Feb. 12, 2021	Feb. 12, 2023	GEMC 160
LISN	FCC-LISN-50/250-16-2-01	FCC	Feb. 10, 2021	Feb. 10, 2023	GEMC 303
RF Cable 3m	LMR-400-3M-50Ω-MN-MN	LexTec	NCR	NCR	GEMC 276
Attenuator 10 dB	6N10W-10	Inmet	NCR	NCR	GEMC 350
Emissions Software	0.1.103	TUV SUD Canada, Inc.	NCR	NCR	GEMC 58

FCC_ICES003_PLCE_Rev1

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Appendix A – EUT Summary

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

For further details for filing purposes, refer to filing package.

General EUT Description

Client	
Organization / Address	BresoTEC Inc. 555 Richmond Street West Unit 407 Toronto, Ontario, Canada M5V 3B1
Contact	Jackson Yu
Phone	647-289-8769
Email	Jackson.yu@bresotec.com
EUT Details	
EUT Name	**Patch**
Model	**BTSM1US-URU**
FCC ID	2AYNV-BTSM1URU
IC	26577-BTSM1URU
Equipment Category	Medical Electrical Device
Basic EUT Functionality	BTSM1US-URU is a wearable sensor.
Input Voltage	3.8Vdc Nominal
Connectors available on EUT	None
Peripherals Required for Test	Laptop to configure the test firmware on the EUT via UART
Intentional Radiator Frequency	2400 – 2483.5 MHz for WIF applications as described above.
EUT Configuration	Wireless configured to transmit continuously with the following commands: - Data Rate: B (5.5 Mbps CCK); G (6 Mbps OFDM); N (MCS0) - Tx Power: 6 - Transmission Pattern: All 0 - Duty Cycle: Continuous

Note: The EUT is considered to have been received the date of the commencement of the first test, unless otherwise stated. For a close-up picture of the EUT, see ‘Appendix B – EUT and Test Setup Photos’.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Appendix B – EUT and Test Setup Photos

Refer to the files separate from this test report

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.