

FCC Radio Test Report

FCC ID: 2AYOTTPA-M002P


This report concerns: Class II Permissive Change

Project No. : 2101C244A
Equipment : 1. HP Wireless Rechargeable USI Pen
 2. HP Wireless Rechargeable USI Pen G2
Brand Name : HP
Test Model : 1. TPA-M002P
Series Model : 2. TPA-M004P
Applicant : Shenzhen qianfenyi intelligent technology co., LTD.
Address : Room 2101, Building 3, Nanshan i Park Chongwen, 3370 Liuxian Avenue, Nanshan District, Shenzhen
Manufacturer : Shenzhen qianfenyi intelligent technology co., LTD.
Address : Room 2101, Building 3, Nanshan i Park Chongwen, 3370 Liuxian Avenue, Nanshan District, Shenzhen
Date of Receipt : Jan. 27, 2021
 Jan. 04, 2022
Date of Test : Jan. 28, 2021 ~ Apr. 08, 2021
 Jan. 05, 2022 ~ Jan. 14, 2022
Issued Date : Jan. 29, 2022
Report Version : R00
Test Sample : Engineering Sample No.: DG20200225119, DG20210225120;
 DG2022010551 for radiated emissions 9KHz to 30MHz.
Standard(s) : FCC CFR Title 47, Part 15, Subpart C
 ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.



Prepared by : Chella Zheng



Approved by : Chay Cai



TESTING CERT #5123.02

Add: No. 3 Jinshagang 1st Rd. Shixia, Dalang Town Dongguan City, Guangdong 523792

People's Republic of China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	4
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
1.3 TEST ENVIRONMENT CONDITIONS	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	7
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.4 DESCRIPTION OF SUPPORT UNITS	8
3 . RADIATED EMISSION TEST	9
3.1 LIMIT	9
3.2 TEST PROCEDURE	9
3.3 DEVIATION FROM TEST STANDARD	9
3.4 TEST SETUP	10
3.5 EUT OPERATING CONDITIONS	11
3.6 TEST RESULT - 9 KHZ TO 30 MHZ	11
3.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	11
4 . MEASUREMENT INSTRUMENTS LIST	12
5 . EUT TEST PHOTO	13
APPENDIX A - RADIATED EMISSION - 9 KHZ TO 30 MHZ	16
APPENDIX B - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	23

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Compared with original report(BTL-FCCP-1-2101C244), 1. Change the number and shape of the magnets in the product. 2. Added the equipment name and series model name. 3. Changed the applicant and manufacturer address. So the radiated emissions 9KHz to 30MHz have been re-evaluated and recorded in this report. And updated the standard writing. Other are kept the same.	Jan. 29, 2022

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	N/A	N/A	-----
15.209(a)	Radiated Emissions	APPENDIX A APPENDIX B	PASS	-----
-----	Bandwidth	N/A	N/A	-----

NOTE:

(1) "N/A" denotes test is not applicable to this device.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No. 3 Jinshagang 1st Rd. Shixia, Dalang Town Dongguan City, Guangdong 523792 People's Republic of China.

BTL's Registration Number for FCC: 357015

BTL's Designation Number for FCC: CN1240

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

The BTL measurement uncertainty as below table:

A. Radiated emissions Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-CB01	CISPR	9kHz ~ 30MHz	2.36

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	30MHz ~ 200MHz	V	4.26
		30MHz ~ 200MHz	H	3.38
		200MHz ~ 1,000MHz	V	3.98
		200MHz ~ 1,000MHz	H	3.94

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
Radiated Emissions-9K-30MHz	19°C	46%	DC 4.2V	Torocat Yuan
Radiated Emissions-30 MHz to 1000MHz	26°C	52%	DC 4.2V	Hayden Chen

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	1. HP Wireless Rechargeable USI Pen 2. HP Wireless Rechargeable USI Pen G2
Brand Name	HP
Test Model	1. TPA-M002P
Series Model	2. TPA-M004P
Model Difference(s)	N/A
Power	Lithium battery 80mAh Power Consumption: working 1.21mA $\pm$ 15% @4.2V Working voltage range: 3.0-4.2V
Operation Frequency	120-480kHz

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX Mode


Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

Radiated emissions test	
Final Test Mode	Description
Mode 1	TX Mode

Note:

- The EUT has the maximum average output power when the support unit is in low power and being charged by EUT.

2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

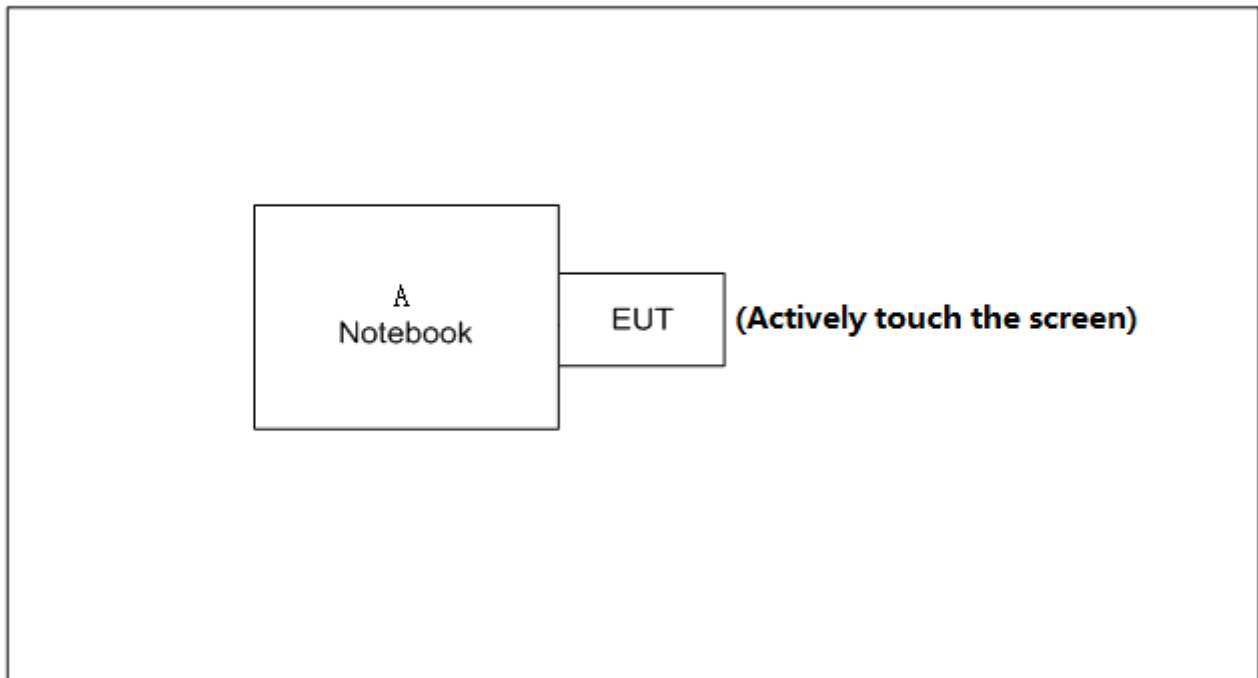

2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Chrome	US1140	C1L0500034

Item	Cable Type	Shielded Type	Ferrite Core	Length
-	-	-	-	-

3. RADIATED EMISSION TEST

3.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT(9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

3.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- d. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 DEVIATION FROM TEST STANDARD


No deviation.

3.4 TEST SETUP

9 kHz-30 MHz

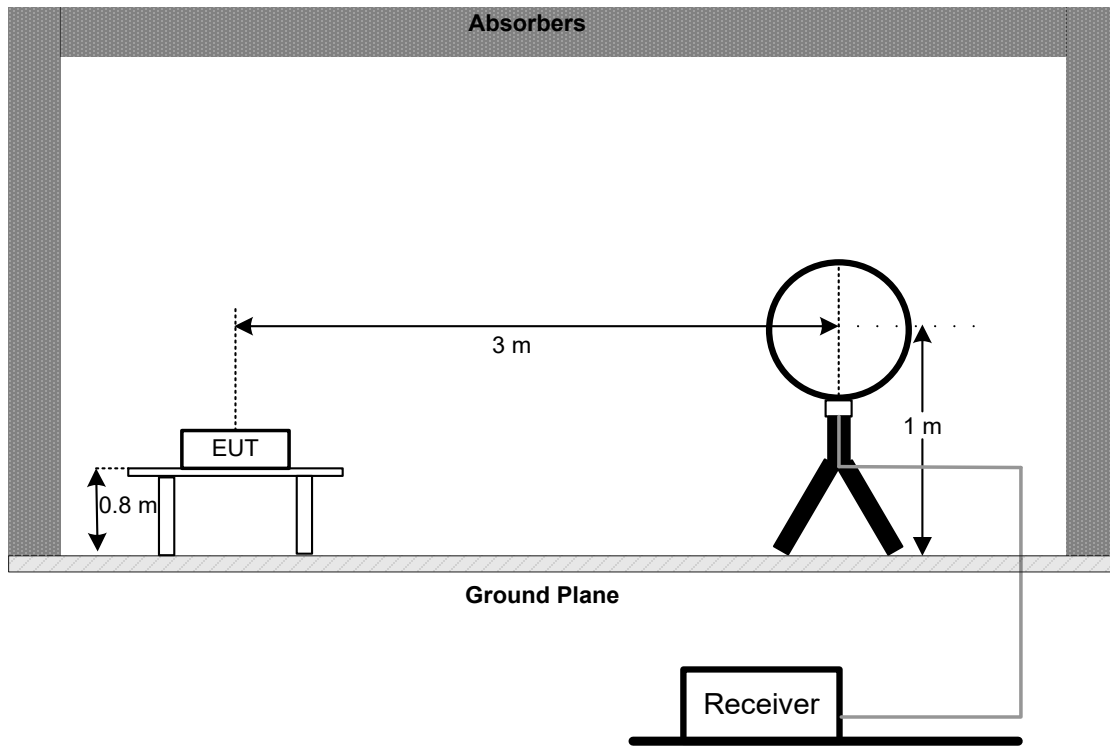

30 MHz to 1 GHz

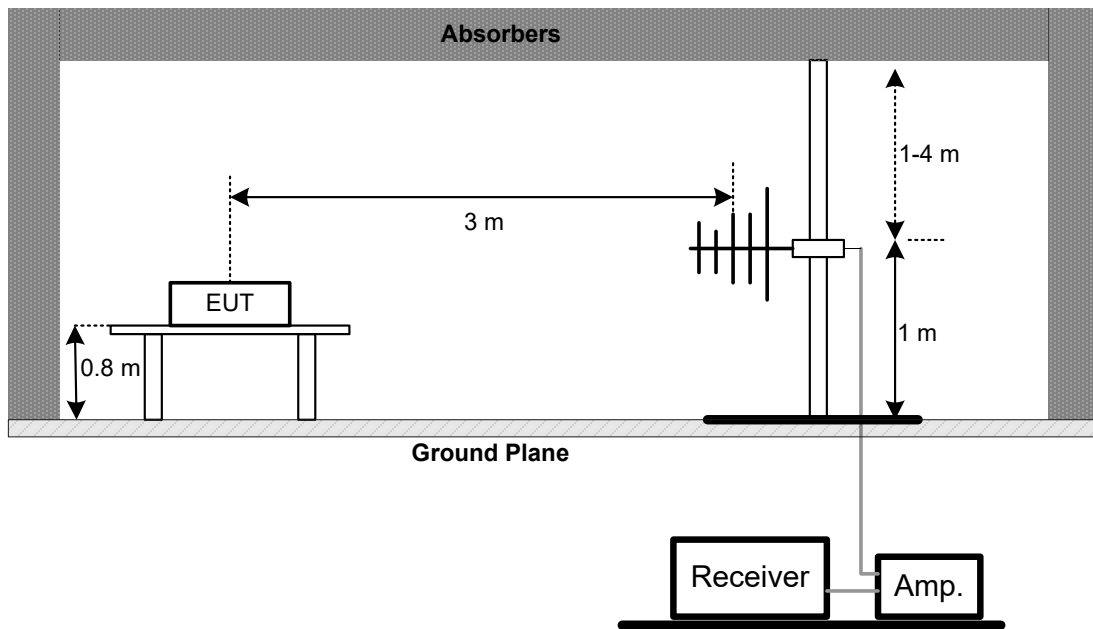

3.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

3.6 TEST RESULT - 9 kHz TO 30 MHz

Please refer to the APPENDIX A.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

3.7 TEST RESULTS - 30 MHz TO 1000 MHz

Please refer to the APPENDIX B.

4. MEASUREMENT INSTRUMENTS LIST


Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	EM	EM-6876-1	230	Apr. 28, 2022
2	Cable	N/A	RG 213/U	N/A	May 27, 2022
3	EMI Test Receiver	R&S	ESCI	100382	Feb. 28, 2022
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
5	966 Chambe Room	RM	9*6*6m	N/A	Apr. 14, 2022

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	586	Nov. 27, 2021
2	Amplifier	HP	8447D	2944A08742	Feb. 28, 2022
3	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2021
4	Cable	emci	LMR-400(30MHz-1 GHz)(8m+5m)	N/A	May 22, 2021
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	966 Chambe Room	RM	9*6*6m	N/A	Jul. 25, 2021

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

APPENDIX A - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX Mode
-----------	---------

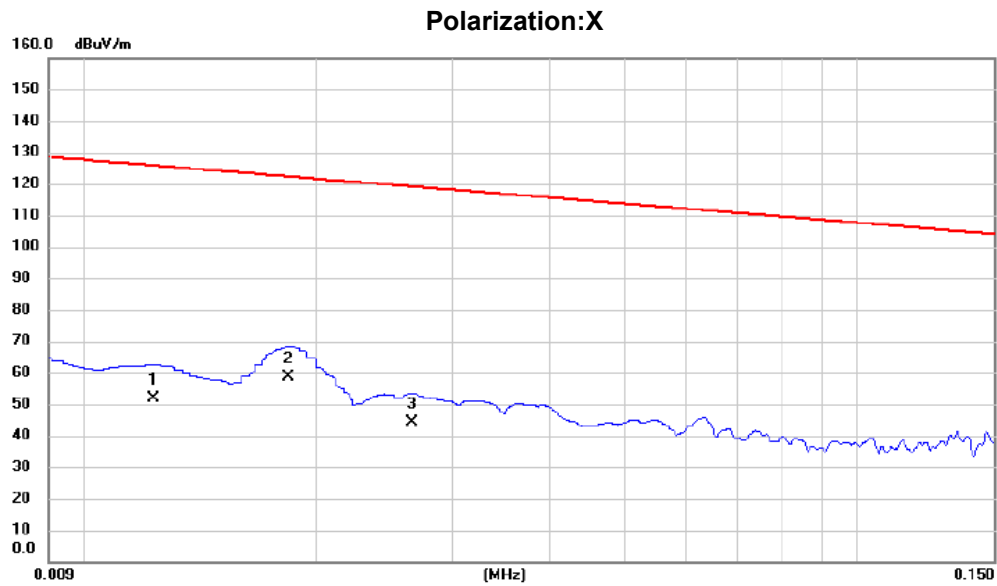

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		0.0123	35.18	16.71	51.89	125.81	-73.92	AVG			
2	*	0.0184	43.63	14.79	58.42	122.31	-63.89	AVG			
3		0.0266	30.15	14.14	44.29	119.11	-74.82	AVG			


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode
-----------	---------

Polarization:X

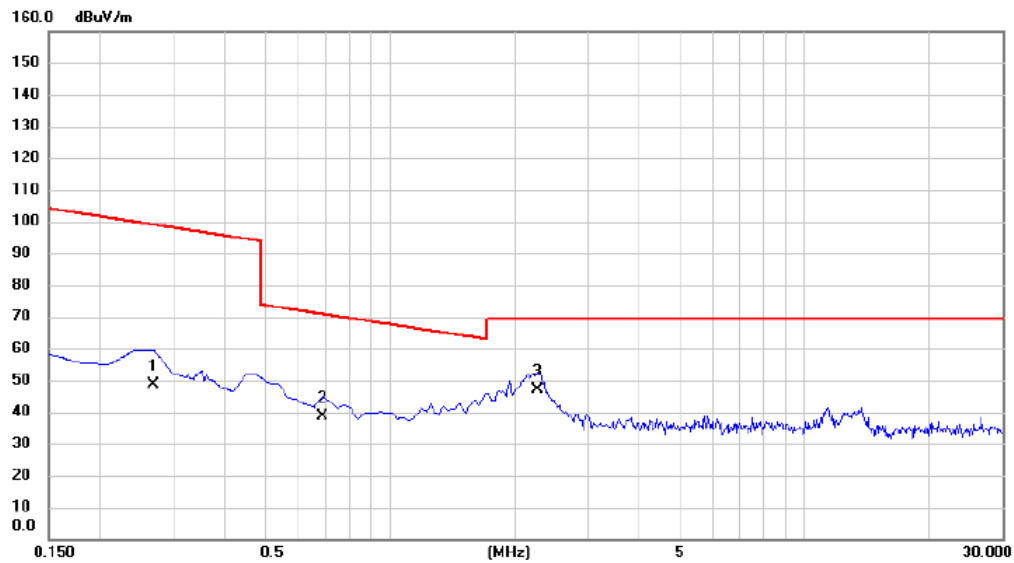


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		0.2694	35.21	13.58	48.79	99.00	-50.21	AVG		
2		0.6873	25.64	13.15	38.79	70.86	-32.07	QP		
3	*	2.2694	35.12	11.98	47.10	69.54	-22.44	QP		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode
-----------	---------

Polarization:Y

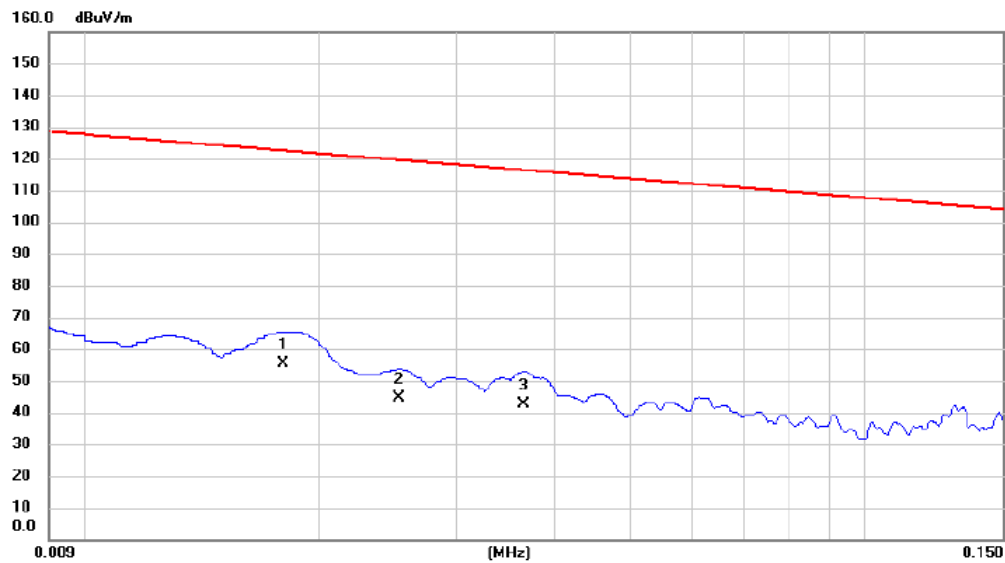


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	0.0180	40.63	14.92	55.55	122.50	-66.95	AVG		
2		0.0253	30.45	14.17	44.62	119.54	-74.92	AVG		
3		0.0366	28.66	13.91	42.57	116.34	-73.77	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode
-----------	---------

Polarization:Y

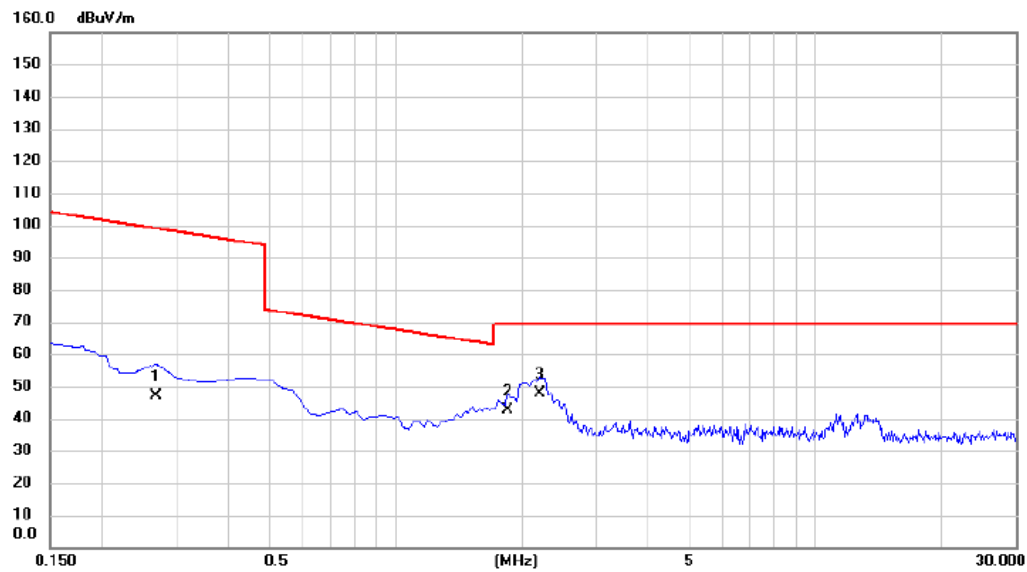


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		0.2694	33.52	13.58	47.10	99.00	-51.90	AVG		
2		1.8515	30.45	12.20	42.65	69.54	-26.89	QP		
3	*	2.2096	35.96	12.01	47.97	69.54	-21.57	QP		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode
-----------	---------

Polarization:Z

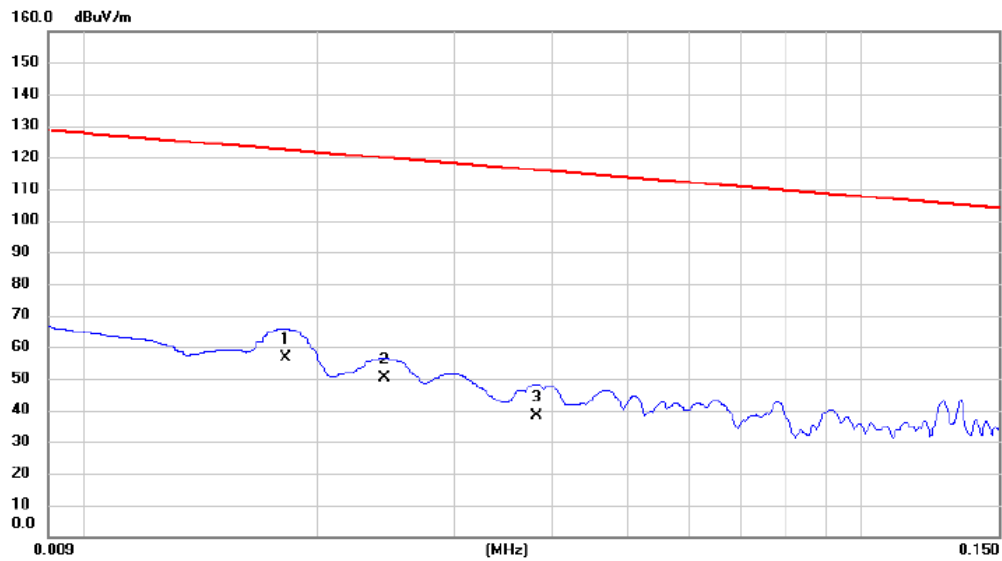


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	0.0182	41.85	14.86	56.71	122.40	-65.69	AVG		
2		0.0244	36.12	14.19	50.31	119.86	-69.55	QP		
3		0.0382	24.31	13.87	38.18	115.96	-77.78	QP		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode
-----------	---------

Polarization:Z

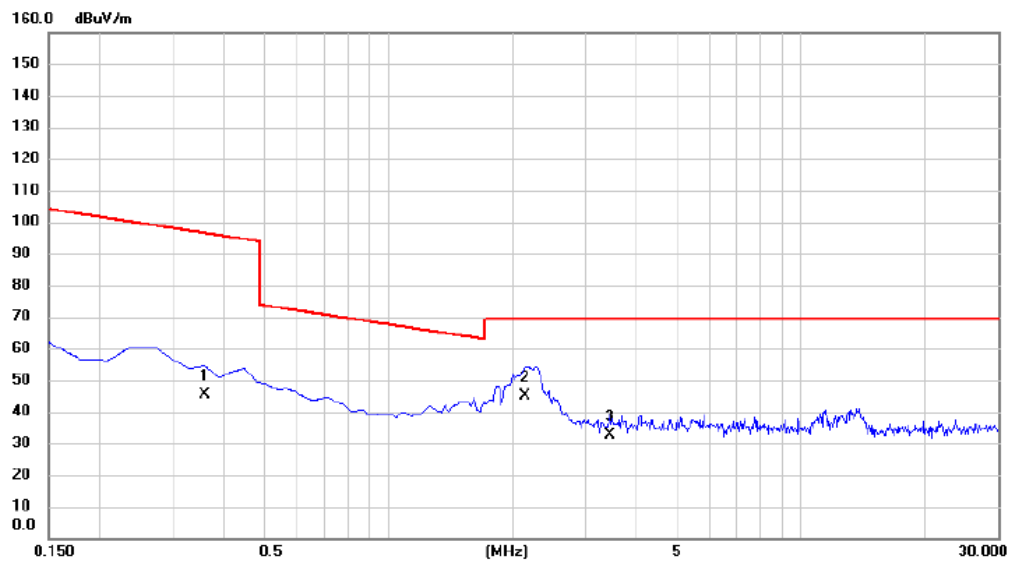


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		0.3590	31.85	13.50	45.35	96.50	-51.15	AVG		
2	*	2.1500	32.96	12.03	44.99	69.54	-24.55	AVG		
3		3.4335	20.94	11.71	32.65	69.54	-36.89	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX Mode
-----------	---------

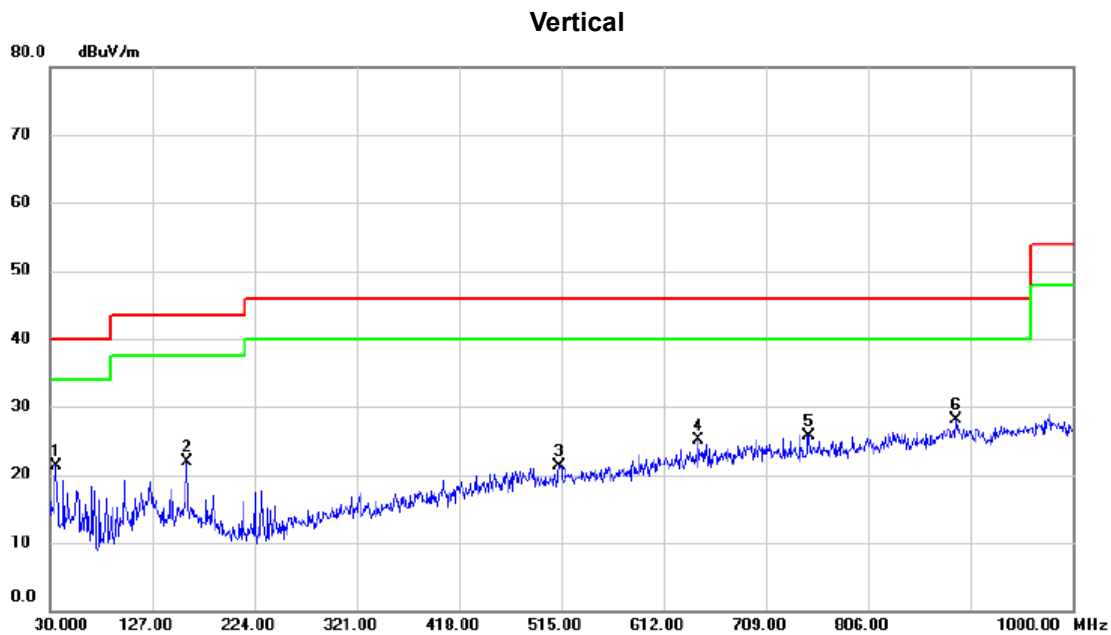


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		35.820	35.73	-14.35	21.38	40.00	-18.62	peak	
2		159.980	32.56	-10.67	21.89	43.50	-21.61	peak	
3		513.060	28.43	-7.14	21.29	46.00	-24.71	peak	
4		644.980	29.50	-4.38	25.12	46.00	-20.88	peak	
5		749.740	28.98	-3.21	25.77	46.00	-20.23	peak	
6	*	889.420	29.30	-1.27	28.03	46.00	-17.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode
-----------	---------

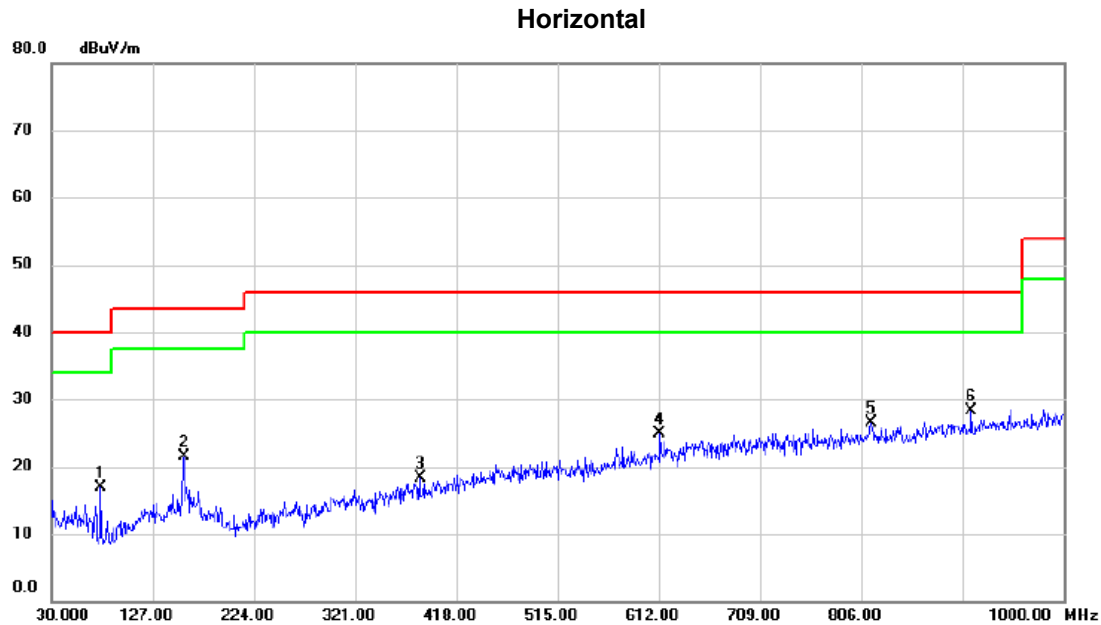

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	77.530	34.23	-17.29	16.94	40.00	-23.06	peak	
2	157.070	32.61	-11.05	21.56	43.50	-21.94	peak	
3	383.080	27.69	-9.42	18.27	46.00	-27.73	peak	
4	612.970	29.88	-5.07	24.81	46.00	-21.19	peak	
5	815.700	28.83	-2.28	26.55	46.00	-19.45	peak	
6 *	911.730	29.16	-0.85	28.31	46.00	-17.69	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

End of Test Report