

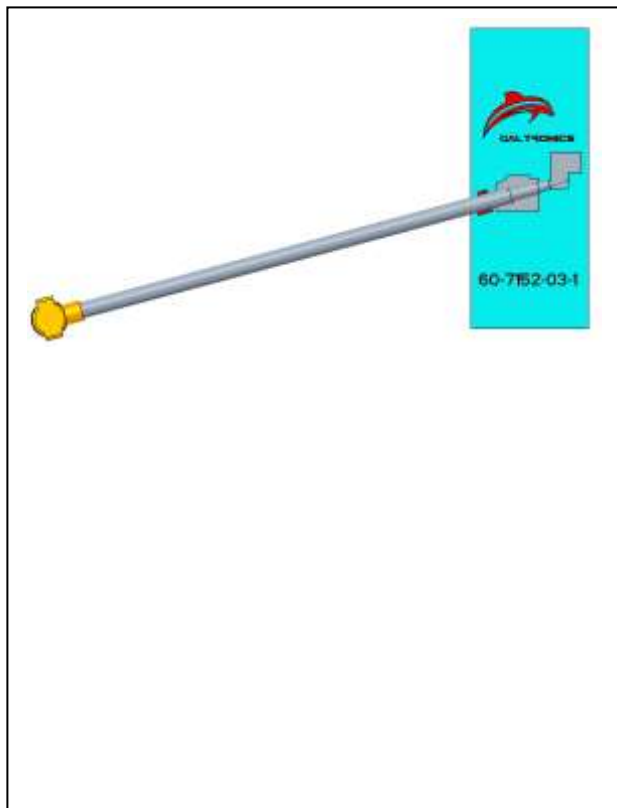


*Figure 1 Galtronics 02102142-08042C 5Ghz
Band Antenna*

Wi-Fi 5GHz Band Antenna

02102142-08042C

Engineering Data Sheets

Galtronics Embedded Antenna

8930 S. Beck Avenue Suite #103
Tempe, Arizona 85284-2891 USA
Tel: 1-480-496-5100
Fax: 1-480-598-2766

WE'RE MAKING WAVES

Revision History (Required)

Revisions	Date	Note
S1	Jan 4, 2024	Initial draft
S2	Jan 9, 2024	Updated
S3	Jan 10,2024	Updated
S4	Jan 16,2024	Updated
S5	Jan 17,2024	Updated

Disclaimers

The document is proprietary, which may be changed without notice. Please communicate with Galtronics sale team to verify before finalizing your product design.

Contents

1. Galtronics Wi-Fi 5GHz Band Antenna 4

2. Features 4

3. Specifications and Interface 4

4. Return Loss..... 5

5. Gain,Directivity and Efficiency 5

6. Radiation Pattern 6

Figures

Figure 1 Galtronics Wi-Fi 5GHz Band Antenna..... 1

Figure 2 Return Loss 5

Figure 3 Measurement Coordinate System..... 6

Figure 4 Radiation Patterns..... 8

1. Galtronics Wi-Fi 5GHz Antenna

The Galtronics 02102142-08042C antenna is a balanced dipole type Wi-Fi 5GHz Antenna that operates in 5150-5900 MHz band. It provides high efficient radiation with good cost benefit. The antenna can be mounted on a customer device with double sided adhesive foam tape or antenna carrier and connected to the radio through a cable with U.FL connector.

2. Features

- Operates in 5150-5900MHz band
- Peak gain: 3.63 dBi in 5000 MHz band
- High efficiency
- U.FL connector interface
- Mounted by double sided adhesive foam tape or antenna carrier

3. Specifications and Interface

Standard	Wi-Fi 5GHz Band
Frequency Range	5150 – 5900 MHz
Peak Gain	3.63 dBi in 5000 MHz band
VSWR	2:1
Feed Impedance	50Ω
Power Handling	30 dBm
Interface	U.FL
Antenna Dimensions	20.86 x 8.18 x 0.84 mm (L x W x T)
Temperature Range	Operating: -20° C to +60° C (-4° F to +140° F) Storage: -20° C to +60° C (-4° F to +140° F)
Humidity Range	Operating: 10% to 85% non-condensing Storage: 5% to 90% non-condensing

4. Return Loss

The antenna was tested with antenna mounted on a 100 x 100 x 2.3mm ABS evaluation board with 1.6mm thickness double-sided tape and a 38mm long cable (Cable Total Length is 45mm).



Figure 2 Return Loss

5. Gain, Directivity and Efficiency

Table 1. Peak Gain, Directivity and Efficiency

	Freq (MHz)	Peak Gain (dBi)	Antenna Directivity (dBi)	Terminal Efficiency (%)
5GHz	5150	3.63	5.12	70.95%
	5250	3.55	4.96	72.29%
	5350	3.63	4.79	76.54%
	5750	3.12	4.42	74.16%
	5850	3.44	4.95	70.62%
	Average			72.91%

6. Radiation Pattern

Figure 3 shows the antenna measurement coordinate system in anechoic chamber. Azimuth plane is XY plane ($\Theta=0^\circ$), Elevation 1 plane is XZ plane ($\Phi=0^\circ$) and Elevation 2 plane is YZ plane ($\Phi=90^\circ$).


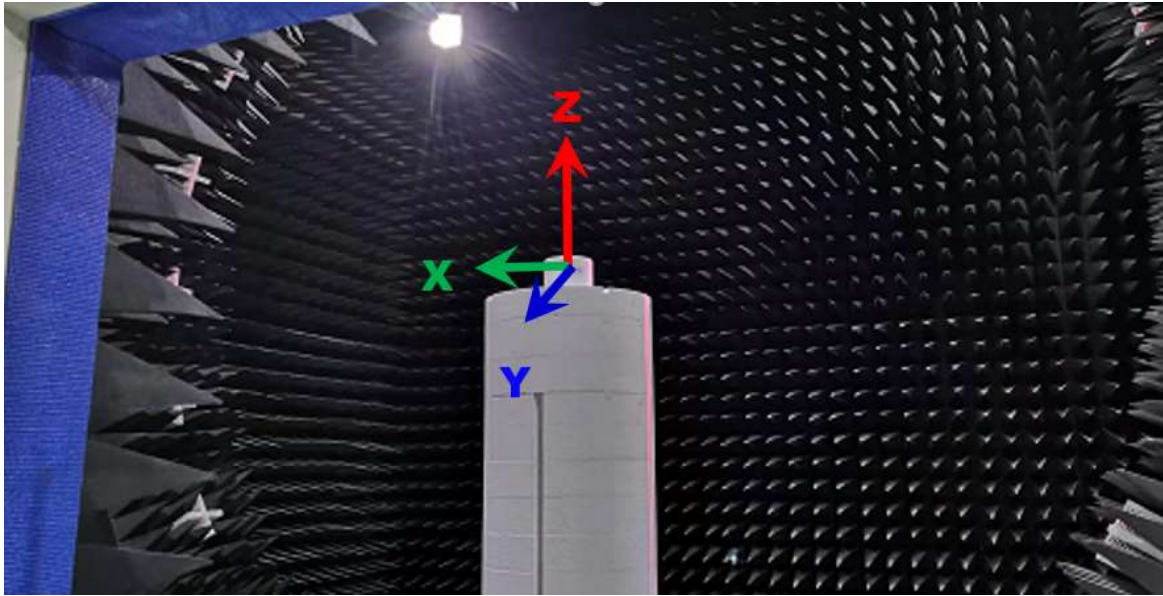



Figure 3 Measurement Orientation

WE'RE MAKING WAVES

Figure 3 (A), (B) and (C) show the radiation pattern in three major planes.

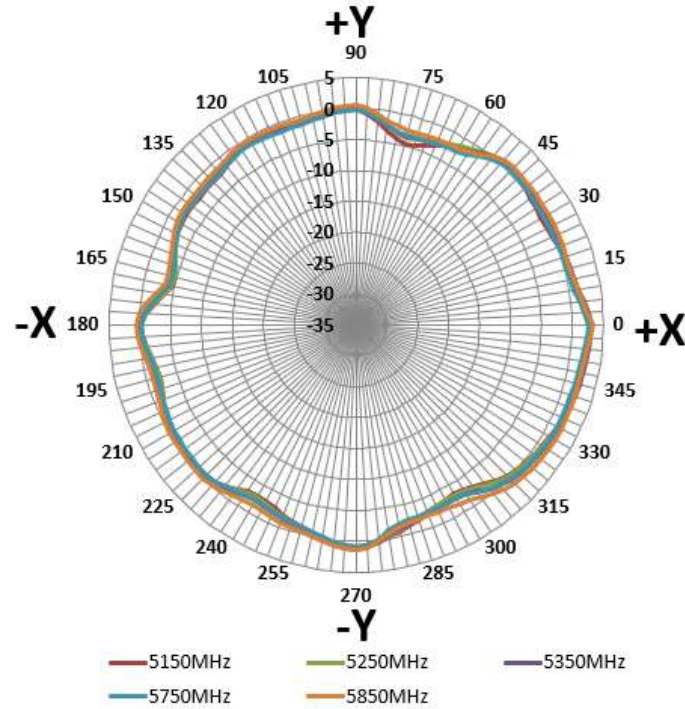


(A). Azimuth plane (XY plane) radiation pattern

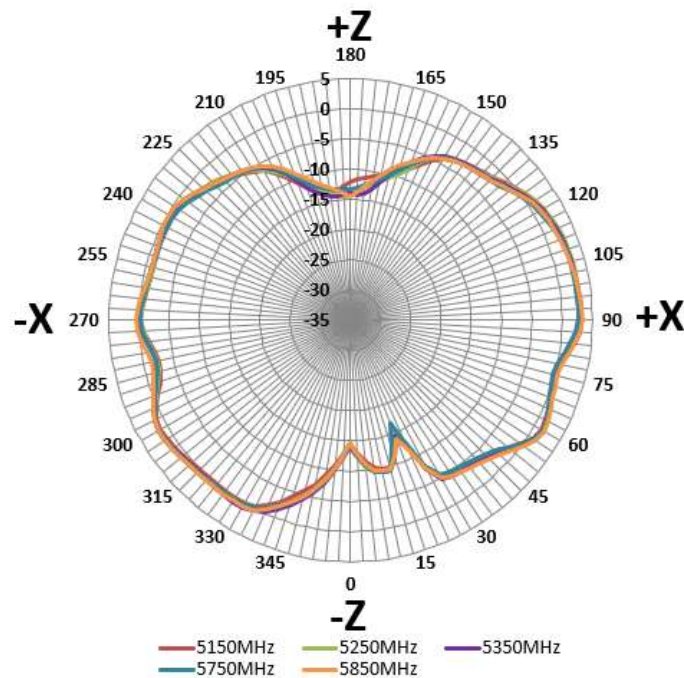

(B). Elevation 1 plane (XZ plane) radiation pattern

WE'RE MAKING WAVES

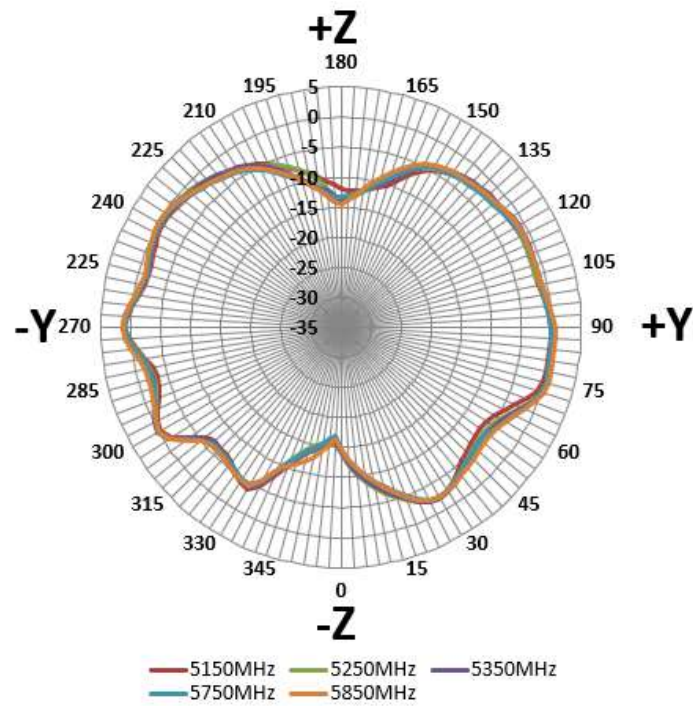

(C). Elevation 2 plane (YZ plane) radiation pattern

Figure 4 Radiation Patterns of Wi-Fi 5GHz Antenna