

Galtronics Electronics (Wuxi) Co.,LTD

SPECIFICATION FOR APPROVAL






REV NO.	DATE	DESCRIPTION
S1	2025.3.7	First release

P/N of Galtronics

P/N of Cybertan

02102140-08200B-1

2365-82000006R

APPROVED BY	SIGNATURE	DATE
Engineering Manager		2025.3.7
Mechanical Engineer		2025.3.7
RF Engineer		2025.3.7
Quality Engineer		2025.3.7
Project Manager		3/7/2025
Customer Approval		

Product

CONTENTS

1. Product performance	3
1.1 Describe	3
1.2 Features	3
1.3 Specifications and Interface	3
1.4 VSWR (Return Loss)	4
1.5 Peak Gain & Efficiency	4
1.6 Frequency Band & RF pattern	5
2. Production Specification	9
2.1 Drawing	9
3. Material	11
3.1 PCB material certification	11
3.2 Cable material certification	13
3.3 UL Card	23
4. Dimension report	
4.1 FA (To be updated)	
4.2 CPK report (Not Applicable)	
5. Final picture & Net weight (To be updated)	
6. Cable tension test (To be updated)	

WE'RE MAKING WAVES

1. Galtronics Dual Band Wi-Fi Antenna

The Galtronics 02102140-08200B-1 antenna is a Dual Band Wi-Fi Antenna that operates in 2400-2500 MHz and 5150-5850 MHz bands. It provides high efficient radiation with good cost benefit. The antenna can be mounted on a customer device by double sided adhesive foam tape and connected to the radio through a U.FL connector.

2. Features

- Operates in 2400-2500 MHz and 5150-5850 MHz bands
- Peak gain: 2.34 dBi in 2.4 GHz band and 2.40 dBi in 5 GHz band
- High efficiency
- U.FL connector interface

3. Specifications and Interface

Standard	Wi-Fi Dual Band
Frequency Range	2400-2500 MHz and 5150-5850 MHz
Peak Gain	2.34 dBi in 2.4GHz band and 2.40 dBi in 5GHz band
VSWR	2:1
Feed Impedance	50Ω
Power Handling	30 dBm
Interface	U.FL
Antenna Dimensions	33.6 mm x 15.6 mm x 0.64 mm (L x W x T)
Temperature range	Operating: -20° C to +60° C (-4° F to +140° F) Storage: -20° C to +60° C (-4° F to +140° F)
Humidity Range	Operating: 10% to 85% non-condensing Storage: 5% to 90% non-condensing

4. Return Loss

The antenna was tested with antenna mounted on a 100 x 100 x 2.3mm ABS evaluation board with 1.6mm thickness double-sided tape and a 98 mm long cable (Cable Total Length is 110mm).

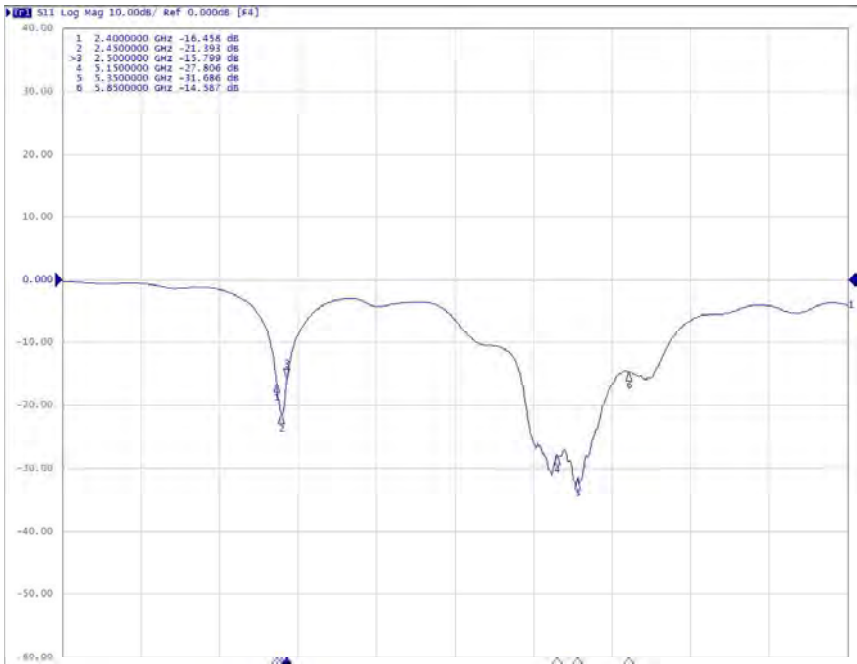


Figure 2 Return Loss

5. Gain, Directivity and Efficiency

Table 1 Peak Gain, Directivity & Efficiency

Dual Band	Frequency (MHz)	Peak Gain (dBi)	Antenna Directivity (dBi)	Terminal Efficiency (%)
Wi-Fi Antenna	2400	2.34	3.62	74.53
	2450	2.13	3.32	76.08
	2500	1.88	3.17	74.19
	Average			74.93

Dual Band	Frequency (MHz)	Peak Gain (dBi)	Antenna Directivity (dBi)	Terminal Efficiency (%)
Wi-Fi Antenna	5150	2.12	3.60	72.14
	5250	2.30	3.45	76.70
	5350	2.12	3.44	73.78
	5750	2.40	3.73	73.60
	5850	2.37	3.76	72.56
	Average			73.76

6. Radiation Pattern

Figure 3 shows the antenna measurement coordinate system in anechoic chamber. Azimuth plane is XY plane ($\Theta=90^\circ$), Elevation 1 plane is XZ plane ($\Phi=0^\circ$) and Elevation 2 plane is YZ plane ($\Phi=90^\circ$).


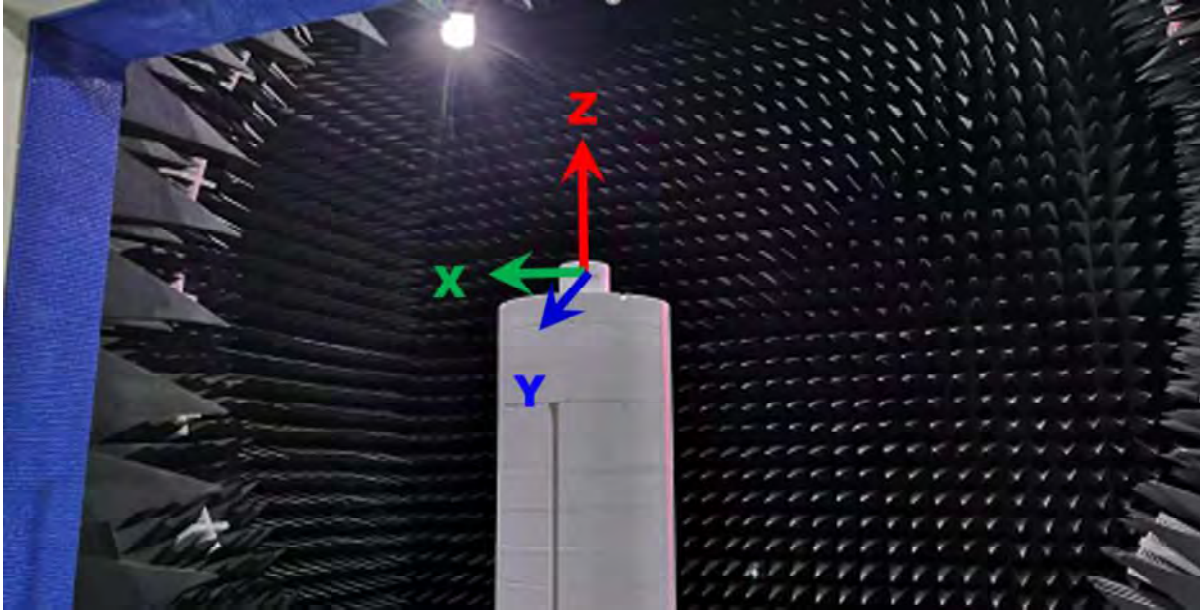


Figure 3 Measurement Orientation


WE'RE MAKING WAVES

Figure 3 (A), (B) and (C) show the radiation pattern in three major planes.

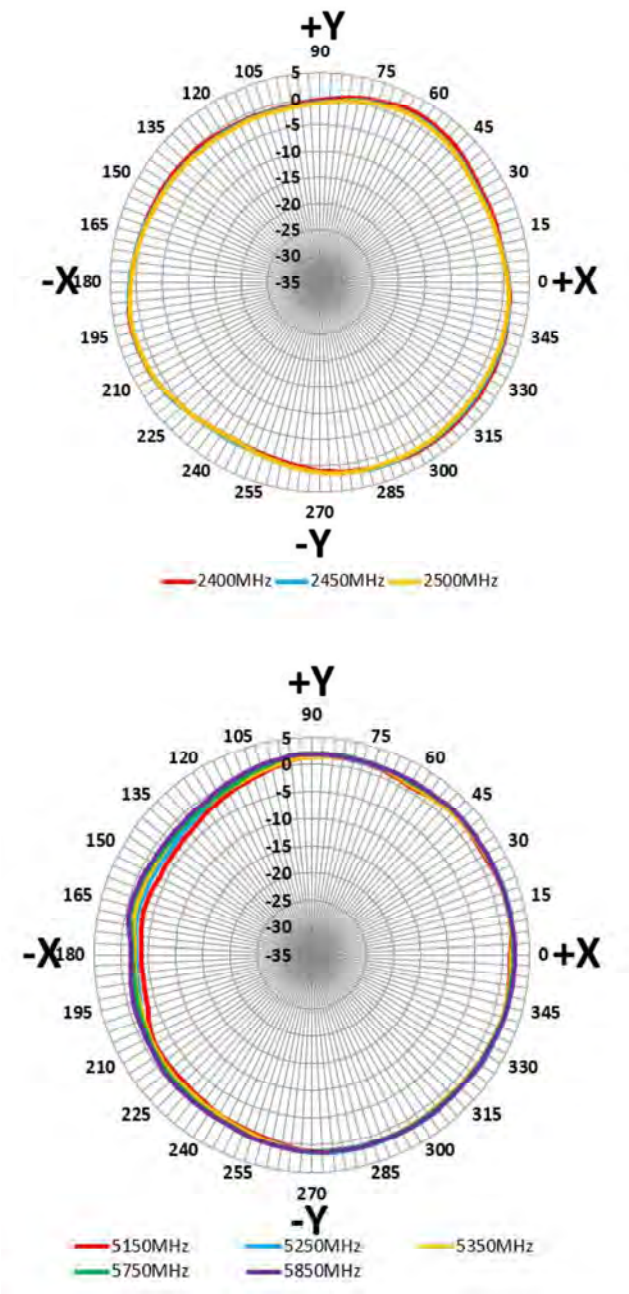


(A). Azimuth plane (XY plane) radiation pattern

WE'RE MAKING WAVES

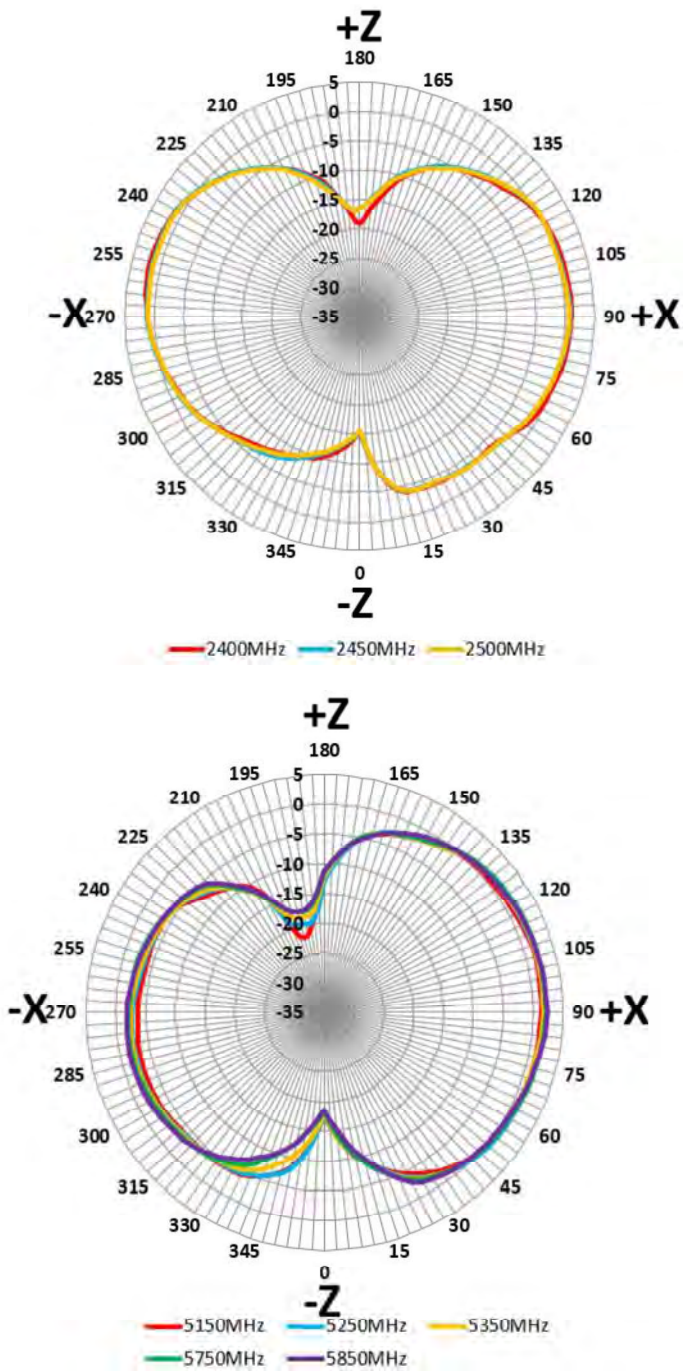

(B). Elevation 1 plane (XZ plane) radiation pattern

WE'RE MAKING WAVES

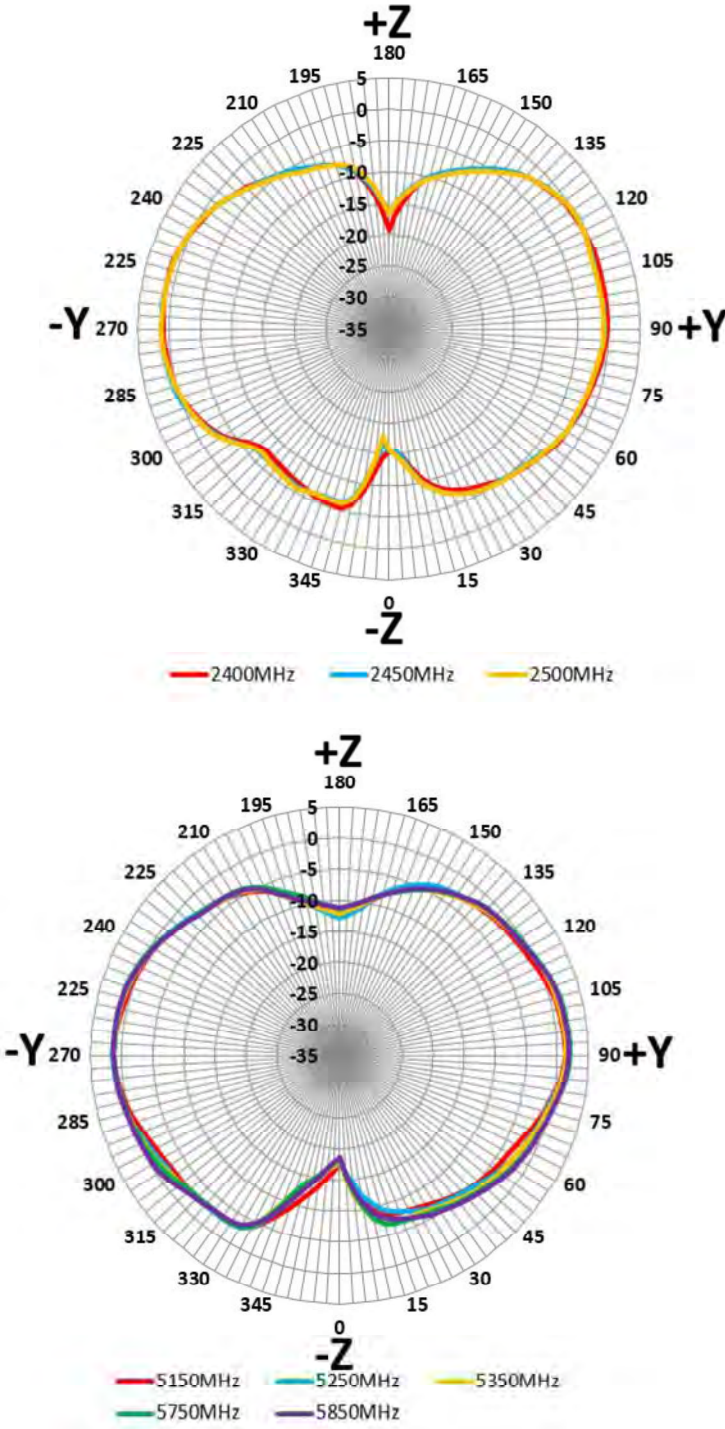

(C). Elevation 2 plane (YZ plane) radiation pattern

Figure 4 Radiation Patterns in Wi-Fi Dual Band.