



RADIO TEST REPORT

FCC ID : 2AYRA-100025
Equipment : Velop 7 Max
Brand Name : Linksys
Model Name : LNM620, LNM620WH, LNM620MS, LNM620EC, SPNM62
Applicant : Linksys USA, Inc.
121 Theory, Irvine, CA. 92617, USA
Standard : 47 CFR FCC Part 15.407

The product was received on May 15, 2025, and testing was started from May 15, 2025 and completed on Dec. 30, 2025. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Rex Liao

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	10
1.3 Testing Location Information	10
1.4 Measurement Uncertainty	11
2 Test Configuration of EUT	12
2.1 Test Channel Mode	12
2.2 The Worst Case Measurement Configuration	14
2.3 EUT Operation during Test	16
2.4 Accessories	17
2.5 Support Equipment.....	17
2.6 Test Setup Diagram	19
3 Transmitter Test Result	23
3.1 AC Power-line Conducted Emissions	23
3.2 Emission Bandwidth	25
3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	26
3.4 Peak Power Spectral Density (E.I.R.P.)	29
3.5 Unwanted Emissions.....	32
3.6 Contention Based Protocol.....	37
4 Test Equipment and Calibration Data	38
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of Emission Bandwidth	
Appendix C. Test Results of Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	
Appendix D. Test Results of Peak Power Spectral Density (E.I.R.P.)	
Appendix E. Test Results of Unwanted Emissions	
Appendix F. Test Results of Contention-Based Protocol	
Appendix G. Test Results of Radiated Emission Co-location	
Appendix H. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A12_5 Ver2.0

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)	PASS	-
-	15.407(a)	Proper Power Adjustment	N/A	Non-Dual Client Device or non-Standard Client Device w/o test
-	15.407(a)	Transmit Power Control	N/A	Non-Very Low Power Device w/o test
3.4	15.407(a)	Peak Power Spectral Density (E.I.R.P.)	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-
3.6	15.407(d)	Contention-Based Protocol	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen

Report Producer: Muse Chan



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925-7125	ax (HEW20), be (EHT20)	5955-7095	1-229 [58]
5925-7125	ax (HEW40), be (EHT40)	5965-7085	3-227 [29]
5925-7125	ax (HEW80), be (EHT80)	5985-7025	7-215 [14]
5925-7125	ax (HEW160), be (EHT160)	6025-6985	15-207 [7]
5925-7125	be (EHT320)	6105-6905	31-191 [6]

Band	Mode	BWch (MHz)	Nant
5.925-7.125 GHz	802.11ax HEW20	20	2TX
5.925-7.125 GHz	802.11ax HEW20-BF	20	2TX
5.925-7.125 GHz	802.11be EHT20	20	2TX
5.925-7.125 GHz	802.11be EHT20-BF	20	2TX
5.925-7.125 GHz	802.11ax HEW40	40	2TX
5.925-7.125 GHz	802.11ax HEW40-BF	40	2TX
5.925-7.125 GHz	802.11be EHT40	40	2TX
5.925-7.125 GHz	802.11be EHT40-BF	40	2TX
5.925-7.125 GHz	802.11ax HEW80	80	2TX
5.925-7.125 GHz	802.11ax HEW80-BF	80	2TX
5.925-7.125 GHz	802.11be EHT80	80	2TX
5.925-7.125 GHz	802.11be EHT80-BF	80	2TX
5.925-7.125 GHz	802.11ax HEW160	160	2TX
5.925-7.125 GHz	802.11ax HEW160-BF	160	2TX
5.925-7.125 GHz	802.11be EHT160	160	2TX
5.925-7.125 GHz	802.11be EHT160-BF	160	2TX
5.925-7.125 GHz	802.11be EHT320	320	2TX
5.925-7.125 GHz	802.11be EHT320-BF	320	2TX

Note:

- HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- EHT20, EHT40, EHT80 and EHT160, EHT320 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- BWch is the nominal channel bandwidth.

1.1.2 Antenna Information

Ant.	Port				Brand	Model Name	Antenna Type	Connector	Gain (dBi)
	2.4GHz	5GHz	6GHz	Bluetooth					
1	1	1	-	-	Galtronics	02102140-08200B-1	PCB Antenna	I-PEX	Note1
2	2	2	-	-	Galtronics	02102140-08200B-2	PCB Antenna	I-PEX	
3	-	-	1	1	Airgain	N08CBAUB-PK1-LG65U	PCB Antenna	I-PEX	
4	-	-	2	-	Airgain	N06CBAUA-T2M48-PK1-LA110U	PCB Antenna	I-PEX	

Note 1:

Ant.	Antenna Gain (dBi)									
	WLAN 2.4GHz	WLAN 5GHz				WLAN 6GHz				Bluetooth
		UNII 1	UNII 2A	UNII 2C	UNII 3	UNII 5	UNII 6	UNII 7	UNII 8	
1	2.34	2.30	2.30	2.40	2.40	-	-	-	-	-
2	2.42	2.77	2.77	2.46	2.59	-	-	-	-	-
3	-	-	-	-	-	2.80	2.20	2.60	4.00	2.70
4	-	-	-	-	-	4.00	4.20	4.20	4.20	-

Note 2: The above information was declared by manufacturer.

<For 2.4GHz function>

For IEEE 802.11b/g/n/VHT/ax/be (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

<For 5GHz function>

For IEEE 802.11a/n/ac/ax/be (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

<For 6GHz function>

For IEEE 802.11ax/be (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

<For Bluetooth function> (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

Port 1 could transmit/receive simultaneously.

Note 3: Directional gain information

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left[\sum_{k=1}^{N_{sub}} g_{j,k} \right]^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left[\sum_{k=1}^{N_{sub}} g_{j,k} \right]^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left[\sum_{k=1}^{N_{sub}} g_{j,k} \right]^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left[\sum_{k=1}^{N_{sub}} g_{j,k} \right]^2}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ;$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2))^2 / N_{ANT}] \Rightarrow 10 \log[(10^{G1/20} + 10^{G2/20})^2 / N_{ANT}]$$

Where ;

$$2.4G \ G1 = 2.34 \text{ dBi} ; G2 = 2.42 \text{ dBi} ; DG = 5.39 \text{ dBi}$$

$$5G \text{ UNII-1} \ G1 = 2.3 \text{ dBi} ; G2 = 2.77 \text{ dBi} ; DG = 5.55 \text{ dBi}$$

$$5G \text{ UNII-2A} \ G1 = 2.3 \text{ dBi} ; G2 = 2.77 \text{ dBi} ; DG = 5.55 \text{ dBi}$$

$$5G \text{ UNII-2C} \ G1 = 2.4 \text{ dBi} ; G2 = 2.46 \text{ dBi} ; DG = 5.44 \text{ dBi}$$

$$5G \text{ UNII-3} \ G1 = 2.4 \text{ dBi} ; G2 = 2.59 \text{ dBi} ; DG = 5.51 \text{ dBi}$$

$$6G \text{ UNII-5} \ G1 = 2.8 \text{ dBi} ; G2 = 4 \text{ dBi} ; DG = 6.43 \text{ dBi}$$

$$6G \text{ UNII-6} \ G1 = 2.2 \text{ dBi} ; G2 = 4.2 \text{ dBi} ; DG = 6.27 \text{ dBi}$$

$$6G \text{ UNII-7} \ G1 = 2.6 \text{ dBi} ; G2 = 4.2 \text{ dBi} ; DG = 6.45 \text{ dBi}$$

$$6G \text{ UNII-8} \ G1 = 4 \text{ dBi} ; G2 = 4.2 \text{ dBi} ; DG = 7.11 \text{ dBi}$$

**1.1.3 Mode Test Duty Cycle**

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
802.11be EHT20-BF	0.969	0.14	5.183m	200
802.11be EHT40-BF	0.954	0.2	5.183m	200
802.11be EHT80-BF	0.96	0.18	5.3m	200
802.11be EHT160-BF	0.953	0.21	5.388m	200
802.11be EHT320-BF	0.94	0.27	5.393m	200

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From Power Adapter	
Beamforming Function	☒ With beamforming	☐ Without beamforming
	The product has beamforming function for 11n/VHT/ax/be in 2.4GHz, n/ac/ax/be in 5GHz and ax/be in 6GHz.	
Device Type	☒ Indoor Access Point	☒ Subordinate
	☐ Indoor Client	☐ Standard Power Access Point
	☐ Dual Client	☐ Standard Client
	☐ Fixed Client	☐ Very Low Power
Condition of EUT	☒ Indoor	☐ Outdoor
Channel Puncturing Function	☐ Supported Static Puncturing	
	☐ Supported Dynamic Puncturing (Reduce BW)	
	☒ Unsupported	
Note: The EUT doesn't support puncturing for CBP		
Support RU	☒ Full RU	☐ Partial RU
Test Software Version	For Non-beamforming mode: QRCT 4.0.152.1 For Beamforming mode: DOS [ver 6.7.7061]	
Software / Firmware Version for CBP	1.0.4.25072110	

Note: The above information was declared by manufacturer.

1.1.5 Table for Multiple Listing

The model names in the following table are all refer to the identical product.

Model Name	Description
LN620	For retail
LN620WH	For warehouse
LN620MS	For superstore
LN620EC	For e-commerce
SPNM62	For service provider

Note 1: From the above models, model: LN620 was selected as representative model for the test and its data was recorded in this report.

Note 2: The above information was declared by manufacturer.

1.1.6 Table for EUT Support Function

Function	Support
AP Router	WLAN 2.4GHz, 5GHz UNII 1~3, 6GHz UNII 5~8 and Bluetooth
Mesh	WLAN 5GHz UNII 1~3 and 6GHz UNII 5~8

Note 1: For above table list, only AP Router mode was tested and recorded in this test.

Note 2: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.407
- ♦ ANSI C63.10-2020
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 987594 D02 v03
- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 412172 D01 v01r01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information				
Test Lab. : Sporton International Inc. Hsinchu Laboratory				
Hsinchu ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)				
(TAF: 3787) TEL: 886-3-656-9065 FAX: 886-3-656-9085				
Test site Designation No. TW3787 with FCC.				
Conformity Assessment Body Identifier (CABID) TW3787 with ISED.				

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted (For other tests)	TH03-CB	Richard Pai	24.4-25.1 / 61-66	May 26, 2025~ Jun. 19, 2025
Radiated Below 1G	03CH04-CB	Serway Lee	21.4~22.6 / 57~61	May 15, 2025~ Jul. 01, 2025
Radiated Above 1G and E.I.R.P. Power/PSD	03CH01-CB		21.3~22.3 / 58~61	
	03CH02-CB		21.5~23.3 / 58~61	
Radiated (co-location emission)	03CH05-CB	Serway Lee	21.5~22.9 / 57~60	
AC Conduction	CO01-CB	Rick Shen	22~23 / 58~59	Jul. 24, 2025
RF Conducted (Contention-Based Protocol test (AP Router mode))	DF02-CB	Paul HU	21.7~22.8 / 57~61	Aug. 21, 2025~ Aug. 22, 2025
RF Conducted (Contention-Based Protocol test (Mesh mode))	DF02-CB	Paul HU	21.7~22.8 / 57~61	Dec. 29, 2025~ Dec. 30, 2025



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Date: Date Before May 28, 2025

Test Items	Uncertainty	Remark
Radiated Emission (9kHz ~ 30MHz)	4.1 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.0 dB	Confidence levels of 95%
Conducted Emission	3.1 dB	Confidence levels of 95%
Output Power Measurement	0.8 dB	Confidence levels of 95%
Power Density Measurement	3.1 dB	Confidence levels of 95%
Bandwidth Measurement	2.1 %	Confidence levels of 95%

Test Date: Date After May 27, 2025

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.7 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	2.5 dB	Confidence levels of 95%
Output Power Measurement	1.3 dB	Confidence levels of 95%
Power Density Measurement	2.0 dB	Confidence levels of 95%
Bandwidth Measurement	1.0 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode
802.11be EHT20-BF_Nss1,(MCS0)_2TX
5955MHz
6195MHz
6415MHz
6435MHz
6475MHz
6515MHz
6535MHz
6695MHz
6875MHz
6895MHz
6995MHz
7095MHz
802.11be EHT40-BF_Nss1,(MCS0)_2TX
5965MHz
6205MHz
6405MHz
6445MHz
6485MHz
6525MHz
6565MHz
6685MHz
6885MHz
6925MHz
7005MHz
7085MHz
802.11be EHT80-BF_Nss1,(MCS0)_2TX
5985MHz
6225MHz
6385MHz
6465MHz
6545MHz
6625MHz
6705MHz
6785MHz



Mode
6865MHz
6945MHz
7025MHz
802.11be EHT160-BF_Nss1,(MCS0)_2TX
6025MHz
6185MHz
6345MHz
6505MHz
6665MHz
6825MHz
6985MHz
802.11be EHT320-BF_Nss1,(MCS0)_2TX
6105MHz
6265MHz
6425MHz
6585MHz
6745MHz
6905MHz

Note:

- ♦ EHT20 / EHT40 / EHT80 / EHT160 covers HT20 / HT40 / VHT20 / VHT40 / VHT80 / VHT160 / HEW20 / HEW40 / HEW80 / HEW160 due to similar modulation. The power setting for HT20 / HT40 / VHT20 / VHT40 / VHT80 / VHT160 / HEW20 / HEW40 / HEW80 / HEW160 is the same or lower than EHT20 / EHT40 / EHT80 / EHT160.
- ♦ The EUT supports non-beamforming and beamforming modes. After evaluating, the beamforming mode was selected to test.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
	After evaluating, the worst case was found at Y axis. So the measurement will follow this same test configuration.
1	EUT in Y axis + Adapter 1 + US plug_WLAN 2.4GHz
2	EUT in Y axis + Adapter 2_WLAN 2.4GHz
Mode 2 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3~5 will follow this same test mode.	
3	EUT in Y axis + Adapter 2_WLAN 5GHz
4	EUT in Y axis + Adapter 2_WLAN 6GHz
5	EUT in Y axis + Adapter 2_Bluetooth
For operating mode 5 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Contention Based Protocol
Test Condition	Conducted measurement at transmit chains
1	AP Router mode
2	Mesh mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Peak Power Spectral Density (E.I.R.P.)
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
	After evaluating, the worst case was found at Y axis. So the measurement will follow this same test configuration.
1	EUT in Y axis



The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX
	After evaluating, the worst case was found at Y axis. So the measurement will follow this same test configuration.
1	EUT in Y axis + Adapter 1 + US plug_WLAN 2.4GHz
2	EUT in Y axis + Adapter 2_WLAN 2.4GHz
Mode 1 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3~5 will follow this same test mode.	
3	EUT in Y axis + Adapter 1 + US plug_WLAN 5GHz
4	EUT in Y axis + Adapter 1 + US plug_WLAN 6GHz
5	EUT in Y axis + Adapter 1 + US plug_Bluetooth
For operating mode 1 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX
	After evaluating, the worst case was found at Y axis. So the measurement will follow this same test configuration.
1	EUT in Y axis

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission MASK
Test Condition	Conducted measurement at transmit chains



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Radiated Emission Co-location
Test Condition	Radiated measurement
Operating Mode	Normal Link
	After evaluating, the worst case was found at Y axis. So the measurement will follow this same test configuration.
1	EUT in Y axis_WLAN 2.4GHz + WLAN 5GHz
2	EUT in Y axis_WLAN 6GHz + Bluetooth
For operating mode 1 is the worst case and it was record in this test report.	
Refer to Appendix F for Radiated Emission Co-location.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz + Bluetooth
Refer to Sporton Test Report No.: FA542105-01 for Co-location RF Exposure Evaluation.	

2.3 EUT Operation during Test

For CTX Mode:

During the test, the following programs under WIN 10 were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS [ver 6.7.7061].
3. Executed "Lantest.exe" to link with the remote workstation to transmit and receive packet by Device and transmit duty cycle no less than 98%.

For Normal Link Mode:

During the test, the EUT operation to normal function.



2.4 Accessories

Accessories			
Equipment Name	Brand Name	Model Name	Rating
Adapter 1 (Interchangeable plug)	Ktec	KSA-45P-45W D5	INPUT: 100-240V~50/60Hz, 1.5A OUTPUT: 5.0V, 3.0A, 15.0W, 9.0V, 3.0A, 27.0W, 12.0V, 3.0A, 36.0W, 15.0V, 3.0A, 45.0W, 20.0V, 2.25A, 45.0W, 3.3-21.0V, 2.25A Max, 45.0w Max. 3.3-16.0V, 3.0A Max, 45.0w Max.
Adapter 2 (Fixed plug)	Frecom	FC045P13-150300U	INPUT: 100-240V~50/60Hz, 1.2A OUTPUT: 5.0V, 3.0A, 15.0W ; 9.0V, 3.0A, 27.0W ; 12.0V, 3.0A, 36.0W ; 15.0V, 3.0A, 45.0W
Others			
RJ-45 cable 1*1, non-shielded, 1.8m			
RJ-45 cable 2*1, non-shielded, 0.9m			
USB Type C cable*1, shielded, 1.5m (only for adapter 1 use)			
US plug*1 (only for adapter 1 use)			

2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Type-C Flash disk	Kingston	DT70	N/A
B	2.5G Port 2 (LAN)NB	DELL	E6430	N/A

For Radiated (below 1GHz):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
C	Notebook	DELL	E4300	N/A




For Radiated (above 1GHz), RF Radiated (Maximum Equivalent Isotopically Radiated Power (E.I.R.P.), Peak Power Spectral Density (E.I.R.P.)) and RF Conducted (Other tests):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	Device	Linksys	LN620	2AYRA-100025
C	Notebook	DELL	E4300	N/A


For RF Conducted (Contention Based Protocol test):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E6230	N/A
B	Notebook	Lenovo	L440	N/A
C	Device	Linksys	LN620	2AYRA-100025


2.6 Test Setup Diagram

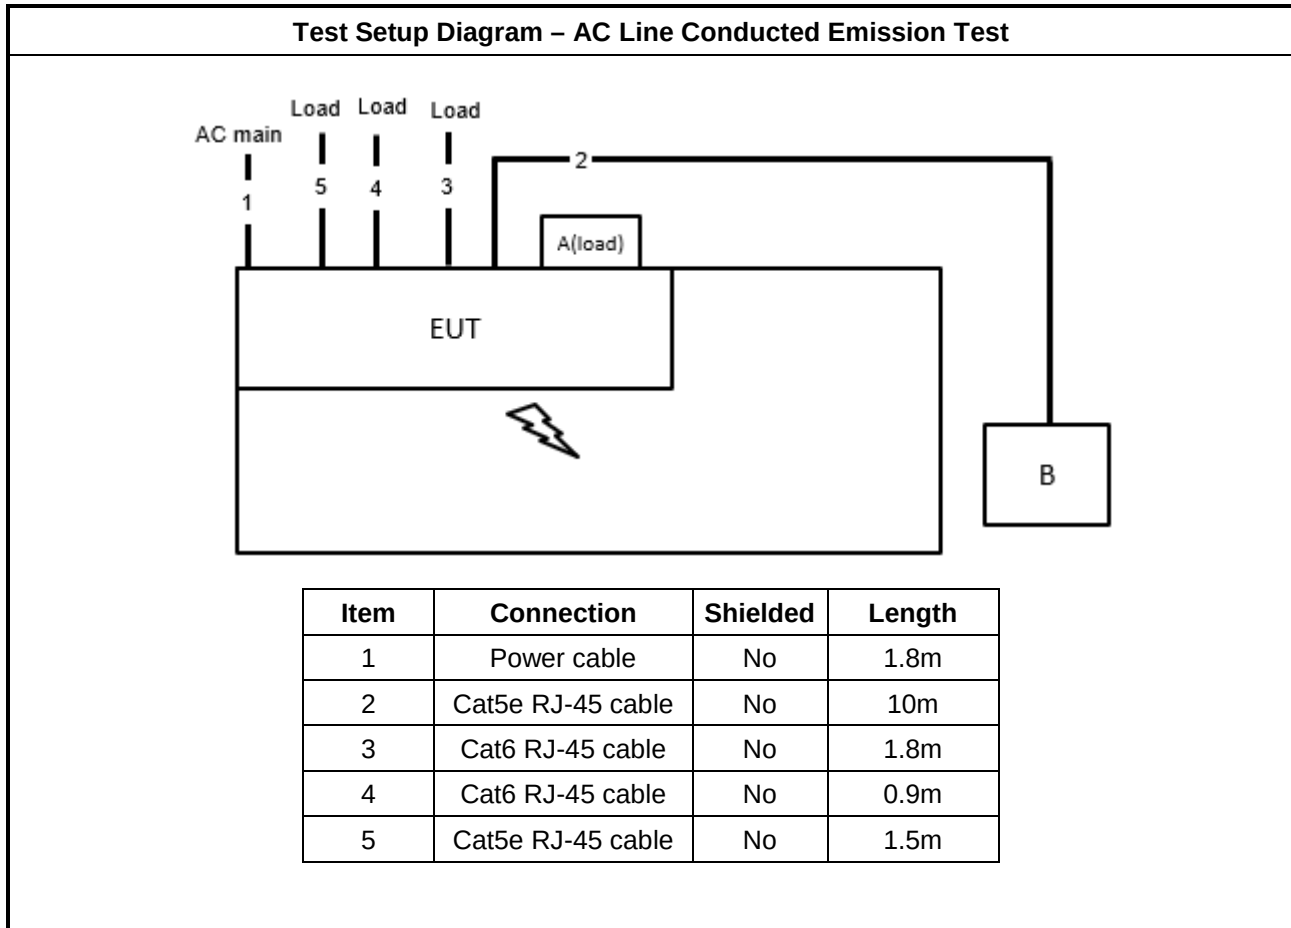


Test Setup Diagram - Radiated Test < 1GHz

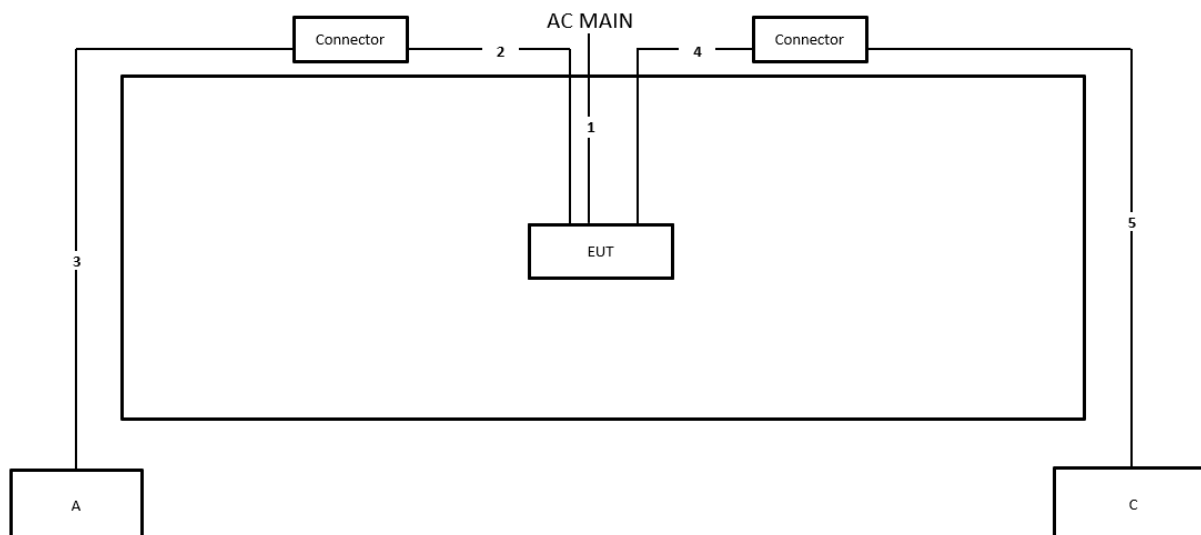

Item	Connection	Shielded	Length
1	Power cable	Yes	1.5m
2	RJ-45 cable	No	0.9m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	1.8m
5	RJ-45 cable	No	10m

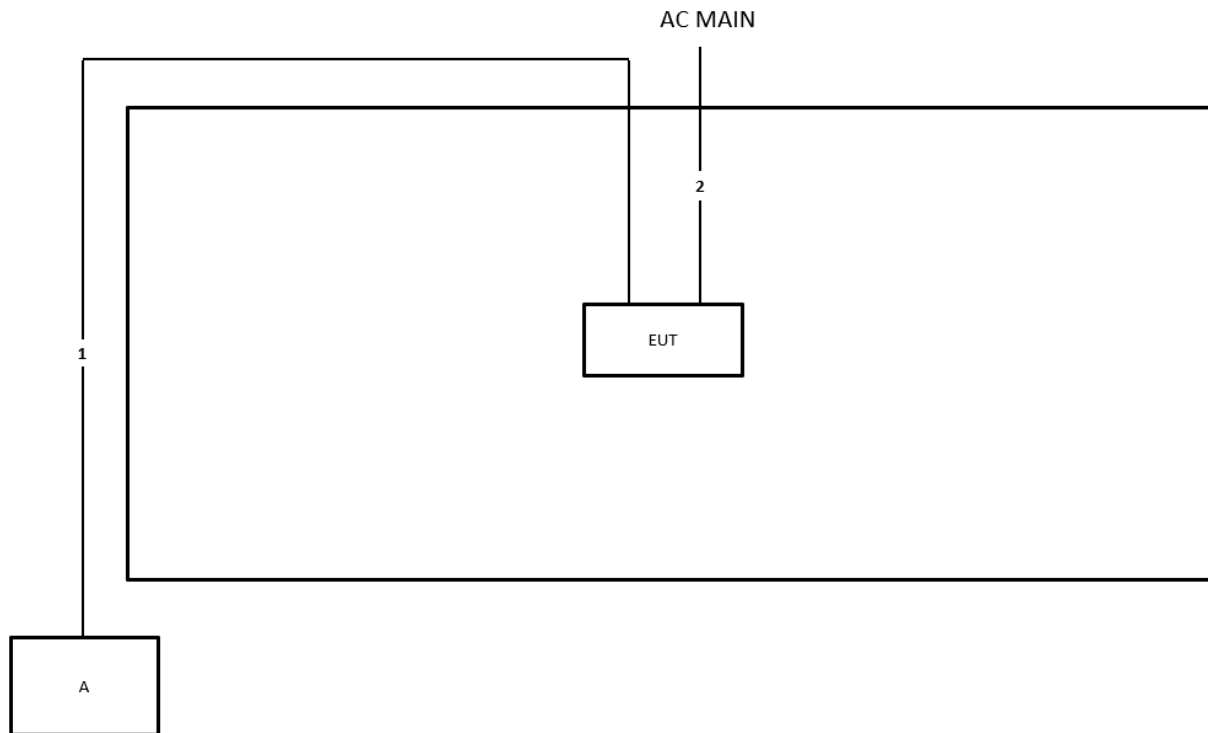Test Setup Diagram - Radiated Test > 1GHz <Non-beamforming mode>


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	Yes	1.5m

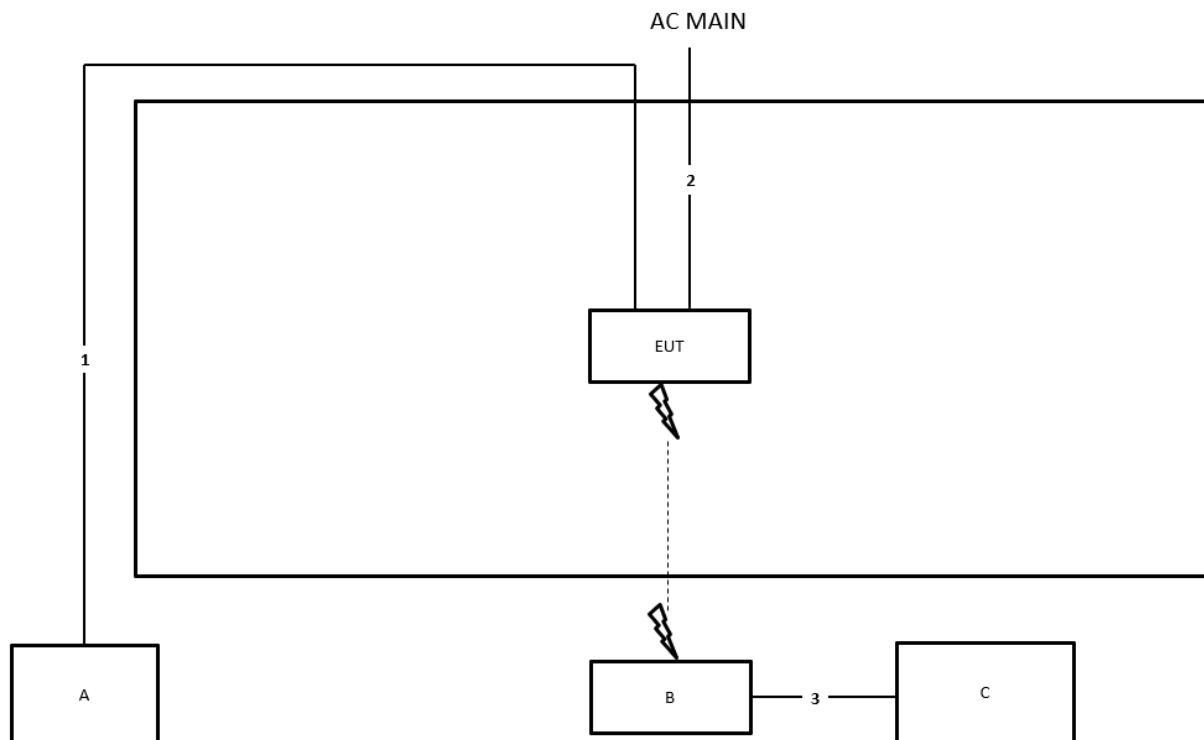Test Setup Diagram - Radiated Test > 1GHz <Beamforming mode>


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	Yes	1.5m
3	RJ-45 cable	No	10m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2020, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

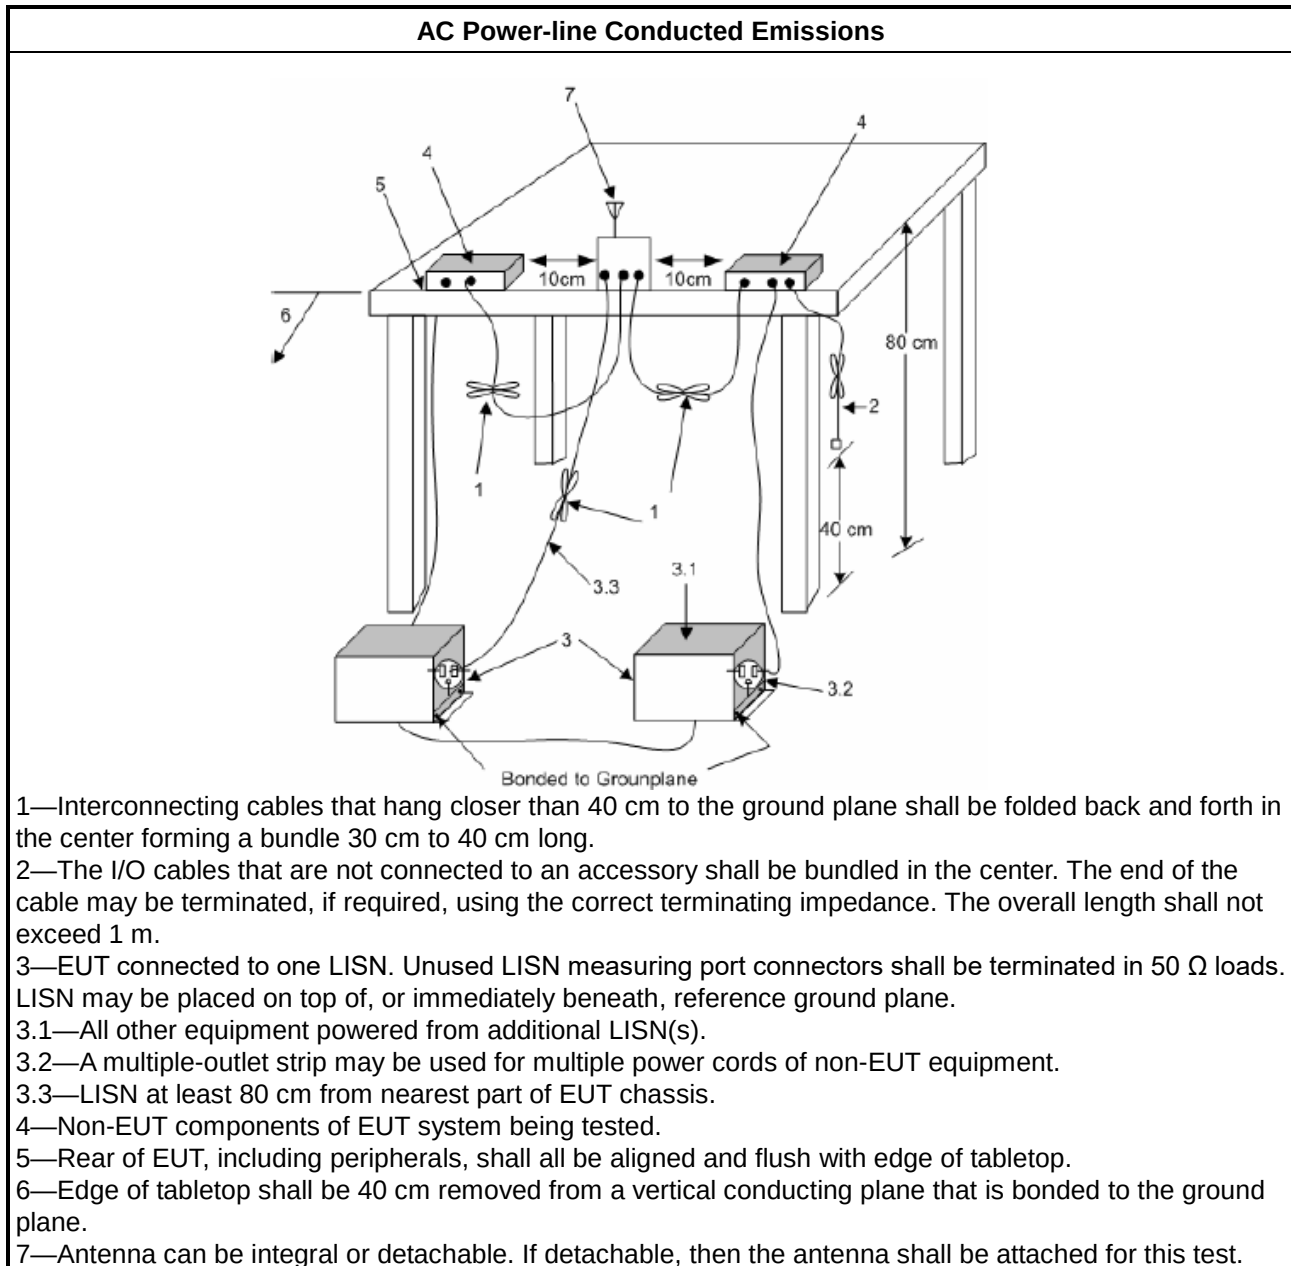

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- Corrected Reading (dBuV) = LISN Factor + Cable Loss + Read Level = Level
- Marginal = - Limit + (Read Level + LISN Factor + Cable Loss)

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5925-6425 GHz band, need less than 320 MHz bandwidth.
☒	For the 6425-6525 GHz band, need less than 320 MHz bandwidth.
☒	For the 6525-6875 GHz band, need less than 320 MHz bandwidth.
☒	For the 6875-7125 GHz band, need less than 320 MHz bandwidth.
RLAN Devices	
☐	For the 5925-6425 GHz band, need less than 320 MHz bandwidth.
☐	For the 6425-6525 GHz band, need less than 320 MHz bandwidth.
☐	For the 6525-6875 GHz band, need less than 320 MHz bandwidth.
☐	For the 6875-7125 GHz band, need less than 320 MHz bandwidth.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
For the emission bandwidth shall be measured using one of the options below:	
☒	According to FCC KDB 987594 D02 clause II.C, measurement procedure shall refer to FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.2.4 Test Setup

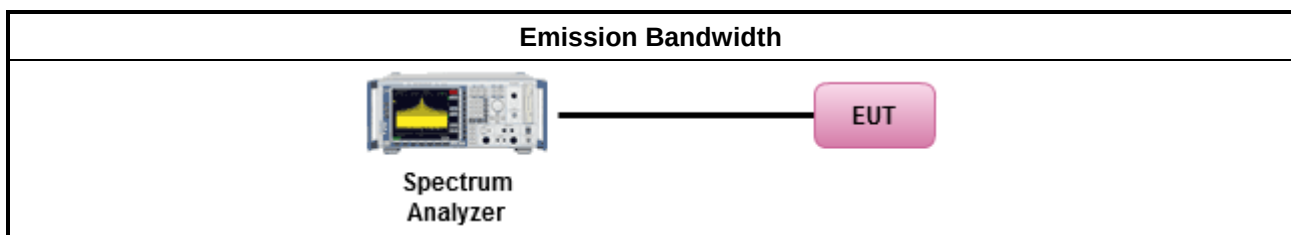

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

Note:

The 99% OBW of BW320 should be less than 320 MHz of limit, and the other BWs less than 320 MHz of limit are 26 dB EBW.



3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)

3.3.1 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit

Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
RLAN Devices	
☐ For the 5.925 ~ 7.125 GHz band:	
	■ For low-power indoor access-points & indoor subordinate devices < 30 dBm .
	■ For low-power client devices < 24 dBm.
	■ For very low-power devices < 14 dBm.



☐	For the 5.925 ~ 6.875 GHz band:
☐	For standard-power access points & fixed client devices < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
☐	For standard client devices < 30 dBm.


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
☐	According to FCC KDB 987594 D02 clause II.E, the test measurement procedure shall refer to KDB 789033.
☐	Average over on/off periods with duty factor
☒	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging). Spectrum analyzer setting: RBW/VBW : 1/3MHz ; Detector : RMS ; Trace mode : Average ; Sweep Count 100.
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☐	Wideband RF power meter and average over on/off periods with duty factor
☐	Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter).
☐	For conducted measurement.
☐	- If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. - If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$
☒	For radiated measurement.
☐	- Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. - Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.3.4 Test Setup

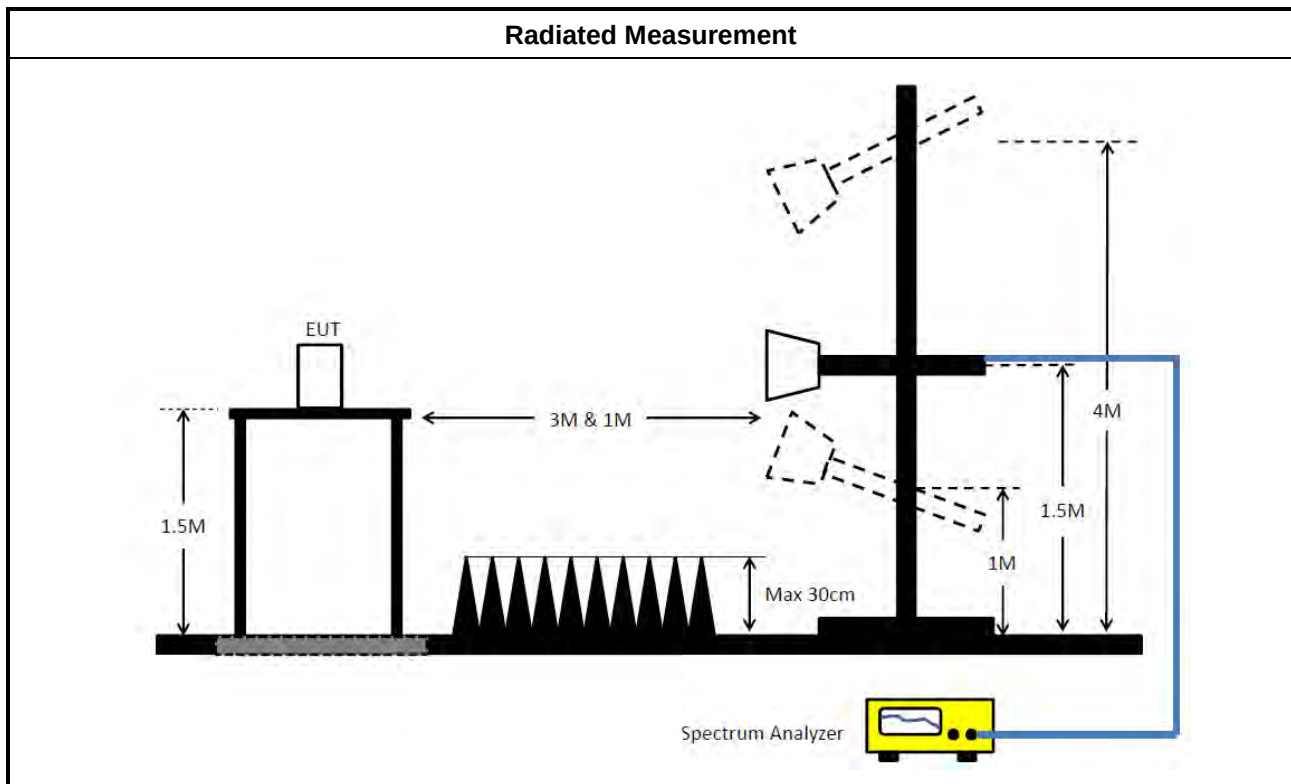

3.3.5 Test Result of Maximum Equivalent Isotropically Radiated Power (E.I.R.P)

Refer as Appendix C



3.4 Peak Power Spectral Density (E.I.R.P.)

3.4.1 Peak Power Spectral Density (E.I.R.P.) Limit

Peak Power Spectral Density (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☒ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☒ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
RLAN Devices	
☐ For the 5.925 ~ 7.125 GHz band:	
	■ For low-power indoor access-points & indoor subordinate devices < 5 dBm / MHz.
	■ For low-power client devices < -1 dBm / MHz.
	■ For very low-power devices < -5 dBm / MHz.
☐ For the 5.925 ~ 6.875 GHz band:	
	■ For standard-power access points & fixed client devices < 23 dBm / MHz.
	■ For standard client devices < 17 dBm / MHz.



3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
According to FCC KDB 987594 D02 clause II.F, the measurement procedure shall refer to KDB 789033. Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as FCC KDB 789033 D02, F5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
[duty cycle ≥ 98% or external video / power trigger]	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☐ For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
☐	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	

☒	For radiated measurement.
	- Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. - Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.4.4 Test Setup

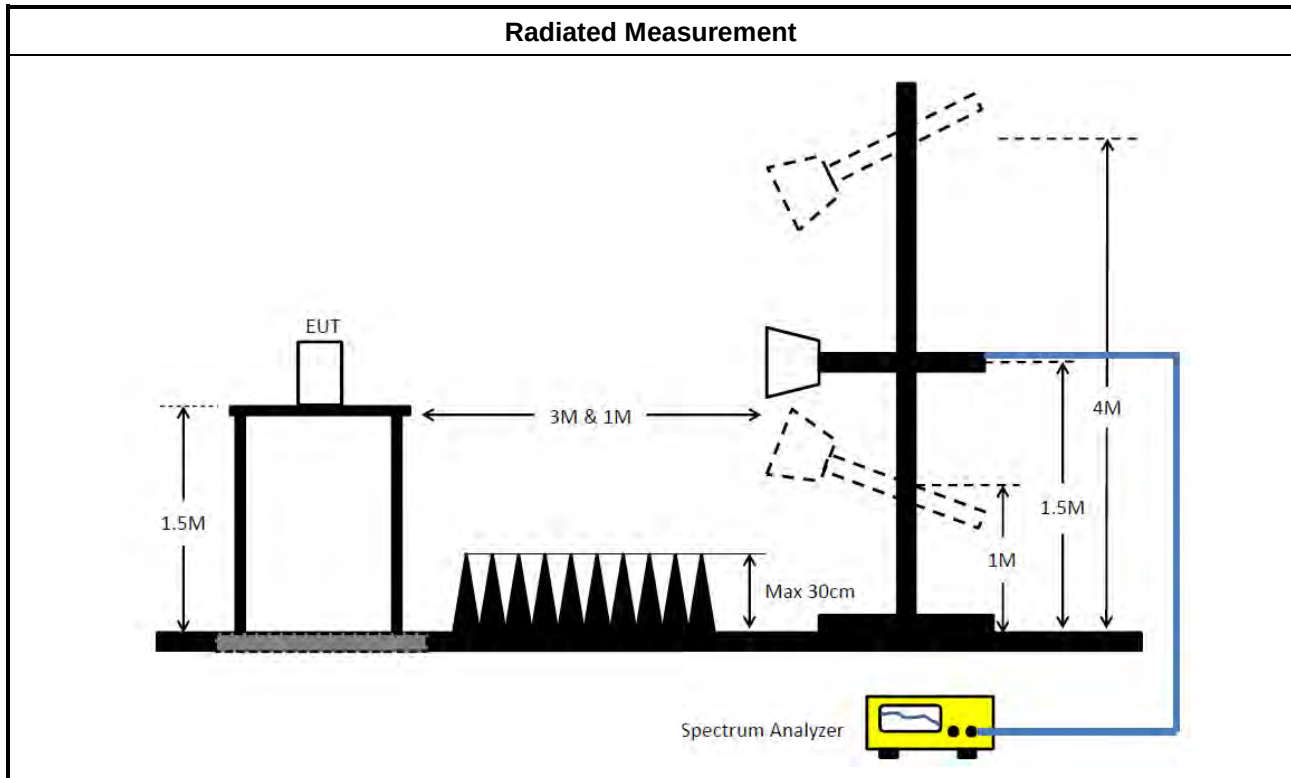

3.4.5 Test Result of Peak Power Spectral Density (E.I.R.P.)

Refer as Appendix D



3.5 Unwanted Emissions

3.5.1 Transmitter Unwanted Emissions Limit


Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$).
EX. Above 18GHz emission limit calculation (3m to 1m) = $54\text{dBuV/m at 3m} + 9.54\text{dB} = 63.54\text{dBuV/m at 1m}$.

Un-restricted band emissions above 1GHz Limit	
Frequency	Limit
Any outside the 5.925 – 7.125 GHz emission	e.i.r.p. -27 dBm [68.2 dBuV/m@3m] Note 1: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$). EX. Above 18GHz emission limit calculation (3m to 1m) = $68.2\text{dBuV/m at 3m} + 9.54\text{dB} = 77.74\text{dBuV/m at 1m}$. Note 2:-27 dBm EIRP OOBE is measured RMS which is a deviation from the current 15E rules for 5 GHz bands. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

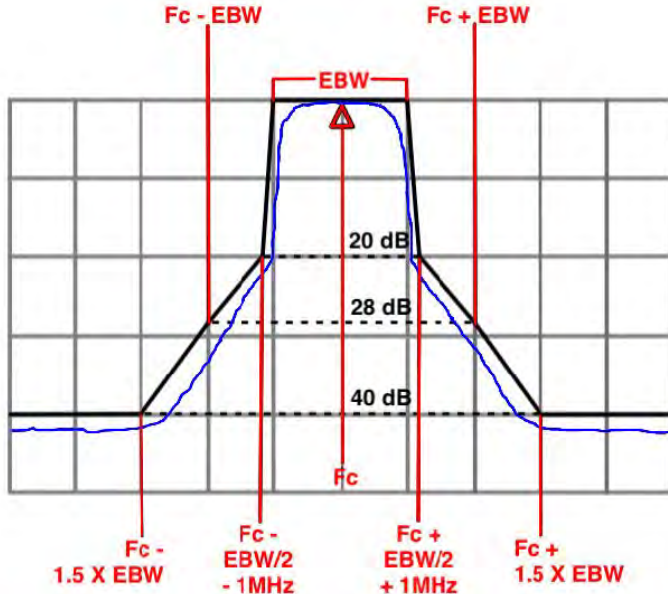Frequency	Emission MASK Limit
5.925 – 7.125 GHz	Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB. 




3.5.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
According to FCC KDB 987594 D02 II.G. the unwanted emission measurement procedure shall refer to KDB 789300(except emission MASK). Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.
	☒ Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging). (For unrestricted band measurement)
	☐ Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).
	☒ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.(For restricted band average measurement)
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.
	☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
Refer as FCC KDB 789033 D02, clause G)3)d)ii) for Band edge Integration measurements.	
For emission MASK shall be measured using following options below:	
	☒ Refer as FCC KDB 987594 D02, J) In-Band Emissions
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	

3.5.4 Test Setup

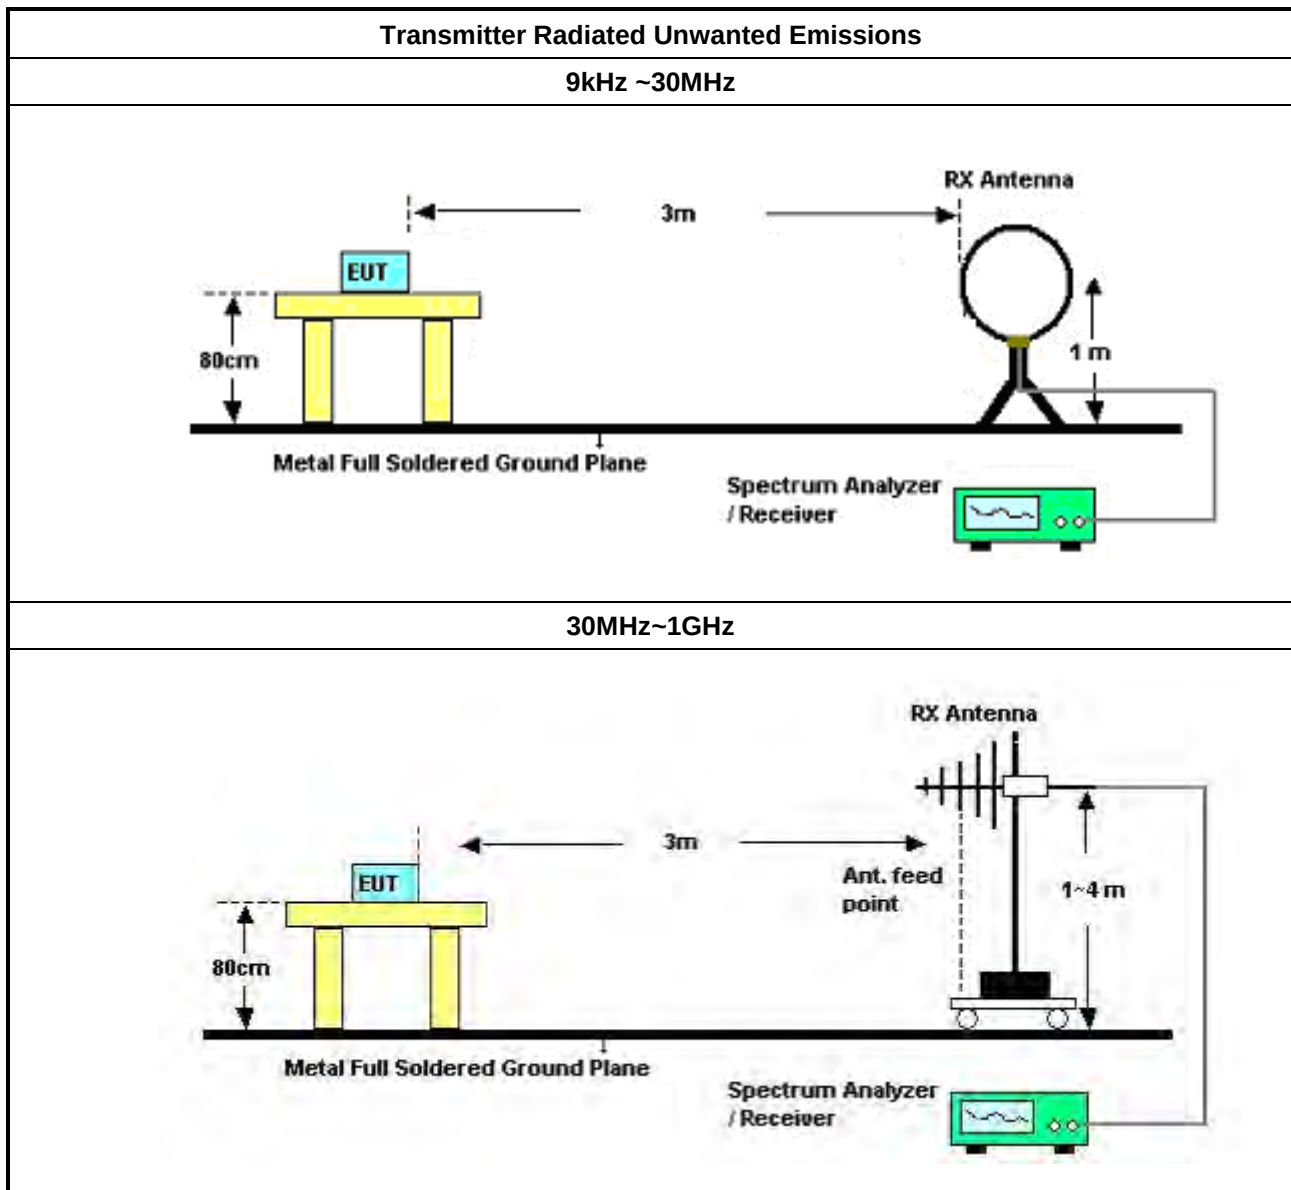

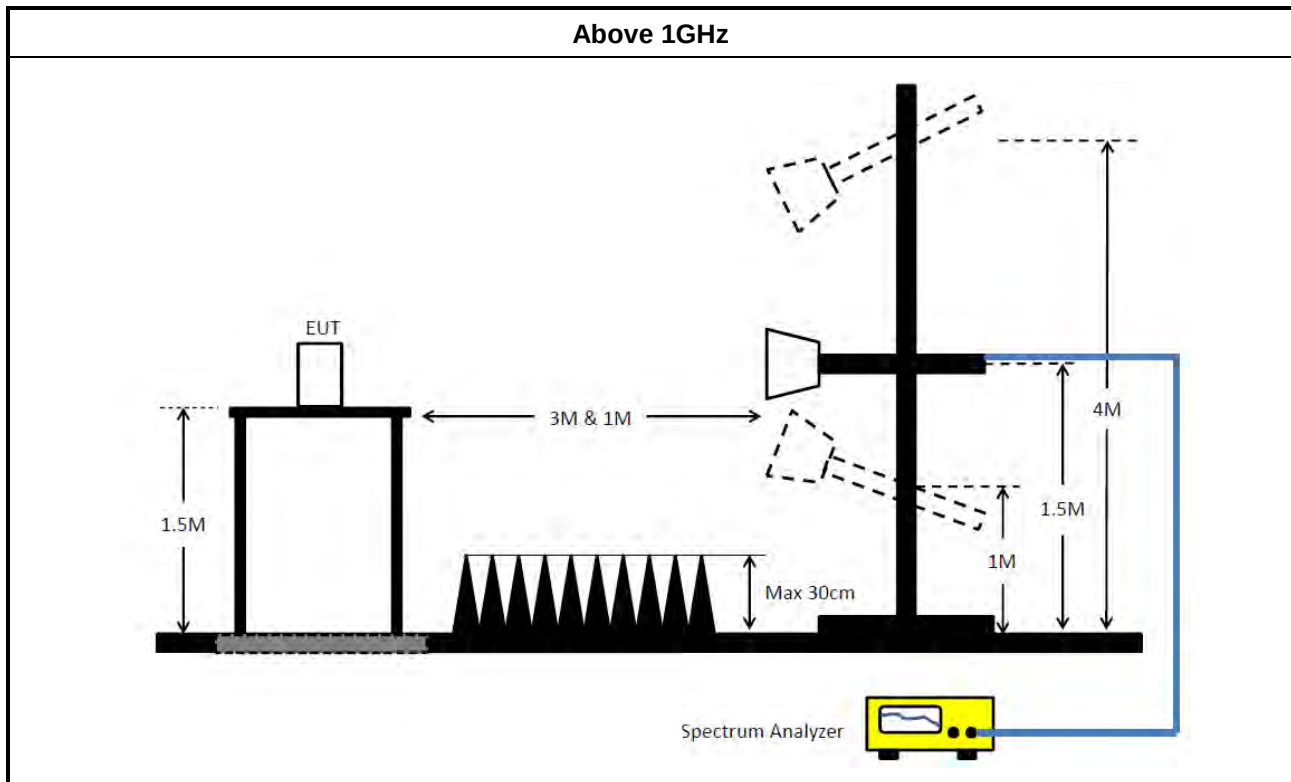

3.5.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable)
= Level

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E

3.6 Contention Based Protocol

3.6.1 Contention Based Protocol Limit

EUT can detect an AWGN signal with 90% (or better) level of certainty.


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
■	For Contention Based Protocol shall be measured using following options below:
☒	Refer as FCC KDB 987594 D02, I) Contention Based Protocol.

3.6.4 Test Setup

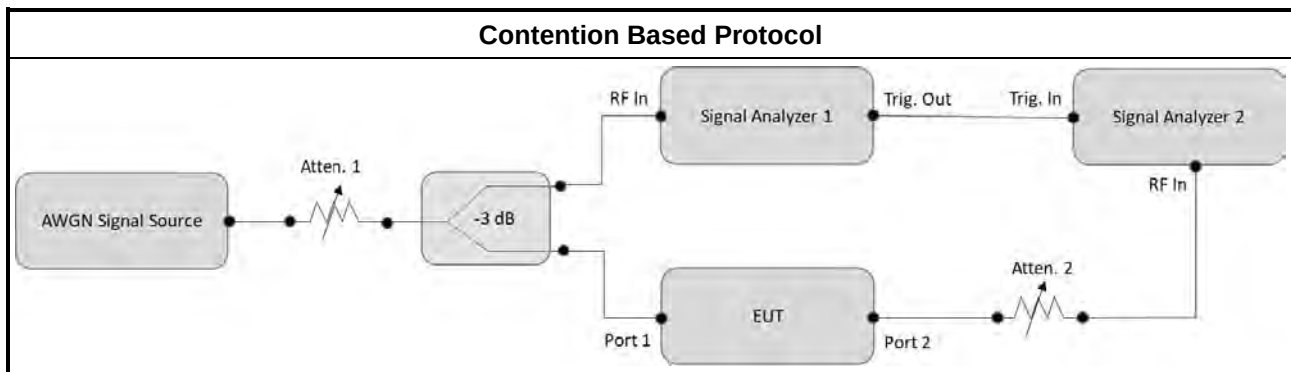

3.6.5 Test Result of Contention Based Protocol

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Mar. 06, 2025	Mar. 05, 2026	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50 -16-2	04083	150kHz ~ 100MHz	Feb. 18, 2025	Feb. 17, 2026	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	May 10, 2025	May 09, 2026	Conduction (CO01-CB)
Pulse Limiter	Rohde& Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Oct. 16, 2024	Oct. 15, 2025	Conduction (CO01-CB)
COND Cable	Woken	Cable	CO01	9kHz ~ 30MHz	Oct. 16, 2024	Oct. 15, 2025	Conduction (CO01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	150kHz-30MHz	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz ~ 30MHz	Oct. 17, 2024	Oct. 16, 2025	Radiation (03CH04-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH04-CB	30 MHz ~ 1 GHz	Jul. 31, 2024	Jul. 30, 2025	Radiation (03CH04-CB)
BILOG ANTENNA with 6 dB attenuator	Schaffner & EMCI	CBL6112B & N-6-06	22021&AT-N0 607	30MHz ~ 1GHz	Oct. 05, 2024	Oct. 04, 2025	Radiation (03CH04-CB)
Pre-Amplifier	EMCI	EMC330N	980391	20MHz ~ 3GHz	May 22, 2024	May 21, 2025	Radiation (03CH04-CB)
Pre-Amplifier	EMCI	EMC330N	980391	20MHz ~ 3GHz	May 21, 2025	May 20, 2026	Radiation (03CH04-CB)
Spectrum Analyzer	R&S	FSP40	100142	9kHz~40GHz	Mar. 24, 2025	Mar. 23, 2026	Radiation (03CH04-CB)
EMI Test Receiver	R&S	ESR7	102172	9kHz ~ 7GHz	Oct. 21, 2024	Oct. 20, 2025	Radiation (03CH04-CB)
RF Cable-low	Woken	RG402	Low Cable-03+67	30MHz ~ 1GHz	Apr. 25, 2025	Apr. 24, 2026	Radiation (03CH04-CB)
Test Software	SPORTON	SENSE-EMI	V5.11.8	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (03CH04-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH01-CB	1GHz ~18GHz 3m	May 03, 2025	May 02, 2026	Radiation (03CH01-CB)
Horn Antenna	ETS-Lindgren	3115	00143147	750MHz~18GHz	Oct. 18, 2024	Oct. 17, 2025	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Sep. 23, 2024	Sep. 22, 2025	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02121	1GHz ~ 26.5GHz	May 17, 2024	May 16, 2025	Radiation (03CH01-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Pre-Amplifier	Agilent	8449B	3008A02121	1GHz ~ 26.5GHz	May 16, 2025	May 15, 2026	Radiation (03CH01-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 25, 2024	Nov. 24, 2025	Radiation (03CH01-CB)
Signal Analyzer	R&S	FSV3044	101437	10kHz ~ 44GHz	Dec. 12, 2024	Dec. 11, 2025	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16	1 GHz ~ 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16+17	1 GHz ~ 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH01-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Apr. 30, 2025	Apr. 29, 2026	Radiation (03CH01-CB)
Test Software	SPORTON	SENSE-1540 7_NII	V5.11. 23	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH01-CB)
3m Semi Anechoic Chamber VSWR	RIKEN	SAC-3M	03CH02-CB	1GHz ~18GHz	Mar. 23, 2025	Mar. 22, 2026	Radiation (03CH02-CB)
Horn Antenna	EMCO	3115	9610-4976	1GHz ~ 18GHz	Apr. 15, 2025	Apr. 14, 2026	Radiation (03CH02-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Sep. 23, 2024	Sep. 22, 2025	Radiation (03CH02-CB)
Pre-Amplifier	Agilent	83017A	MY39501305	1GHz ~ 26.5GHz	Jun. 29, 2024	Jun. 28, 2025	Radiation (03CH02-CB)
Pre-Amplifier	Agilent	83017A	MY39501305	1GHz ~ 26.5GHz	Jun. 28, 2025	Jun. 27, 2026	Radiation (03CH02-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 25, 2024	Nov. 24, 2025	Radiation (03CH02-CB)
Signal Analyzer	R&S	FSV3044	101536	10kHz ~ 44GHz	Aug. 14, 2024	Aug. 13, 2025	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Jun. 20, 2024	Jun. 19, 2025	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Jun. 19, 2025	Jun. 18, 2026	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Jun. 20, 2024	Jun. 19, 2025	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Jun. 19, 2025	Jun. 18, 2026	Radiation (03CH02-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Apr. 30, 2025	Apr. 29, 2026	Radiation (03CH02-CB)
Test Software	SPORTON	SENSE-1540 7_NII	V5.11. 23	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH02-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH05-CB	1GHz ~18GHz 3m	Sep. 28, 2024	Sep. 27, 2025	Radiation (03CH05-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120 D-1291	1GHz~18GHz	Jun. 20, 2024	Jun. 19, 2025	Radiation (03CH05-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120 D-1291	1GHz~18GHz	Jun. 06, 2025	Jun. 05, 2026	Radiation (03CH05-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Sep. 23, 2024	Sep. 22, 2025	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC12630SE	980287	1GHz – 26.5GHz	Jun. 29, 2024	Jun. 28, 2025	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC12630SE	980287	1GHz – 26.5GHz	Jun. 28, 2025	Jun. 27, 2026	Radiation (03CH05-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 25, 2024	Nov. 24, 2025	Radiation (03CH05-CB)
Spectrum Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	Apr. 21, 2025	Apr. 20, 2026	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-28	1GHz~18GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-04+28	1GHz~18GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH05-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Apr. 30, 2025	Apr. 29, 2026	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE-EMI	V5.11.8	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (03CH05-CB)
Spectrum analyzer	R&S	FSV40	101028	9kHz~40GHz	Jan. 02, 2025	Jan. 01, 2026	Conducted (TH03-CB)
Power Sensor	Anritsu	MA2411B	1726195	300MHz~40GHz	Sep. 06, 2024	Sep. 05, 2025	Conducted (TH03-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 06, 2024	Sep. 05, 2025	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-11	30MHz –18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-12	30MHz –18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-13	30MHz –18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-14	1 GHz –18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-15	1 GHz –18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH03-CB)
Switch	SPTCB	SP-SWI	SWI-03	1~18GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (TH03-CB)
Test Software	SPORTON	SENSE-1540 7_NII	V5.11. 23	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Conducted (TH03-CB)
Spectrum Analyzer	R&S	FSV40	101025	9kHz ~ 40GHz	Nov. 08, 2024	Nov. 07, 2025	Conduction (DF02-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101025	9kHz ~ 40GHz	Nov. 12, 2025	Nov. 11, 2026	Conduction (DF02-CB)
Signal generator	R&S	SMB100A	181239	1MHz-40GHz	Jan. 08, 2025	Jan. 07, 2026	Conduction (DF02-CB)
Vector Signal Generator	R&S	SMM100A	101894	100kHz ~ 7.5GHz	Oct. 28, 2024	Oct. 27, 2025	Conduction (DF02-CB)
Vector Signal Generator	R&S	SMM100A	101894	100kHz ~ 7.5GHz	Nov. 04, 2025	Nov. 03, 2026	Conduction (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -05	1 ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Conduction (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -05	1 ~ 8GHz	Sep. 20, 2025	Sep. 19, 2026	Conduction (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -06	1 ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Conduction (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -06	1 ~ 8GHz	Sep. 20, 2025	Sep. 19, 2026	Conduction (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -07	1 ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Conduction (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -07	1 ~ 8GHz	Sep. 20, 2025	Sep. 19, 2026	Conduction (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -08	1 ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Conduction (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -08	1 ~ 8GHz	Sep. 20, 2025	Sep. 19, 2026	Conduction (DF02-CB)
RF Cable-high	Woken	RG402	Cable-60	1~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conduction (DF02-CB)
RF Cable-high	Woken	RG402	Cable-60	1~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conduction (DF02-CB)
RF Cable-high	Woken	RG402	Cable-61	1~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conduction (DF02-CB)
RF Cable-high	Woken	RG402	Cable-61	1~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conduction (DF02-CB)
RF Cable-high	Woken	RG402	Cable-63	1~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conduction (DF02-CB)
RF Cable-high	Woken	RG402	Cable-63	1~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conduction (DF02-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.




Conducted Emissions at Powerline

Appendix A

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 5	Pass	AV	514.5k	41.83	46.00	-4.17	Line

Mode 5

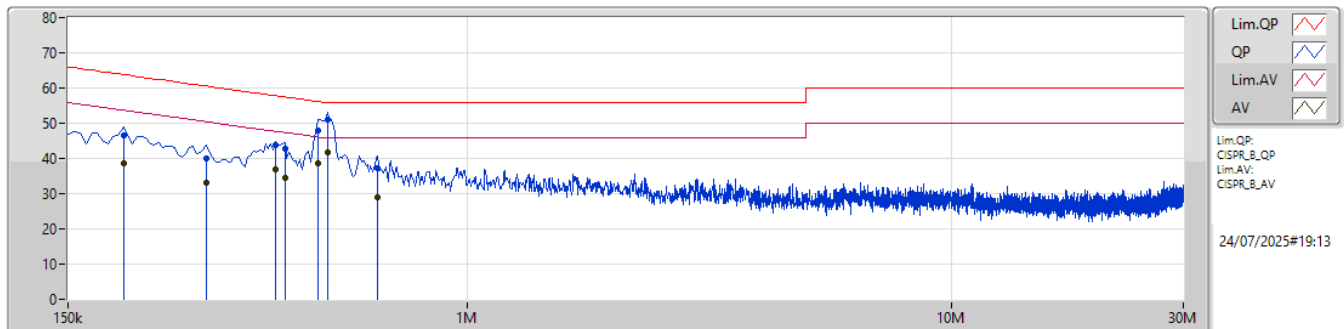

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	PA (dB)	AT (dB)				
QP	195k	46.44	63.82	-17.38	10.06	Line	-	36.38	0.06	0.07	0.02	9.95				
AV	195k	38.62	53.82	-15.20	10.06	Line	-	28.56	0.06	0.07	0.02	9.95				
QP	289.5k	40.00	60.53	-20.53	10.12	Line	-	29.88	0.05	0.09	0.03	10.01				
AV	289.5k	33.07	50.53	-17.46	10.12	Line	-	22.95	0.05	0.09	0.03	10.01				
QP	402k	43.90	57.82	-13.92	10.18	Line	-	33.72	0.05	0.10	0.03	10.06				
AV	402k	36.75	47.82	-11.07	10.18	Line	-	26.57	0.05	0.10	0.03	10.06				
QP	420k	42.74	57.45	-14.71	10.19	Line	-	32.55	0.05	0.10	0.03	10.07				
AV	420k	34.52	47.45	-12.93	10.19	Line	-	24.33	0.05	0.10	0.03	10.07				
QP	492k	47.86	56.13	-8.27	10.21	Line	-	37.65	0.06	0.10	0.03	10.08				
AV	492k	38.71	46.13	-7.42	10.21	Line	-	28.50	0.06	0.10	0.03	10.08				
QP	514.5k	51.01	56.00	-4.99	10.21	Line	-	40.80	0.06	0.10	0.04	10.09				
AV	514.5k	41.83	46.00	-4.17	10.21	Line	"Worst"	31.62	0.06	0.10	0.04	10.09				
QP	654k	37.10	56.00	-18.90	10.23	Line	-	26.87	0.07	0.09	0.04	10.11				
AV	654k	28.96	46.00	-17.04	10.23	Line	-	18.73	0.07	0.09	0.04	10.11				

Mode 5

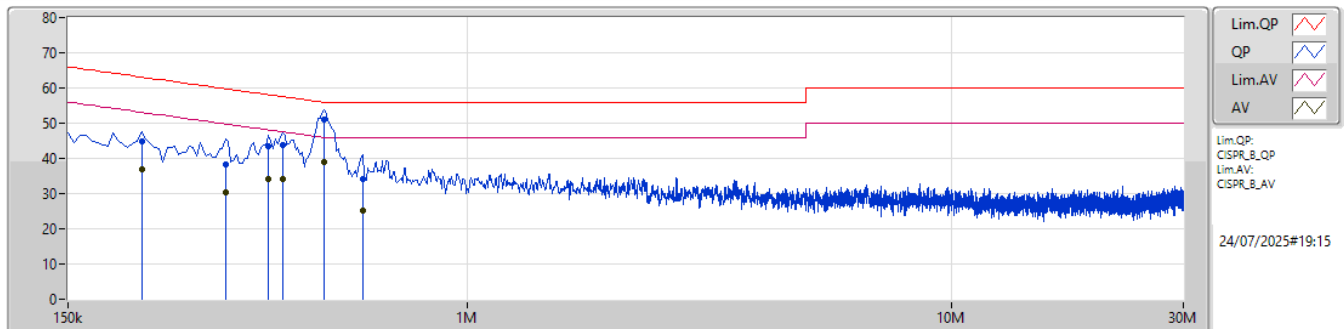

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	PA (dB)	AT (dB)				
QP	213k	44.93	63.09	-18.16	10.06	Neutral	-	34.87	0.08	0.07	0.05	9.96				
AV	213k	36.77	53.09	-16.32	10.06	Neutral	-	26.71	0.08	0.07	0.05	9.96				
QP	316.5k	38.23	59.80	-21.57	10.13	Neutral	-	28.10	0.08	0.09	0.06	10.02				
AV	316.5k	30.30	49.80	-19.50	10.13	Neutral	-	20.17	0.08	0.09	0.06	10.02				
QP	388.5k	43.29	58.10	-14.81	10.18	Neutral	-	33.11	0.08	0.10	0.06	10.06				
AV	388.5k	34.05	48.10	-14.05	10.18	Neutral	-	23.87	0.08	0.10	0.06	10.06				
QP	415.5k	43.79	57.53	-13.74	10.18	Neutral	-	33.61	0.08	0.10	0.06	10.06				
AV	415.5k	34.08	47.53	-13.45	10.18	Neutral	-	23.90	0.08	0.10	0.06	10.06				
QP	505.5k	50.93	56.00	-5.07	10.20	Neutral	"Worst"	40.73	0.08	0.10	0.07	10.09				
AV	505.5k	38.80	46.00	-7.20	10.20	Neutral	-	28.60	0.08	0.10	0.07	10.09				
QP	609k	34.31	56.00	-21.69	10.22	Neutral	-	24.09	0.08	0.10	0.07	10.11				
AV	609k	25.24	46.00	-20.76	10.22	Neutral	-	15.02	0.08	0.10	0.07	10.11				

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	22.77M	19.133M	19M1D1D	22M	18.998M
802.11be EHT40-BF_Nss1,(MCS0)_2TX	42.46M	38.166M	38M2D1D	41.8M	37.863M
802.11be EHT80-BF_Nss1,(MCS0)_2TX	86.68M	78.244M	78M2D1D	82.72M	77.41M
802.11be EHT160-BF_Nss1,(MCS0)_2TX	176M	157.051M	157MD1D	164.56M	156.895M
802.11be EHT320-BF_Nss1,(MCS0)_2TX	674.08M	319.663M	320MD1D	332.64M	315.228M
6.425-6.525GHz	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	22.825M	19.15M	19M2D1D	21.56M	19.016M
802.11be EHT40-BF_Nss1,(MCS0)_2TX	43.45M	38.117M	38M1D1D	41.58M	37.943M
802.11be EHT80-BF_Nss1,(MCS0)_2TX	86.24M	78.159M	78M2D1D	83.16M	77.597M
802.11be EHT160-BF_Nss1,(MCS0)_2TX	172.48M	157.314M	157MD1D	172.04M	157.024M
802.11be EHT320-BF_Nss1,(MCS0)_2TX	549.12M	318.484M	318MD1D	454.08M	317.24M
6.525-6.875GHz	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	23.155M	19.233M	19M2D1D	21.34M	19.02M
802.11be EHT40-BF_Nss1,(MCS0)_2TX	43.45M	38.232M	38M2D1D	41.47M	37.912M
802.11be EHT80-BF_Nss1,(MCS0)_2TX	88.66M	78.059M	78M1D1D	81.84M	77.585M
802.11be EHT160-BF_Nss1,(MCS0)_2TX	182.16M	157.047M	157MD1D	172.92M	156.661M
802.11be EHT320-BF_Nss1,(MCS0)_2TX	653.84M	318.649M	319MD1D	339.68M	316.055M
6.875-7.125GHz	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	22.33M	19.152M	19M2D1D	21.725M	19.044M
802.11be EHT40-BF_Nss1,(MCS0)_2TX	44.11M	38.132M	38M1D1D	42.24M	37.937M
802.11be EHT80-BF_Nss1,(MCS0)_2TX	84.26M	78.006M	78M0D1D	79.86M	77.41M
802.11be EHT160-BF_Nss1,(MCS0)_2TX	176M	157.078M	157MD1D	168.52M	157.043M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5955MHz	Pass	320MHz	22.275M	19.133M	22.605M	19.062M
6195MHz	Pass	320MHz	22M	19.024M	22.77M	19.062M
6415MHz	Pass	320MHz	22.11M	19.027M	22.44M	18.998M
6435MHz	Pass	320MHz	21.615M	19.048M	22.22M	19.032M
6475MHz	Pass	320MHz	22M	19.15M	21.56M	19.017M
6515MHz	Pass	320MHz	21.615M	19.016M	22.825M	19.101M
6535MHz	Pass	320MHz	22.66M	19.233M	22.165M	19.02M
6695MHz	Pass	320MHz	22.495M	19.119M	21.34M	19.062M
6875MHz	Pass	320MHz	23.155M	19.093M	21.78M	19.107M
6895MHz	Pass	320MHz	22.165M	19.134M	21.725M	19.044M
6995MHz	Pass	320MHz	22.11M	19.131M	22.11M	19.152M
7095MHz	Pass	320MHz	22.33M	19.051M	21.89M	19.109M
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5965MHz	Pass	320MHz	42.46M	37.869M	42.46M	38.054M
6205MHz	Pass	320MHz	41.8M	38.166M	42.24M	37.863M
6405MHz	Pass	320MHz	42.02M	37.982M	42.46M	37.91M
6445MHz	Pass	320MHz	42.79M	38.117M	43.45M	38M
6485MHz	Pass	320MHz	42.24M	37.948M	42.13M	37.944M
6525MHz	Pass	320MHz	42.46M	38.017M	41.58M	37.943M
6565MHz	Pass	320MHz	42.13M	38.232M	42.46M	37.949M
6685MHz	Pass	320MHz	42.24M	38.008M	42.79M	37.912M
6885MHz	Pass	320MHz	41.47M	38.002M	43.45M	38.04M
6925MHz	Pass	320MHz	42.24M	37.942M	42.35M	37.937M
7005MHz	Pass	320MHz	42.57M	38.014M	42.9M	38.003M
7085MHz	Pass	320MHz	44.11M	38.132M	43.34M	37.958M
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5985MHz	Pass	320MHz	85.14M	77.41M	85.14M	77.672M
6225MHz	Pass	320MHz	86.24M	78.244M	82.72M	77.702M
6385MHz	Pass	320MHz	86.68M	77.465M	85.36M	77.413M
6465MHz	Pass	320MHz	84.04M	78.125M	83.16M	77.597M
6545MHz	Pass	320MHz	86.24M	77.641M	85.58M	78.159M
6625MHz	Pass	320MHz	83.6M	78.059M	81.84M	77.727M
6705MHz	Pass	320MHz	83.16M	77.672M	83.6M	77.713M
6785MHz	Pass	320MHz	84.48M	77.806M	86.46M	77.834M
6865MHz	Pass	320MHz	88.66M	77.677M	82.72M	77.585M
6945MHz	Pass	320MHz	83.38M	78.006M	82.06M	77.744M
7025MHz	Pass	320MHz	84.26M	77.41M	79.86M	77.808M
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6025MHz	Pass	320MHz	172.04M	156.941M	176M	156.93M
6185MHz	Pass	320MHz	171.6M	156.909M	172.48M	157.051M
6345MHz	Pass	320MHz	164.56M	157.015M	172.48M	156.895M
6505MHz	Pass	320MHz	172.48M	157.314M	172.04M	157.024M
6665MHz	Pass	320MHz	172.92M	157.047M	173.8M	156.951M
6825MHz	Pass	320MHz	175.56M	156.661M	182.16M	156.87M
6985MHz	Pass	320MHz	176M	157.043M	168.52M	157.078M
802.11be EHT320-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6105MHz	Pass	320MHz	340.56M	316.29M	332.64M	315.228M
6265MHz	Pass	320MHz	366.96M	316.399M	424.16M	316.296M
6425MHz	Pass	320MHz	674.08M	319.536M	655.6M	319.663M
6585MHz	Pass	320MHz	549.12M	318.484M	454.08M	317.24M
6745MHz	Pass	320MHz	443.52M	318.621M	653.84M	318.649M
6905MHz	Pass	320MHz	343.2M	317.309M	339.68M	316.055M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX
EBW
5955MHz

03/06/2025

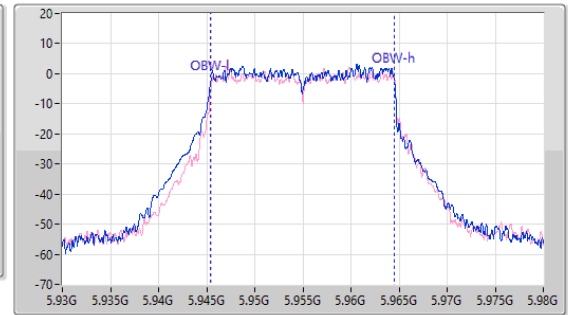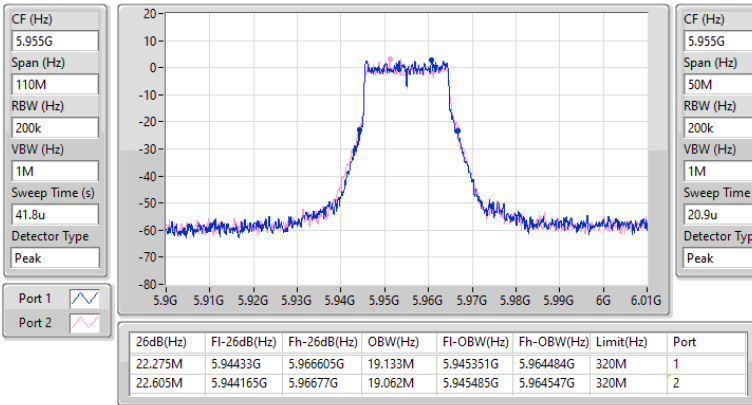
5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX
EBW
6195MHz

03/06/2025

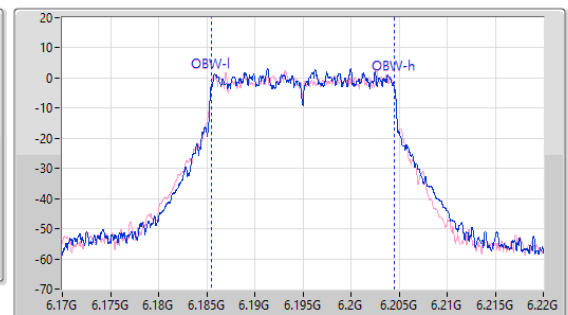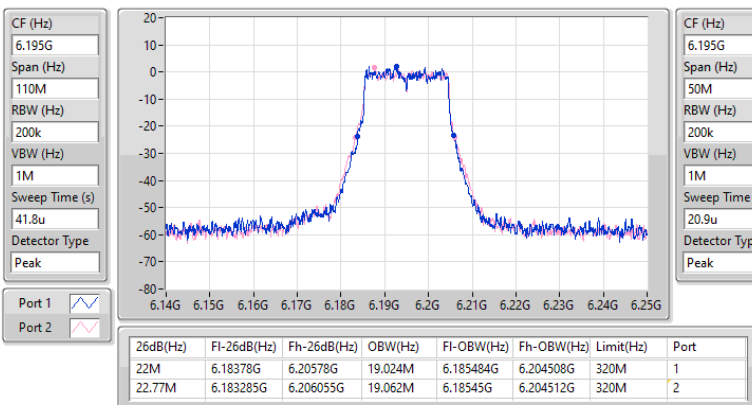


5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW

6415MHz

03/06/2025

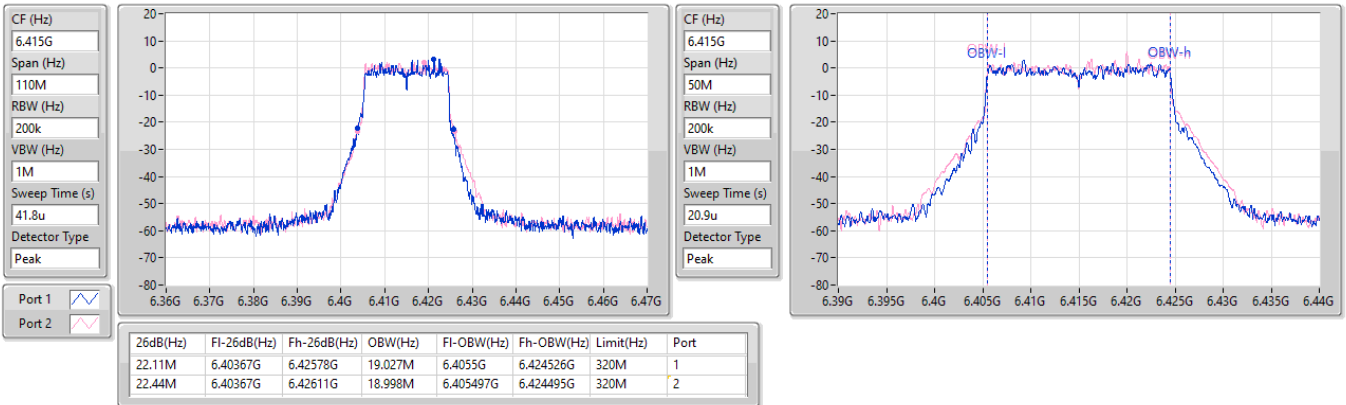


6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW


6435MHz

03/06/2025

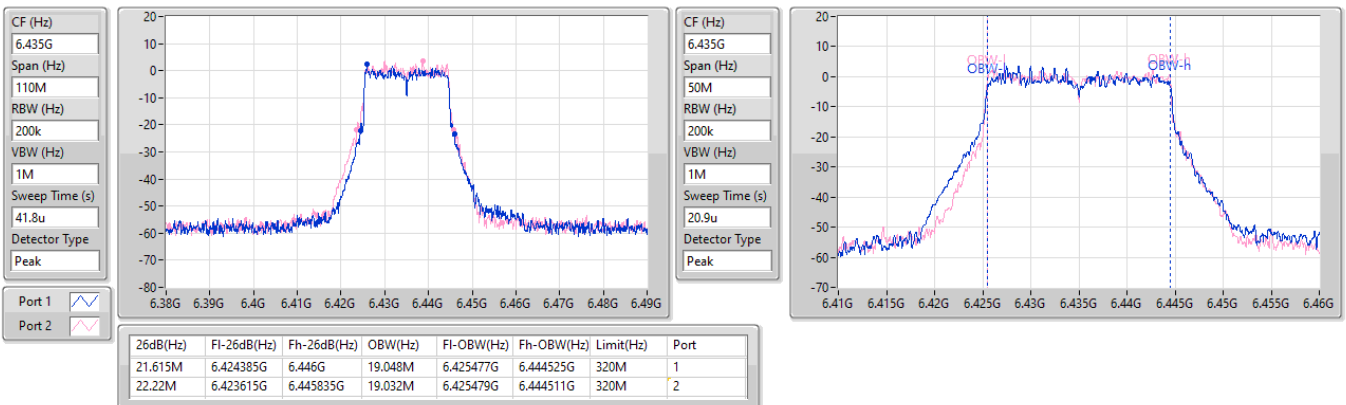


6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX
EBW
6475MHz

03/06/2025

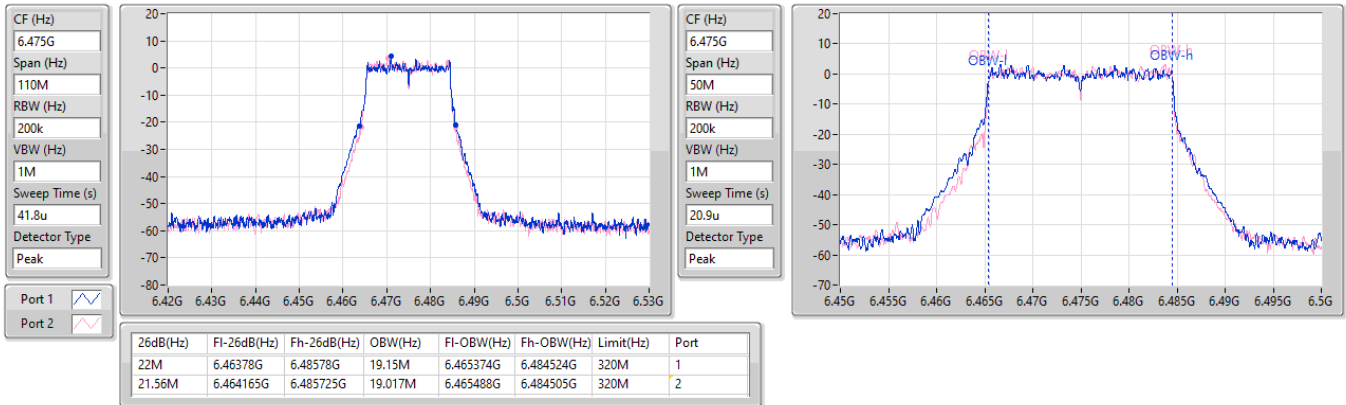
6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX
EBW
6515MHz

03/06/2025

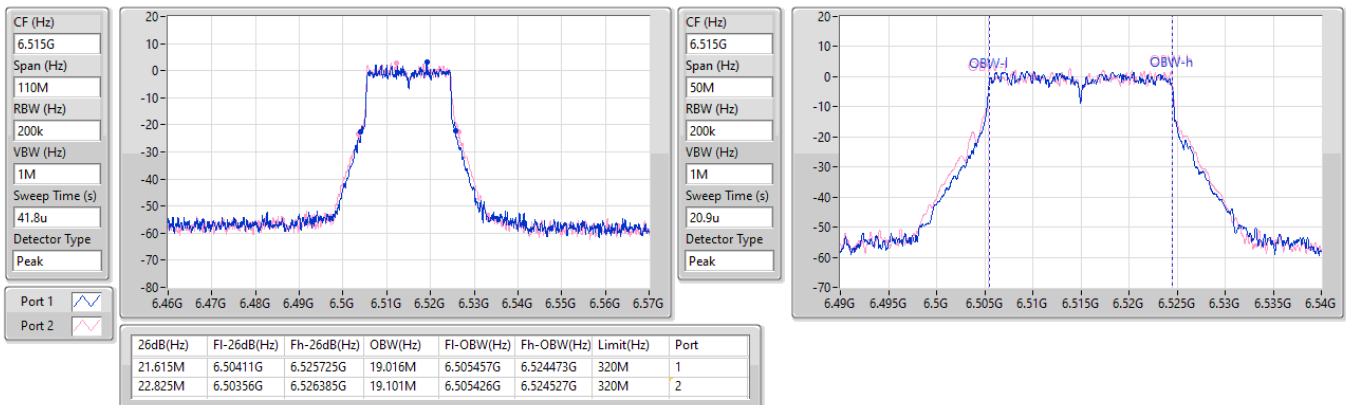


6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW

6535MHz

03/06/2025

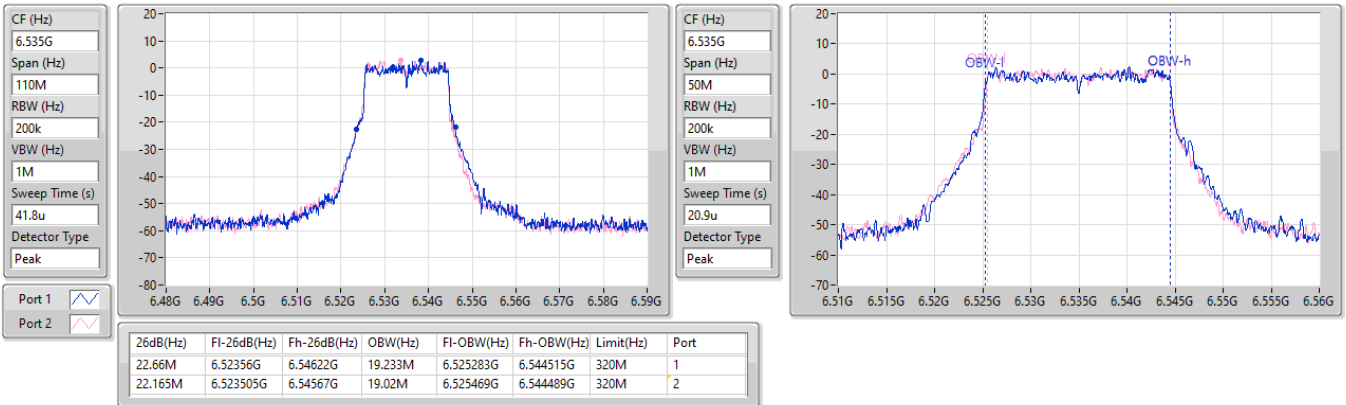


6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW

6695MHz

03/06/2025

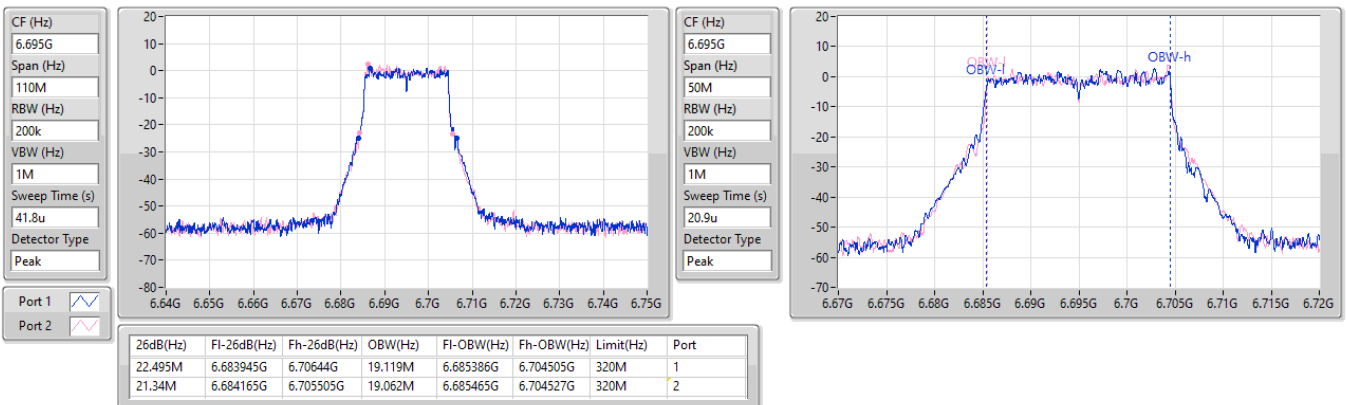


6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW

6875MHz

03/06/2025

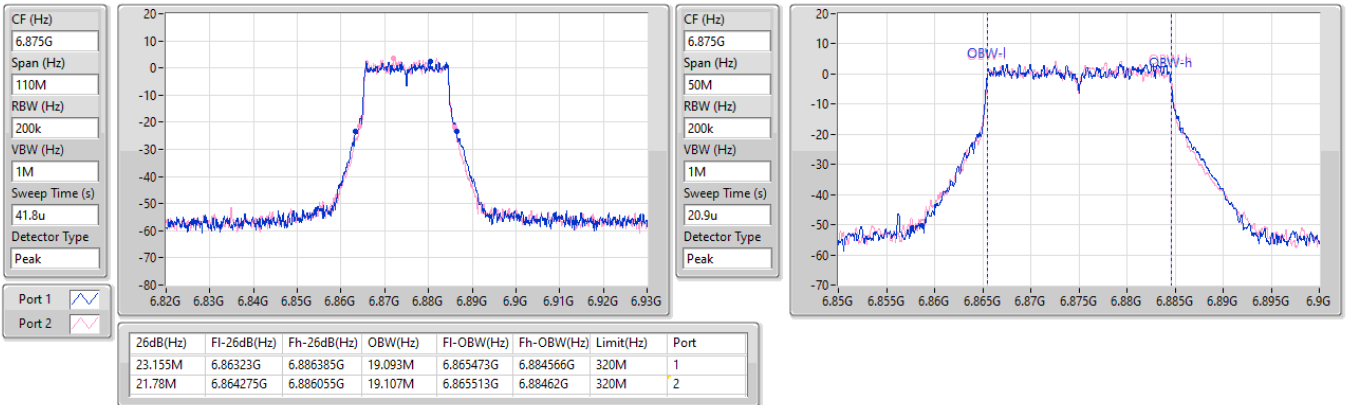


6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW

6895MHz

03/06/2025

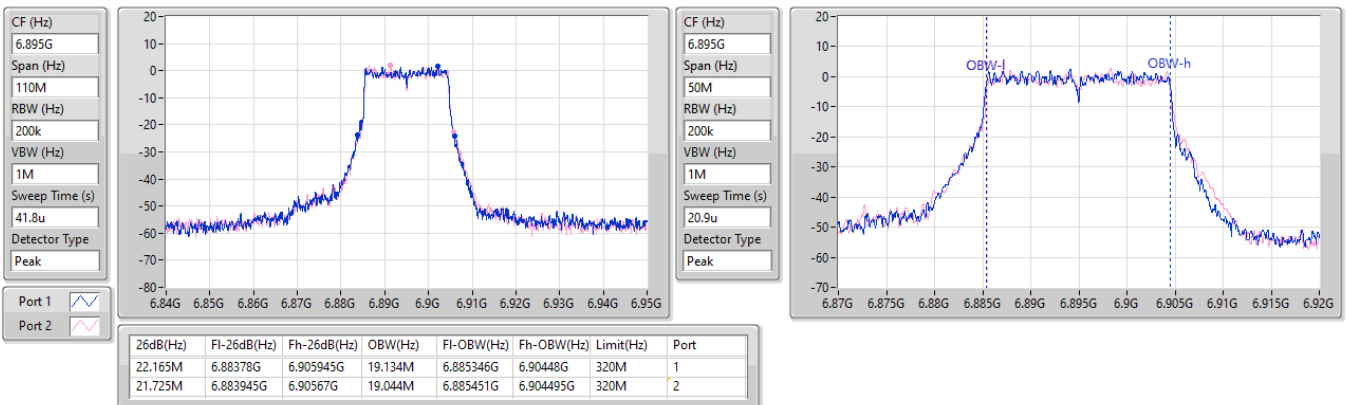


6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW

6995MHz

03/06/2025

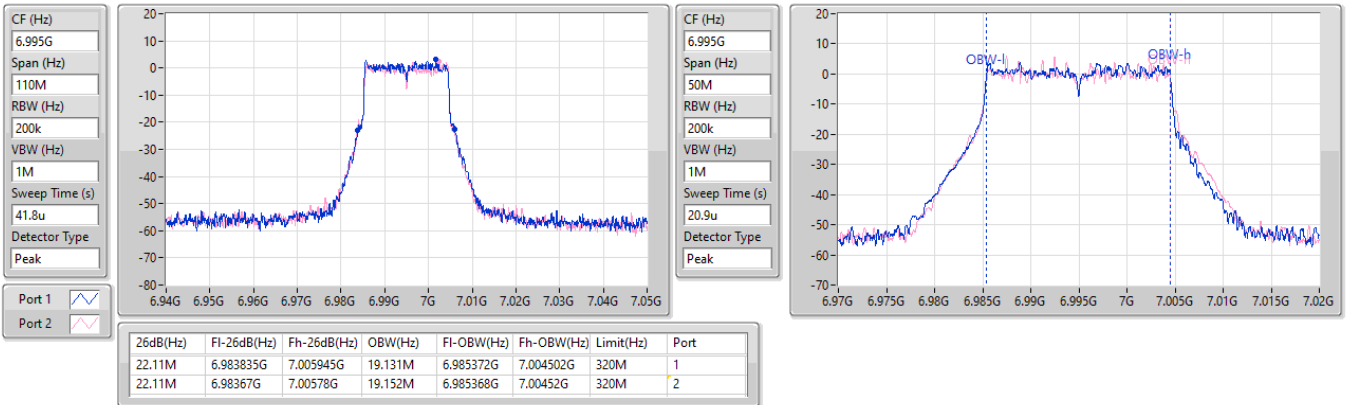


6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW

7095MHz

03/06/2025


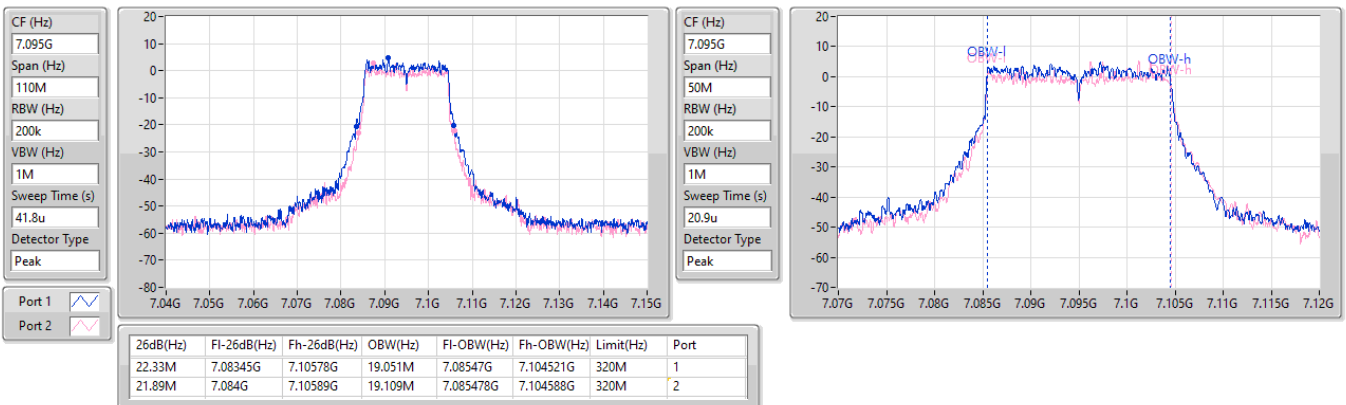


5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

EBW

5965MHz

03/06/2025

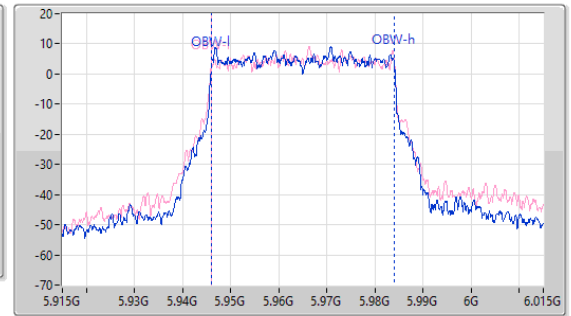
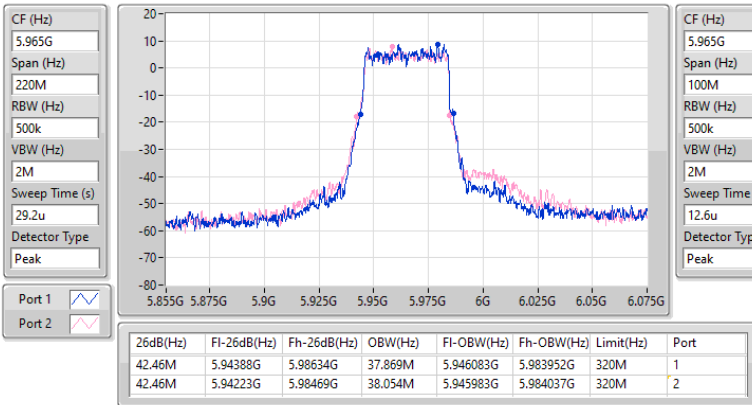


5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

EBW



6205MHz

03/06/2025

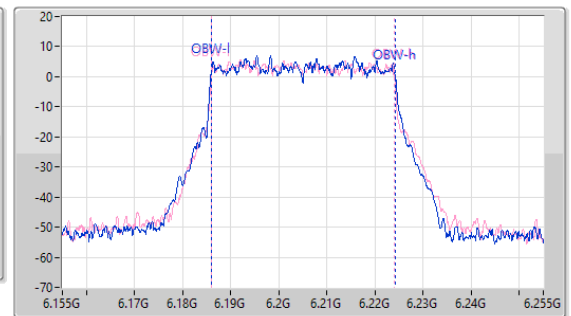
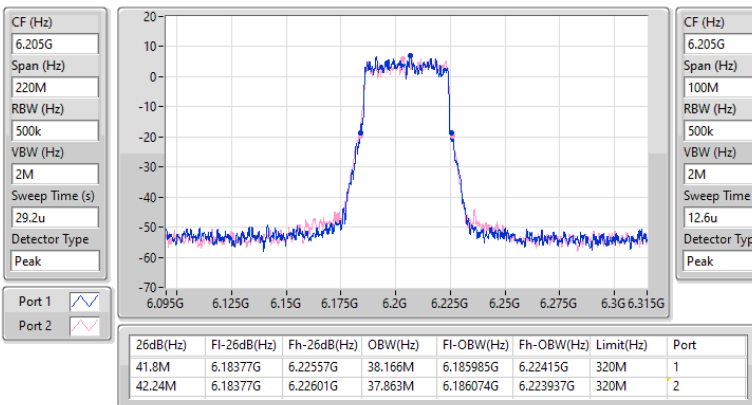


5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX
EBW
6405MHz

04/06/2025

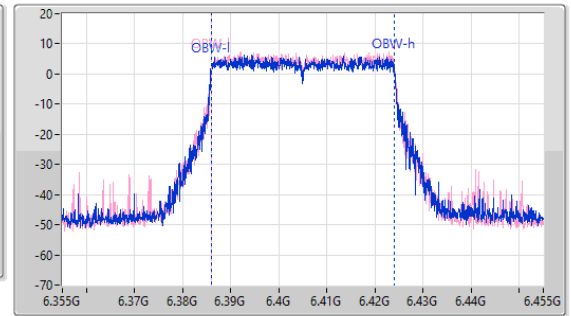
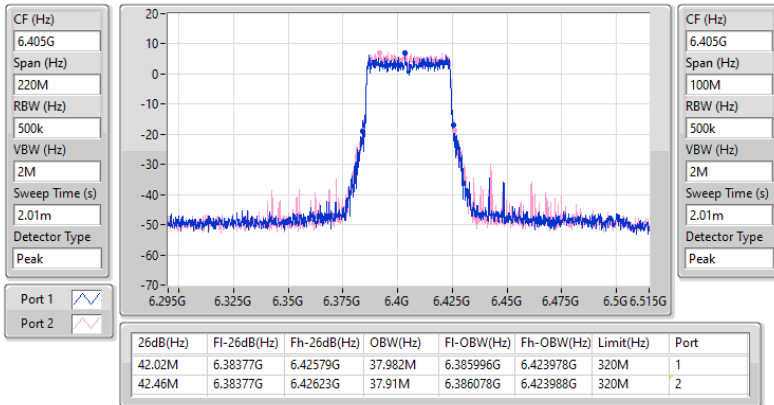

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX
EBW
6445MHz

03/06/2025

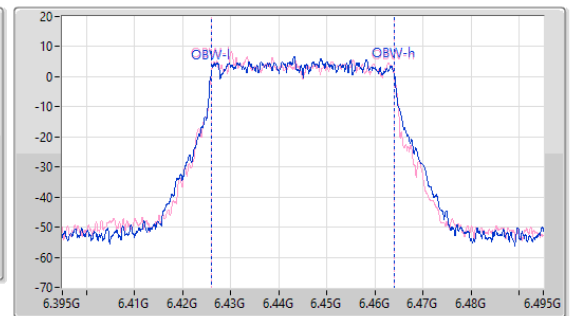
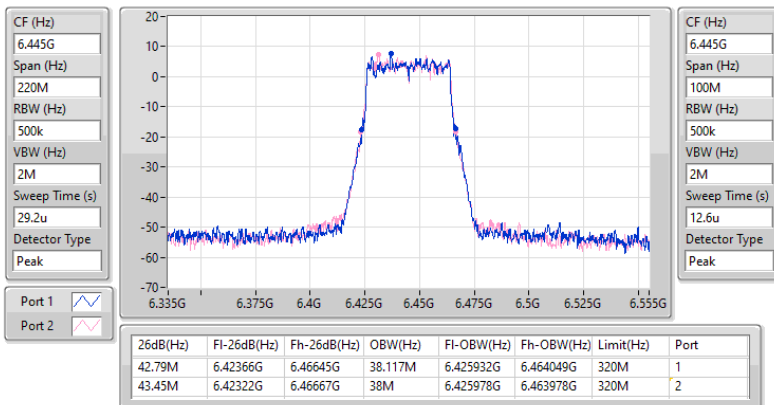


6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX
EBW
6485MHz

03/06/2025

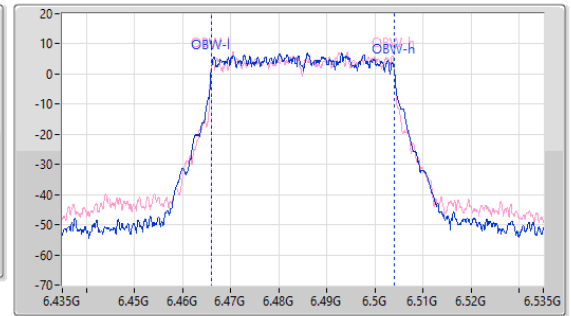
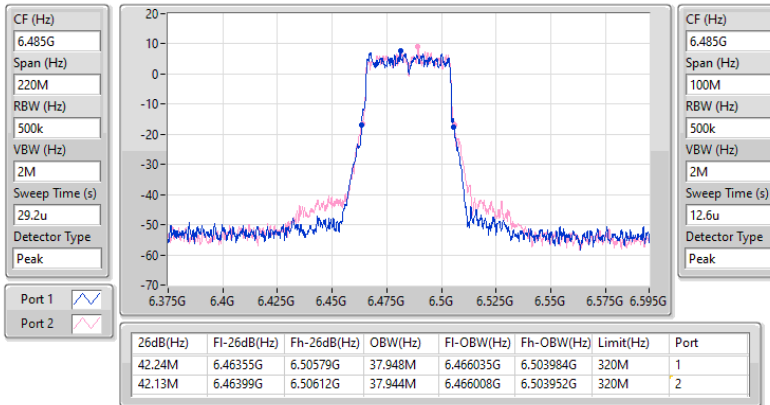

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX
EBW
6525MHz

03/06/2025

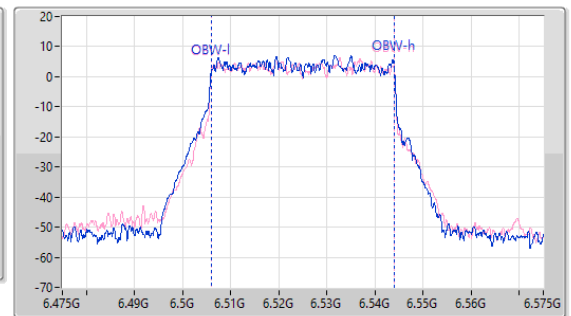
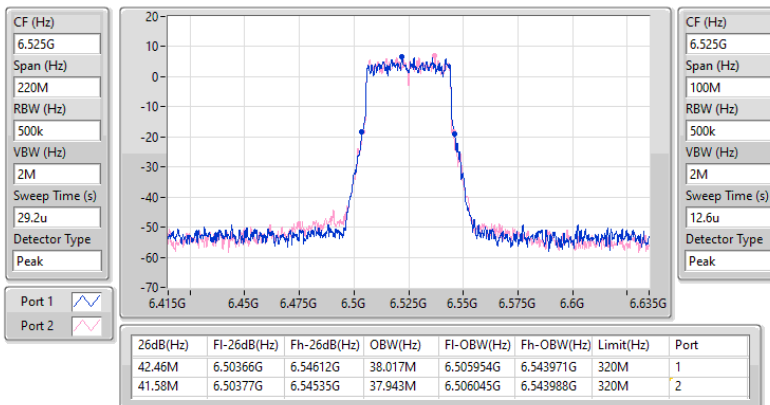


6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX
EBW
6565MHz

03/06/2025

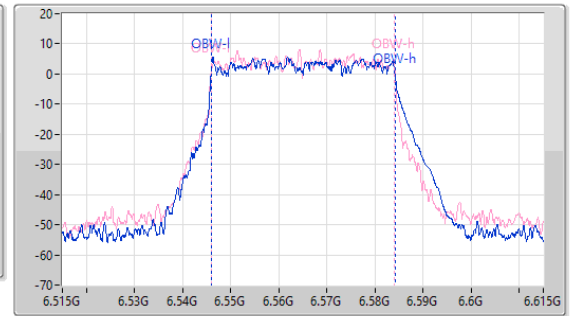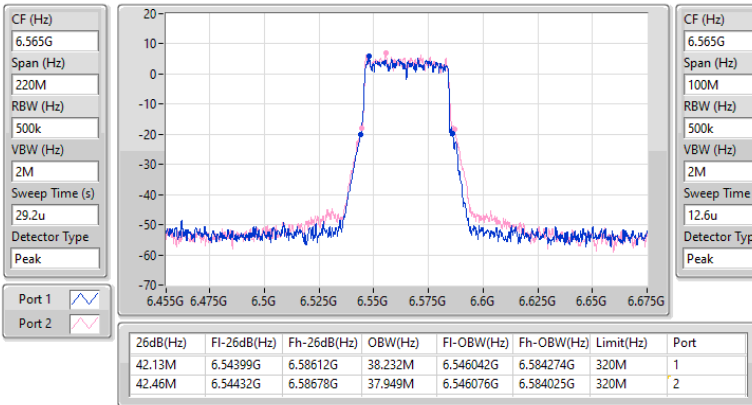
6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX
EBW
6685MHz

03/06/2025

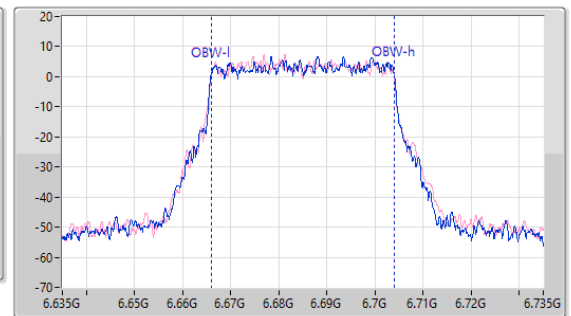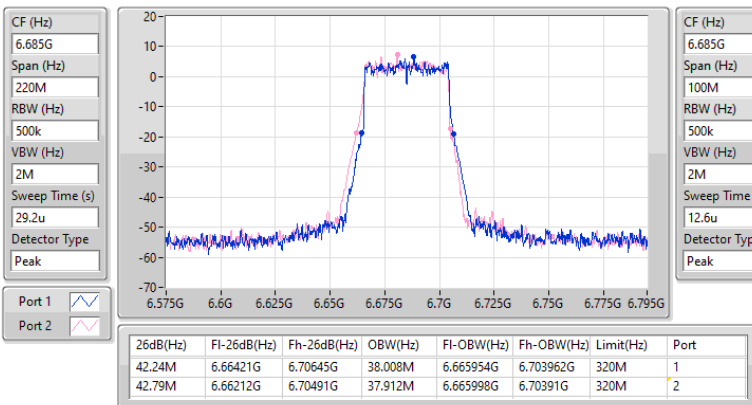


6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

EBW

6885MHz

04/06/2025

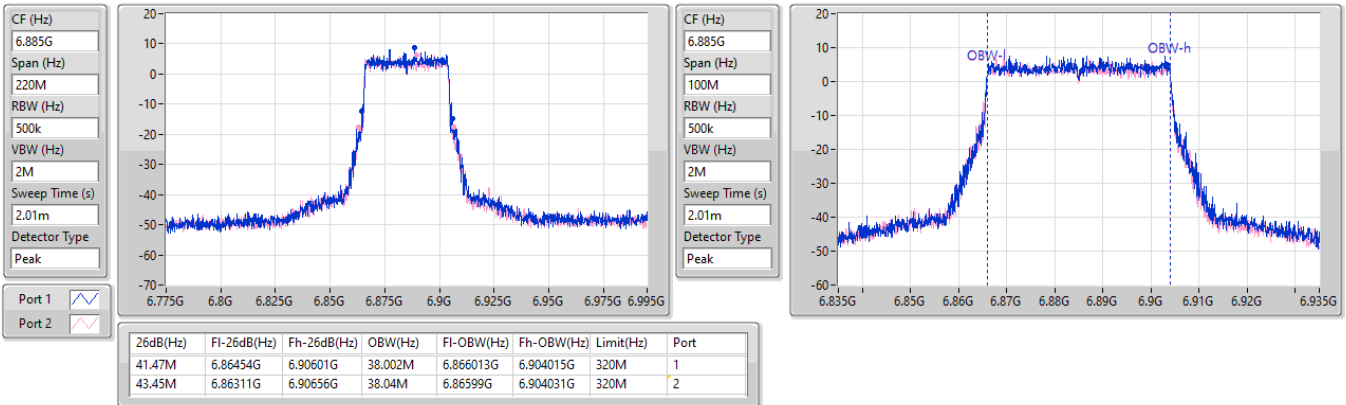


6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

EBW

6925MHz

03/06/2025

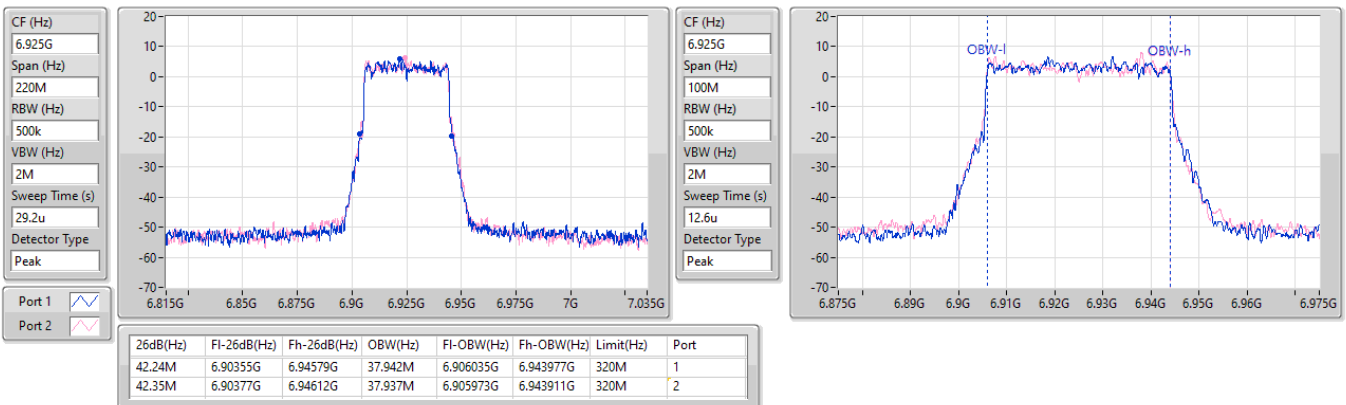


6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

EBW

7005MHz

03/06/2025

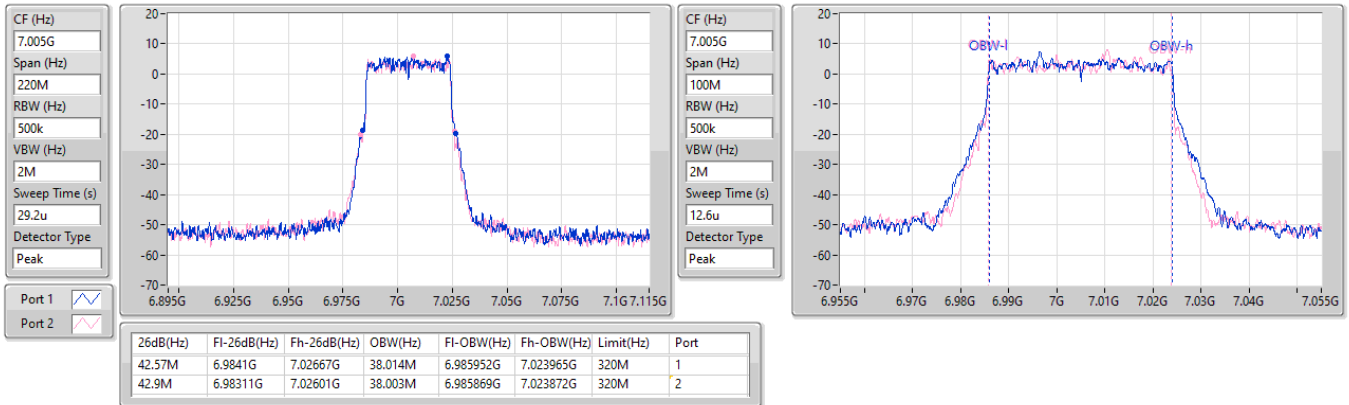


6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

EBW

7085MHz

03/06/2025

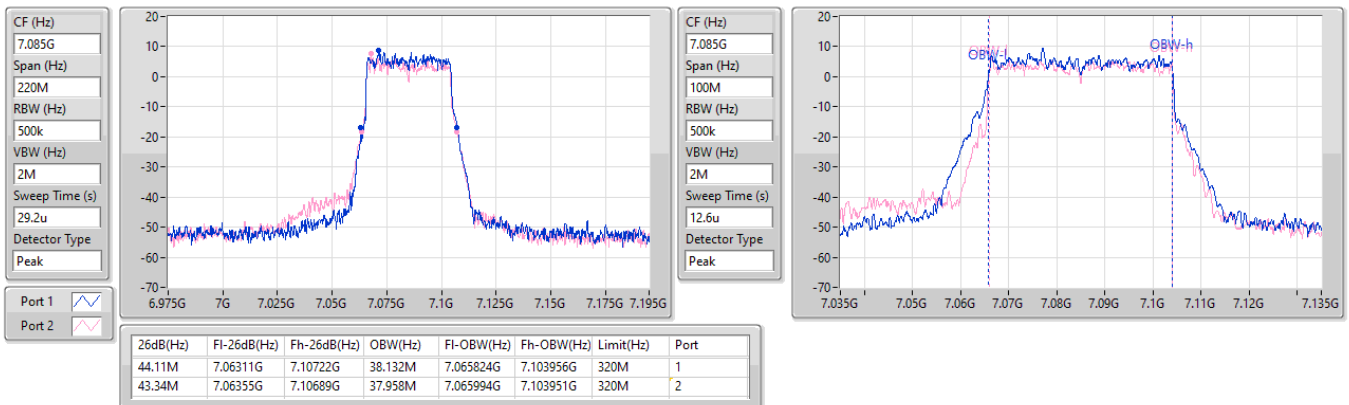


5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

EBW

5985MHz

03/06/2025

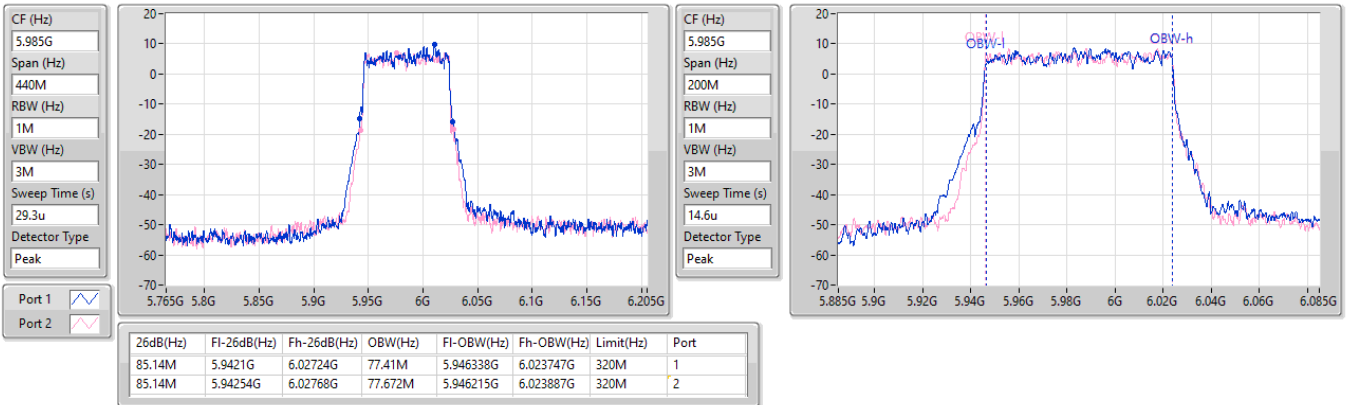


5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

EBW

6225MHz

03/06/2025

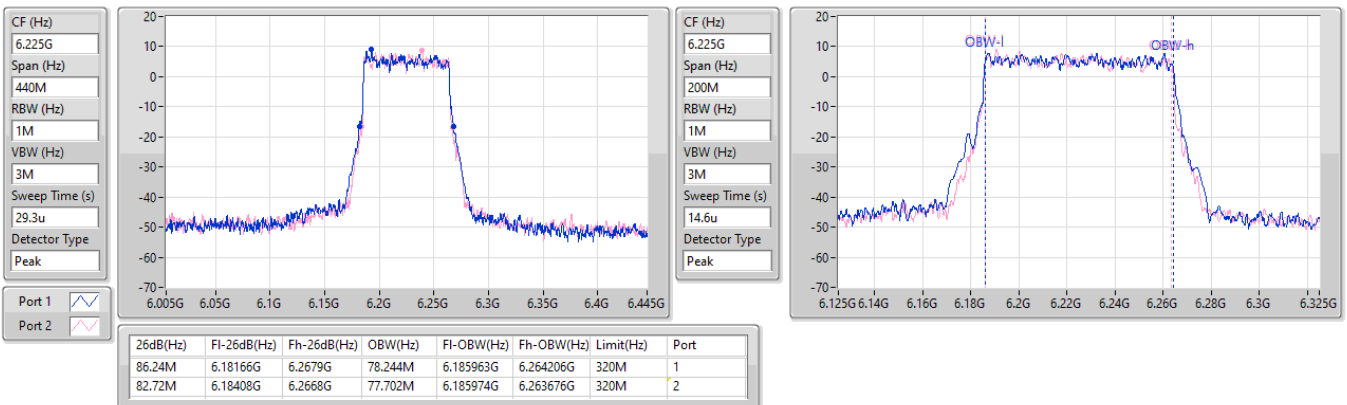


5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

EBW

6385MHz

03/06/2025

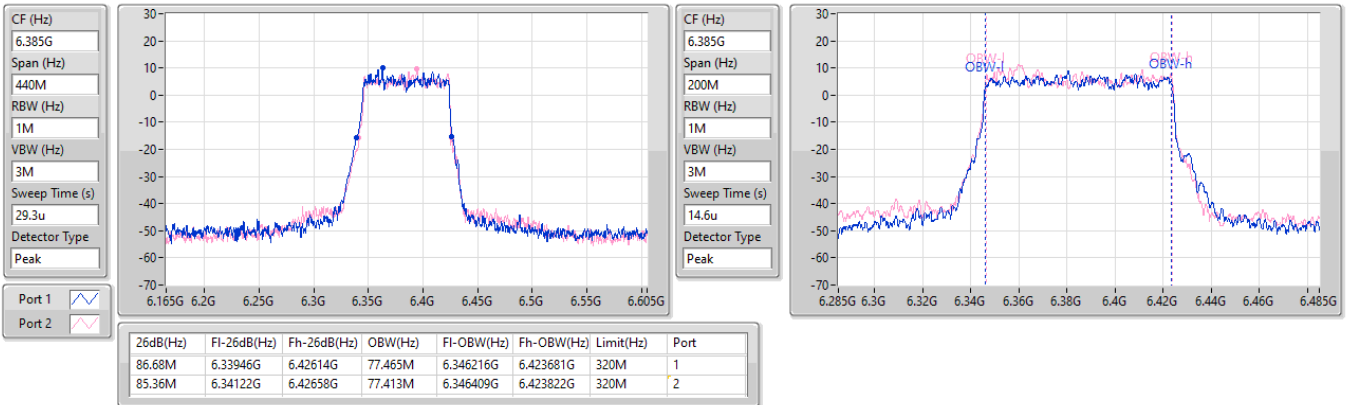


6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

EBW



6465MHz

03/06/2025


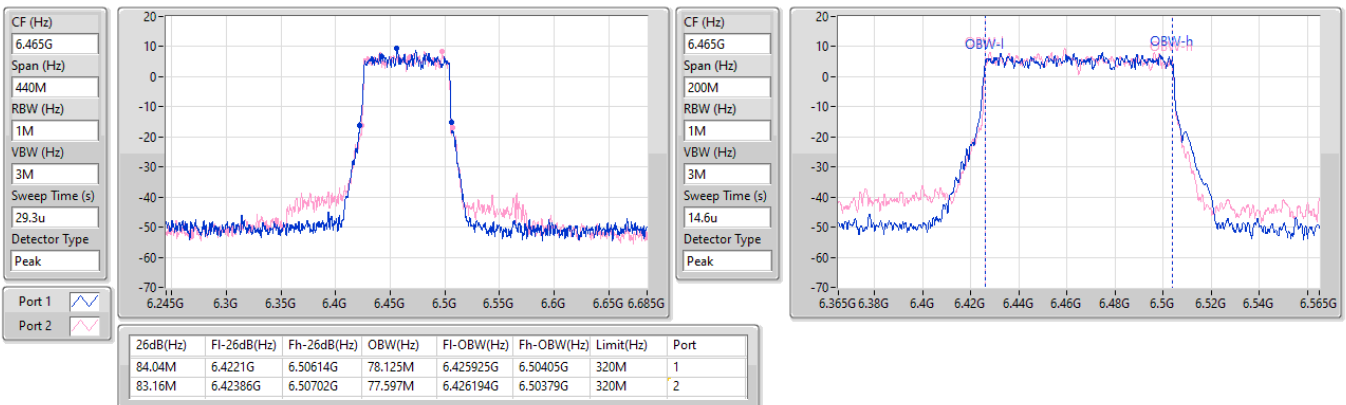


6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX
EBW
6545MHz

03/06/2025

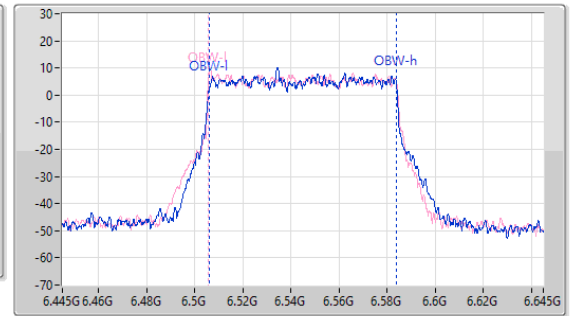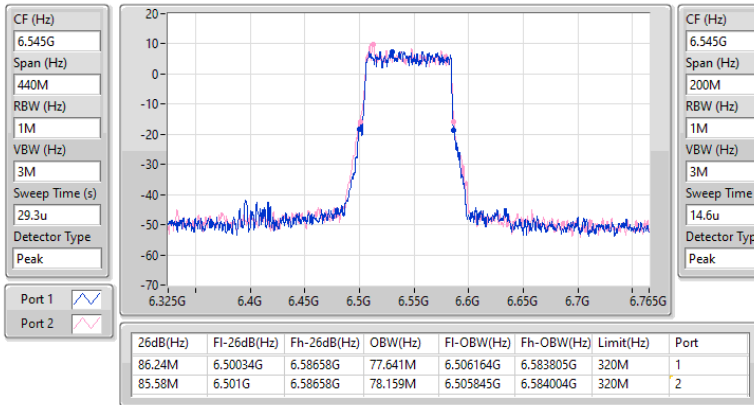

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX
EBW
6625MHz

03/06/2025

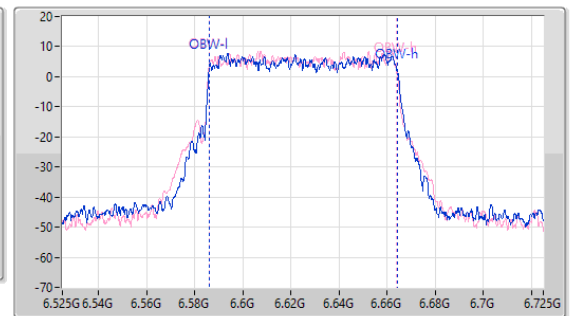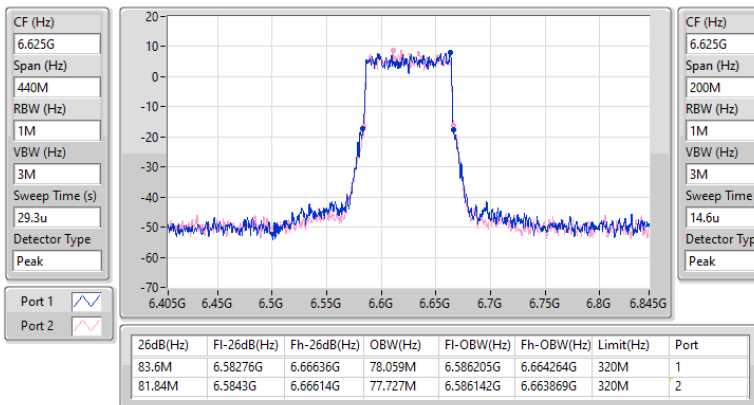


6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX
EBW
6705MHz

03/06/2025

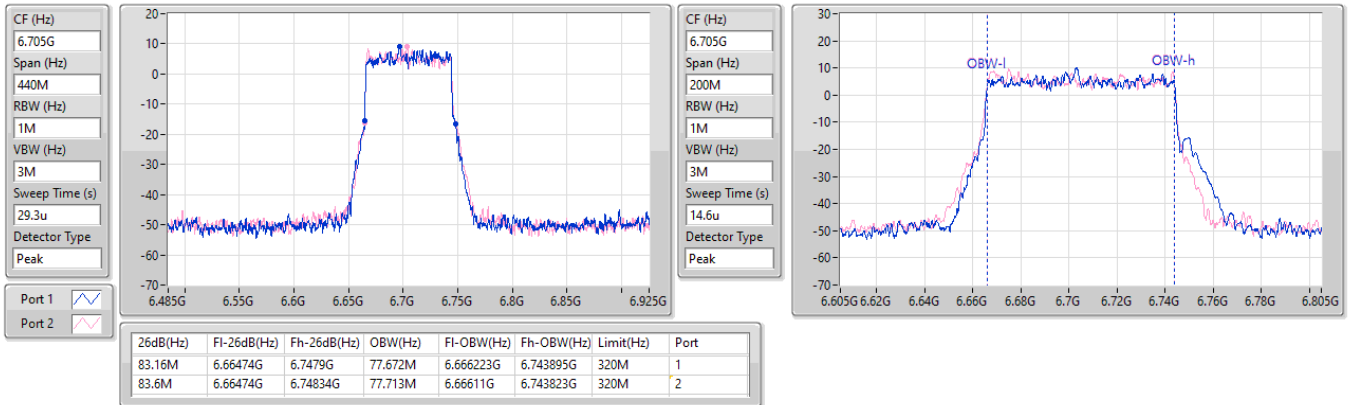
6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX
EBW
6785MHz

03/06/2025


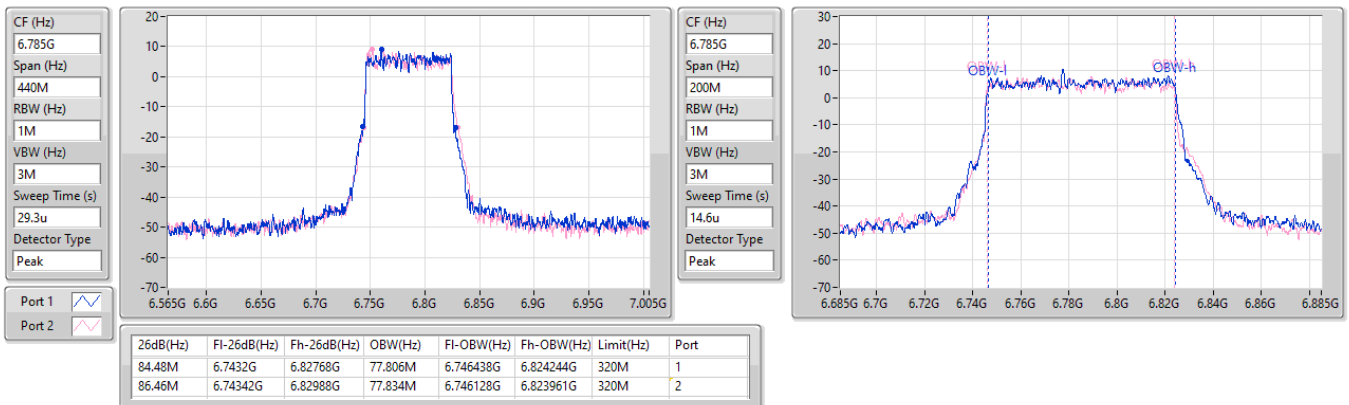


6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

EBW

6865MHz

03/06/2025

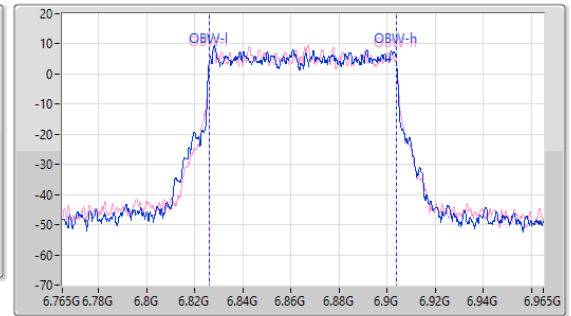
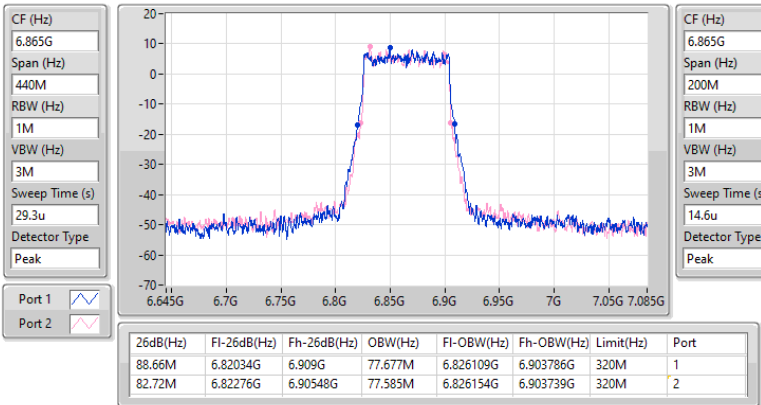


6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

EBW

6945MHz

03/06/2025

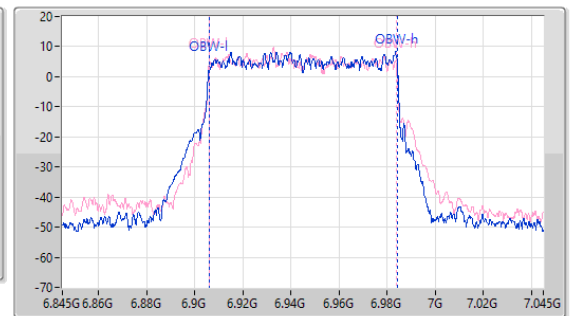
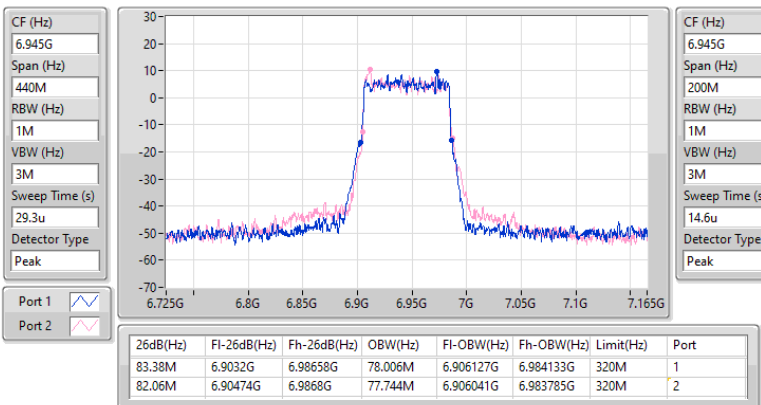


6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

EBW

7025MHz

03/06/2025

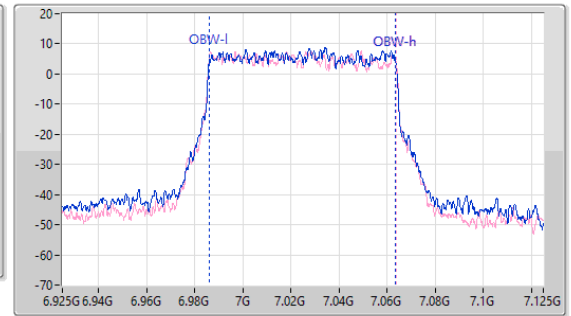
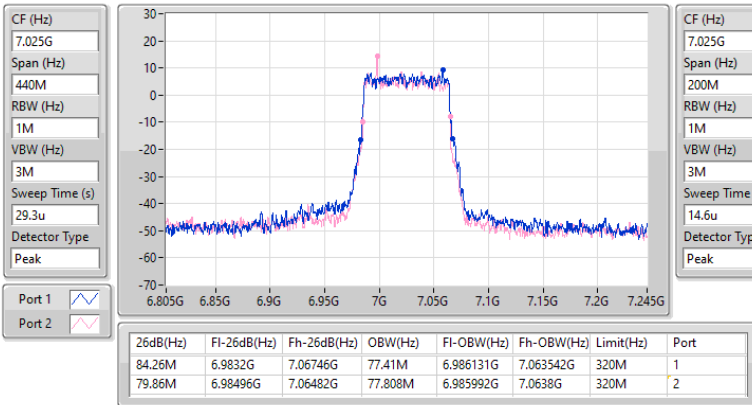


5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

EBW



6025MHz

03/06/2025

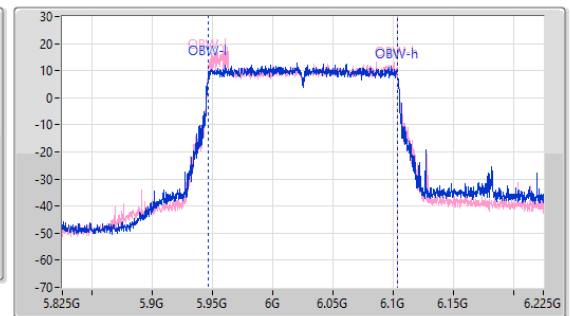
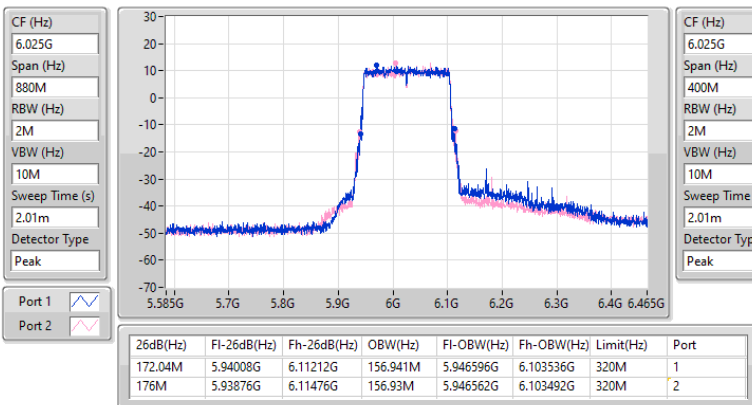


5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX
EBW
6185MHz

03/06/2025

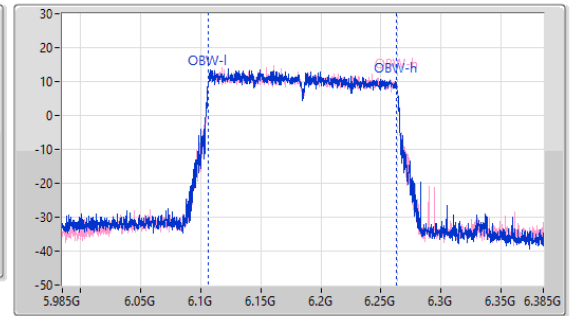
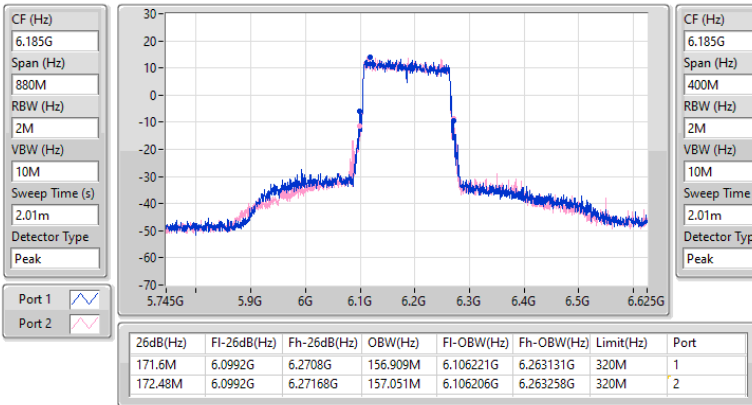

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX
EBW
6345MHz

03/06/2025

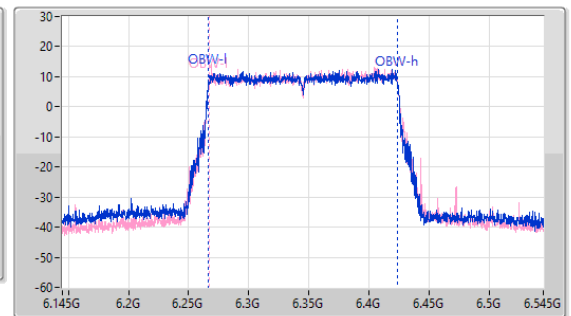
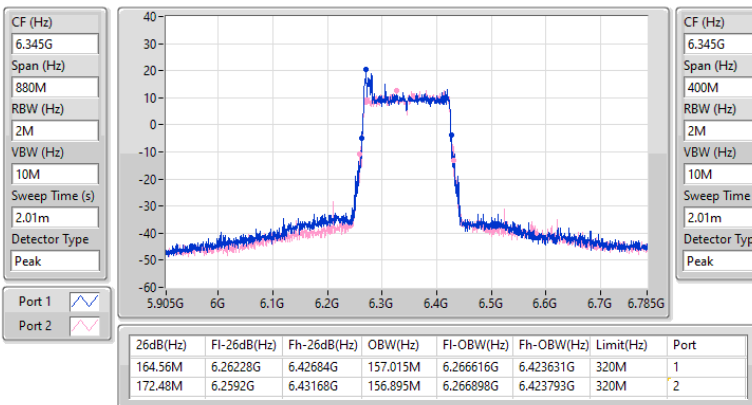


6.425-6.525GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX
EBW
6505MHz

03/06/2025

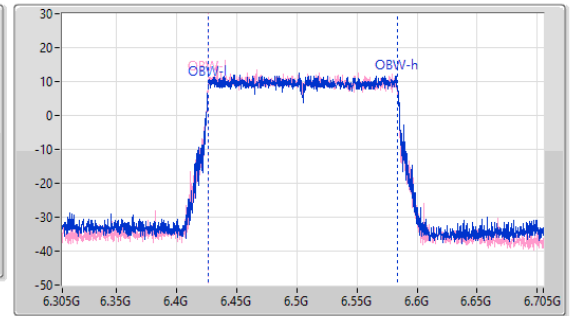
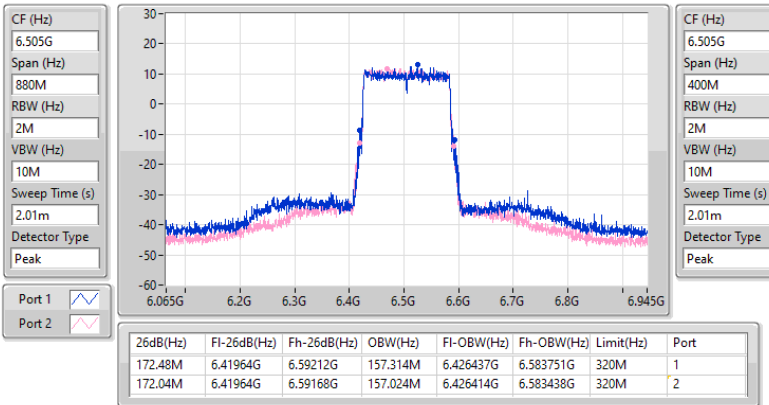

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX
EBW
6665MHz

03/06/2025

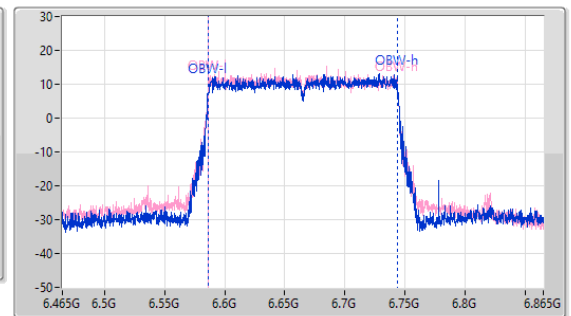
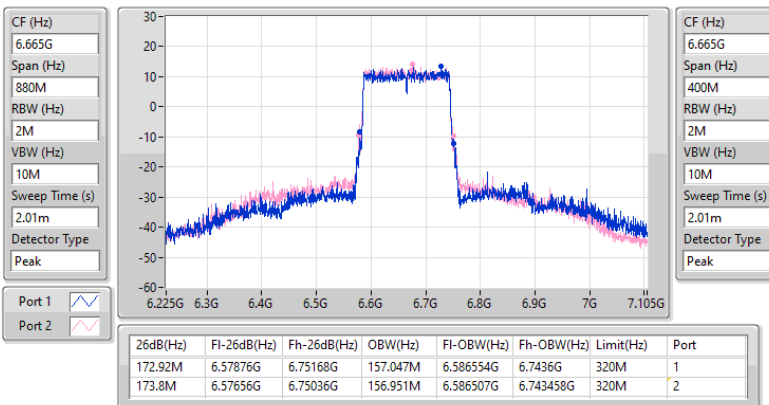


6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX
EBW
6825MHz

05/06/2025

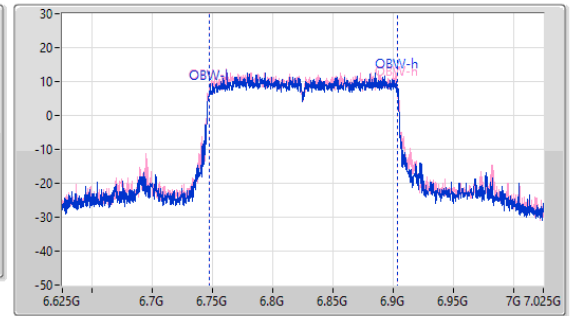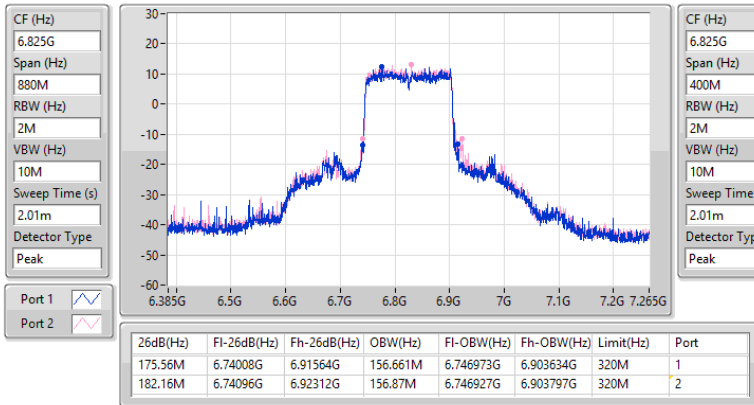
6.875-7.125GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX
EBW
6985MHz

03/06/2025

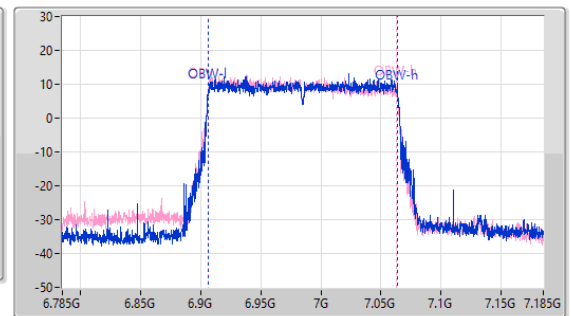
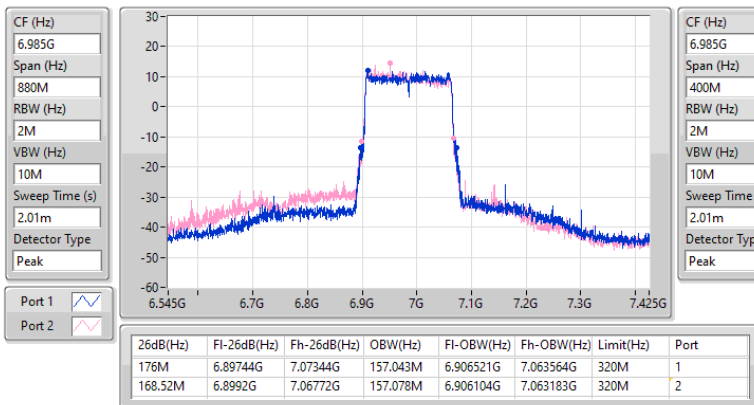


5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

EBW

6105MHz

04/06/2025

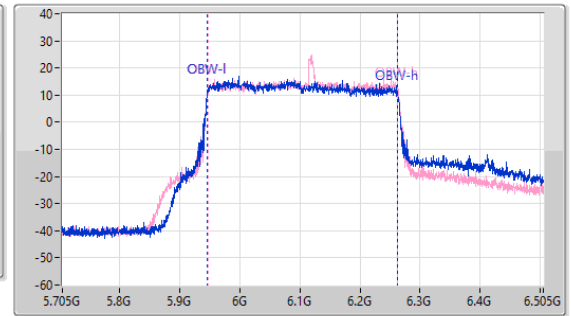
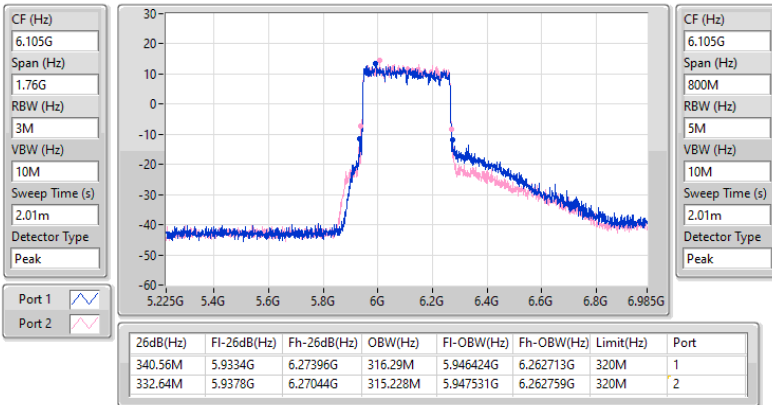


5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

EBW

6265MHz

04/06/2025

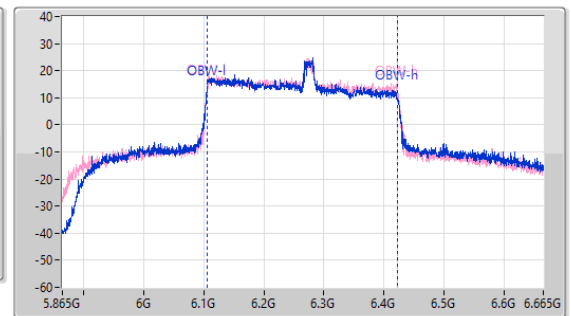
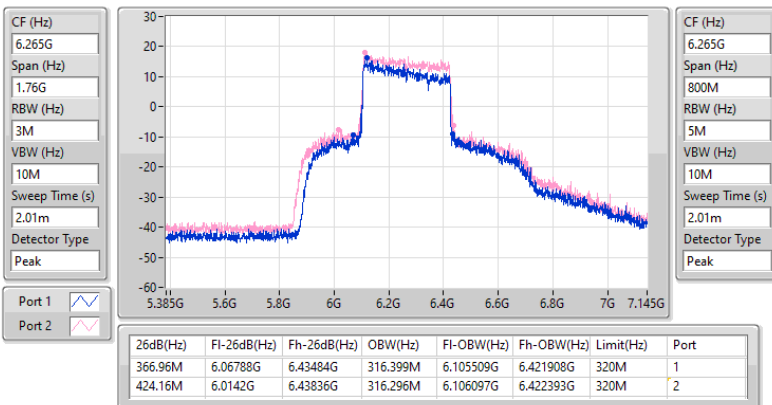


5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

EBW

6425MHz

04/06/2025

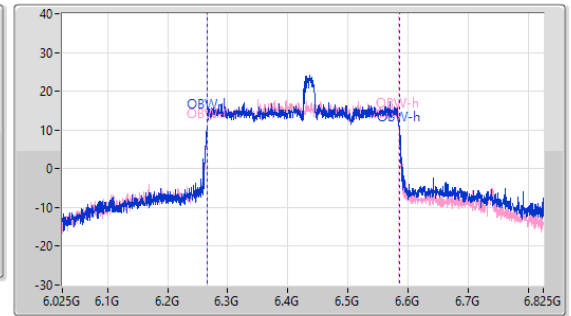
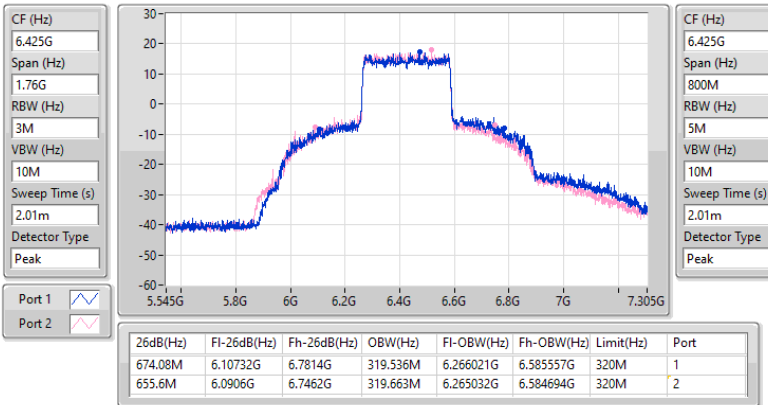


6.425-6.525GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

EBW

6585MHz

04/06/2025

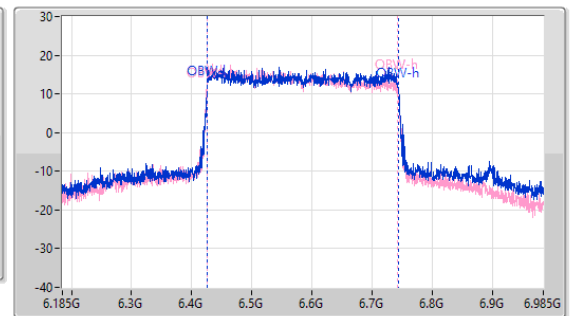
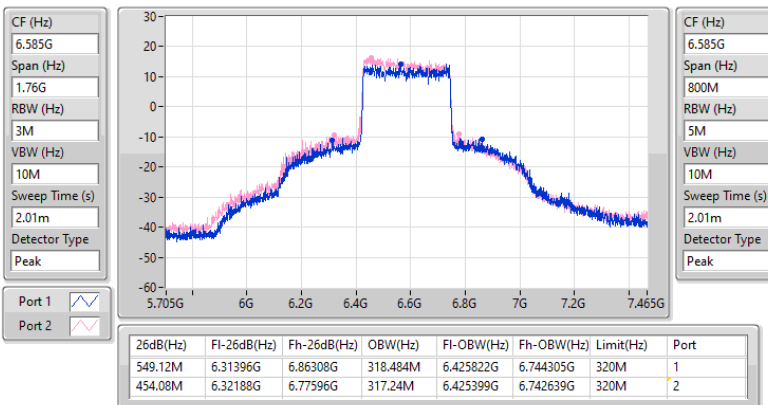


6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

EBW

6745MHz

04/06/2025

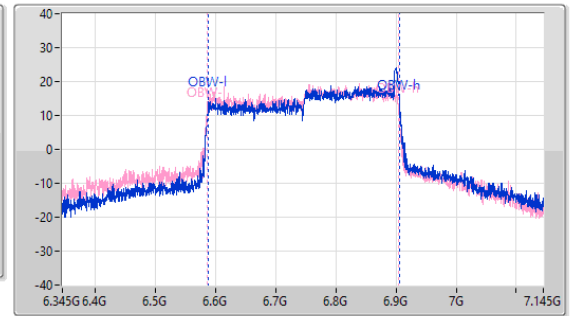
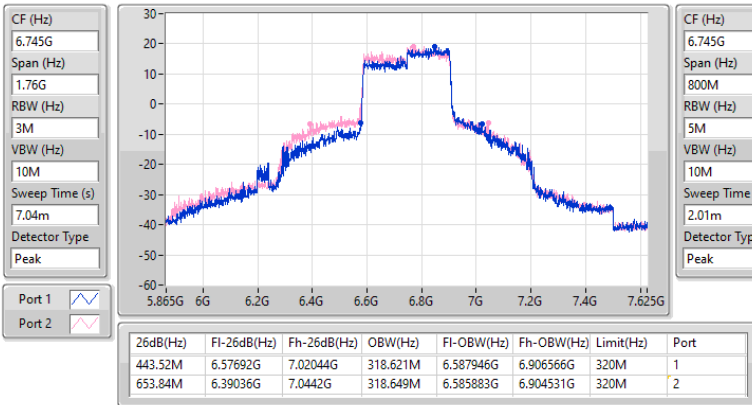


6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

EBW

6905MHz

04/06/2025

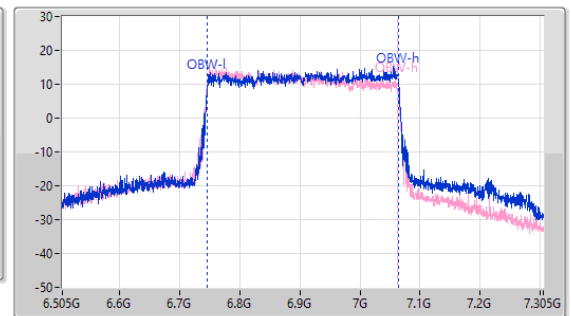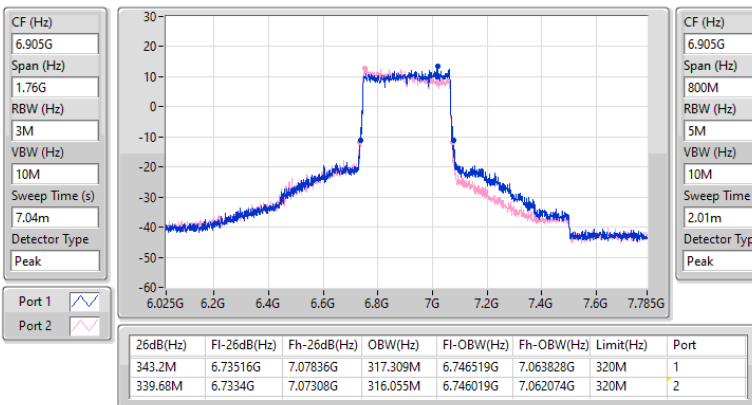

Summary

Mode	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	18.69	0.07396
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.14	0.13002
802.11be EHT80-BF_Nss1,(MCS0)_2TX	23.78	0.23878
802.11be EHT160-BF_Nss1,(MCS0)_2TX	26.47	0.44361
802.11be EHT320-BF_Nss1,(MCS0)_2TX	28.96	0.78705
6.425-6.525GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	18.16	0.06546
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.09	0.12853
802.11be EHT80-BF_Nss1,(MCS0)_2TX	23.51	0.22439
802.11be EHT160-BF_Nss1,(MCS0)_2TX	26.04	0.40179
802.11be EHT320-BF_Nss1,(MCS0)_2TX	26.93	0.49317
6.525-6.875GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	18.26	0.06699
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.01	0.12618
802.11be EHT80-BF_Nss1,(MCS0)_2TX	24.12	0.25823
802.11be EHT160-BF_Nss1,(MCS0)_2TX	26.67	0.46452
802.11be EHT320-BF_Nss1,(MCS0)_2TX	27.21	0.52602
6.875-7.125GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	18.24	0.06668
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.16	0.13062
802.11be EHT80-BF_Nss1,(MCS0)_2TX	23.03	0.20091
802.11be EHT160-BF_Nss1,(MCS0)_2TX	25.02	0.31769

Result

Mode	Result	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-
5955MHz	Pass	17.47	30.00
6195MHz	Pass	18.69	30.00
6415MHz	Pass	18.31	30.00
6435MHz	Pass	17.34	30.00
6475MHz	Pass	17.60	30.00
6515MHz	Pass	18.16	30.00
6535MHz	Pass	18.23	30.00
6695MHz	Pass	17.77	30.00
6875MHz	Pass	18.26	30.00
6895MHz	Pass	17.69	30.00
6995MHz	Pass	18.24	30.00
7095MHz	Pass	17.73	30.00
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-
5965MHz	Pass	21.12	30.00
6205MHz	Pass	21.14	30.00
6405MHz	Pass	20.86	30.00
6445MHz	Pass	21.09	30.00
6485MHz	Pass	20.73	30.00
6525MHz	Pass	20.99	30.00
6565MHz	Pass	20.99	30.00
6685MHz	Pass	20.22	30.00
6885MHz	Pass	21.01	30.00
6925MHz	Pass	20.85	30.00
7005MHz	Pass	20.05	30.00
7085MHz	Pass	21.16	30.00
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-
5985MHz	Pass	23.43	30.00
6225MHz	Pass	23.57	30.00
6385MHz	Pass	23.78	30.00
6465MHz	Pass	23.48	30.00
6545MHz	Pass	23.51	30.00
6625MHz	Pass	23.15	30.00
6705MHz	Pass	23.54	30.00
6785MHz	Pass	24.12	30.00
6865MHz	Pass	24.06	30.00
6945MHz	Pass	23.03	30.00
7025MHz	Pass	22.85	30.00
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-
6025MHz	Pass	26.24	30.00
6185MHz	Pass	26.27	30.00
6345MHz	Pass	26.47	30.00
6505MHz	Pass	26.04	30.00
6665MHz	Pass	26.26	30.00
6825MHz	Pass	26.67	30.00
6985MHz	Pass	25.02	30.00
802.11be EHT320-BF_Nss1,(MCS0)_2TX	-	-	-
6105MHz	Pass	27.86	30.00
6265MHz	Pass	28.16	30.00
6425MHz	Pass	28.96	30.00
6585MHz	Pass	26.93	30.00
6745MHz	Pass	27.21	30.00
6905MHz	Pass	25.68	30.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

29/05/2025

EIRP;Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:5955MHz;TX

CF Freq
5.955GHz

Span
50MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
20MHz

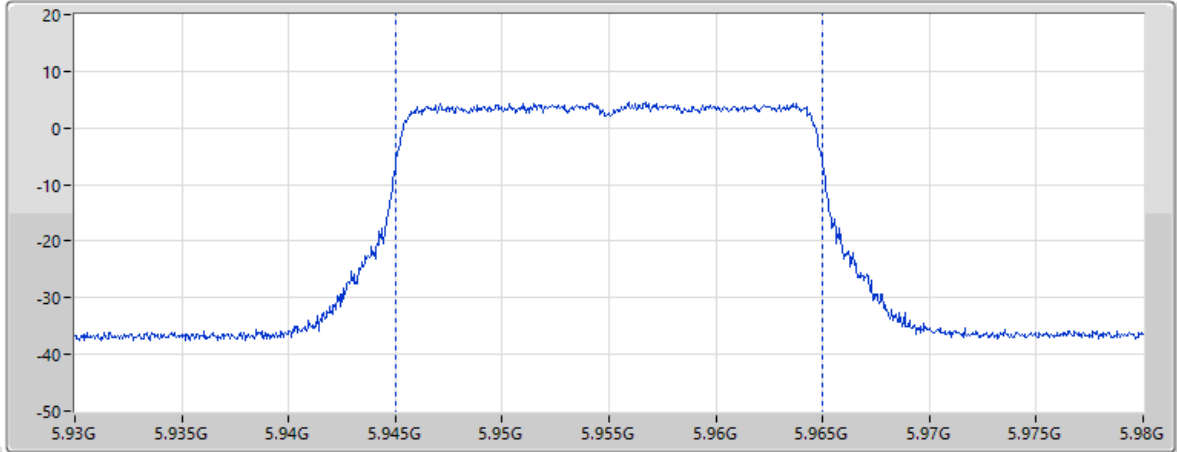

Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
17.47				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-4.51	10.59	7.47	32.44	57.54

29/05/2025

EIRP;Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6195MHz;TX

CF Freq
6.195GHz

Span
50MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
20MHz

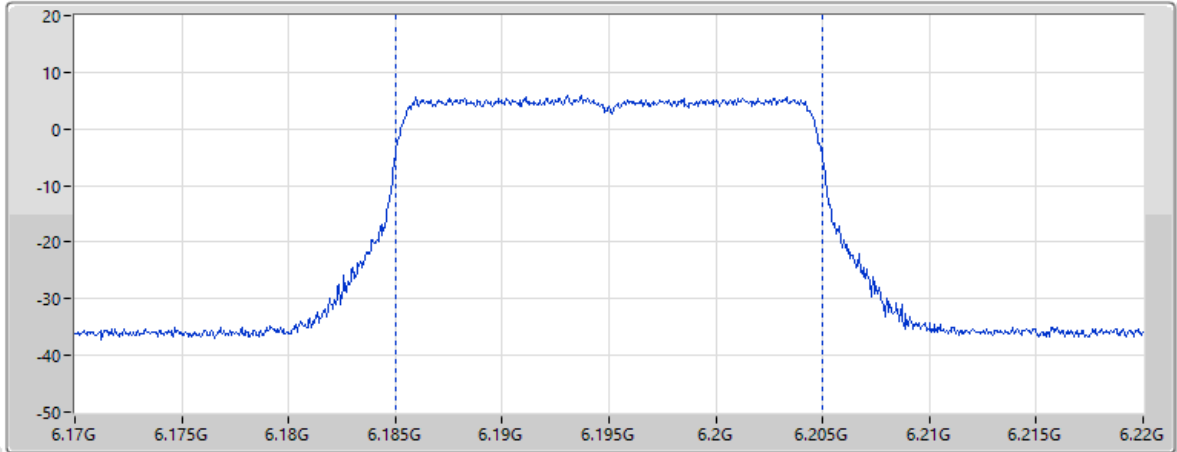


Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
18.69				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-3.66	10.70	7.59	32.42	57.88


02/06/2025

EIRP:Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6415MHz;TX

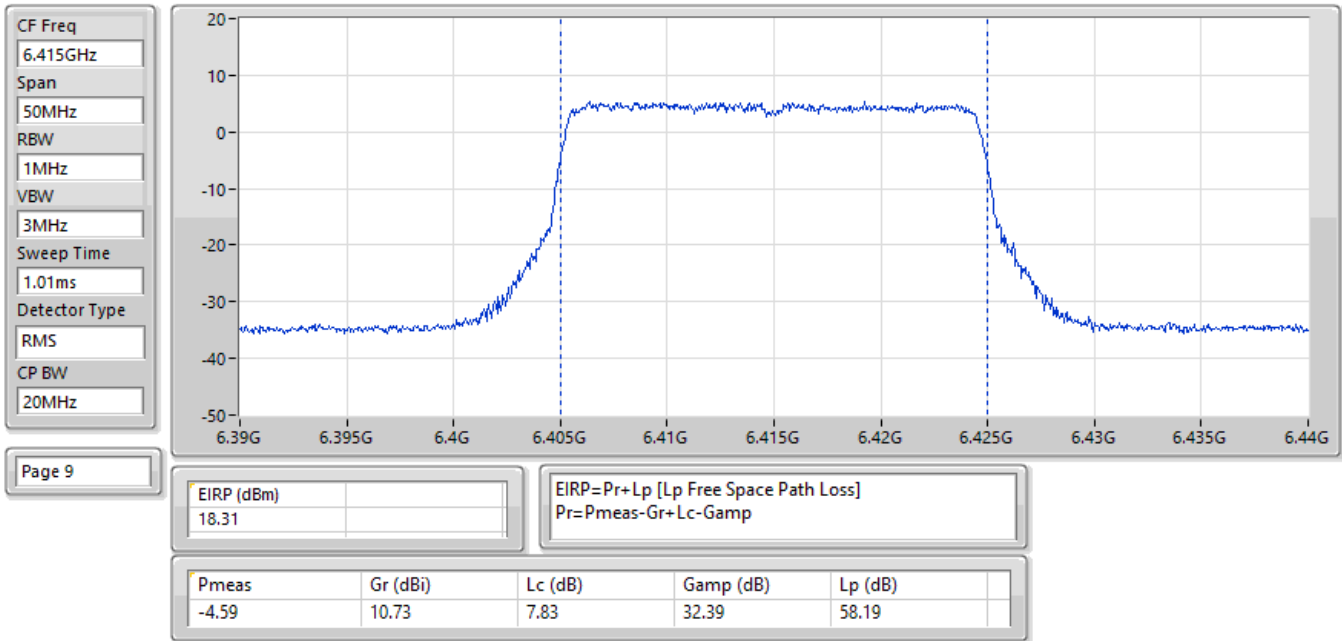


29/05/2025

EIRP:Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6435MHz;TX

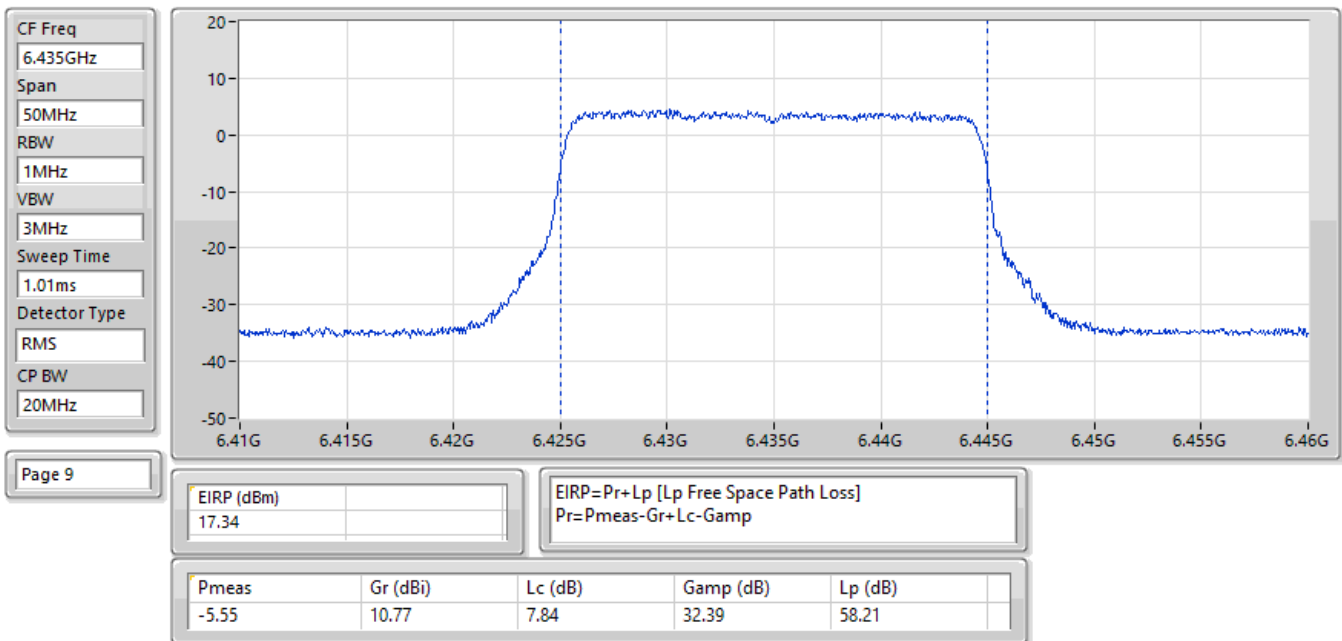


29/05/2025

EIRP:Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6475MHz;TX

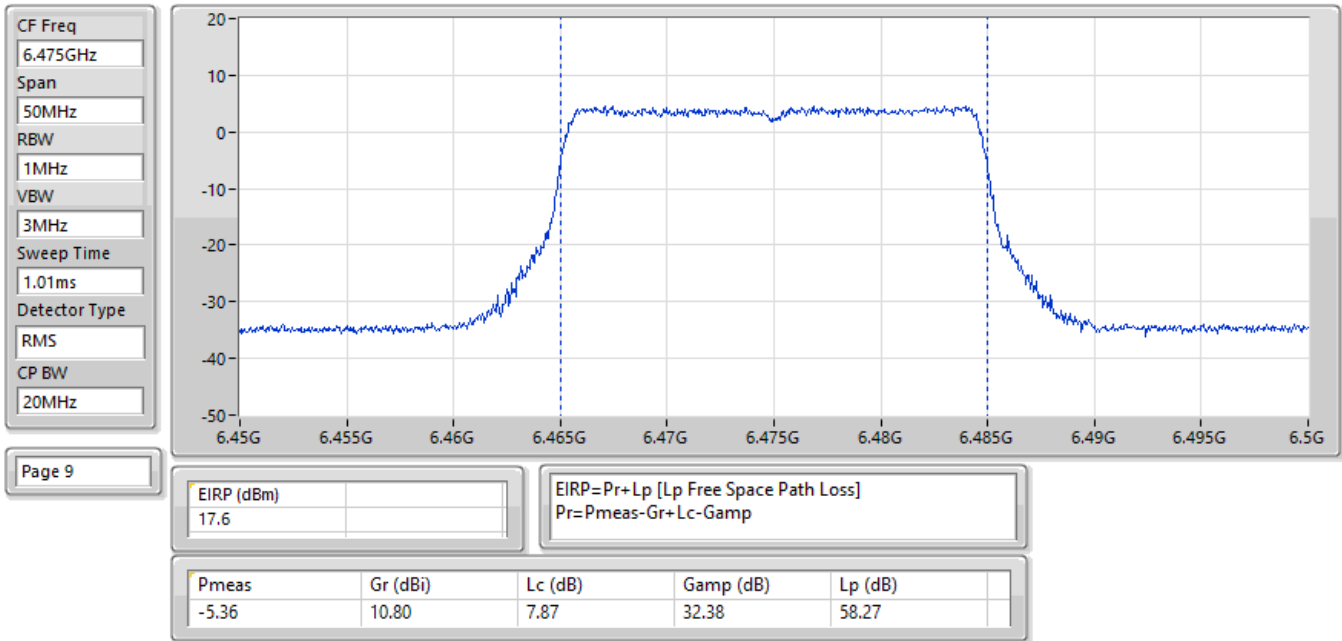


29/05/2025

EIRP:Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6515MHz;TX

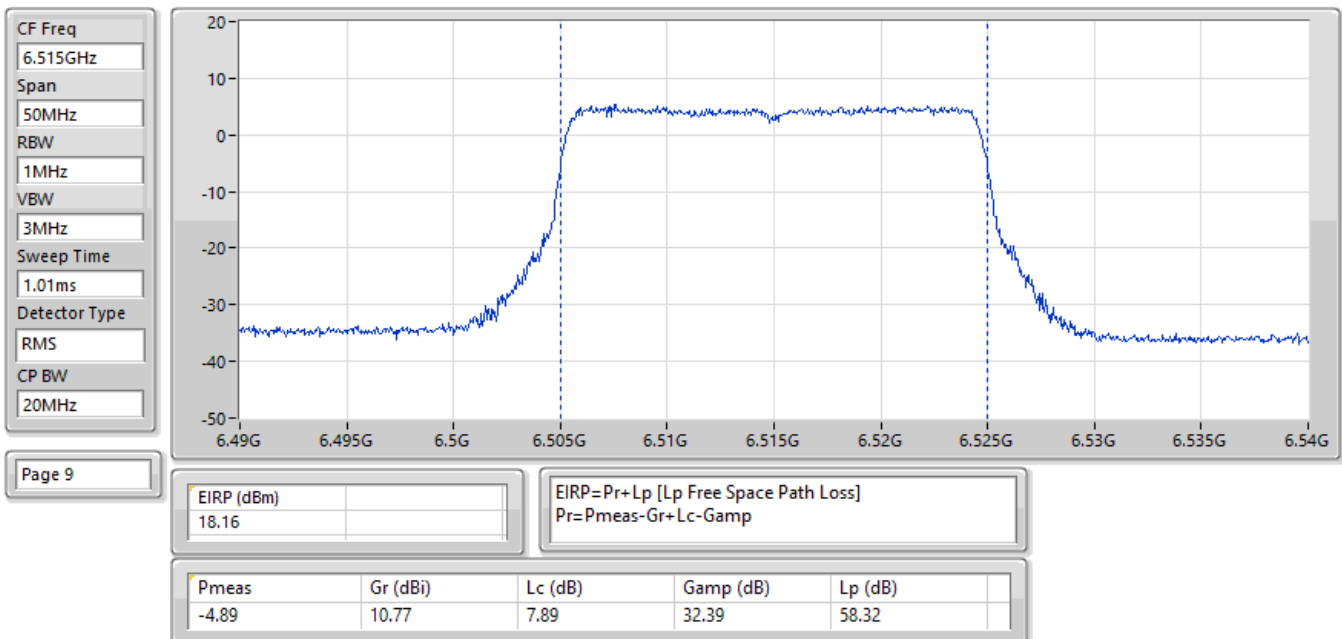


29/05/2025

EIRP:Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6535MHz;TX

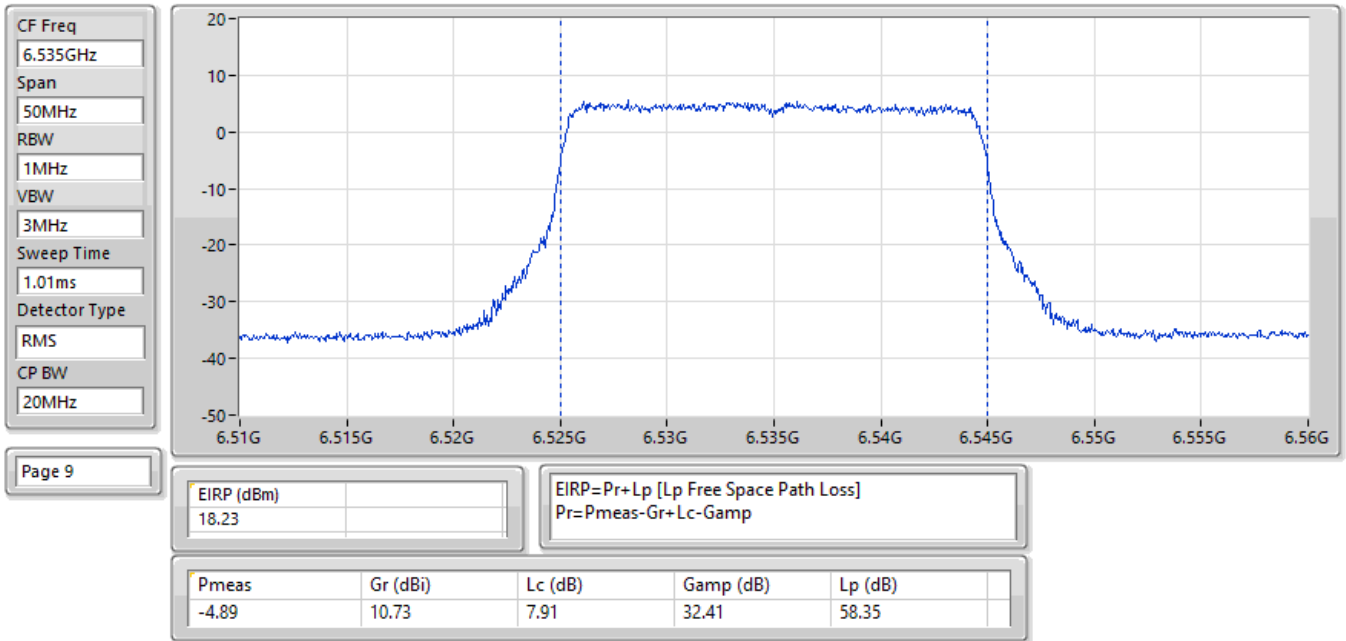


29/05/2025

EIRP:Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6695MHz;TX

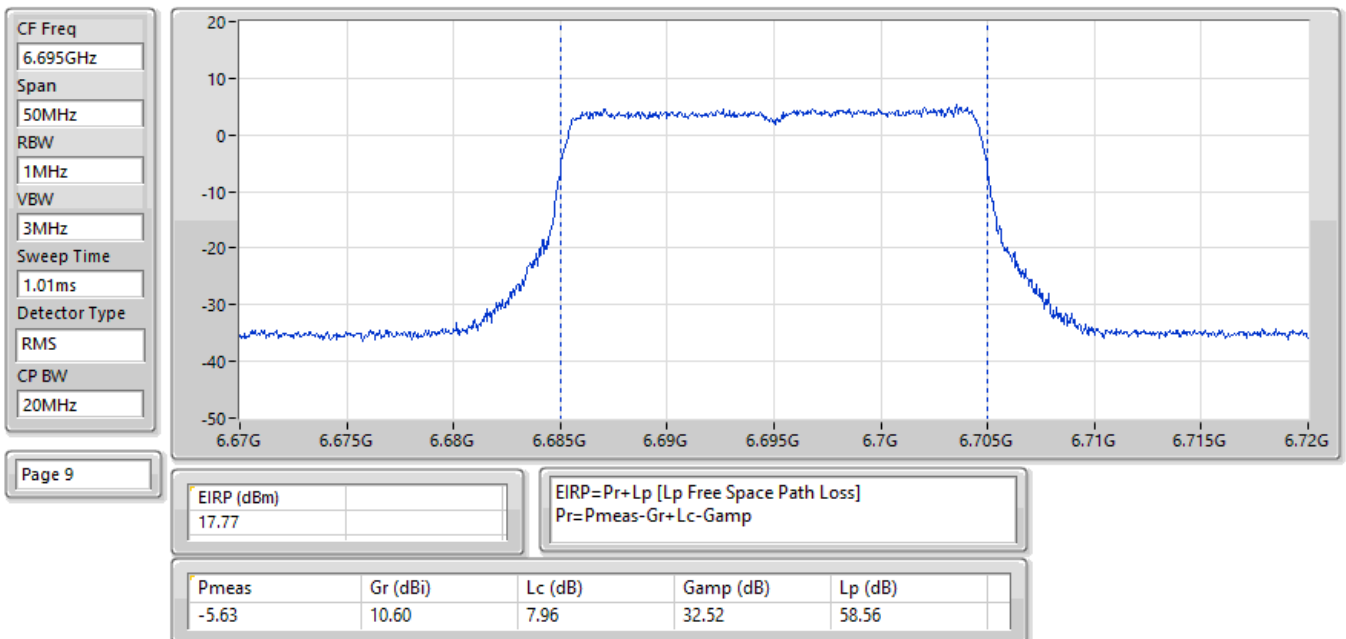


29/05/2025

EIRP:Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6875MHz;TX

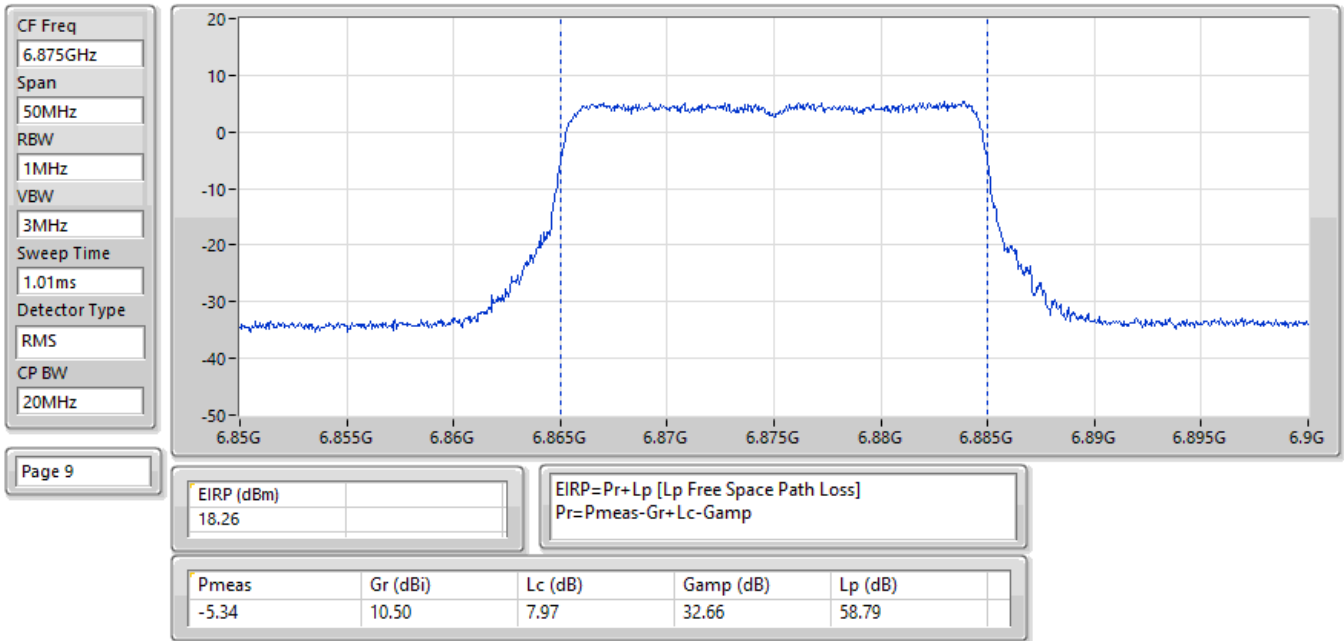


29/05/2025

EIRP:Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6895MHz;TX

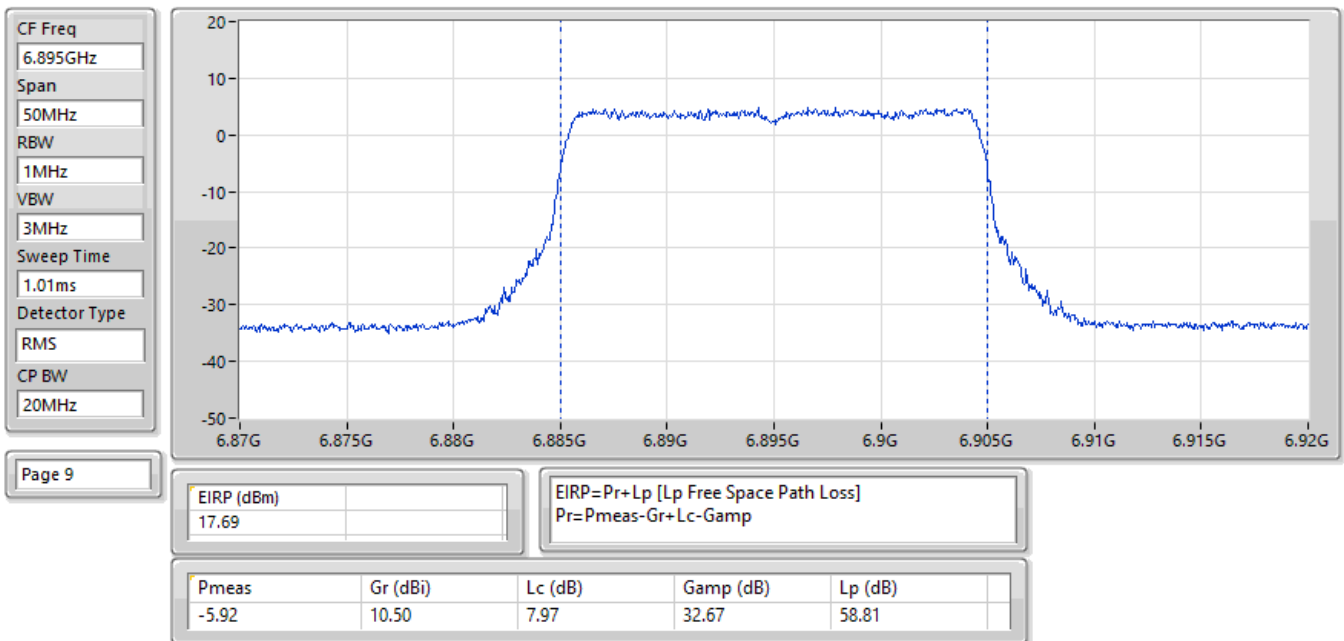


29/05/2025

EIRP:Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6995MHz;TX

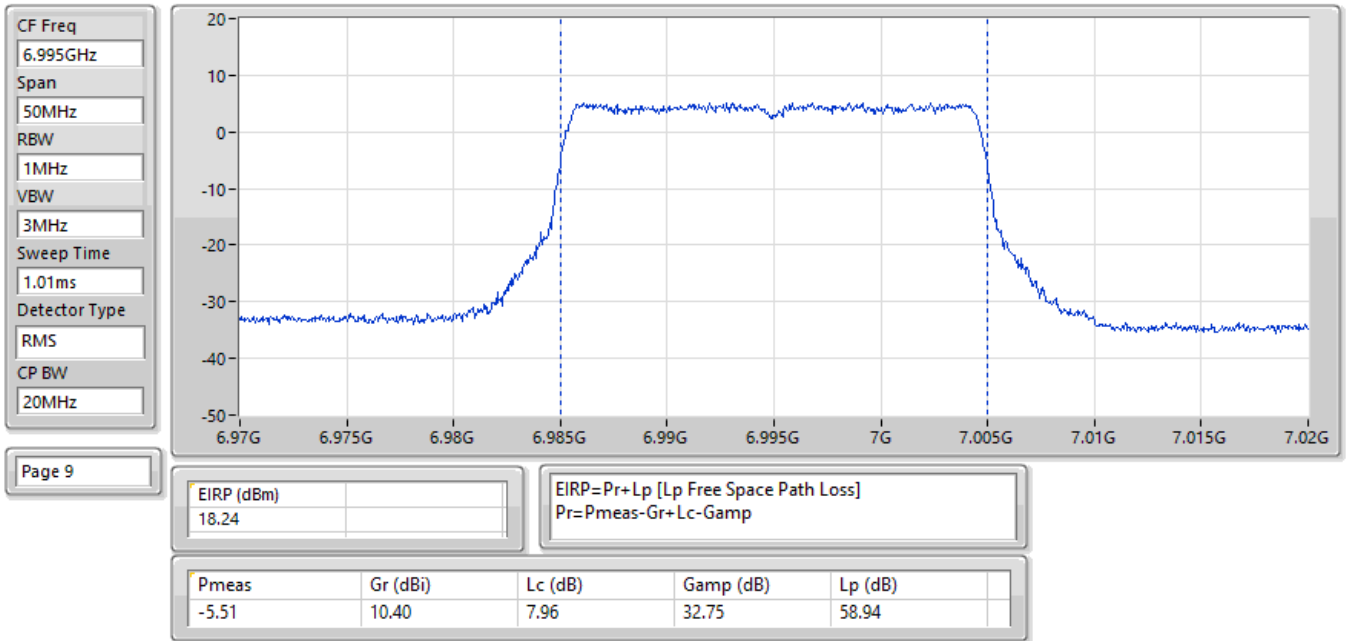


29/05/2025

EIRP:Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:7095MHz;TX

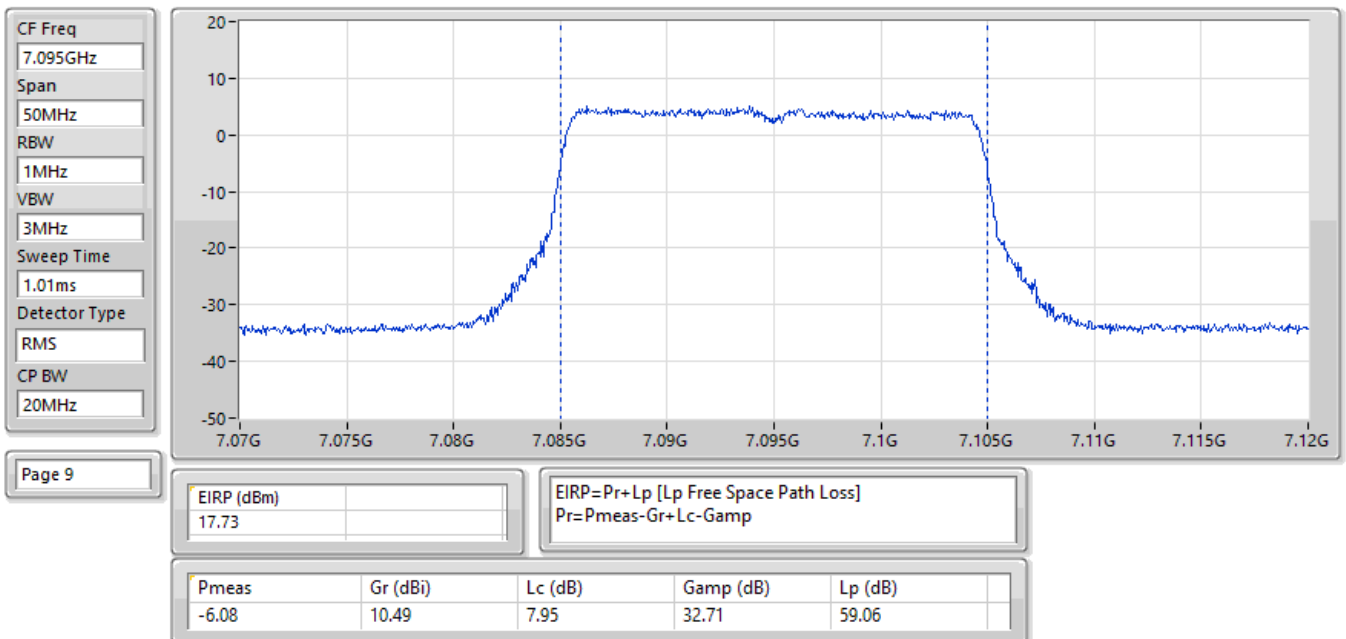


29/05/2025

EIRP:Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:5965MHz;TX

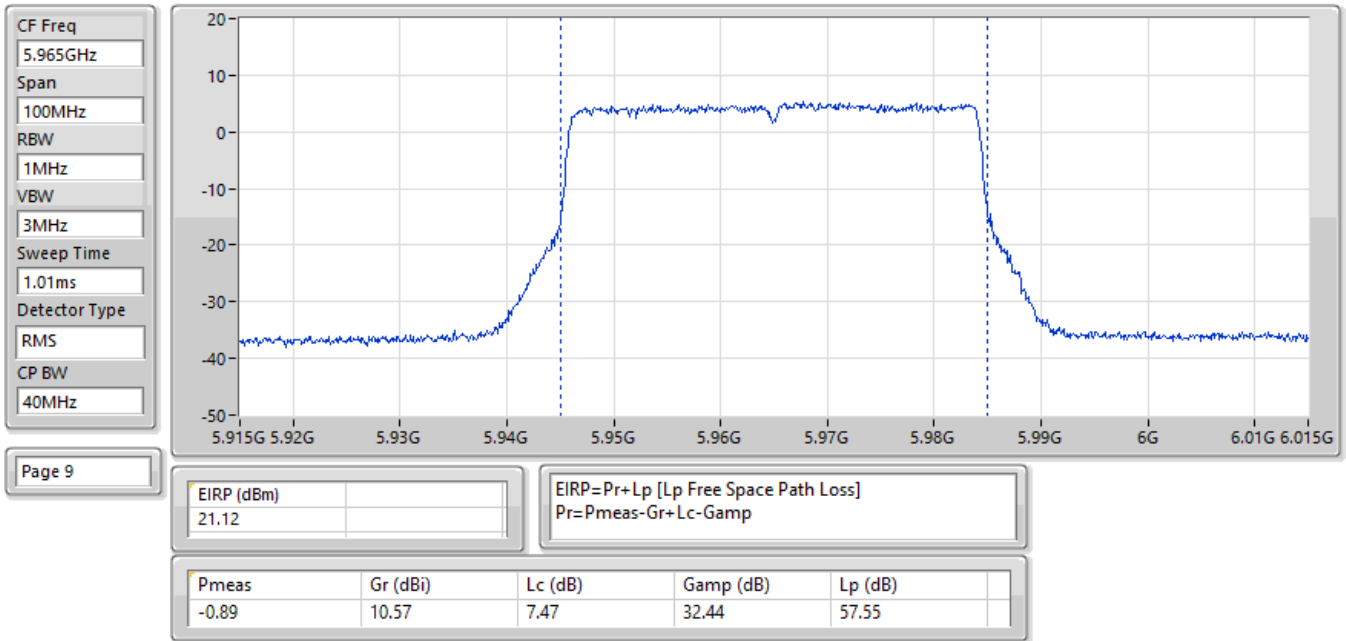


29/05/2025

EIRP:Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6205MHz;TX

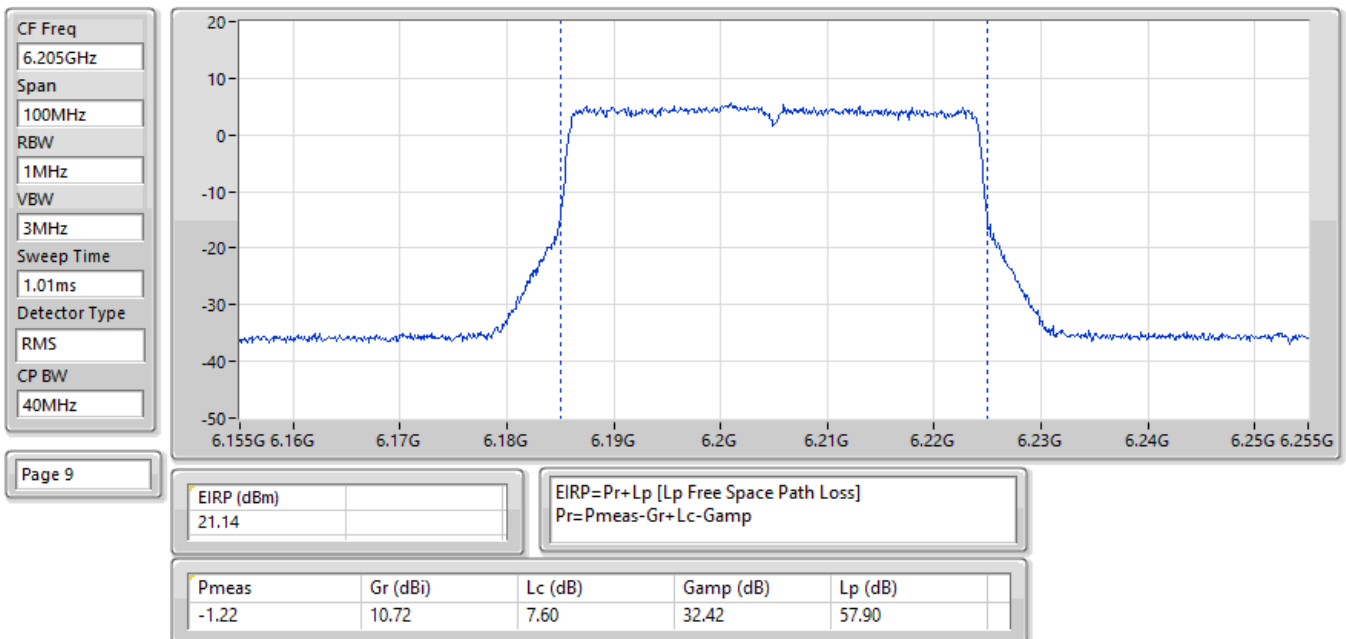


04/06/2025

EIRP:Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6405MHz;TX

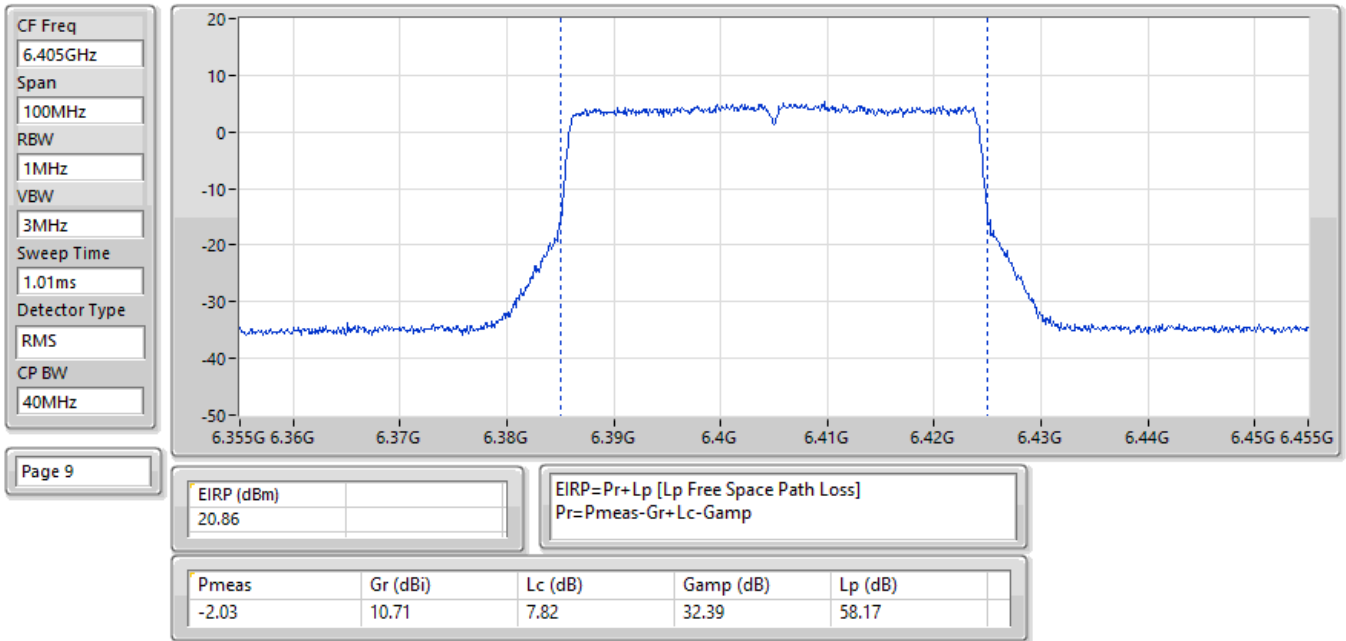


29/05/2025

EIRP:Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6445MHz;TX

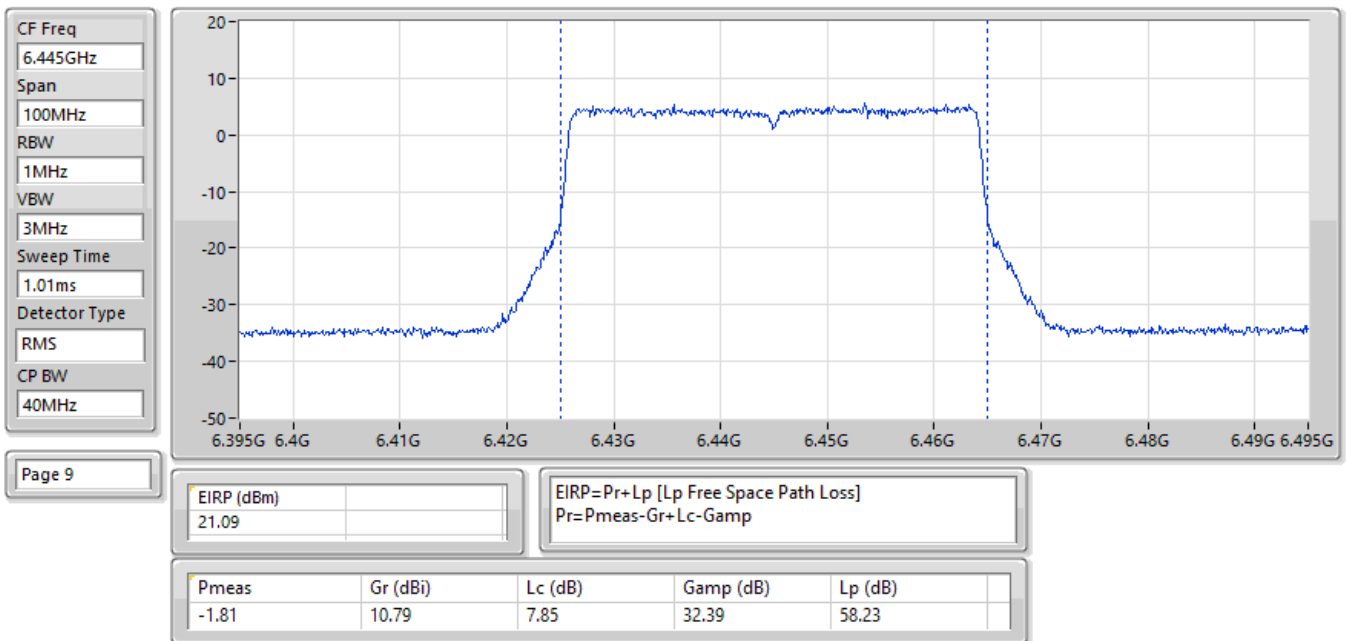


29/05/2025

EIRP:Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6485MHz;TX

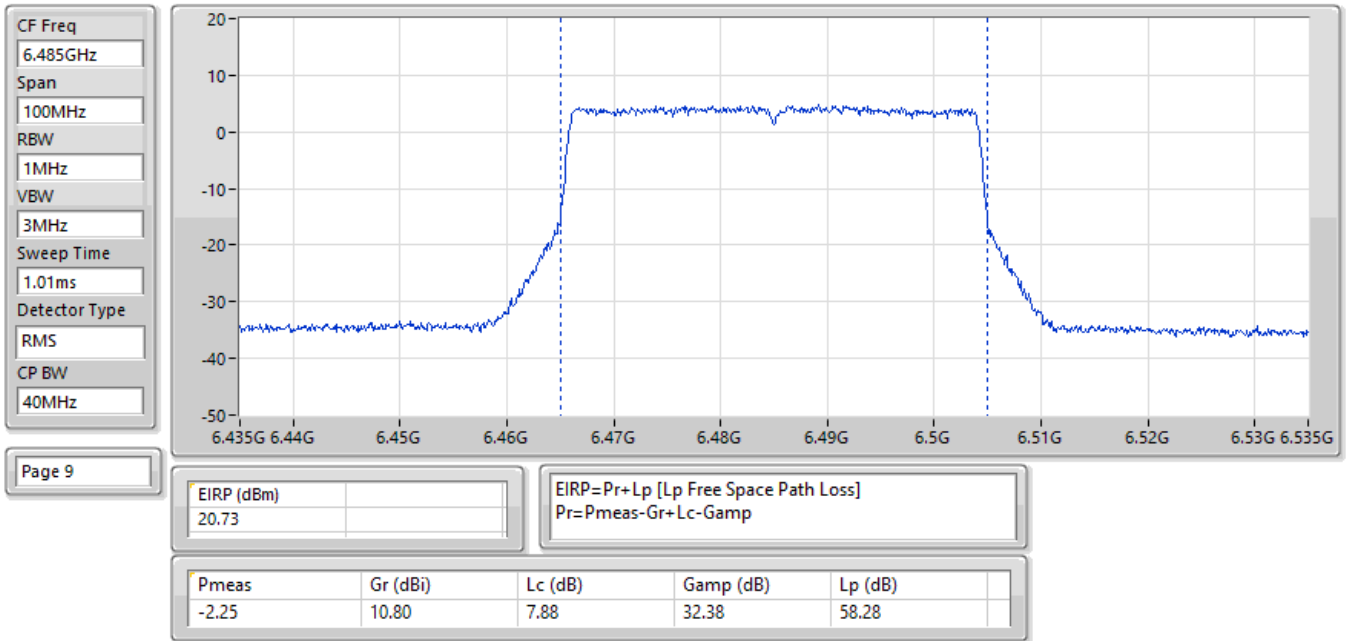


29/05/2025

EIRP:Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6525MHz;TX

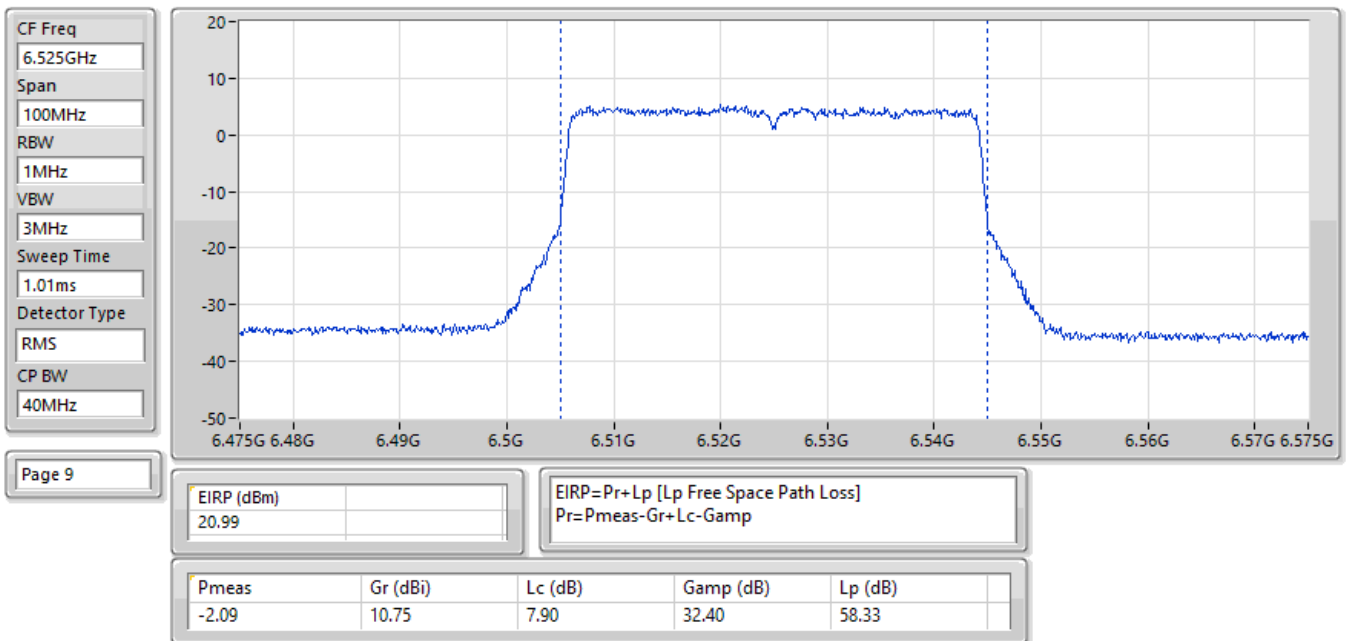


29/05/2025

EIRP:Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6565MHz;TX

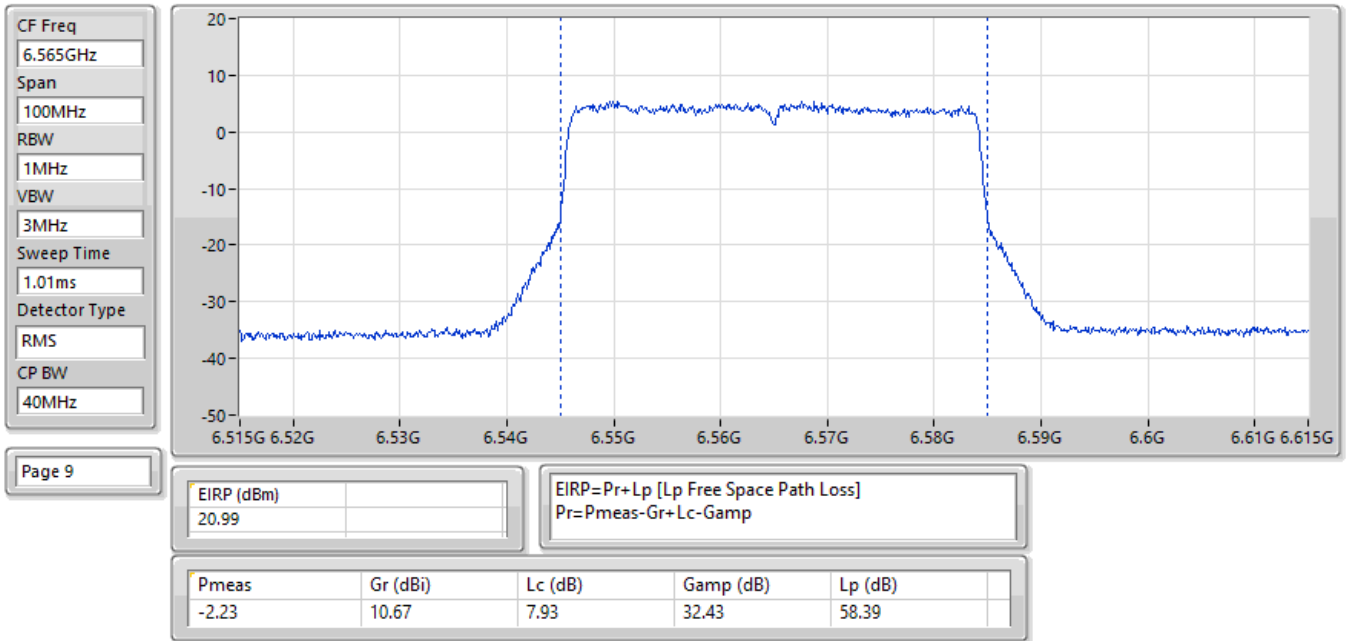


29/05/2025

EIRP:Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6685MHz;TX

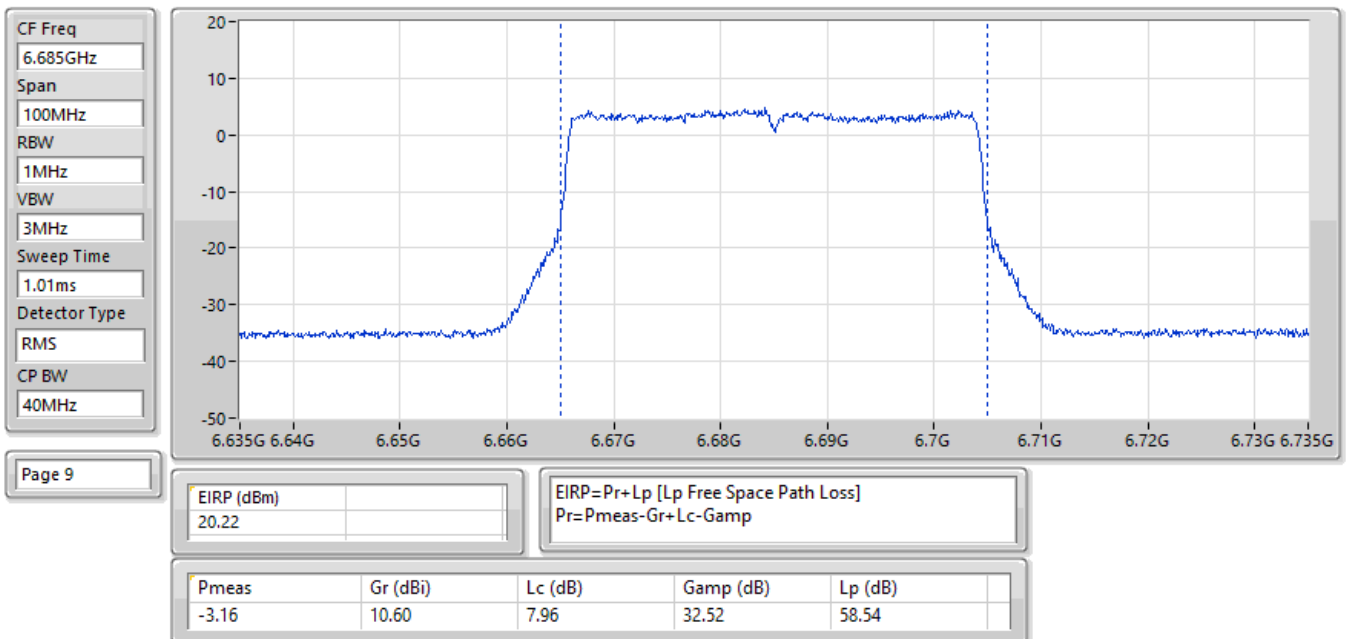


04/06/2025

EIRP:Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6885MHz;TX

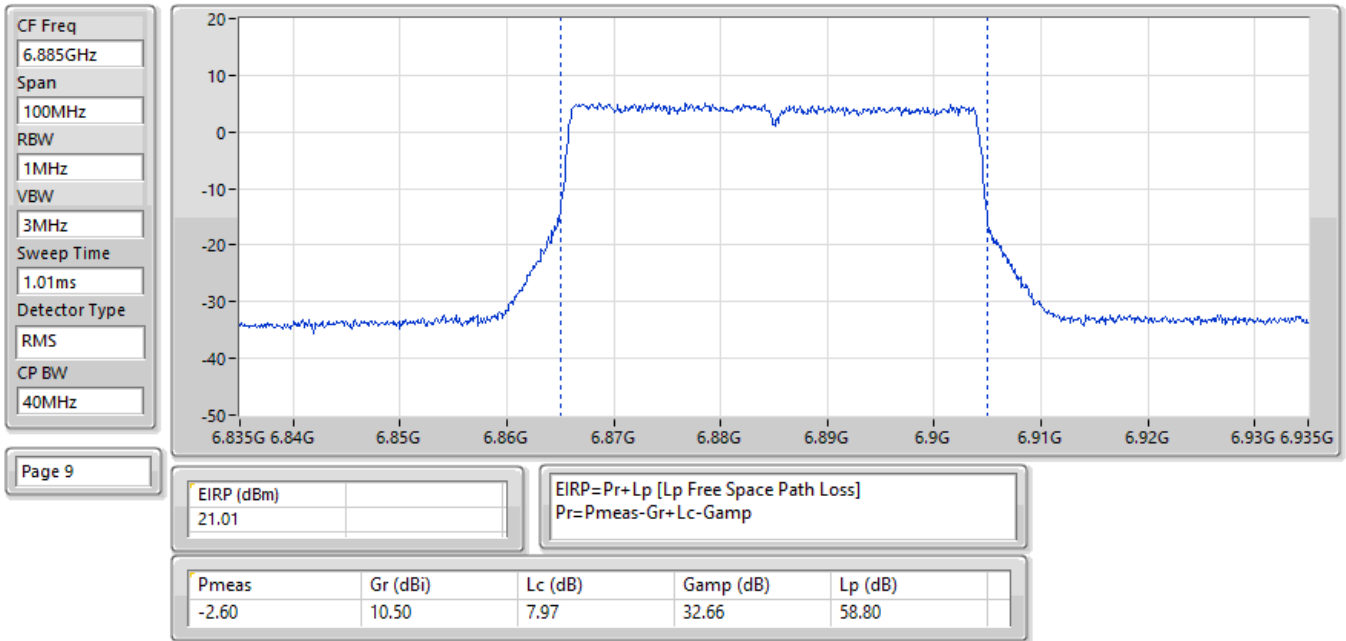


29/05/2025

EIRP:Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6925MHz;TX

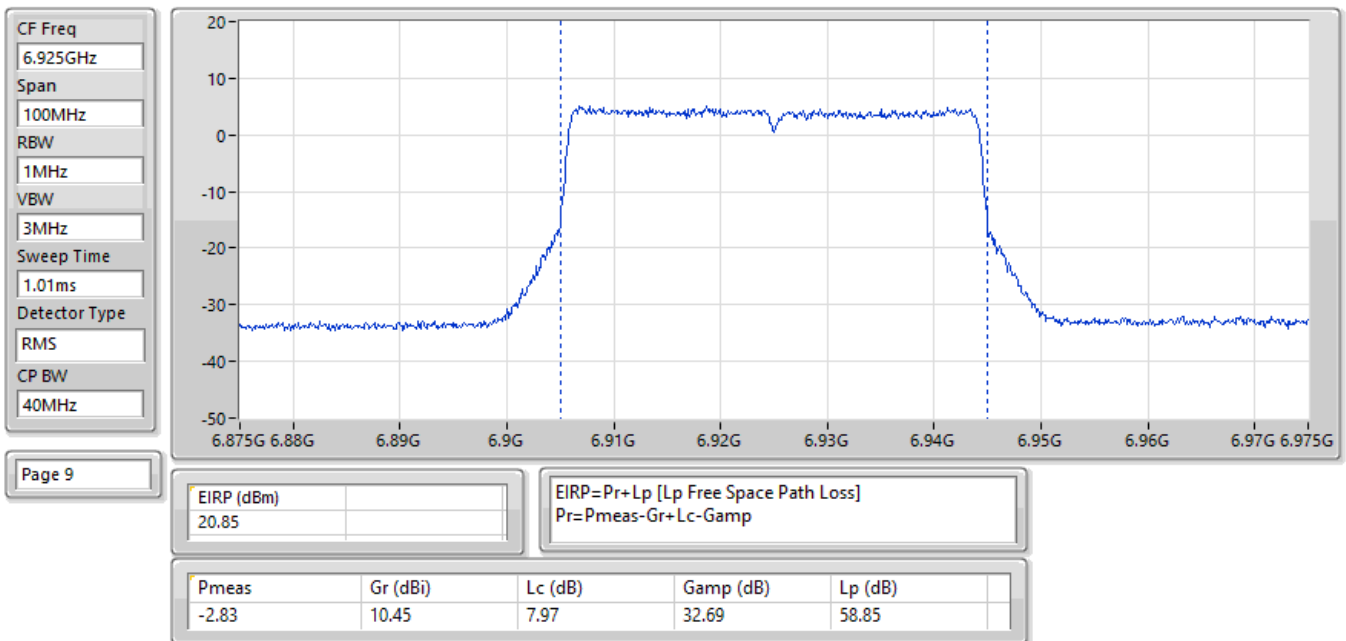


29/05/2025

EIRP:Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:7005MHz;TX

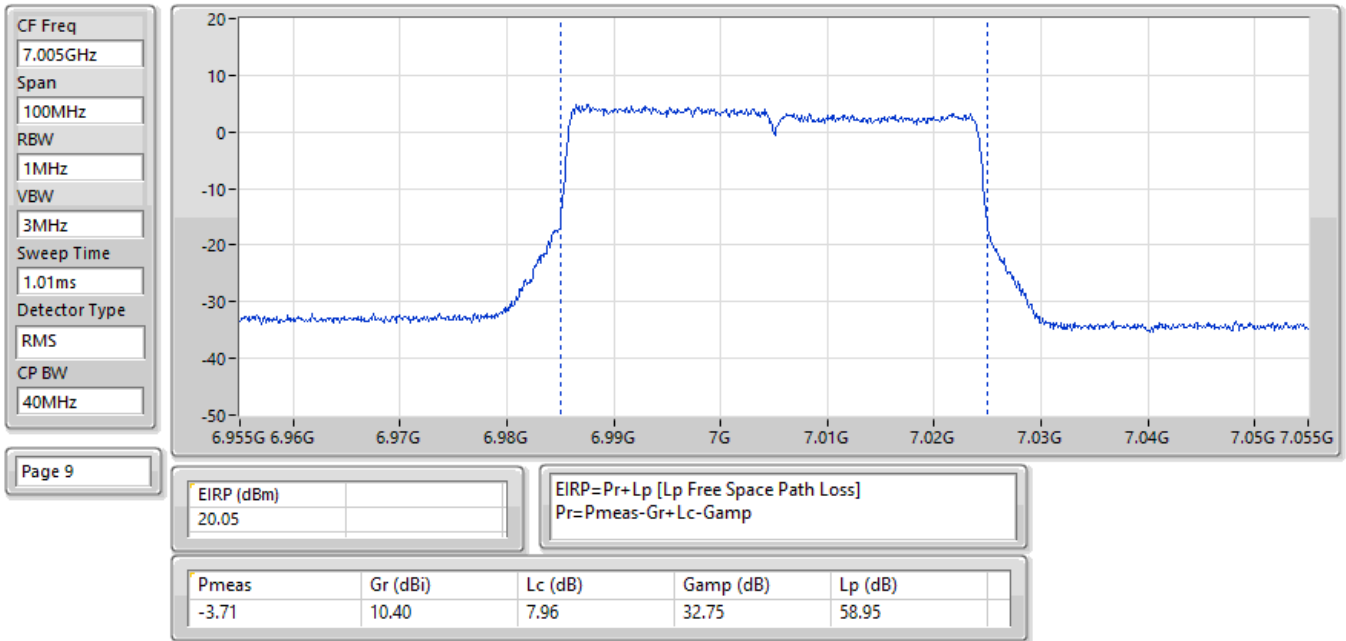


29/05/2025

EIRP:Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:7085MHz;TX

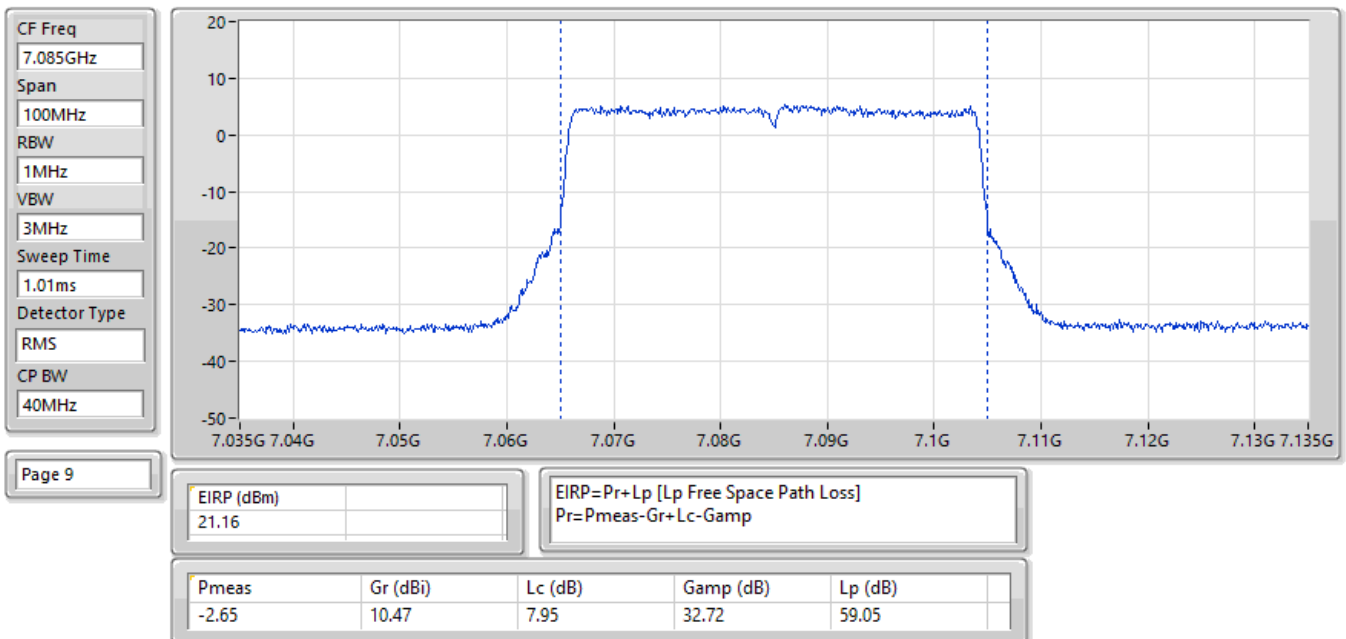


02/06/2025

EIRP:Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:5985MHz;TX

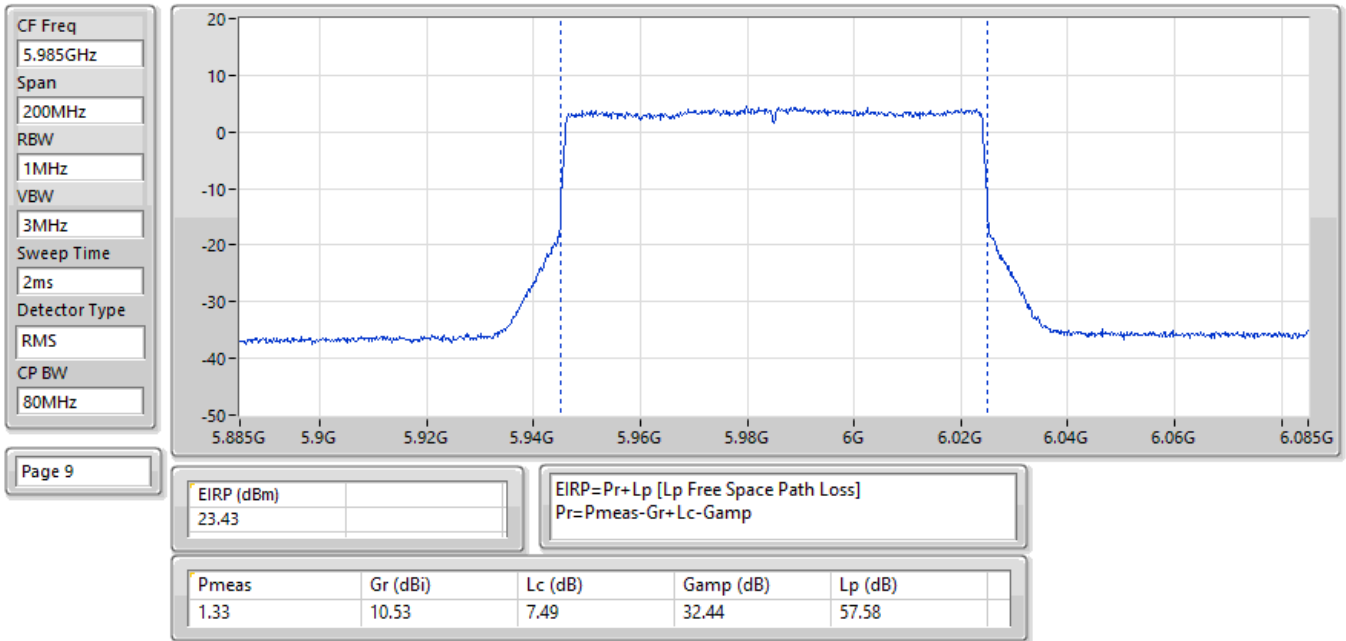


02/06/2025

EIRP:Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6225MHz;TX

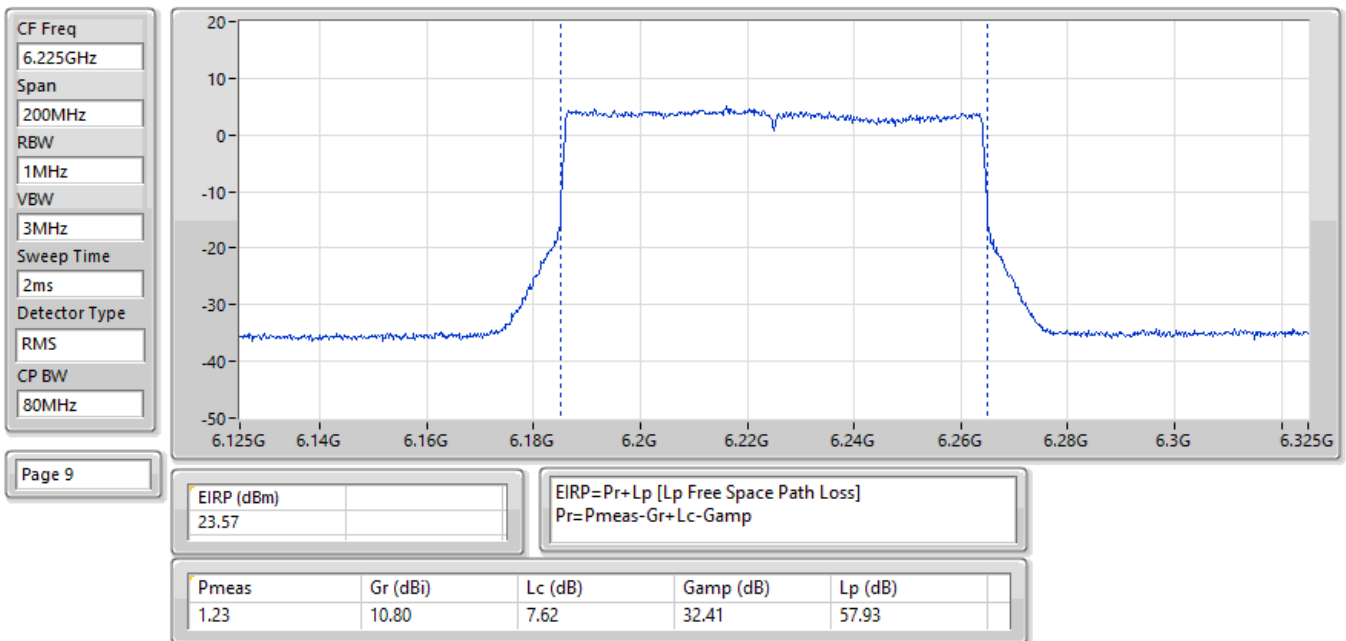


02/06/2025

EIRP:Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6385MHz;TX

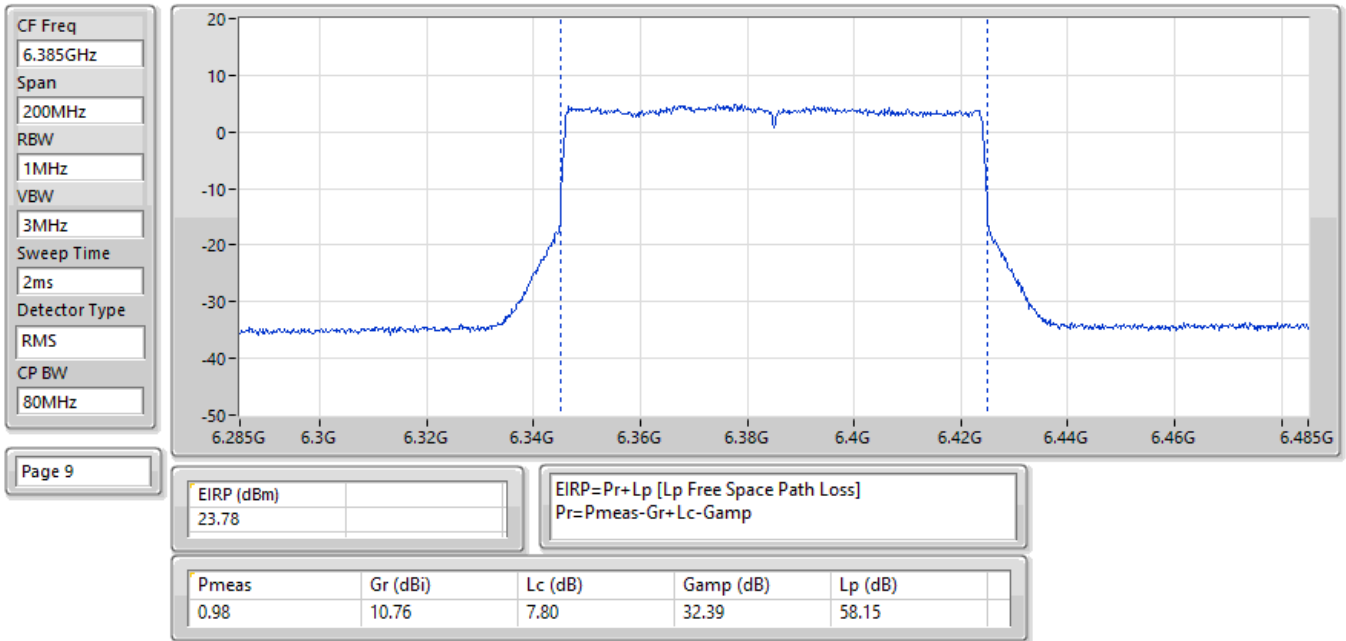


02/06/2025

EIRP:Band:6.4G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6465MHz;TX

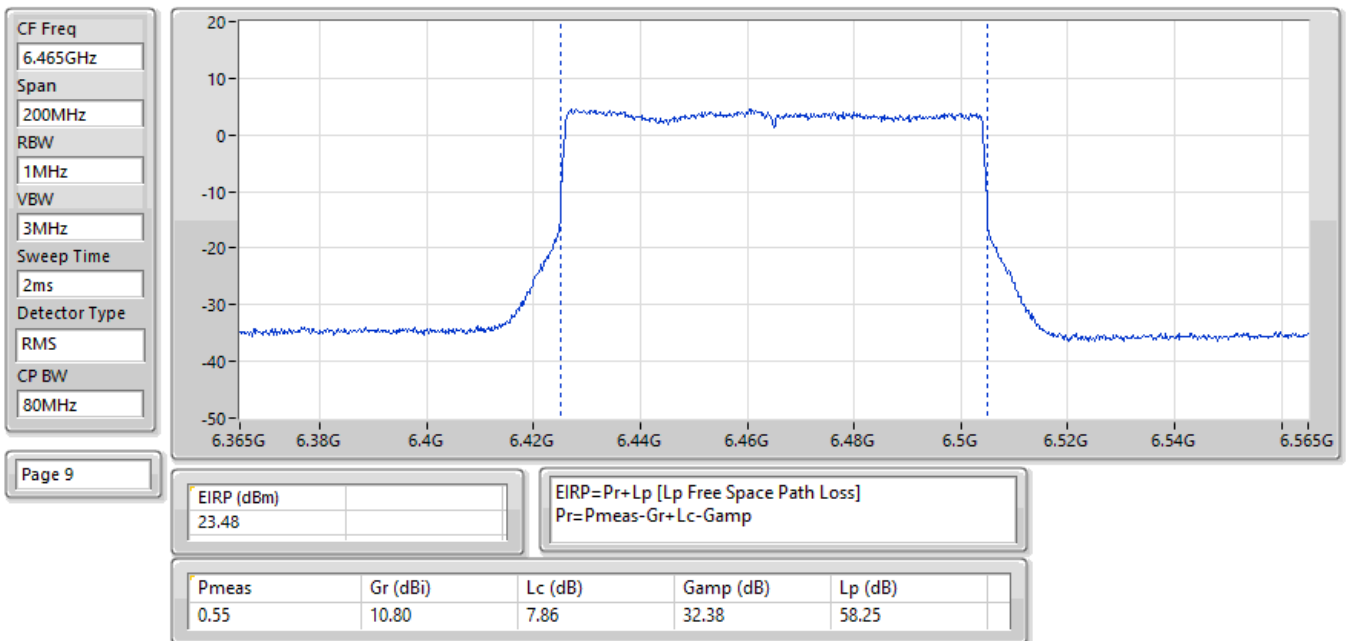


02/06/2025

EIRP:Band:6.4G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6545MHz;TX

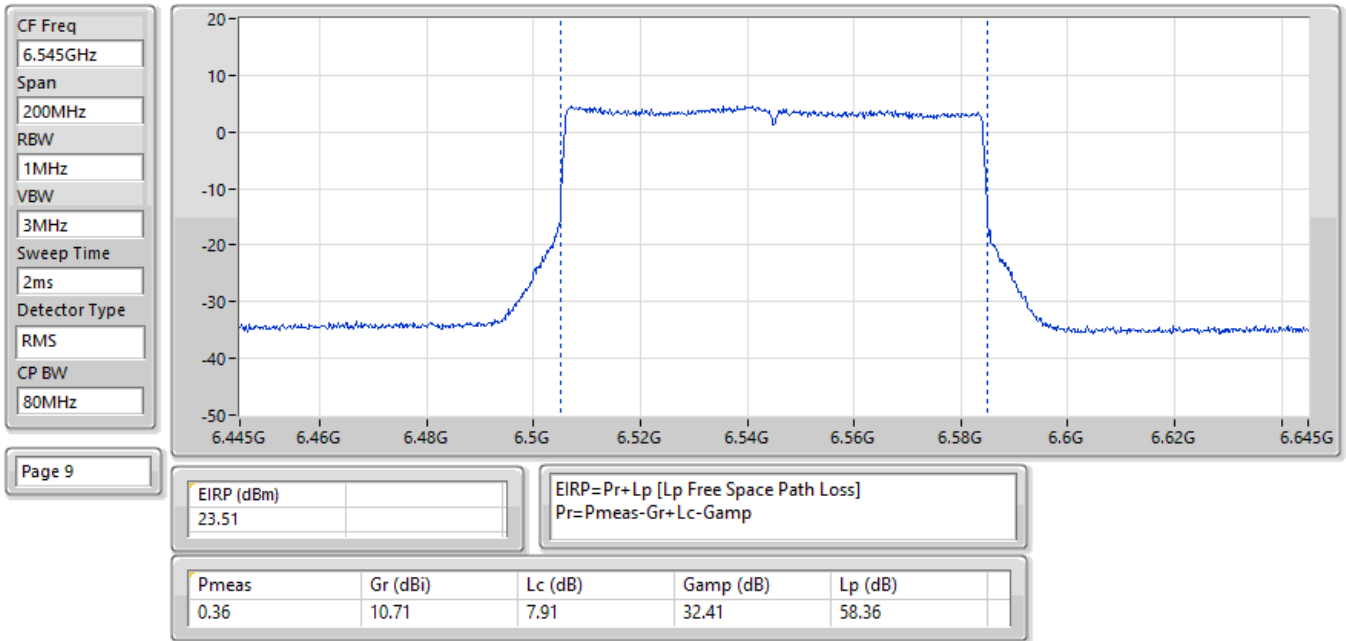


02/06/2025

EIRP:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6625MHz;TX

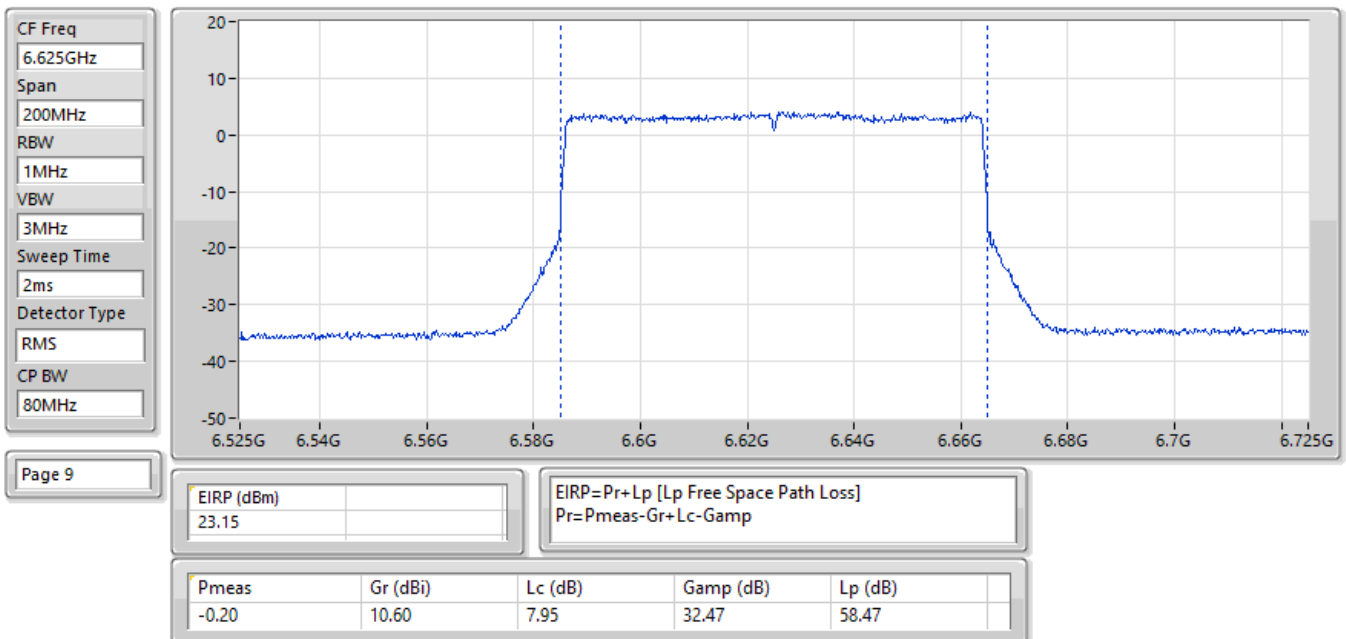


02/06/2025

EIRP:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6705MHz;TX

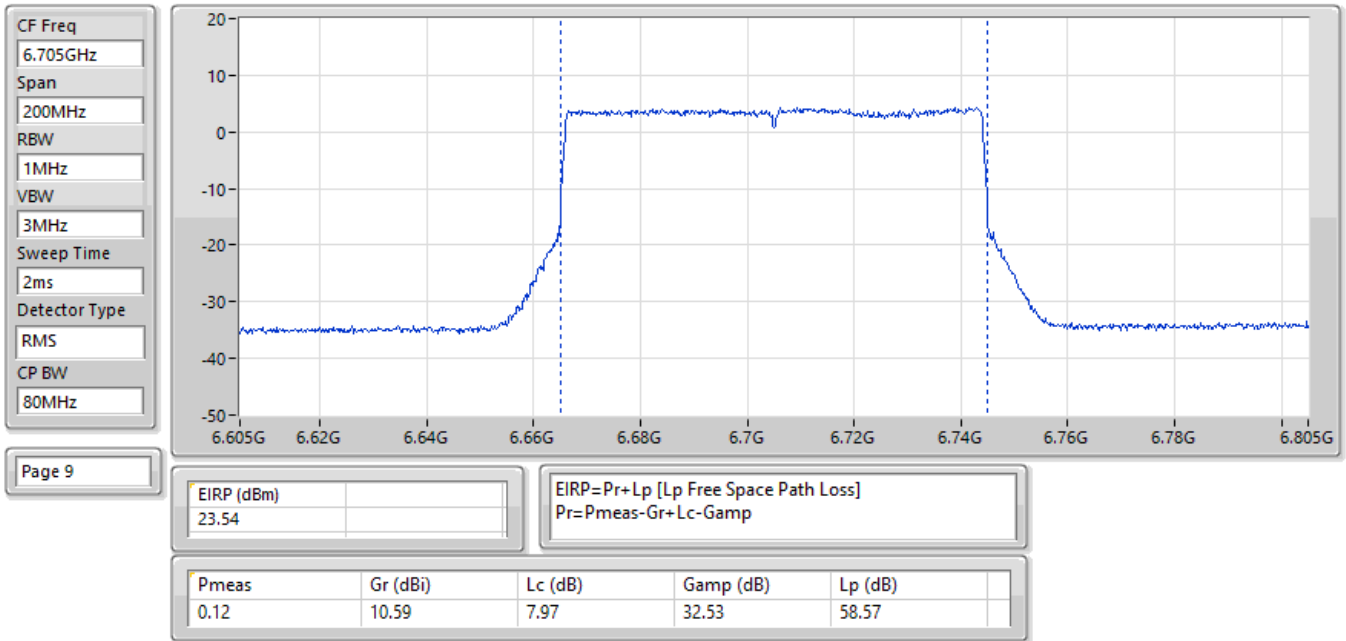


02/06/2025

EIRP:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6785MHz;TX

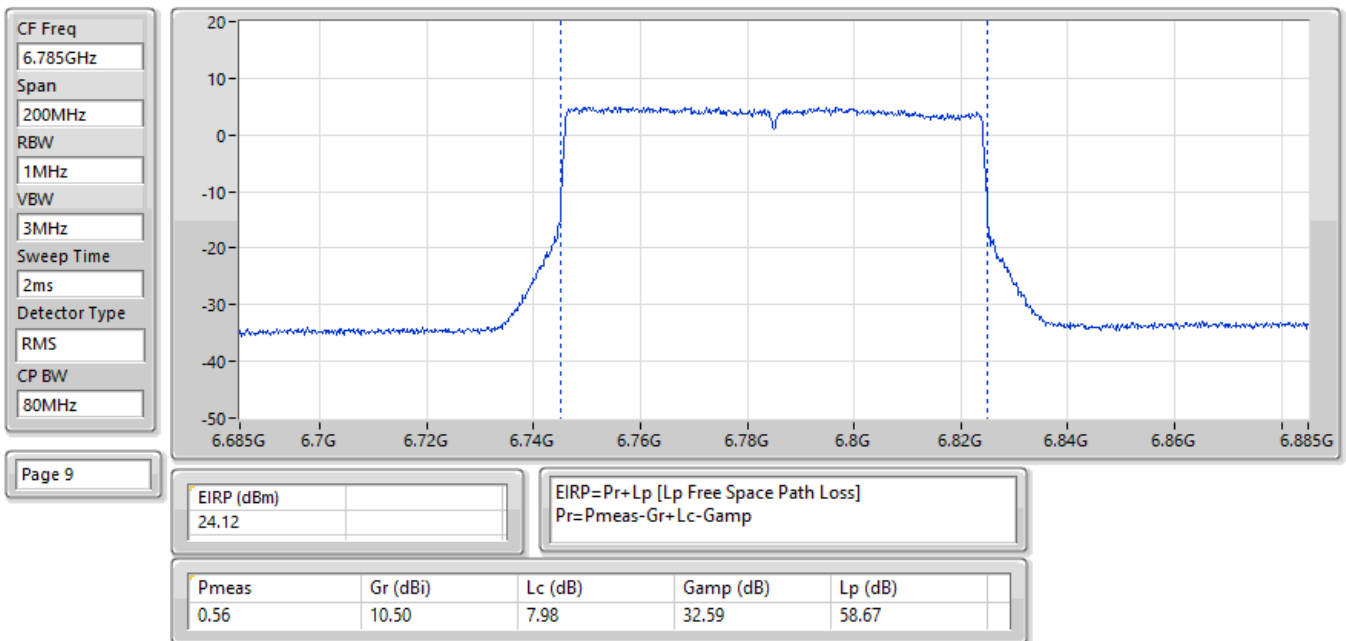


02/06/2025

EIRP:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6865MHz;TX

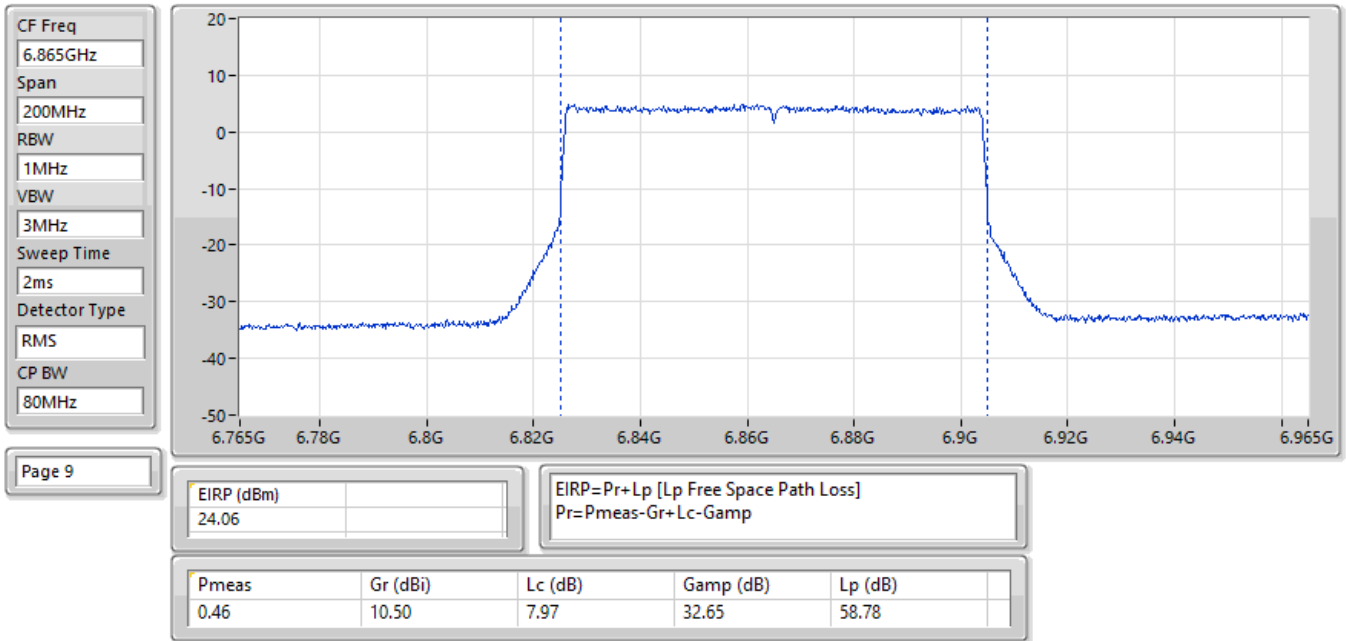

02/06/2025

EIRP:Band:7.0G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6945MHz;TX

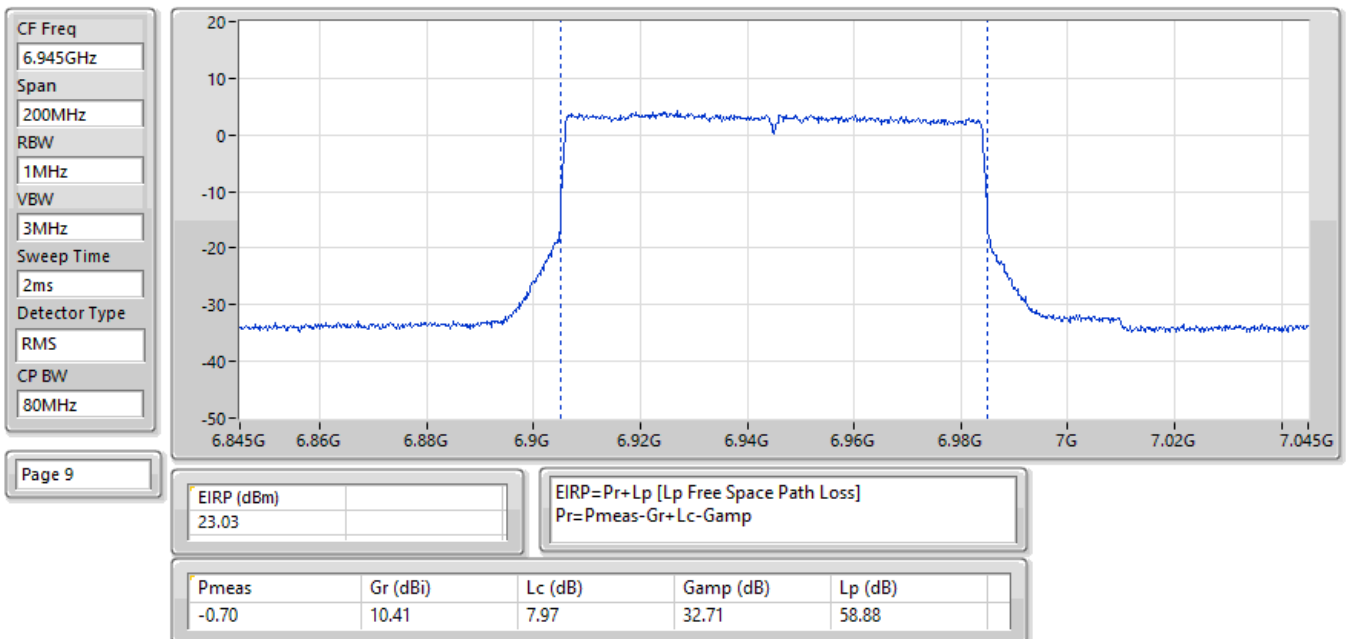

02/06/2025

EIRP;Band:7.0G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:7025MHz;TX

CF Freq
7.025GHz

Span
200MHz


RBW
1MHz

VBW
3MHz

Sweep Time
2ms

Detector Type
RMS

CP BW
80MHz

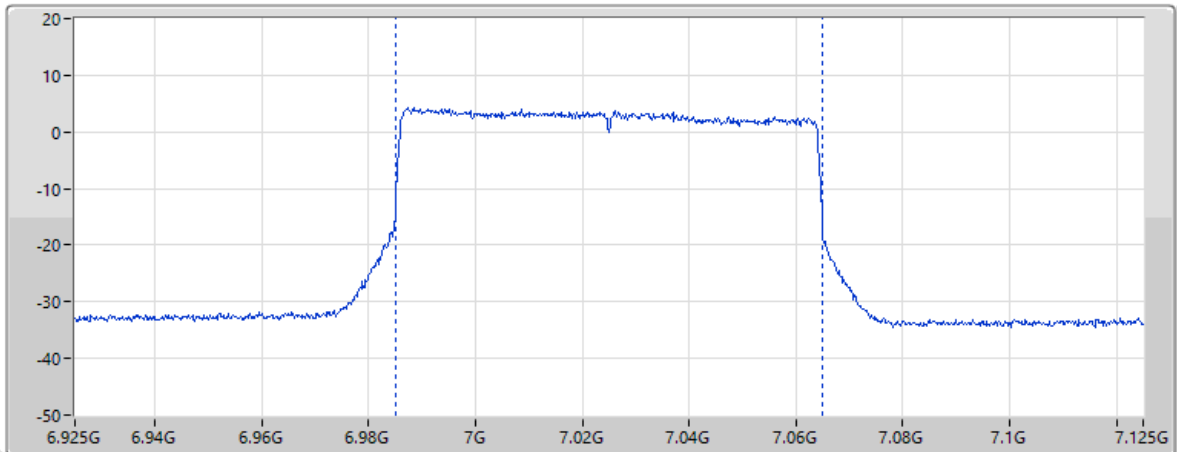

Page 9

EIRP (dBm)
22.85

EIRP=Pr+Lp [Lp Free Space Path Loss]
Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-0.95	10.40	7.96	32.74	58.98

02/06/2025

EIRP;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6025MHz;TX

CF Freq
6.025GHz

Span
400MHz


RBW
1MHz

VBW
3MHz

Sweep Time
4ms

Detector Type
RMS

CP BW
160MHz

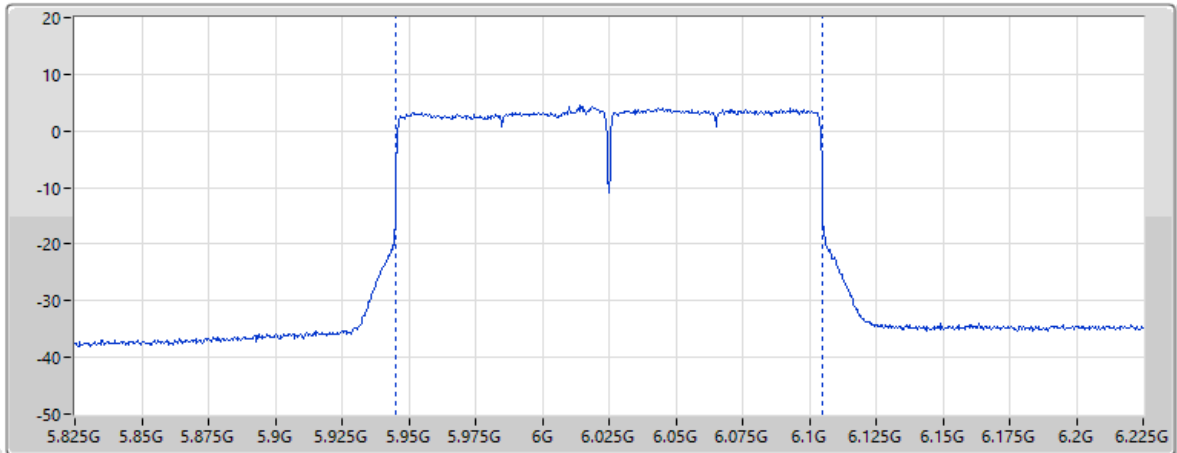

Page 9


EIRP (dBm)
26.24

EIRP=Pr+Lp [Lp Free Space Path Loss]
Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
4.03	10.50	7.51	32.44	57.64


02/06/2025

EIRP;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6185MHz;TX

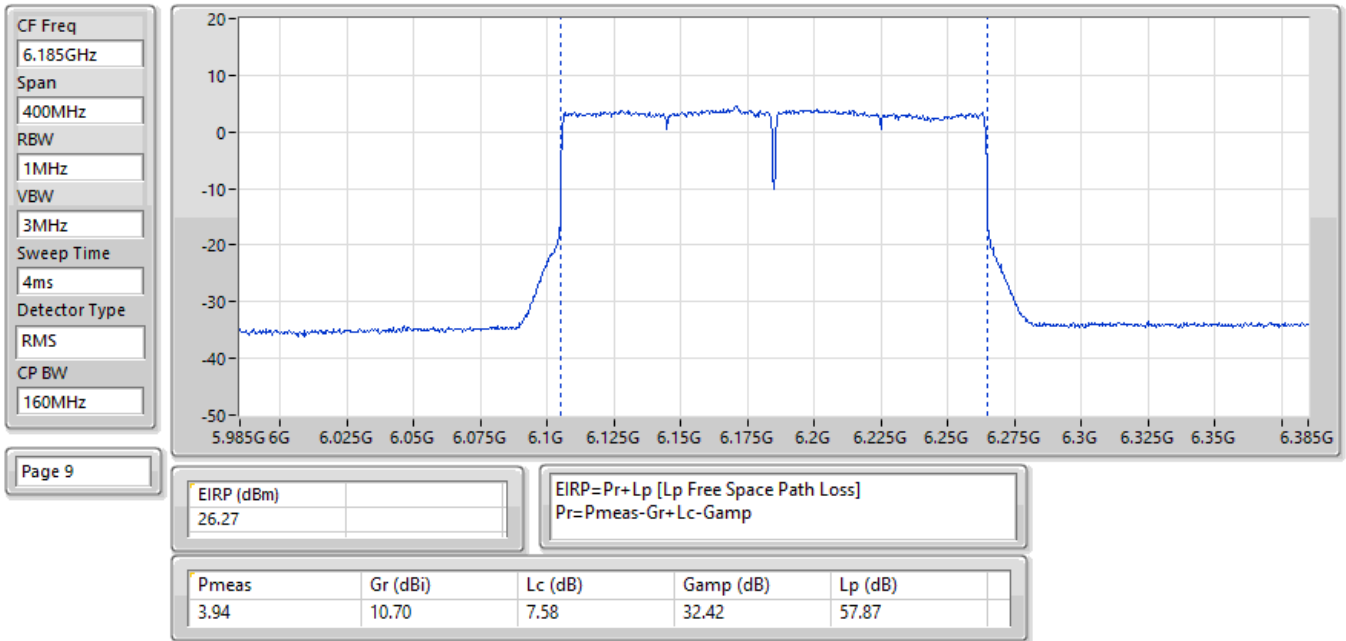


02/06/2025

EIRP;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6345MHz;TX

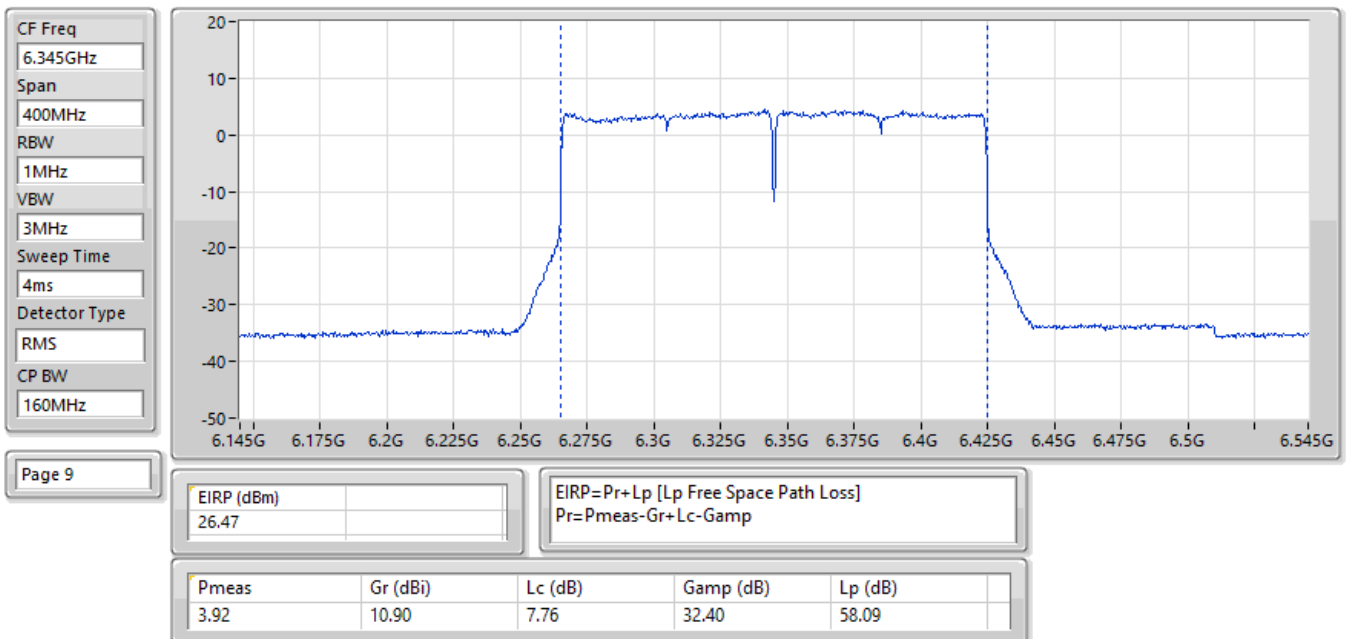


02/06/2025

EIRP;Band:6.4G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6505MHz;TX

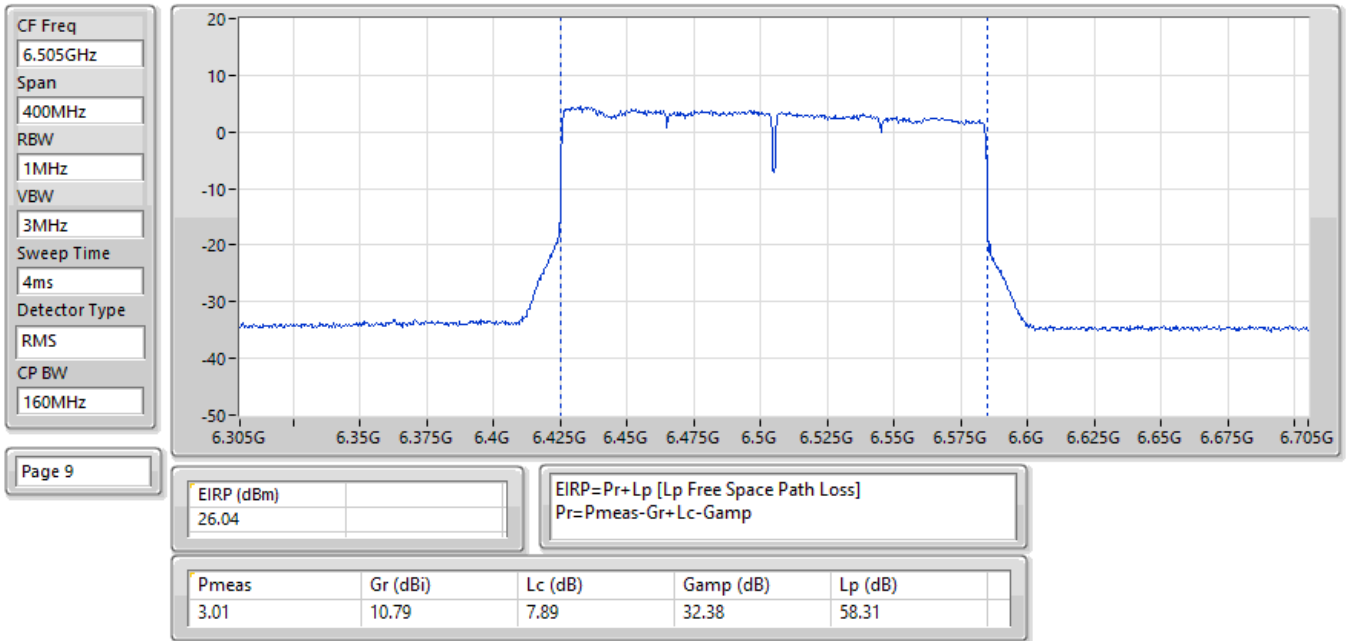


02/06/2025

EIRP;Band:6.7G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6665MHz;TX

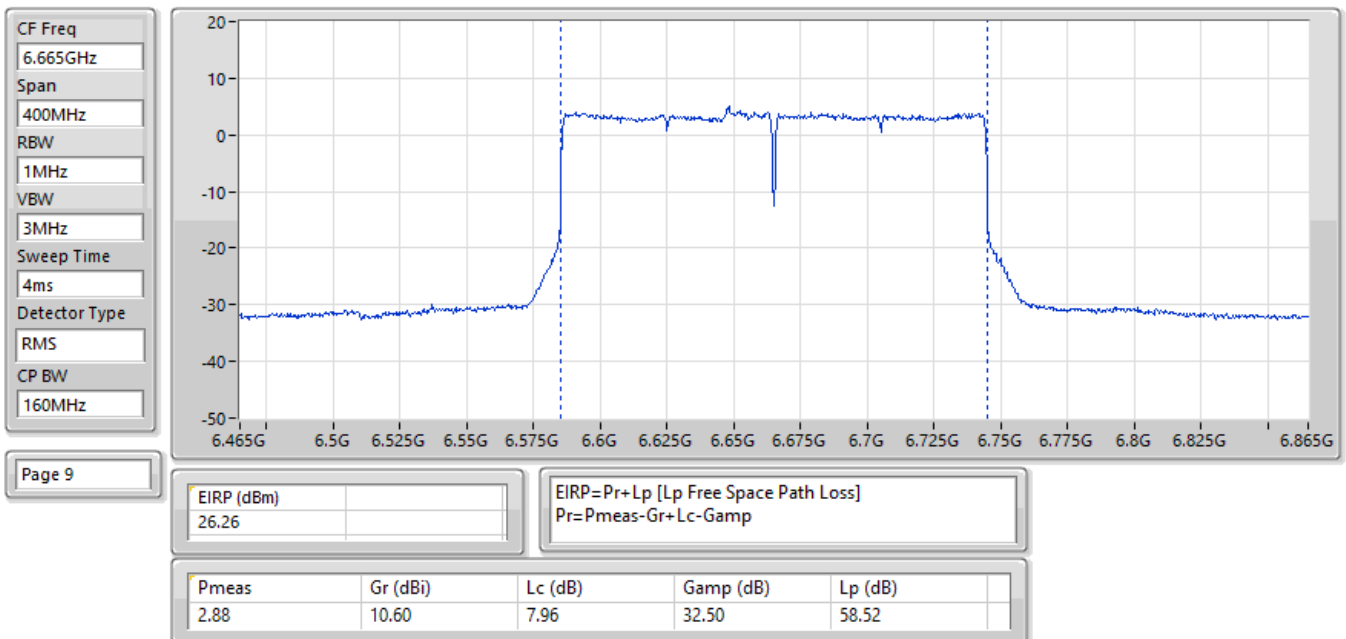


02/06/2025

EIRP;Band:6.7G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6825MHz;TX

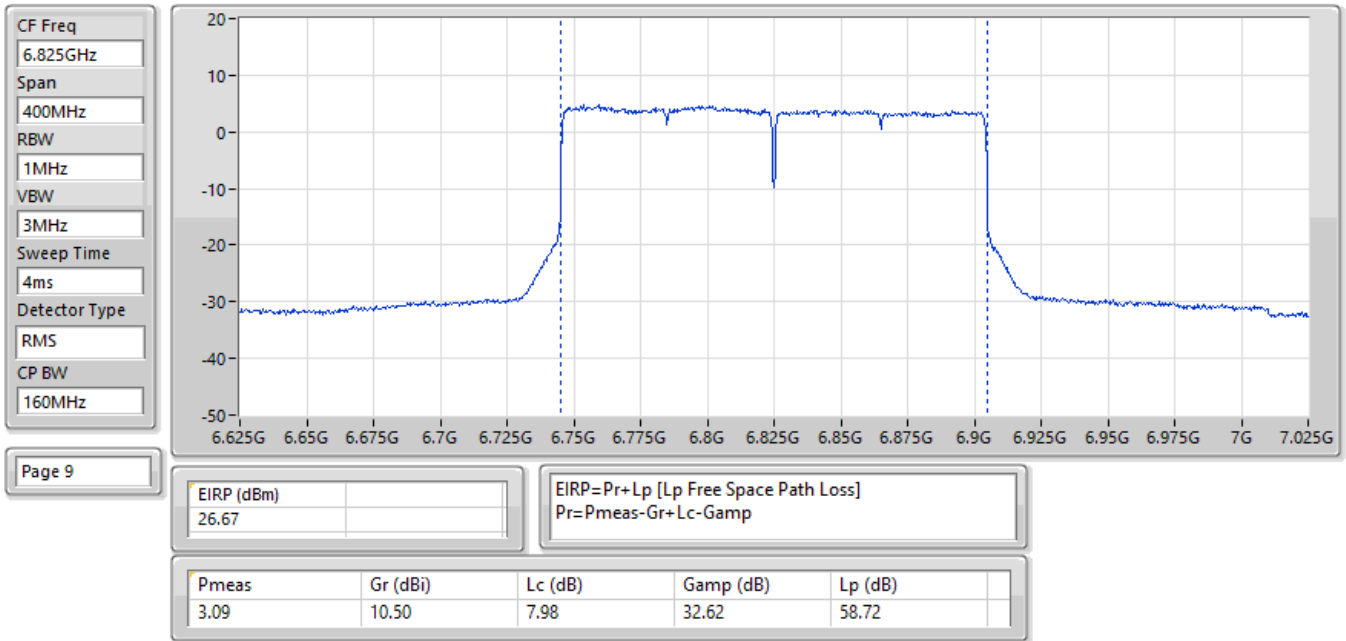


02/06/2025

EIRP;Band:7.0G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6985MHz;TX

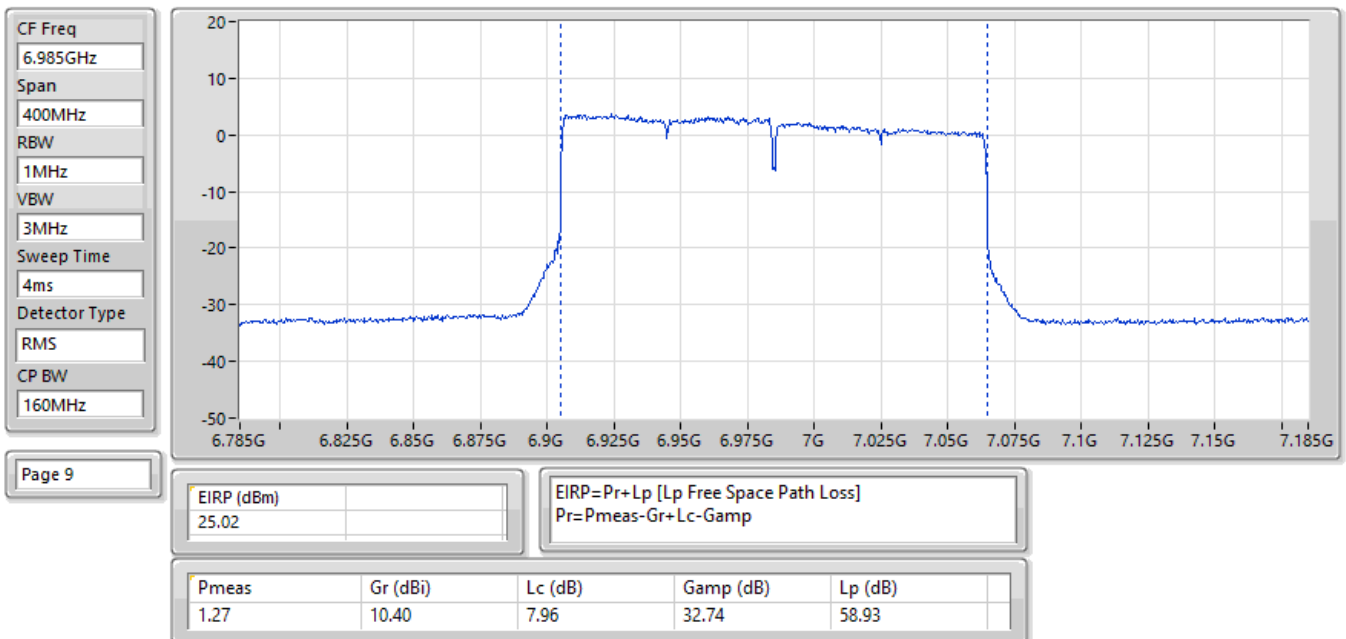


29/05/2025

EIRP;Band:6.2G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6105MHz;TX

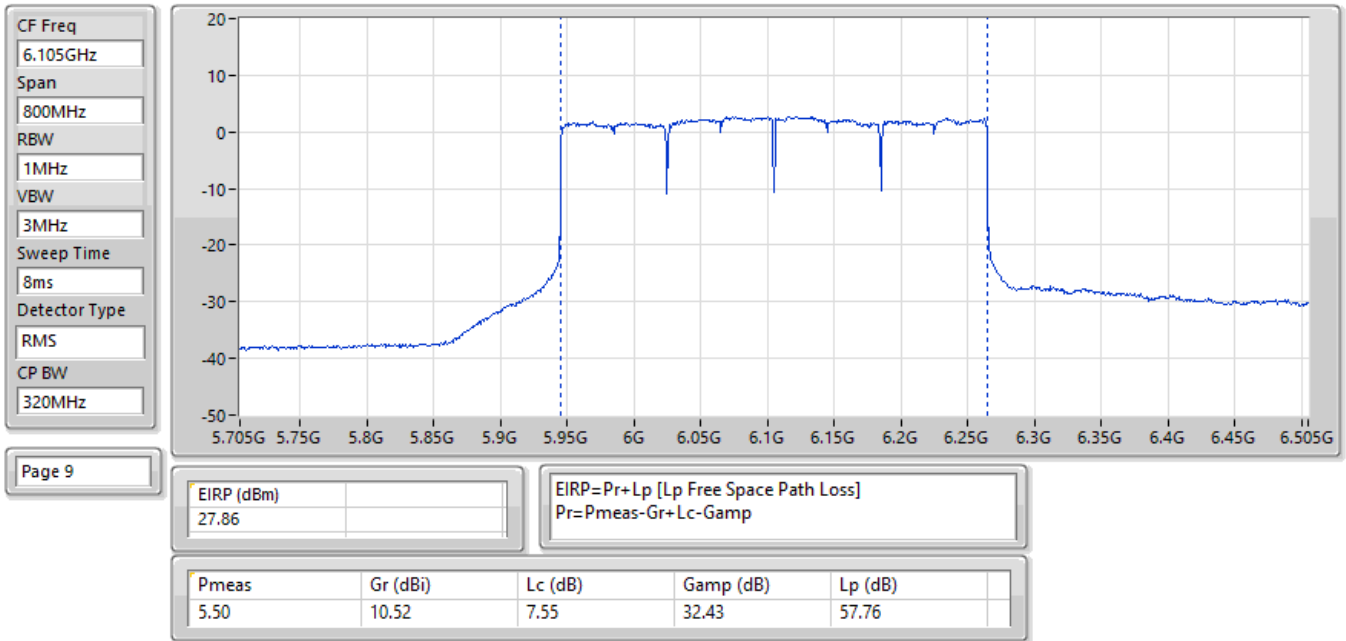


29/05/2025

EIRP;Band:6.2G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6265MHz;TX

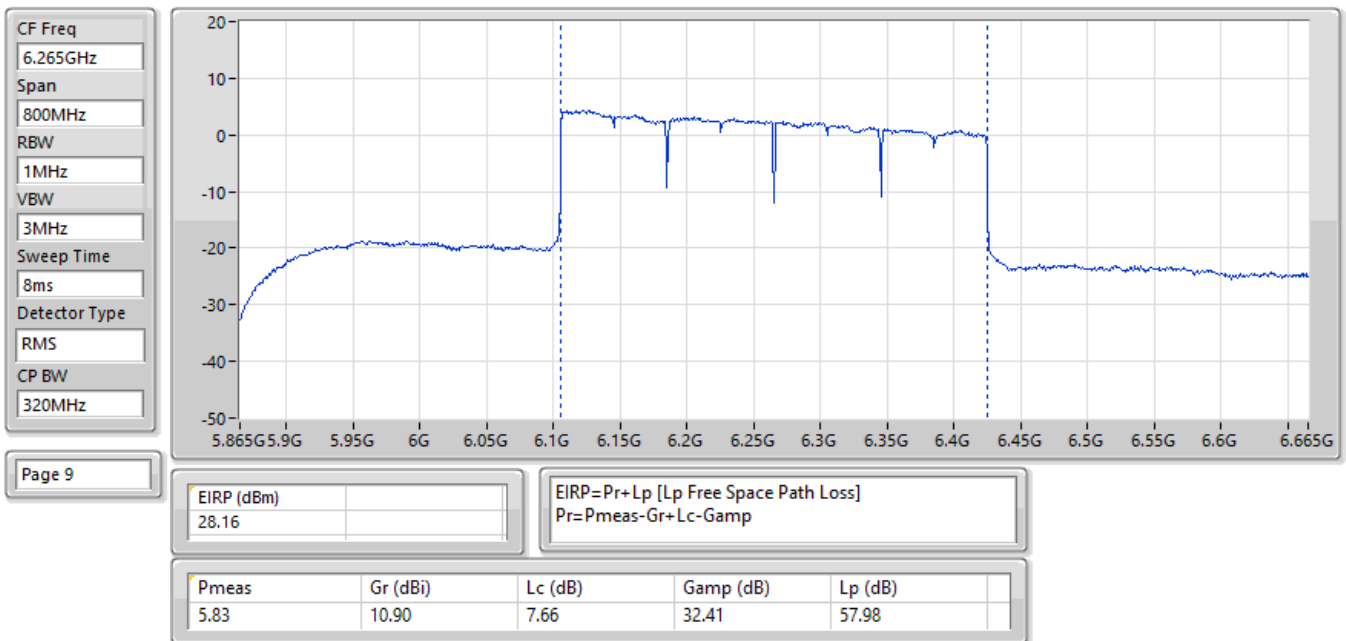


02/06/2025

EIRP;Band:6.2G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6425MHz;TX

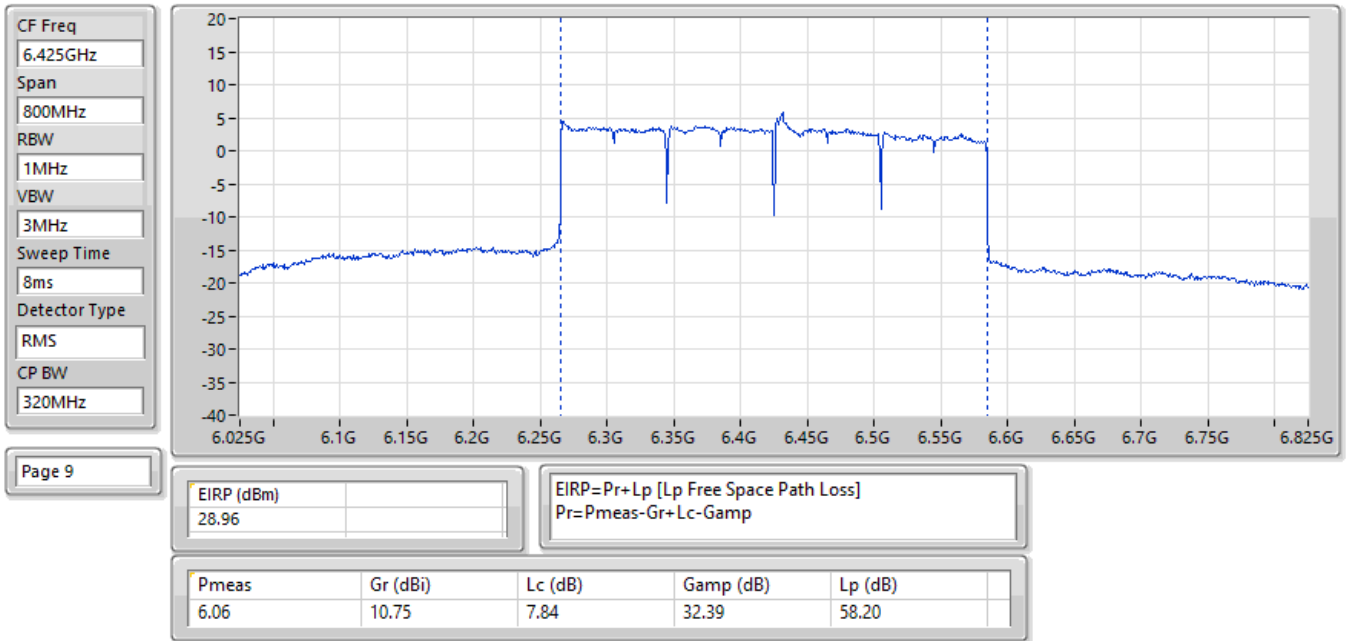


02/06/2025

EIRP;Band:6.4G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6585MHz;TX

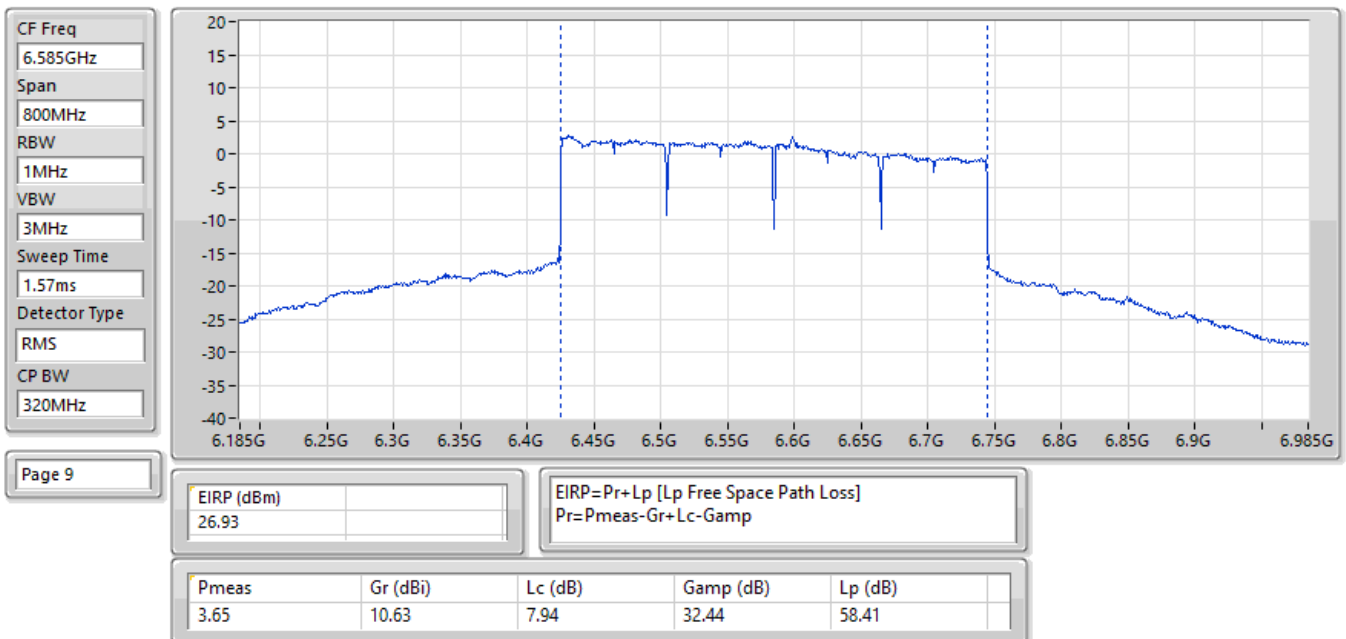


02/06/2025

EIRP;Band:6.7G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6745MHz;TX

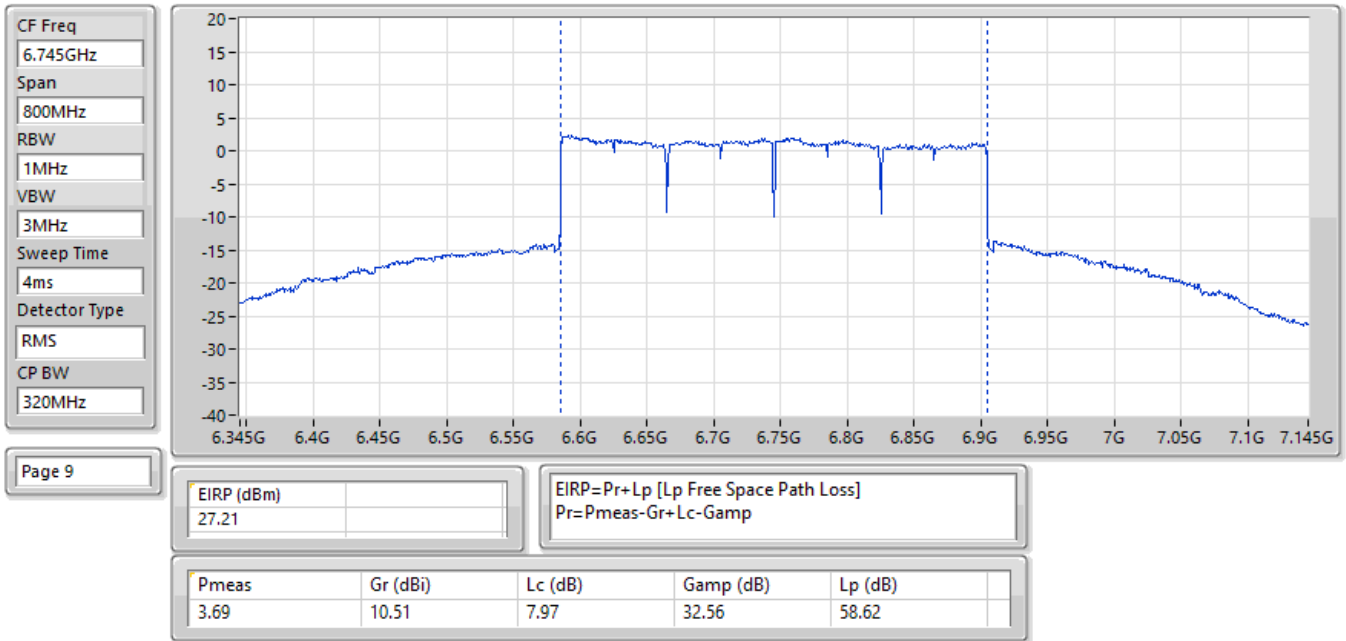

29/05/2025

EIRP;Band:6.7G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6905MHz;TX

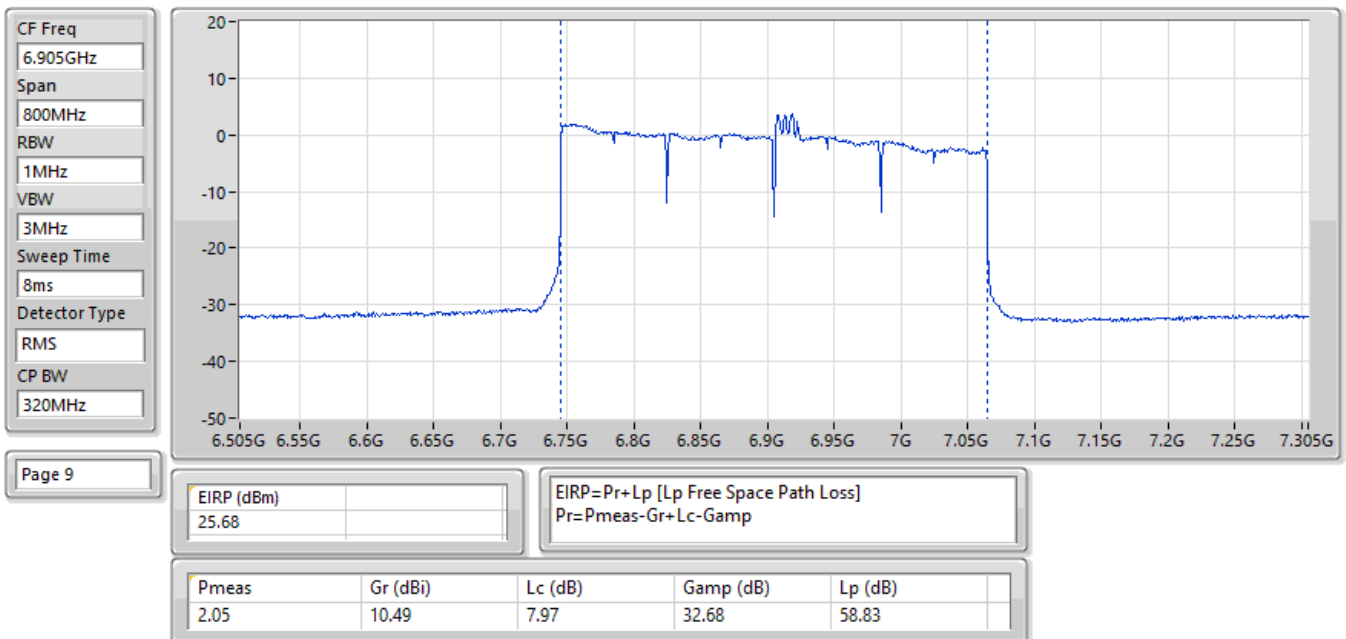

Summary

Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	4.94
802.11be EHT40-BF_Nss1,(MCS0)_2TX	4.84
802.11be EHT80-BF_Nss1,(MCS0)_2TX	4.68
802.11be EHT160-BF_Nss1,(MCS0)_2TX	4.79
802.11be EHT320-BF_Nss1,(MCS0)_2TX	4.74
6.425-6.525GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	4.60
802.11be EHT40-BF_Nss1,(MCS0)_2TX	4.64
802.11be EHT80-BF_Nss1,(MCS0)_2TX	4.56
802.11be EHT160-BF_Nss1,(MCS0)_2TX	4.56
802.11be EHT320-BF_Nss1,(MCS0)_2TX	4.00
6.525-6.875GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	4.88
802.11be EHT40-BF_Nss1,(MCS0)_2TX	4.83
802.11be EHT80-BF_Nss1,(MCS0)_2TX	4.80
802.11be EHT160-BF_Nss1,(MCS0)_2TX	4.72
802.11be EHT320-BF_Nss1,(MCS0)_2TX	4.10
6.875-7.125GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	4.77
802.11be EHT40-BF_Nss1,(MCS0)_2TX	4.66
802.11be EHT80-BF_Nss1,(MCS0)_2TX	4.31
802.11be EHT160-BF_Nss1,(MCS0)_2TX	3.72

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


Result

Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-
5955MHz	Pass	4.19	5.00
6195MHz	Pass	4.94	5.00
6415MHz	Pass	4.39	5.00
6435MHz	Pass	4.07	5.00
6475MHz	Pass	4.19	5.00
6515MHz	Pass	4.60	5.00
6535MHz	Pass	4.88	5.00
6695MHz	Pass	4.72	5.00
6875MHz	Pass	4.80	5.00
6895MHz	Pass	4.31	5.00
6995MHz	Pass	4.77	5.00
7095MHz	Pass	4.28	5.00
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-
5965MHz	Pass	4.78	5.00
6205MHz	Pass	4.84	5.00
6405MHz	Pass	4.60	5.00
6445MHz	Pass	4.60	5.00
6485MHz	Pass	4.42	5.00
6525MHz	Pass	4.64	5.00
6565MHz	Pass	4.83	5.00
6685MHz	Pass	4.29	5.00
6885MHz	Pass	4.81	5.00
6925MHz	Pass	4.66	5.00
7005MHz	Pass	4.26	5.00
7085MHz	Pass	4.66	5.00
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-
5985MHz	Pass	4.47	5.00
6225MHz	Pass	4.25	5.00
6385MHz	Pass	4.68	5.00
6465MHz	Pass	4.56	5.00
6545MHz	Pass	4.42	5.00
6625MHz	Pass	4.14	5.00
6705MHz	Pass	4.25	5.00
6785MHz	Pass	4.79	5.00
6865MHz	Pass	4.80	5.00
6945MHz	Pass	4.31	5.00
7025MHz	Pass	4.05	5.00
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-
6025MHz	Pass	4.79	5.00
6185MHz	Pass	4.66	5.00
6345MHz	Pass	4.58	5.00
6505MHz	Pass	4.56	5.00
6665MHz	Pass	4.19	5.00
6825MHz	Pass	4.72	5.00
6985MHz	Pass	3.72	5.00
802.11be EHT320-BF_Nss1,(MCS0)_2TX	-	-	-
6105MHz	Pass	3.96	5.00
6265MHz	Pass	4.29	5.00
6425MHz	Pass	4.74	5.00
6585MHz	Pass	4.00	5.00
6745MHz	Pass	4.10	5.00
6905MHz	Pass	1.44	5.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.


29/05/2025

EIRP PSD;Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:5955MHz;TX

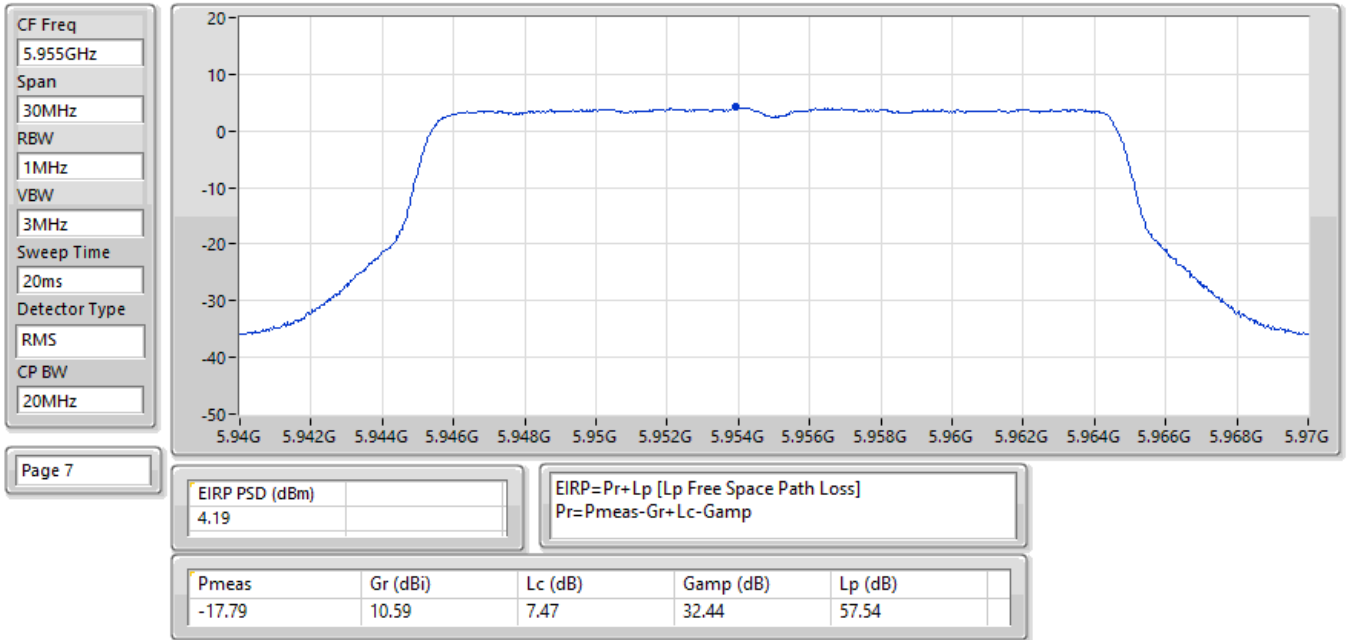


29/05/2025

EIRP PSD;Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6195MHz;TX

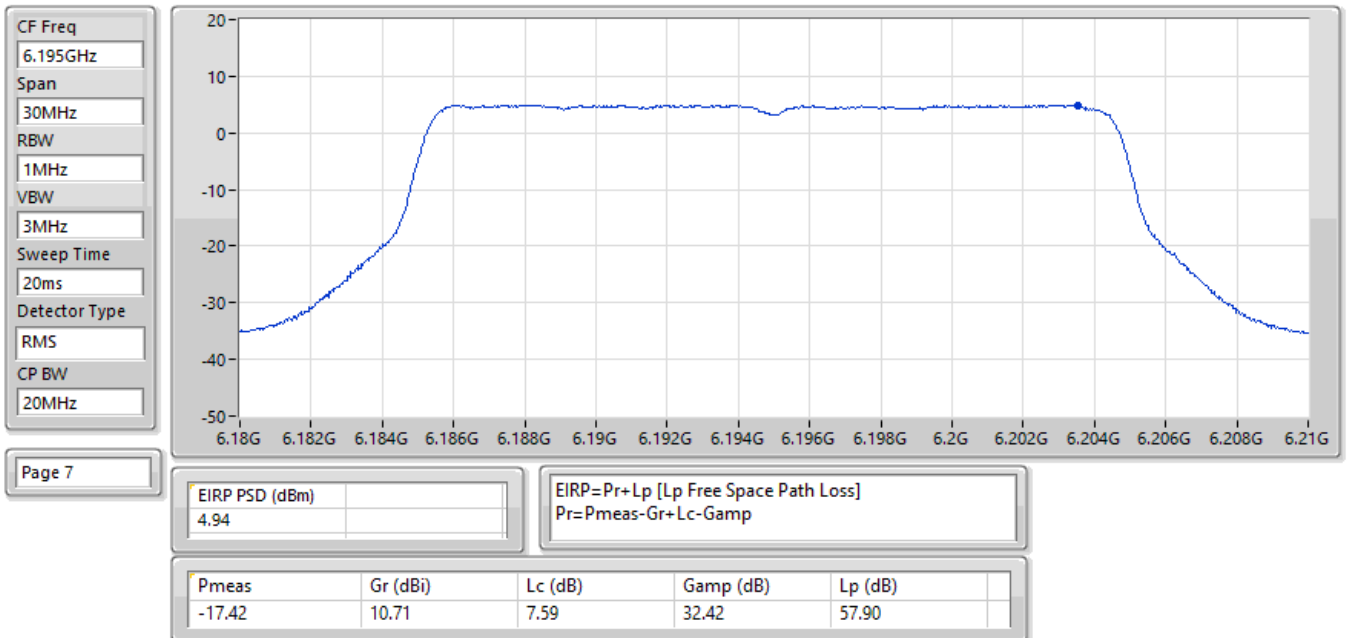


02/06/2025

EIRP PSD;Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6415MHz;TX

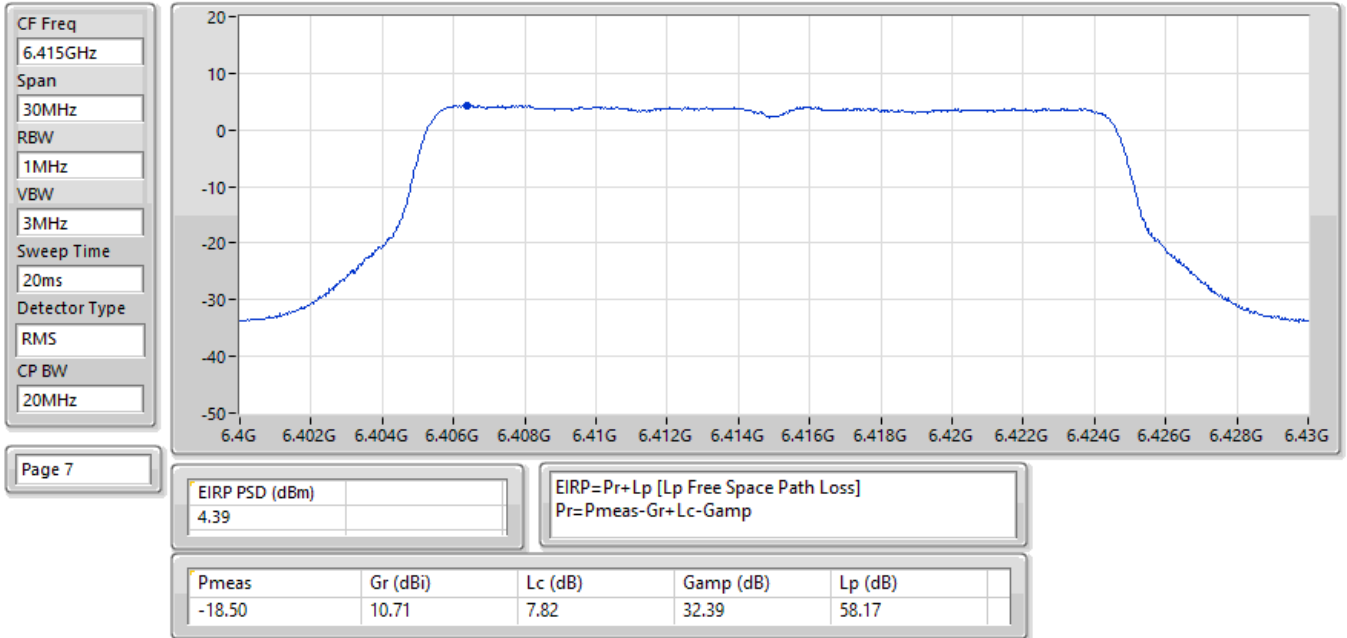

29/05/2025


EIRP PSD;Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6435MHz;TX

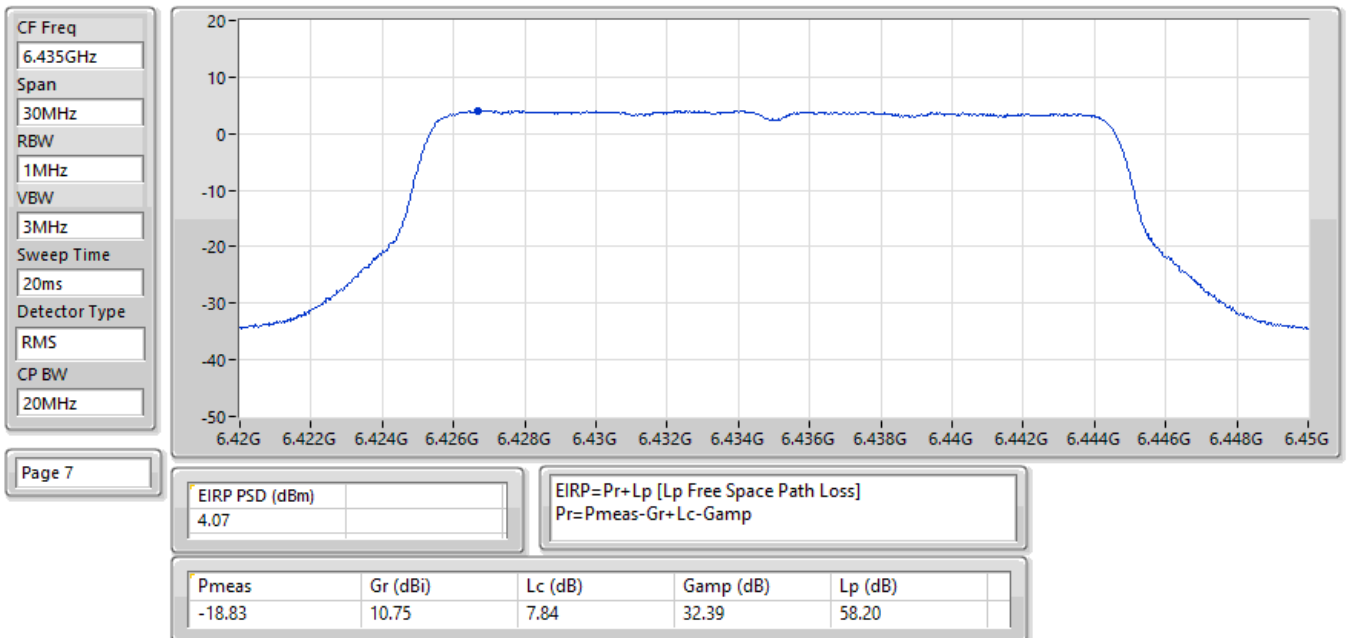

29/05/2025

EIRP PSD;Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6475MHz;TX

CF Freq
6.475GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

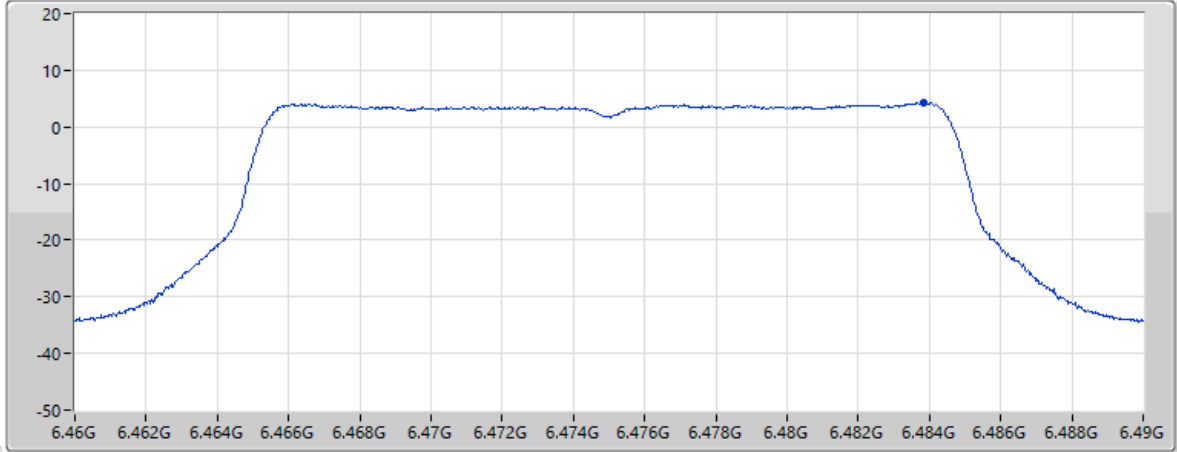


Page 7

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.19				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-18.78	10.80	7.87	32.38	58.28

29/05/2025

EIRP PSD;Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6515MHz;TX

CF Freq
6.515GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

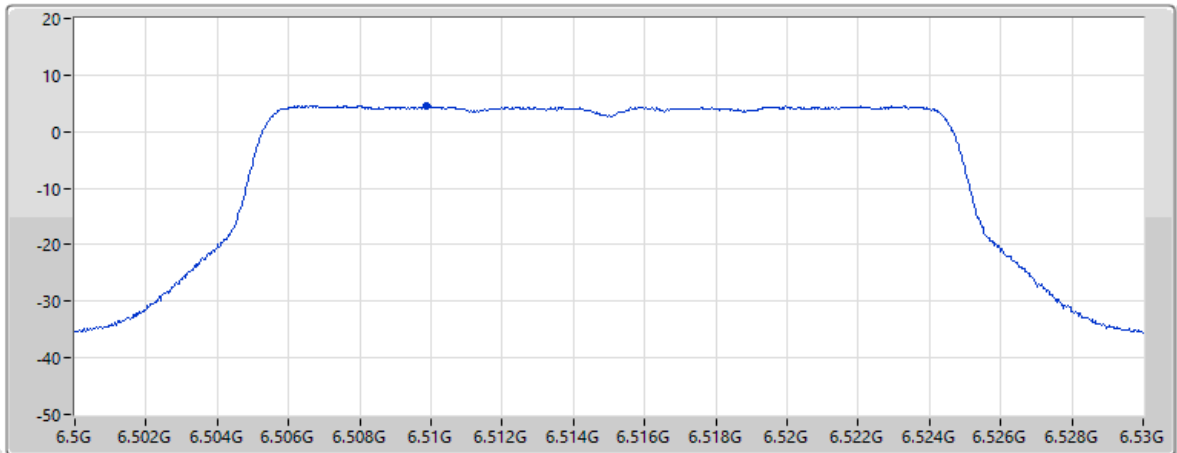


Page 7

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.6				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-18.43	10.78	7.89	32.39	58.31


29/05/2025

EIRP PSD;Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6535MHz;TX

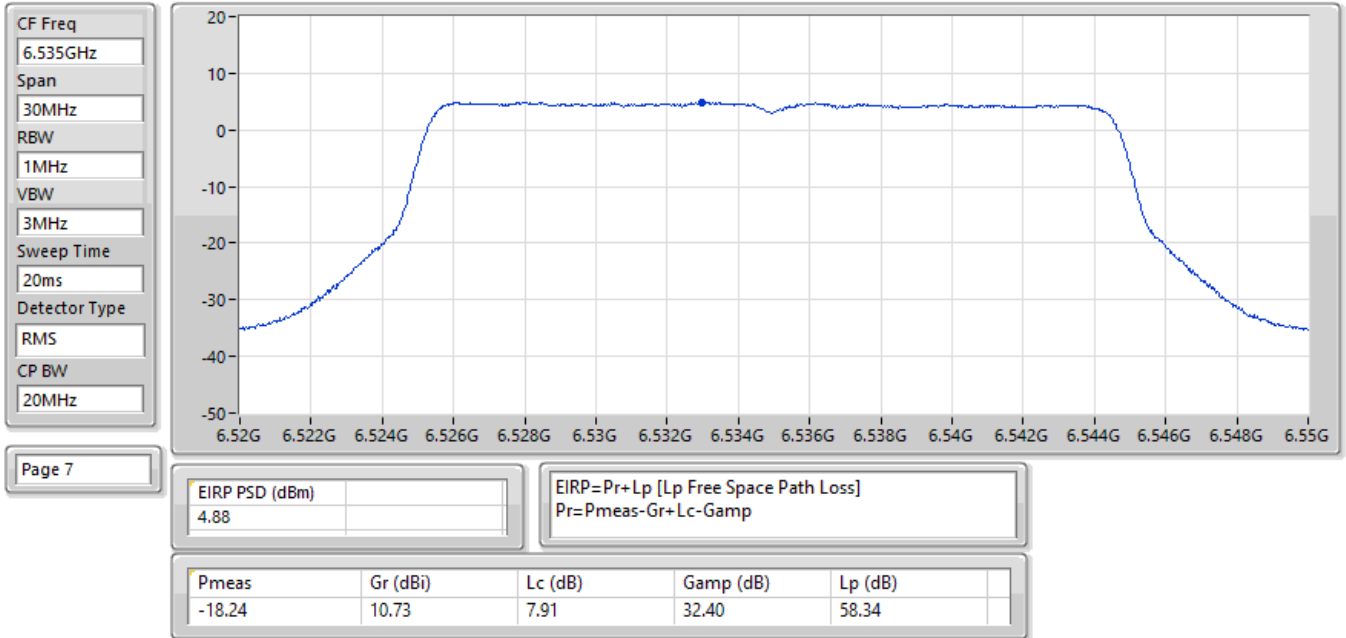


29/05/2025

EIRP PSD;Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6695MHz;TX

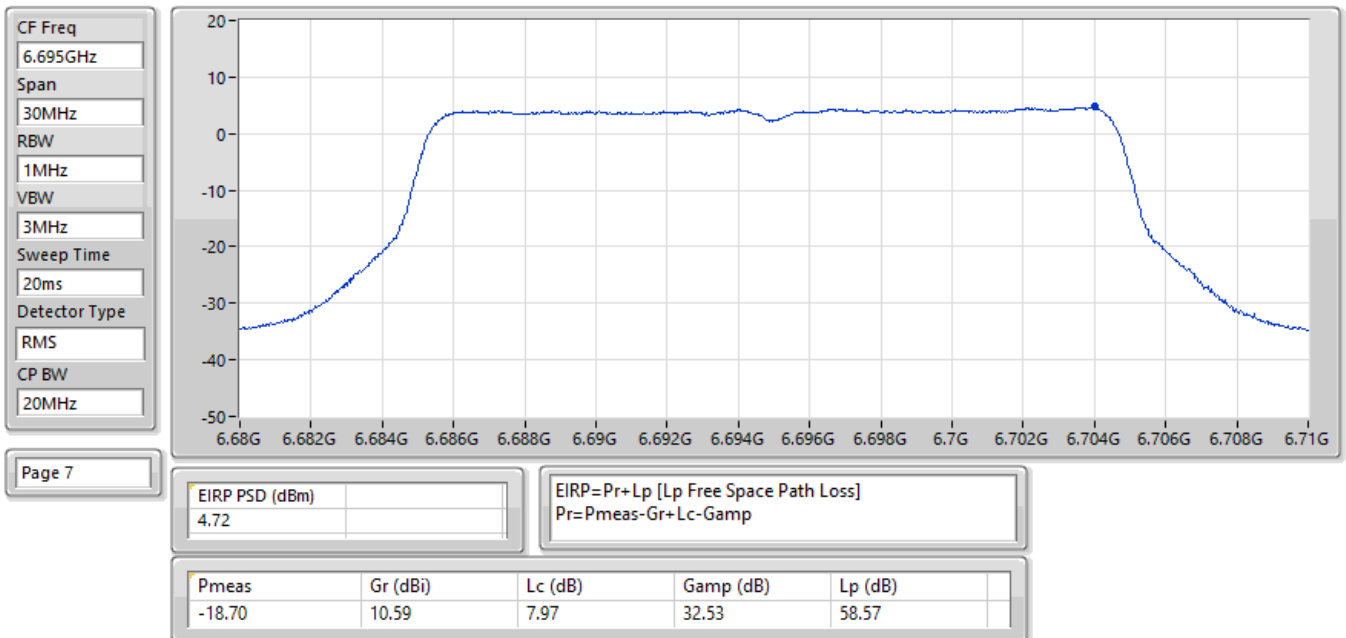


29/05/2025

EIRP PSD;Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6875MHz;TX

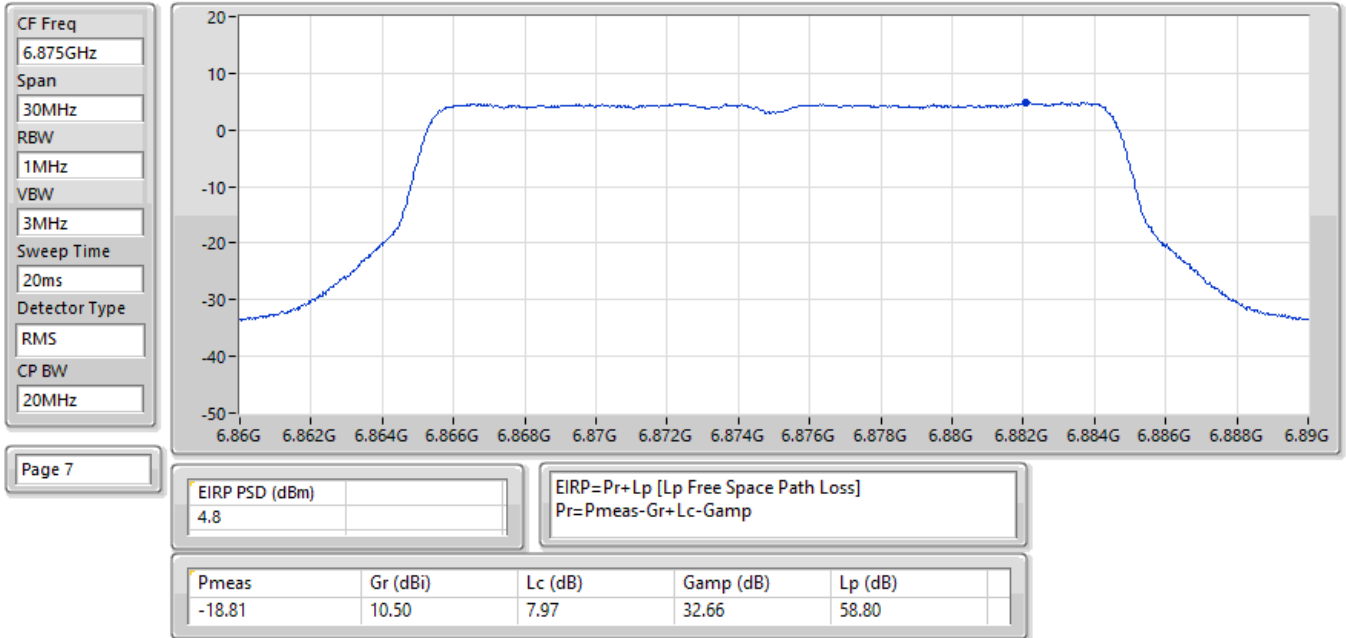


29/05/2025

EIRP PSD;Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6895MHz;TX

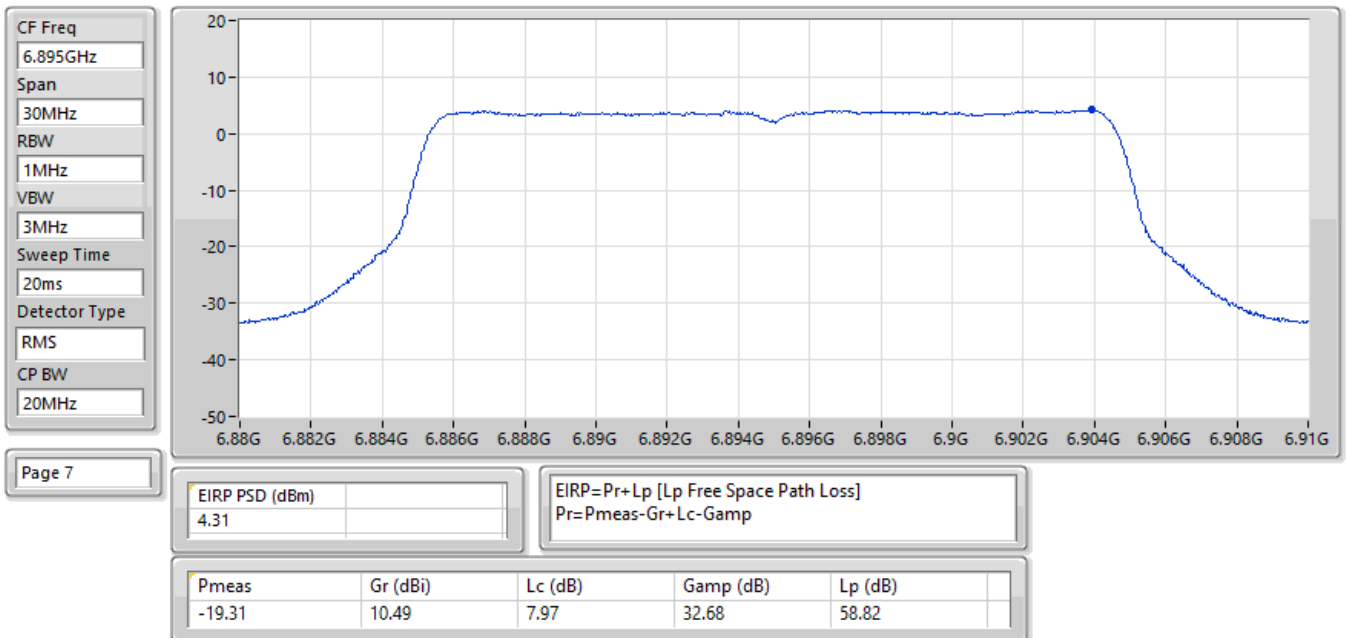


29/05/2025

EIRP PSD;Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6995MHz;TX

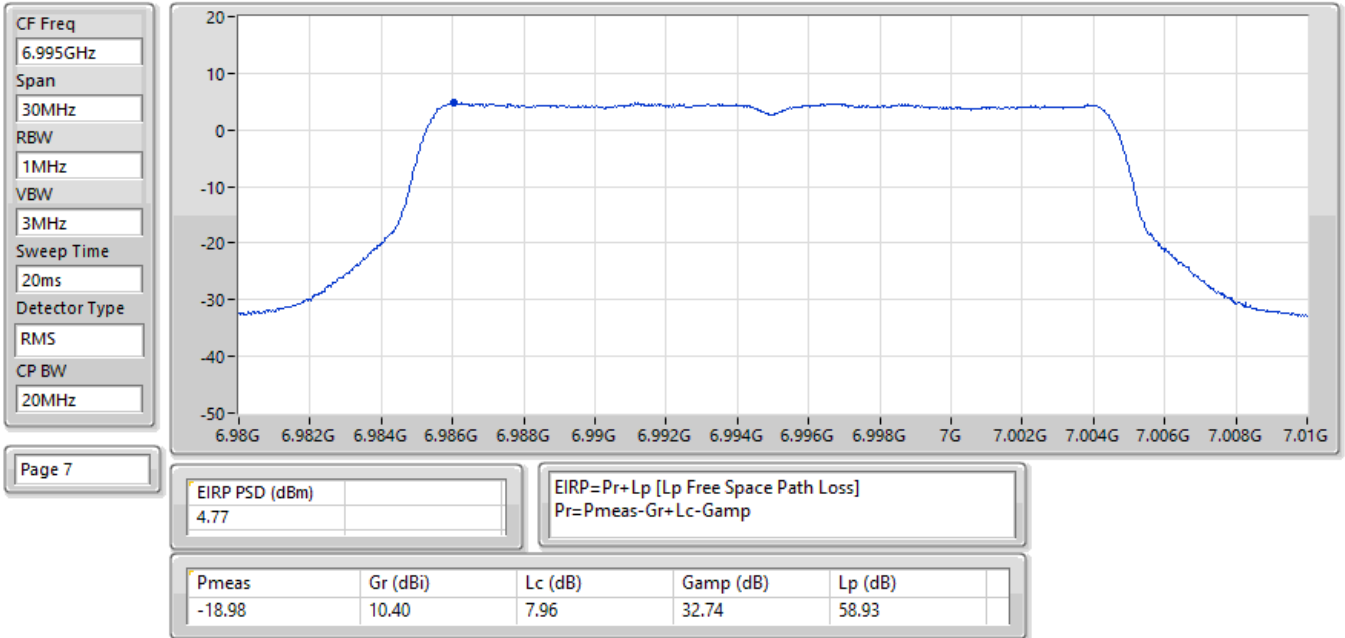


29/05/2025

EIRP PSD;Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:7095MHz;TX

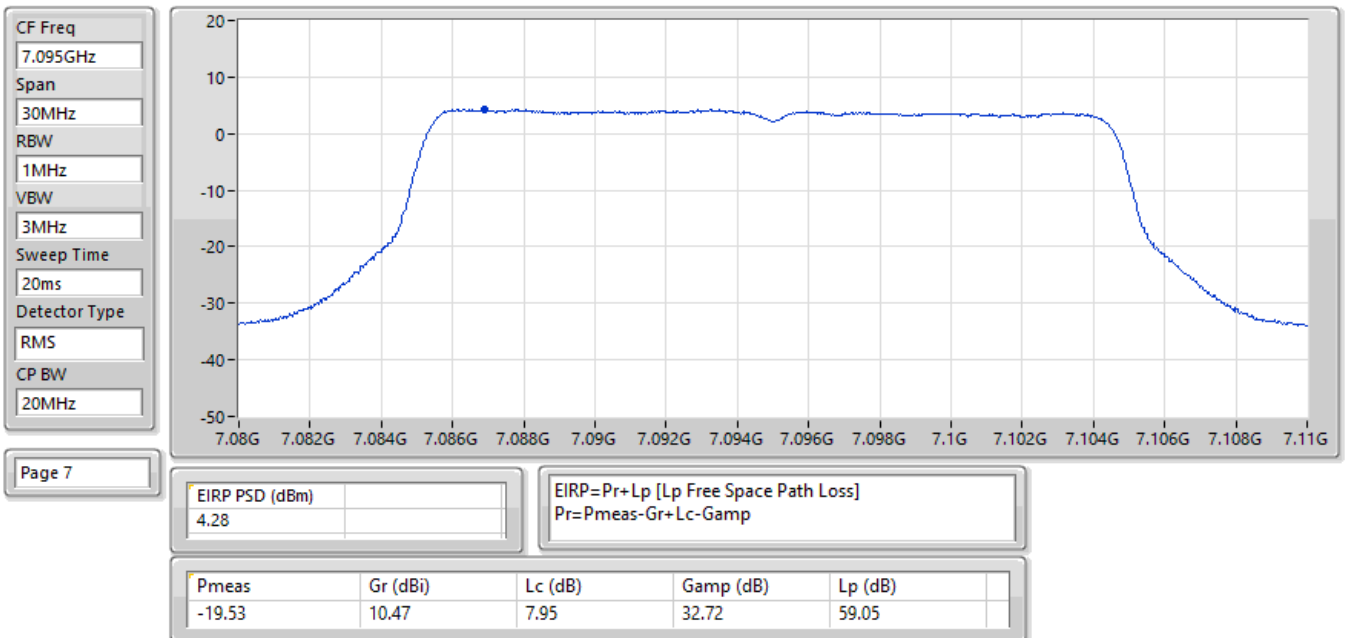


29/05/2025

EIRP PSD;Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:5965MHz;TX

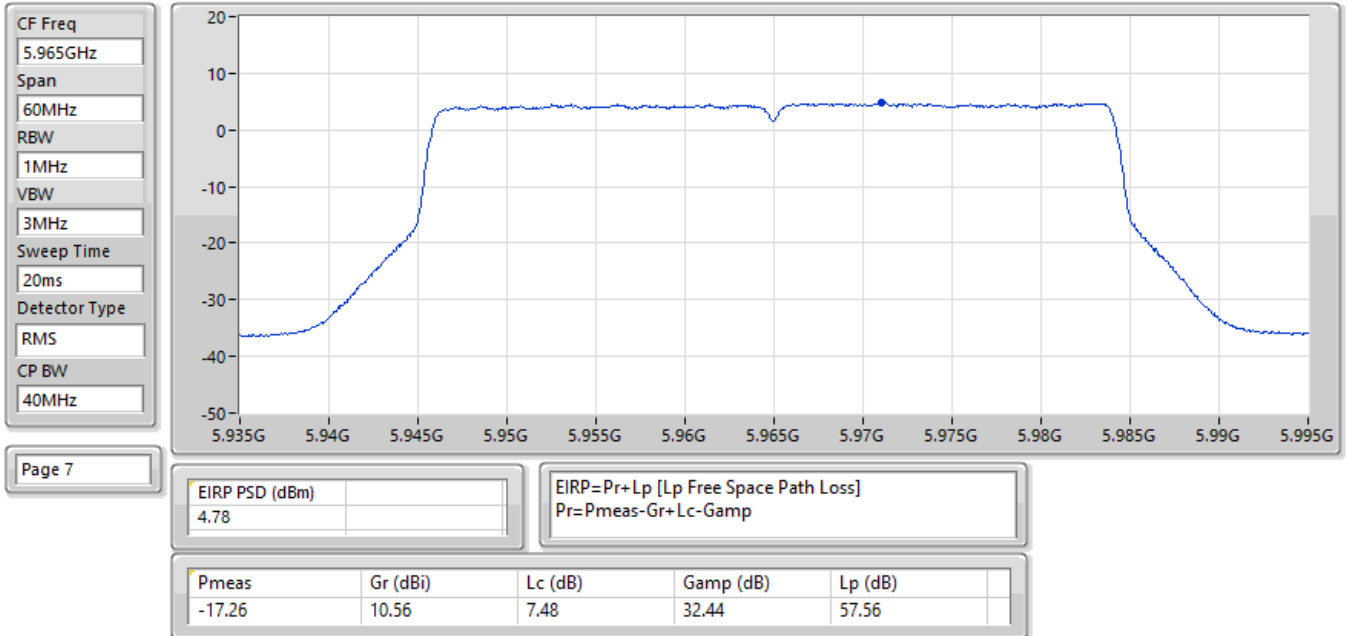


29/05/2025

EIRP PSD;Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6205MHz;TX

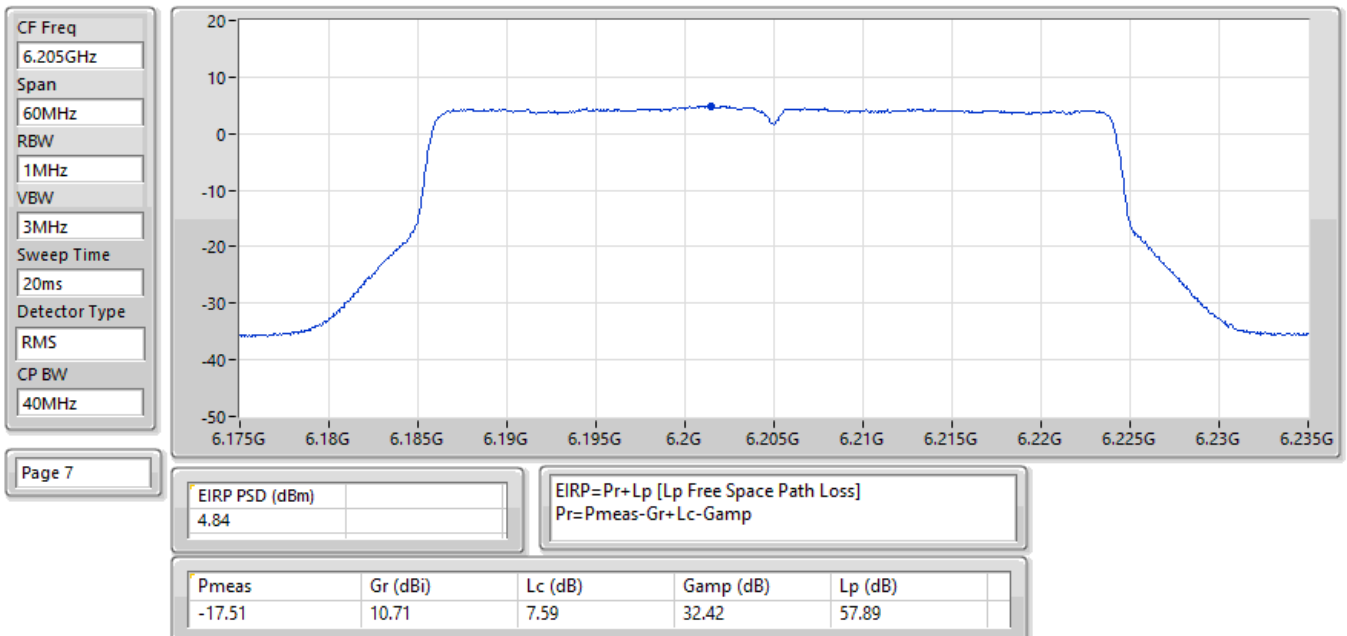


04/06/2025

EIRP PSD;Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6405MHz;TX

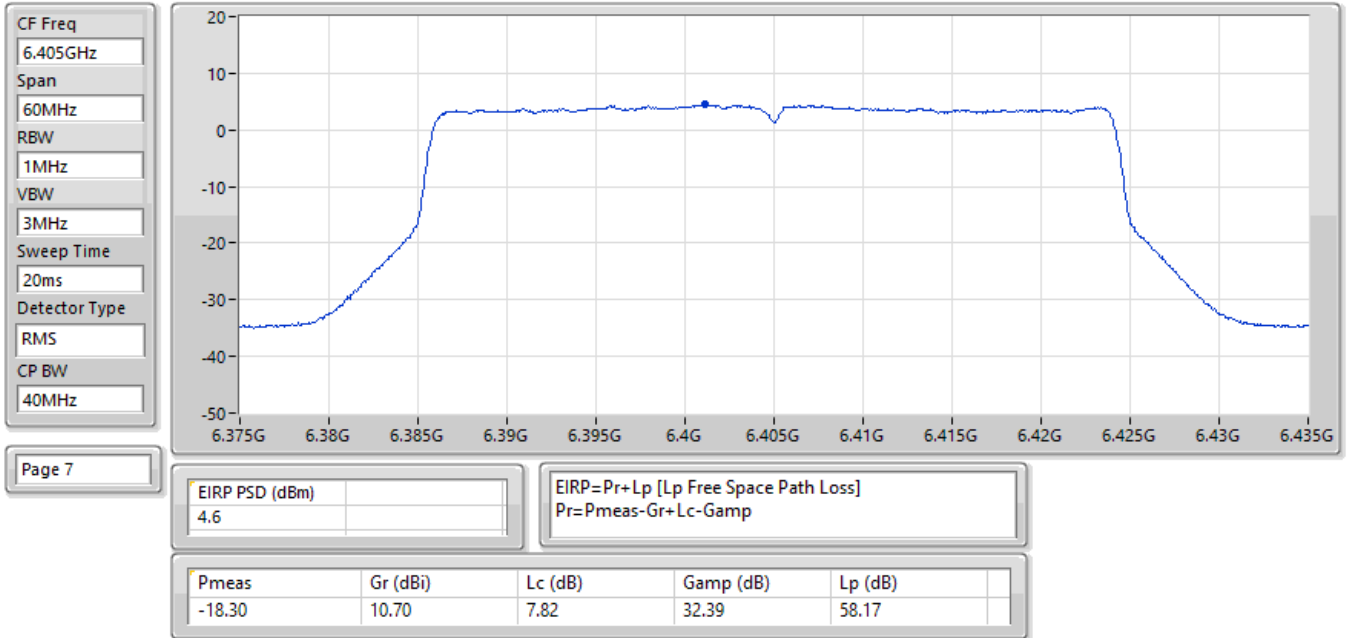


29/05/2025

EIRP PSD;Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6445MHz;TX

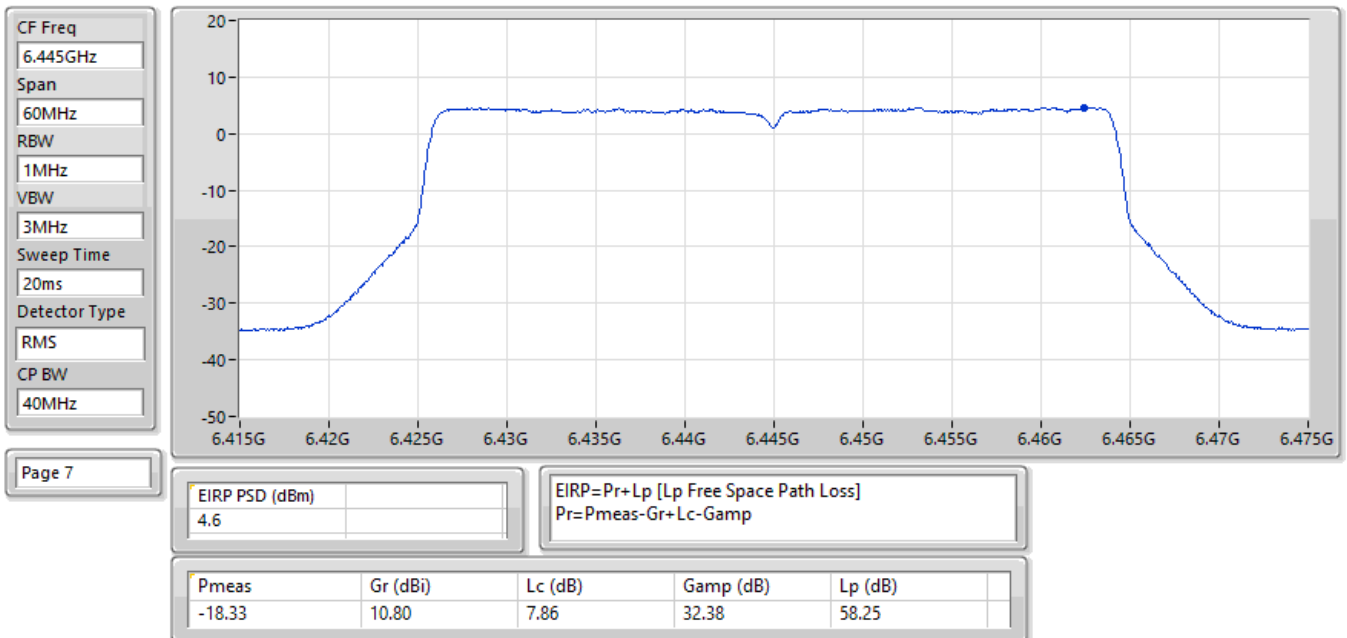


29/05/2025

EIRP PSD;Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6485MHz;TX

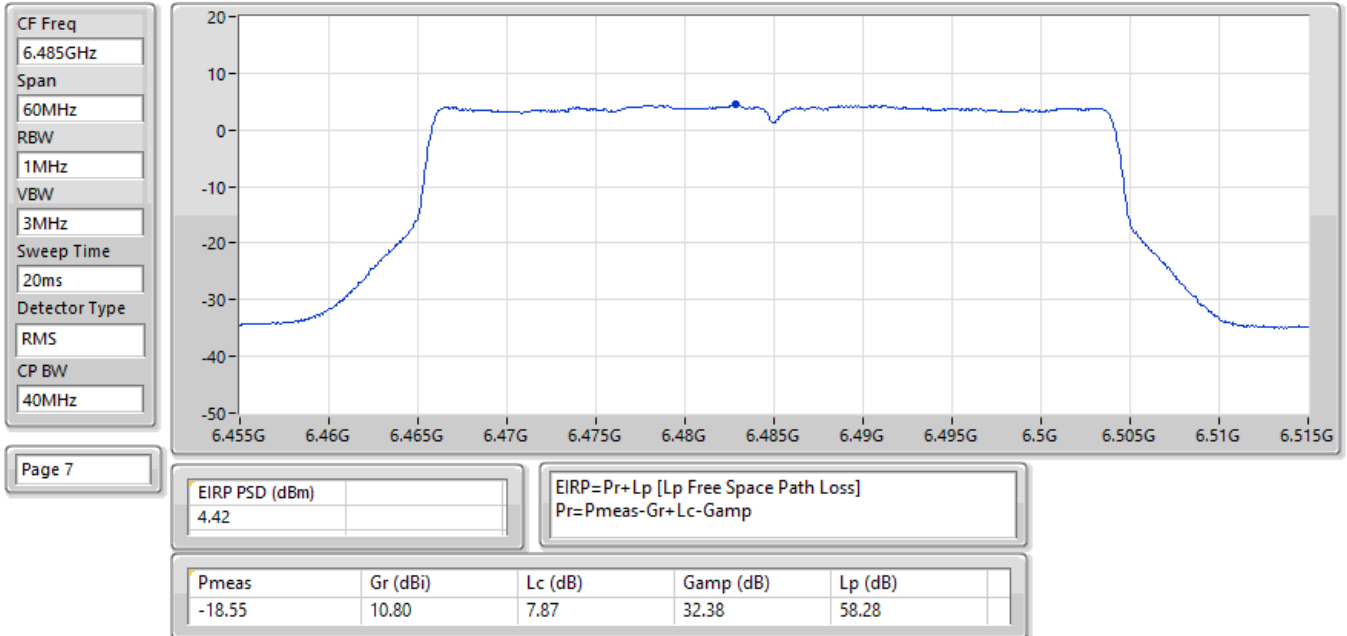

29/05/2025


EIRP PSD;Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6525MHz;TX

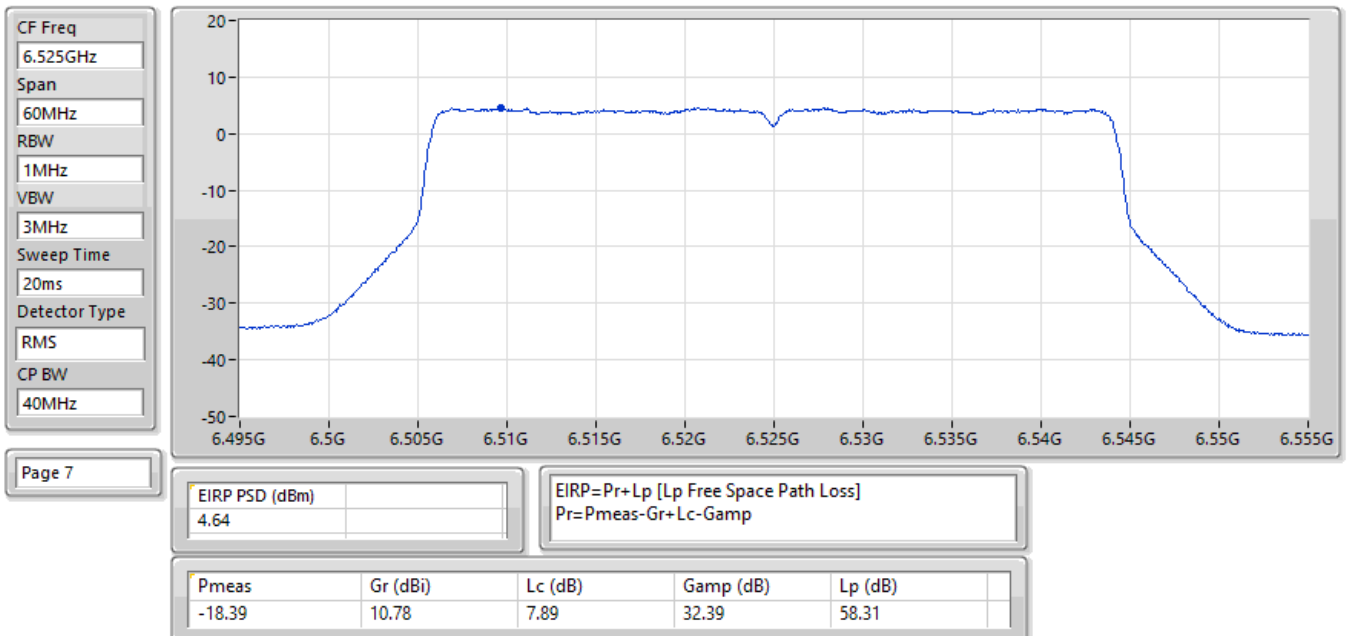

29/05/2025

EIRP PSD;Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6565MHz;TX

CF Freq
6.565GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
40MHz

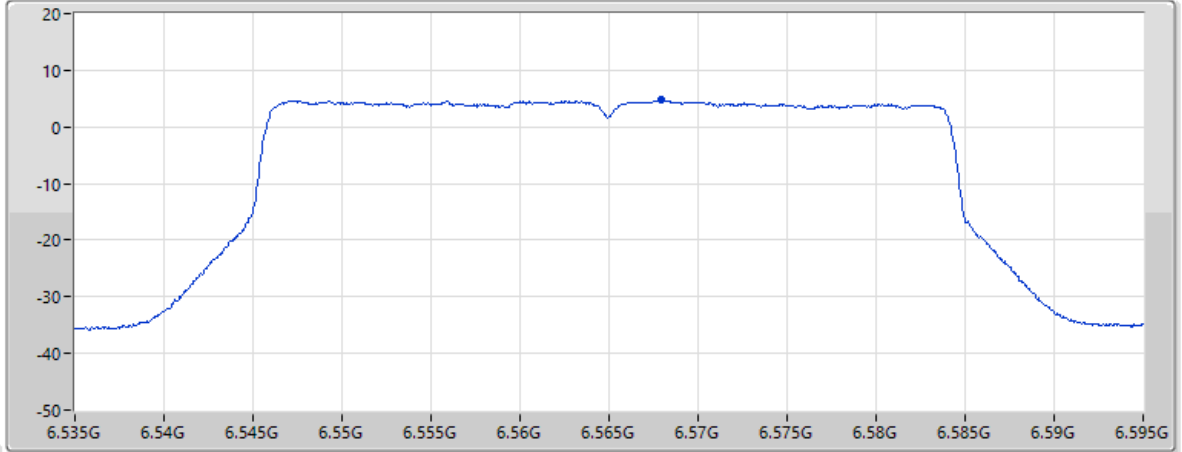


Page 7

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
4.83		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-18.40	10.66	7.93	32.43	58.39

29/05/2025

EIRP PSD;Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6685MHz;TX

CF Freq
6.685GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
40MHz

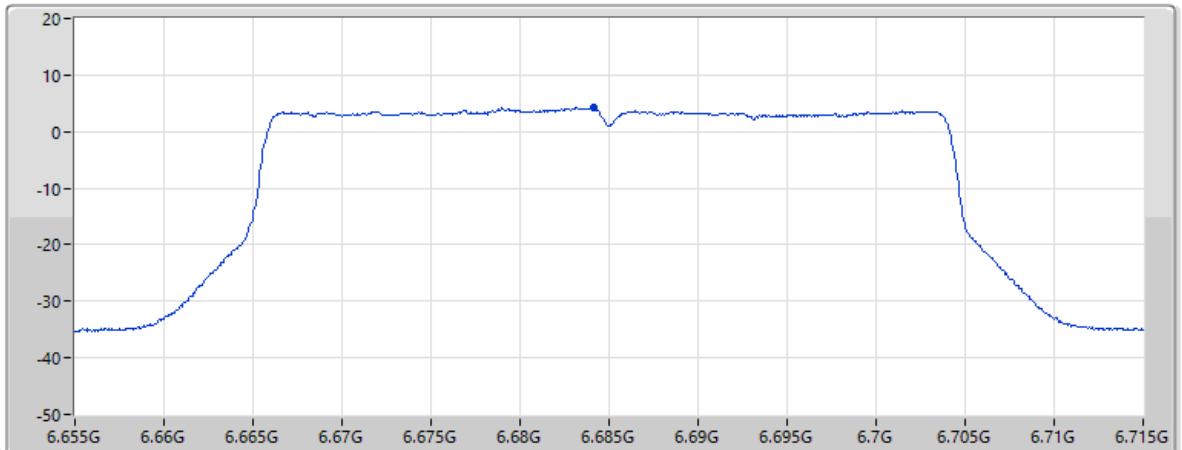


Page 7

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
4.29		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.09	10.60	7.96	32.52	58.54


04/06/2025

EIRP PSD;Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6885MHz;TX

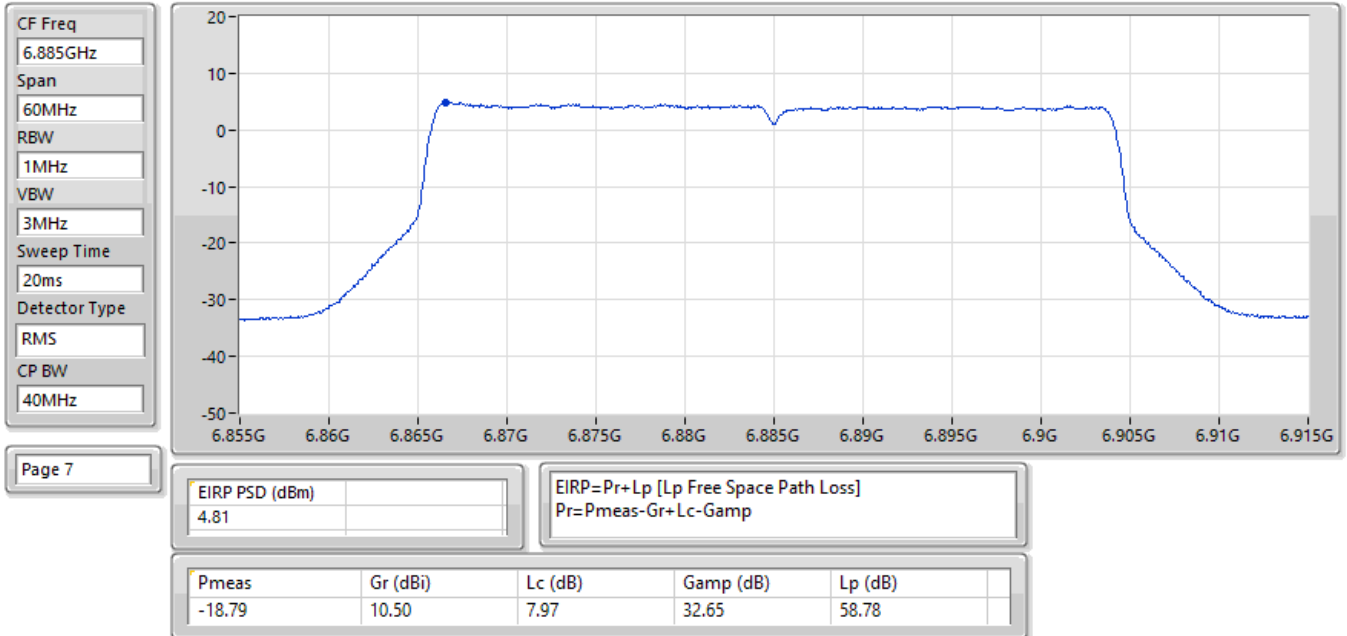


29/05/2025

EIRP PSD;Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6925MHz;TX

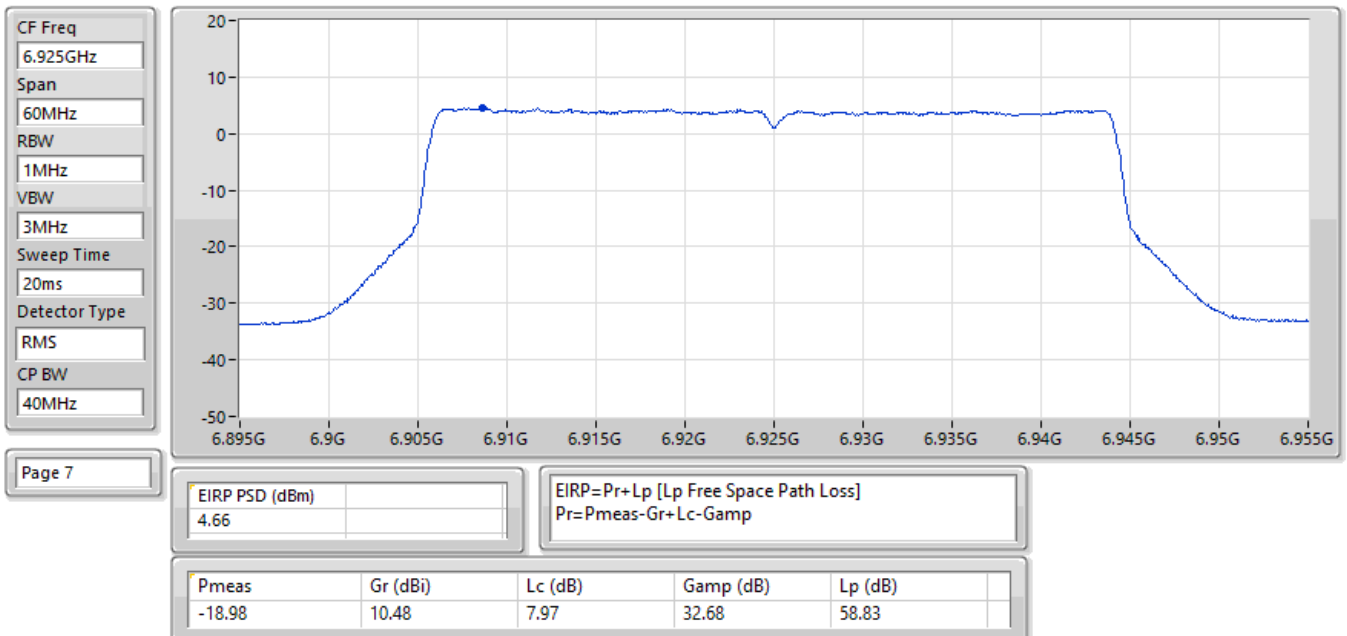


29/05/2025

EIRP PSD;Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:7005MHz;TX

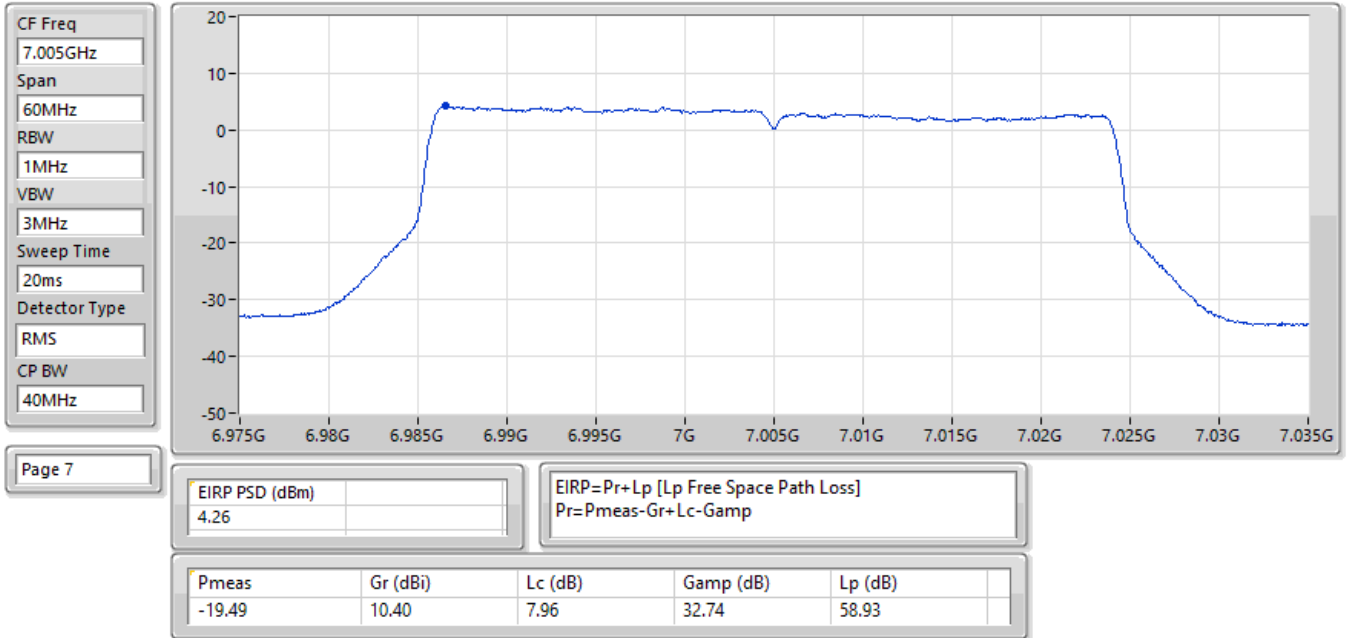


29/05/2025

EIRP PSD;Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:7085MHz;TX

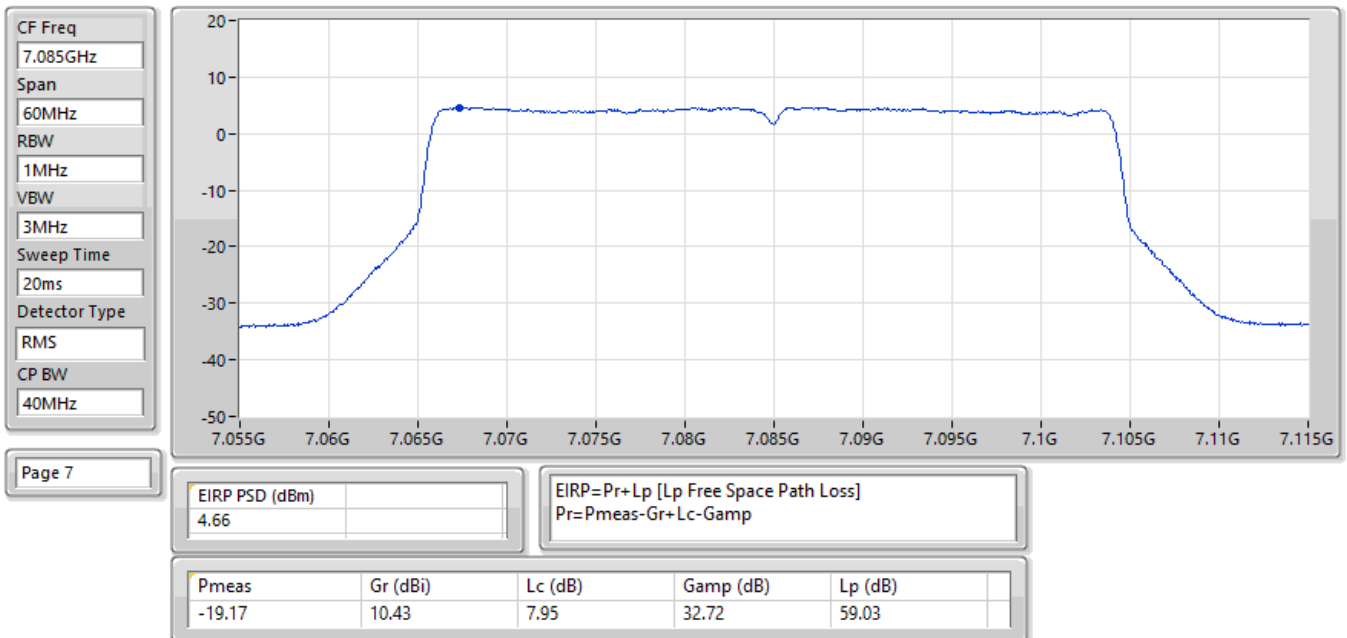


02/06/2025

EIRP PSD;Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:5985MHz;TX

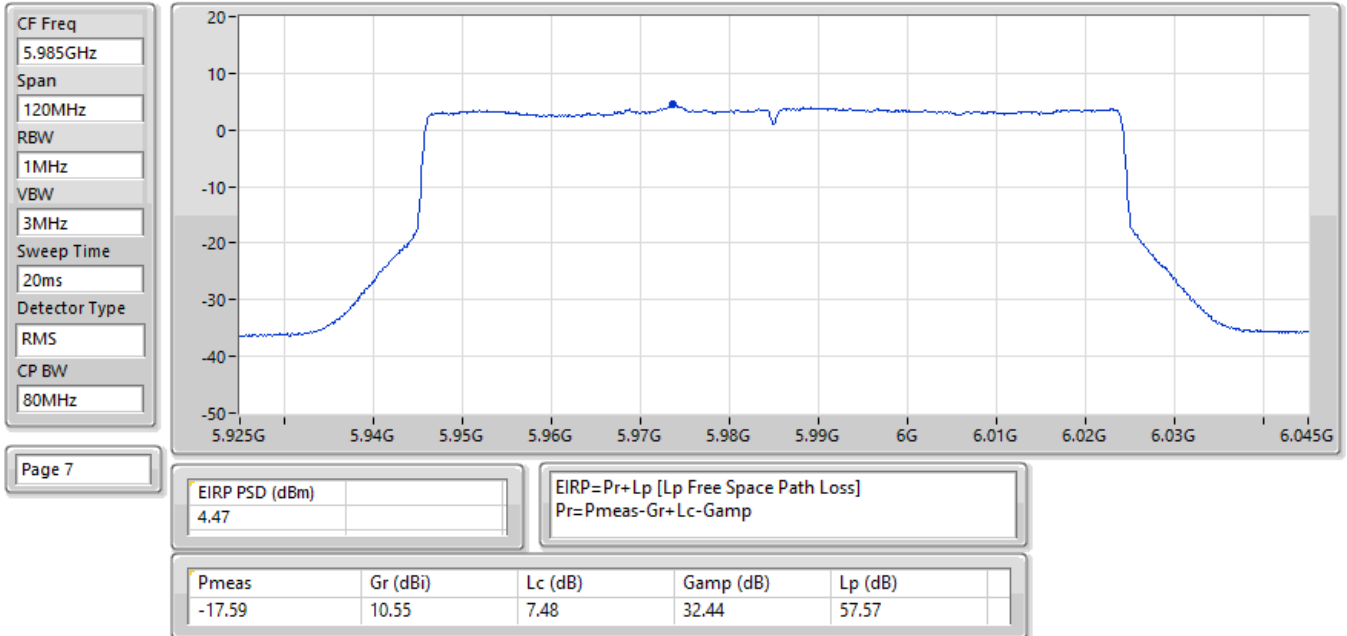


02/06/2025

EIRP PSD;Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6225MHz;TX

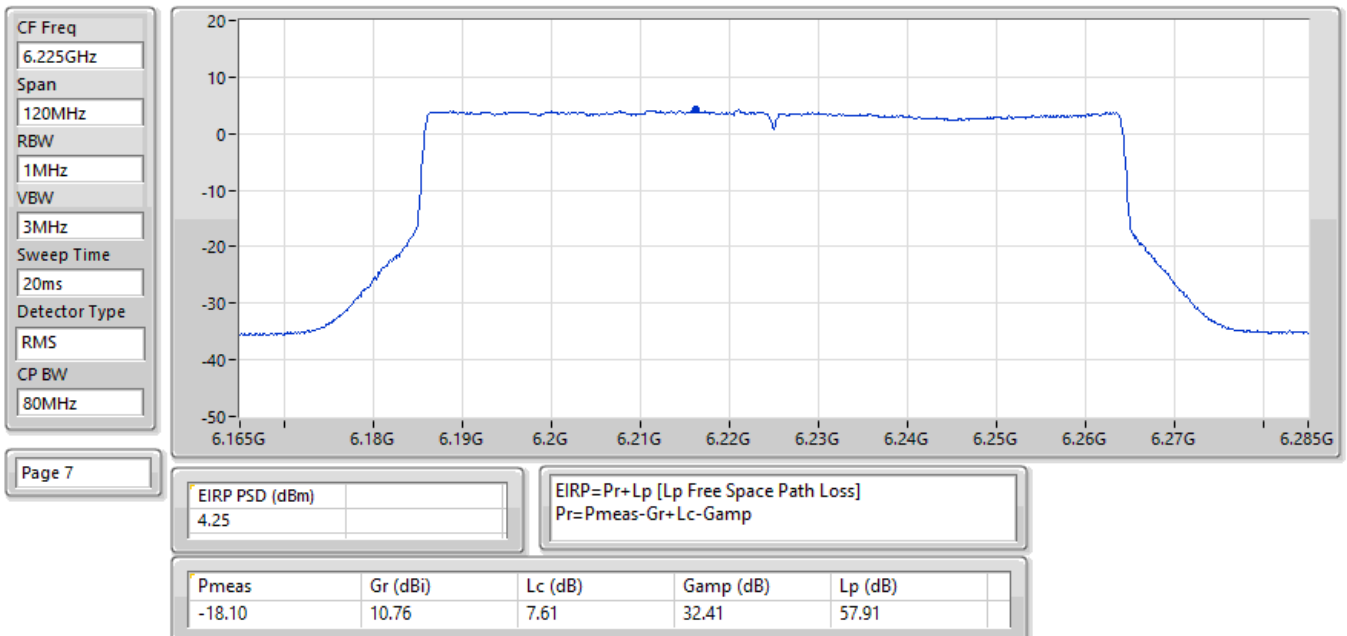


02/06/2025

EIRP PSD;Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6385MHz;TX

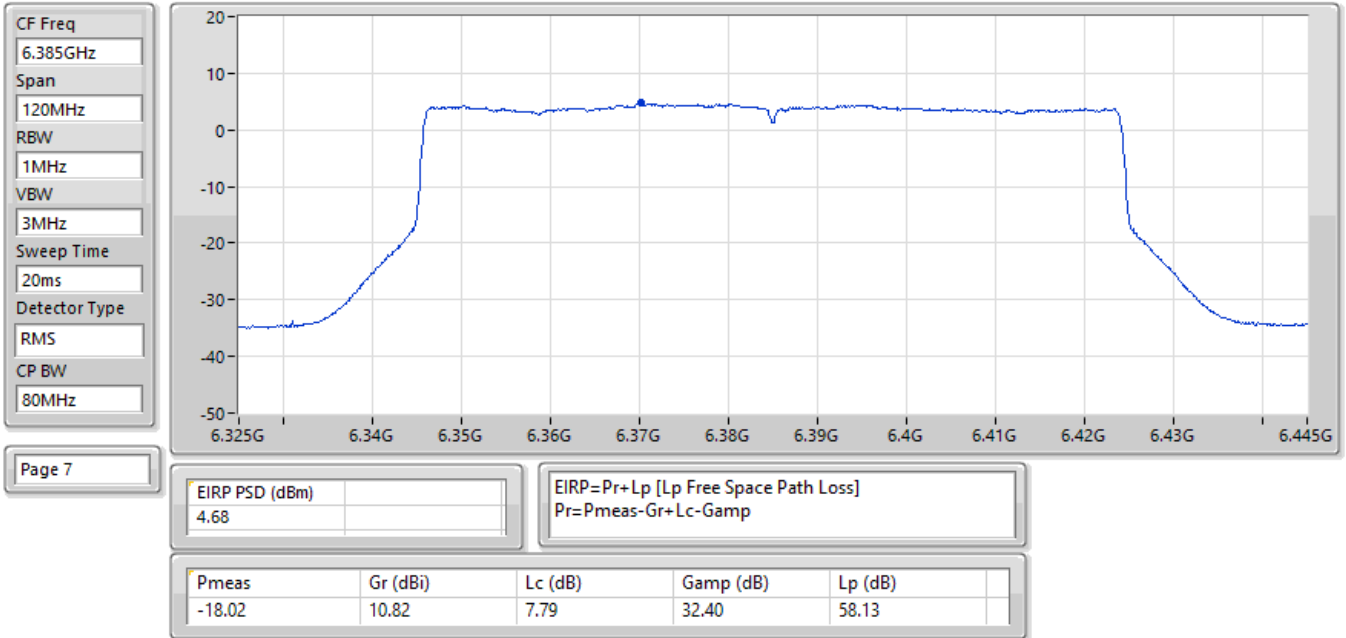


02/06/2025

EIRP PSD;Band:6.4G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6465MHz;TX

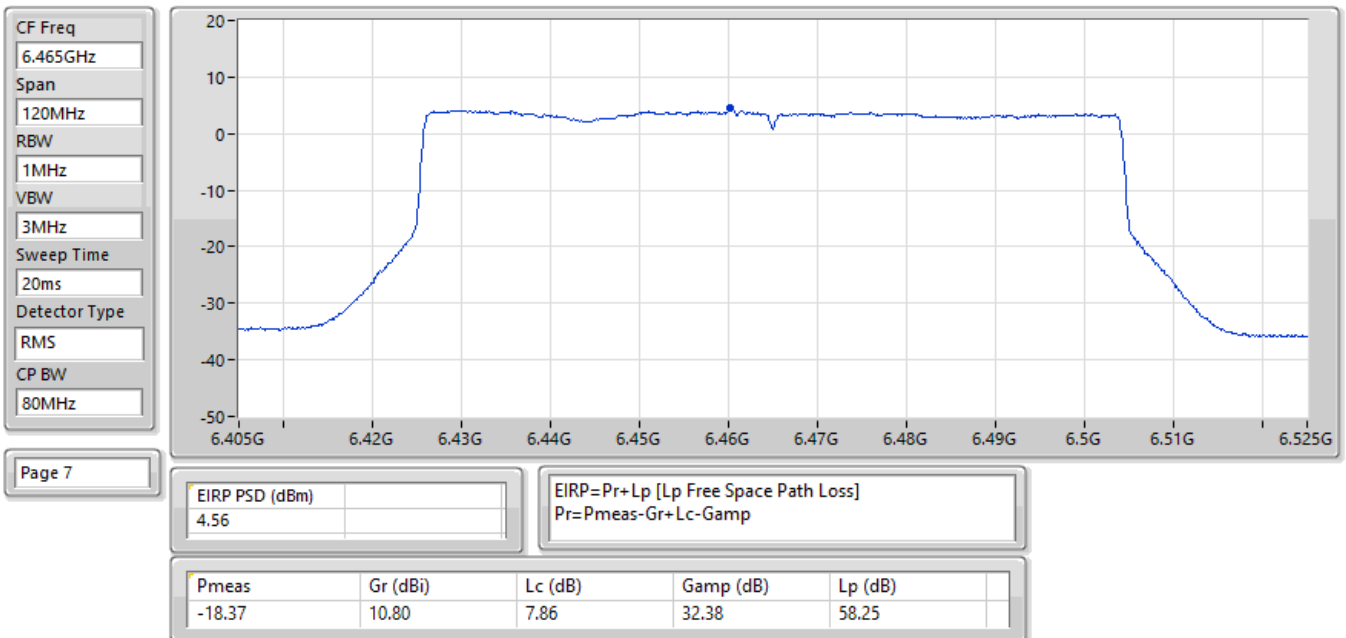


02/06/2025

EIRP PSD;Band:6.4G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6545MHz;TX

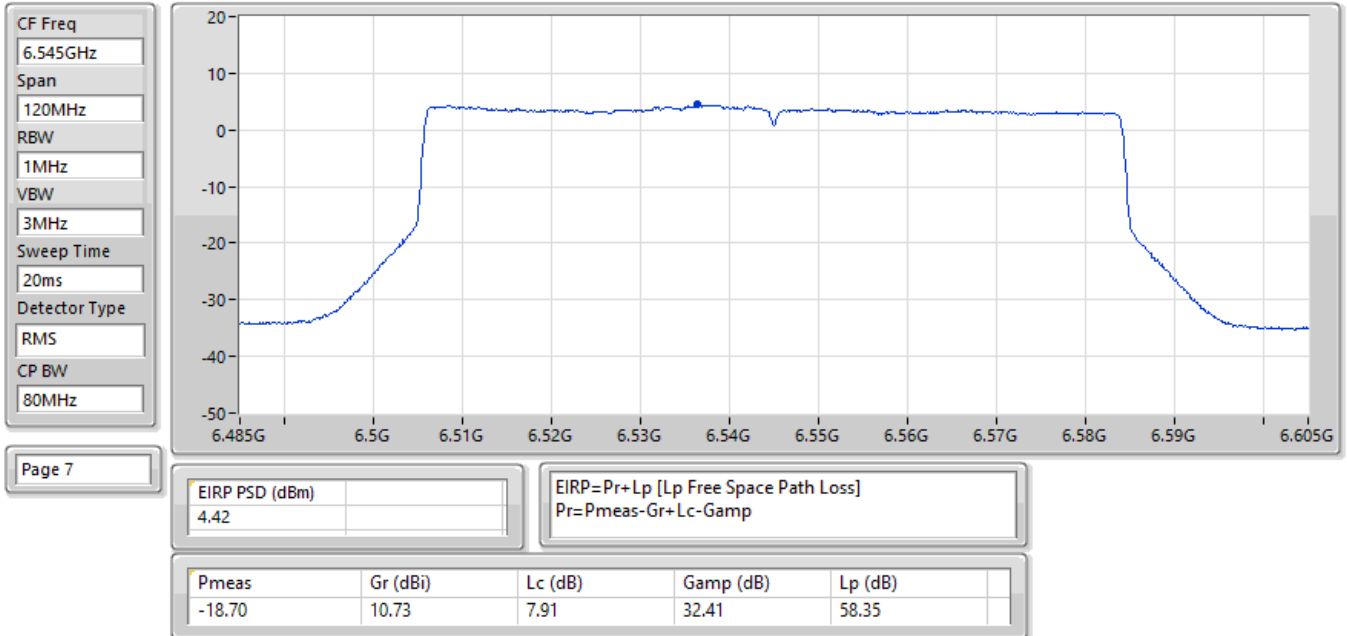


02/06/2025

EIRP PSD;Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6625MHz;TX

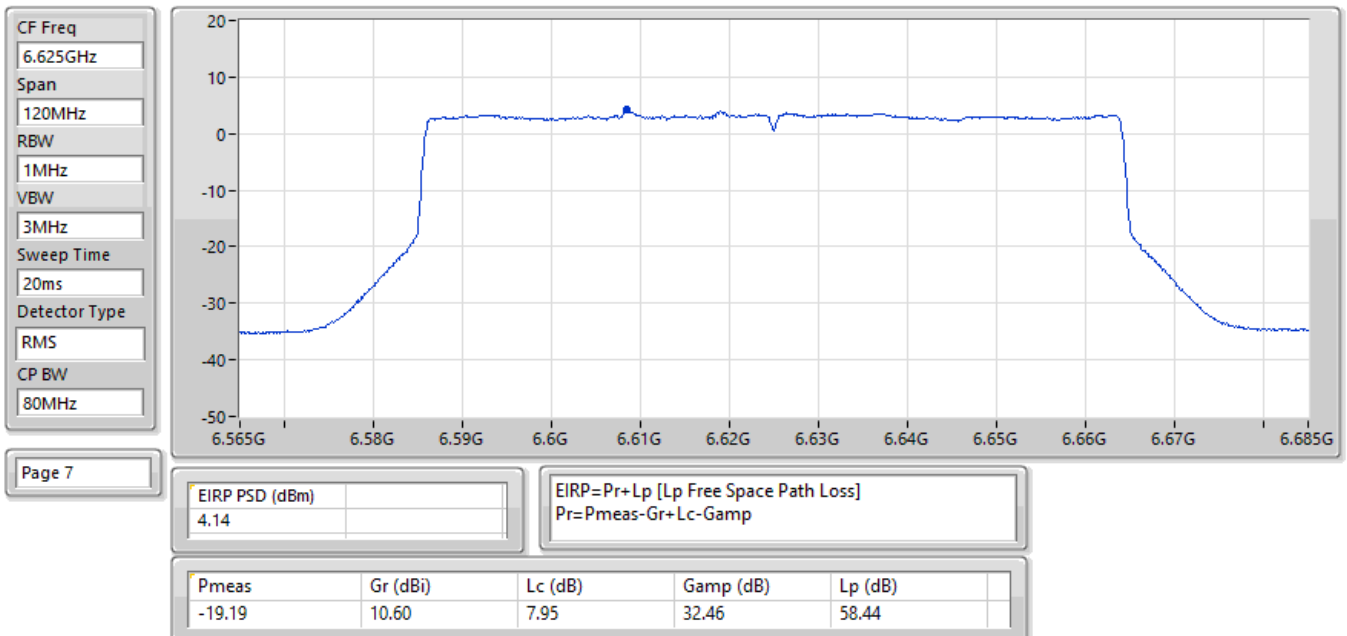


02/06/2025

EIRP PSD;Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6705MHz;TX

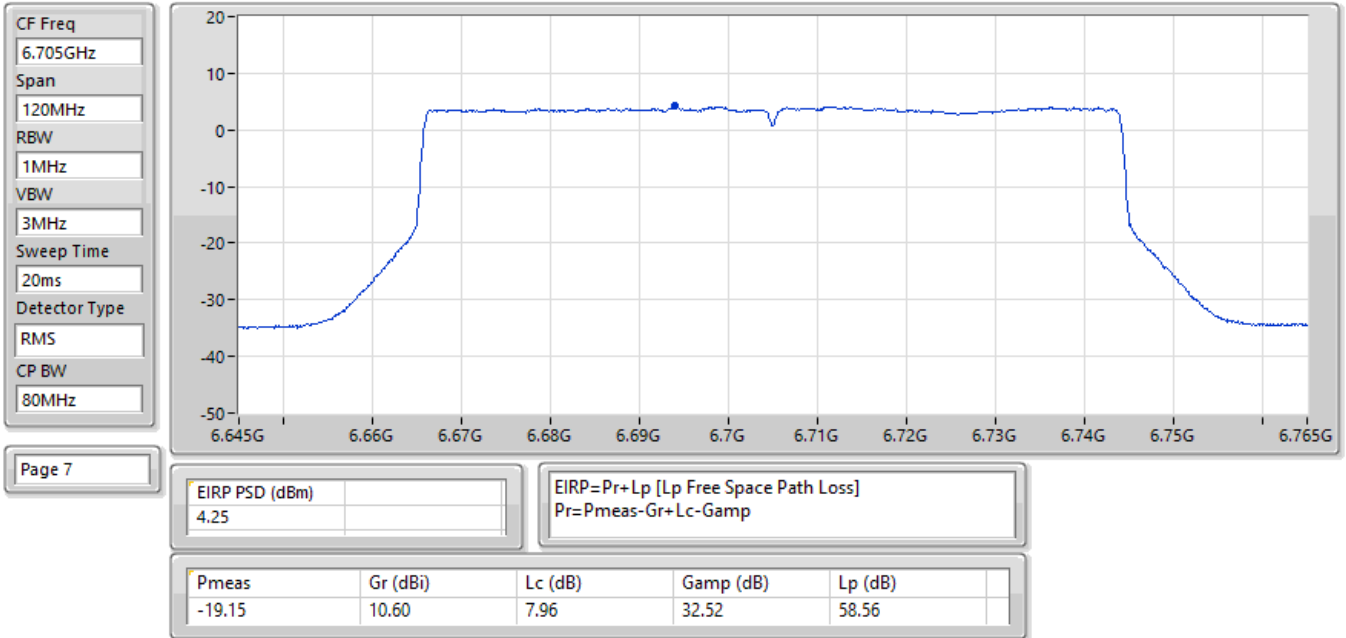


02/06/2025

EIRP PSD;Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6785MHz;TX

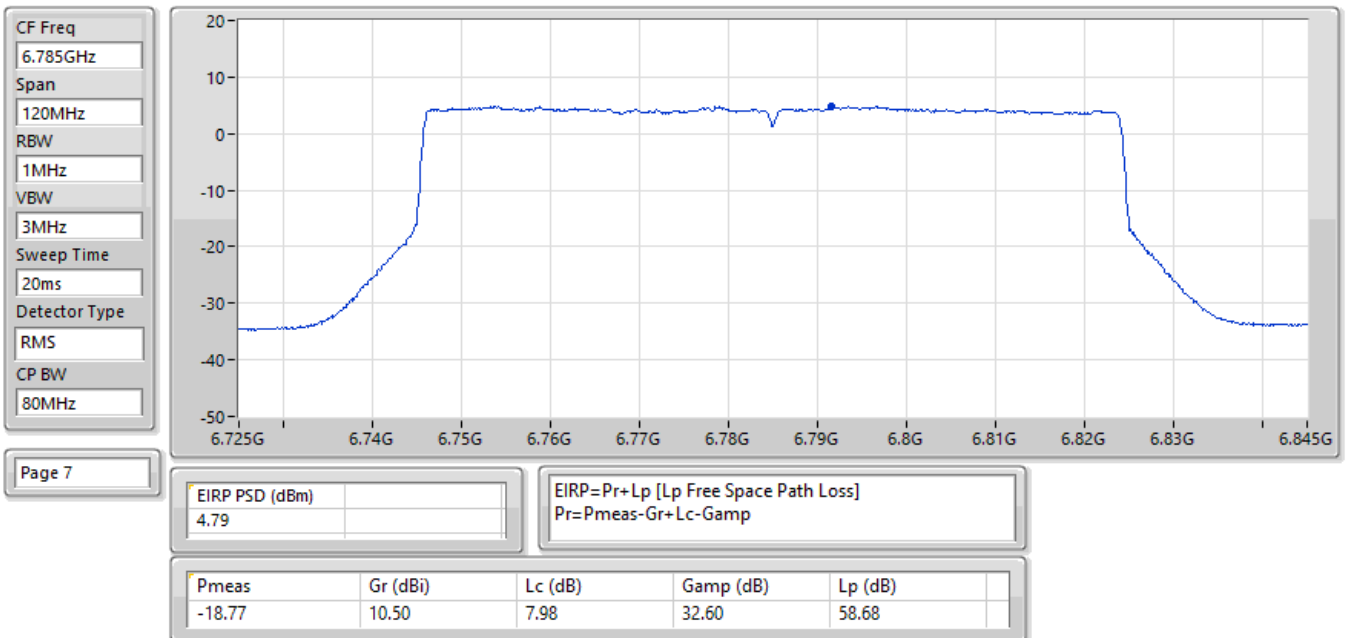


02/06/2025

EIRP PSD;Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6865MHz;TX

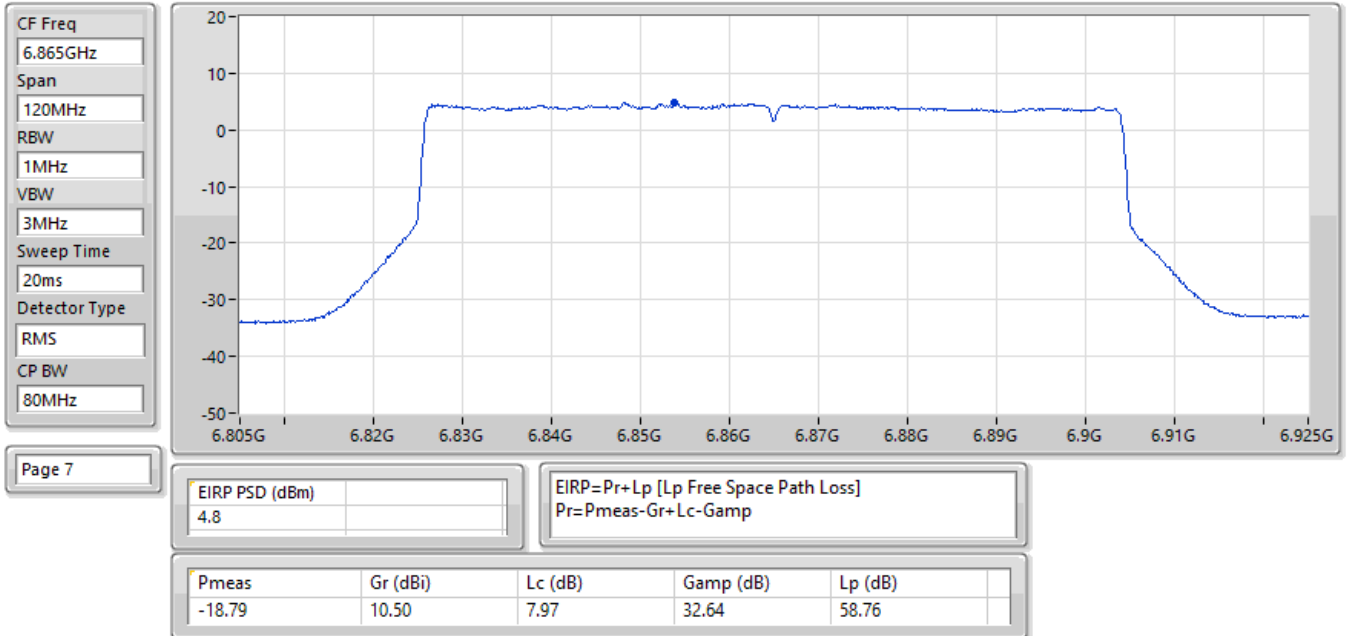


02/06/2025

EIRP PSD;Band:7.0G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6945MHz;TX

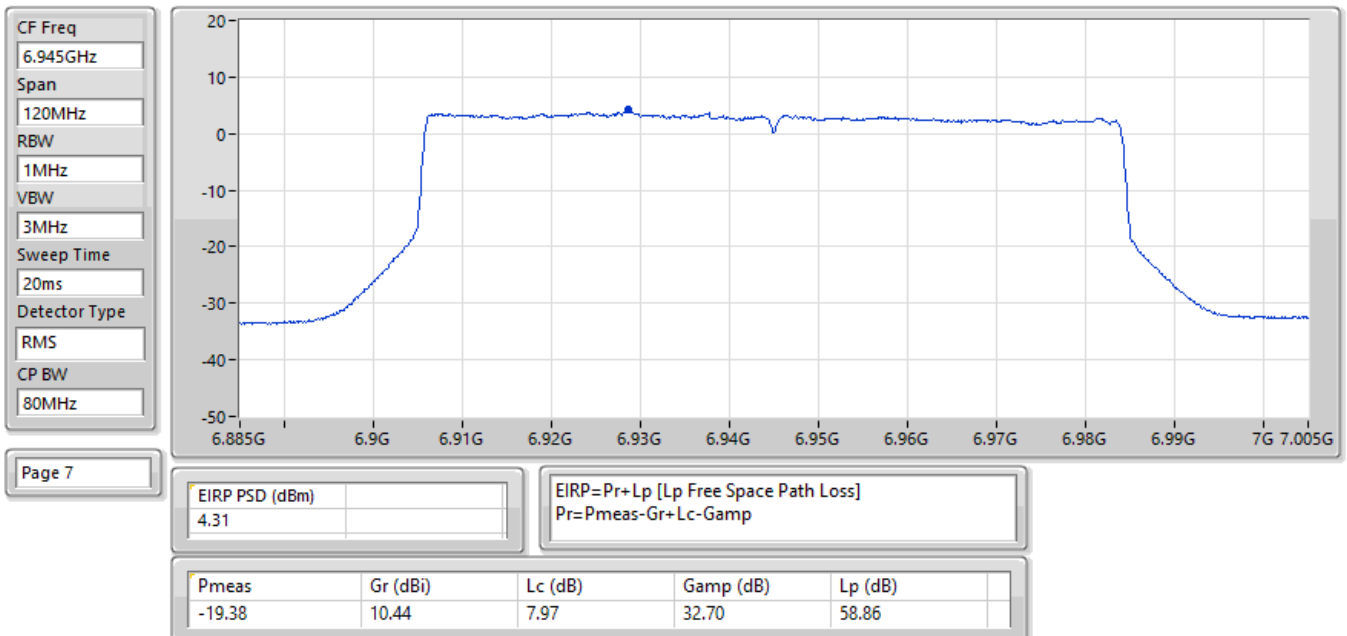


02/06/2025

EIRP PSD;Band:7.0G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:7025MHz;TX

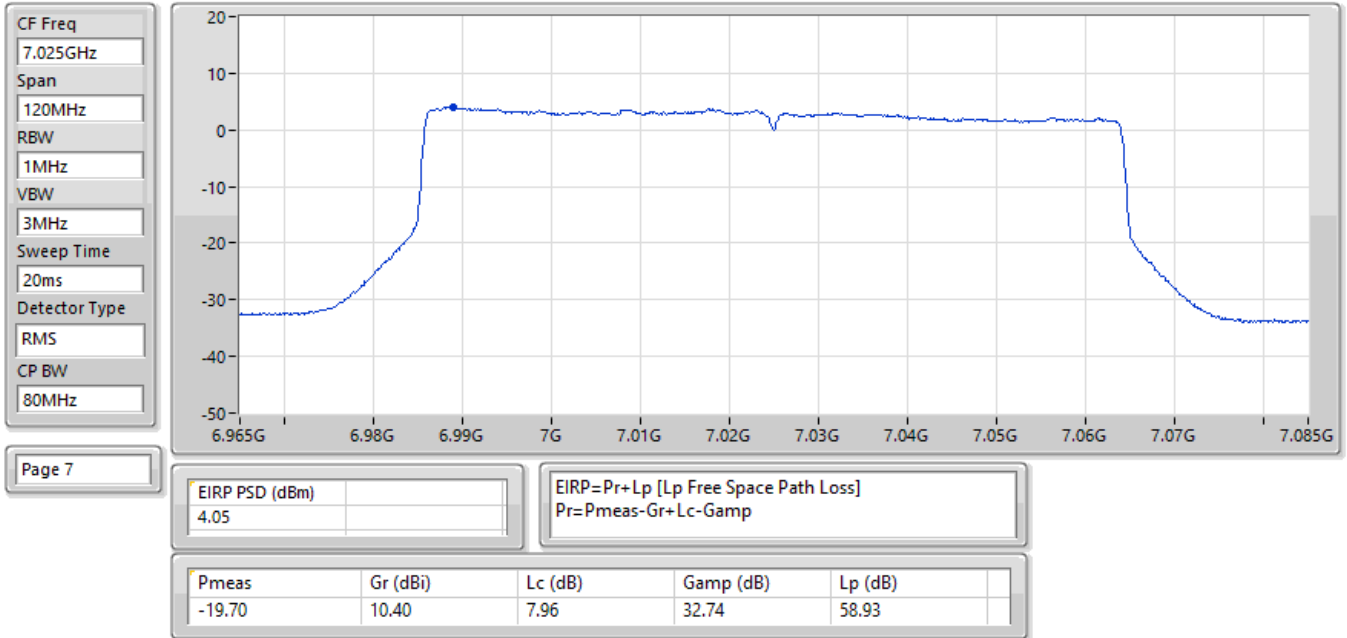


02/06/2025

EIRP PSD;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6025MHz;TX

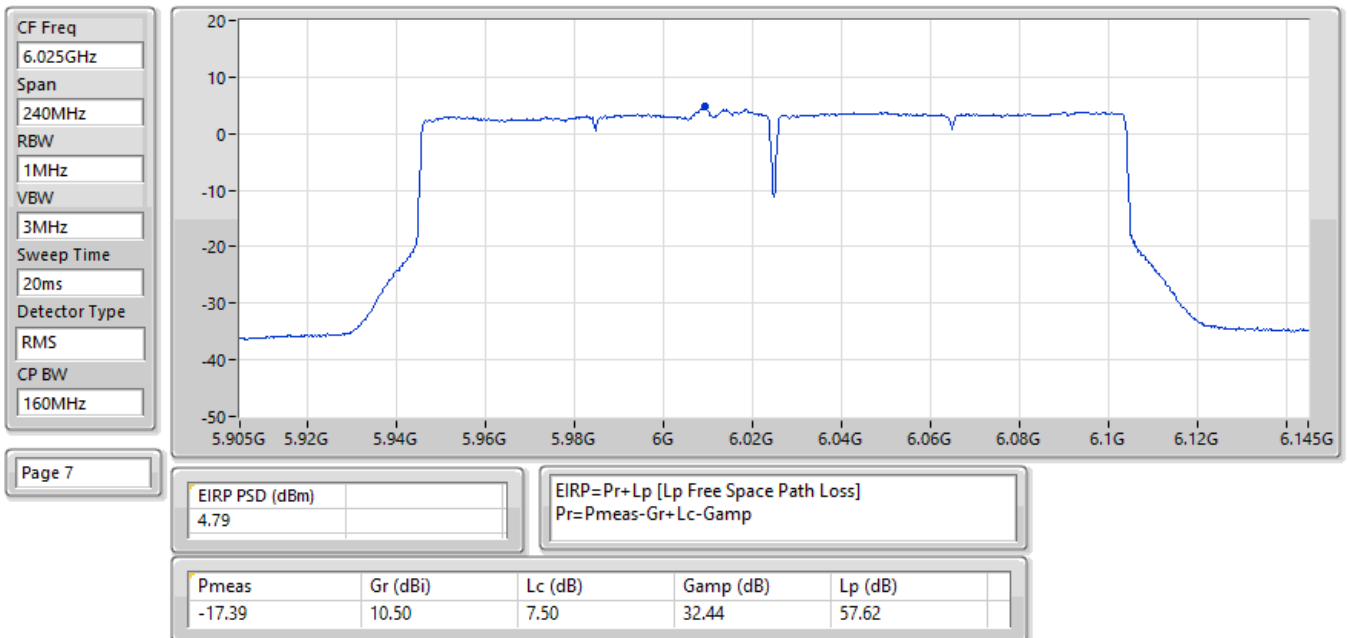


02/06/2025

EIRP PSD;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6185MHz;TX

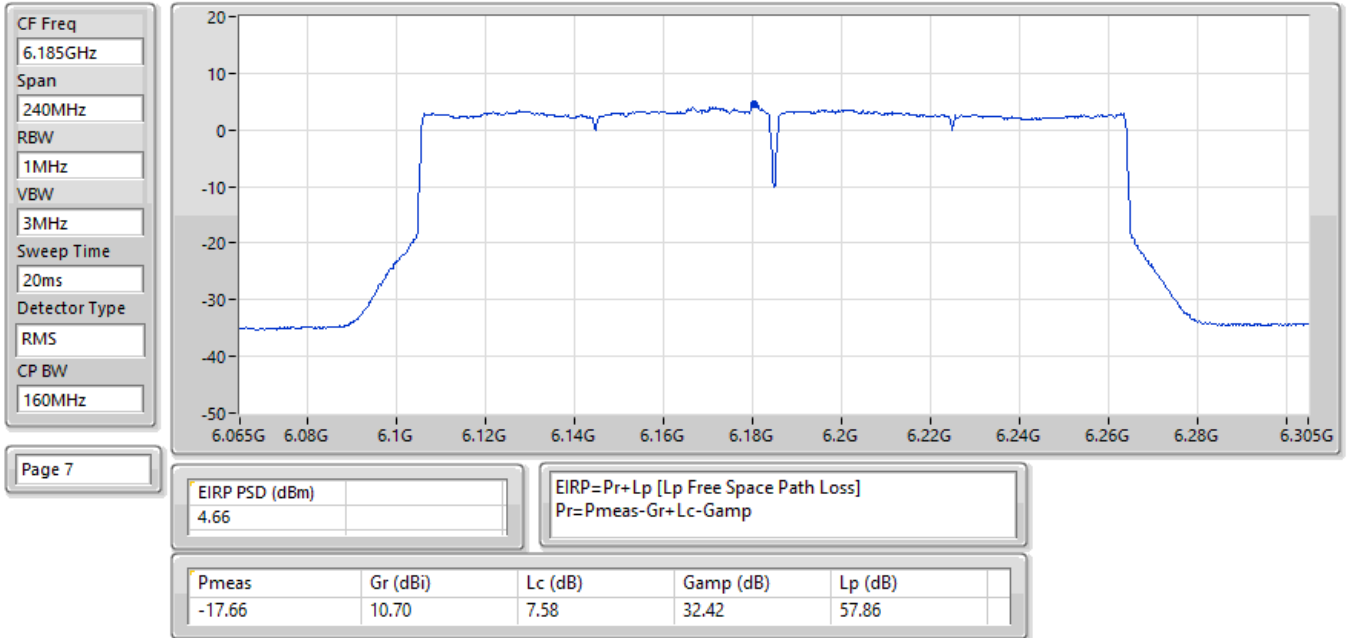


02/06/2025

EIRP PSD;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6345MHz;TX

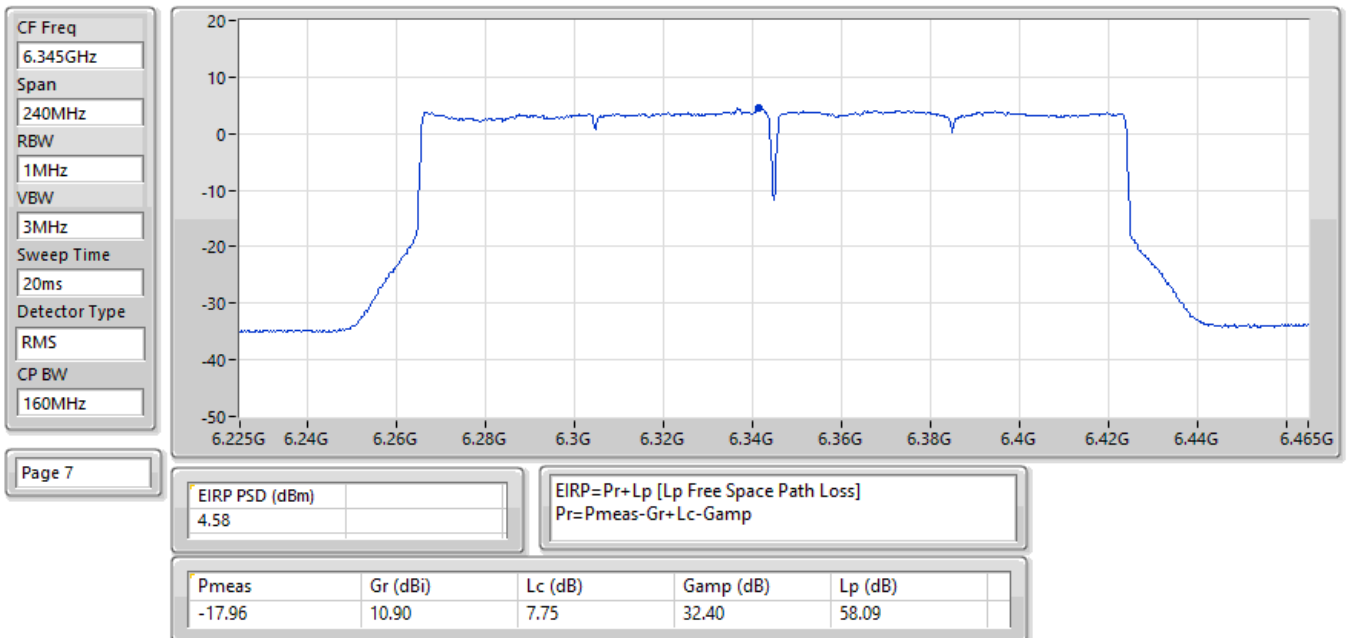


02/06/2025

EIRP PSD;Band:6.4G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6505MHz;TX

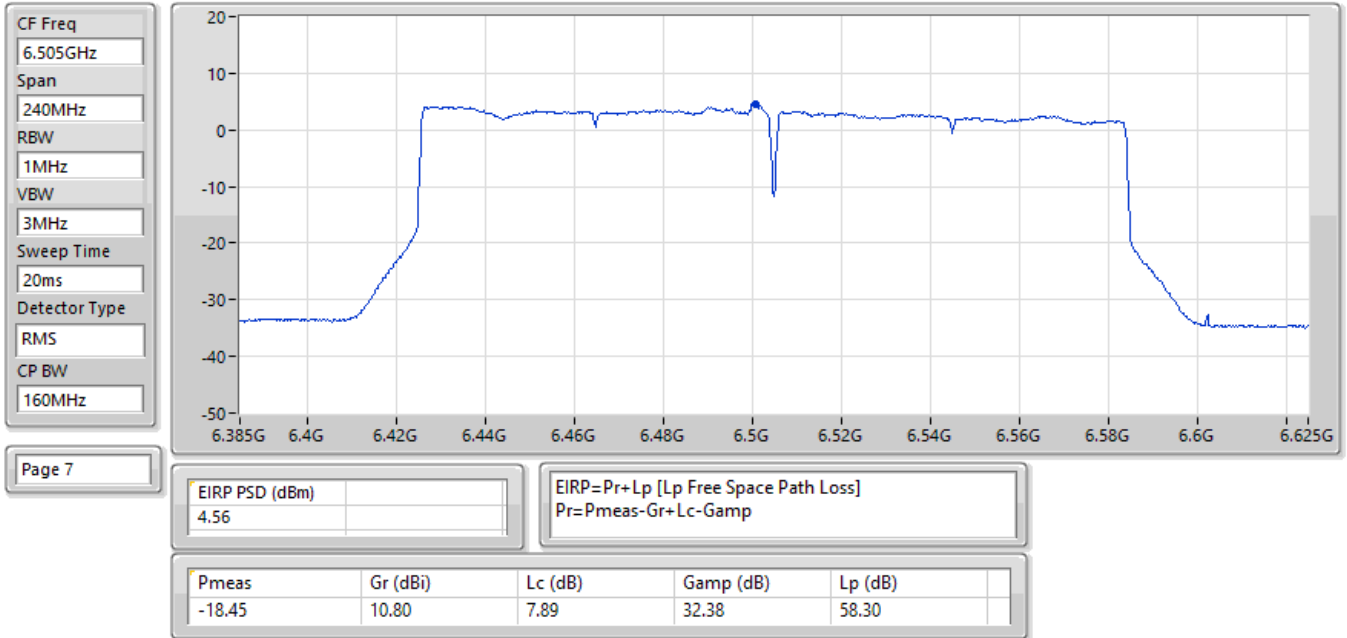


02/06/2025

EIRP PSD;Band:6.7G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6665MHz;TX

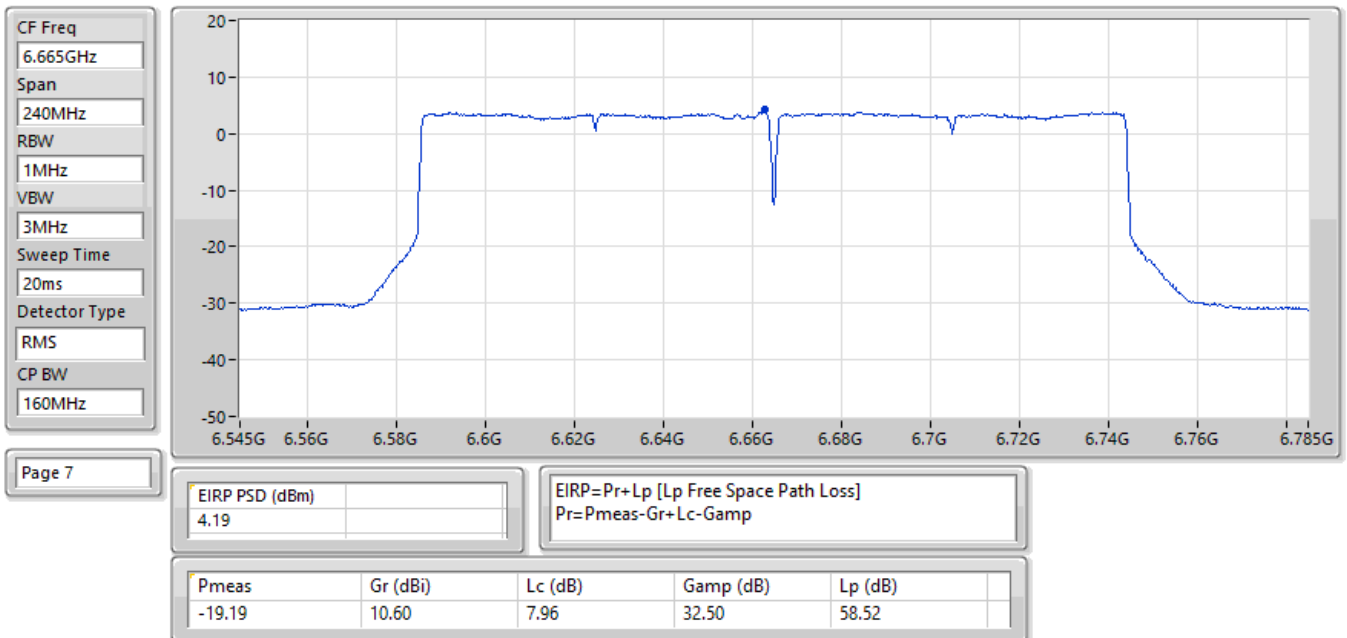


02/06/2025

EIRP PSD;Band:6.7G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6825MHz;TX

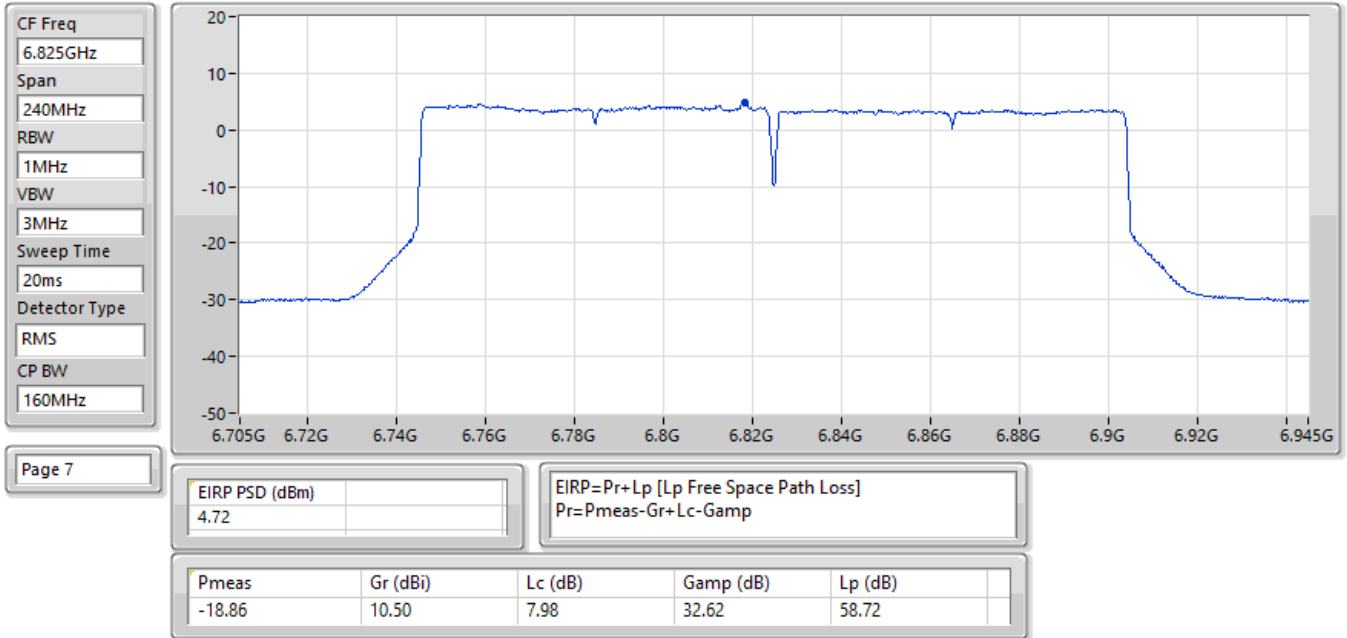


02/06/2025

EIRP PSD;Band:7.0G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6985MHz;TX

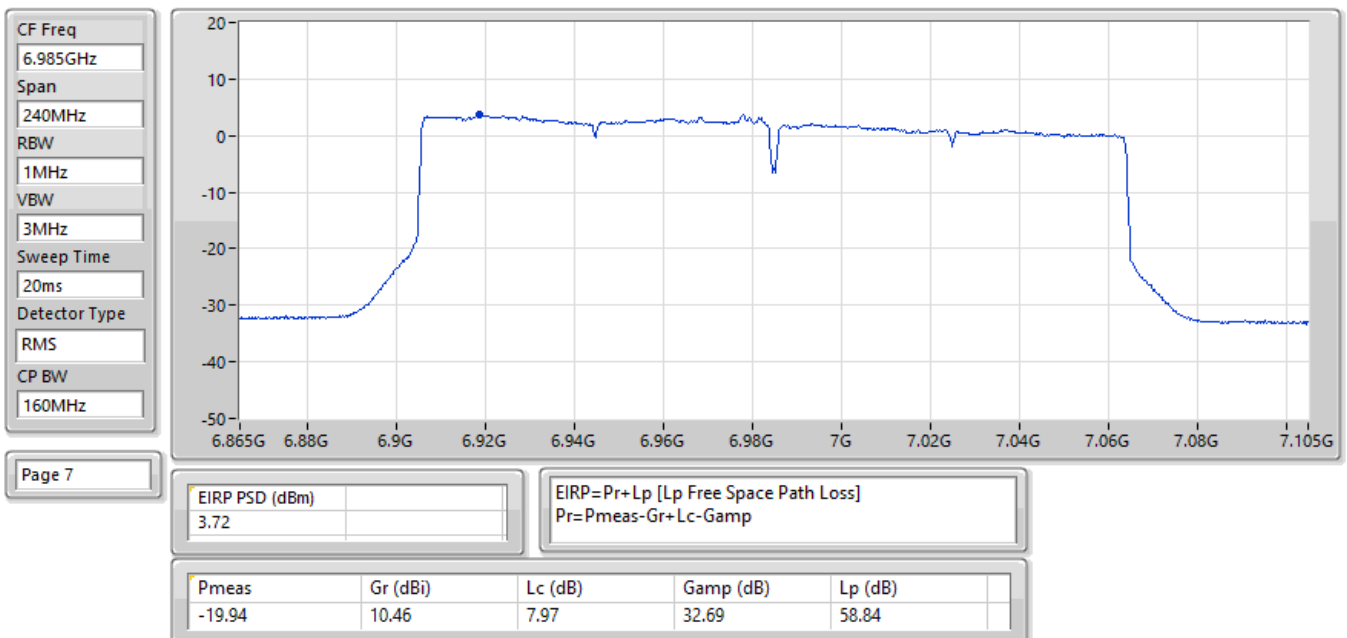


29/05/2025

EIRP PSD;Band:6.2G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6105MHz;TX

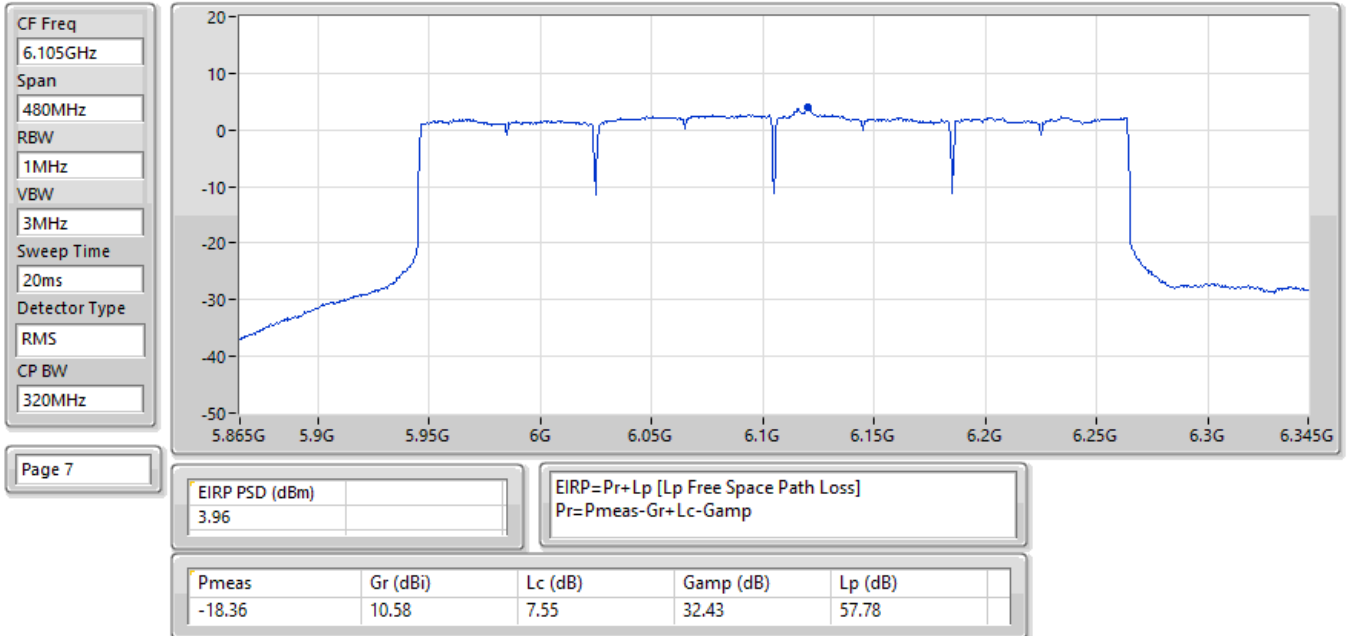


29/05/2025

EIRP PSD;Band:6.2G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6265MHz;TX

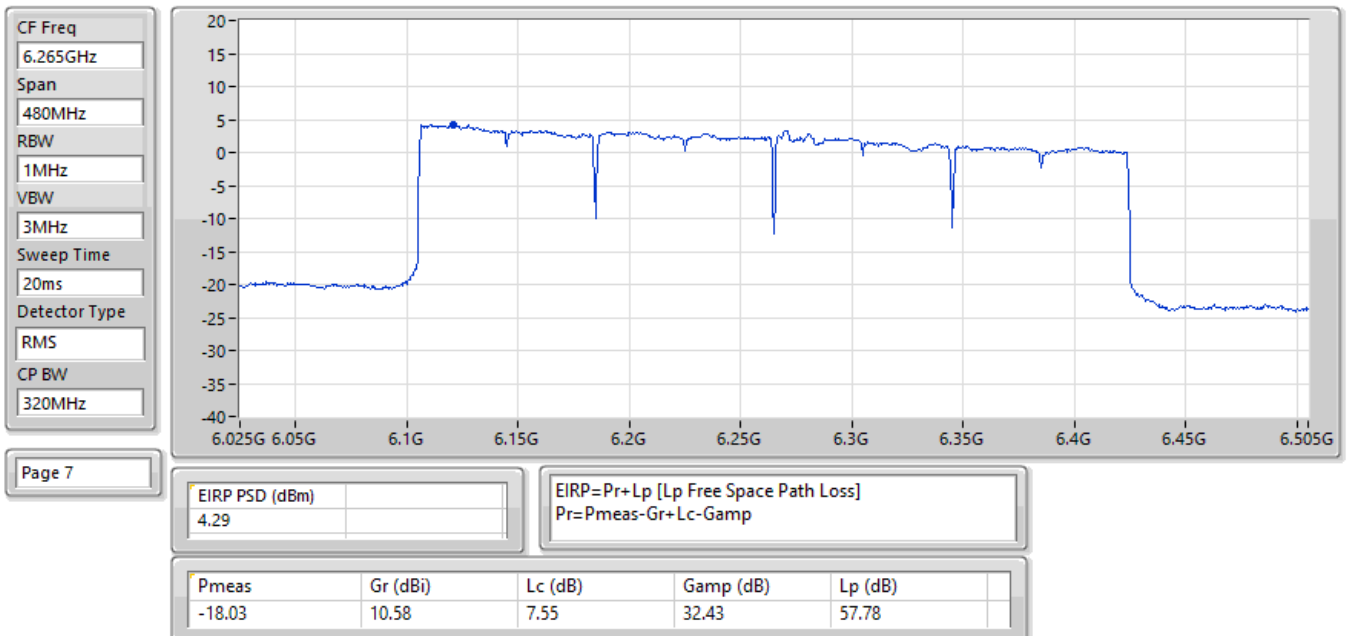


02/06/2025

EIRP PSD;Band:6.2G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6425MHz;TX

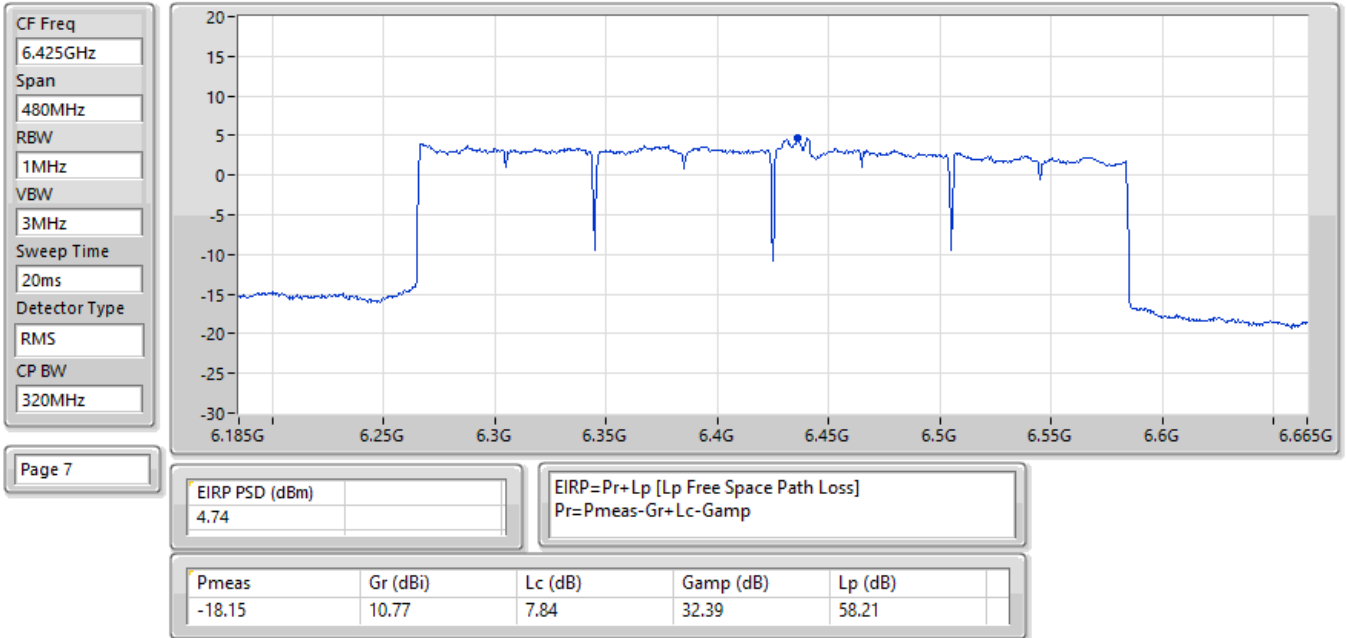


02/06/2025

EIRP PSD;Band:6.4G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6585MHz;TX

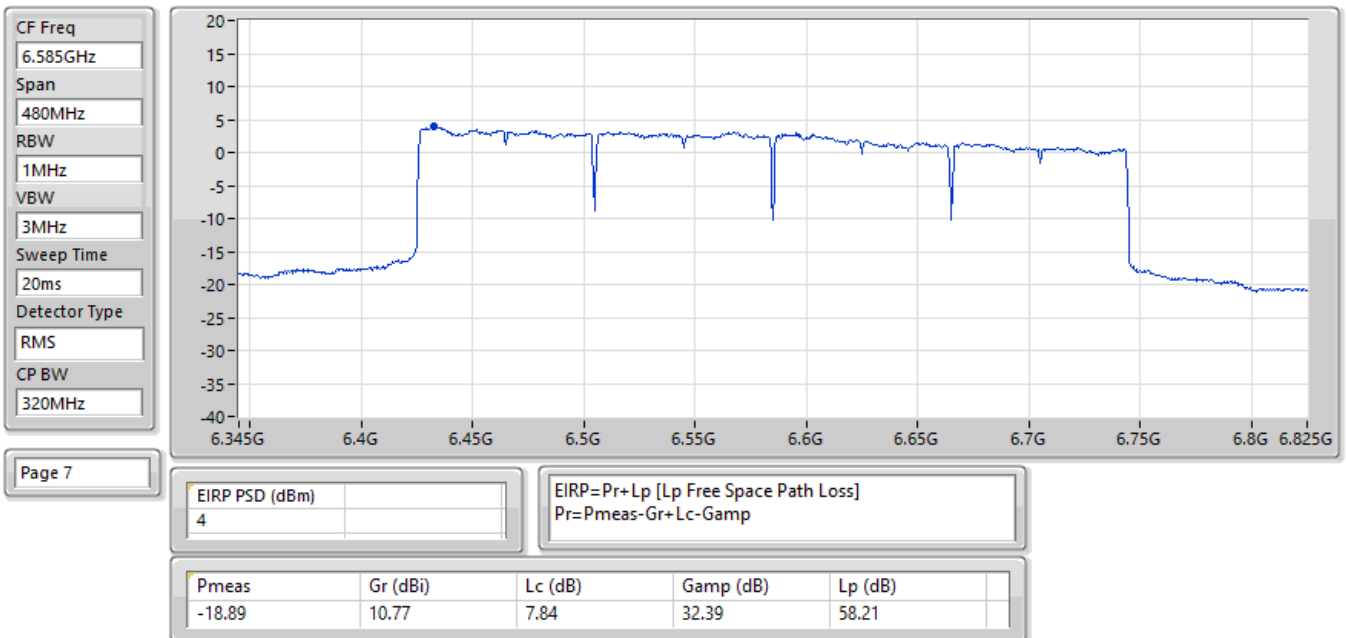


02/06/2025

EIRP PSD;Band:6.7G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6745MHz;TX

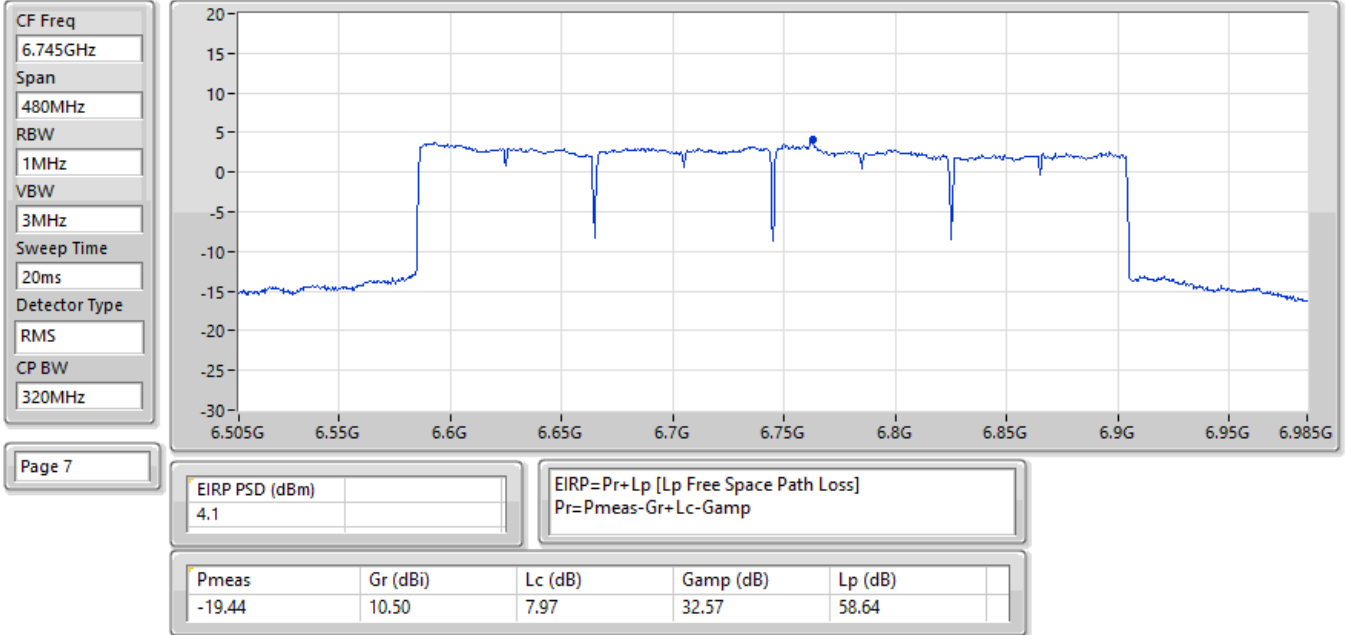

29/05/2025

EIRP PSD;Band:6.7G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6905MHz;TX

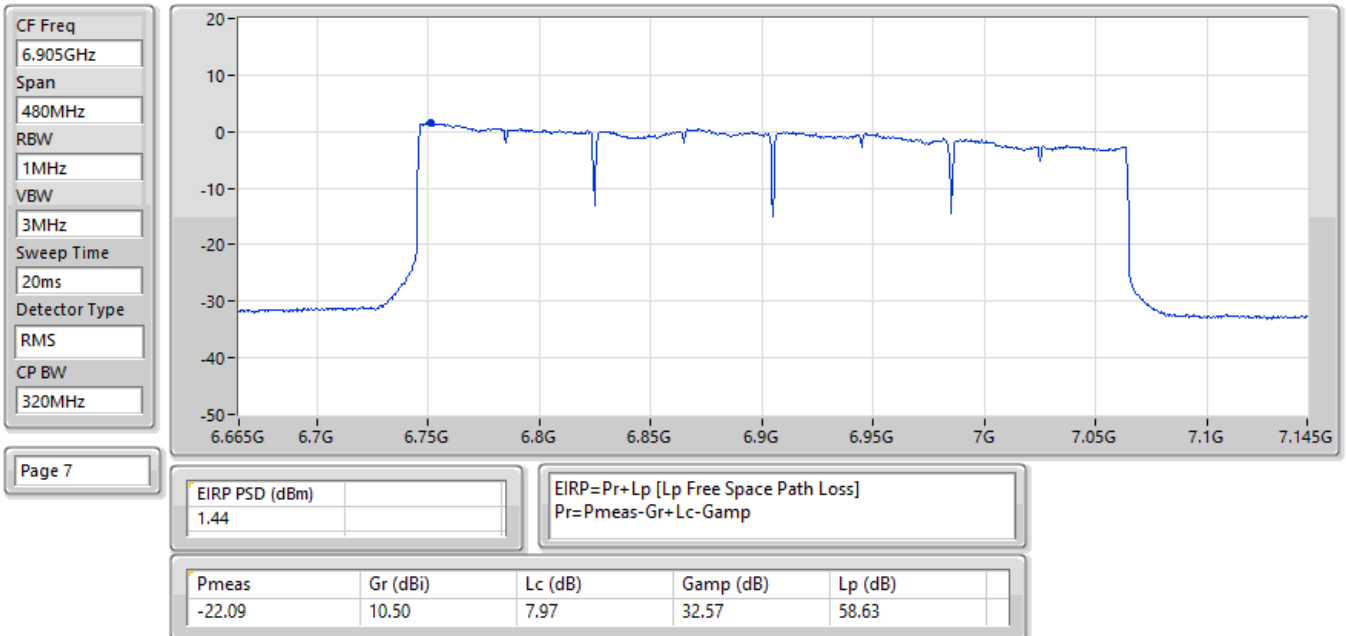




Radiated Emissions below 1GHz

Appendix E.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	PK	48.43M	36.76	40.00	-3.24	Vertical

Mode 1

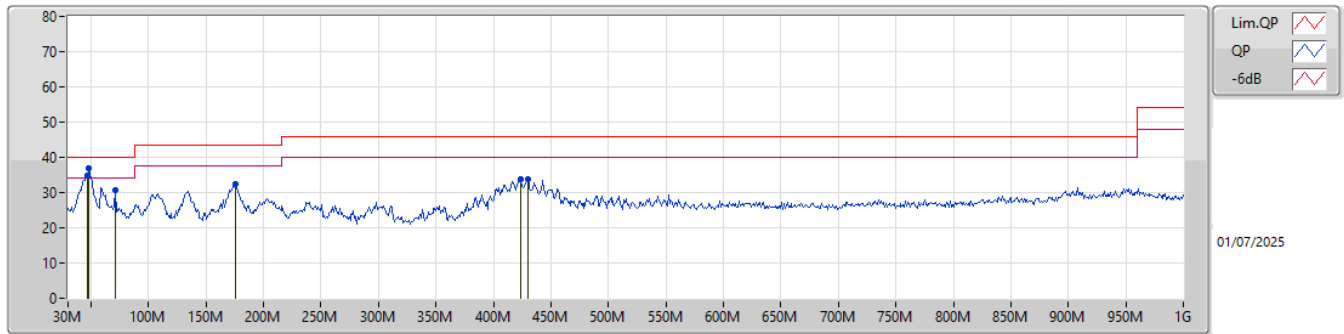

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	46.49M	34.87	40.00	-5.13	-15.65	3	Vertical	135	1.00	-	50.52	15.24	0.49	31.38		
PK	48.43M	36.76	40.00	-3.24	-16.51	3	Vertical	322	1.50	"Worst"	53.27	14.42	0.51	31.44		
PK	70.74M	30.77	40.00	-9.23	-18.73	3	Vertical	340	1.25	-	49.50	12.23	0.69	31.65		
PK	175.5M	32.30	43.50	-11.20	-14.90	3	Vertical	97	1.00	-	47.20	15.52	1.30	31.72		
PK	423.82M	33.80	46.00	-12.20	-7.37	3	Vertical	108	1.25	-	41.17	22.34	2.20	31.91		
PK	429.64M	33.72	46.00	-12.28	-7.41	3	Vertical	102	1.25	-	41.13	22.31	2.21	31.93		

Mode 1

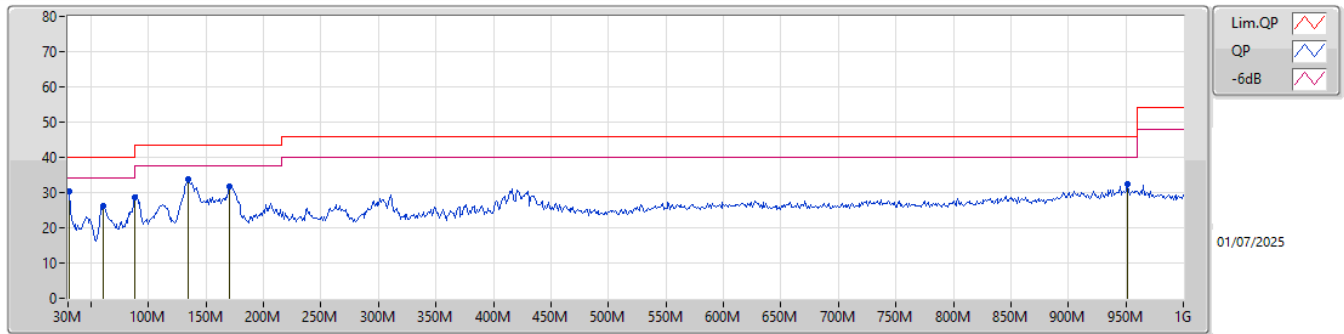

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	30.97M	30.34	40.00	-9.66	-6.74	3	Horizontal	217	2.00	"Worst"	37.08	23.62	0.33	30.69		
PK	61.04M	26.10	40.00	-13.90	-18.48	3	Horizontal	280	3.00	-	44.58	12.54	0.62	31.64		
PK	88M	28.55	43.50	-14.95	-16.34	3	Horizontal	124	2.00	-	44.89	14.51	0.82	31.67		
PK	134.76M	33.71	43.50	-9.79	-12.92	3	Horizontal	124	2.00	-	46.63	17.78	1.09	31.79		
PK	170.65M	31.65	43.50	-11.85	-14.67	3	Horizontal	262	2.00	-	46.32	15.74	1.27	31.68		
PK	951.5M	32.57	46.00	-13.43	-1.85	3	Horizontal	214	1.00	-	34.42	26.71	3.47	32.03		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
6.525-6.875GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT320-BF_Nss1,(MCS0)_2TX	Pass	AV	7.2602G	53.19	54.00	-0.81	3	Vertical	259	1.80	-

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5955MHz_TX

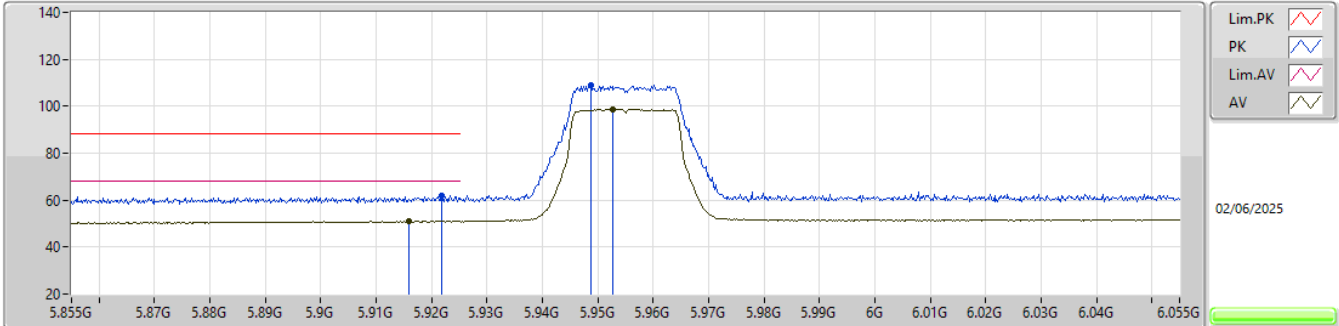


EUT_Y_2TX
Setting 16
01-U-A-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9218G	61.89	88.20	-26.31	51.96	3	Vertical	273	1.80	-	34.93	7.44	32.44			
RMS	5.916G	51.02	68.20	-17.18	41.12	3	Vertical	273	1.80	-	34.90	7.44	32.44			
PK	5.9488G	108.93	Inf	-Inf	98.82	3	Vertical	273	1.80	-	35.09	7.46	32.44			
RMS	5.9528G	98.86	Inf	-Inf	88.73	3	Vertical	273	1.80	-	35.11	7.46	32.44			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


5955MHz_TX

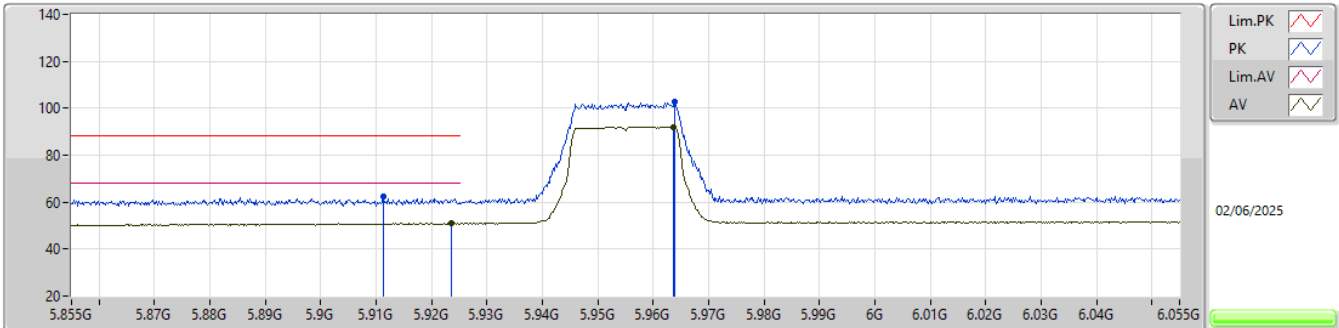EUT_Y_2TX
Setting 16
01-U-A-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9112G	62.53	88.20	-25.67	52.67	3	Horizontal	325	2.74	-	34.87	7.43	32.44			
RMS	5.9236G	51.03	68.20	-17.17	41.09	3	Horizontal	325	2.74	-	34.94	7.44	32.44			
PK	5.9638G	102.84	Inf	-Inf	92.65	3	Horizontal	325	2.74	-	35.16	7.47	32.44			
RMS	5.9636G	92.10	Inf	-Inf	81.92	3	Horizontal	325	2.74	-	35.15	7.47	32.44			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


5955MHz_TX

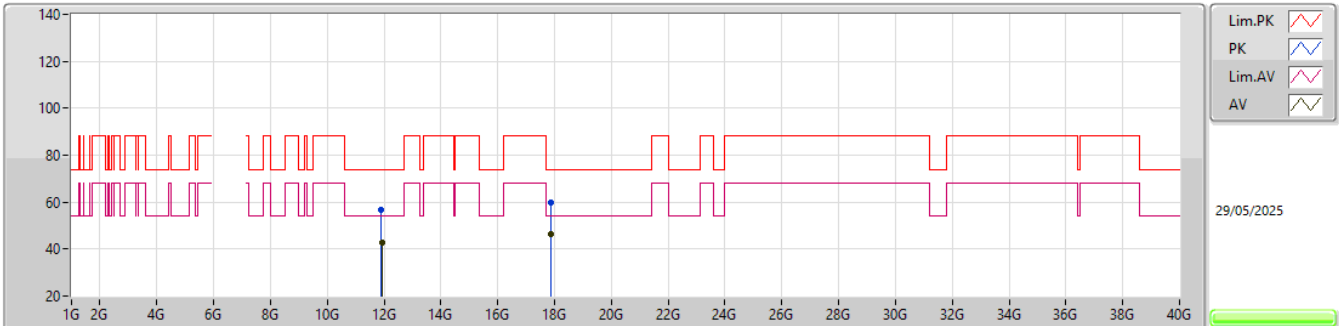EUT_Y_2TX
Setting 28
01-U-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.90534G	56.98	74.00	-17.02	51.27	3	Vertical	144	1.71	-	38.79	12.26	45.34				
AV	11.91842G	42.70	54.00	-11.30	37.00	3	Vertical	144	1.71	-	38.76	12.28	45.34				
PK	17.86454G	59.98	74.00	-14.02	48.95	3	Vertical	179	1.86	-	41.16	14.19	44.32				
AV	17.87496G	46.53	54.00	-7.47	35.46	3	Vertical	179	1.86	-	41.20	14.19	44.32				

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


5955MHz_TX

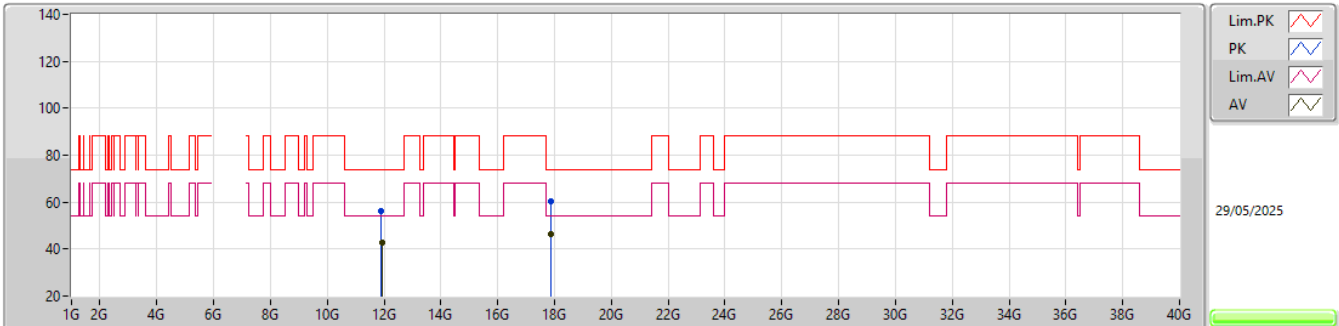EUT_Y_2TX
Setting 28
01-U-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.91336G	56.44	74.00	-17.56	50.74	3	Horizontal	90	1.76	-	38.77	12.27	45.34			
AV	11.91802G	42.93	54.00	-11.07	37.23	3	Horizontal	90	1.76	-	38.76	12.28	45.34			
PK	17.8744G	60.13	74.00	-13.87	49.06	3	Horizontal	76	1.52	-	41.20	14.19	44.32			
AV	17.8721G	46.56	54.00	-7.44	35.50	3	Horizontal	76	1.52	-	41.19	14.19	44.32			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


5955MHz_TX

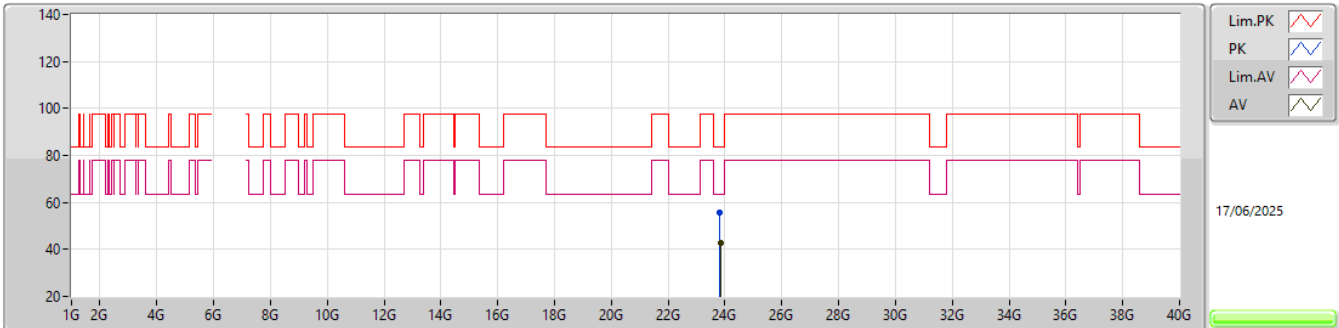EUT_Y_2TX
Setting 28
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.82954G	55.66	83.54	-27.88	41.23	1	Vertical	214	2.41	-	39.10	23.00	47.67			
AV	23.83236G	42.60	63.54	-20.94	28.17	1	Vertical	214	2.41	-	39.10	23.00	47.67			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


5955MHz_TX

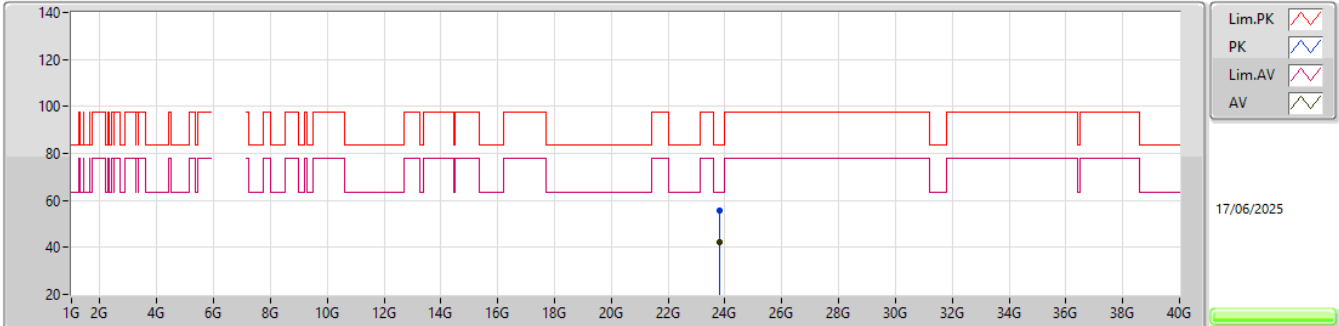EUT_Y_2TX
Setting 28
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.82438G	55.44	83.54	-28.10	41.02	1	Horizontal	159	1.93	-	39.10	22.99	47.67			
AV	23.82042G	42.50	63.54	-21.04	28.08	1	Horizontal	159	1.93	-	39.10	22.99	47.67			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6195MHz_TX

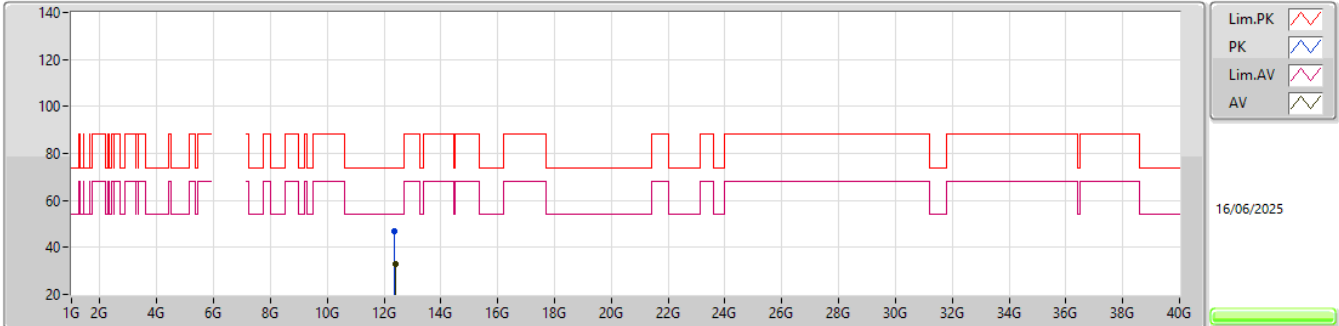


EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.37881G	47.05	74.00	-26.95	61.94	3	Vertical	126	1.79	-	38.70	12.02	65.61			
AV	12.38991G	32.93	54.00	-21.07	47.82	3	Vertical	126	1.79	-	38.70	12.02	65.61			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6195MHz_TX

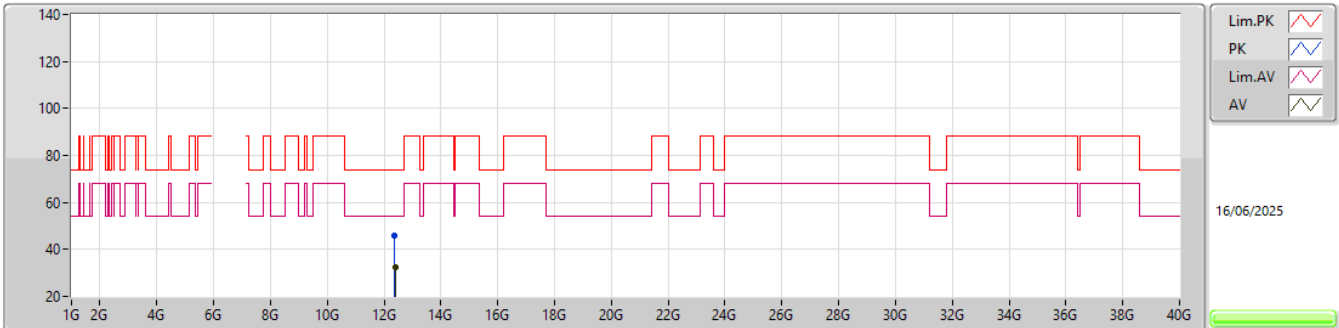EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.37926G	45.61	74.00	-28.39	60.50	3	Horizontal	13	2.99	-	38.70	12.02	65.61			
AV	12.39234G	32.59	54.00	-21.41	47.48	3	Horizontal	13	2.99	-	38.70	12.02	65.61			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6195MHz_TX

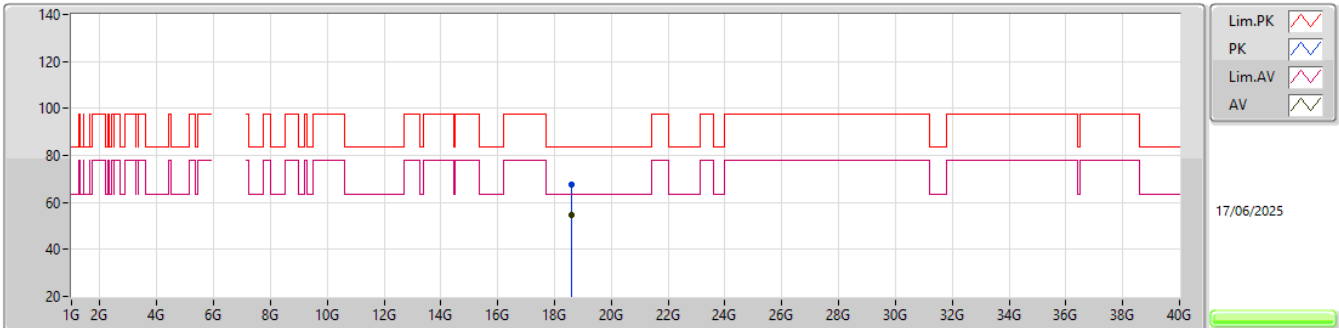EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.59268G	67.38	83.54	-16.16	57.36	1	Vertical	70	2.61	-	37.80	20.61	48.39			
AV	18.59802G	54.50	63.54	-9.04	44.49	1	Vertical	70	2.61	-	37.80	20.61	48.40			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6195MHz_TX

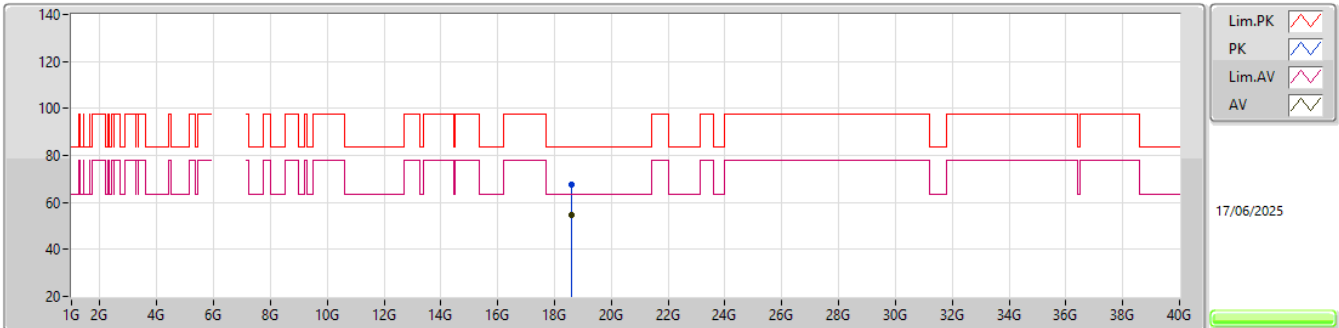EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.59724G	67.63	83.54	-15.91	57.62	1	Horizontal	201	2.65	-	37.80	20.61	48.40			
AV	18.59934G	54.42	63.54	-9.12	44.41	1	Horizontal	201	2.65	-	37.80	20.61	48.40			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6415MHz_TX

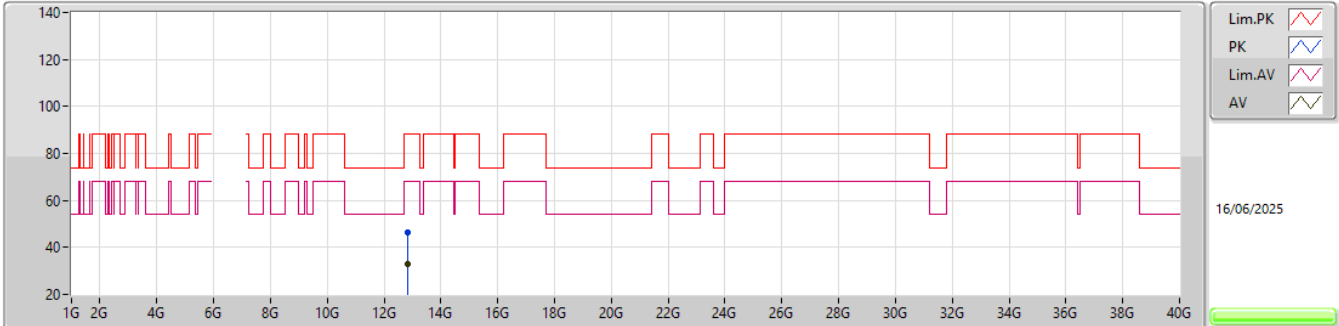EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.81947G	46.16	88.20	-42.04	60.35	3	Vertical	154	1.96	-	38.98	11.96	65.13			
RMS	12.82934G	32.75	68.20	-35.45	46.89	3	Vertical	154	1.96	-	39.02	11.96	65.12			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6415MHz_TX

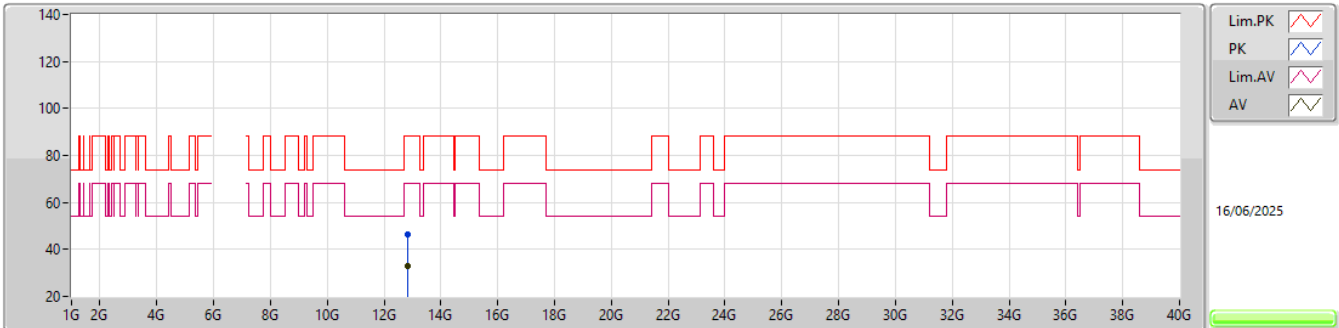EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.82757G	46.23	88.20	-41.97	60.38	3	Horizontal	292	2.87	-	39.01	11.96	65.12			
RMS	12.82982G	32.76	68.20	-35.44	46.89	3	Horizontal	292	2.87	-	39.02	11.96	65.11			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6415MHz_TX

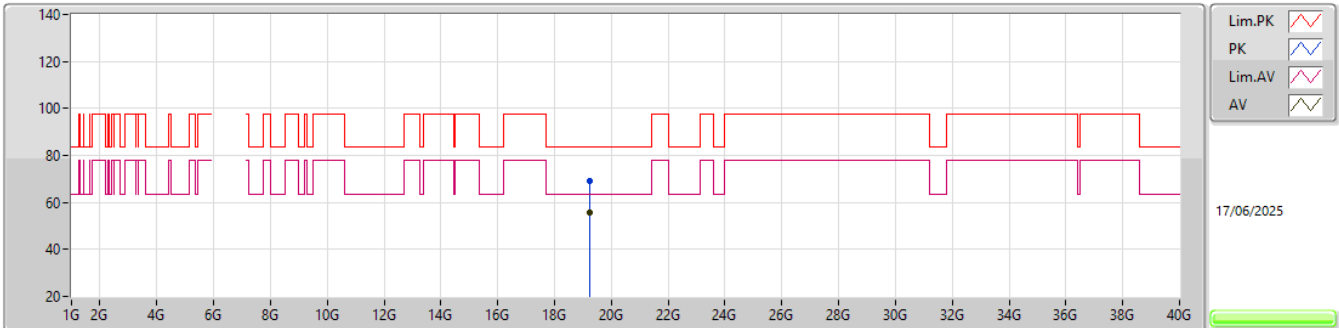EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.2486G	69.25	83.54	-14.29	59.28	1	Vertical	0	1.46	-	37.99	20.78	48.80			
AV	19.24494G	55.87	63.54	-7.67	45.91	1	Vertical	0	1.46	-	37.98	20.78	48.80			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6415MHz_TX

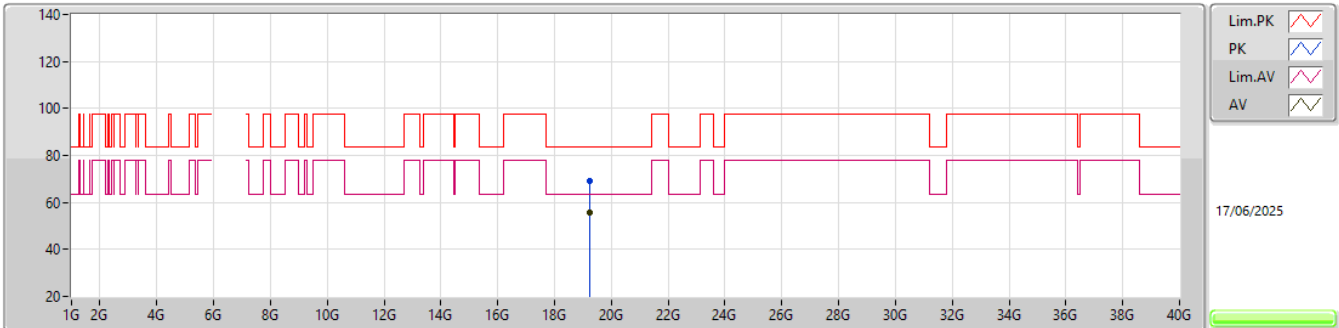EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.25922G	69.14	83.54	-14.40	59.20	1	Horizontal	156	1.27	-	37.96	20.78	48.80			
AV	19.24368G	55.81	63.54	-7.73	45.86	1	Horizontal	156	1.27	-	37.97	20.78	48.80			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6435MHz_TX

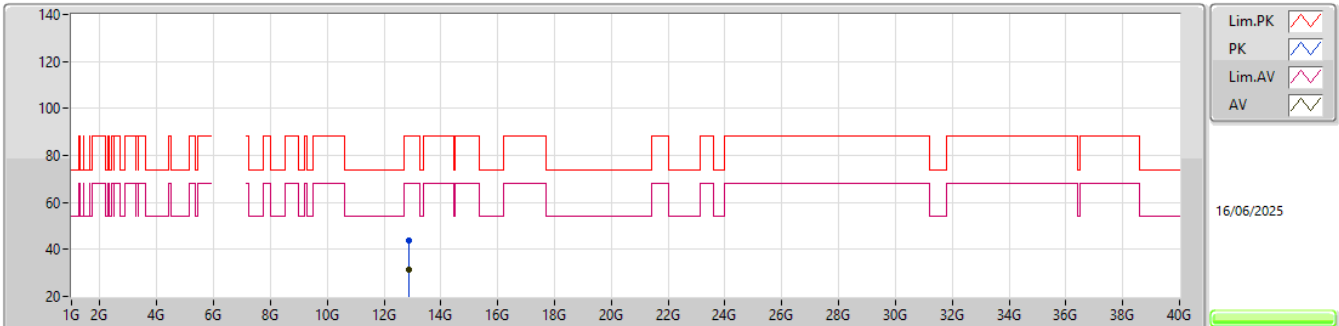EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.87471G	43.87	88.20	-44.33	57.82	3	Vertical	24	1.20	-	39.15	11.95	65.05			
RMS	12.88428G	31.43	68.20	-36.77	45.35	3	Vertical	24	1.20	-	39.17	11.95	65.04			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6435MHz_TX

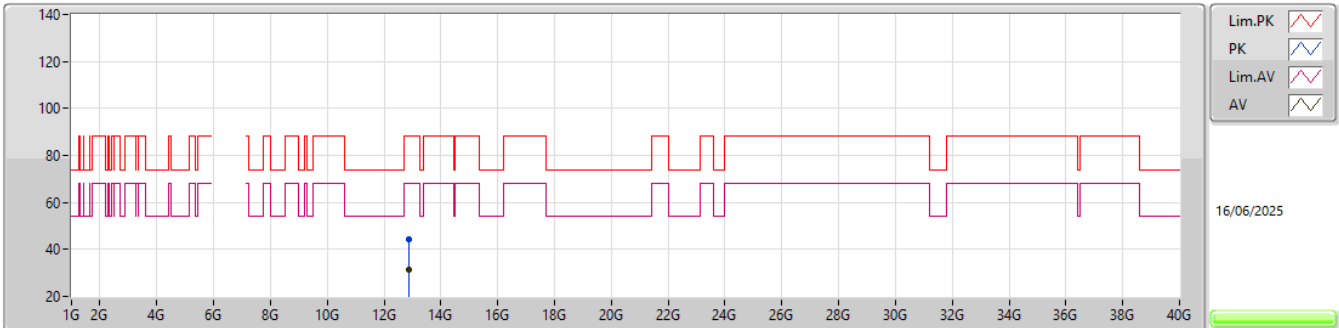EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.88482G	44.50	88.20	-43.70	58.42	3	Horizontal	41	2.67	-	39.17	11.95	65.04			
RMS	12.885G	31.36	68.20	-36.84	45.28	3	Horizontal	41	2.67	-	39.17	11.95	65.04			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6435MHz_TX

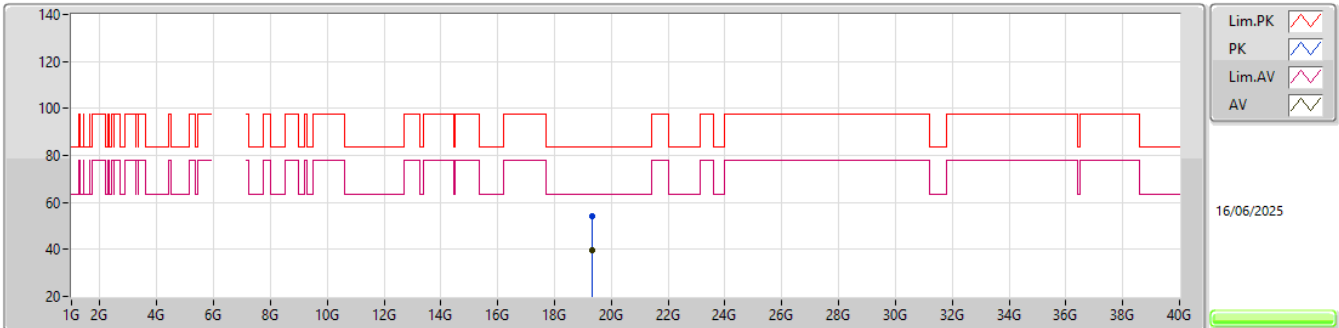EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.31562G	54.23	83.54	-29.31	44.42	1	Vertical	207	1.33	-	37.80	20.81	48.80			
AV	19.31448G	39.88	63.54	-23.66	30.07	1	Vertical	207	1.33	-	37.80	20.81	48.80			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6435MHz_TX

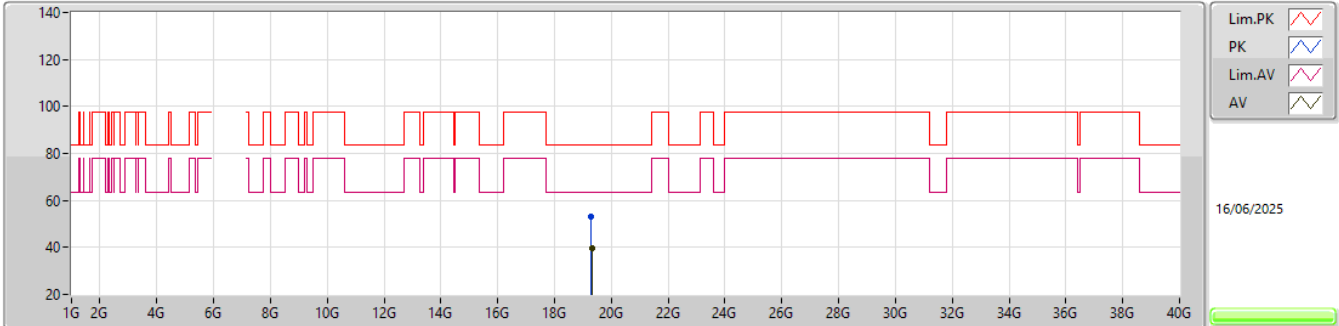EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.302G	52.87	83.54	-30.67	43.06	1	Horizontal	14	1.93	-	37.80	20.81	48.80			
AV	19.30704G	39.74	63.54	-23.80	29.93	1	Horizontal	14	1.93	-	37.80	20.81	48.80			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6475MHz_TX

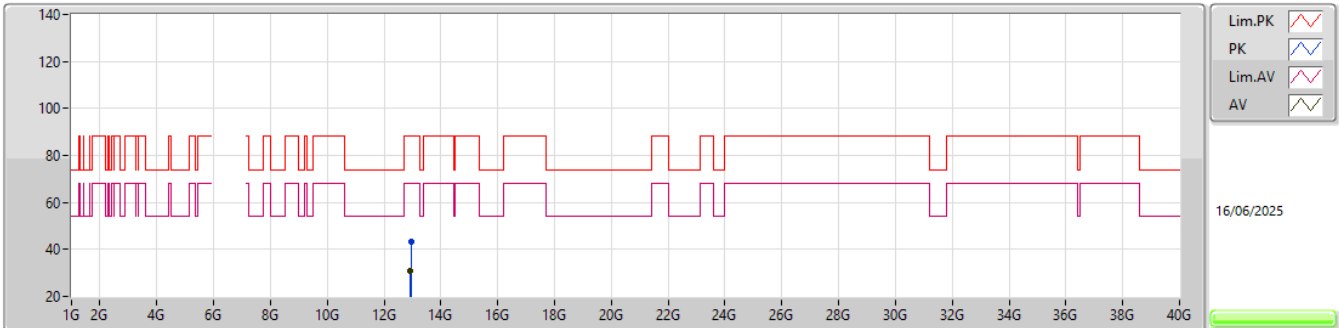EUT_Y_2TX
Setting 17
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.96281G	43.48	88.20	-44.72	57.14	3	Vertical	343	1.38	-	39.33	11.94	64.93			
RMS	12.93617G	30.81	68.20	-37.39	44.57	3	Vertical	343	1.38	-	39.27	11.94	64.97			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6475MHz_TX

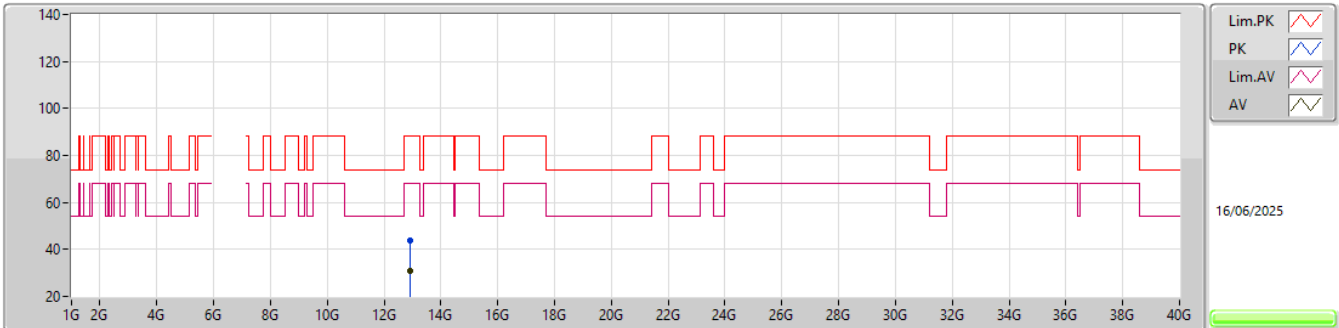EUT_Y_2TX
Setting 17
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.93683G	43.63	88.20	-44.57	57.39	3	Horizontal	166	2.41	-	39.27	11.94	64.97			
RMS	12.93707G	30.86	68.20	-37.34	44.62	3	Horizontal	166	2.41	-	39.27	11.94	64.97			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6475MHz_TX

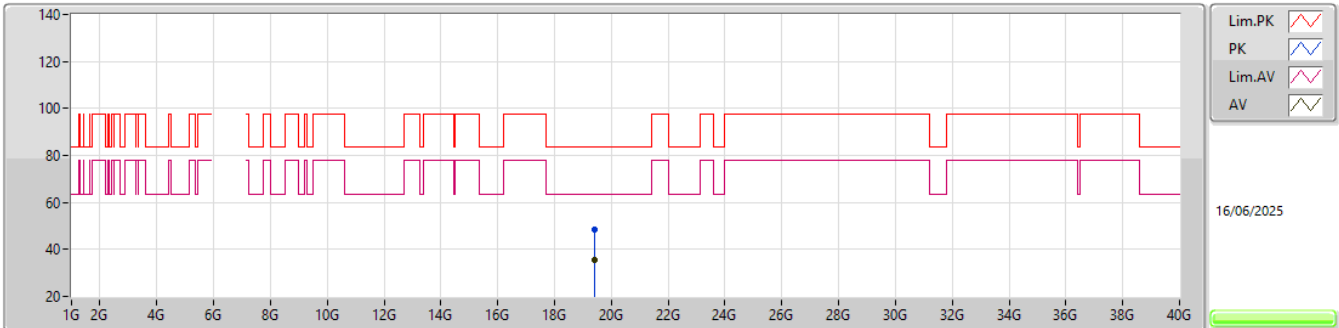EUT_Y_2TX
Setting 17
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.41846G	48.24	83.54	-35.30	38.34	1	Vertical	273	1.37	-	37.83	20.87	48.80			
AV	19.41108G	35.49	63.54	-28.05	25.57	1	Vertical	273	1.37	-	37.86	20.86	48.80			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6475MHz_TX

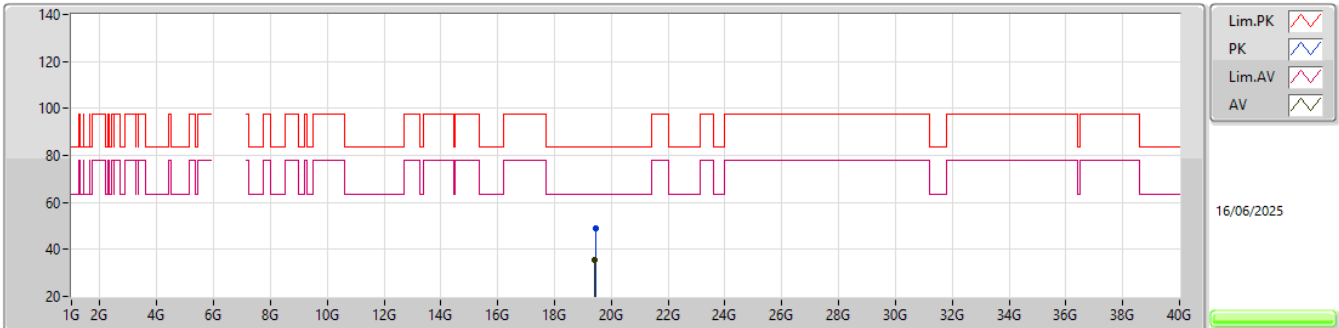EUT_Y_2TX
Setting 17
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.43808G	49.06	83.54	-34.48	39.23	1	Horizontal	18	1.79	-	37.75	20.88	48.80			
AV	19.4115G	35.42	63.54	-28.12	25.51	1	Horizontal	18	1.79	-	37.85	20.86	48.80			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6515MHz_TX

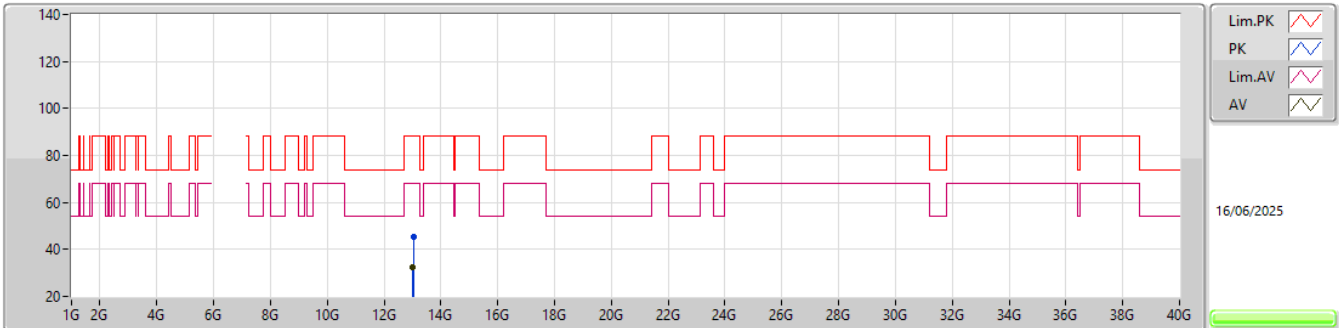EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.0309G	45.39	88.20	-42.81	58.94	3	Vertical	328	2.49	-	39.40	11.93	64.88			
RMS	13.01749G	32.48	68.20	-35.72	46.03	3	Vertical	328	2.49	-	39.40	11.93	64.88			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6515MHz_TX

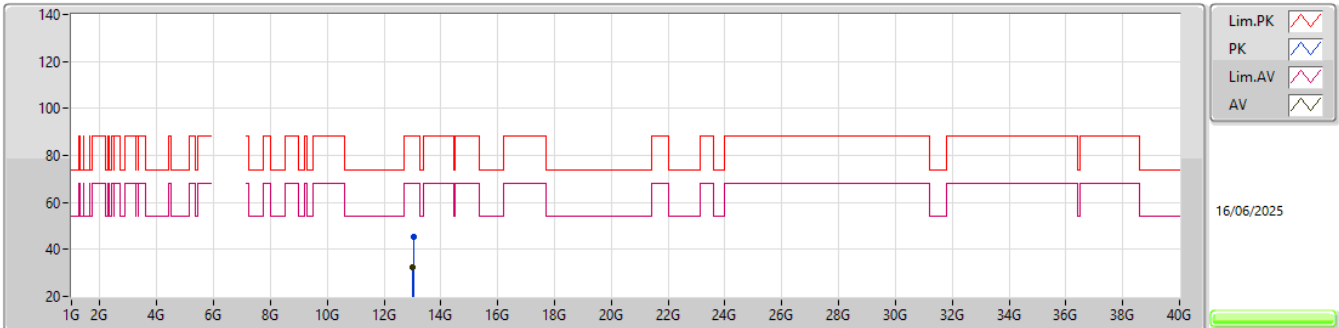EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.02766G	45.57	88.20	-42.63	59.12	3	Horizontal	260	1.80	-	39.40	11.93	64.88			
RMS	13.0192G	32.34	68.20	-35.86	45.89	3	Horizontal	260	1.80	-	39.40	11.93	64.88			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6515MHz_TX

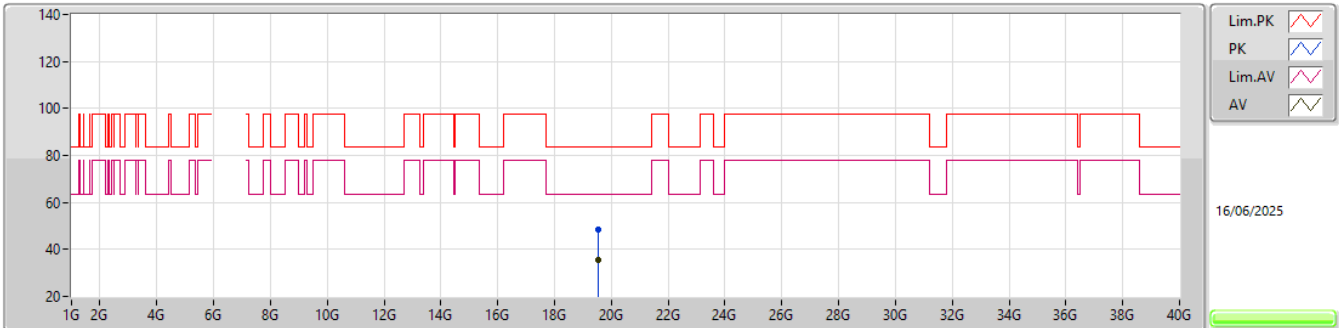EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.53336G	48.29	83.54	-35.25	38.47	1	Vertical	37	1.37	-	37.73	20.89	48.80			
AV	19.55124G	35.55	63.54	-27.99	25.78	1	Vertical	37	1.37	-	37.70	20.87	48.80			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6515MHz_TX

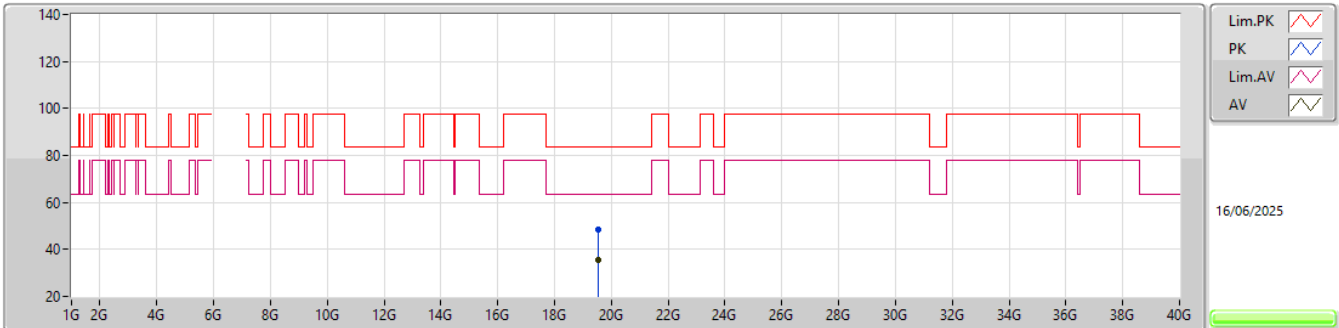EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.54818G	48.30	83.54	-35.24	38.52	1	Horizontal	75	2.36	-	37.70	20.88	48.80			
AV	19.5573G	35.61	63.54	-27.93	25.84	1	Horizontal	75	2.36	-	37.70	20.87	48.80			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6535MHz_TX

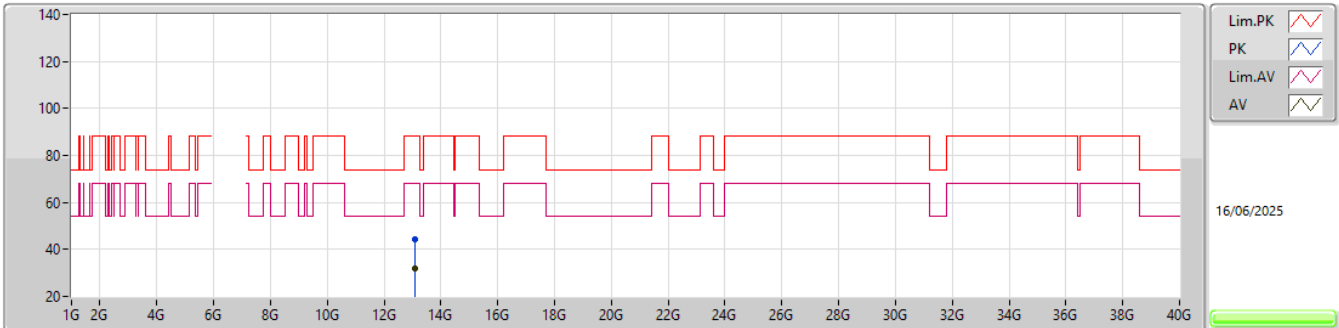EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.07744G	44.21	88.20	-43.99	57.65	3	Vertical	87	2.69	-	39.51	11.92	64.87			
RMS	13.0829G	31.82	68.20	-36.38	45.24	3	Vertical	87	2.69	-	39.53	11.92	64.87			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6535MHz_TX

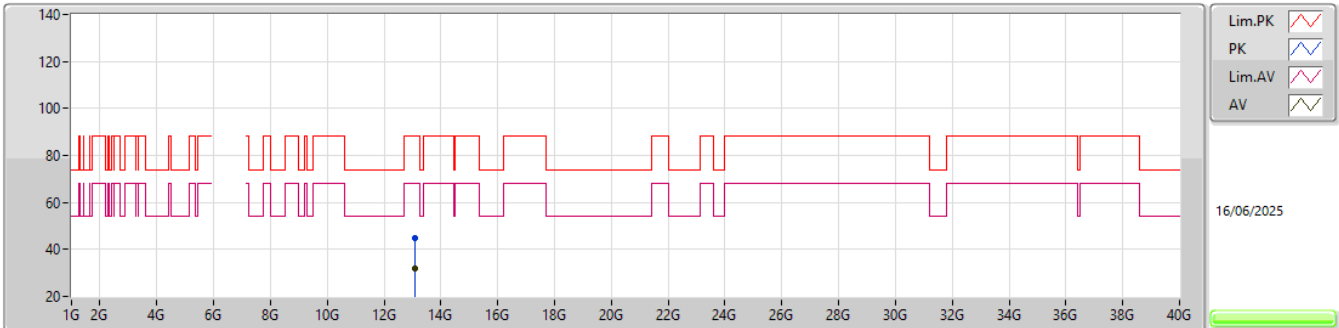EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.07597G	44.75	88.20	-43.45	58.20	3	Horizontal	27	1.67	-	39.50	11.92	64.87			
RMS	13.08413G	32.01	68.20	-36.19	45.42	3	Horizontal	27	1.67	-	39.54	11.92	64.87			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6535MHz_TX

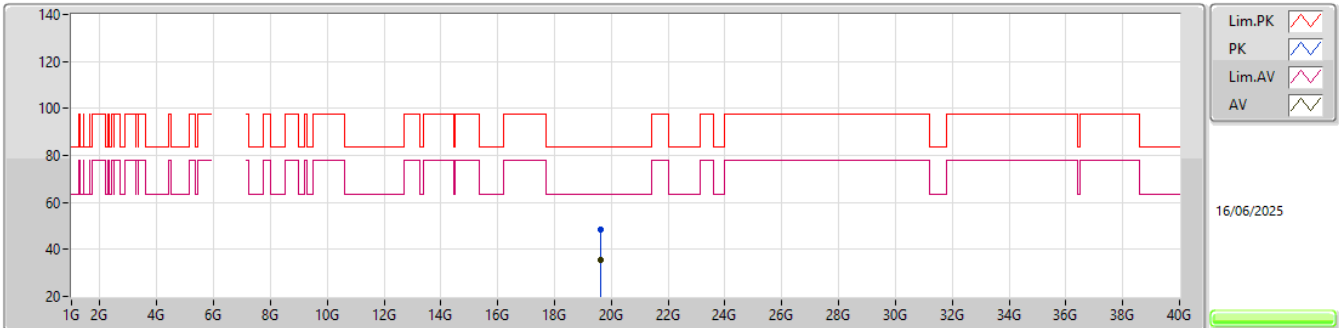EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.60842G	48.54	83.54	-35.00	38.81	1	Vertical	48	2.87	-	37.70	20.83	48.80			
AV	19.61652G	35.60	63.54	-27.94	25.87	1	Vertical	48	2.87	-	37.70	20.83	48.80			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6535MHz_TX

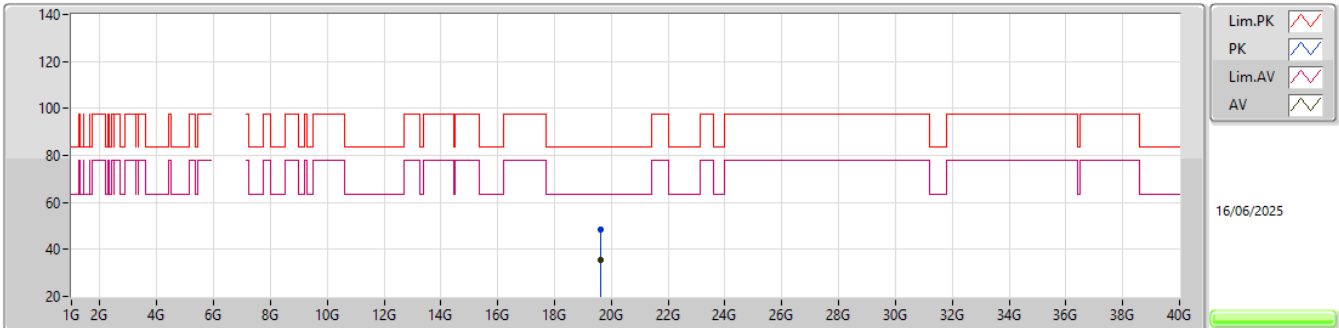EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.61016G	48.57	83.54	-34.97	38.84	1	Horizontal	272	2.89	-	37.70	20.83	48.80			
AV	19.6095G	35.53	63.54	-28.01	25.80	1	Horizontal	272	2.89	-	37.70	20.83	48.80			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6695MHz_TX

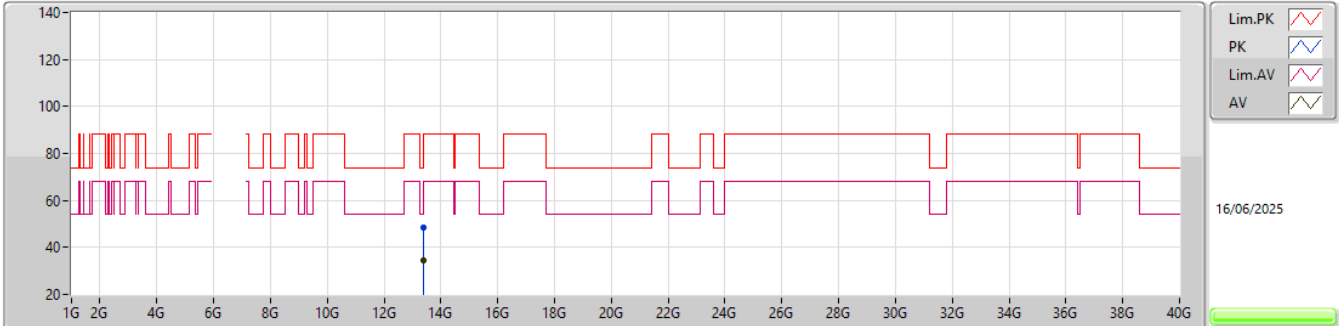EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.3975G	48.21	74.00	-25.79	59.64	3	Vertical	280	1.96	-	40.29	13.12	64.84			
AV	13.38148G	34.57	54.00	-19.43	46.07	3	Vertical	280	1.96	-	40.23	13.11	64.84			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6695MHz_TX

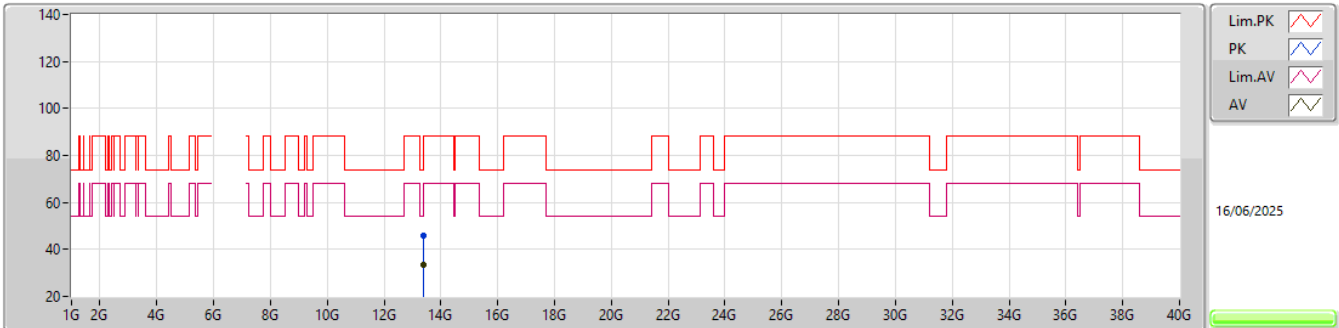EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.37656G	46.06	74.00	-27.94	58.82	3	Horizontal	115	1.25	-	40.21	11.87	64.84			
AV	13.37563G	33.33	54.00	-20.67	46.10	3	Horizontal	115	1.25	-	40.20	11.87	64.84			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6695MHz_TX

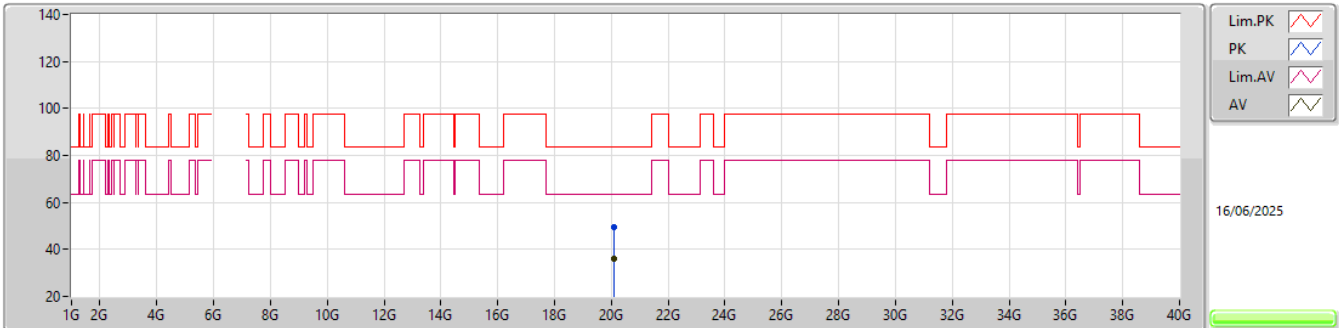EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.09238G	49.34	83.54	-34.20	39.60	1	Vertical	283	2.71	-	37.80	20.72	48.78			
AV	20.0793G	35.81	63.54	-27.73	26.10	1	Vertical	283	2.71	-	37.80	20.69	48.78			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6695MHz_TX

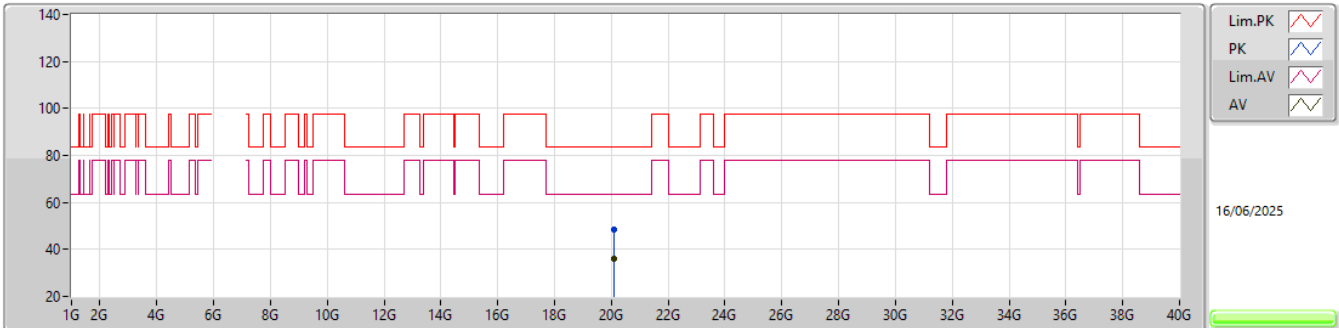EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.0892G	48.40	83.54	-35.14	38.67	1	Horizontal	49	2.42	-	37.80	20.71	48.78			
AV	20.09046G	35.78	63.54	-27.76	26.05	1	Horizontal	49	2.42	-	37.80	20.71	48.78			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6875MHz_TX

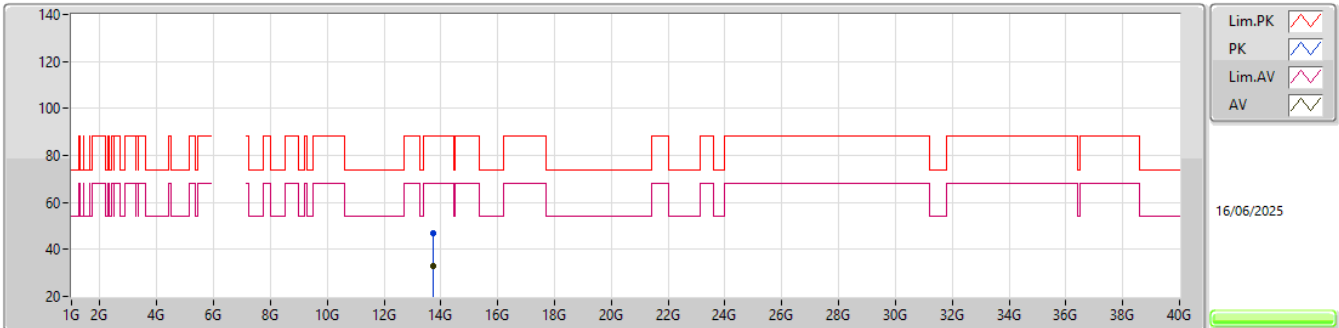EUT_Y_2TX
Setting 17
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.75027G	46.80	88.20	-41.40	58.89	3	Vertical	92	2.84	-	40.80	11.82	64.71			
RMS	13.74145G	32.82	68.20	-35.38	44.94	3	Vertical	92	2.84	-	40.78	11.82	64.72			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6875MHz_TX

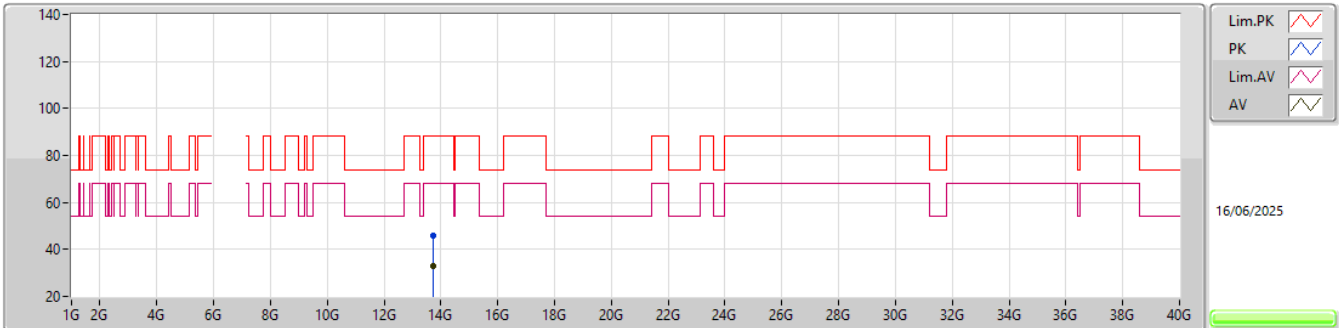EUT_Y_2TX
Setting 17
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.74295G	45.95	88.20	-42.25	58.06	3	Horizontal	132	2.98	-	40.79	11.82	64.72			
RMS	13.7386G	32.78	68.20	-35.42	44.90	3	Horizontal	132	2.98	-	40.78	11.82	64.72			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6875MHz_TX

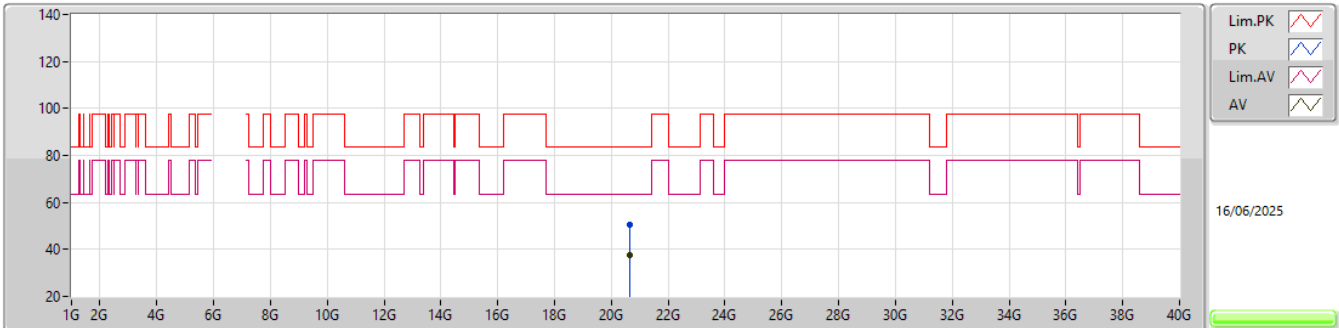EUT_Y_2TX
Setting 17
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.63202G	50.68	83.54	-32.86	39.89	1	Vertical	341	1.09	-	37.90	21.59	48.70			
AV	20.62992G	37.62	63.54	-25.92	26.83	1	Vertical	341	1.09	-	37.90	21.59	48.70			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6875MHz_TX

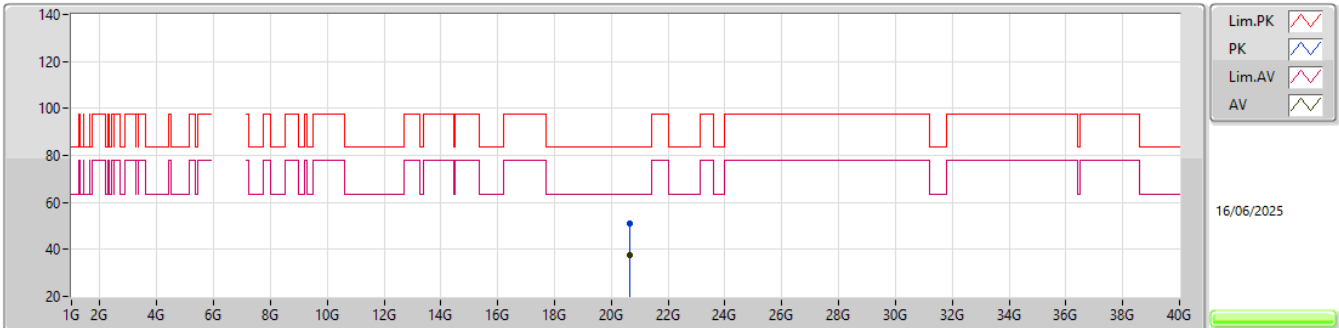EUT_Y_2TX
Setting 17
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.62884G	51.13	83.54	-32.41	40.34	1	Horizontal	33	2.21	-	37.90	21.59	48.70			
AV	20.62824G	37.51	63.54	-26.03	26.72	1	Horizontal	33	2.21	-	37.90	21.59	48.70			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6895MHz_TX

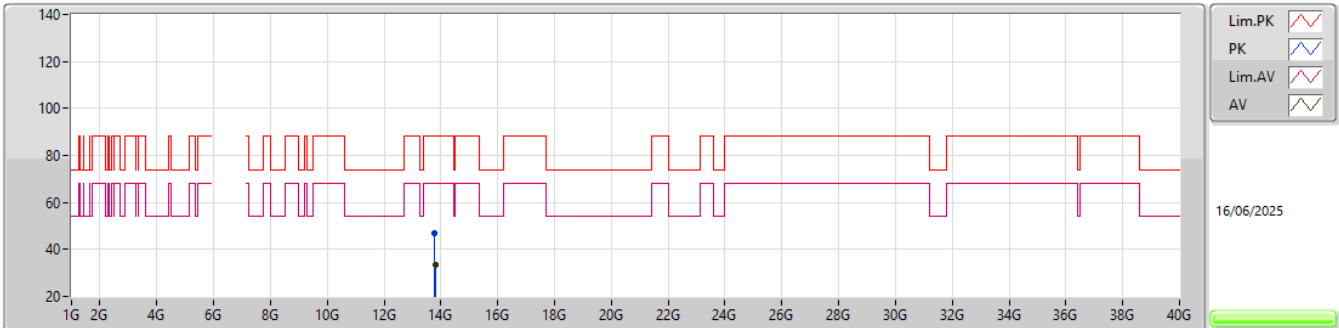EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.78985G	47.13	88.20	-41.07	59.14	3	Vertical	350	2.70	-	40.88	11.81	64.70			
RMS	13.79687G	33.37	68.20	-34.83	45.36	3	Vertical	350	2.70	-	40.89	11.81	64.69			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6895MHz_TX

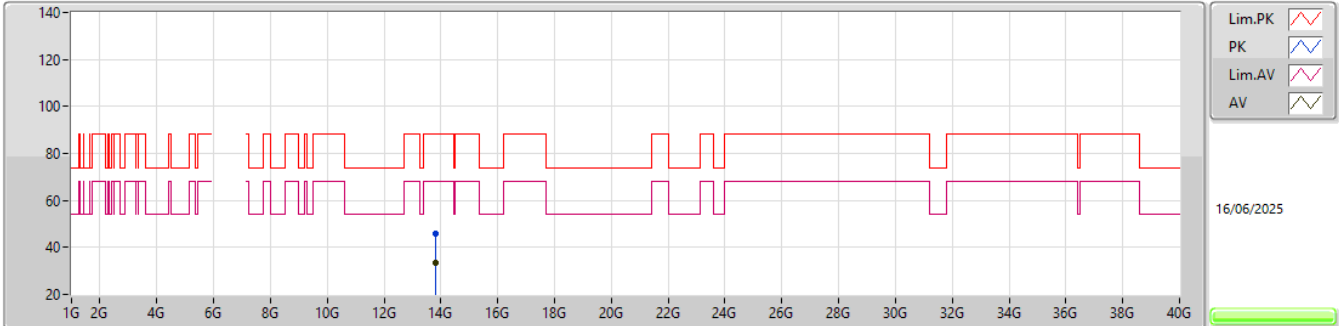


EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.8023G	46.10	88.20	-42.10	58.07	3	Horizontal	313	2.36	-	40.91	11.81	64.69			
RMS	13.79921G	33.51	68.20	-34.69	45.49	3	Horizontal	313	2.36	-	40.90	11.81	64.69			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6895MHz_TX

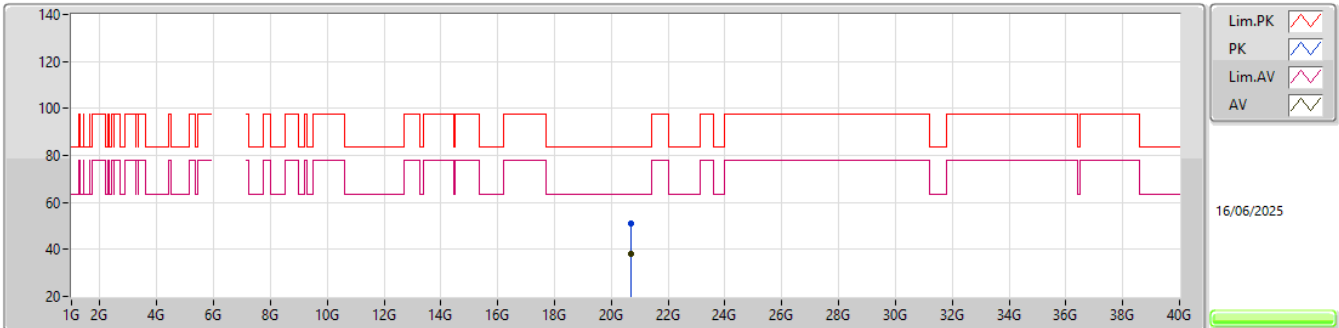EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.69934G	51.23	83.54	-32.31	40.37	1	Vertical	260	1.64	-	37.90	21.66	48.70			
AV	20.69616G	38.08	63.54	-25.46	27.22	1	Vertical	260	1.64	-	37.90	21.66	48.70			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6895MHz_TX

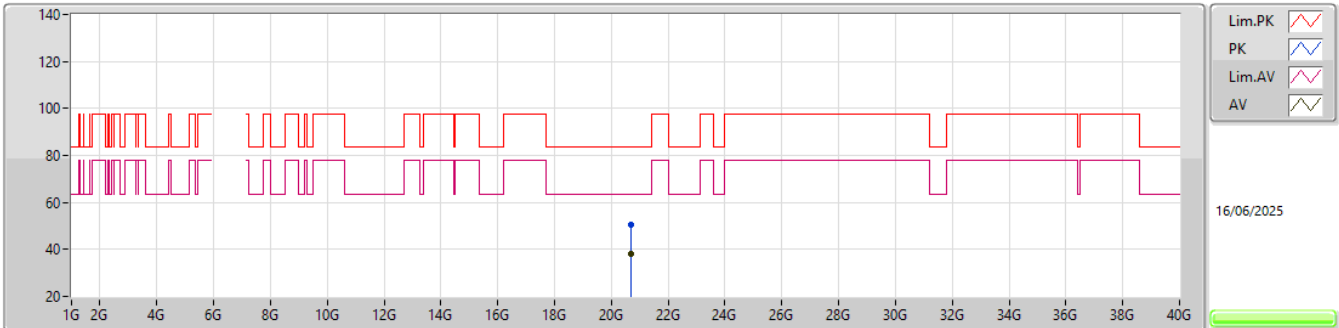EUT_Y_2TX
Setting 16
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.69238G	50.66	83.54	-32.88	39.80	1	Horizontal	68	2.28	-	37.90	21.66	48.70			
AV	20.69892G	38.03	63.54	-25.51	27.17	1	Horizontal	68	2.28	-	37.90	21.66	48.70			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6995MHz_TX

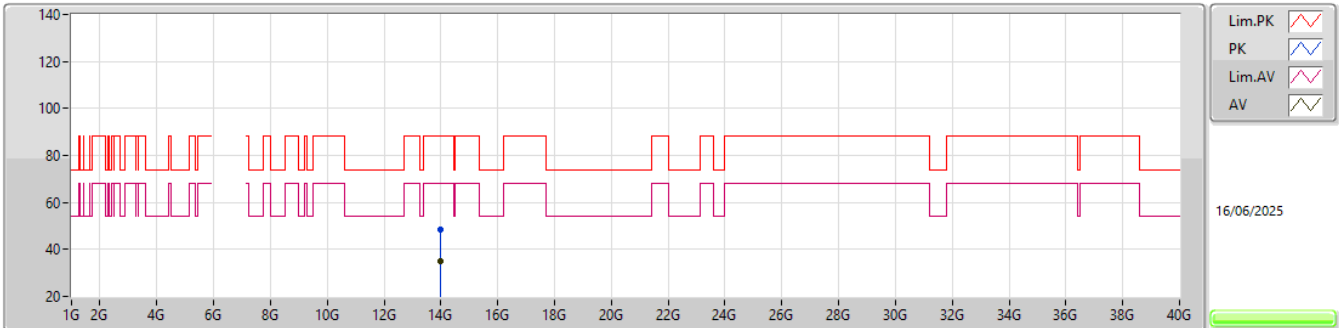


EUT_Y_2TX
Setting 17
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.00242G	48.37	88.20	-39.83	59.69	3	Vertical	83	1.54	-	41.50	11.78	64.60			
RMS	14.00317G	34.80	68.20	-33.40	46.11	3	Vertical	83	1.54	-	41.51	11.78	64.60			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6995MHz_TX

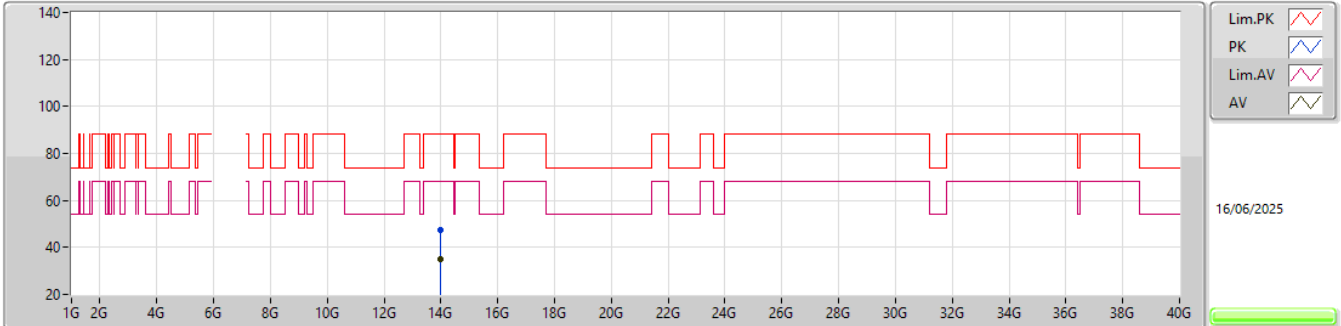


EUT_Y_2TX
Setting 17
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.9783G	47.21	88.20	-40.99	58.63	3	Horizontal	135	1.91	-	41.41	11.78	64.61			
RMS	14.00461G	34.96	68.20	-33.24	46.27	3	Horizontal	135	1.91	-	41.51	11.78	64.60			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6995MHz_TX

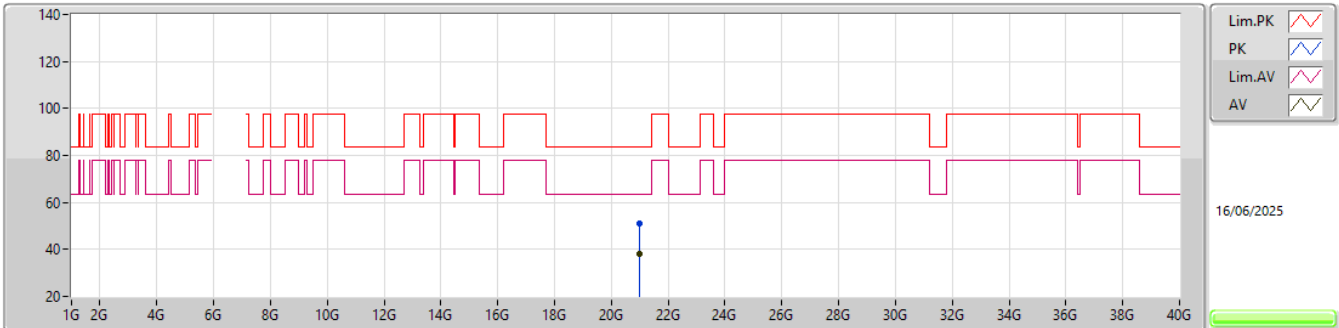EUT_Y_2TX
Setting 17
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.97522G	51.05	83.54	-32.49	39.86	1	Vertical	65	1.84	-	37.95	21.94	48.70			
AV	20.98626G	37.87	63.54	-25.67	26.64	1	Vertical	65	1.84	-	37.97	21.96	48.70			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6995MHz_TX

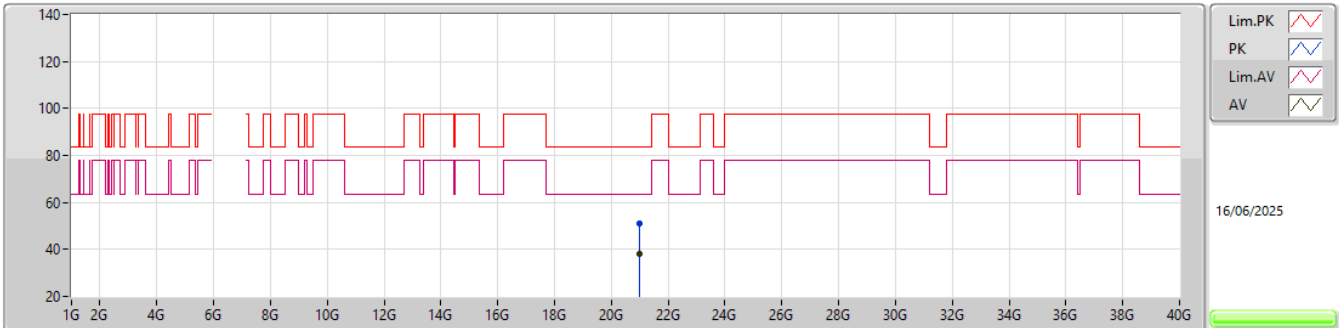EUT_Y_2TX
Setting 17
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.9865G	51.16	83.54	-32.38	39.93	1	Horizontal	18	2.11	-	37.97	21.96	48.70			
AV	20.97552G	37.86	63.54	-25.68	26.66	1	Horizontal	18	2.11	-	37.95	21.95	48.70			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

7095MHz_TX

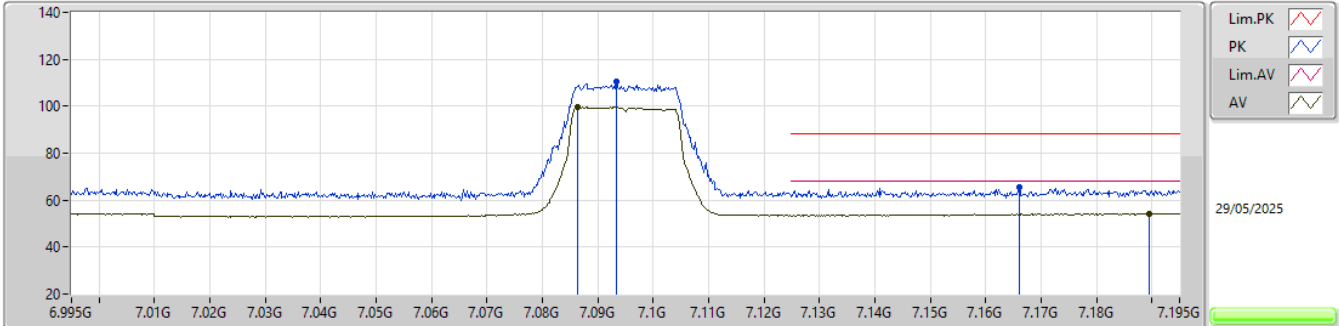


EUT_Y_2TX
Setting 17
01-U-A-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.0934G	110.51	Inf	-Inf	98.48	3	Vertical	270	1.80	-	36.79	7.95	32.71			
RMS	7.0864G	99.50	Inf	-Inf	87.50	3	Vertical	270	1.80	-	36.77	7.95	32.72			
PK	7.166G	65.28	88.20	-22.92	53.03	3	Vertical	270	1.80	-	37.00	7.94	32.69			
RMS	7.1896G	54.24	68.20	-13.96	41.84	3	Vertical	270	1.80	-	37.14	7.94	32.68			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

7095MHz_TX

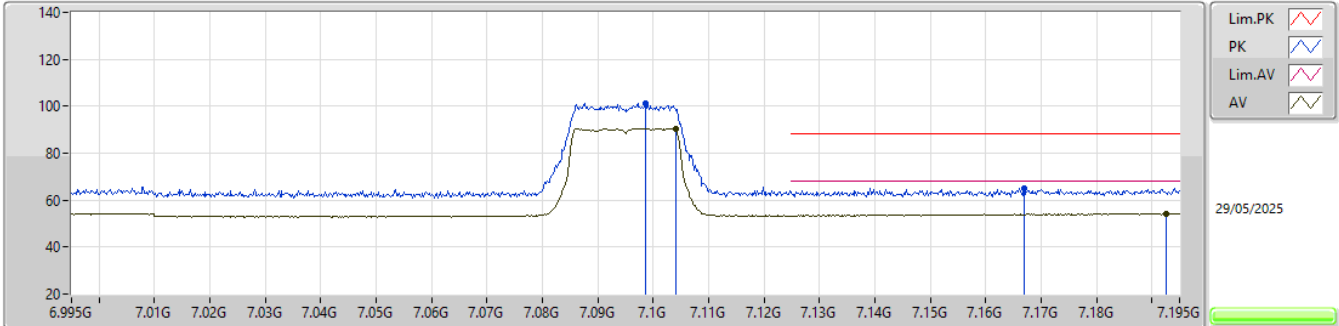


EUT_Y_2TX
Setting 17
01-U-A-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.0986G	101.27	Inf	-Inf	89.23	3	Horizontal	119	1.80	-	36.80	7.95	32.71			
RMS	7.104G	90.57	Inf	-Inf	78.52	3	Horizontal	119	1.80	-	36.81	7.95	32.71			
PK	7.167G	65.06	88.20	-23.14	52.81	3	Horizontal	119	1.80	-	37.00	7.94	32.69			
RMS	7.1926G	54.26	68.20	-13.94	41.84	3	Horizontal	119	1.80	-	37.16	7.94	32.68			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


7095MHz_TX

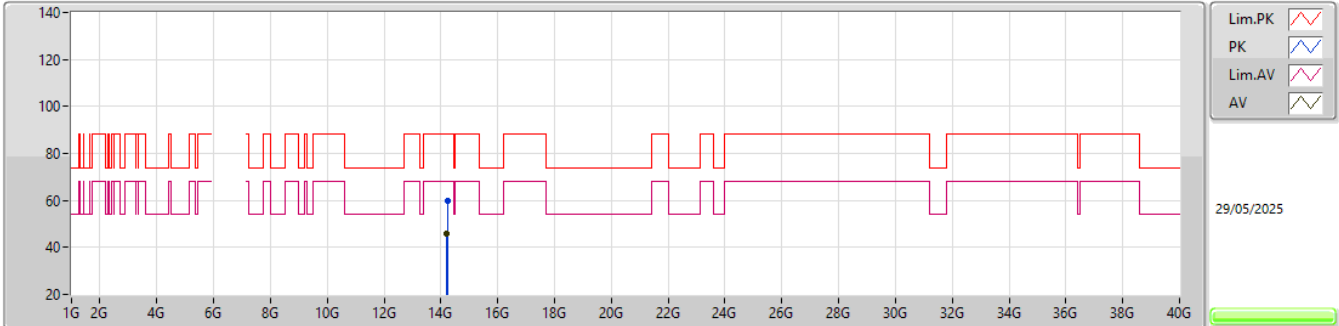EUT_Y_2TX
Setting 28
01-U-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.23718G	59.73	88.20	-28.47	50.14	3	Vertical	280	1.80	-	40.75	13.47	44.63			
RMS	14.22056G	46.08	68.20	-22.12	36.40	3	Vertical	280	1.80	-	40.82	13.47	44.61			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


7095MHz_TX

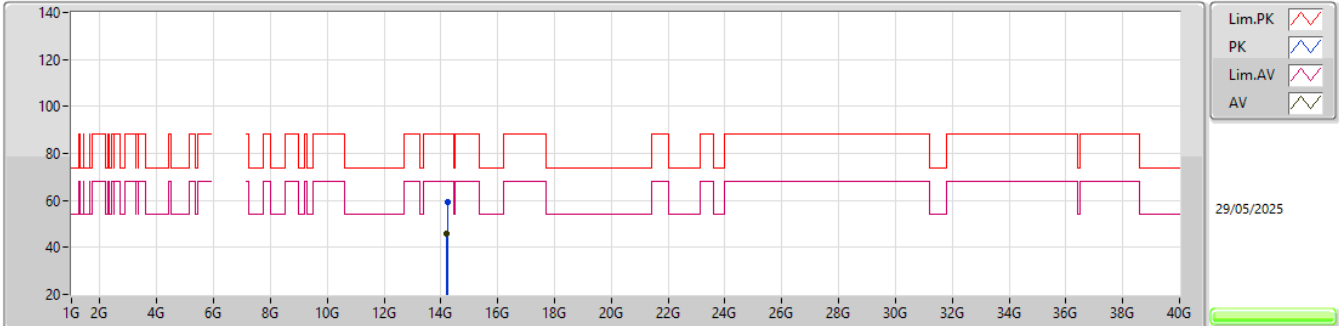EUT_Y_2TX
Setting 28
01-U-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.2387G	59.19	88.20	-29.01	49.60	3	Horizontal	269	1.39	-	40.75	13.47	44.63			
RMS	14.2201G	45.94	68.20	-22.26	36.26	3	Horizontal	269	1.39	-	40.82	13.47	44.61			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


7095MHz_TX

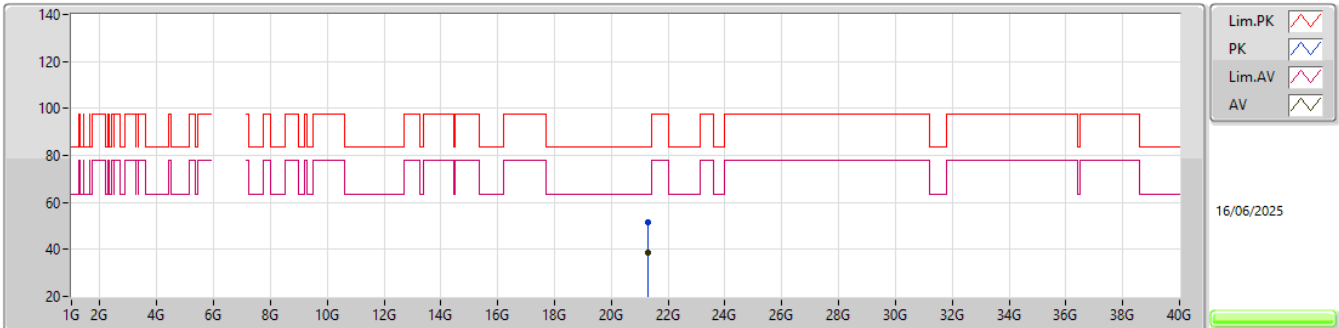EUT_Y_2TX
Setting 28
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	21.29484G	51.81	83.54	-31.73	40.57	1	Vertical	237	2.83	-	38.09	21.79	48.64			
AV	21.2982G	38.46	63.54	-25.08	27.21	1	Vertical	237	2.83	-	38.10	21.79	48.64			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


7095MHz_TX

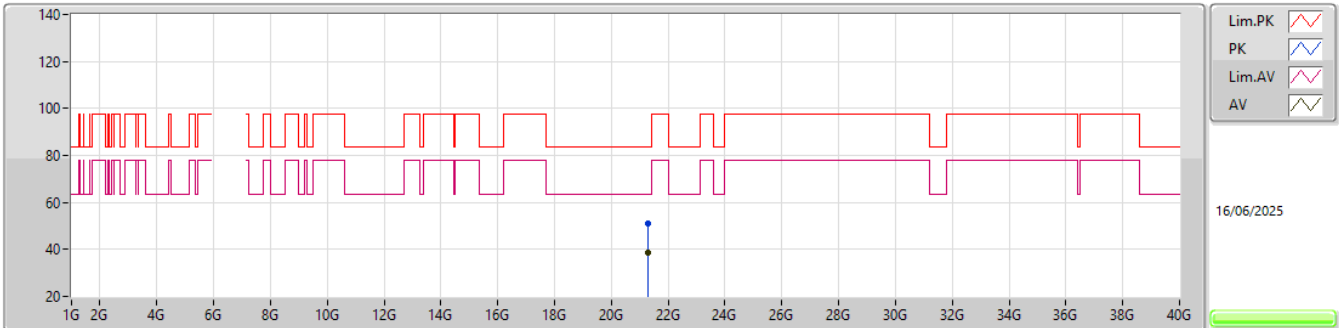EUT_Y_2TX
Setting 28
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.29544G	51.29	83.54	-32.25	40.05	1	Horizontal	89	1.24	-	38.09	21.79	48.64			
AV	21.29916G	38.51	63.54	-25.03	27.27	1	Horizontal	89	1.24	-	38.10	21.78	48.64			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5965MHz_TX

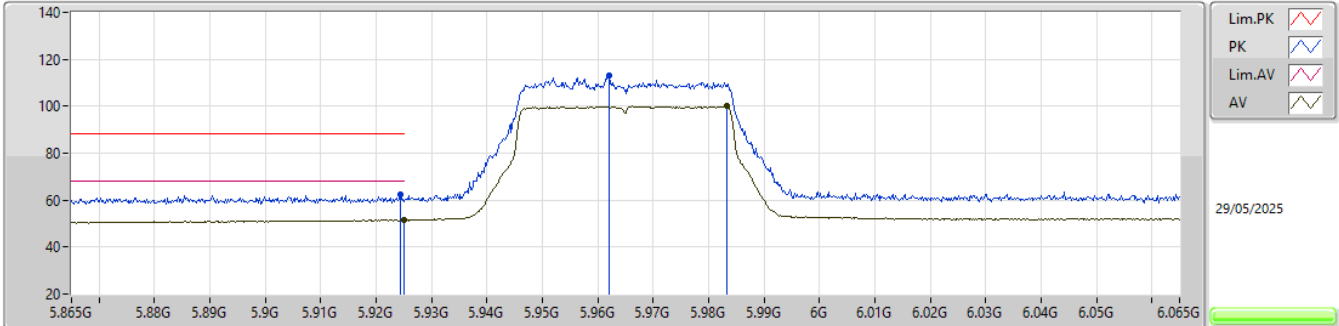


EUT_Y_2TX
Setting 20
01-U-A-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9244G	62.38	88.20	-25.82	52.43	3	Vertical	285	1.80	-	34.95	7.44	32.44			
RMS	5.925G	51.53	68.20	-16.67	41.58	3	Vertical	285	1.80	-	34.95	7.44	32.44			
PK	5.962G	112.96	Inf	-Inf	102.78	3	Vertical	285	1.80	-	35.15	7.47	32.44			
RMS	5.9834G	99.95	Inf	-Inf	89.67	3	Vertical	285	1.80	-	35.23	7.49	32.44			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5965MHz_TX

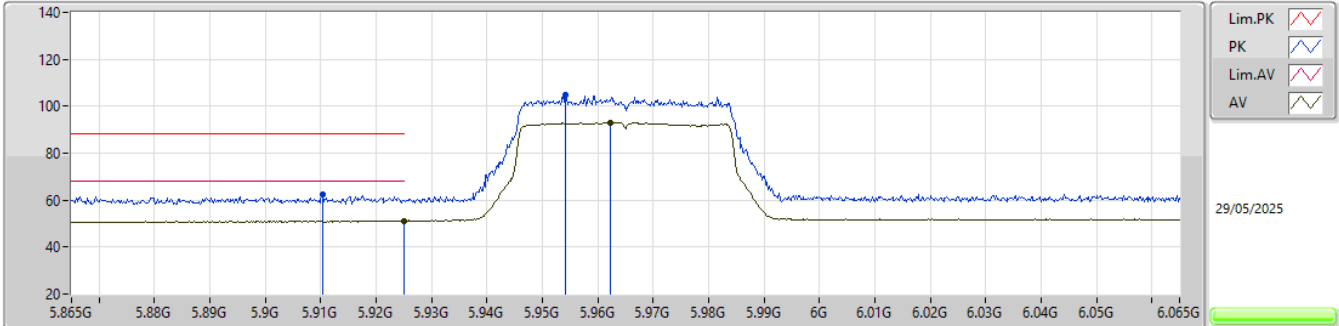


EUT_Y_2TX
Setting 20
01-U-A-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9104G	62.23	88.20	-25.97	52.38	3	Horizontal	325	2.70	-	34.86	7.43	32.44			
RMS	5.925G	51.28	68.20	-16.92	41.33	3	Horizontal	325	2.70	-	34.95	7.44	32.44			
PK	5.9542G	104.86	Inf	-Inf	94.71	3	Horizontal	325	2.70	-	35.12	7.47	32.44			
RMS	5.9622G	93.13	Inf	-Inf	82.95	3	Horizontal	325	2.70	-	35.15	7.47	32.44			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5965MHz_TX

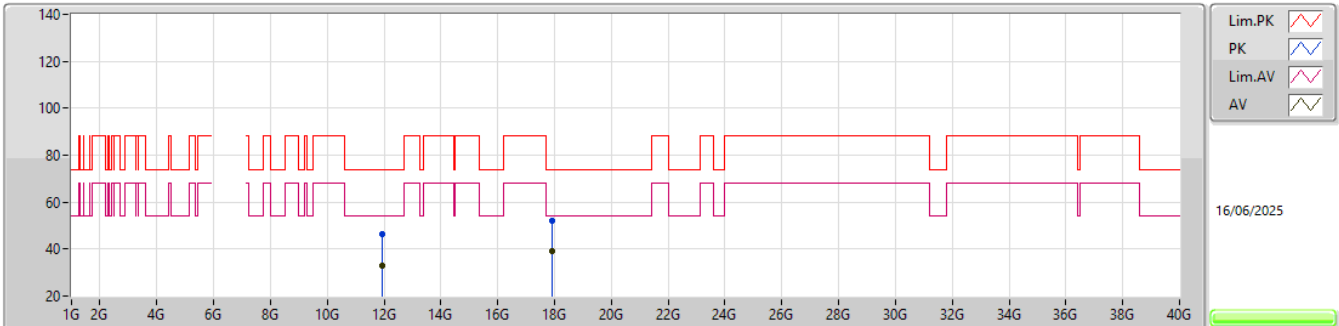


EUT_Y_2TX
Setting 20
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.93651G	46.40	74.00	-27.60	60.87	3	Vertical	98	2.66	-	39.30	12.04	65.81			
AV	11.93579G	32.83	54.00	-21.17	47.30	3	Vertical	98	2.66	-	39.30	12.04	65.81			
PK	17.90412G	52.19	74.00	-21.81	56.72	3	Vertical	306	1.64	-	46.69	12.77	63.99			
AV	17.90721G	39.27	54.00	-14.73	43.79	3	Vertical	306	1.64	-	46.69	12.78	63.99			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


5965MHz_TX

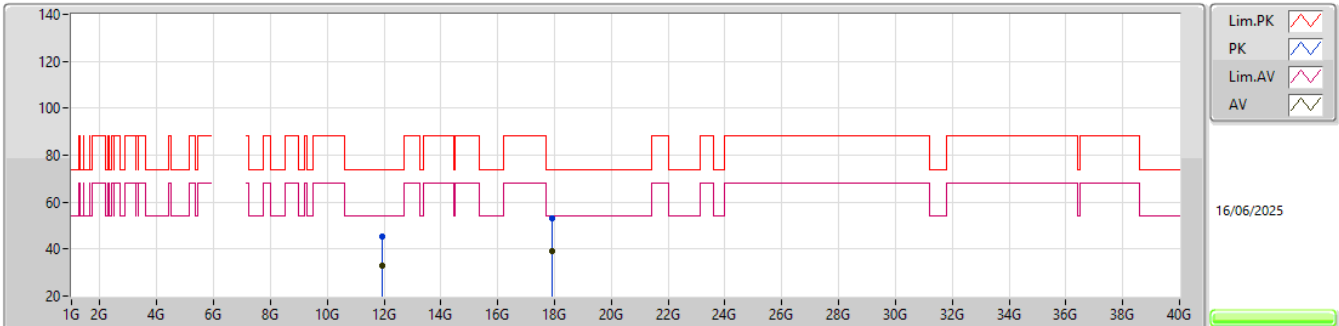EUT_Y_2TX
Setting 20
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.93816G	45.19	74.00	-28.81	59.66	3	Horizontal	28	2.91	-	39.30	12.04	65.81			
AV	11.94026G	32.74	54.00	-21.26	47.20	3	Horizontal	28	2.91	-	39.30	12.04	65.80			
PK	17.90892G	52.86	74.00	-21.14	57.39	3	Horizontal	217	1.72	-	46.68	12.78	63.99			
AV	17.90613G	39.29	54.00	-14.71	43.81	3	Horizontal	217	1.72	-	46.69	12.78	63.99			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5965MHz_TX

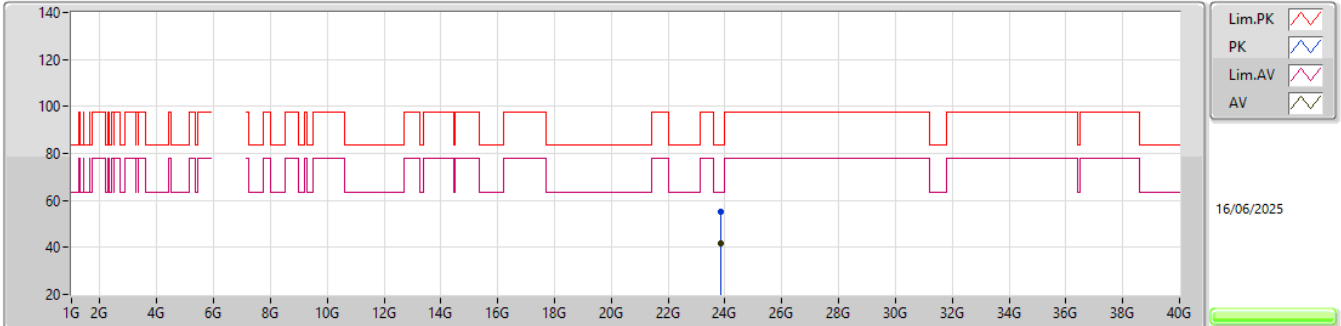


EUT_Y_2TX
Setting 20
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.86456G	55.36	83.54	-28.18	40.92	1	Vertical	326	1.97	-	39.07	23.02	47.65			
AV	23.86642G	41.58	63.54	-21.96	27.14	1	Vertical	326	1.97	-	39.07	23.02	47.65			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


5965MHz_TX

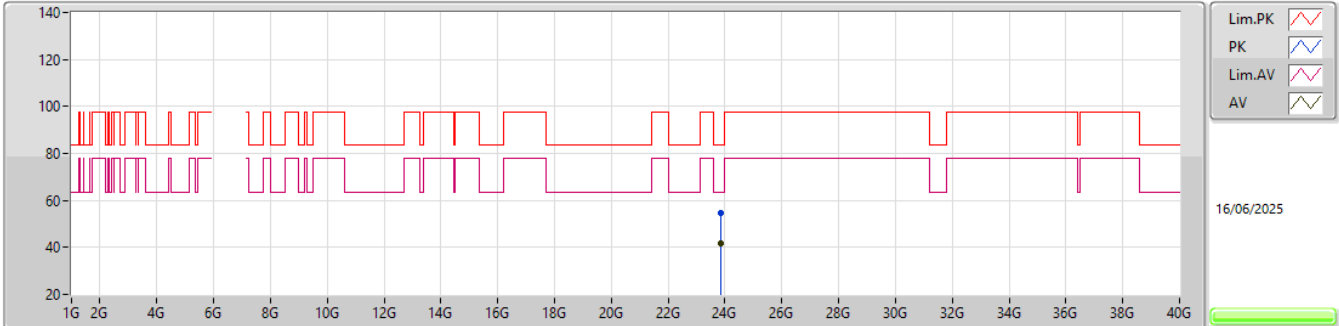EUT_Y_2TX
Setting 20
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.85892G	54.55	83.54	-28.99	40.11	1	Horizontal	106	1.02	-	39.08	23.02	47.66			
AV	23.85874G	41.61	63.54	-21.93	27.17	1	Horizontal	106	1.02	-	39.08	23.02	47.66			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6205MHz_TX

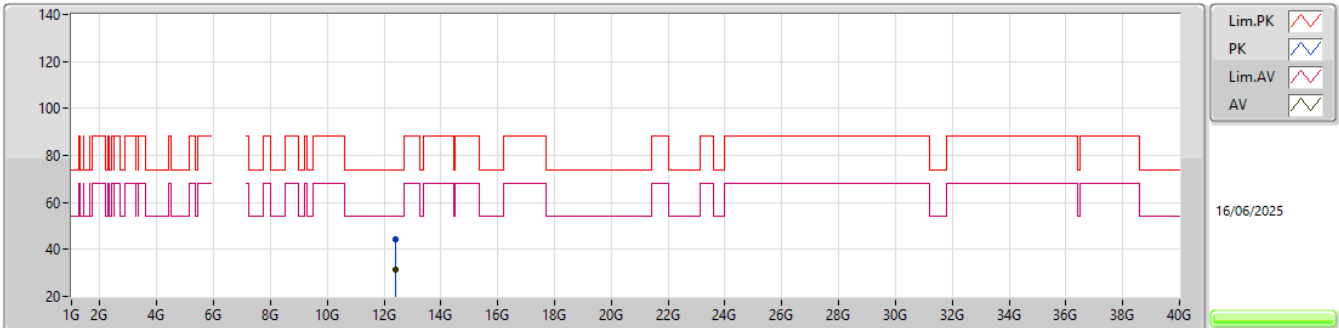EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.40718G	44.34	74.00	-29.66	59.22	3	Vertical	125	2.79	-	38.70	12.02	65.60			
AV	12.42284G	31.58	54.00	-22.42	46.46	3	Vertical	125	2.79	-	38.70	12.02	65.60			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6205MHz_TX

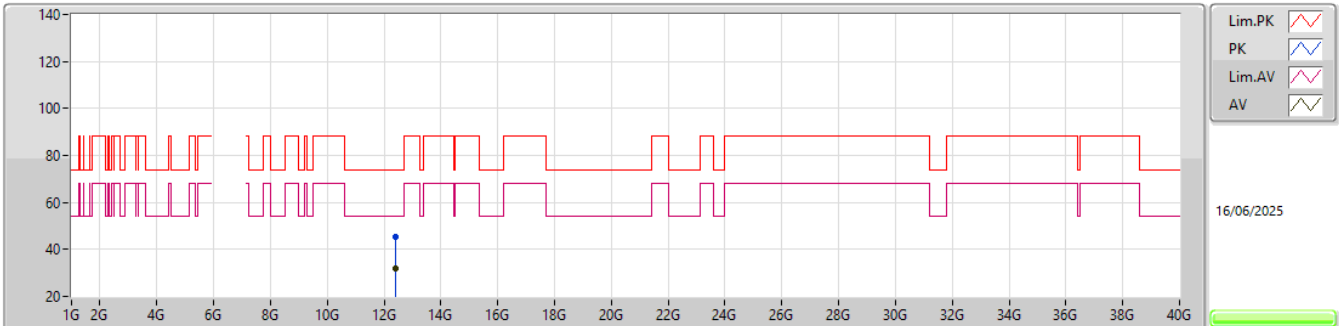EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.41033G	45.22	74.00	-28.78	60.10	3	Horizontal	87	2.78	-	38.70	12.02	65.60			
AV	12.42413G	31.64	54.00	-22.36	46.52	3	Horizontal	87	2.78	-	38.70	12.02	65.60			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6205MHz_TX

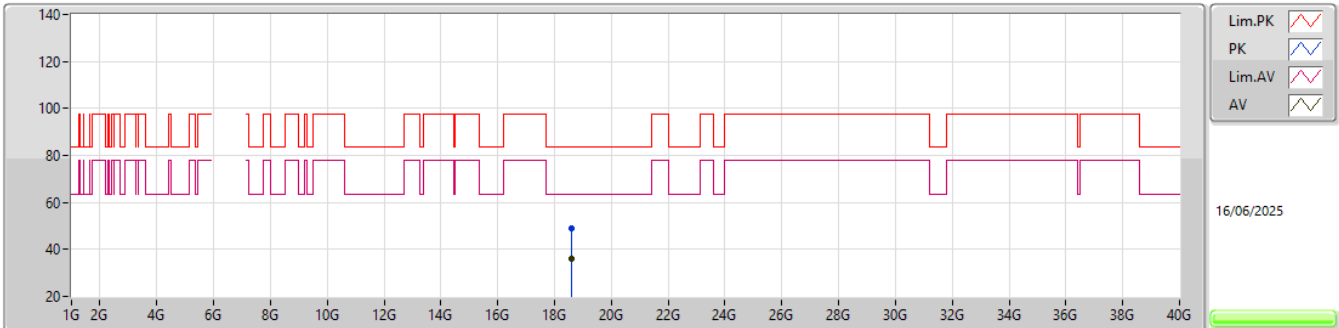EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.60282G	48.73	83.54	-34.81	38.71	1	Vertical	135	1.71	-	37.81	20.61	48.40			
AV	18.6153G	36.00	63.54	-27.54	25.98	1	Vertical	135	1.71	-	37.83	20.61	48.42			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6205MHz_TX

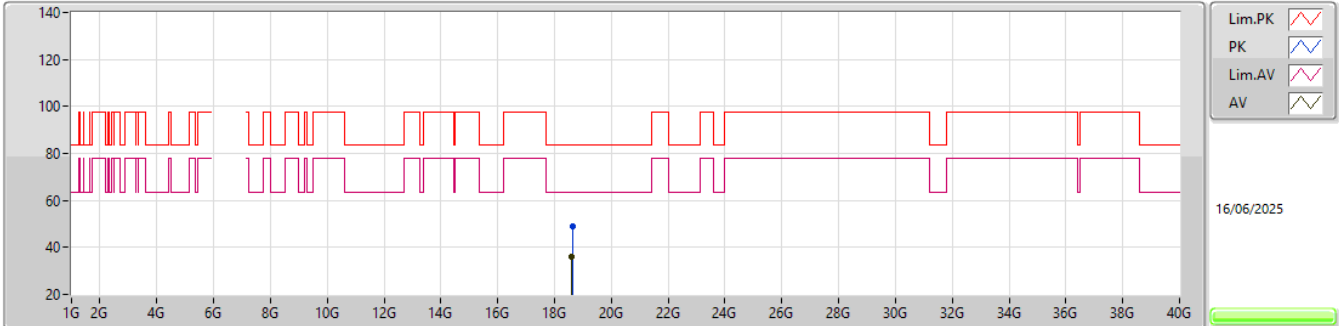EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.62688G	49.13	83.54	-34.41	39.10	1	Horizontal	201	1.87	-	37.85	20.61	48.43			
AV	18.6027G	36.16	63.54	-27.38	26.14	1	Horizontal	201	1.87	-	37.81	20.61	48.40			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6405MHz_TX

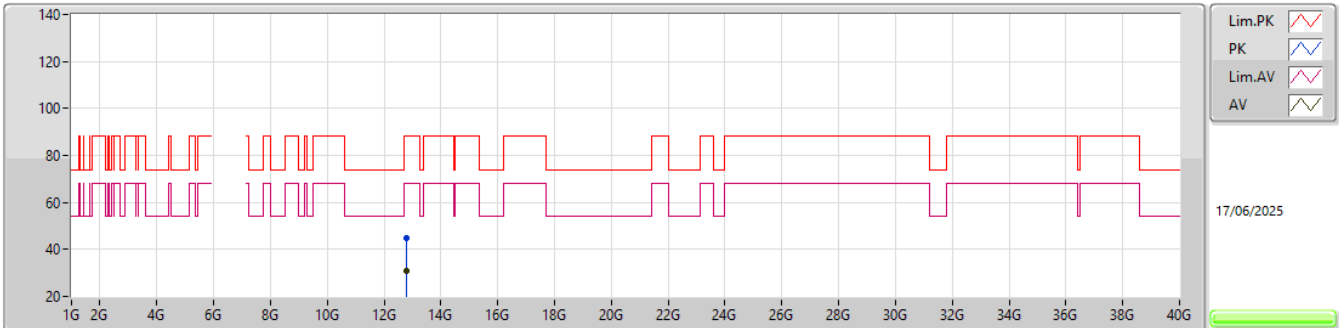EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.79827G	44.88	88.20	-43.32	59.18	3	Vertical	249	2.68	-	38.90	11.96	65.16			
RMS	12.80139G	31.11	68.20	-37.09	45.39	3	Vertical	249	2.68	-	38.91	11.96	65.15			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6405MHz_TX

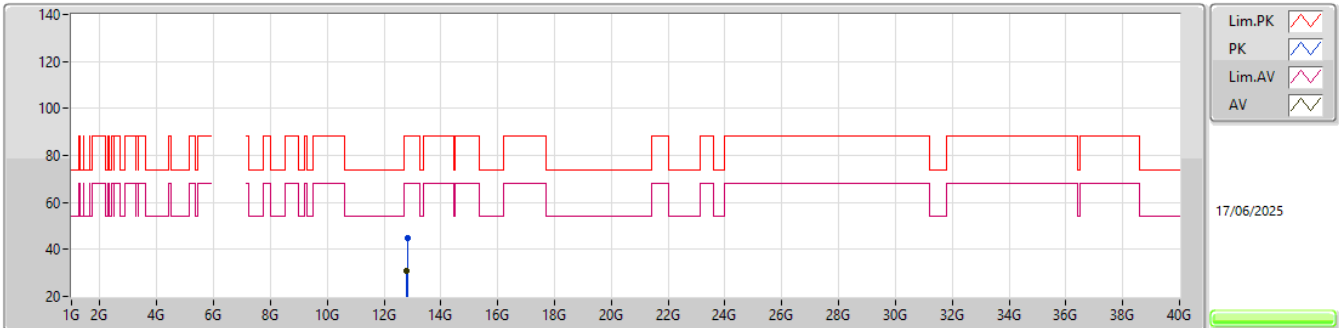EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.816G	44.71	88.20	-43.49	58.92	3	Horizontal	254	1.37	-	38.96	11.96	65.13			
RMS	12.7971G	31.03	68.20	-37.17	45.34	3	Horizontal	254	1.37	-	38.89	11.96	65.16			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

6405MHz_TX

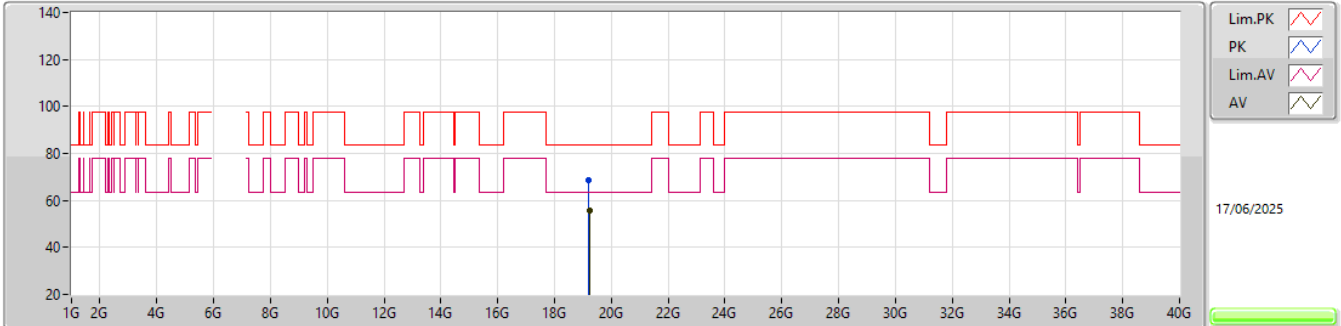


EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.20126G	68.68	83.54	-14.86	58.92	1	Vertical	56	2.31	-	37.81	20.75	48.80			
AV	19.22436G	55.72	63.54	-7.82	45.85	1	Vertical	56	2.31	-	37.90	20.77	48.80			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6405MHz_TX

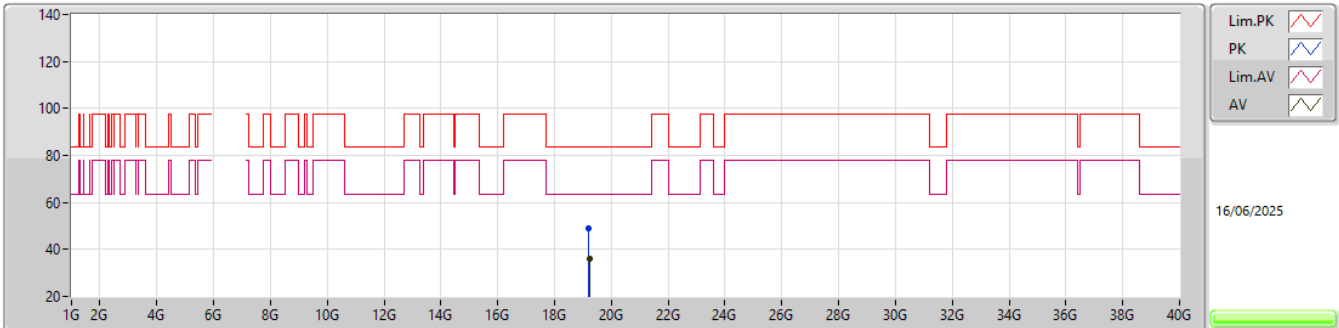EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.20612G	48.82	83.54	-34.72	39.04	1	Horizontal	34	1.54	-	37.82	20.76	48.80			
AV	19.22712G	35.84	63.54	-27.70	25.96	1	Horizontal	34	1.54	-	37.91	20.77	48.80			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6445MHz_TX

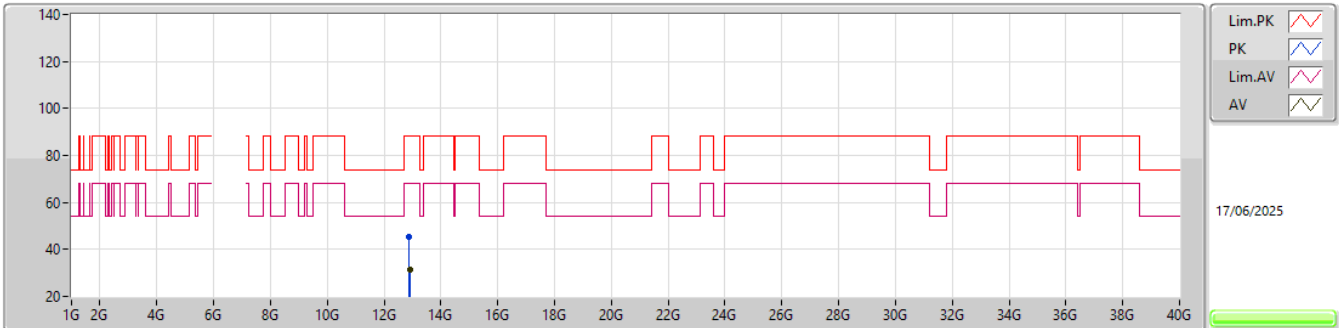EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.88847G	45.43	88.20	-42.77	59.33	3	Vertical	313	1.28	-	39.18	11.95	65.03			
RMS	12.90401G	31.63	68.20	-36.57	45.49	3	Vertical	313	1.28	-	39.21	11.94	65.01			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6445MHz_TX

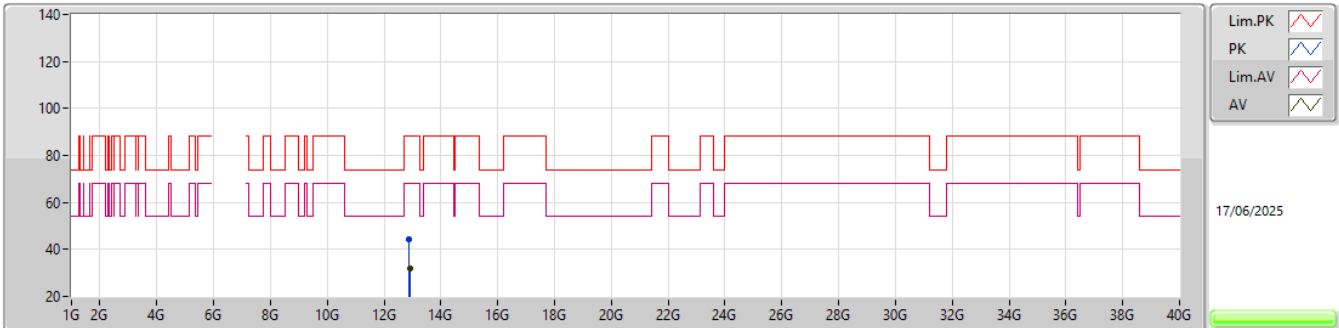EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.89549G	44.49	88.20	-43.71	58.37	3	Horizontal	99	2.91	-	39.19	11.95	65.02			
RMS	12.89972G	31.67	68.20	-36.53	45.54	3	Horizontal	99	2.91	-	39.20	11.95	65.02			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6445MHz_TX

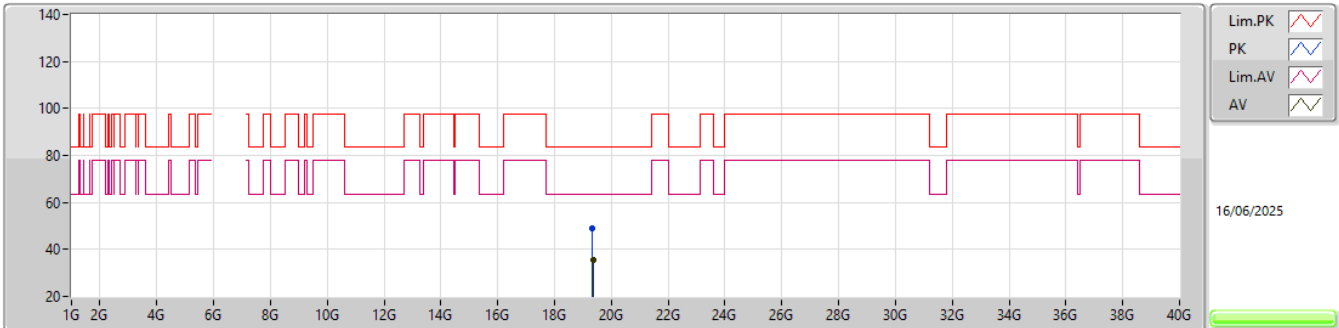EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.32984G	49.02	83.54	-34.52	39.20	1	Vertical	252	1.34	-	37.80	20.82	48.80			
AV	19.34718G	35.57	63.54	-27.97	25.74	1	Vertical	252	1.34	-	37.80	20.83	48.80			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6445MHz_TX

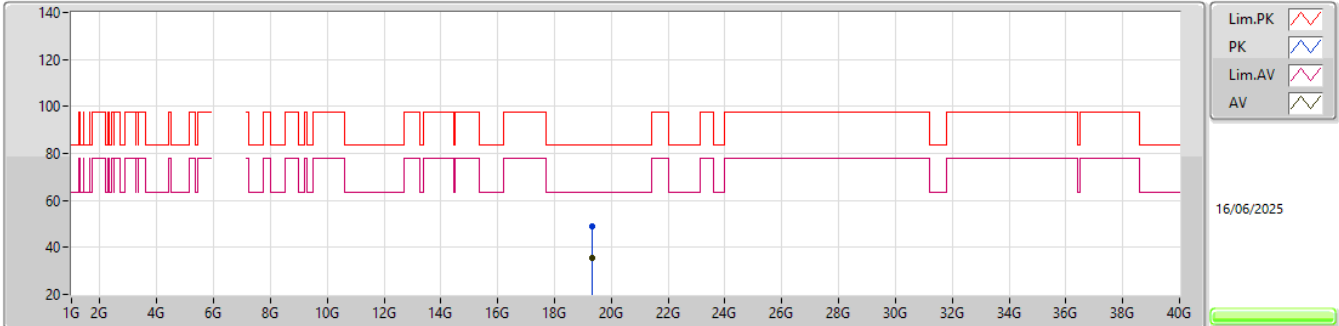EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.33926G	48.80	83.54	-34.74	38.97	1	Horizontal	342	2.36	-	37.80	20.83	48.80			
AV	19.33836G	35.54	63.54	-28.00	25.71	1	Horizontal	342	2.36	-	37.80	20.83	48.80			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6485MHz_TX

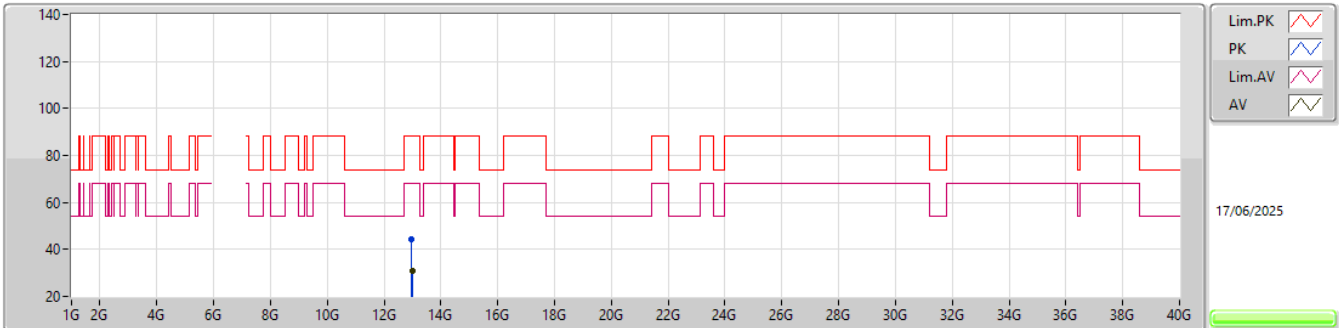EUT_Y_2TX
Setting 20
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.97465G	44.15	88.20	-44.05	57.78	3	Vertical	279	2.99	-	39.35	11.93	64.91			
RMS	12.98386G	31.06	68.20	-37.14	44.66	3	Vertical	279	2.99	-	39.37	11.93	64.90			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6485MHz_TX

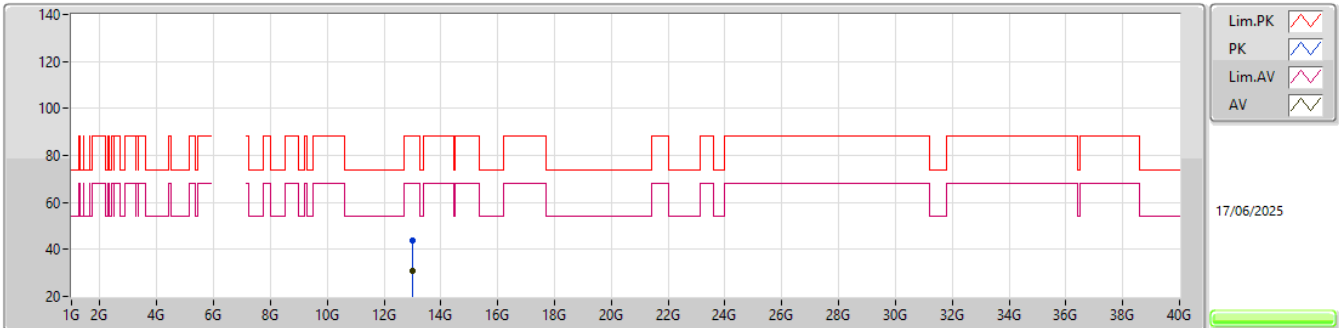EUT_Y_2TX
Setting 20
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.98374G	43.85	88.20	-44.35	57.45	3	Horizontal	334	2.31	-	39.37	11.93	64.90			
RMS	12.98473G	31.12	68.20	-37.08	44.72	3	Horizontal	334	2.31	-	39.37	11.93	64.90			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6485MHz_TX

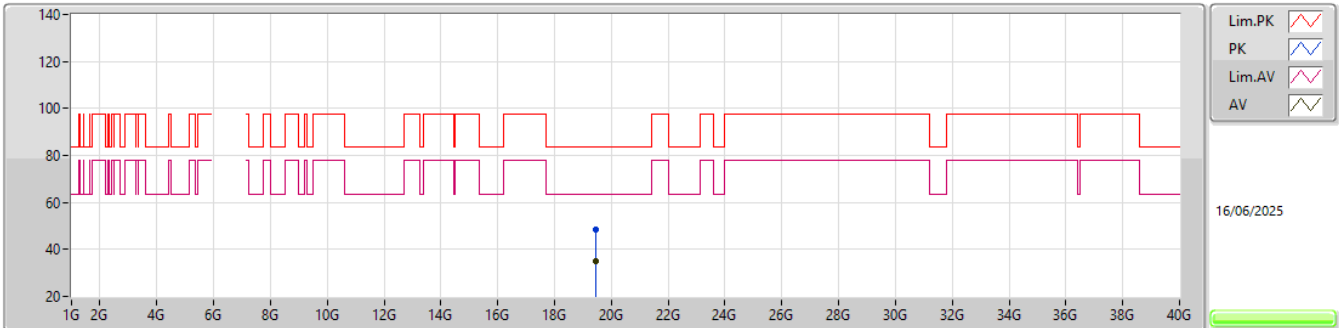EUT_Y_2TX
Setting 20
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.45338G	48.33	83.54	-35.21	38.53	1	Vertical	225	2.06	-	37.71	20.89	48.80			
AV	19.44126G	35.23	63.54	-28.31	25.42	1	Vertical	225	2.06	-	37.73	20.88	48.80			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6485MHz_TX

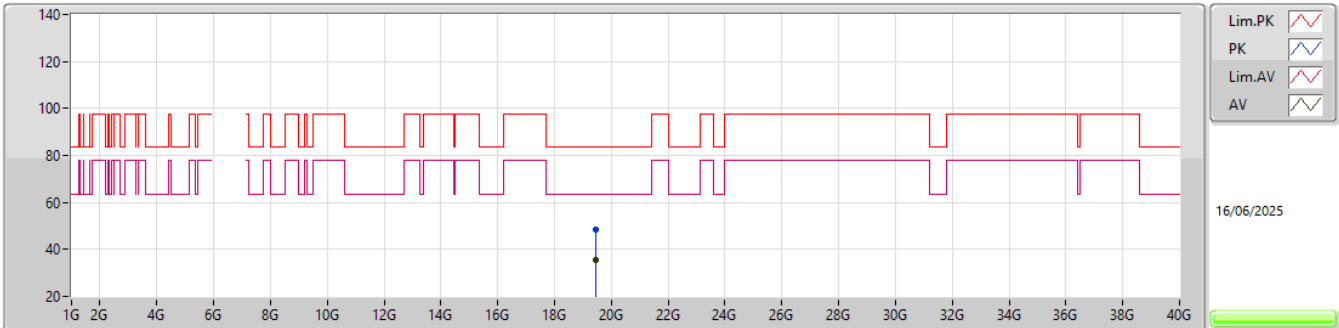EUT_Y_2TX
Setting 20
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.44852G	48.32	83.54	-35.22	38.53	1	Horizontal	203	2.77	-	37.71	20.88	48.80			
AV	19.45734G	35.26	63.54	-28.28	25.46	1	Horizontal	203	2.77	-	37.71	20.89	48.80			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6525MHz_TX

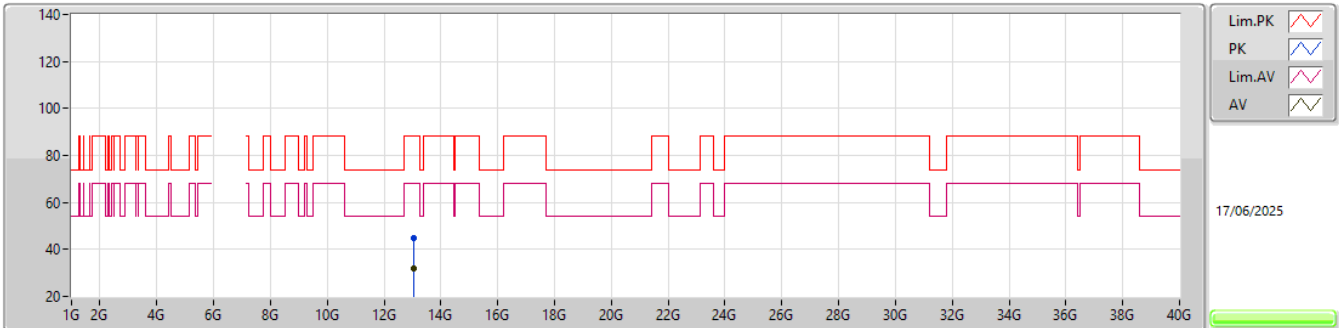EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.05369G	44.80	88.20	-43.40	58.34	3	Vertical	21	1.51	-	39.41	11.92	64.87			
RMS	13.03746G	31.85	68.20	-36.35	45.41	3	Vertical	21	1.51	-	39.40	11.92	64.88			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6525MHz_TX

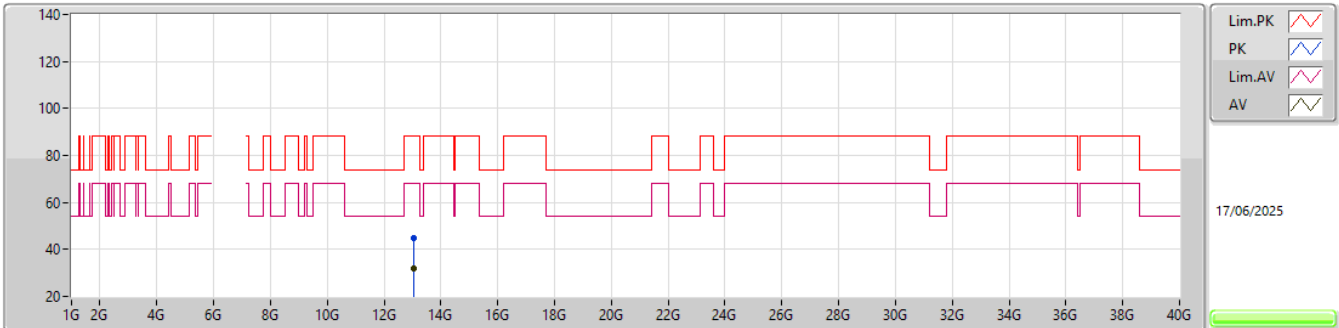EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.04469G	44.95	88.20	-43.25	58.51	3	Horizontal	150	1.68	-	39.40	11.92	64.88			
RMS	13.03842G	31.90	68.20	-36.30	45.46	3	Horizontal	150	1.68	-	39.40	11.92	64.88			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6525MHz_TX

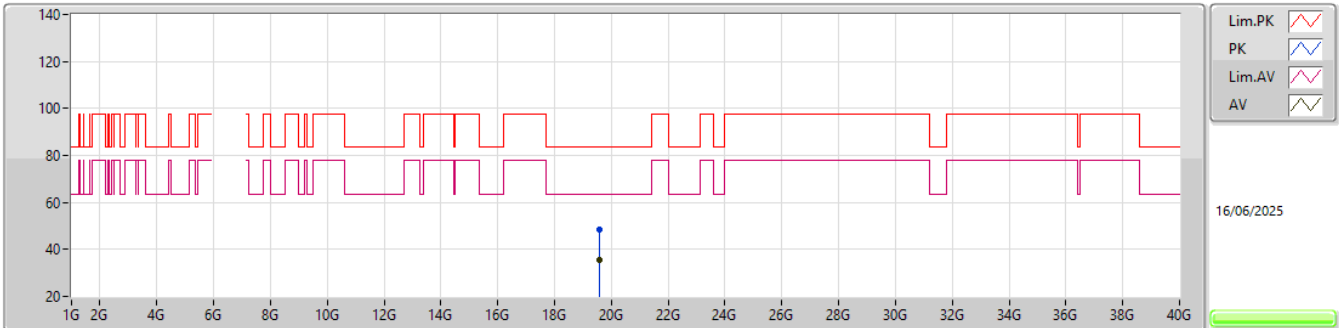EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.58046G	48.47	83.54	-35.07	38.72	1	Vertical	349	2.89	-	37.70	20.85	48.80			
AV	19.5711G	35.53	63.54	-28.01	25.77	1	Vertical	349	2.89	-	37.70	20.86	48.80			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6525MHz_TX

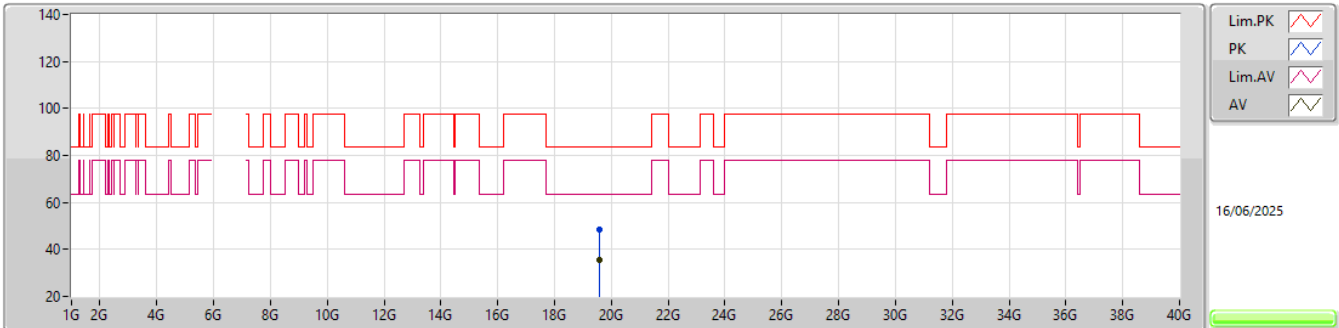EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.57476G	48.41	83.54	-35.13	38.65	1	Horizontal	7	2.46	-	37.70	20.86	48.80			
AV	19.5624G	35.60	63.54	-27.94	25.83	1	Horizontal	7	2.46	-	37.70	20.87	48.80			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6565MHz_TX

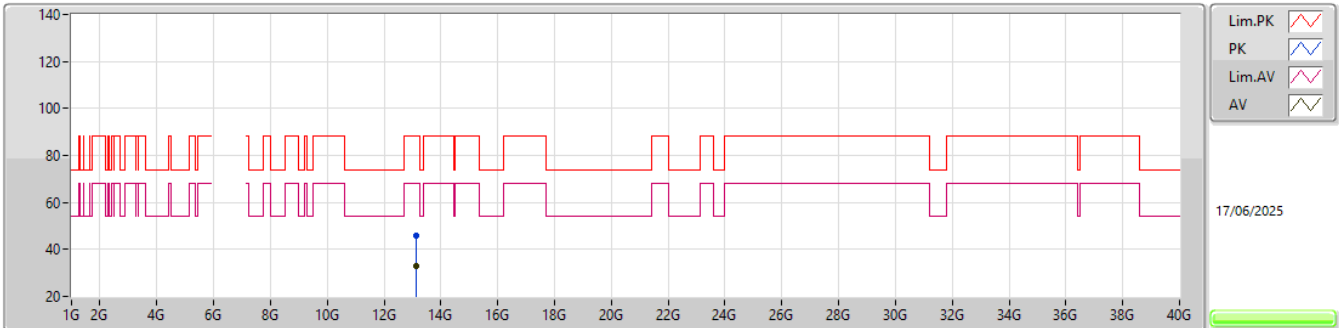EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.12619G	45.71	88.20	-42.49	59.02	3	Vertical	10	1.56	-	39.65	11.91	64.87			
RMS	13.12289G	32.81	68.20	-35.39	46.12	3	Vertical	10	1.56	-	39.65	11.91	64.87			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6565MHz_TX

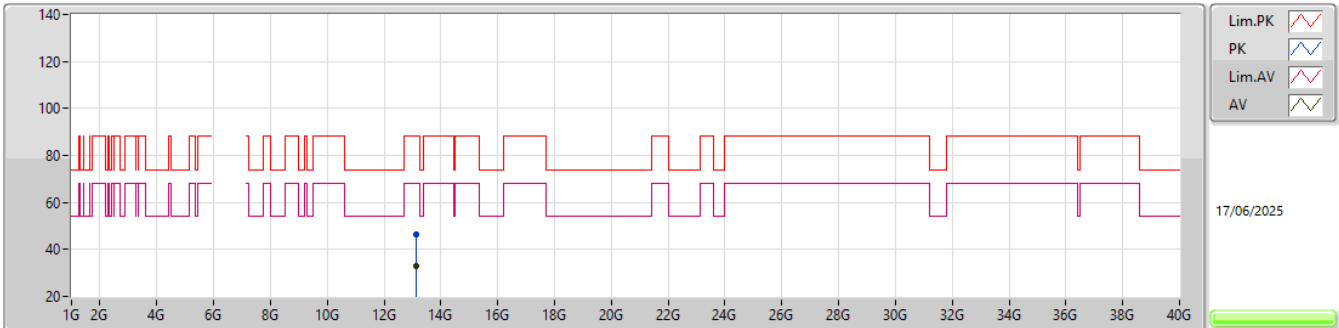EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.12763G	46.29	88.20	-41.91	59.59	3	Horizontal	291	1.52	-	39.66	11.91	64.87			
RMS	13.11686G	32.84	68.20	-35.36	46.17	3	Horizontal	291	1.52	-	39.63	11.91	64.87			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6565MHz_TX

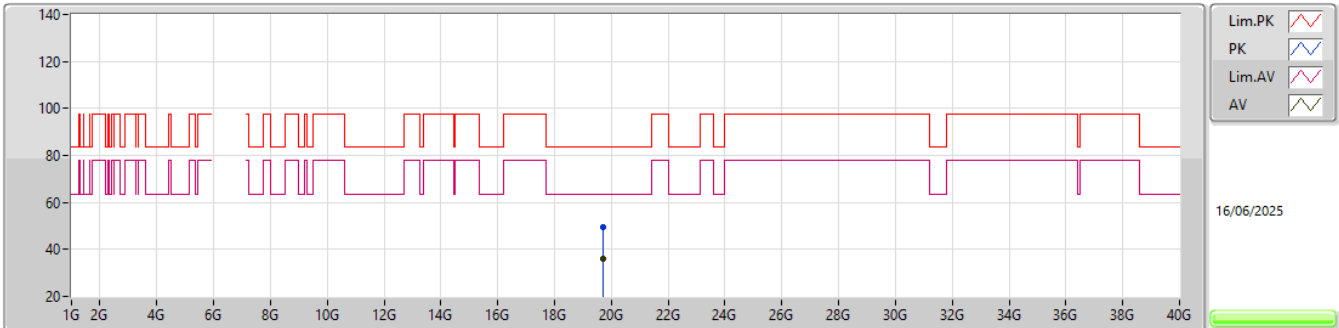EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.70118G	49.40	83.54	-34.14	39.73	1	Vertical	272	2.84	-	37.70	20.77	48.80			
AV	19.70352G	35.93	63.54	-27.61	26.27	1	Vertical	272	2.84	-	37.70	20.76	48.80			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6565MHz_TX

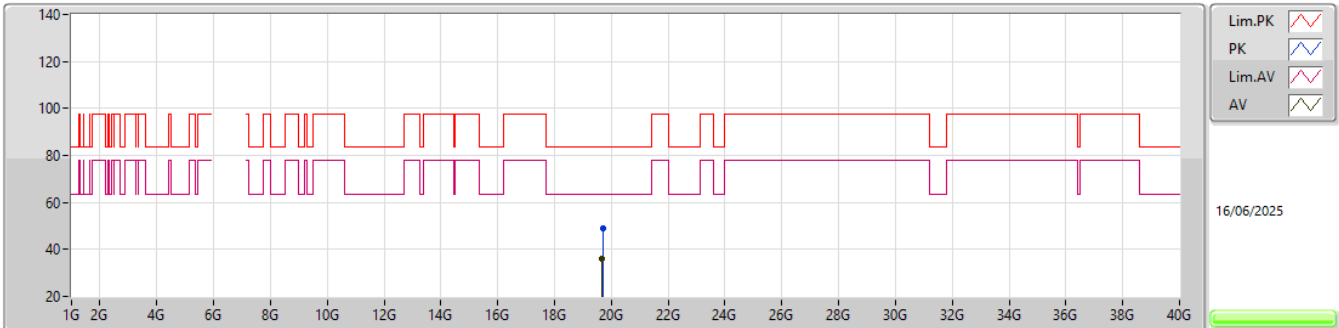EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.70124G	49.10	83.54	-34.44	39.43	1	Horizontal	113	1.06	-	37.70	20.77	48.80			
AV	19.68354G	36.00	63.54	-27.54	26.32	1	Horizontal	113	1.06	-	37.70	20.78	48.80			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6685MHz_TX

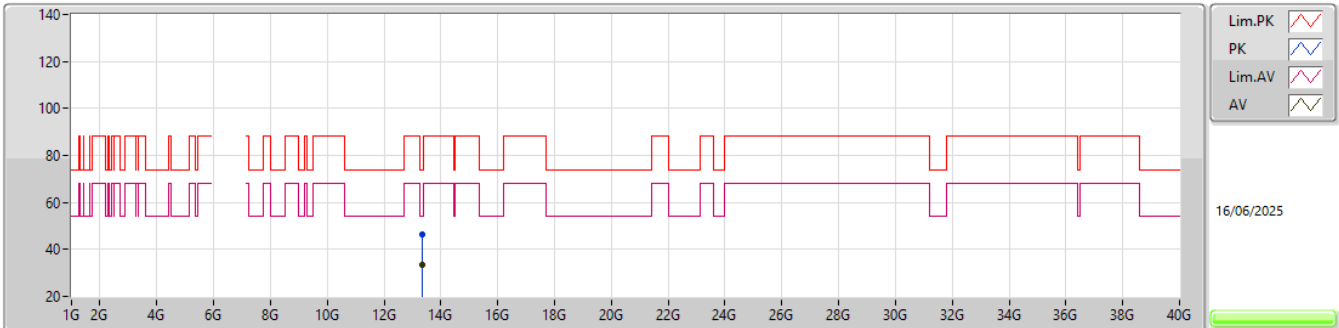EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.36538G	46.37	74.00	-27.63	59.17	3	Vertical	347	2.19	-	40.16	11.88	64.84			
AV	13.3589G	33.33	54.00	-20.67	46.15	3	Vertical	347	2.19	-	40.14	11.88	64.84			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6685MHz_TX

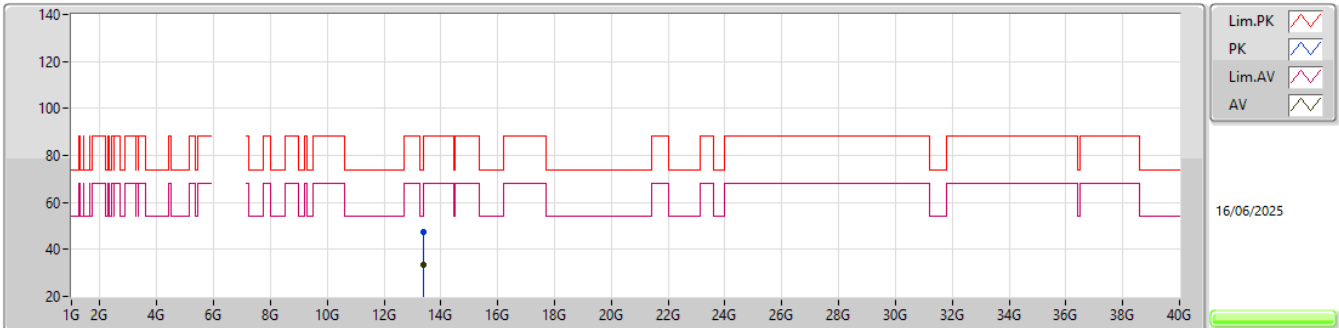EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.37192G	47.48	74.00	-26.52	60.26	3	Horizontal	106	2.14	-	40.19	11.87	64.84			
AV	13.37564G	33.40	54.00	-20.60	46.17	3	Horizontal	106	2.14	-	40.20	11.87	64.84			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6685MHz_TX

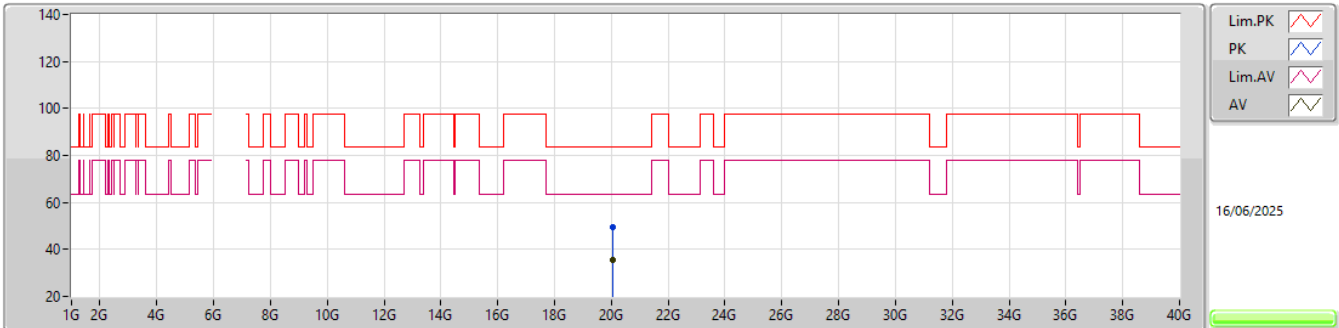EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.06238G	49.68	83.54	-33.86	40.01	1	Vertical	283	2.01	-	37.80	20.66	48.79			
AV	20.06856G	35.73	63.54	-27.81	26.05	1	Vertical	283	2.01	-	37.80	20.67	48.79			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6685MHz_TX

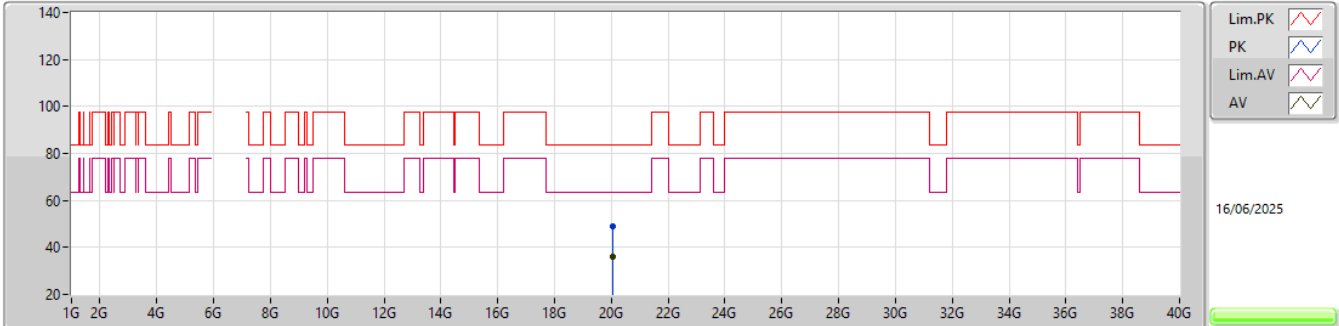EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.04618G	49.17	83.54	-34.37	39.54	1	Horizontal	67	2.34	-	37.79	20.63	48.79			
AV	20.06772G	35.79	63.54	-27.75	26.11	1	Horizontal	67	2.34	-	37.80	20.67	48.79			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6885MHz_TX

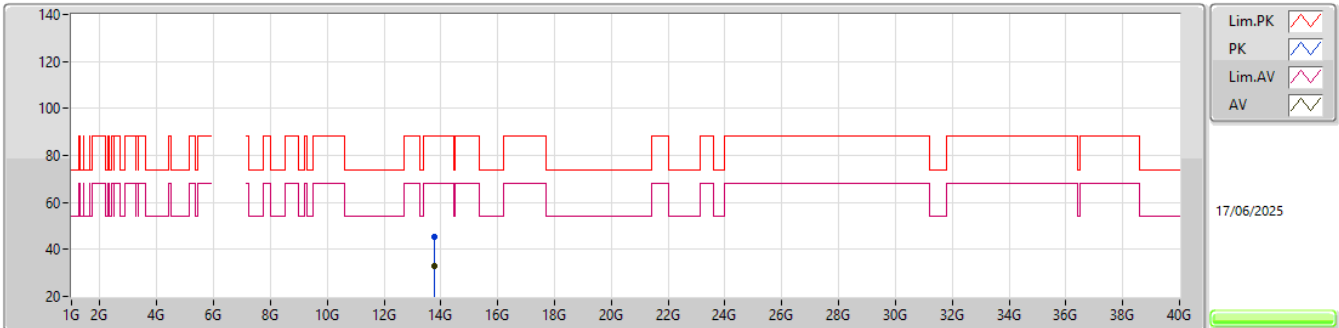EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.76061G	45.60	88.20	-42.60	57.67	3	Vertical	193	1.77	-	40.82	11.82	64.71			
RMS	13.78356G	32.95	68.20	-35.25	44.97	3	Vertical	193	1.77	-	40.87	11.81	64.70			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6885MHz_TX

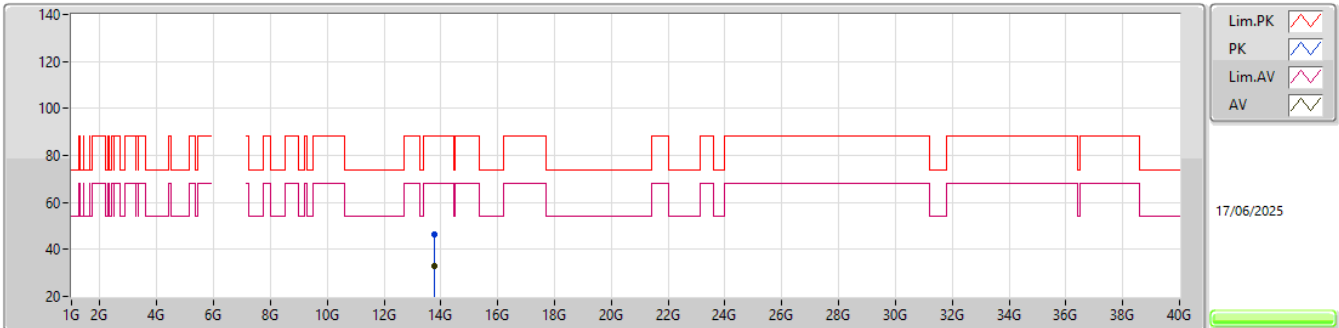EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.75557G	46.27	88.20	-41.93	58.35	3	Horizontal	113	1.61	-	40.81	11.82	64.71			
RMS	13.78425G	33.09	68.20	-35.11	45.11	3	Horizontal	113	1.61	-	40.87	11.81	64.70			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6885MHz_TX

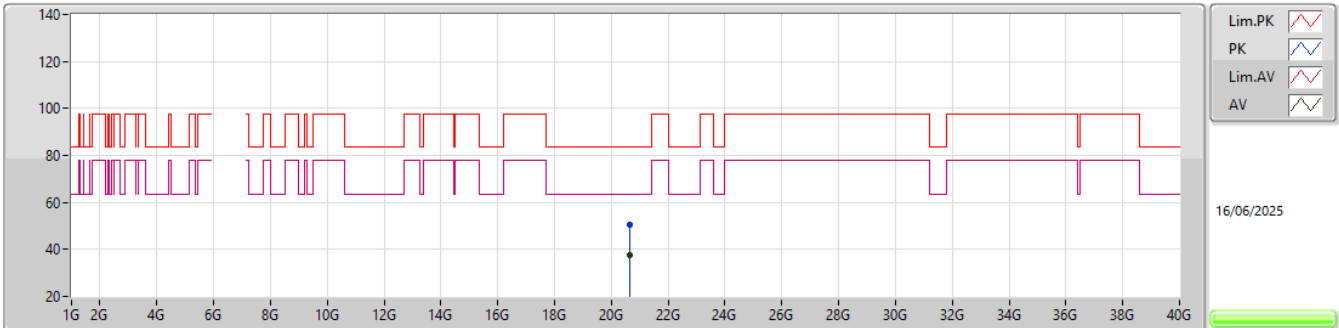EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.6448G	50.31	83.54	-33.23	39.50	1	Vertical	352	1.27	-	37.90	21.61	48.70			
AV	20.66676G	37.81	63.54	-25.73	26.98	1	Vertical	352	1.27	-	37.90	21.63	48.70			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6885MHz_TX

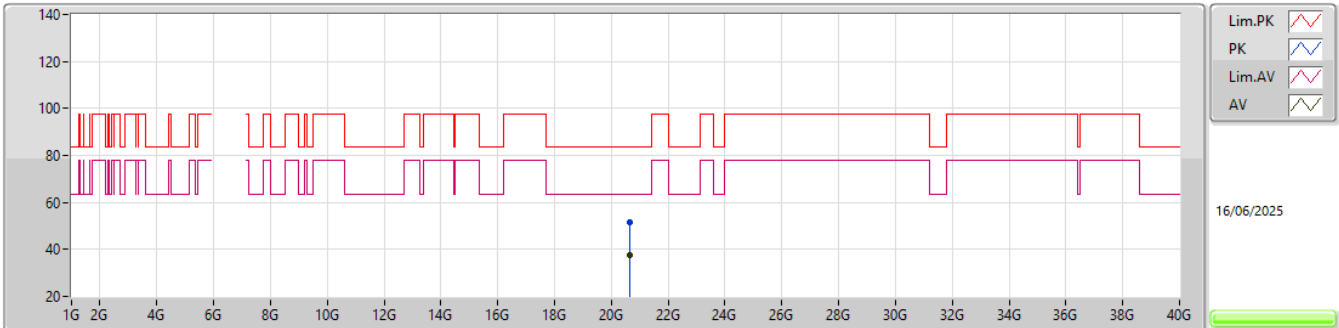EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.64042G	51.32	83.54	-32.22	40.52	1	Horizontal	220	2.89	-	37.90	21.60	48.70			
AV	20.66214G	37.81	63.54	-25.73	26.98	1	Horizontal	220	2.89	-	37.90	21.63	48.70			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6925MHz_TX

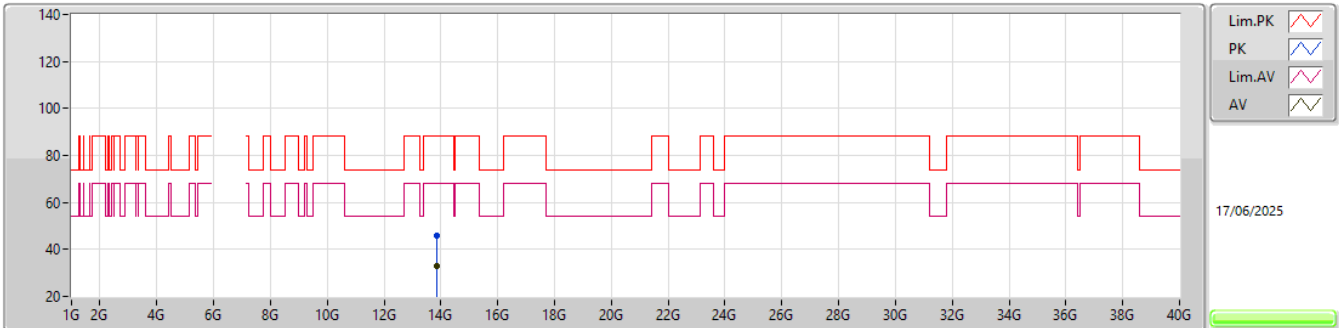EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.84781G	45.68	88.20	-42.52	57.46	3	Vertical	328	1.38	-	41.09	11.80	64.67			
RMS	13.84781G	32.88	68.20	-35.32	44.66	3	Vertical	328	1.38	-	41.09	11.80	64.67			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6925MHz_TX

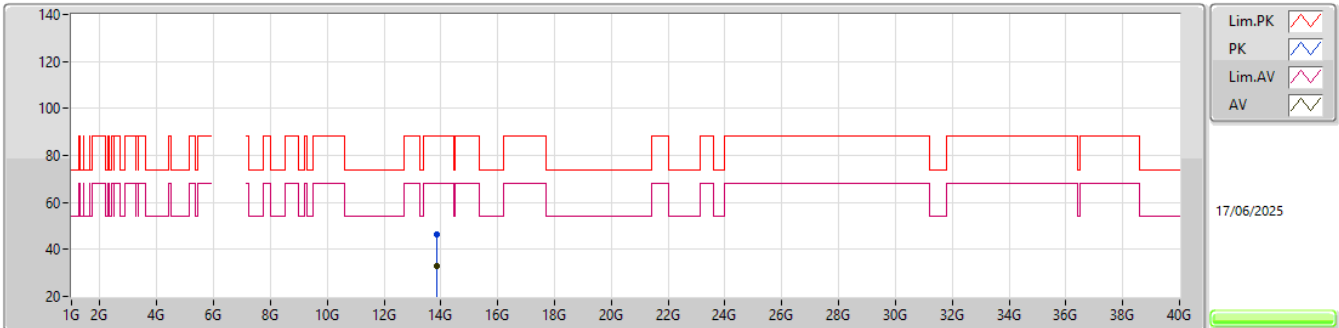EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.84502G	46.41	88.20	-41.79	58.20	3	Horizontal	247	2.75	-	41.08	11.80	64.67			
RMS	13.84865G	32.86	68.20	-35.34	44.64	3	Horizontal	247	2.75	-	41.09	11.80	64.67			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6925MHz_TX

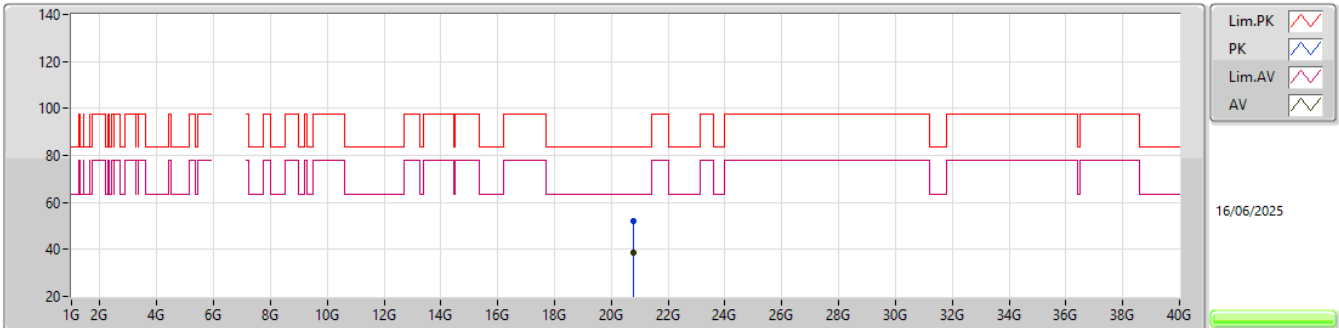EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.78736G	51.82	83.54	-31.72	40.87	1	Vertical	170	2.80	-	37.90	21.75	48.70			
AV	20.76924G	38.62	63.54	-24.92	27.69	1	Vertical	170	2.80	-	37.90	21.73	48.70			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6925MHz_TX

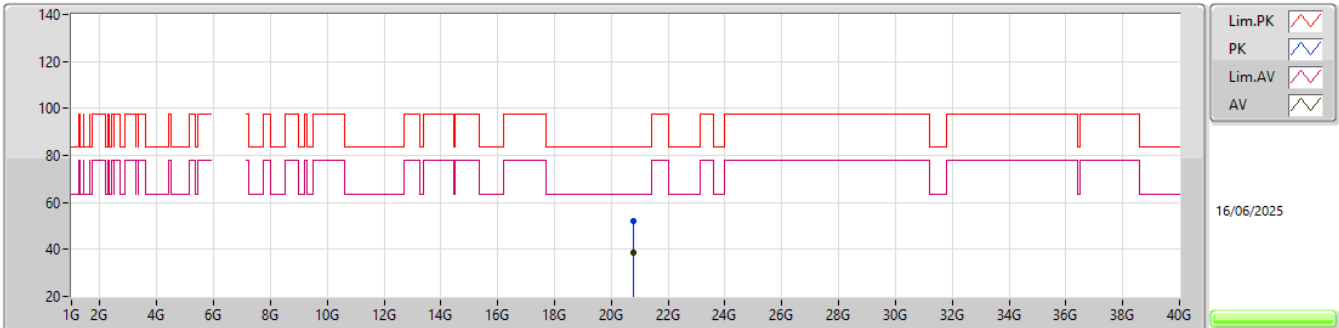EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.7864G	51.95	83.54	-31.59	41.00	1	Horizontal	179	1.76	-	37.90	21.75	48.70			
AV	20.76702G	38.66	63.54	-24.88	27.73	1	Horizontal	179	1.76	-	37.90	21.73	48.70			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


7005MHz_TX

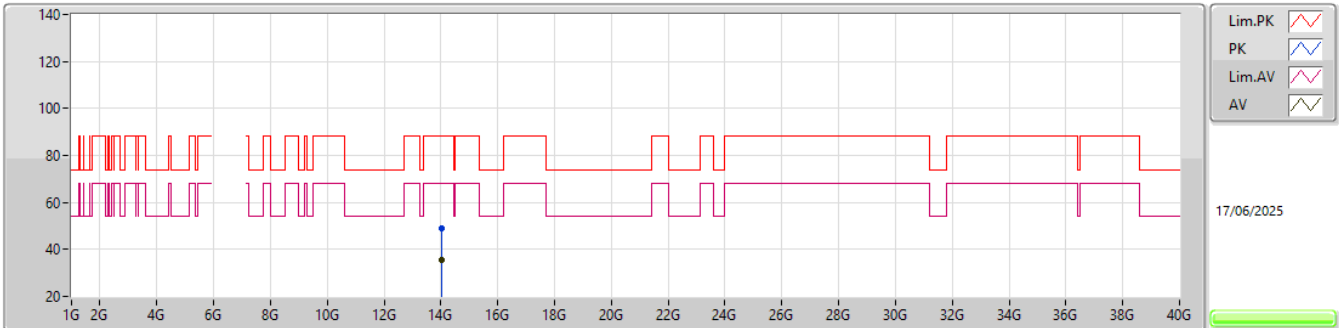EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.01033G	49.06	88.20	-39.14	60.35	3	Vertical	350	1.02	-	41.52	11.78	64.59			
RMS	14.0247G	35.34	68.20	-32.86	46.60	3	Vertical	350	1.02	-	41.55	11.78	64.59			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

7005MHz_TX

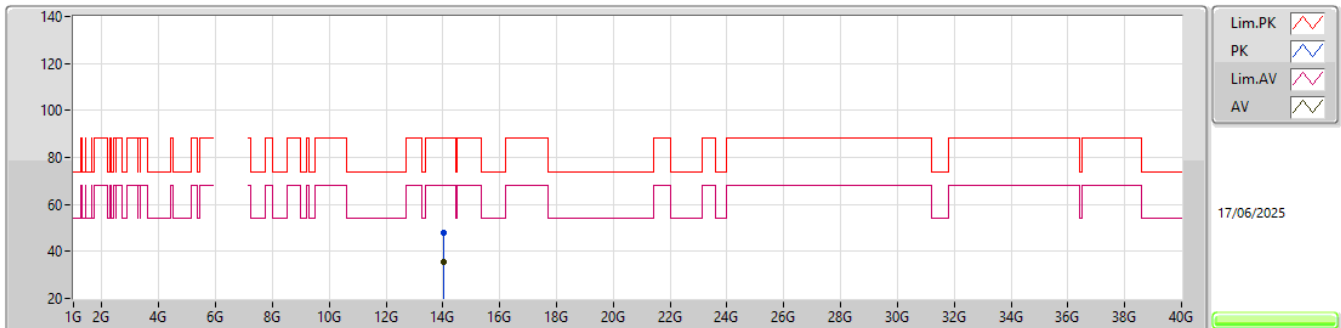


EUT Y_2TX
Setting 19
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.01075G	48.15	88.20	-40.05	59.44	3	Horizontal	78	1.32	-	41.52	11.78	64.59			
RMS	14.02299G	35.26	68.20	-32.94	46.52	3	Horizontal	78	1.32	-	41.55	11.78	64.59			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


7005MHz_TX

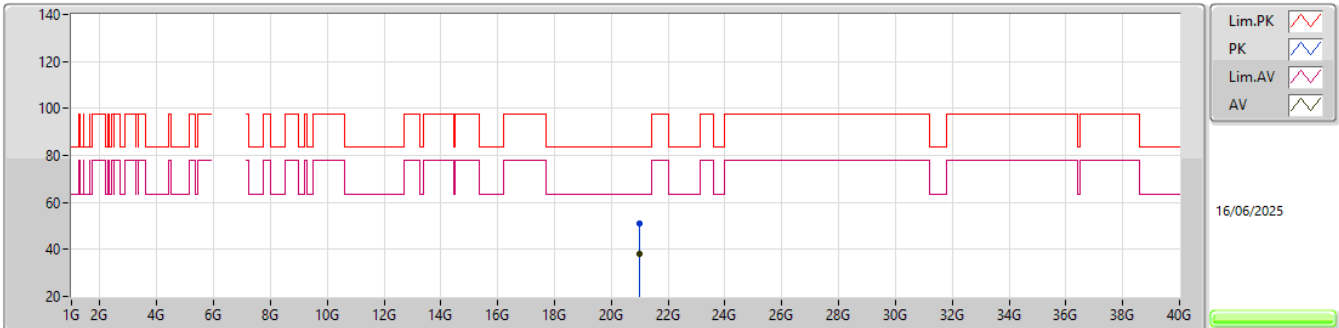EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	21.00354G	51.26	83.54	-32.28	39.99	1	Vertical	262	1.46	-	38.00	21.97	48.70			
AV	21.00486G	38.00	63.54	-25.54	26.73	1	Vertical	262	1.46	-	38.00	21.97	48.70			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


7005MHz_TX

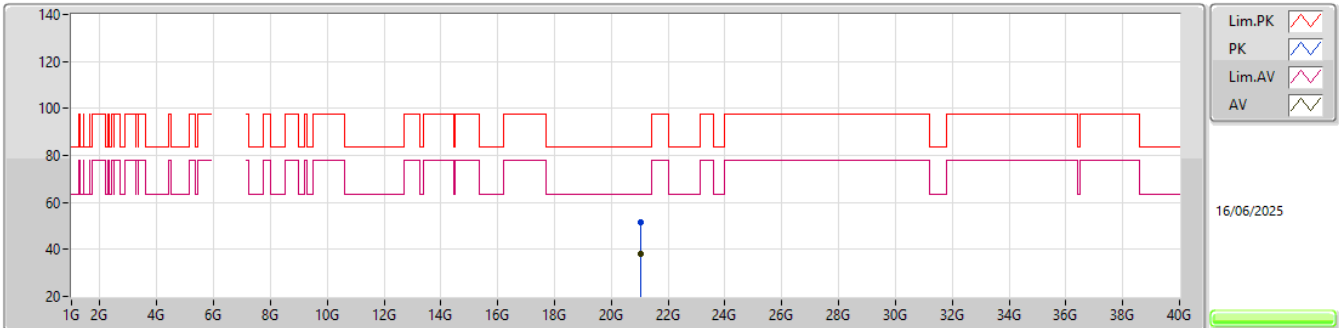EUT_Y_2TX
Setting 19
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	21.01398G	51.68	83.54	-31.86	40.42	1	Horizontal	95	2.78	-	38.00	21.96	48.70			
AV	21.01272G	37.86	63.54	-25.68	26.60	1	Horizontal	95	2.78	-	38.00	21.96	48.70			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

7085MHz_TX

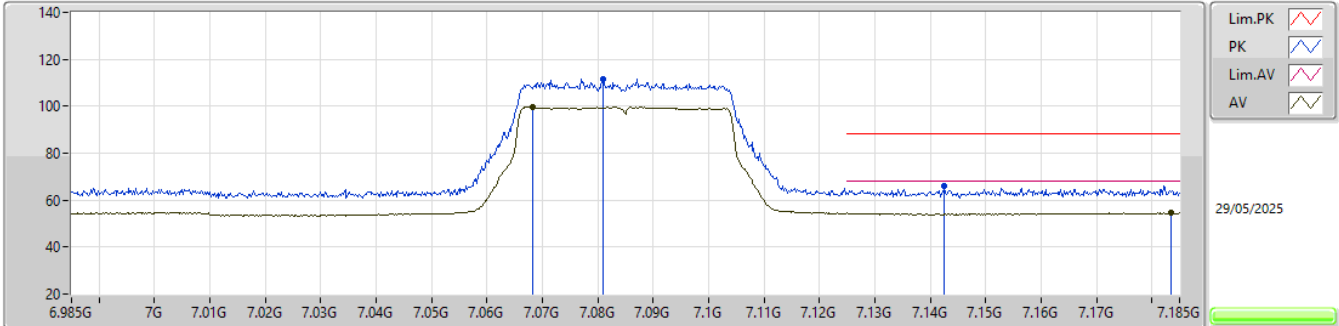


EUT_Y_2TX
Setting 20
01-U-A-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.081G	111.66	Inf	-Inf	99.67	3	Vertical	274	1.80	-	36.76	7.95	32.72			
RMS	7.0682G	99.58	Inf	-Inf	87.61	3	Vertical	274	1.80	-	36.74	7.95	32.72			
PK	7.1426G	65.86	88.20	-22.34	53.72	3	Vertical	274	1.80	-	36.89	7.95	32.70			
RMS	7.1834G	54.48	68.20	-13.72	42.12	3	Vertical	274	1.80	-	37.10	7.94	32.68			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


7085MHz_TX

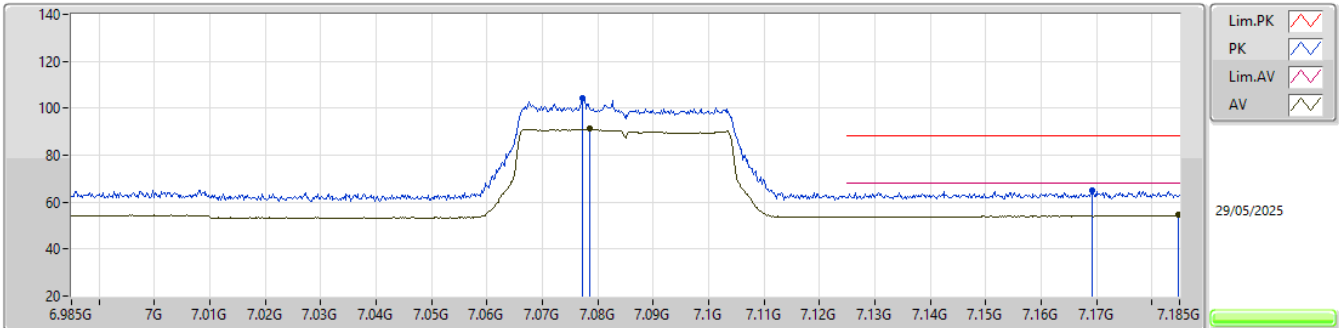EUT_Y_2TX
Setting 20
01-U-A-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.0772G	104.51	Inf	-Inf	92.53	3	Horizontal	150	1.79	-	36.75	7.95	32.72			
RMS	7.0786G	91.25	Inf	-Inf	79.26	3	Horizontal	150	1.79	-	36.76	7.95	32.72			
PK	7.1692G	64.77	88.20	-23.43	52.50	3	Horizontal	150	1.79	-	37.02	7.94	32.69			
RMS	7.1848G	54.41	68.20	-13.79	42.04	3	Horizontal	150	1.79	-	37.11	7.94	32.68			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


7085MHz_TX

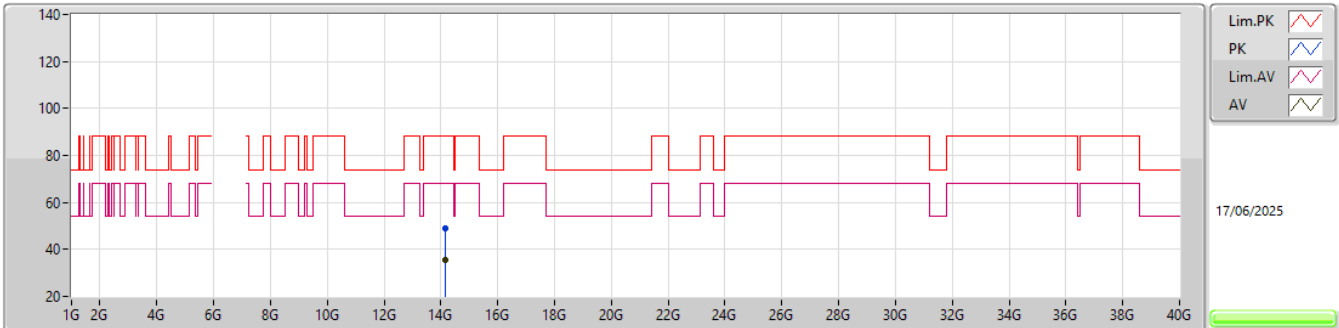EUT_Y_2TX
Setting 20
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.17219G	49.12	88.20	-39.08	59.74	3	Vertical	83	2.19	-	42.09	11.79	64.50			
RMS	14.16799G	35.66	68.20	-32.54	46.30	3	Vertical	83	2.19	-	42.07	11.79	64.50			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

7085MHz_TX

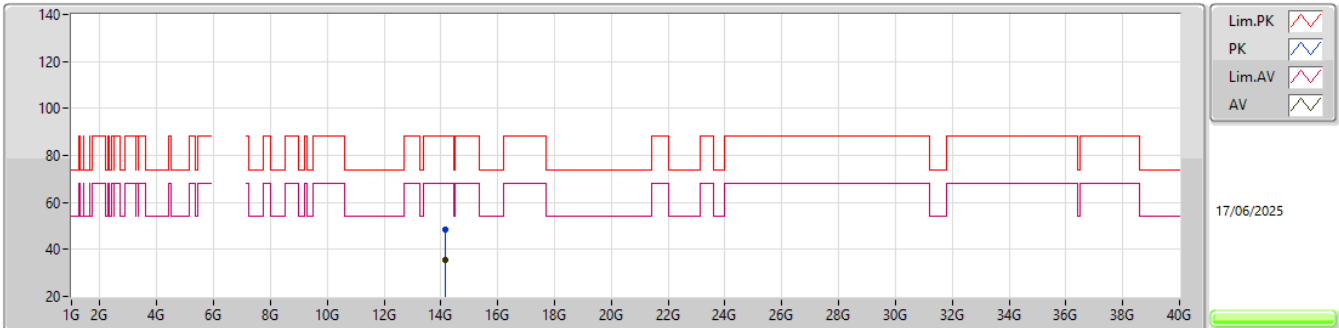


EUT_Y_2TX
Setting 20
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.16118G	48.40	88.20	-39.80	59.07	3	Horizontal	64	2.64	-	42.04	11.79	64.50			
RMS	14.16874G	35.66	68.20	-32.54	46.30	3	Horizontal	64	2.64	-	42.07	11.79	64.50			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


7085MHz_TX

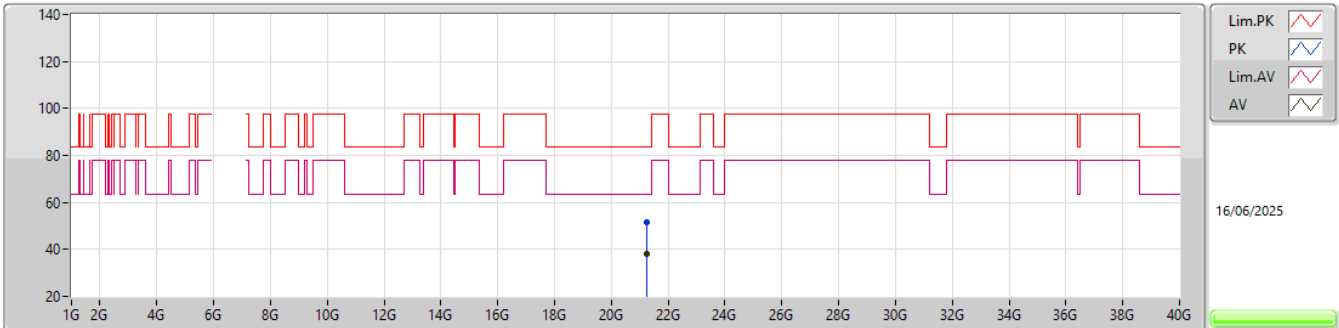EUT_Y_2TX
Setting 20
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	21.26268G	51.61	83.54	-31.93	40.42	1	Vertical	177	1.07	-	38.03	21.81	48.65			
AV	21.26076G	37.90	63.54	-25.64	26.72	1	Vertical	177	1.07	-	38.02	21.81	48.65			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


7085MHz_TX

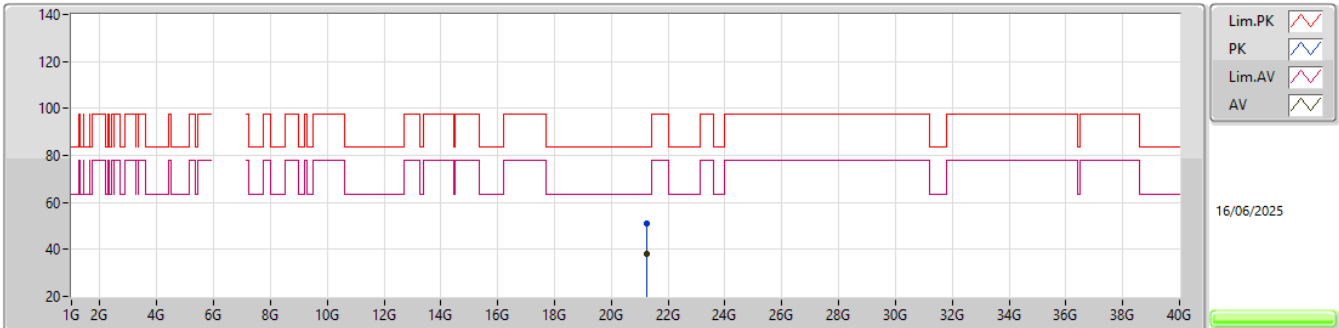EUT_Y_2TX
Setting 20
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.243G	51.23	83.54	-32.31	40.05	1	Horizontal	167	2.74	-	38.01	21.82	48.65			
AV	21.2655G	38.04	63.54	-25.50	26.85	1	Horizontal	167	2.74	-	38.03	21.81	48.65			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

5985MHz_TX

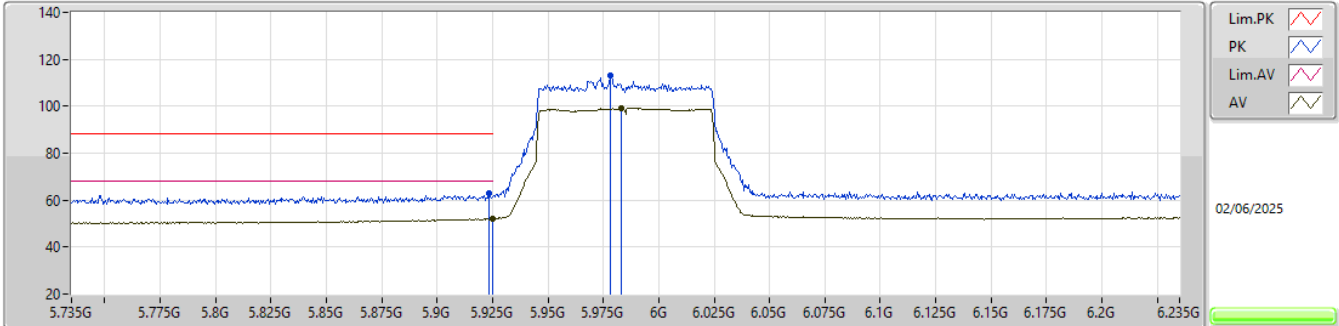


EUT_Y_2TX
Setting 21
01-U-S-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9235G	62.80	88.20	-25.40	52.86	3	Vertical	275	1.80	-	34.94	7.44	32.44			
RMS	5.925G	52.14	68.20	-16.06	42.19	3	Vertical	275	1.80	-	34.95	7.44	32.44			
PK	5.978G	113.21	Inf	-Inf	102.96	3	Vertical	275	1.80	-	35.21	7.48	32.44			
RMS	5.983G	99.29	Inf	-Inf	89.01	3	Vertical	275	1.80	-	35.23	7.49	32.44			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

5985MHz_TX

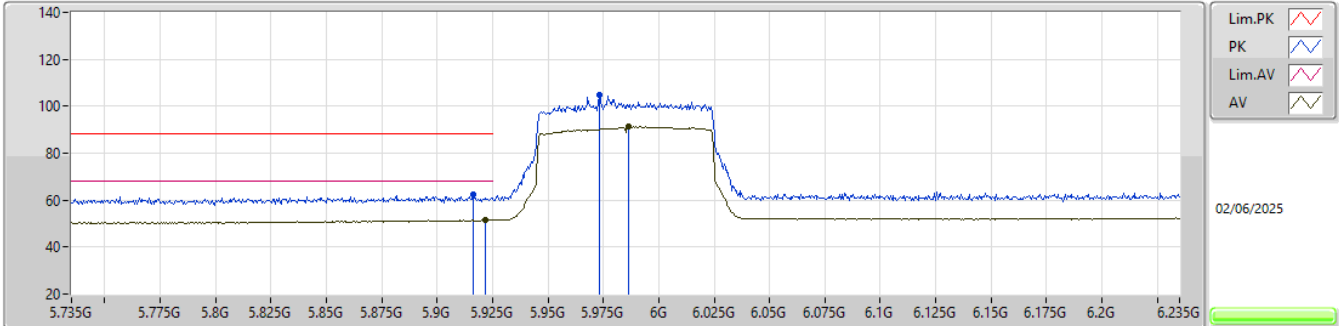


EUT_Y_2TX
Setting 21
01-U-S-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.916G	62.24	88.20	-25.96	52.34	3	Horizontal	327	2.93	-	34.90	7.44	32.44			
RMS	5.922G	51.45	68.20	-16.75	41.52	3	Horizontal	327	2.93	-	34.93	7.44	32.44			
PK	5.973G	105.02	Inf	-Inf	94.79	3	Horizontal	327	2.93	-	35.19	7.48	32.44			
RMS	5.9865G	91.33	Inf	-Inf	81.03	3	Horizontal	327	2.93	-	35.25	7.49	32.44			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

5985MHz_TX

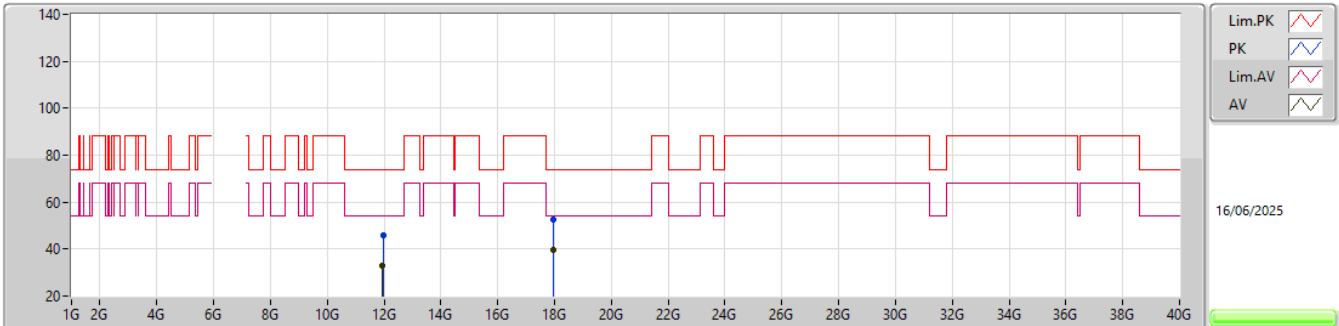


EUT_Y_2TX
Setting 21
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.97297G	45.85	74.00	-28.15	60.31	3	Vertical	271	2.32	-	39.25	12.06	65.77			
AV	11.95662G	32.86	54.00	-21.14	47.31	3	Vertical	271	2.32	-	39.29	12.05	65.79			
PK	17.95686G	52.51	74.00	-21.49	57.08	3	Vertical	93	1.05	-	46.59	12.80	63.96			
AV	17.94276G	39.56	54.00	-14.44	44.13	3	Vertical	93	1.05	-	46.61	12.79	63.97			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


5985MHz_TX

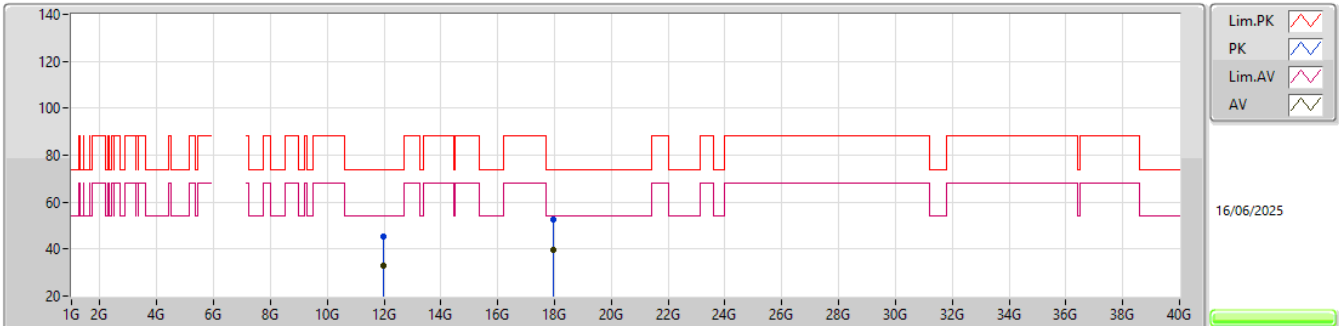EUT_Y_2TX
Setting 21
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.9628G	45.51	74.00	-28.49	59.96	3	Horizontal	60	1.76	-	39.27	12.06	65.78			
AV	11.95707G	32.86	54.00	-21.14	47.31	3	Horizontal	60	1.76	-	39.29	12.05	65.79			
PK	17.95389G	52.70	74.00	-21.30	57.27	3	Horizontal	350	2.10	-	46.59	12.80	63.96			
AV	17.94507G	39.57	54.00	-14.43	44.14	3	Horizontal	350	2.10	-	46.61	12.79	63.97			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


5985MHz_TX

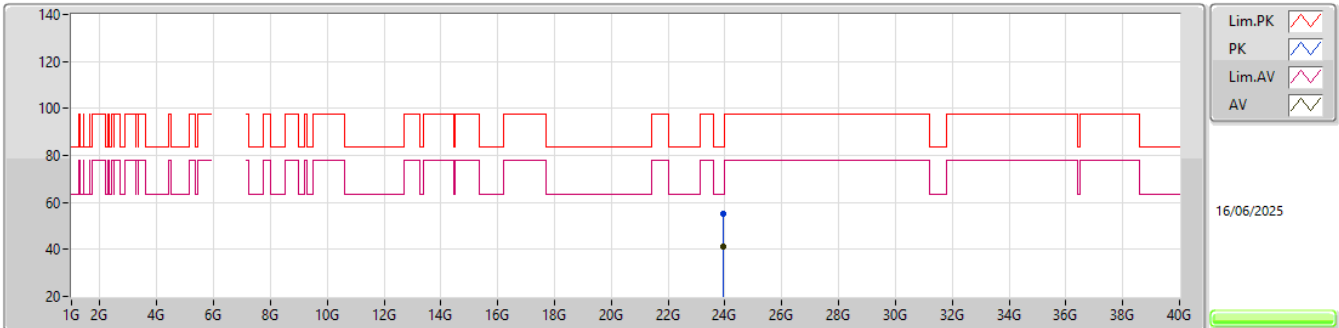EUT_Y_2TX
Setting 21
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.94324G	54.95	83.54	-28.59	40.49	1	Vertical	113	2.72	-	39.00	23.08	47.62			
AV	23.92602G	41.41	63.54	-22.13	26.97	1	Vertical	113	2.72	-	39.00	23.07	47.63			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


5985MHz_TX

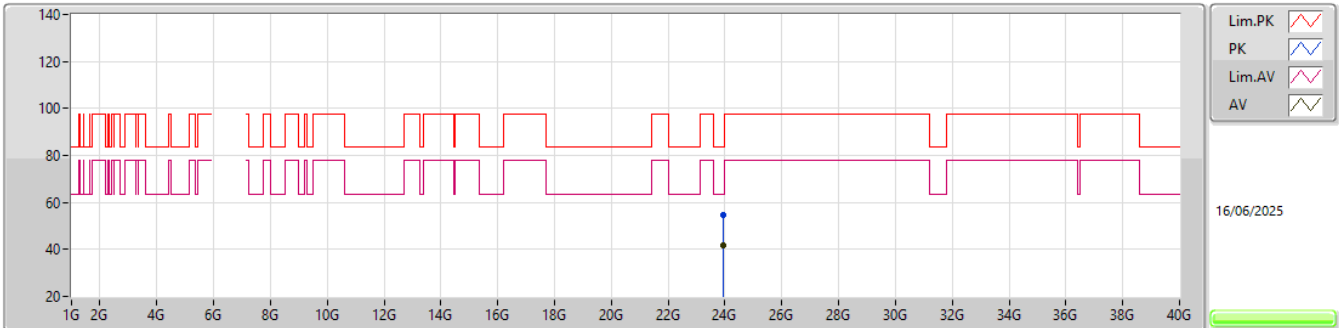EUT_Y_2TX
Setting 21
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.9355G	54.44	83.54	-29.10	40.00	1	Horizontal	221	1.70	-	39.00	23.07	47.63			
AV	23.95254G	41.50	63.54	-22.04	27.02	1	Horizontal	221	1.70	-	39.01	23.09	47.62			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6225MHz_TX

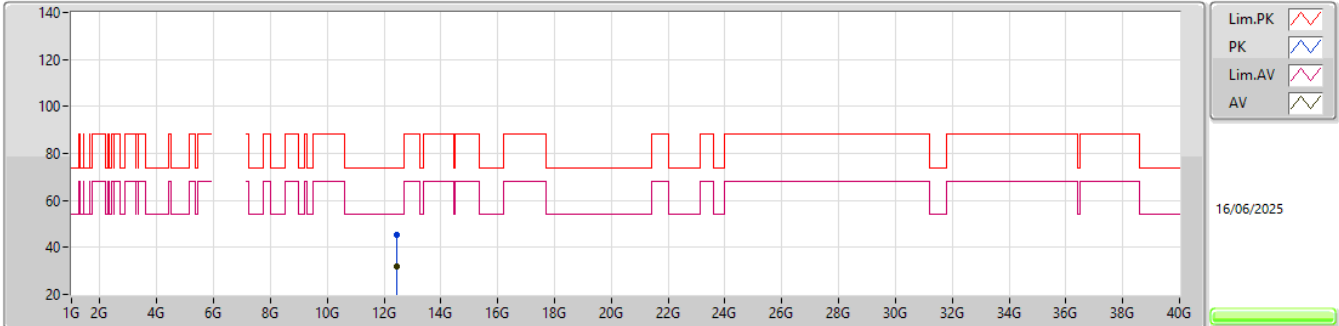EUT_Y_2TX
Setting 21
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.44196G	45.51	74.00	-28.49	60.39	3	Vertical	13	2.53	-	38.70	12.01	65.59			
AV	12.44706G	32.02	54.00	-21.98	46.90	3	Vertical	13	2.53	-	38.70	12.01	65.59			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6225MHz_TX

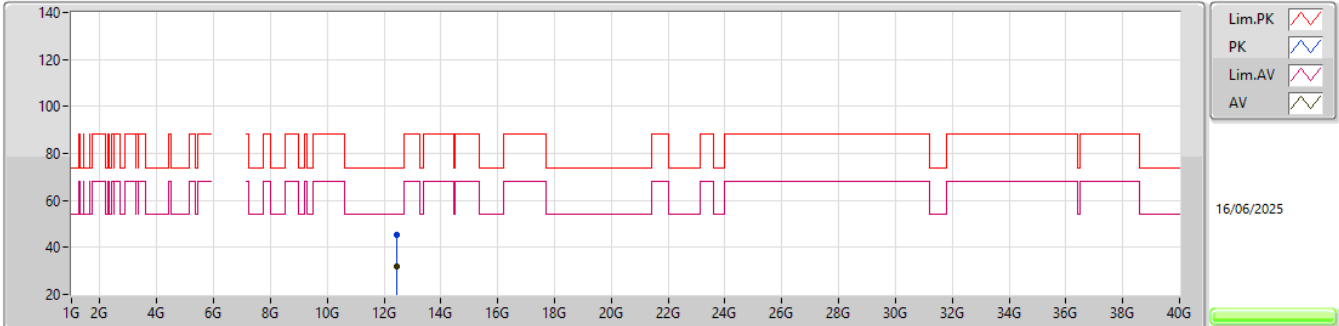EUT_Y_2TX
Setting 21
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.45669G	45.43	74.00	-28.57	60.31	3	Horizontal	113	2.03	-	38.70	12.01	65.59			
AV	12.44748G	32.11	54.00	-21.89	46.99	3	Horizontal	113	2.03	-	38.70	12.01	65.59			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6225MHz_TX

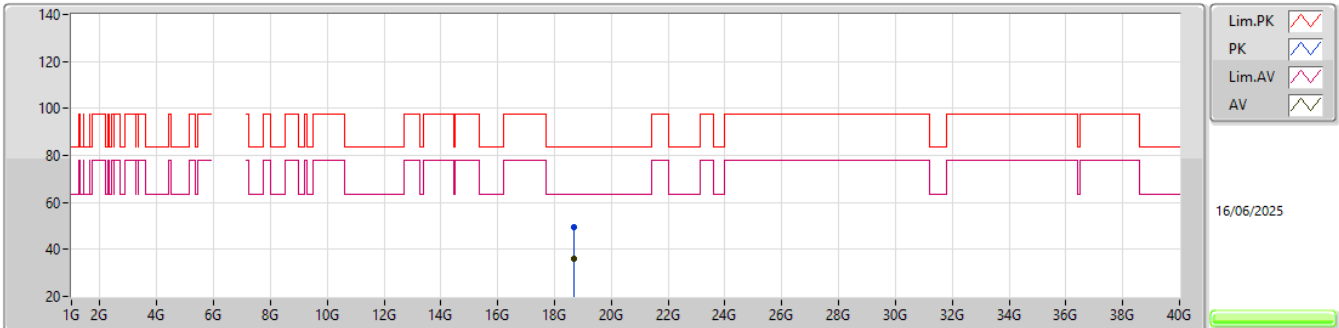EUT_Y_2TX
Setting 21
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.67008G	49.25	83.54	-34.29	39.20	1	Vertical	318	2.57	-	37.90	20.62	48.47			
AV	18.68832G	36.08	63.54	-27.46	26.05	1	Vertical	318	2.57	-	37.90	20.62	48.49			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6225MHz_TX

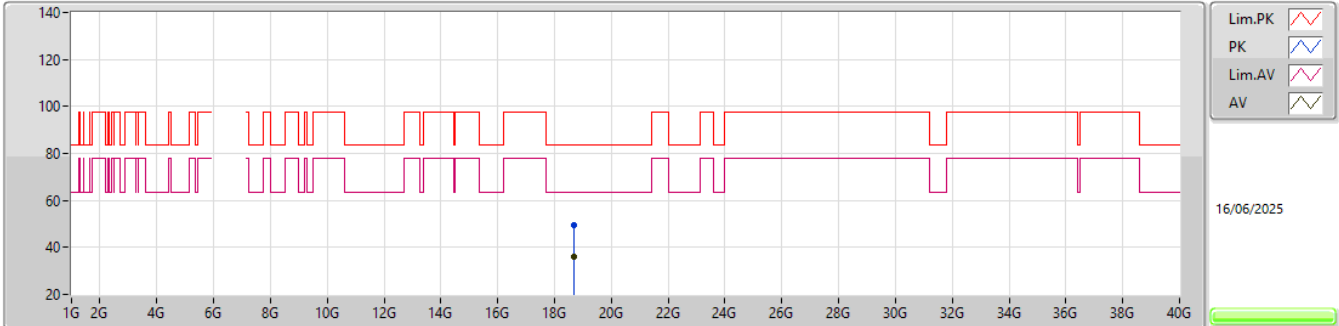EUT_Y_2TX
Setting 21
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.67416G	49.40	83.54	-34.14	39.35	1	Horizontal	50	1.95	-	37.90	20.62	48.47			
AV	18.6828G	36.04	63.54	-27.50	26.00	1	Horizontal	50	1.95	-	37.90	20.62	48.48			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6385MHz_TX

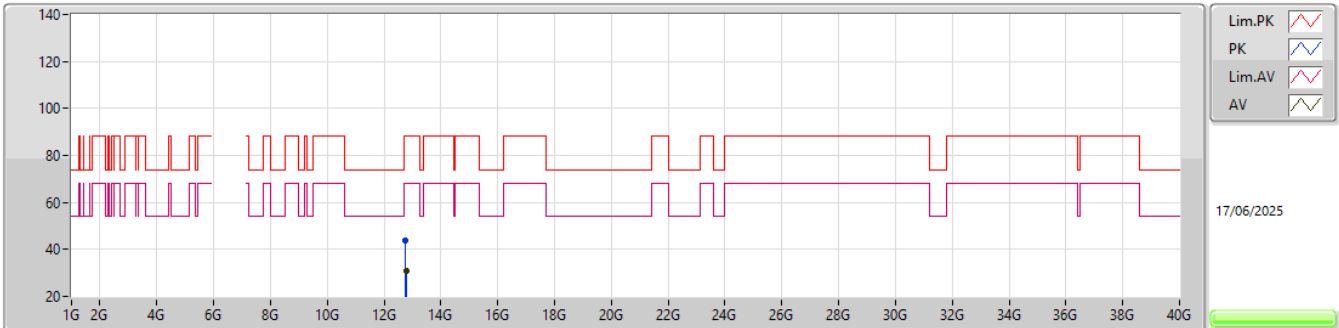EUT_Y_2TX
Setting 21
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.75908G	43.82	88.20	-44.38	58.24	3	Vertical	357	1.35	-	38.82	11.97	65.21			
RMS	12.78251G	31.02	68.20	-37.18	45.37	3	Vertical	357	1.35	-	38.87	11.96	65.18			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6385MHz_TX

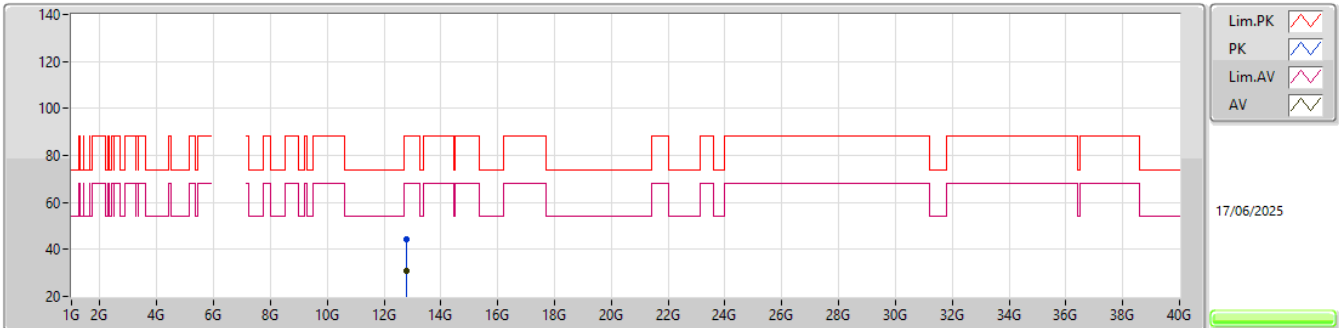EUT_Y_2TX
Setting 21
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.76982G	44.21	88.20	-43.99	58.61	3	Horizontal	250	2.43	-	38.84	11.96	65.20			
RMS	12.77972G	31.03	68.20	-37.17	45.39	3	Horizontal	250	2.43	-	38.86	11.96	65.18			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6385MHz_TX

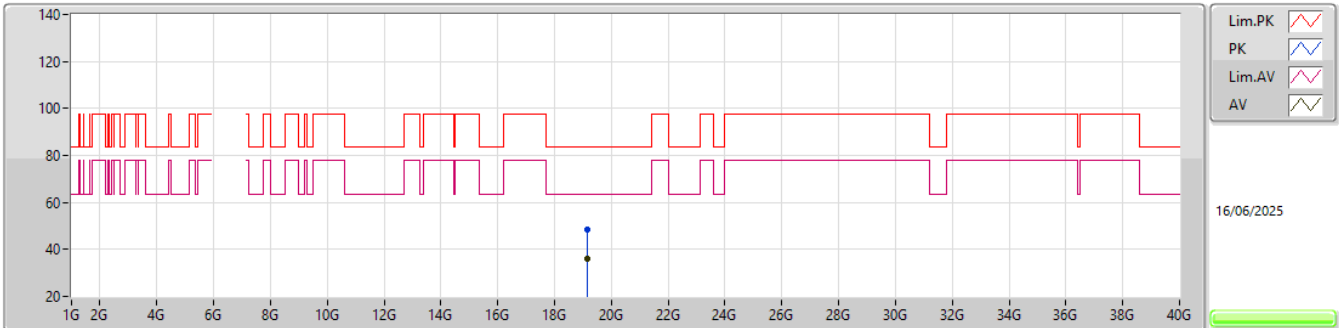EUT_Y_2TX
Setting 21
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.14774G	48.48	83.54	-35.06	38.55	1	Vertical	285	1.13	-	38.00	20.73	48.80			
AV	19.15308G	35.78	63.54	-27.76	25.86	1	Vertical	285	1.13	-	37.99	20.73	48.80			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6385MHz_TX

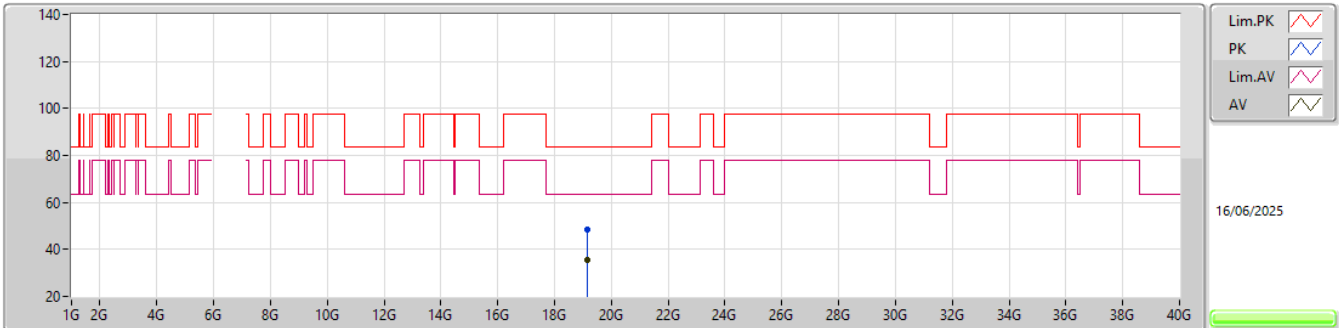EUT_Y_2TX
Setting 21
02-D-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.14564G	48.70	83.54	-34.84	38.77	1	Horizontal	311	1.42	-	38.00	20.73	48.80			
AV	19.14156G	35.76	63.54	-27.78	25.84	1	Horizontal	311	1.42	-	38.00	20.72	48.80			

6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6465MHz_TX

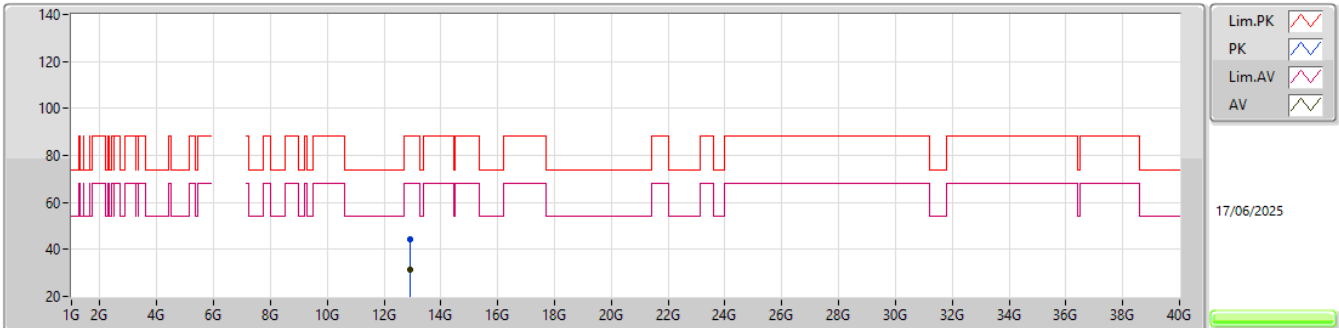EUT_Y_2TX
Setting 21
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.92505G	44.10	88.20	-44.10	57.89	3	Vertical	144	1.44	-	39.25	11.94	64.98			
RMS	12.92052G	31.33	68.20	-36.87	45.14	3	Vertical	144	1.44	-	39.24	11.94	64.99			

6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6465MHz_TX

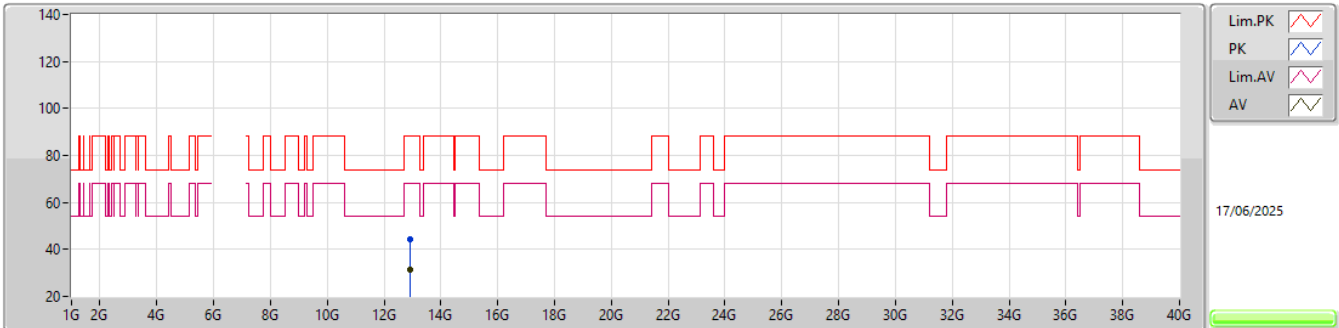EUT_Y_2TX
Setting 21
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.91548G	44.15	88.20	-44.05	57.98	3	Horizontal	289	1.48	-	39.23	11.94	65.00			
RMS	12.92316G	31.32	68.20	-36.88	45.12	3	Horizontal	289	1.48	-	39.25	11.94	64.99			

6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6465MHz_TX

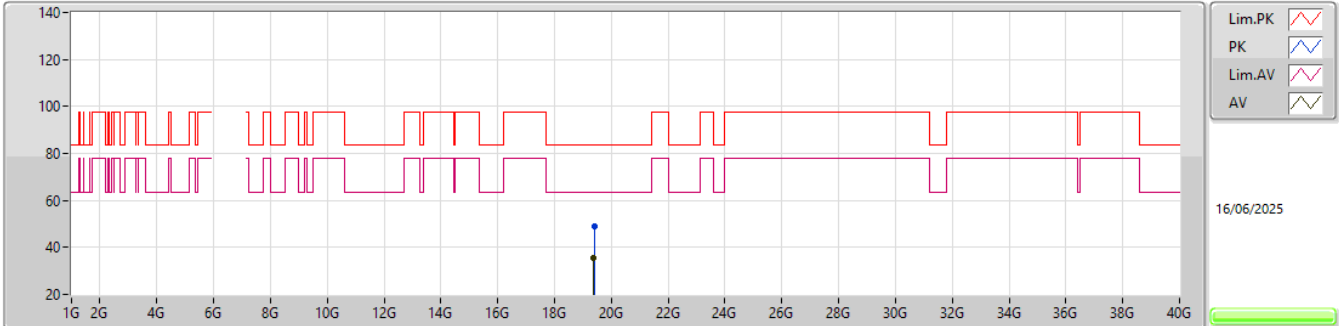EUT_Y_2TX
Setting 21
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.39746G	49.18	83.54	-34.36	39.23	1	Vertical	179	2.07	-	37.89	20.86	48.80			
AV	19.38726G	35.71	63.54	-27.83	25.79	1	Vertical	179	2.07	-	37.87	20.85	48.80			

6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6465MHz_TX

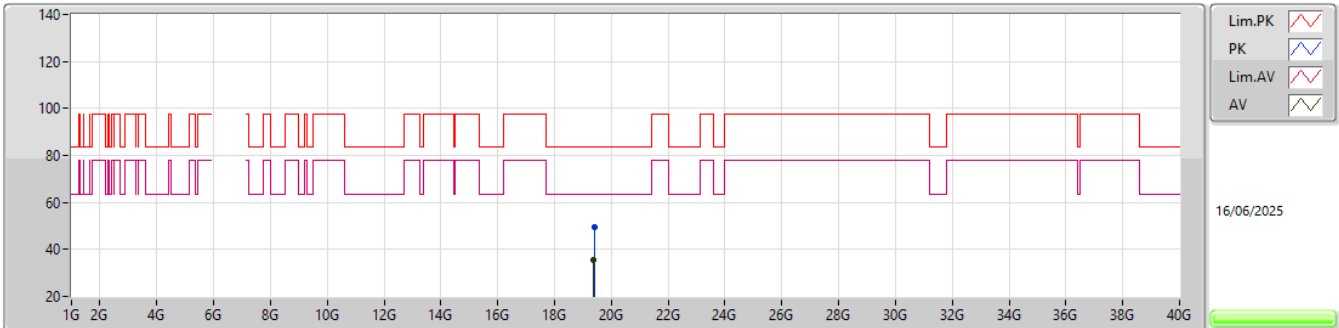EUT_Y_2TX
Setting 21
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.40814G	49.63	83.54	-33.91	39.70	1	Horizontal	333	1.18	-	37.87	20.86	48.80			
AV	19.3851G	35.55	63.54	-27.99	25.63	1	Horizontal	333	1.18	-	37.87	20.85	48.80			

6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6545MHz_TX

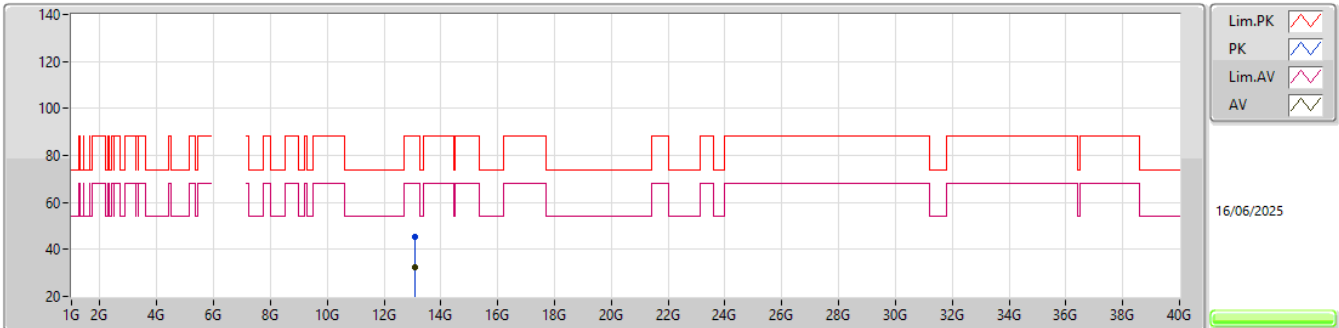EUT_Y_2TX
Setting 21
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.09945G	45.46	88.20	-42.74	58.81	3	Vertical	66	1.21	-	39.60	11.92	64.87			
RMS	13.0999G	32.44	68.20	-35.76	45.79	3	Vertical	66	1.21	-	39.60	11.92	64.87			

6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

6545MHz_TX

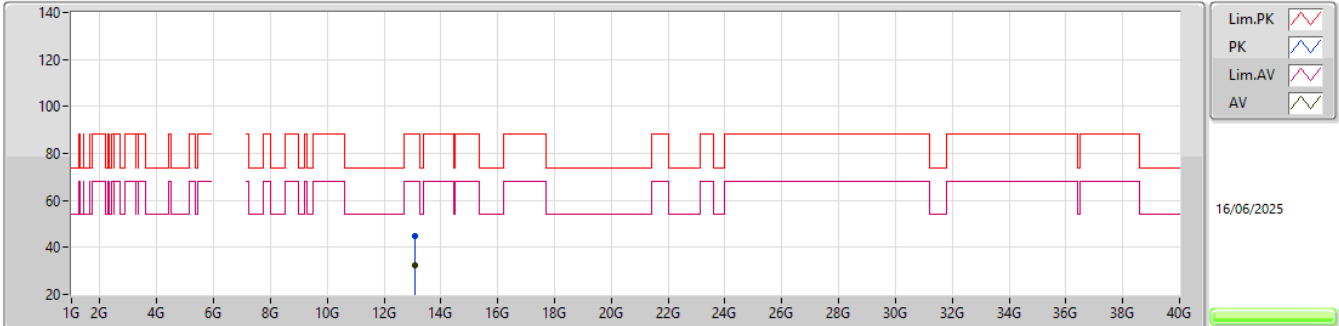EUT_Y_2TX
Setting 21
02-D-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.10077G	45.02	88.20	-43.18	58.38	3	Horizontal	233	1.98	-	39.60	11.91	64.87			
RMS	13.10041G	32.44	68.20	-35.76	45.80	3	Horizontal	233	1.98	-	39.60	11.91	64.87			