TEST REPORT
Nr. R21023301

Federal Communication Commission (FCC)

Report Reference No. .....:	R21023301
Date of issue: .....:	02.04.2021
Total number pages: .....:	107
Applicant´s name .....:	Imet S.r.l.
Address .....:	Via Ronche, 93 – 33077 Sacile (PN) – Italy
Test specification:	
Standards .....:	FCC Rules & Regulations, Title 47:2019 Part 15 paragraph(s): 203, 204, 205, 207, 209, 215 and 247
Non-standard test method .....:	N/A
Test Report Form No. .....:	15-247_DTSCMC
Test Report Form(s) Originator ..:	CMC Centro Misure Compatibilità S.r.l.
Master TRF .....:	2021-02

General disclaimer:

The test results presented in this report relate only to the object tested.
This report shall not be reproduced, except in full, without the written approval of CMC Centro Misure Compatibilità S.r.l.

Test item description .....:	2,4 GHz RF Transceiver module
Trademark .....:	Imet
Manufacturer .....:	Imet S.r.l.
Model / Type reference .....:	B034
FCC ID .....:	2AYRTB034
Rating(s) .....:	3,7 Vdc from battery

Report

Tested by (name + signature).....:	G. Gandini	.....
Approved by (name + signature) .....:	R. Beghetto	.....

CMC Centro Misure Compatibilità S.r.l.

1 Summary

1 Summary 2
2 Reference standard 3
3 List of attachments 3
4 Deviation(s) from test specification 3
5 Testing location 3
6 General description of tested item and testing condition(s) 5
6.1 Photos of the test item 6
7 Verdict summary section 7
8 Test conditions 9
8.1 General 9
9 Test results 10
9.1 Antenna requirements 10
9.2 Emissions in restricted frequency bands and in unrestricted frequency bands 11
9.3 DTS bandwidth 79
9.4 20 dB bandwidth 84
9.5 Band edge 89
9.6 Fundamental emission output power 94
9.7 Maximum power spectral density level in the fundamental emission 99

CMC Centro Misure Compatibilità S.r.l.

2 Reference standard	
FCC Rules and Regulation Title 47 part 15:2019	--
3 List of attachments	
Attachment 1: Instruments list, measurement uncertainty, judgement of compliance and quality manual references	
4 Deviation(s) from test specification	
None	
5 Testing location	
CMC Centro Misure Compatibilità S.r.l. Via della Fisica, 20 – 36016 Thiene (VI) – Italy Test site facility's FCC registration number: 182474	

Revision index	***Date***	***Change history***
1.0	02.04.2021	--

CMC Centro Misure Compatibilità S.r.l.

Testing and sampling:	
Date of receipt of test item	02.02.2021
Testing start date	03.02.2021
Testing end date	26.03.2021
Sampling procedure	Equipment used for testing was picked up by the manufacturer, at the end of the production process with random criterion. The results relate to the sample as it has been received.
Internal identification	Adhesive label with the product number P210119
General remarks:	
This report shall not be reproduced, except in full, without the written approval of CMC. The test results presented in this report relate only to the object tested. “(see appended table)": refers to a table appended to the report. Throughout this report a comma is used as the decimal separator.	
Possible test case verdicts:	
Test case does not apply to the test object:	N/A (Not Applicable)
Test object does meet the requirement:	P (Pass)
Test object does not meet the requirement:	F (Fail)
Test object does not performed:	N/E (Not Executed)
Definition of symbols used in this test report:	
☒ Indicates that the listed condition, standard or equipment is applicable for this report. ☐ Indicates that the listed condition, standard or equipment is not applicable for this report.	

CMC Centro Misure Compatibilità S.r.l.

6 General description of tested item and testing condition(s)

Description .....:	2,4 GHz RF Transceiver module						
Model Number .....:	B034						
FCC ID .....:	2AYRTB034						
Serial Number.....:	--						
Brand name .....:	Imet						
Frequency band.....:	2400 – 2483,5 MHz						
Nominal frequencies.....:	F_L: 2404 MHz		F_M: 2440 MHz		F_H: 2479 MHz		
Test power supply.....:		Voltage and Frequency	Reference poles				
			N	L1	L2	L3	PE
	☐	AC:	☐	☐	☐	☐	☐
	☐	AC:	☐	☐	☐	☐	☐
	☒	DC: 3,7 V from battery					☐
Test configuration .....:	☐	Table top equipment					
	☐	Floor standing equipment					
	☐	Hand-held equipment					
	☒	Module					
Type of equipment.....:	☒	Transmitter unit					
	☒	Receiver unit					
Type of station .....:	☐	Portable station					
	☒	Mobile station					
Operating modes .....:	No.	Operating mode of test item					
	1	EUT in continuous transmission at maximum power					

CMC Centro Misure Compatibilità S.r.l.

6.1 Photos of the test item

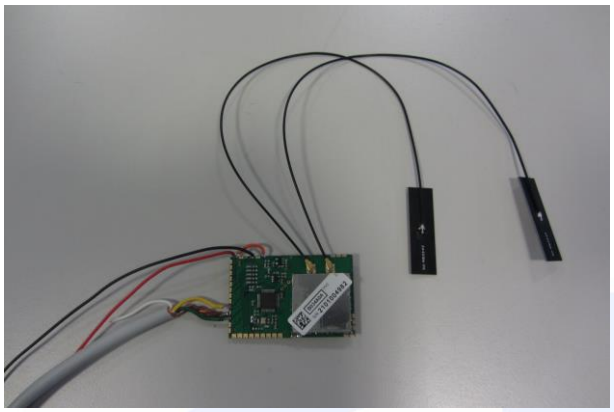

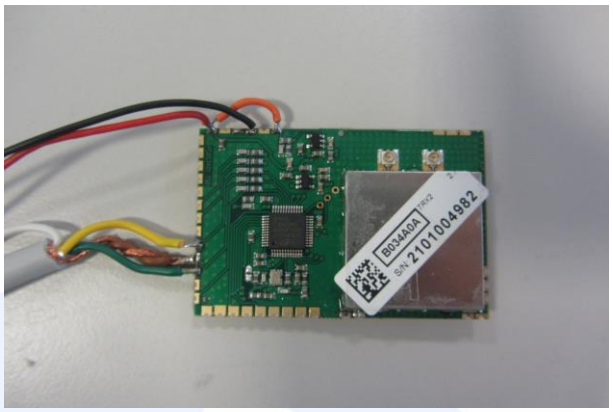

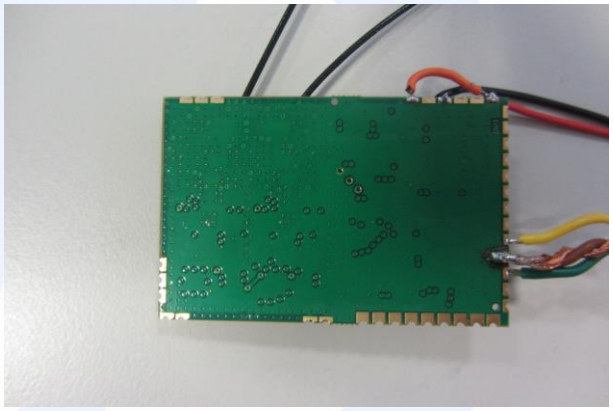

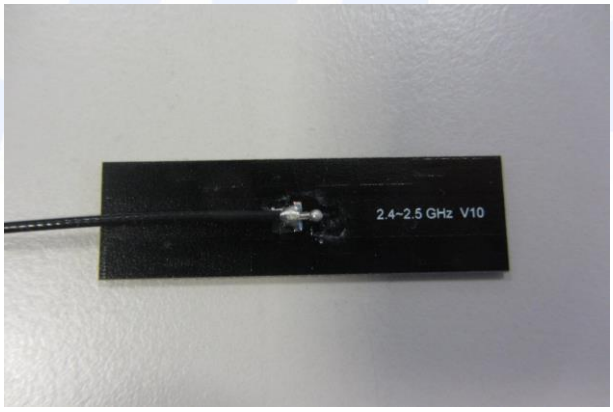

CMC Centro Misure Compatibilità S.r.l.

7 Verdict summary section

FCC Rules & Regulations, Title 47:2019 Part 15 paragraph(s): 203, 204, 205, 207, 209, 215 and 247			
Clause	**Requirement – Test case**	**Basic standard**	**Verdict**
Part 15.203	Antenna requirements	--	**P**
Part 15.207	Conducted emissions	ANSI C63.10	**N/A (+)**
Part 15.209	Emissions in restricted frequency bands and in unrestricted frequency bands	ANSI C63.10	**P**
Part 15.247 (a) (2)	DTS bandwidth	ANSI C63.10	**P**
Part 15.215 (c)	20 dB bandwidth	ANSI C63.10	**P**
Part 15.247 (d)	Band edge	ANSI C63.10	**P**
Part 15.209 and 15.247	Fundamental emission output power	ANSI C63.10	**P**
Part 15.209 and 15.247	Maximum power spectral density level in the fundamental emission	ANSI C63.10	**P**

(+) Devices which only employ battery power. See FCC Part 15.207 (c)

CMC Centro Misure Compatibilità S.r.l.

Normative references	
Reference no.	***Description***
FCC Rules and Regulation Title 47 part 15:2019	--
KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices operating under section 15.247 of the FCC rules
ANSI C63.4:2014	American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz
ANSI C63.10:2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

CMC Centro Misure Compatibilità S.r.l.

8 Test conditions

8.1 General

<table>
<tr><td rowspan="4">Environmental reference conditions.....:</td><td colspan="3">The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment.
The climatic conditions during the tests were within the following limits:</td></tr>
<tr><td>Temperature</td><td>Humidity</td><td>Atmospheric pressure</td></tr>
<tr><td>15 °C – 35 °C</td><td>30 % - 60 %</td><td>800 hPa – 1060 hPa</td></tr>
<tr><td colspan="3">If explicitly required in the basic standard or applied product standard the climatic values are recorded and documented separately in this test report.</td></tr>
<tr><td>Measurement uncertainties .....:</td><td colspan="3">Attachment 1</td></tr>
</table>

CMC Centro Misure Compatibilità S.r.l.

9 Test results

9.1 Antenna requirements

Tested by ..... :	G. Gandini	
Test date ..... :	02.02.2021	
Reference standards ..... :	FCC Rules and Regulation; Titles 47 Part. 15.203 and 15.204	
Test specification ..... :	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded	
Antenna type ..... :	☐	Integral antenna
	☐	External antenna
	☒	Dedicated antenna
Antenna gain ..... :	2 dBi	
External R.F. power amplifier ..... :	Not Present	

CMC Centro Misure Compatibilità S.r.l.

9.2 Emissions in restricted frequency bands and in unrestricted frequency bands

Tested by ..... :	G. Gandini	
Test date ..... :	03.02.2021	
Test location (stand) ..... :	Semi-anechoic chamber (CMC A070)	
Reference standards ..... :	FCC Rules and Regulation; Titles 47 Part. 15.209 ANSI C63.10 cl. 6.3, 6.4, 6.5 and 6.6	
Test set-up description ..... :	☒	Table top equipment set-up (80 cm above the reference ground plane)
	☐	Floor standing equipment set-up (insulating material up to 12 mm thick)
	☐	False floor installation equipment set-up (insulating material up to 34 cm above the reference ground plane)
Supplementary test set-up description ..... :	--	
Test method applied ..... :	SAC with measurement distance [m]: 10	
Supplementary information..... :	--	

Acceptance limits

Acceptance limits for emissions in restricted frequency bands (f < 1000 MHz)		
Frequency range (MHz)	*Test distance (m)*	*Limits [dB(µV/m)]*
0,009 to 0,490	300	48,5 to 13,8
0,490 to 1,705	30	33,8 to 22,9
1,705 to 30	30	29,5
30 to 88	3	40
88 to 216	3	43,5
216 to 960	3	46,0
960 to 1000	3	54

Remarks: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz and 110–490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector. The results have been extrapolated to the specified distance using an extrapolation factor

Acceptance limits for emissions in restricted frequency bands (f ≥ 1000 MHz)			
Frequency (MHz)	*Test distance (m)*	*AV limits [dB(µV/m)]*	*Peak limits [dB(µV/m)]*
> 1000	3	54	74

CMC Centro Misure Compatibilità S.r.l.

The restricted frequency bands are listed in the following table

MHz	MHz	MHz	GHz
0,090 – 0,110	16,42 – 16,423	399,9 – 410	4,5 – 5,15
0,495 – 0,505	16,69475 – 16,69525	608 – 614	5,35 – 5,46
2,1735 – 2,1905	16,80425 – 16,80475	960 – 1240	7,25 – 7,75
4,125 – 4,128	25,5 – 25,67	1300 – 1427	8,025 – 8,5
4,17725 – 4,17775	37,5 – 38,25	1435 – 1626,5	9,0 – 9,2
4,20725 – 4,20775	73 – 74,6	1645,5 – 1646,5	9,3 – 9,5
6,215 – 6,218	74,8 – 75,2	1660 – 1710	10,6 – 12,7
6,26775 – 6,26825	108 – 121,94	1718,8 – 1722,2	13,25 – 13,4
6,31175 – 6,31225	123 – 138	2200 – 2300	14,47 – 14,5
8,291 – 8,294	149,9 – 150,05	2310 – 2390	15,35 – 16,2
8,362 – 8,366	156,52475 – 156,52525	2483,5 – 2500	17,7 – 21,4
8,37625 – 8,38675	156,7 – 156,9	2690 – 2900	22,01 – 23,12
8,41425 – 8,41475	162,0125 – 167,17	3260 – 3267	23,6 – 24,0
12,29 – 12,293	167,72 – 173,2	3332 – 3339	31,2 – 31,8
12,51975 – 12,52025	240 – 285	3345,8 – 3358	36,43 – 36,5
12,57675 – 12,57725	322 – 335,4	3600 – 4400	Above 38,6
13,36 – 13,41			

Acceptance limits for emissions in non-restricted frequency bands (according to ANSI C63.10 cl. 11.11.1)

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz
b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.
c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required

CMC Centro Misure Compatibilità S.r.l.

Test setup

Frequency ≤ 30 MHz

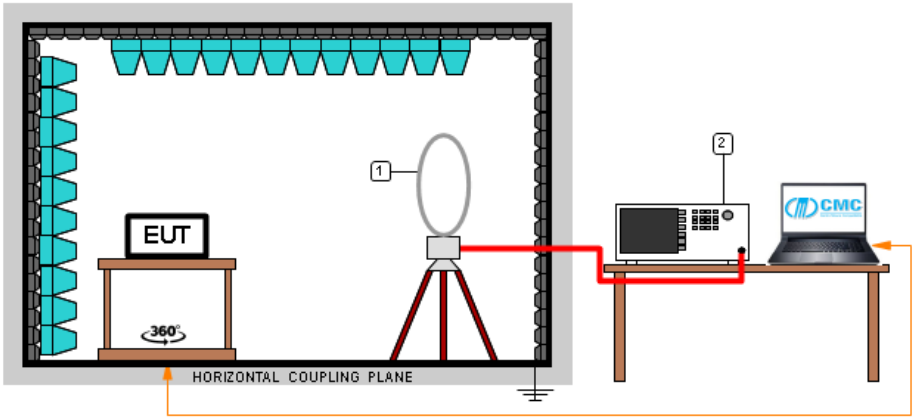

Test setup PE004_01				
Nr.	*Id. Number*	*Manufacturer*	*Model*	*Description*
2	CMC S353	Rohde & Schwarz	ESW26	EMI Test Receiver 1 Hz - 26.5 GHz
2	CMC S164	Rohde & Schwarz	ESU26	EMC receiver
1	CMC S127	Schaffner	HLA6120	Loop Antenna 9kHz - 30MHz

Frequency ≤ 1 GHz

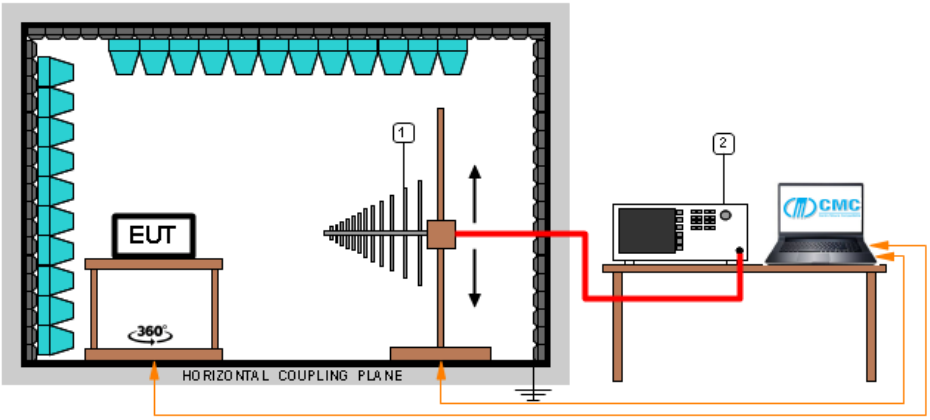

Test setup PE004_02				
Nr.	*Id. Number*	*Manufacturer*	*Model*	*Description*
2	CMC S353	Rohde & Schwarz	ESW26	EMI Test Receiver 1 Hz - 26.5 GHz
2	CMC S164	Rohde & Schwarz	ESU26	EMC receiver
1	CMC S271	Schwarzbeck	BBA 9106 + VHBB 9124	Broadband Antenna

Test setup PE004_03				
Nr.	*Id. Number*	*Manufacturer*	*Model*	*Description*
2	CMC S353	Rohde & Schwarz	ESW26	EMI Test Receiver 1 Hz - 26.5 GHz
2	CMC S164	Rohde & Schwarz	ESU26	EMC receiver
1	CMC S287	Schwarzbeck	VUSLP 9111B	Broadband Antenna

CMC Centro Misure Compatibilità S.r.l.

Frequency > 1 GHz

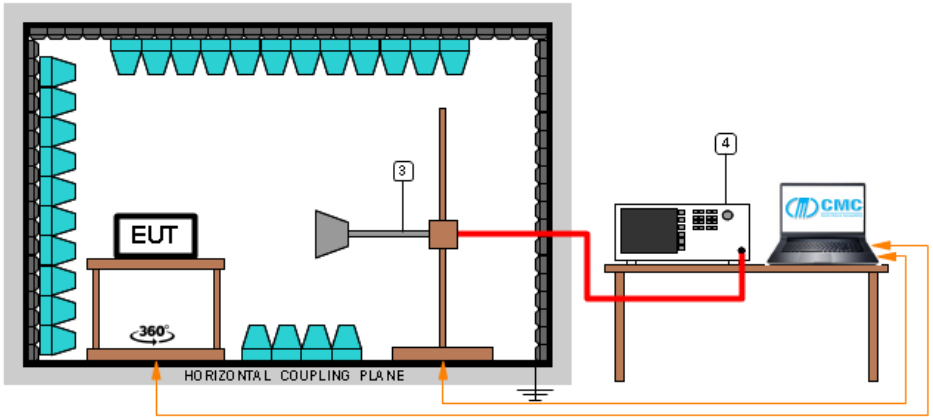

Test setup PE004_04				
Nr.	*Id. Number*	*Manufacturer*	*Model*	*Description*
4	CMC S353	Rohde & Schwarz	ESW26	EMI Test Receiver 1 Hz - 26.5 GHz
4	CMC S164	Rohde & Schwarz	ESU26	EMC receiver
3	CMC S108	Emco	3115	Waveguide antenna

Test setup PE004_05				
Nr.	*Id. Number*	*Manufacturer*	*Model*	*Description*
4	CMC S353	Rohde & Schwarz	ESW26	EMI Test Receiver 1 Hz - 26.5 GHz
4	CMC S164	Rohde & Schwarz	ESU26	EMC receiver
3	CMC S290	Schwarzbeck	BBHA 9170	Horn Antenna (15-40 GHz)

CMC Centro Misure Compatibilità S.r.l.

Result

Chip A

Transmission frequency (MHz)	*Polarization*	*Frequency Range (MHz)*	*Graphs*	*Result*
Worst case	V	300 – 1000	G21023306	P
Worst case	H	300 – 1000	G21023307	P
Worst case	H	30 – 300	G21023312	P
Worst case	V	30 – 300	G21023313	P
Worst case	Loop	0,009 – 30	G21023314	P
2404	V	3000 – 18000	G21023316	P
2404	H	3000 – 18000	G21023317	P
2440	H	3000 – 18000	G21023318	P
2440	V	3000 – 18000	G21023319	P
2479	V	3000 – 18000	G21023320	P
2479	H	3000 – 18000	G21023321	P
2404	V	1000 – 3000	G21023322	P
2404	H	1000 – 3000	G21023323	P
2440	H	1000 – 3000	G21023325	P
2440	V	1000 – 3000	G21023326	P
2479	V	1000 – 3000	G21023327	P
2479	H	1000 – 3000	G21023328	P
2404	V	18000 – 26000	G21023352	P
2404	H	18000 – 26000	G21023353	P
2440	H	18000 – 26000	G21023354	P
2440	V	18000 – 26000	G21023355	P
2479	V	18000 – 26000	G21023356	P
2479	H	18000 – 26000	G21023357	P

Remarks: EUT was tested in 3 orthogonal planes, graphs are related to the highest detected levels.
Measurements at frequencies lower than 30 MHz have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with conversion factor 40log(test distance/10) based on the measuring distance provided by the standard.
Measurements at frequencies higher than 30 MHz and lower than 1000 MHz have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with conversion factor 20log(test distance/10) based on the measuring distance provided by the standard.
Peaks above the limits are caused by the nominal transmitting frequencies

CMC Centro Misure Compatibilità S.r.l.

Chip B

Transmission frequency (MHz)	*Polarization*	*Frequency Range (MHz)*	*Graphs*	*Result*
Worst case	H	300 – 1000	G21023308	P
Worst case	V	300 – 1000	G21023309	P
Worst case	V	30 – 300	G21023310	P
Worst case	H	30 – 300	G21023311	P
Worst case	Loop	0,009 – 30	G21023315	P
2404	V	1000 – 3000	G21023332	P
2404	H	1000 – 3000	G21023333	P
2440	H	1000 – 3000	G21023334	P
2440	V	1000 – 3000	G21023335	P
2479	V	1000 – 3000	G21023336	P
2479	H	1000 – 3000	G21023337	P
2404	V	3000 – 18000	G21023340	P
2404	H	3000 – 18000	G21023341	P
2440	H	3000 – 18000	G21023342	P
2440	V	3000 – 18000	G21023343	P
2479	V	3000 – 18000	G21023344	P
2479	H	3000 – 18000	G21023345	P
2404	H	18000 – 26000	G21023346	P
2404	V	18000 – 26000	G21023347	P
2440	V	18000 – 26000	G21023348	P
2440	H	18000 – 26000	G21023349	P
2479	H	18000 – 26000	G21023350	P
2479	V	18000 – 26000	G21023351	P

Remarks: EUT was tested in 3 orthogonal planes, graphs are related to the highest detected levels.
Measurements at frequencies lower than 30 MHz have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with conversion factor 40log(test distance/10) based on the measuring distance provided by the standard.
Measurements at frequencies higher than 30 MHz and lower than 1000 MHz have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with conversion factor 20log(test distance/10) based on the measuring distance provided by the standard.
Peaks above the limits are caused by the nominal transmitting frequencies

Graphs Legend
PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +
AV: Average; AV [1s] (average at 1 second) values are marked with a X

CMC Centro Misure Compatibilità S.r.l.

Graphs

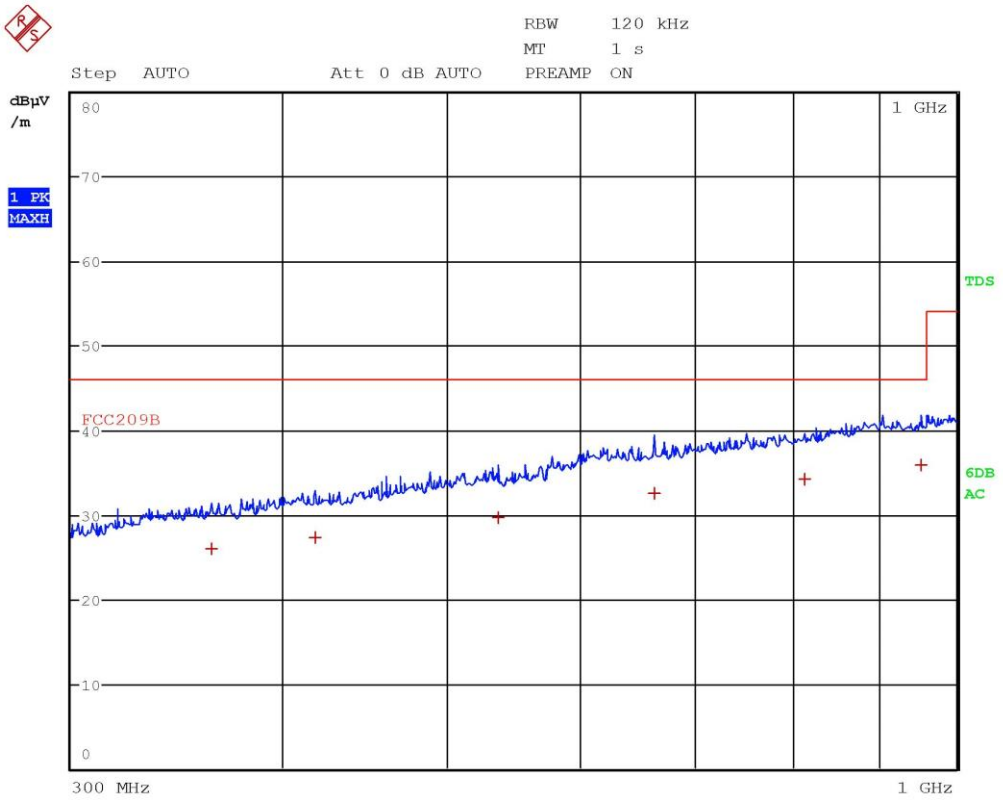

Gandini 21023306

CMC Centro Misure Compatibilità S.r.l.

EDIT PEAK LIST (Final Measurement Results)

Trace1:	FCC209B
Trace2:	---
Trace3:	---

TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
1 Quasi Peak	363.36 MHz	25.92	-20.09
1 Quasi Peak	418.4 MHz	27.32	-18.69
1 Quasi Peak	536.24 MHz	29.74	-16.27
1 Quasi Peak	663.6 MHz	32.43	-13.58
1 Quasi Peak	813.32 MHz	34.16	-11.85
1 Quasi Peak	952 MHz	35.80	-10.21

Gandini 21023306

CMC Centro Misure Compatibilità S.r.l.

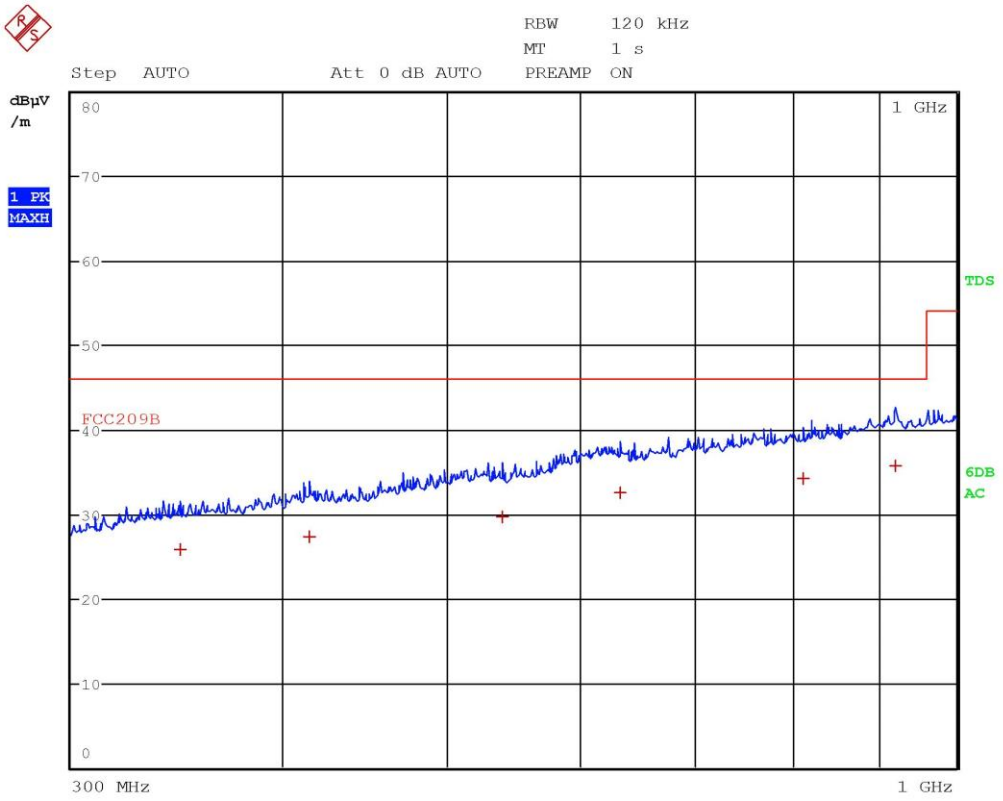

Gandini 21023307

CMC Centro Misure Compatibilità S.r.l.

EDIT PEAK LIST (Final Measurement Results)

Trace1:	FCC209B
Trace2:	---
Trace3:	---

TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
1 Quasi Peak	348.32 MHz	25.78	-20.23
1 Quasi Peak	415.04 MHz	27.30	-18.71
1 Quasi Peak	539 MHz	29.61	-16.40
1 Quasi Peak	633.48 MHz	32.45	-13.56
1 Quasi Peak	812.04 MHz	34.14	-11.87
1 Quasi Peak	919.68 MHz	35.77	-10.24

Gandini 21023307

CMC Centro Misure Compatibilità S.r.l.

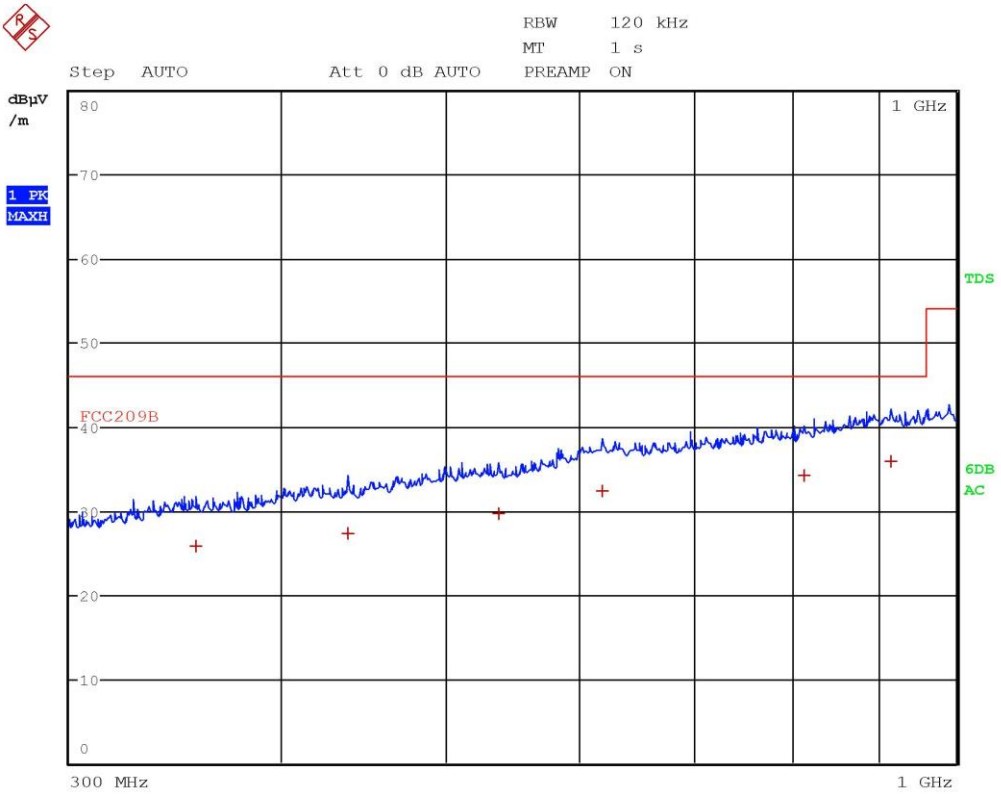

Gandini 21023308

CMC Centro Misure Compatibilità S.r.l.

EDIT PEAK LIST (Final Measurement Results)

Trace1:	FCC209B
Trace2:	---
Trace3:	---

TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
1 Quasi Peak	356.48 MHz	25.87	-20.14
1 Quasi Peak	437.72 MHz	27.34	-18.67
1 Quasi Peak	537.64 MHz	29.59	-16.42
1 Quasi Peak	618.36 MHz	32.37	-13.64
1 Quasi Peak	813.2 MHz	34.15	-11.86
1 Quasi Peak	915.16 MHz	35.85	-10.16

Gandini 21023308

CMC Centro Misure Compatibilità S.r.l.

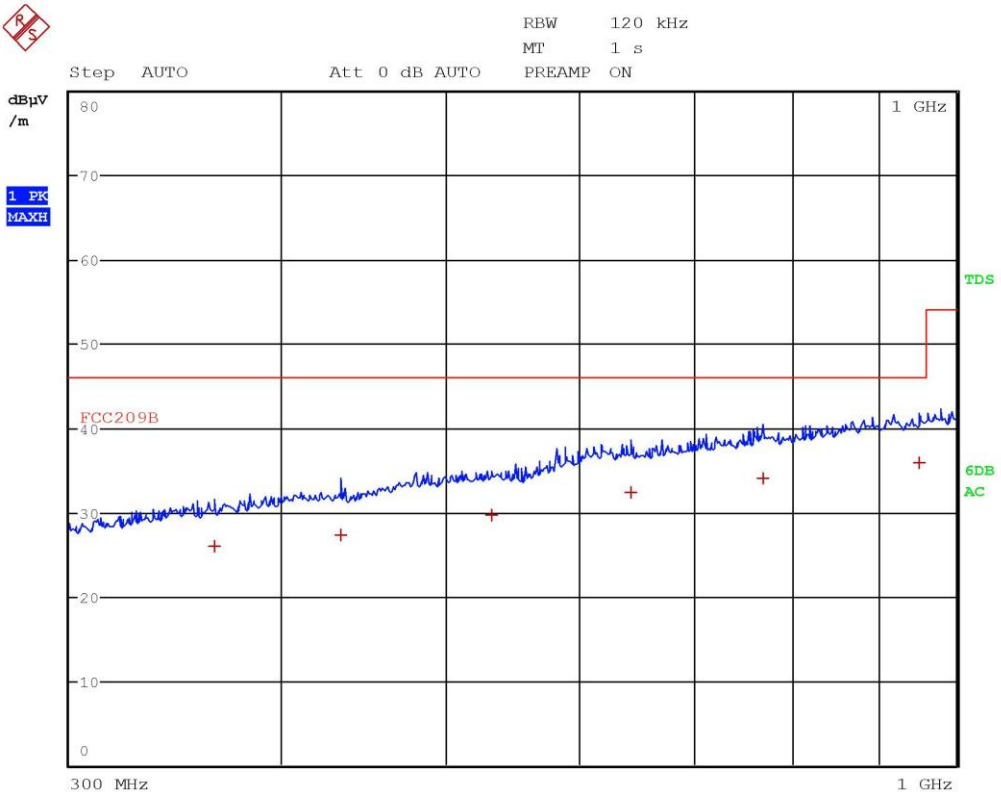

Gandini 21023309

CMC Centro Misure Compatibilità S.r.l.

EDIT PEAK LIST (Final Measurement Results)

Trace1:	FCC209B
Trace2:	---
Trace3:	---

TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
1 Quasi Peak	365 MHz	26.00	-20.01
1 Quasi Peak	433.48 MHz	27.34	-18.67
1 Quasi Peak	532.56 MHz	29.71	-16.30
1 Quasi Peak	643.2 MHz	32.34	-13.67
1 Quasi Peak	769.8 MHz	34.10	-11.91
1 Quasi Peak	951.4 MHz	35.88	-10.13

Gandini 21023309

CMC Centro Misure Compatibilità S.r.l.

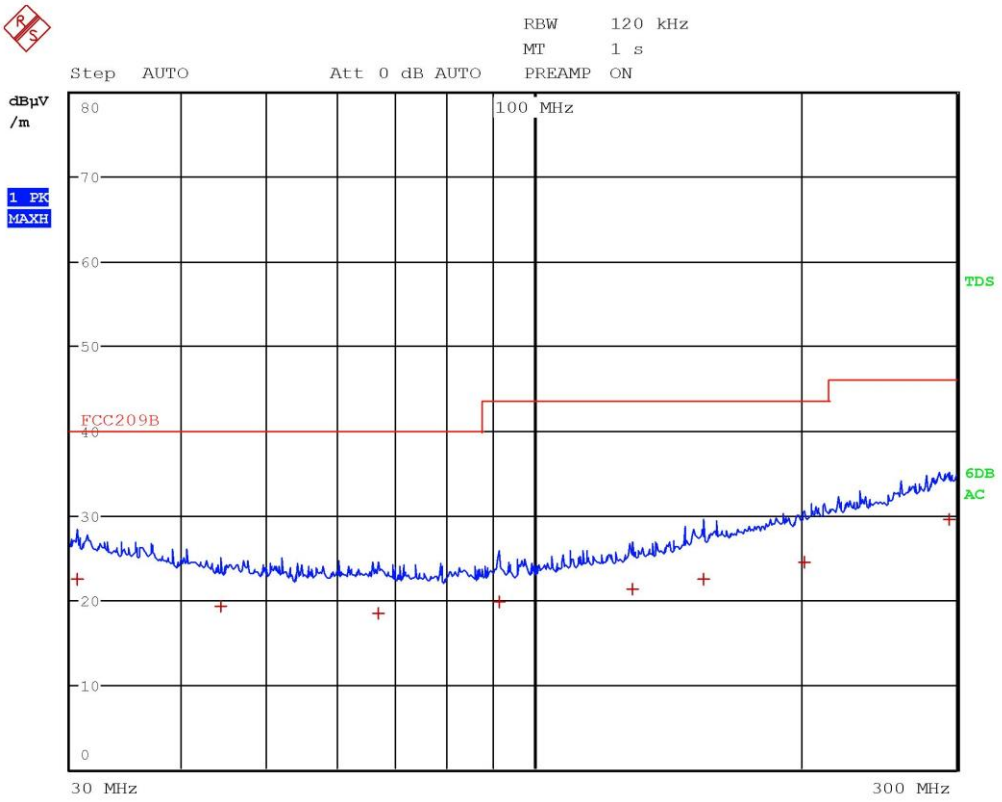

Gandini 21023310

CMC Centro Misure Compatibilità S.r.l.

EDIT PEAK LIST (Final Measurement Results)

Trace1:	FCC209B
Trace2:	---
Trace3:	---

TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
1 Quasi Peak	30.56 MHz	22.42	-17.58
1 Quasi Peak	44.36 MHz	19.32	-20.68
1 Quasi Peak	66.8 MHz	18.34	-21.65
1 Quasi Peak	91.44 MHz	19.69	-23.82
1 Quasi Peak	129.32 MHz	21.27	-22.24
1 Quasi Peak	155.4 MHz	22.41	-21.10
1 Quasi Peak	202.4 MHz	24.50	-19.01
1 Quasi Peak	295 MHz	29.44	-16.57

Gandini 21023310

CMC Centro Misure Compatibilità S.r.l.