



Conducted Spurious Emission




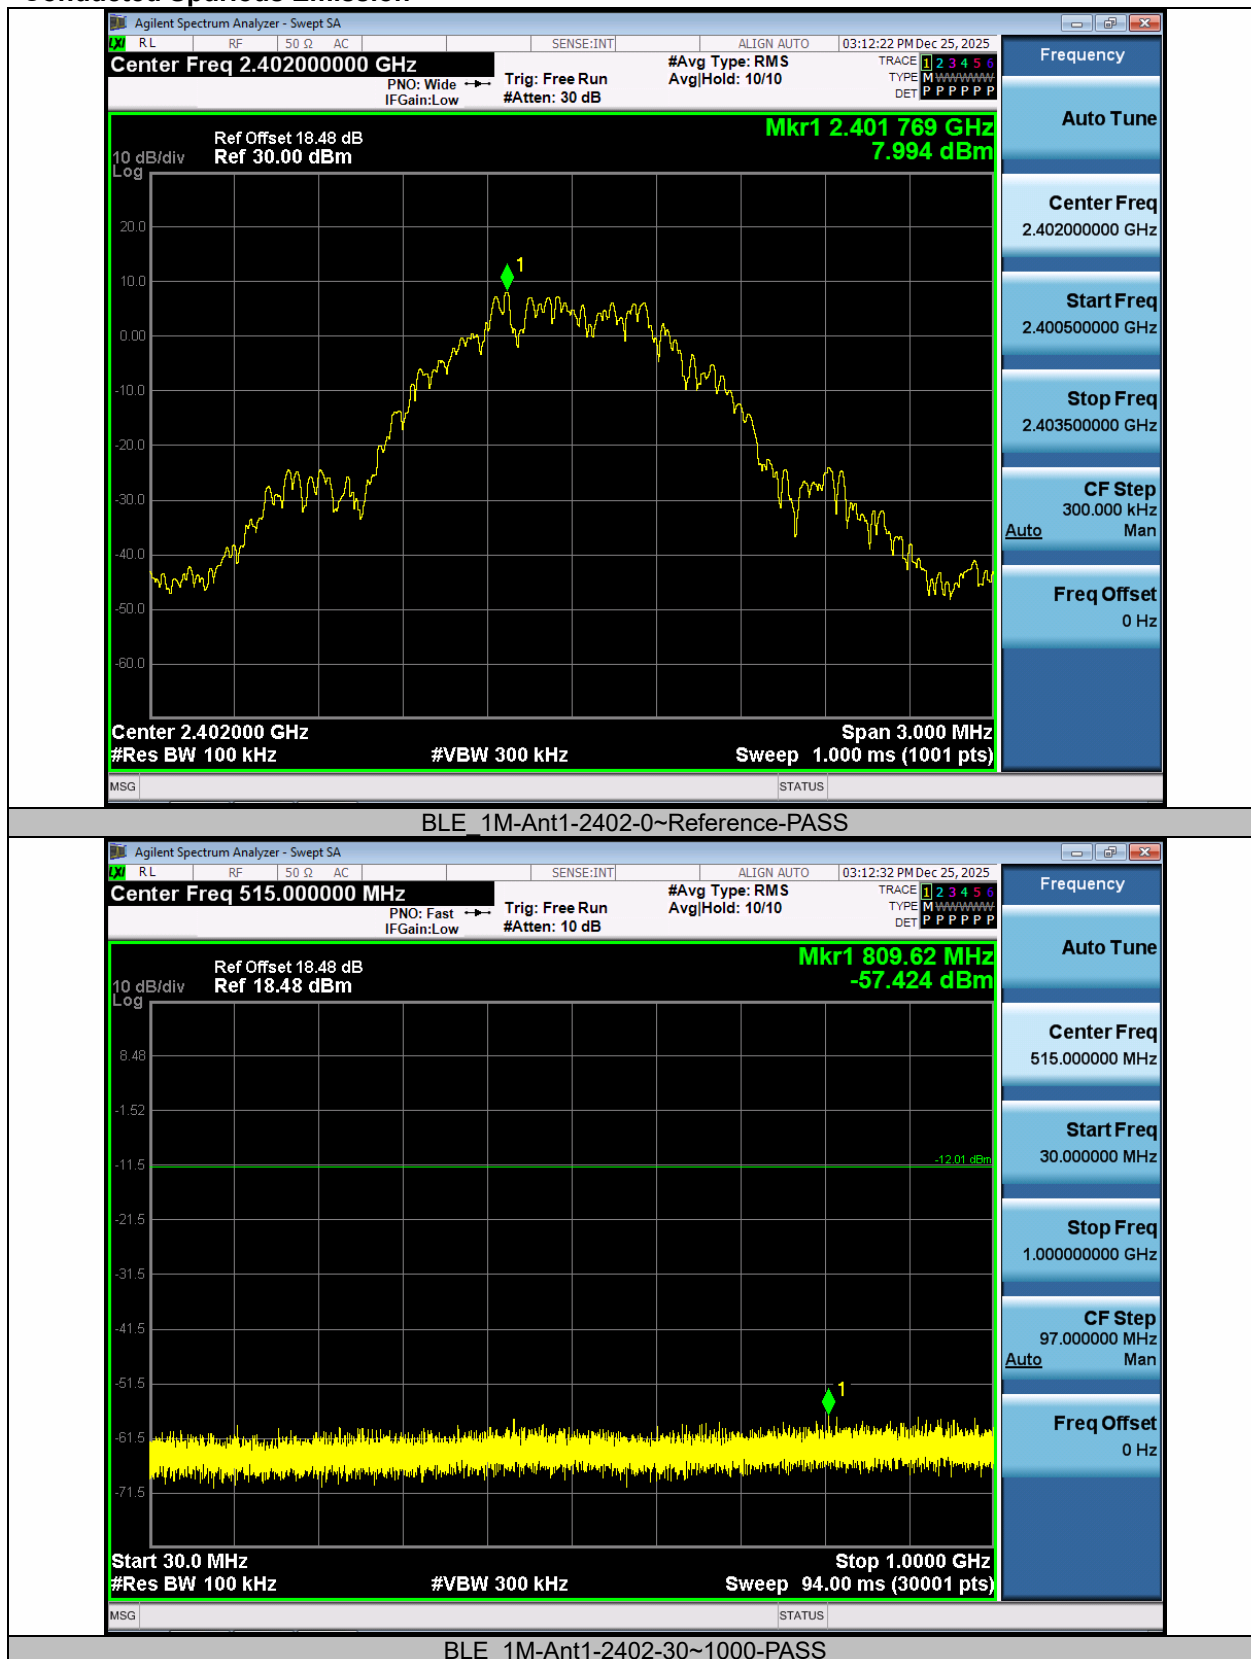


BLE_1M-Ant1-2402-1000~26500-PASS

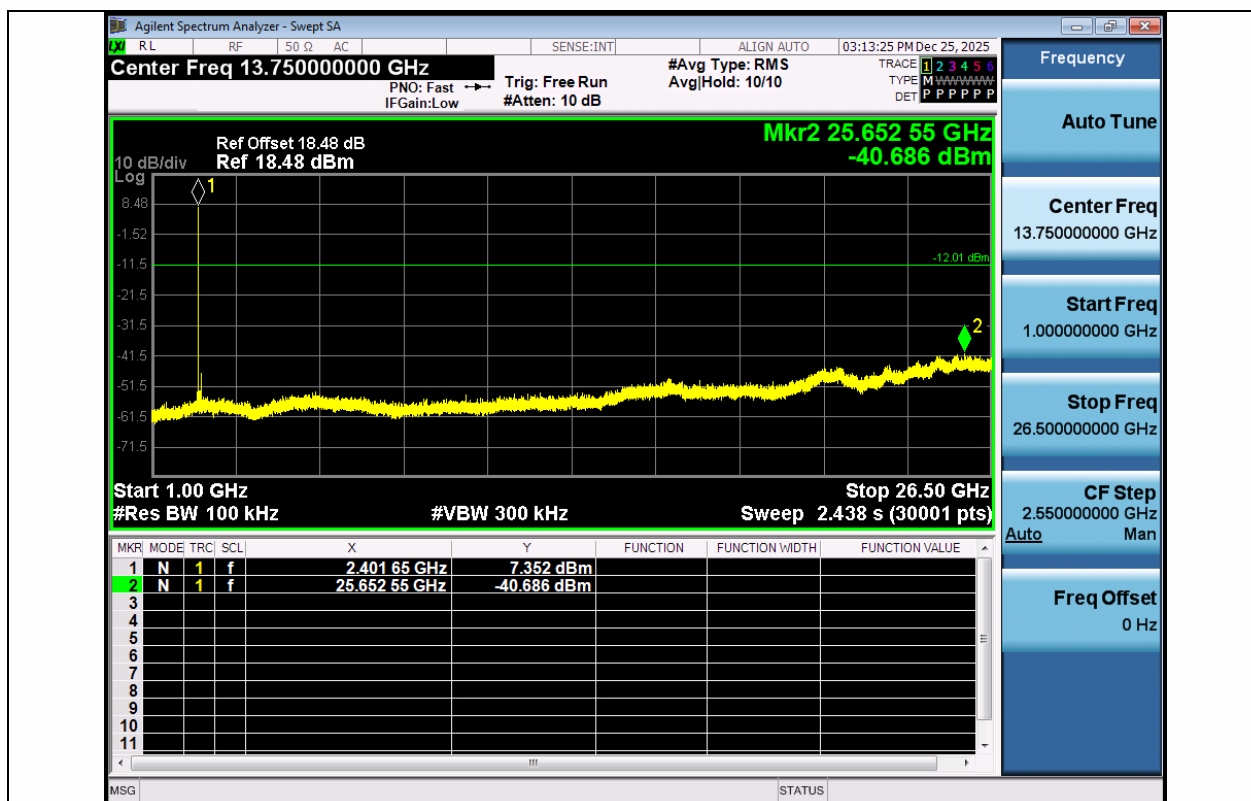


BLE_1M-Ant1-2440-0~Reference-PASS

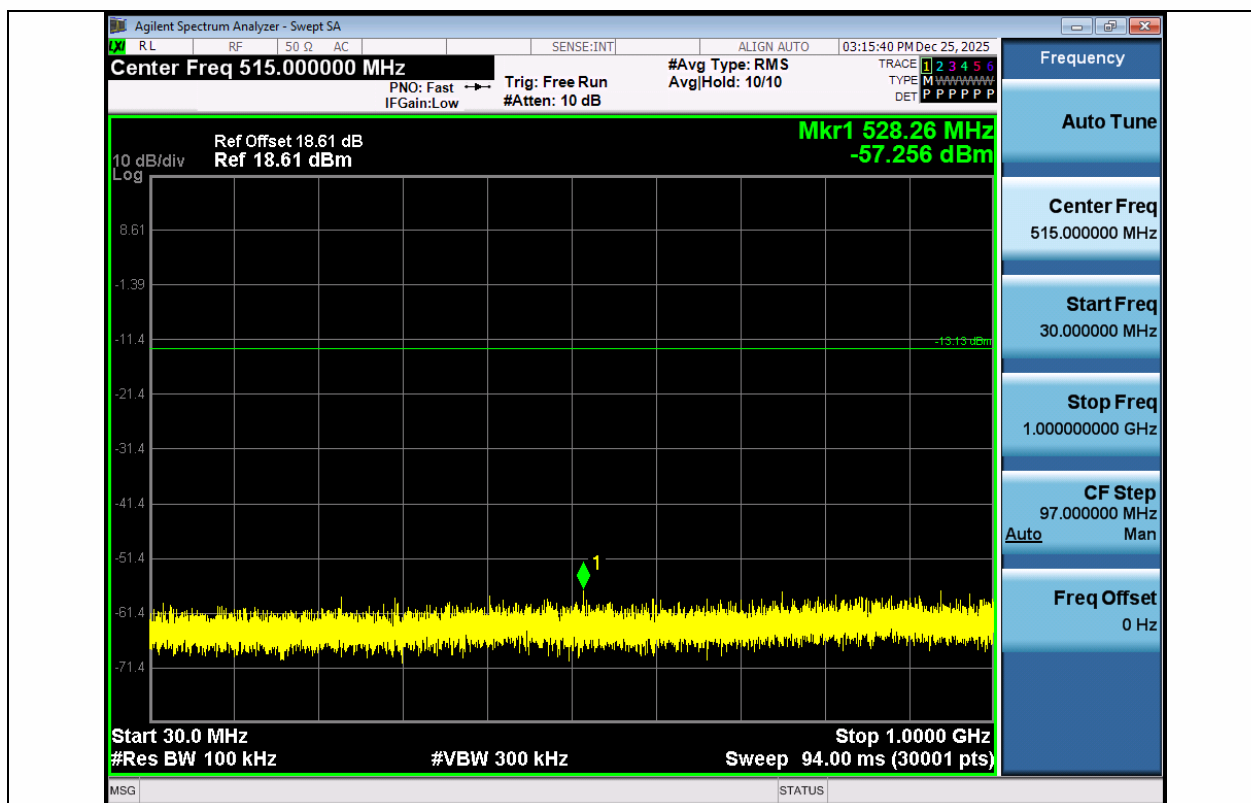


BLE_1M-Ant1-2440-30~1000-PASS

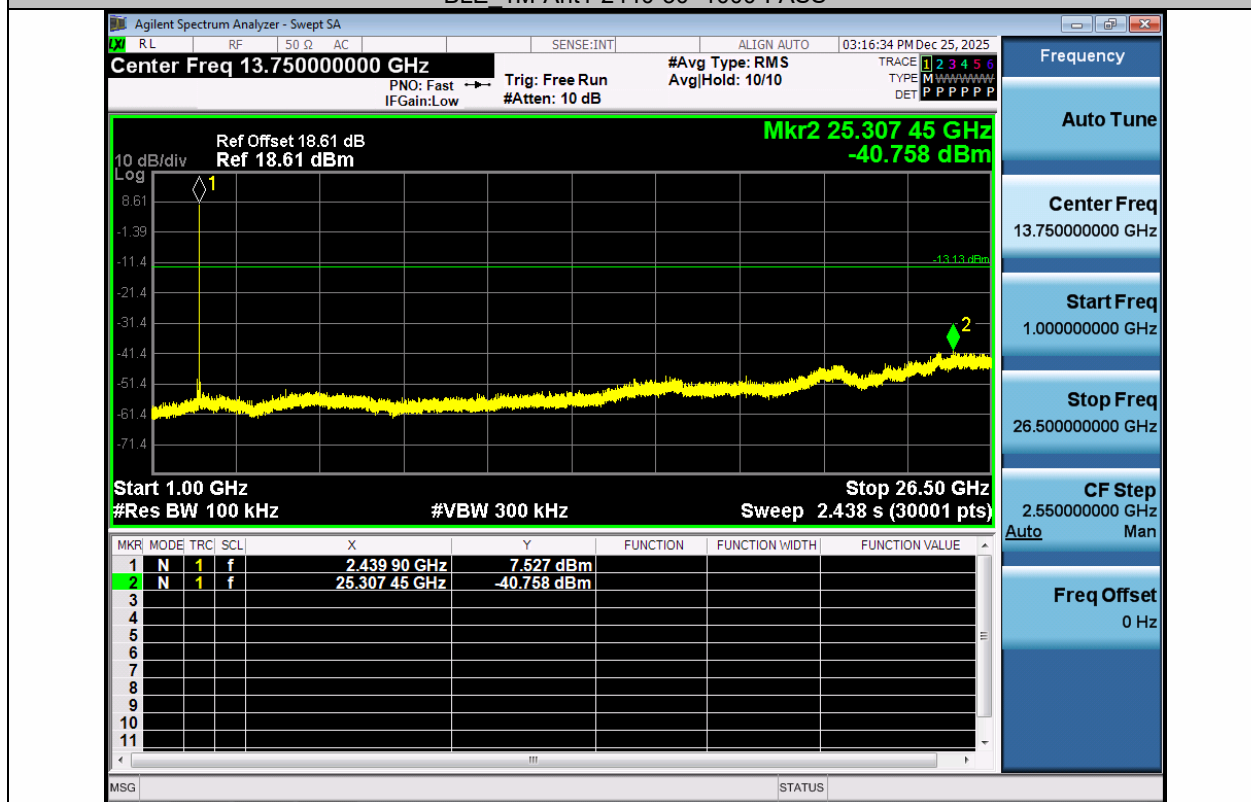

BLE_1M-Ant1-2440-1000~26500-PASS

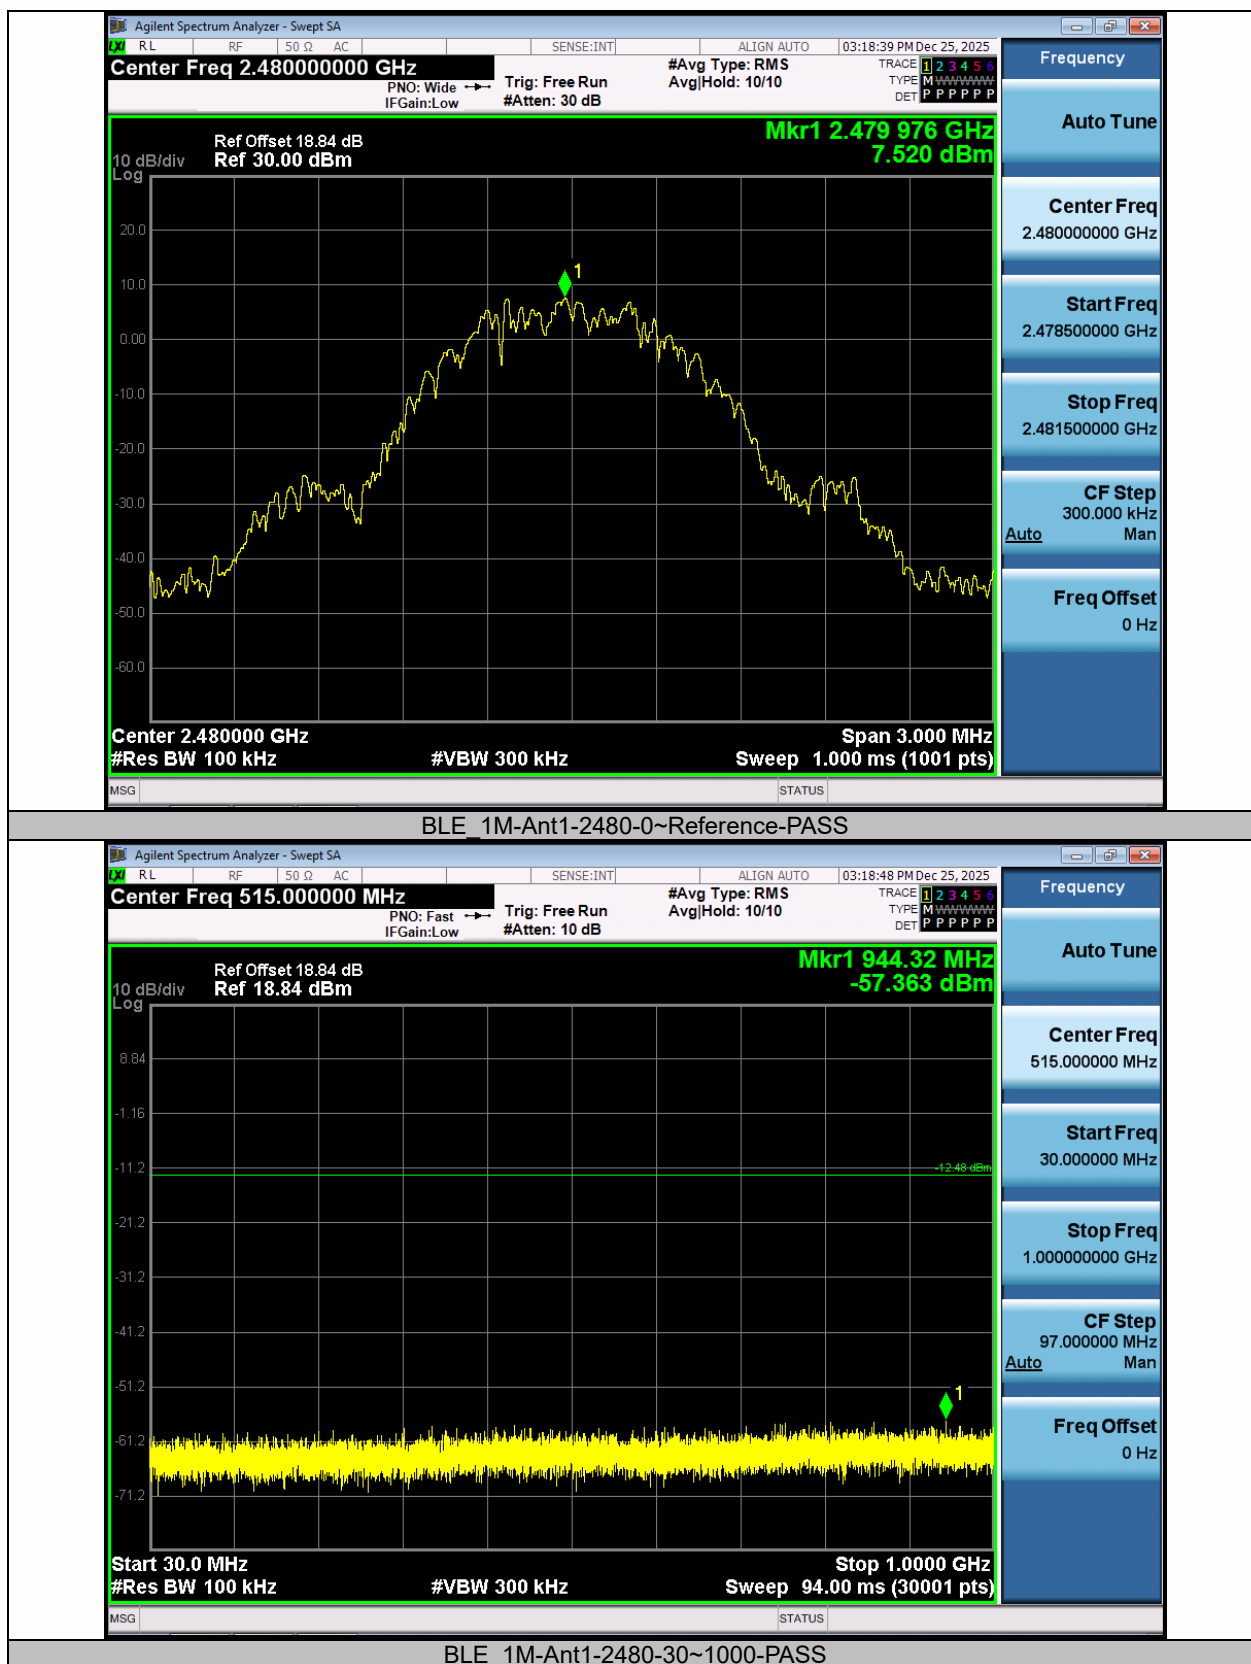


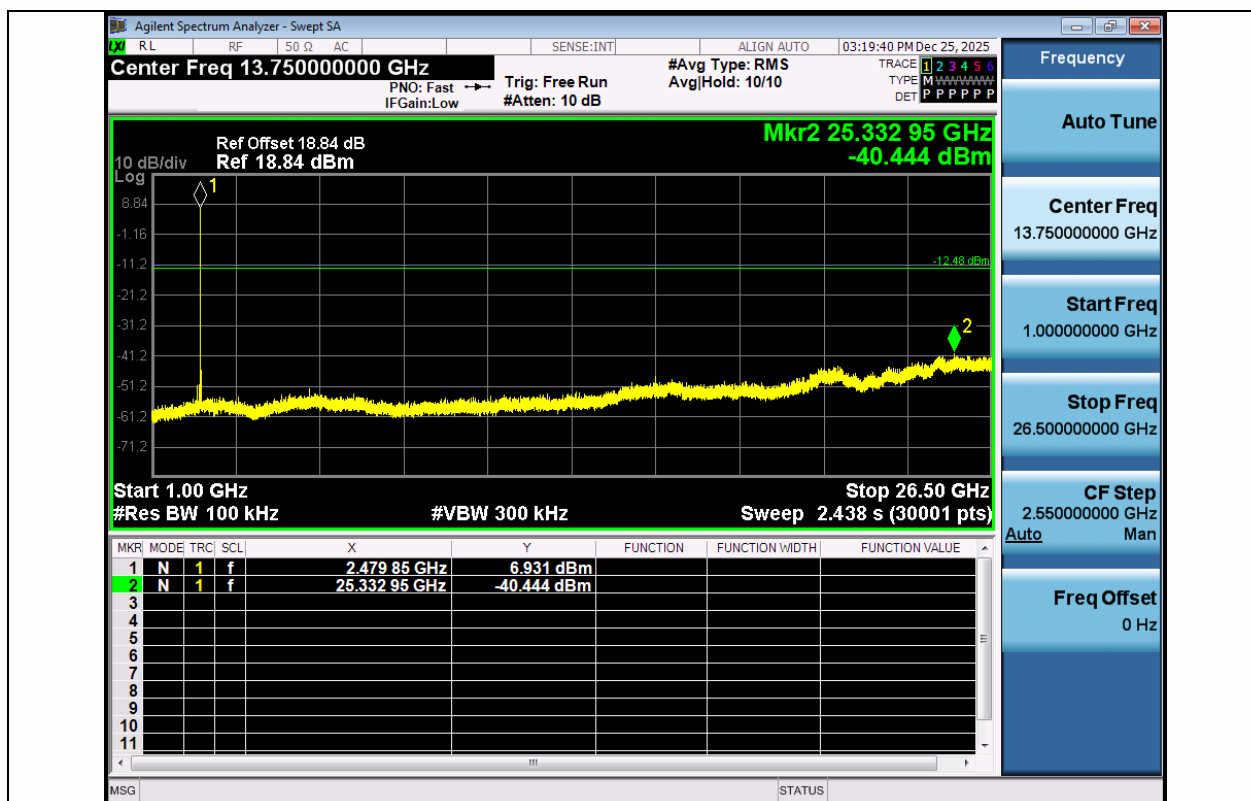


BLE 1M-Ant1-2480-1000~26500-PASS




BLE 2M-Ant1-2402-0~Reference-PASS

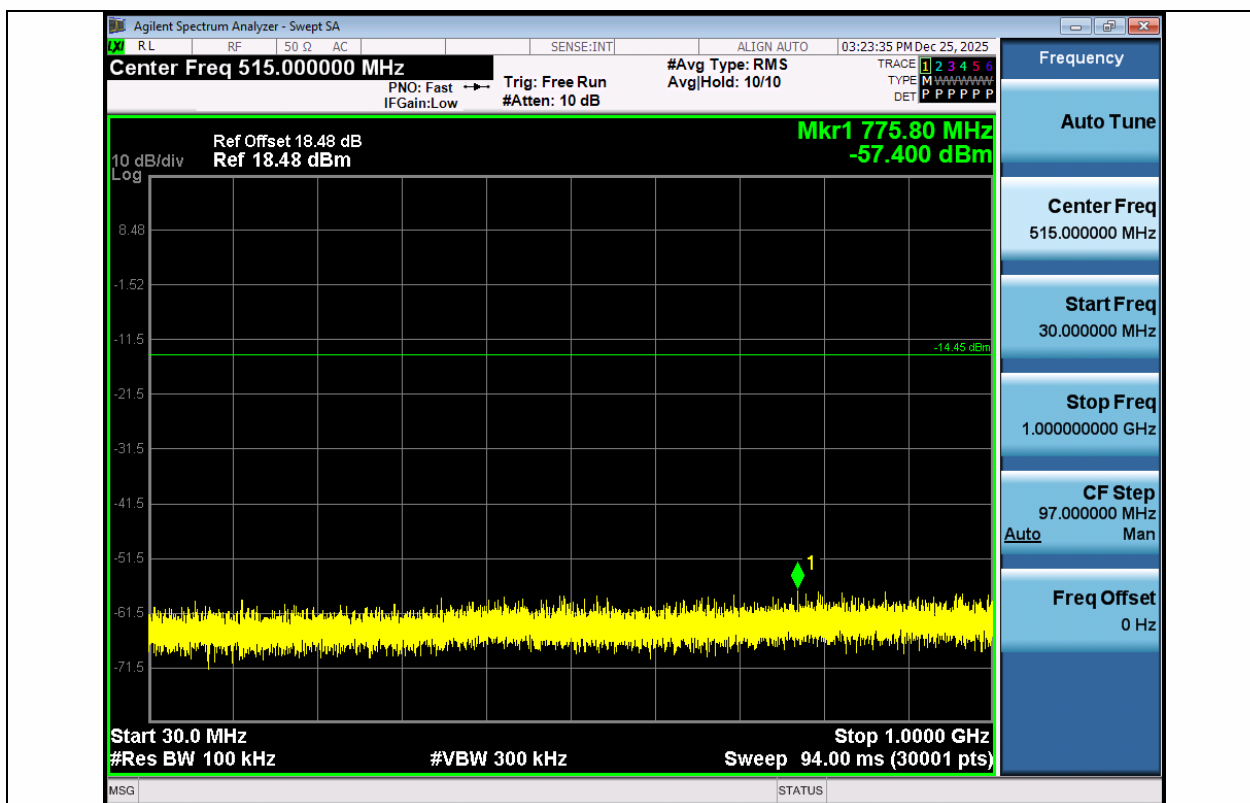


BLE_2M-Ant1-2402-30~1000-PASS

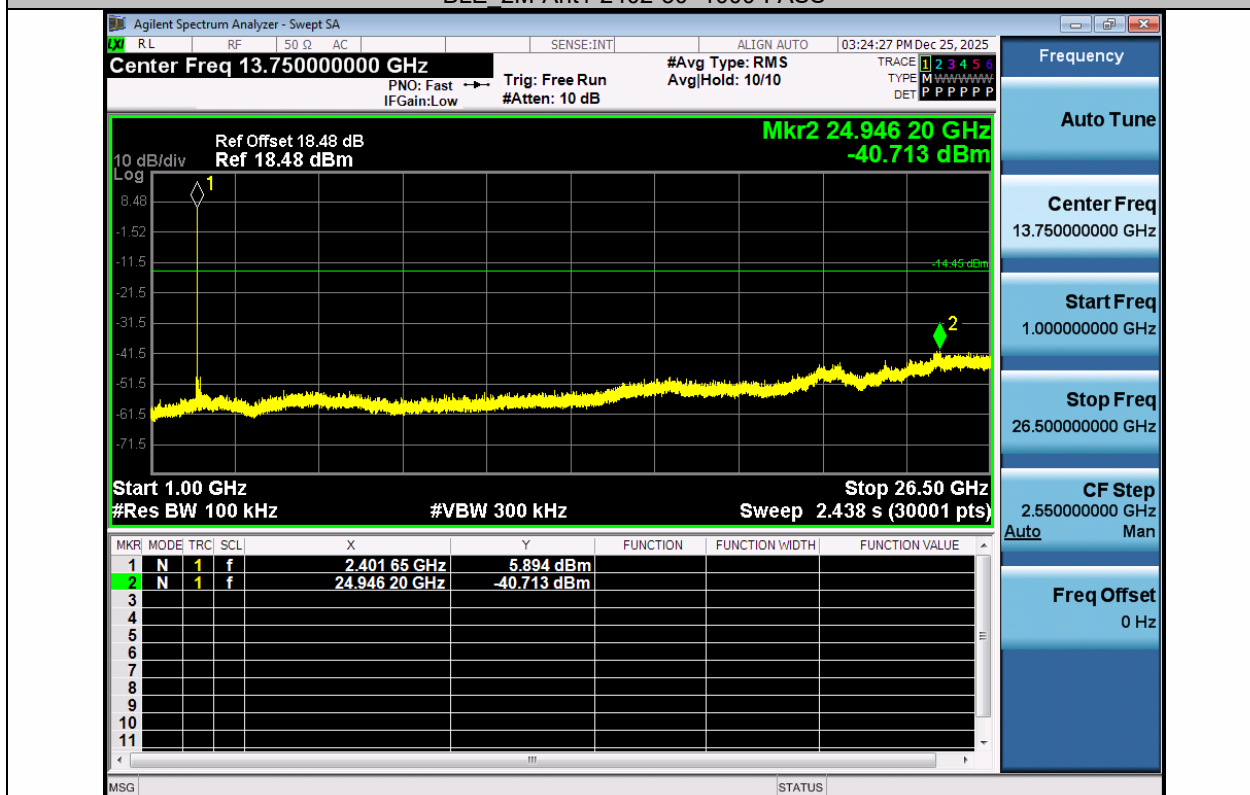

BLE_2M-Ant1-2402-1000~26500-PASS

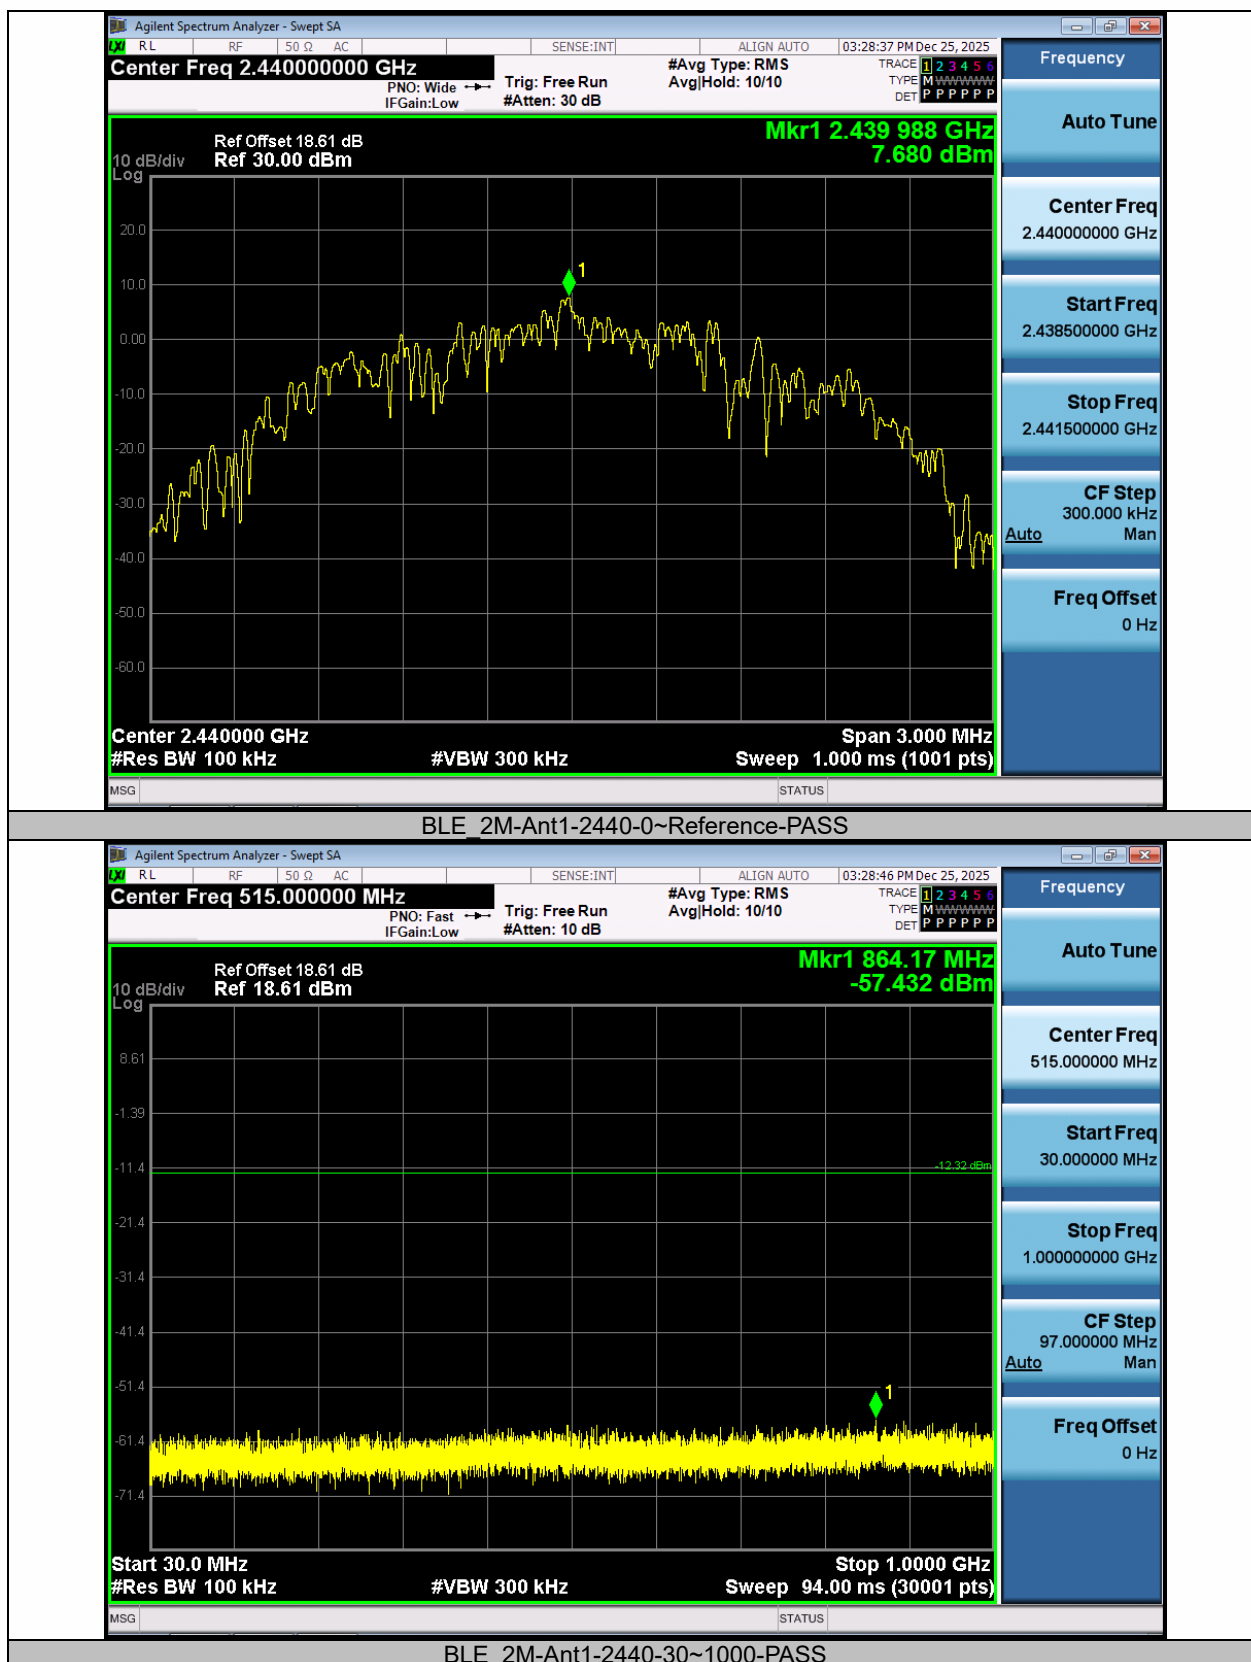


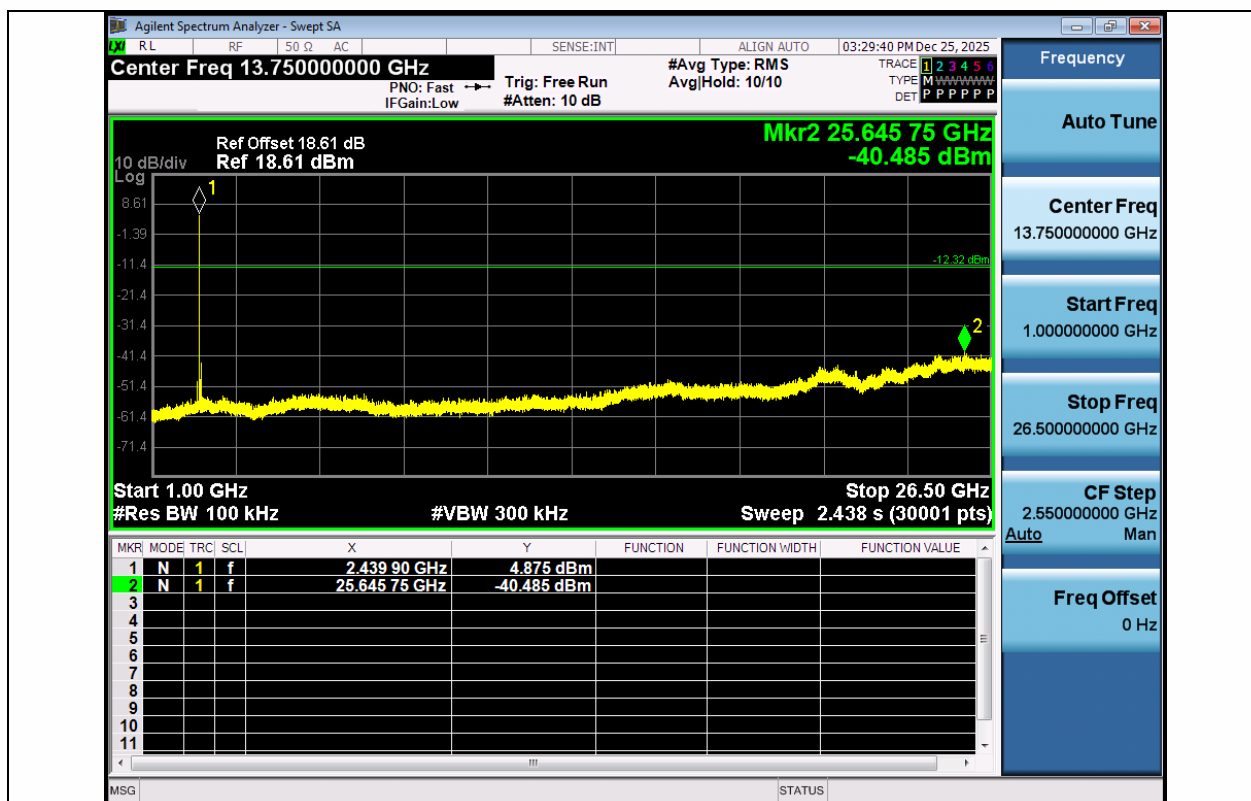


BLE_2M-Ant1-2440-1000~26500-PASS



BLE_2M-Ant1-2480-0~Reference-PASS

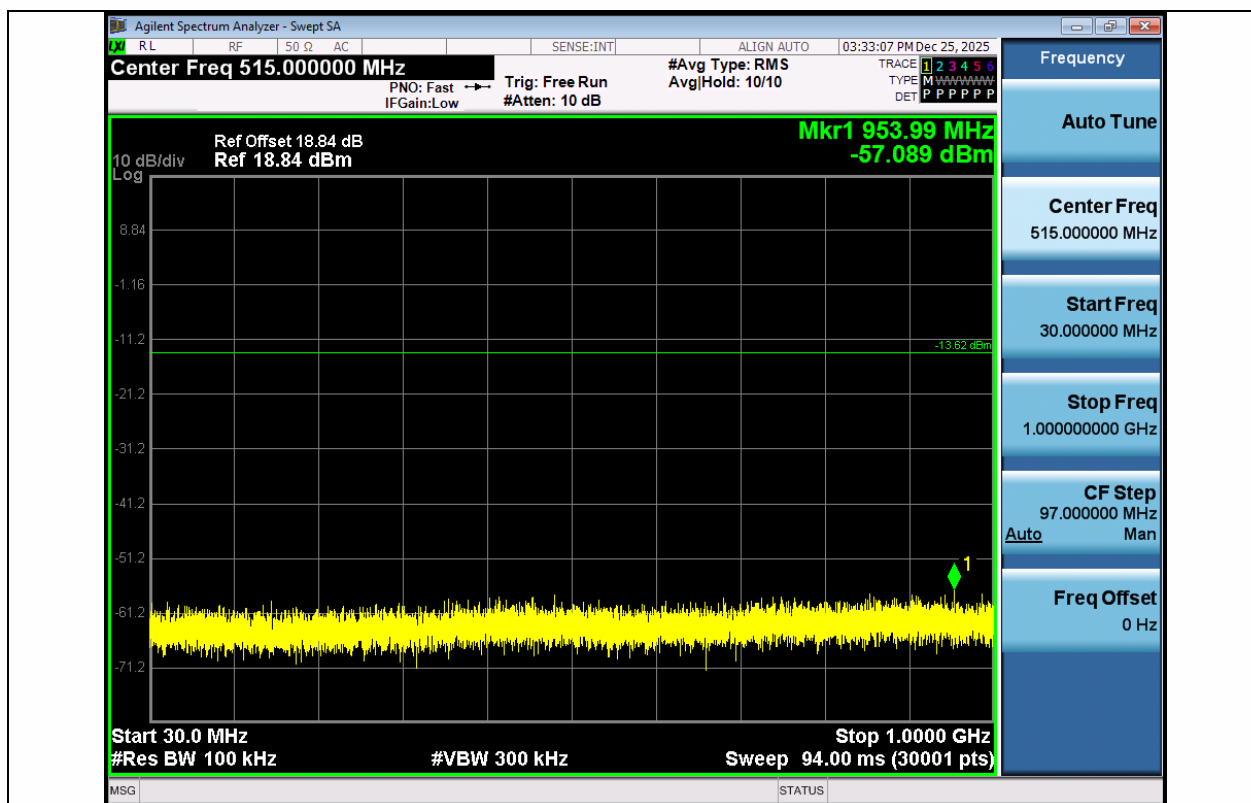


BLE_2M-Ant1-2480-30~1000-PASS

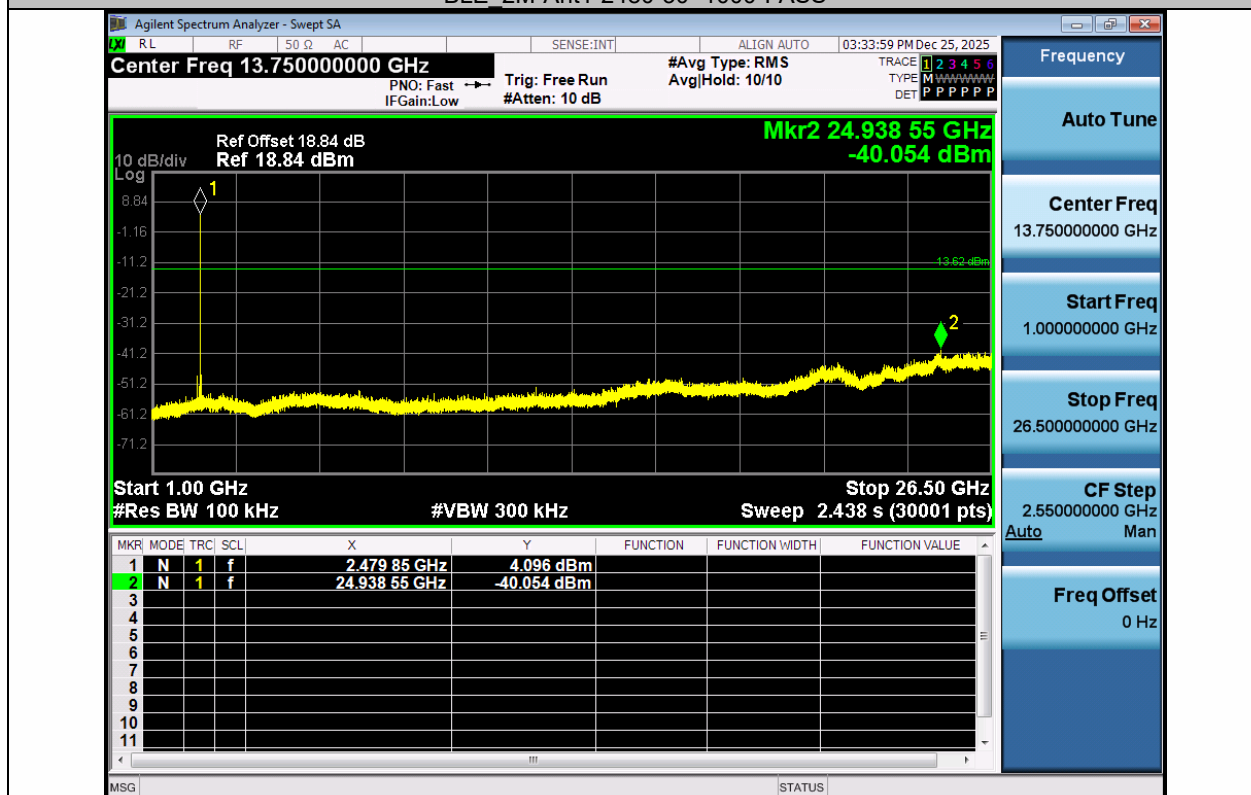


BLE_2M-Ant1-2480-1000~26500-PASS



BLE_125K-Ant1-2402-0~Reference-PASS

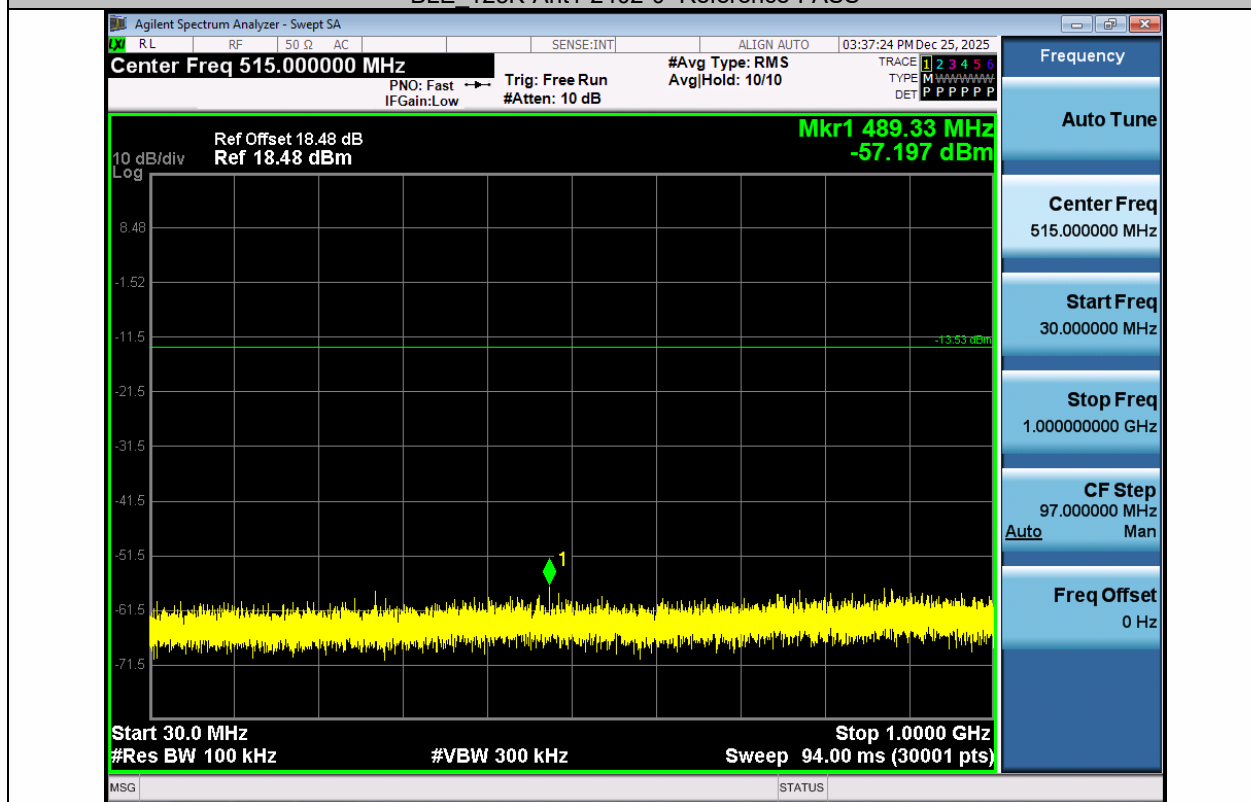


BLE_125K-Ant1-2402-30~1000-PASS

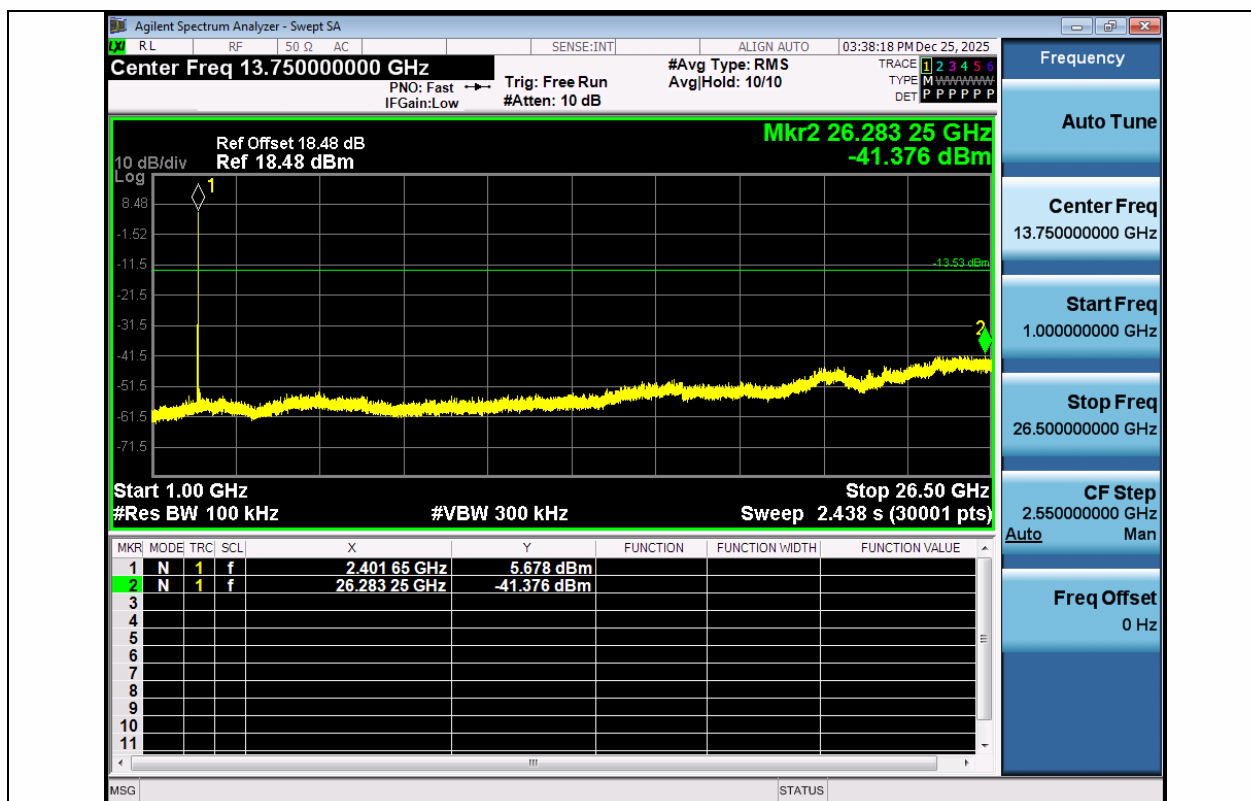


BLE_125K-Ant1-2402-1000~26500-PASS



BLE_125K-Ant1-2440-0~Reference-PASS

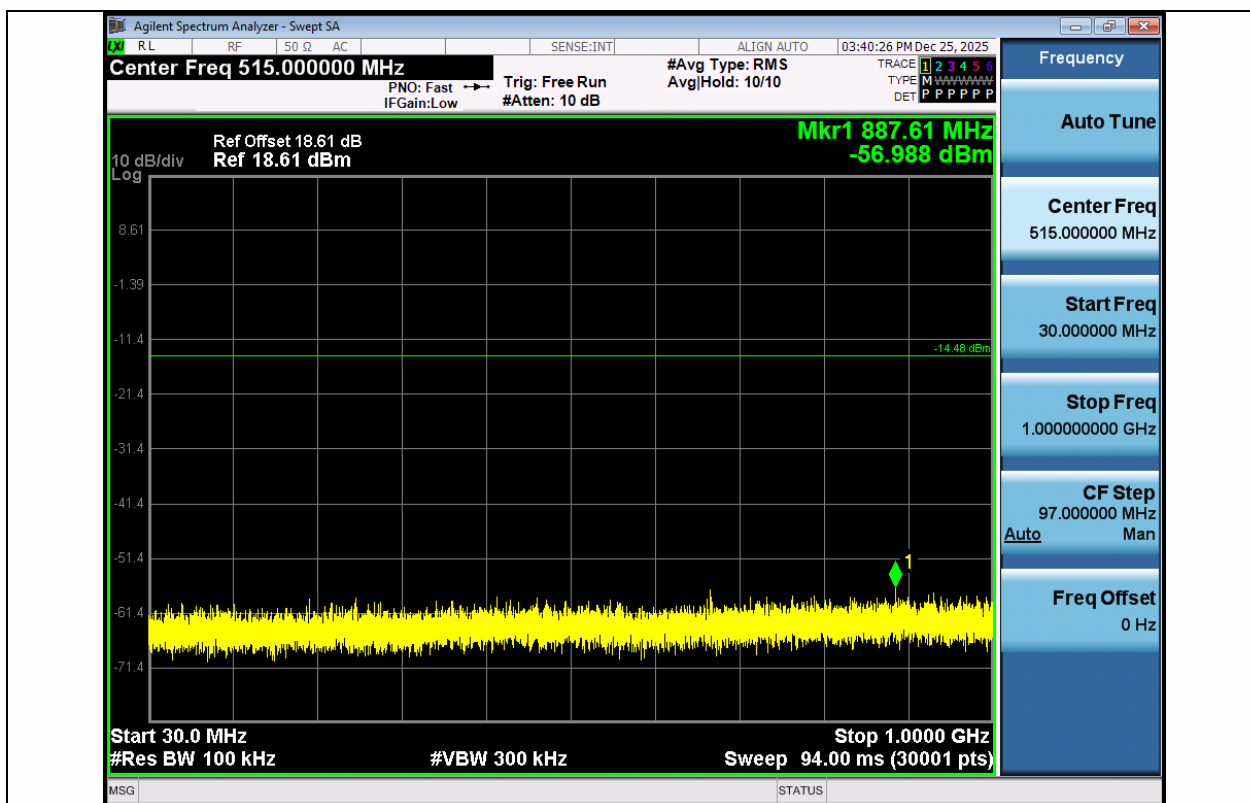


BLE_125K-Ant1-2440-30~1000-PASS

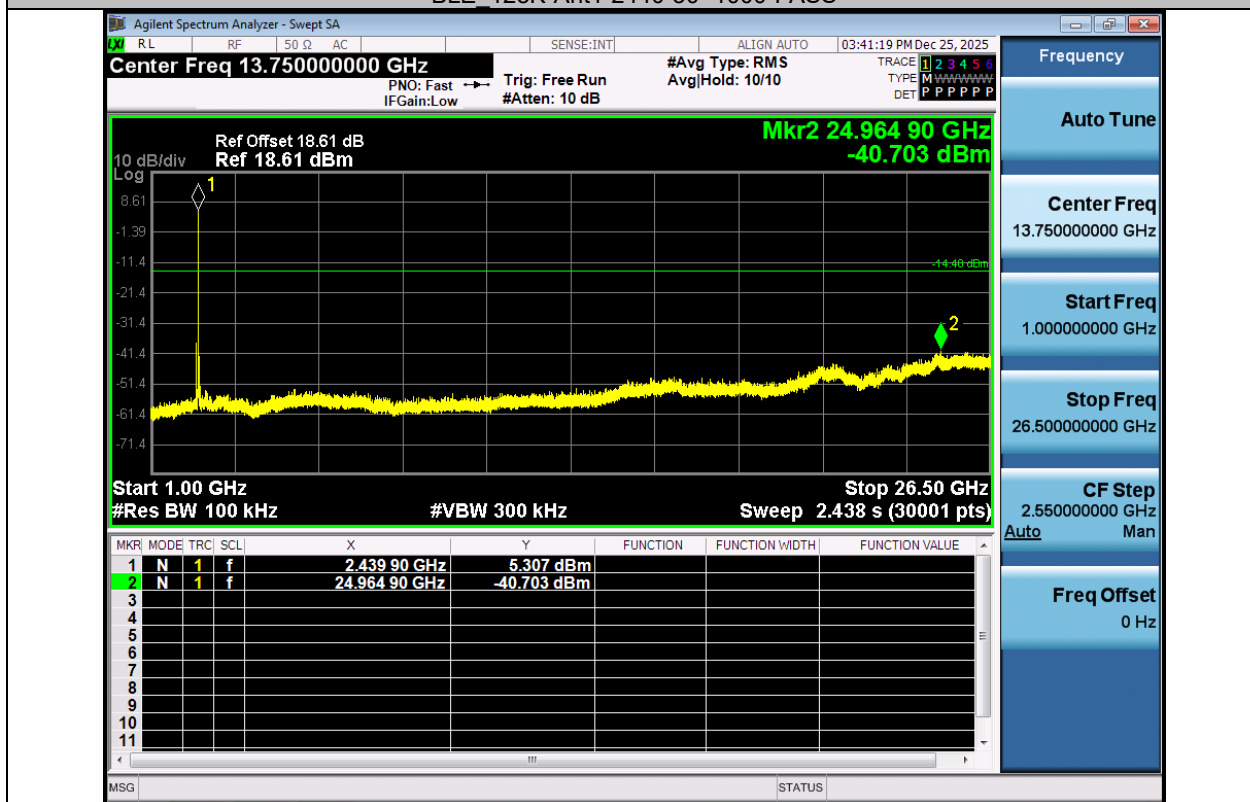


BLE_125K-Ant1-2440-1000~26500-PASS



BLE_125K-Ant1-2480-0~Reference-PASS

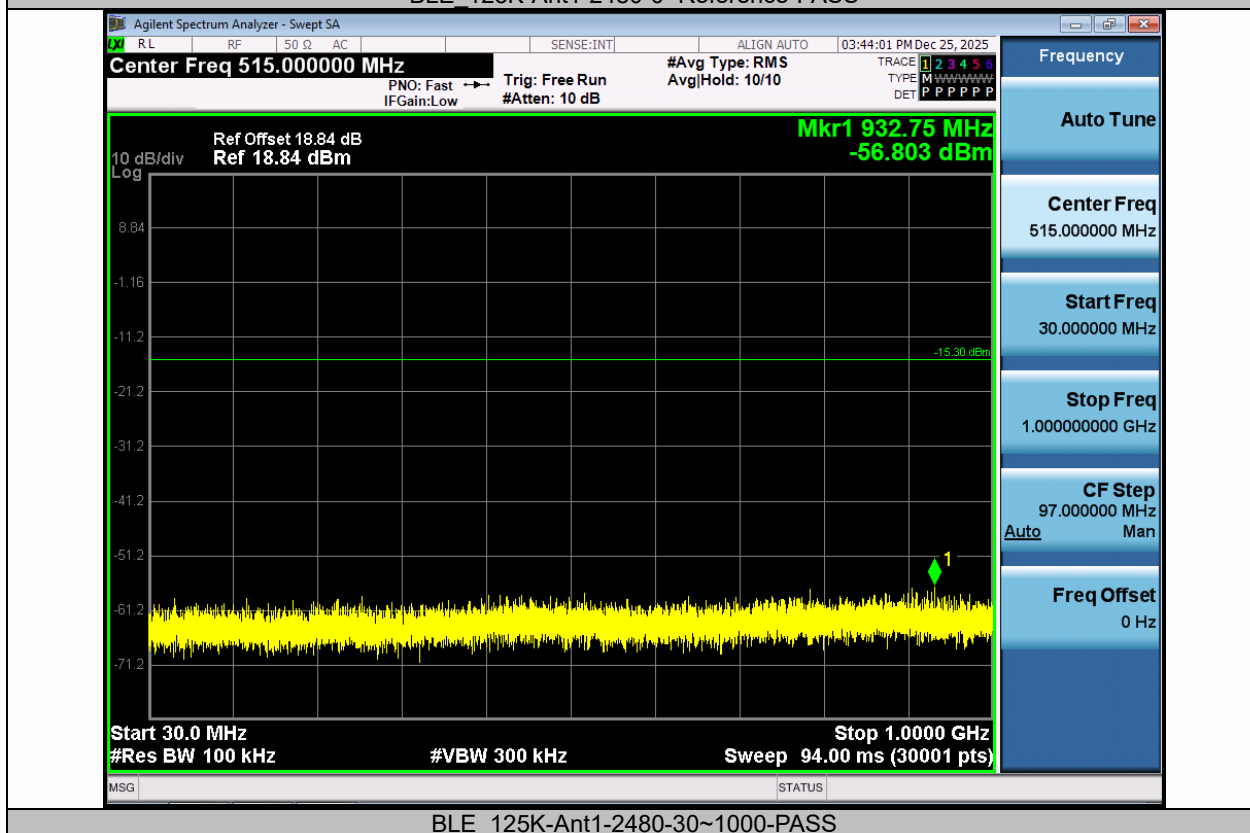


BLE_125K-Ant1-2480-30~1000-PASS

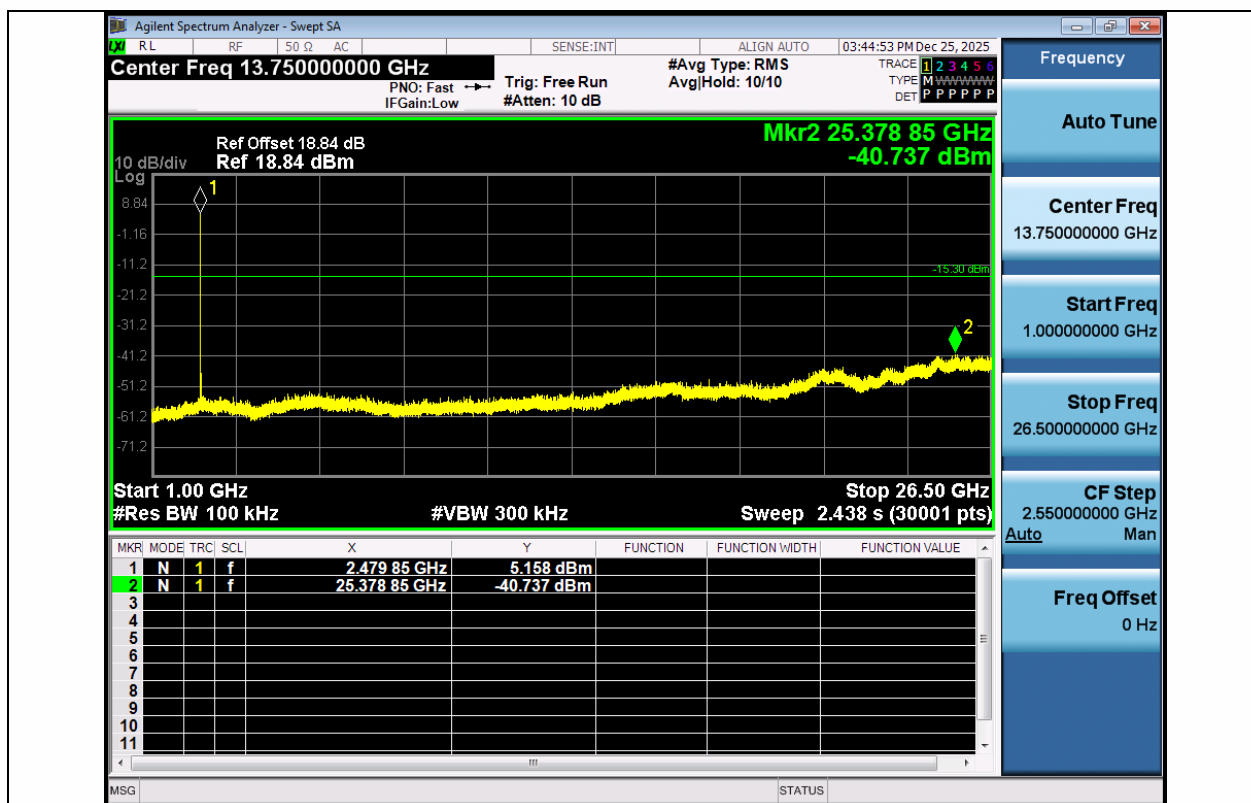


BLE_125K-Ant1-2480-1000~26500-PASS



BLE_500K-Ant1-2402-0~Reference-PASS

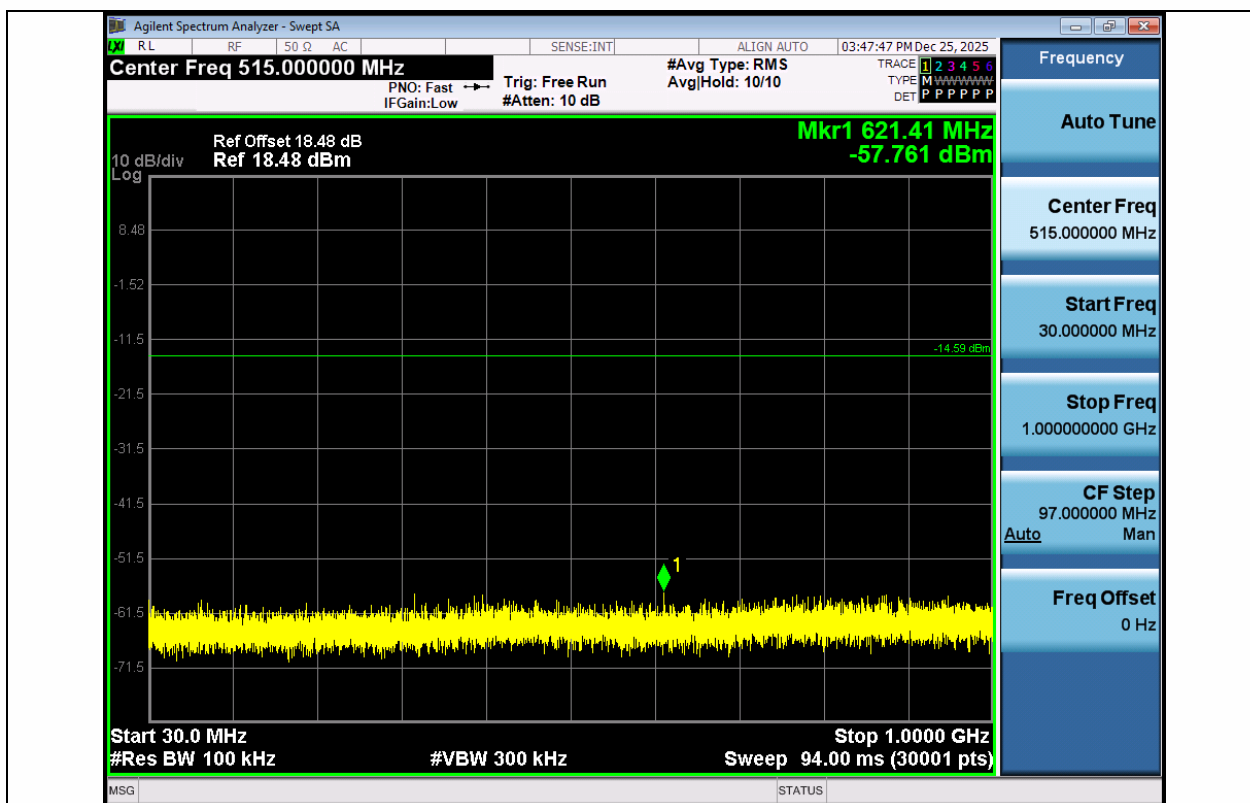


BLE_500K-Ant1-2402-30~1000-PASS

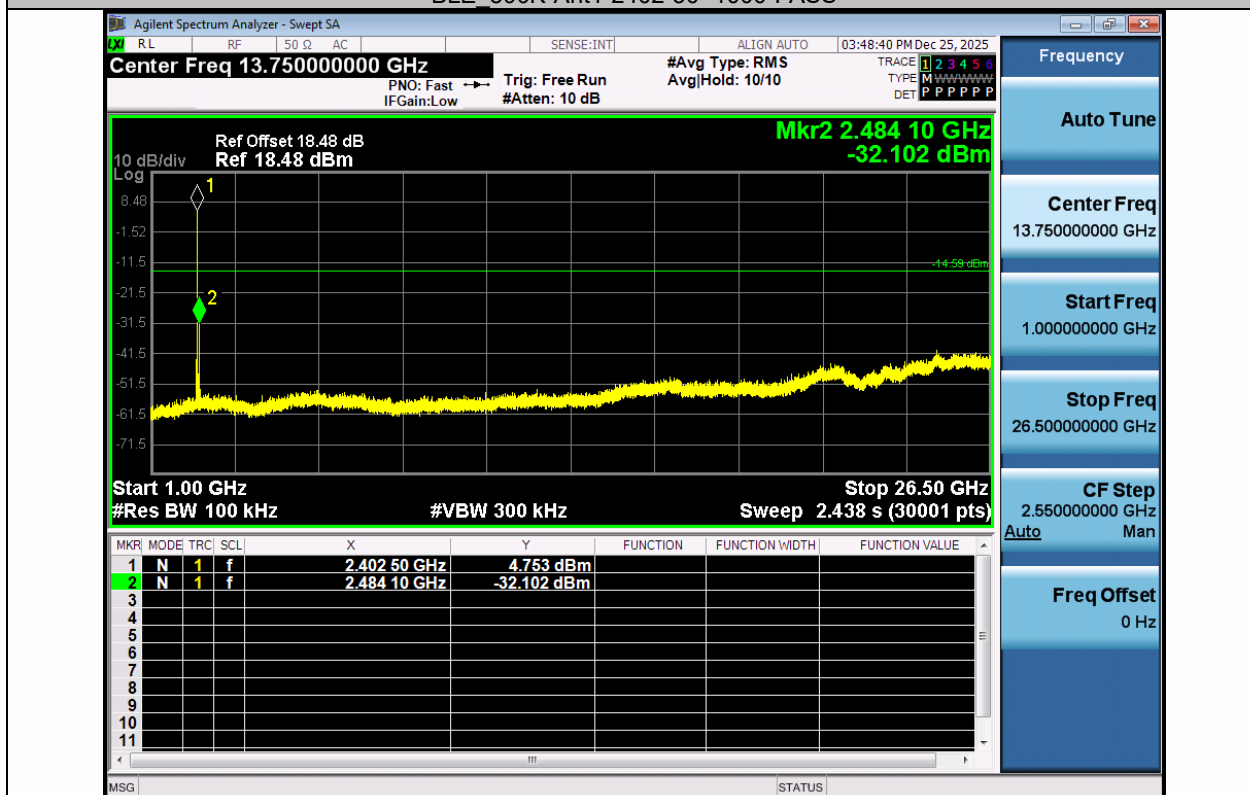

BLE_500K-Ant1-2402-1000~26500-PASS




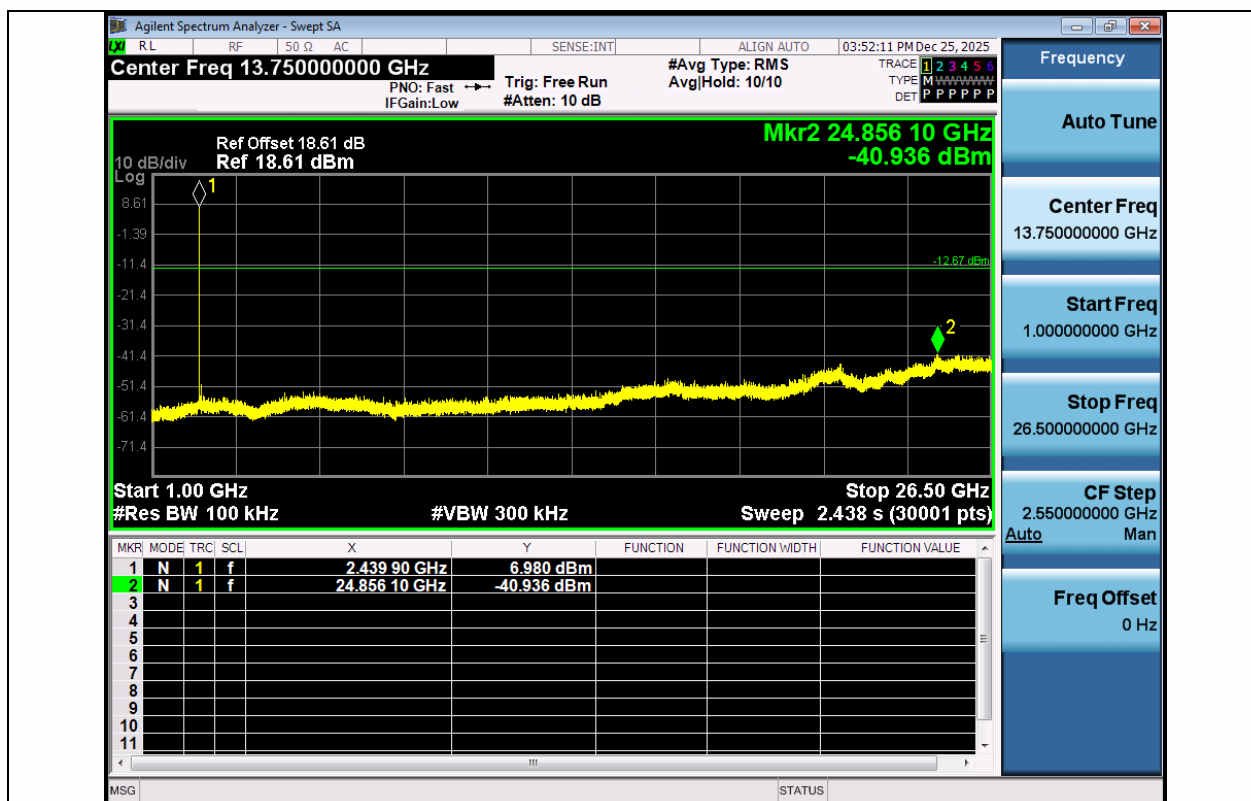


BLE_500K-Ant1-2440-1000~26500-PASS



BLE_500K-Ant1-2480-0~Reference-PASS

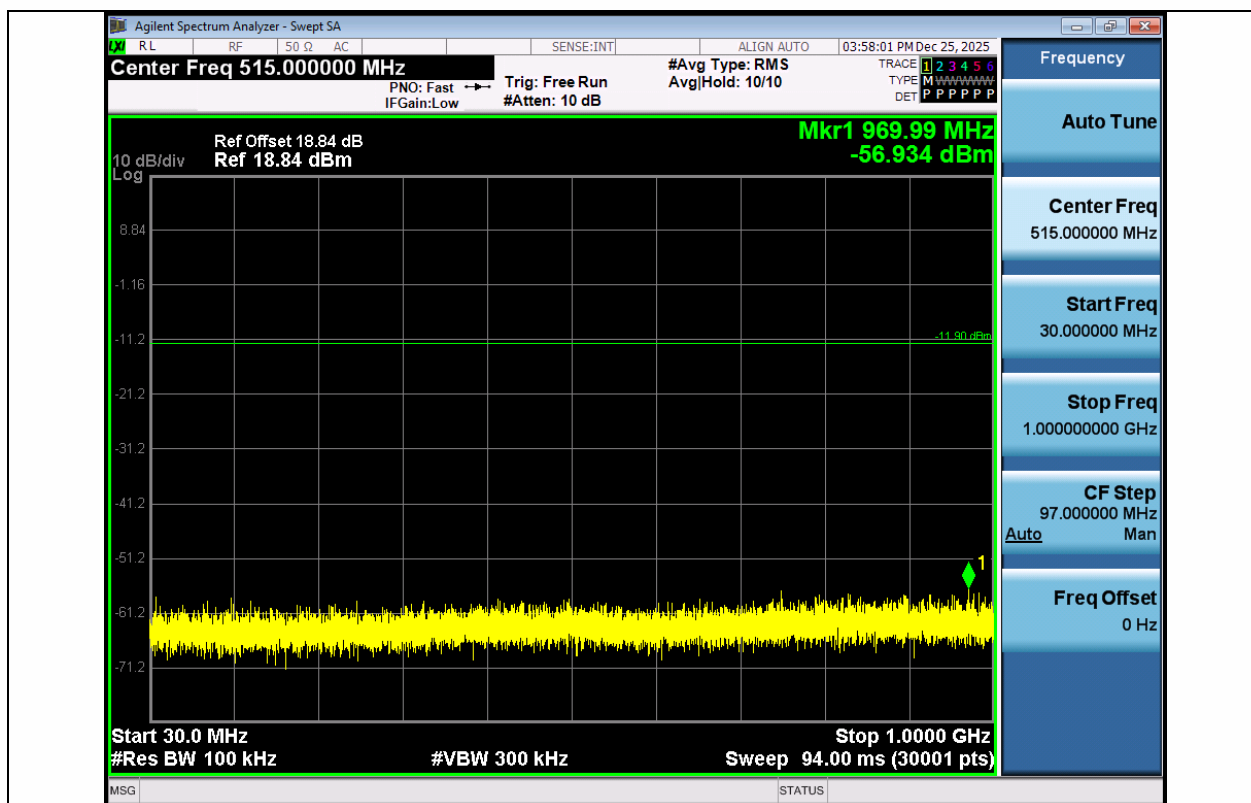

BLE_500K-Ant1-2480-30~1000-PASS

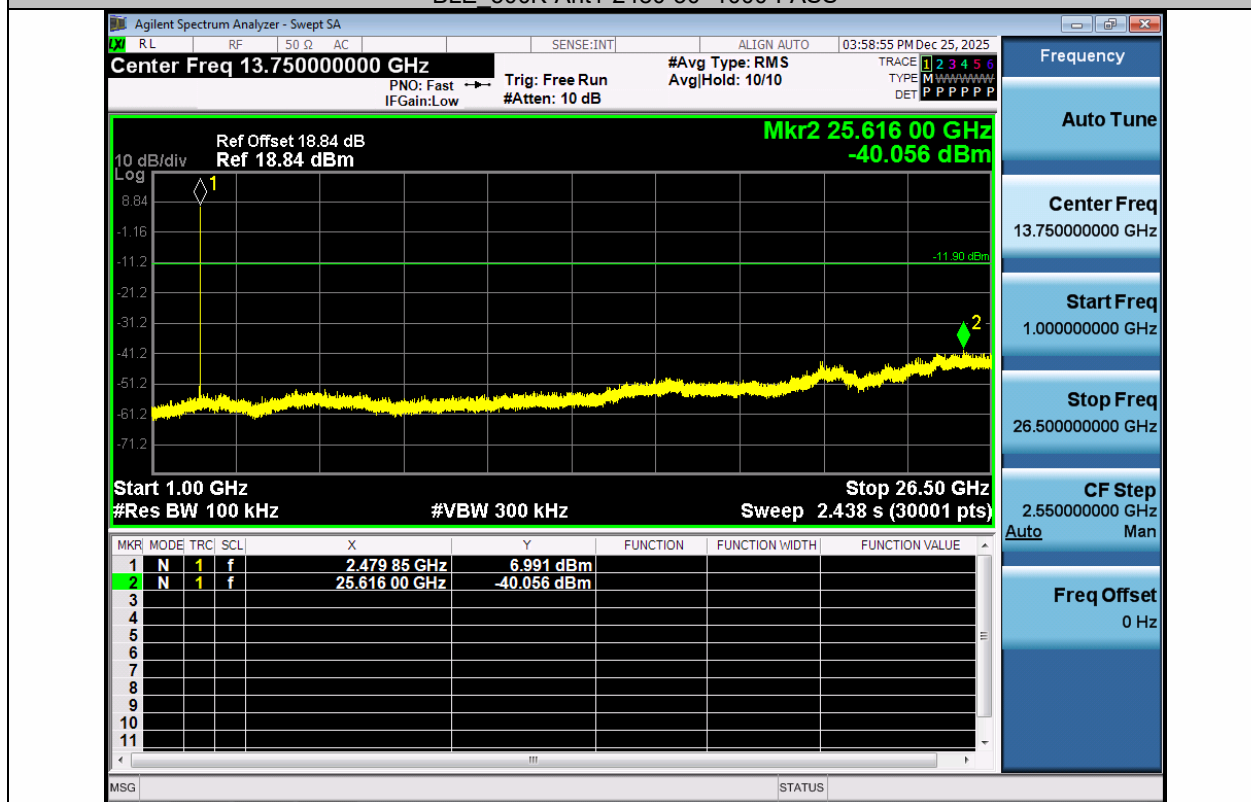

BLE_500K-Ant1-2480-1000~26500-PASS

8.7 RADIATED SPURIOUS EMISSION

8.7.1 Applicable Standard

According to FCC Part 15.247(d), 15.205, 15.209

According to RSS-Gen and RSS-247

According to 558074 D01 15.247 Meas Guidance v05r02 Section 8.6

According to ANSI C63.10 Section 11.12

8.7.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

8.7.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

8.7.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For average measurements the resolution bandwidth of spectrum analyzer is 1 MHz with the video bandwidth is $\geq 1/T$ with peak detector.

For Below 1GHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz for

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 30MHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 9kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 150KHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 200Hz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit. Submit this data.

8.7.5 Test Results

Temperature:	25 °C
Relative Humidity:	60%
ATM Pressure:	1011 mbar
Test Engineer:	CZF

■ Spurious Emission below 30MHz (9KHz to 30MHz)

For Spurious Emission below 30MHz (9KHz to 30MHz), was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

■ Spurious Emission Above 1GHz (1GHz to 25GHz)

BLE mode have been tested, and the worst result was report as below:

Test mode: BLE(1M) Frequency: Channel 0: 2402MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
	H/V	PK	AV	PK	AV	PK	AV
8460	V	58.84	42.19	74	54	15.16	11.81
13149.3	V	67.38	49.10	74	54	6.62	4.90
17589.3	V	67.59	50.78	74	54	6.41	3.22
8439.37	H	58.97	42.10	74	54	15.03	11.90
13224.3	H	66.15	49.05	74	54	7.85	4.95
17806.8	H	66.35	47.72	74	54	7.65	6.28

Test mode: BLE(1M) Frequency: Channel 19: 2440MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
	H/V	PK	AV	PK	AV	PK	AV
8448.75	V	59.39	42.51	74	54	14.61	11.49
13190.6	V	65.96	49.85	74	54	8.04	4.15
17889.3	V	67.45	47.37	74	54	6.55	6.63
8368.12	H	58.99	42.57	74	54	15.01	11.43
13140	H	66.24	48.69	74	54	7.76	5.31
16822.5	H	67.43	46.87	74	54	6.57	7.13

Test mode: BLE(1M) Frequency: Channel 39: 2480MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
	H/V	PK	AV	PK	AV	PK	AV
8332.5	V	59.02	42.46	74	54	14.98	11.54
13501.8	V	66.32	47.03	74	54	7.68	6.97
17956.8	V	66.84	50.33	74	54	7.16	3.67
8446.87	H	59.88	42.10	74	54	14.12	11.90
13235.6	H	65.80	48.96	74	54	8.20	5.04
16955.6	H	67.17	48.97	74	54	6.83	5.03

Note: (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).

(2) Corrected Reading= Reading Level+Correct Factor.

(3) Correct Factor= Ant_F + Cab_L - Preamp

(4) Margin = Limit - Corrected Reading

(5)The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Test mode: BLE(2M) Frequency: Channel 0: 2402MHz

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2388.74	H	46.04	74.00	38.73	54.00
2389.59	V	46.85	74.00	38.48	54.00

Test mode: BLE(2M) Frequency: Channel 39: 2480MHz


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2483.70	H	46.75	74.00	38.74	54.00
2484.04	V	46.84	74.00	38.18	54.00

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Correct Factor.
 - (3) Correct Factor= Ant_F + Cab_L - Preamp
 - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Test Model

Spurious Emission in Restricted Band 2310-2390MHz
Channel 0: 2402MHz BLE_2M


H

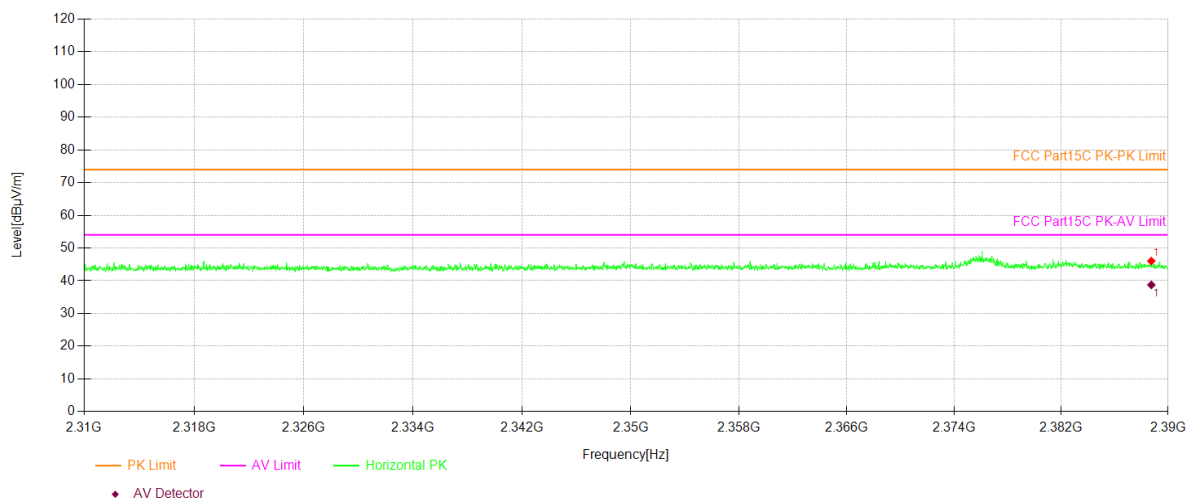

Test Model

Spurious Emission in Restricted Band 2310-2390MHz
Channel 0: 2402MHz BLE_2M


V

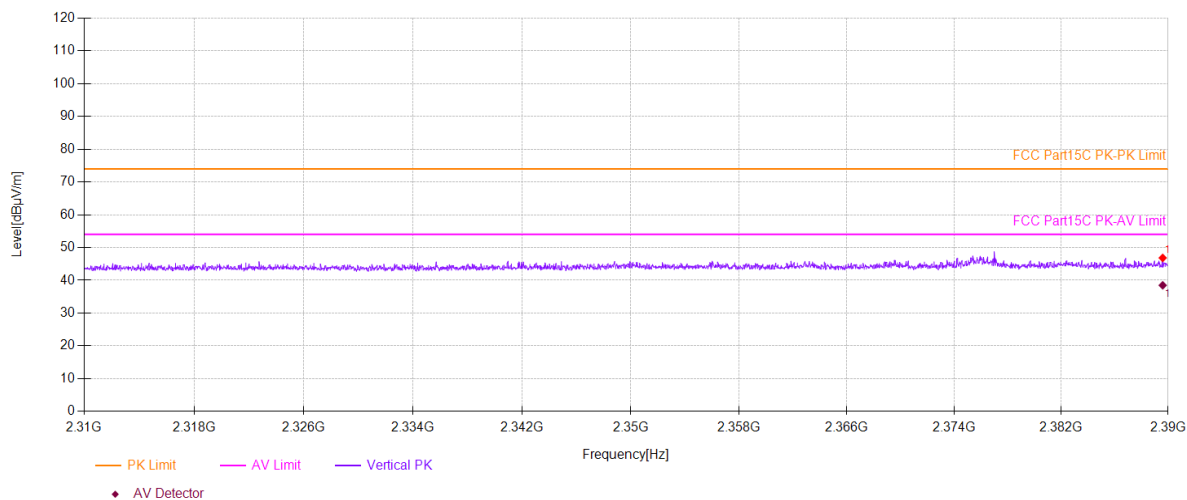

Test Model

Spurious Emission in Restricted Band 2483.5-2500MHz
Channel 39: 2480MHz BLE_2M


H

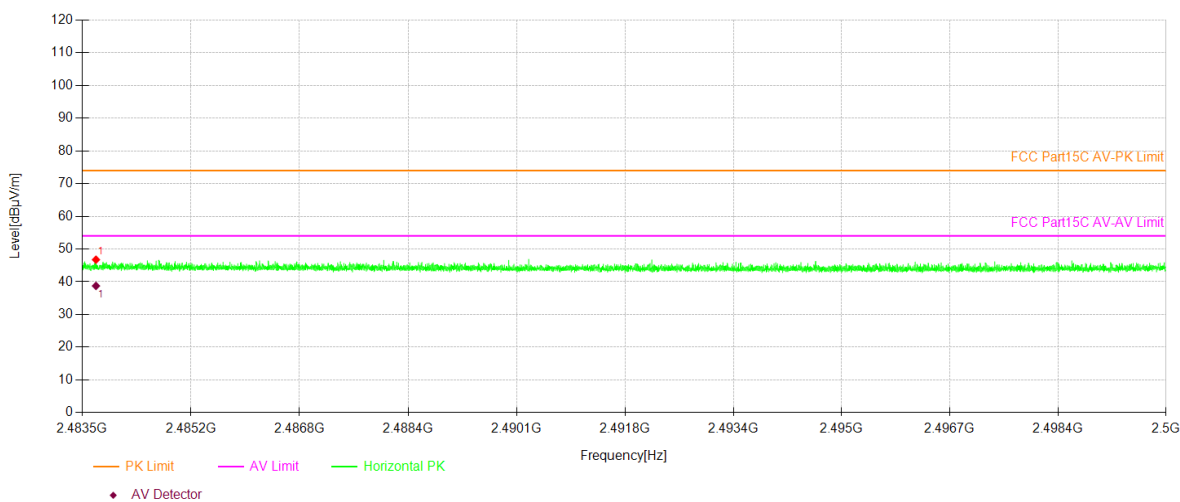

Test Model

Spurious Emission in Restricted Band 2483.5-2500MHz
Channel 39: 2480MHz BLE_2M


V

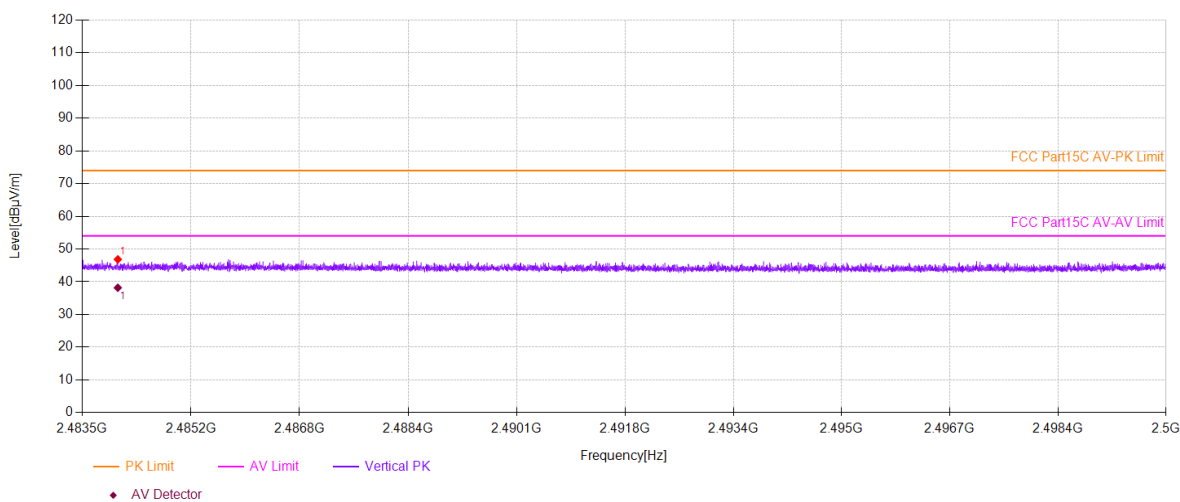

■ Spurious Emission below 1GHz (30MHz to 1GHz)

Bluetooth (BLE_1M, BLE_2M) mode have been tested, and the worst result was report as below:

Mode:	BLE2M 2402	Voltage:	DC 5V
-------	------------	----------	-------

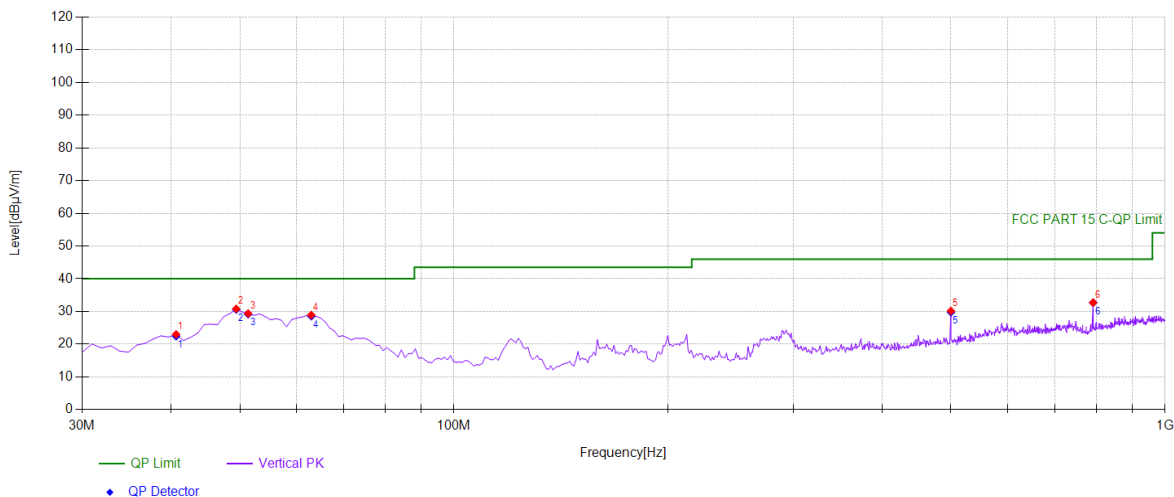


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	40.6807	40.39	-17.36	23.03	PK	40.00	16.97	Vertical
2	49.4194	46.91	-16.10	30.81	PK	40.00	9.19	Vertical
3	51.3614	45.60	-16.21	29.39	PK	40.00	10.61	Vertical
4	63.013	46.73	-17.80	28.93	PK	40.00	11.07	Vertical
5	499.95	40.09	-9.93	30.16	PK	46.00	15.84	Vertical
6	792.212	38.56	-5.84	32.72	PK	46.00	13.28	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	40.6807	-17.36	22.47	40.00	17.53
2	49.4194	-16.10	30.61	40.00	9.39
3	51.3614	-16.21	29.19	40.00	10.81
4	63.013	-17.80	28.56	40.00	11.44
5	499.95	-9.93	29.79	46.00	16.21
6	792.2122	-5.84	32.71	46.00	13.29

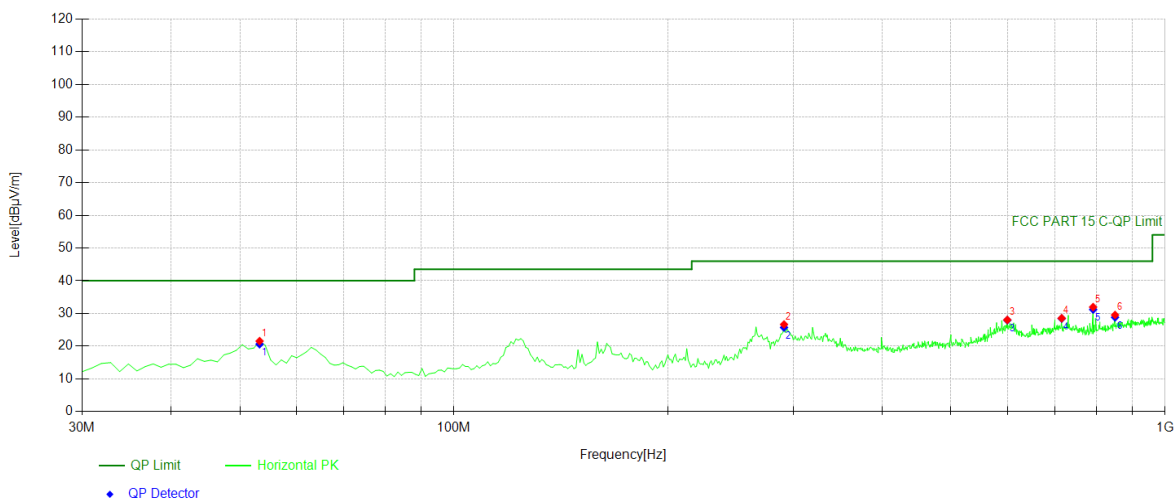


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	53.3033	38.03	-16.47	21.56	PK	40.00	18.44	Horizontal
2	291.191	40.97	-14.31	26.66	PK	46.00	19.34	Horizontal
3	599.96	34.15	-6.10	28.05	PK	46.00	17.95	Horizontal
4	715.505	34.32	-5.76	28.56	PK	46.00	17.44	Horizontal
5	792.212	37.80	-5.84	31.96	PK	46.00	14.04	Horizontal
6	850.470	33.38	-3.82	29.56	PK	46.00	16.44	Horizontal

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	53.3033	-16.47	20.62	40.00	19.38
2	291.1912	-14.31	25.72	46.00	20.28
3	599.96	-6.10	27.95	46.00	18.05
4	715.5055	-5.76	28.46	46.00	17.54
5	792.2122	-5.84	31.22	46.00	14.78
6	850.4705	-3.82	28.82	46.00	17.18

Mode:	BLE2M 2440	Voltage:	DC 5V
-------	------------	----------	-------

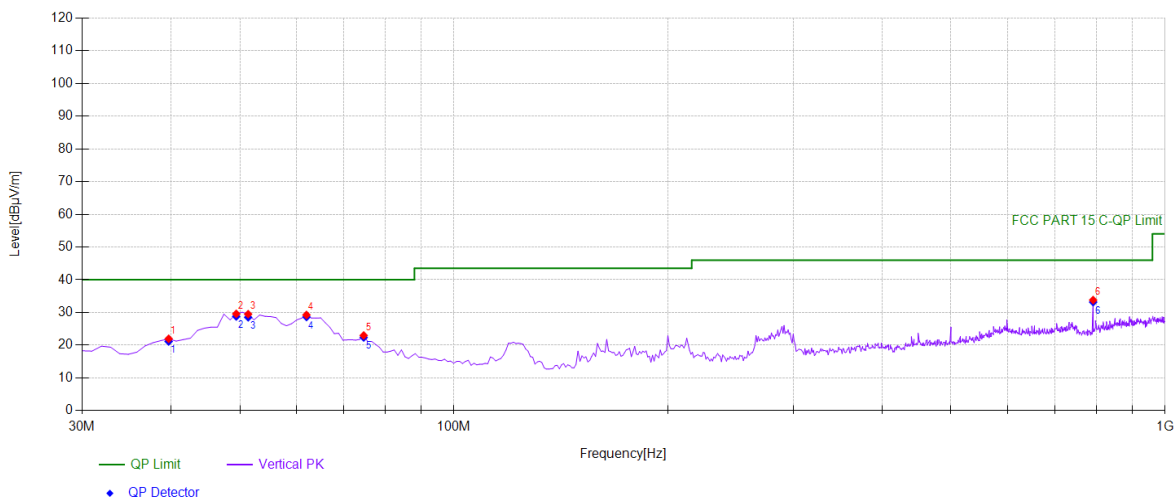


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	39.7097	39.47	-17.50	21.97	PK	40.00	18.03	Vertical
2	49.4194	45.69	-16.10	29.59	PK	40.00	10.41	Vertical
3	51.3614	45.71	-16.21	29.50	PK	40.00	10.50	Vertical
4	62.042	46.93	-17.68	29.25	PK	40.00	10.75	Vertical
5	74.6647	42.47	-19.48	22.99	PK	40.00	17.01	Vertical
6	792.212	39.64	-5.84	33.80	PK	46.00	12.20	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	39.7097	-17.50	21.16	40.00	18.84
2	49.4194	-16.10	28.78	40.00	11.22
3	51.3614	-16.21	28.53	40.00	11.47
4	62.042	-17.68	28.63	40.00	11.37
5	74.6647	-19.48	22.37	40.00	17.63
6	792.2122	-5.84	33.18	46.00	12.82

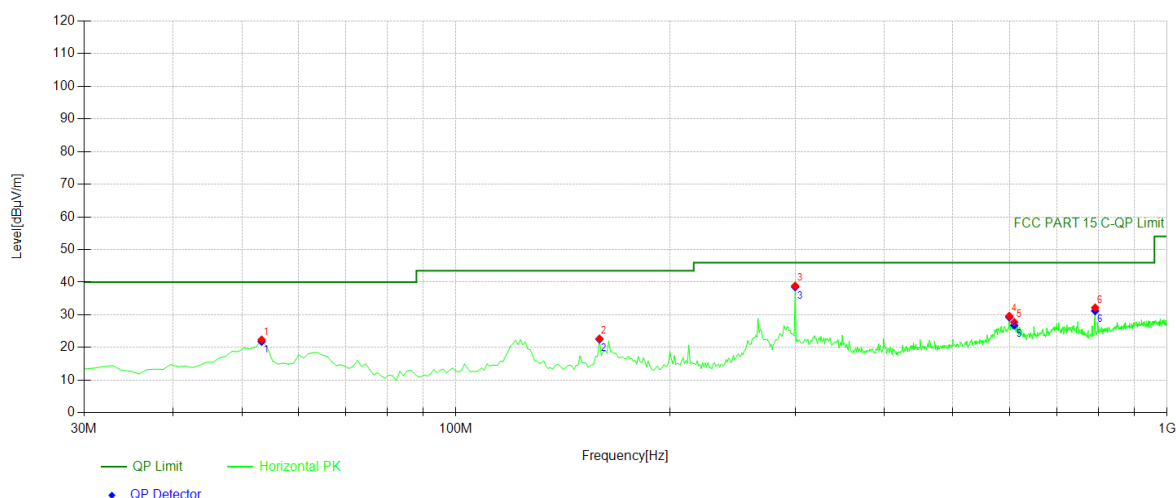


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	53.3033	38.85	-16.47	22.38	PK	40.00	17.62	Horizontal
2	159.139	42.14	-19.43	22.71	PK	43.50	20.79	Horizontal
3	299.929	52.84	-13.96	38.88	PK	46.00	7.12	Horizontal
4	599.96	35.77	-6.10	29.67	PK	46.00	16.33	Horizontal
5	609.669	34.45	-6.65	27.80	PK	46.00	18.20	Horizontal
6	792.212	38.05	-5.84	32.21	PK	46.00	13.79	Horizontal

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	53.3033	-16.47	21.83	40.00	18.17
2	159.1391	-19.43	22.52	43.50	20.98
3	299.9299	-13.96	38.53	46.00	7.47
4	599.96	-6.10	29.32	46.00	16.68
5	609.6697	-6.65	26.81	46.00	19.19
6	792.2122	-5.84	31.22	46.00	14.78

Mode:	BLE2M 2480	Voltage:	DC 5V
-------	------------	----------	-------

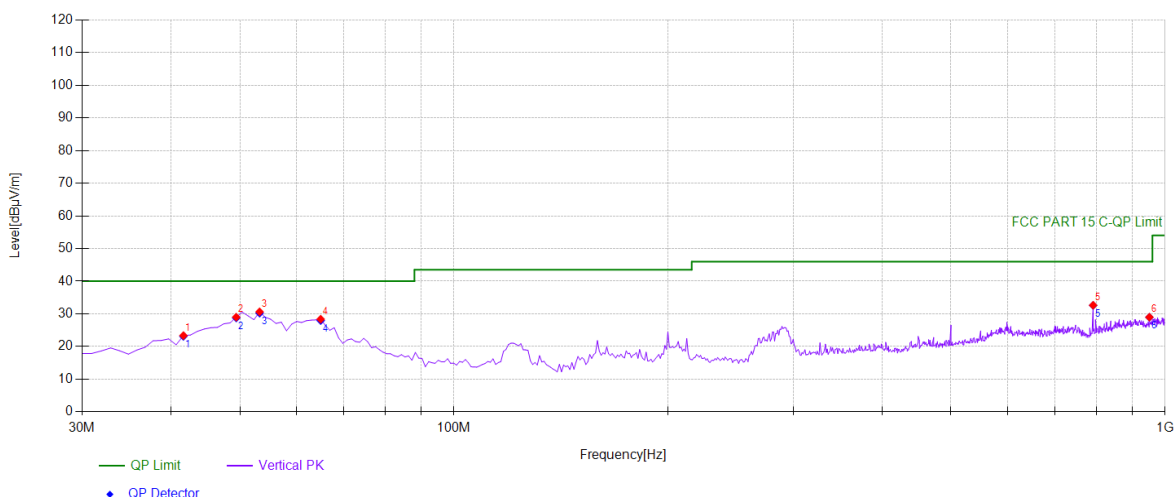


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	41.6517	40.58	-17.22	23.36	PK	40.00	16.64	Vertical
2	49.4194	45.11	-16.10	29.01	PK	40.00	10.99	Vertical
3	53.3033	47.11	-16.47	30.64	PK	40.00	9.36	Vertical
4	64.955	46.45	-18.07	28.38	PK	40.00	11.62	Vertical
5	792.212	38.49	-5.84	32.65	PK	46.00	13.35	Vertical
6	950.480	31.54	-2.55	28.99	PK	46.00	17.01	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	41.6517	-17.22	23.11	40.00	16.89
2	49.4194	-16.10	28.76	40.00	11.24
3	53.3033	-16.47	30.23	40.00	9.77
4	64.955	-18.07	27.97	40.00	12.03
5	792.2122	-5.84	32.60	46.00	13.40
6	950.4805	-2.55	28.94	46.00	17.06

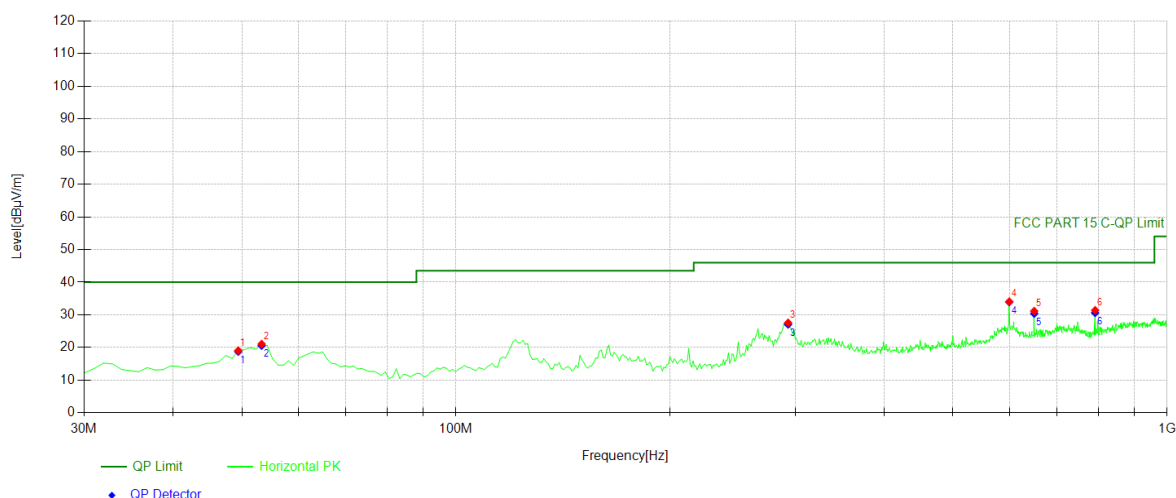

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	49.4194	35.17	-16.10	19.07	PK	40.00	20.93	Horizontal
2	53.3033	37.56	-16.47	21.09	PK	40.00	18.91	Horizontal
3	293.133	41.81	-14.23	27.58	PK	46.00	18.42	Horizontal
4	599.96	40.15	-6.10	34.05	PK	46.00	11.95	Horizontal
5	650.450	38.11	-6.94	31.17	PK	46.00	14.83	Horizontal
6	792.212	37.24	-5.84	31.40	PK	46.00	14.60	Horizontal

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	49.4194	-16.10	18.75	40.00	21.25
2	53.3033	-16.47	20.60	40.00	19.40
3	293.1331	-14.23	27.09	46.00	18.91
4	599.96	-6.10	33.92	46.00	12.08
5	650.4504	-6.94	30.40	46.00	15.60
6	792.2122	-5.84	30.63	46.00	15.37

8.8 CONDUCTED EMISSIONS TEST

8.8.1 Applicable Standard

According to FCC Part 15.207(a)
According to IC RSS-Gen 8.8

8.8.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.8.3 Test Configuration

Test according to clause 7.3 conducted emission test setup

8.8.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.

8.8.5 Test Results

N/A

8.9 ANTENNA APPLICATION

8.9.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
FCC 47 CFR Part 15.247 (b)	If transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.
RSS-Gen Section 6.8	The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.
RSS-247 Section 5.4	If the transmitter employs an antenna system that emits multiple directional beams, but does not emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device (i.e. the sum of the power supplied to all antennas, antenna elements, staves, etc., and summed across all carriers or frequency channels) shall not exceed the applicable output power limit. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as the sum of 10 log (number of array elements or staves) plus the directional gain of the element or stave having the highest gain.

8.9.2 Result

PASS.

- Note:
- ☒ Antenna use a permanently attached antenna which is not replaceable.
 - ☐ Not using a standard antenna jack or electrical connector for antenna replacement
 - ☐ The antenna has to be professionally installed (please provide method of installation)

Please refer to the attached document Internal Photos to show the antenna connector.

----- END OF REPORT -----