

2. 产品规格描述 (Product specification describes)


电气参数(Parameter)	
频率范围 (Frequency)	2400-2500MHz
带宽 (Bandwidth)	/
输入阻抗 (Impedance)	50 Ω
驻波比 (VSWR)	<2.5
增益 (Gain)	> 2.3dBi
最大效率 (Max. Efficiency)	>68%
极化方式 (Polarization)	Linear polarization/Vertical
辐射方向图 (Radiation pattern)	Omni-directional
接口类型 (Connector)	IPEX
机械参数(Mechanical Parameter)	
总长 (Length)	
盐雾测试 (Salt Spray Test)	48H
环境参数 (Environment Parameter)	
工作温度 (Operation Temperature)	-30℃~65℃
储藏温度 (Storage Temperature)	-30℃~75℃

3. 电气性能测试报告(Radiation Report)

A-03 驻波图(VSWR)




A-04 驻波图(VSWR)

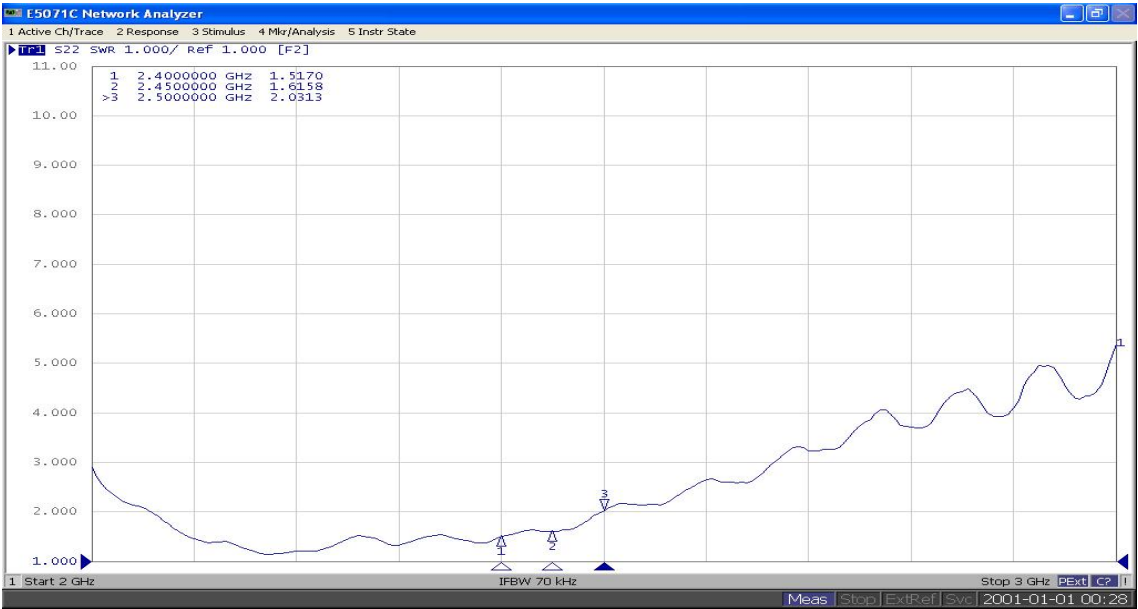

2400-2500MHz

A-03 方向图(radiation pattern)

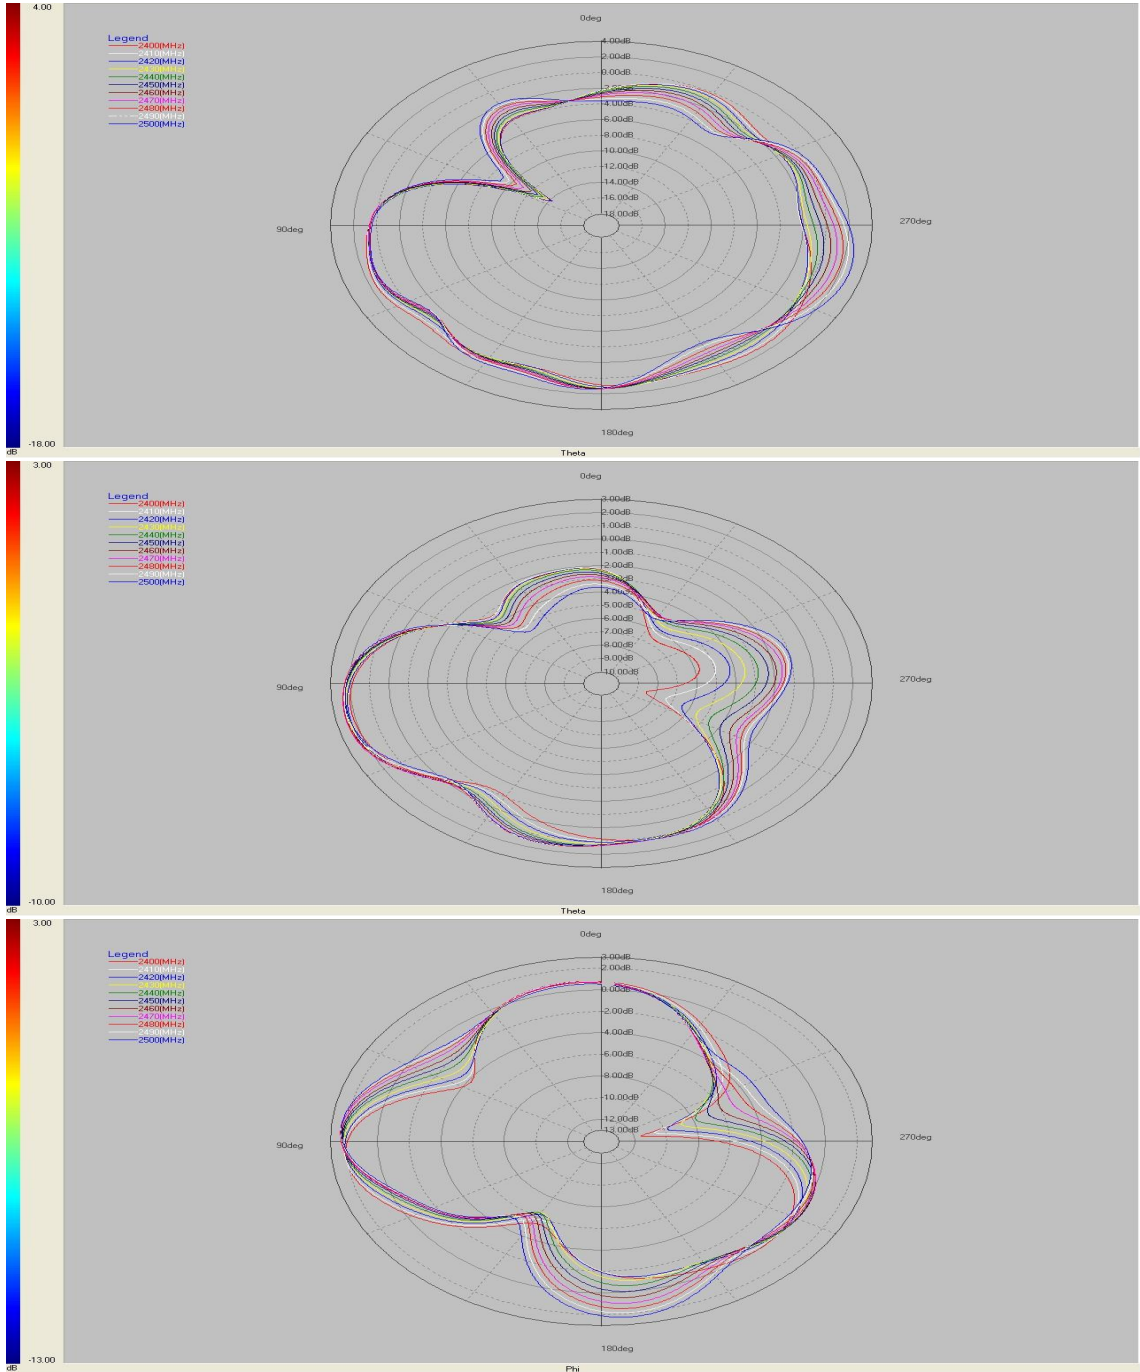

2400-2500MHz

A-04 方向图(radiation pattern)

