

Prüfbericht-Nr.: <i>Test report no.:</i>	CN2634JN 004	Auftrags-Nr.: <i>Order no.:</i>	27233642	Seite 1 von 17 Page 1 of 17
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2026-05-09	
Auftraggeber: <i>Client:</i>	Cricut, Inc. 10855 South River Front Parkway, South Jordan, UT 84095, USA			
Prüfgegenstand: <i>Test item:</i>	Cricut stickerpix print			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	CPPT401			
Auftrags-Inhalt: <i>Order content:</i>	Test Report			
Prüfgrundlage: <i>Test specification:</i>	CFR Title 47 FCC Part 15: Subpart C Section 15.225 RSS-210 Issue 11 June 2024 RSS-Gen Issue 5 February 2021			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2026-05-11	Please refer to Photo Document		
Prüfmuster-Nr.: <i>Test sample no:</i>	A004271413-001~020 A004282600-001~009			
Prüfzeitraum: <i>Testing period:</i>	2026-05-24 - 2026-07-24			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>			genehmigt von: <i>authorized by:</i>	
Datum: <i>Date:</i>	2026-07-31	Ausstellungsdatum: <i>Issue date:</i>		2026-07-31
Signed by: Lin Lin		Signed by: Hardy Suo		
Stellung / Position:	Sachverständige(r)/Expert	Stellung / Position:	Sachverständige(r)/Expert	
Sonstiges / <i>Other:</i>	FCC ID: 2AYX6-CPPT401 IC: 27018-CPPT401 HVIN: CPPT401 This report is for NFC.			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende: P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet * Legend: P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN2634JN 004
Test report no.:

Seite 2 von 17
Page 2 of 17

Anmerkungen Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TÜV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TÜV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 20dB AND 99% BANDWIDTH

RESULT: Pass

5.1.3 FREQUENCY STABILITY

RESULT: Pass

5.1.4 RADIATED SPURIOUS EMISSION (IN-BAND & OUT-BAND EMISSIONS)

RESULT: Pass

5.1.5 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	7
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY.....	7
2.6	LOCATION OF ORIGINAL DATA.....	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	8
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	8
3.5	SUBMITTED DOCUMENTS.....	9
4	TEST SET-UP AND OPERATION MODES	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE.....	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	10
4.5	TEST SETUP DIAGRAM	11
5	TEST RESULTS	12
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	12
5.1.1	<i>Antenna Requirement</i>	<i>12</i>
5.1.2	<i>20dB and 99% Bandwidth</i>	<i>13</i>
5.1.3	<i>Frequency Stability.....</i>	<i>14</i>
5.1.4	<i>Radiated Spurious Emission (In-Band & Out-Band Emissions)</i>	<i>15</i>
5.1.5	<i>Conducted Emission on AC Mains.....</i>	<i>16</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	17
7	LIST OF TABLES.....	17

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of NFC.

Appendix B: Photographs of the Test Set-up

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, People's Republic of China

FCC Accreditation Designation No.: CN1260

ISED wireless device testing laboratory: 25069

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Unwanted Emission Testing (TS9975)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2025-09-22	2026-09-21
Signal Analyzer	R&S	FSV 40	101439	2025-09-22	2026-09-21
System Controller Interface	R&S	SCI-100	S10010038	N/A	N/A
Filterbank	R&S	Wlan	100759	2025-09-22	2026-09-21
OSP	R&S	OSP 120	102040	N/A	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2025-09-22	2026-09-21
Amplifier	R&S	SCU-18F	180070	2025-09-22	2026-09-21
Amplifier	R&S	SCU40A	100475	2025-09-22	2026-09-21
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2024-09-28	2026-09-27
Double-Ridged Antenna(1 -18 GHz)	ETS-LINDGREN	3117	00218717	2024-09-28	2026-09-27
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2024-09-28	2026-09-27
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-09-14	2027-09-13

Conducted Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102428	2026-07-18
Artificial Mains Network	R&S	ENV432	101546	2027-02-03
Artificial Mains Network	R&S	ENV432	101411	2026-07-18
EMC32 Test Software	R&S	EMC32(Ver.10.60.20)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Table 2: Measurement Uncertainty

Parameter	Uncertainty (k=2)
RF output power, conducted	± 0.99 dB
Occupied Channel Bandwidth	± 2.08 %
Unwanted Emissions, conducted	± 0.89 dB
All emissions, radiated	± 4.17 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.24 dB / ± 3.24 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The product is Cricut stickerpix print, which supports Bluetooth, 2.4GHz Wi-Fi and NFC wireless technology.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	Cricut stickerpix print
Type Designation:	CPPT401
FCC ID:	2AYX6-CPPT401
IC:	27018-CPPT401
HVIN:	CPPT401
Operating Voltage:	DC 24V/2A input via AC/DC Adapter
Testing Voltage:	AC 120V, 60Hz
Operating Temperature Range:	+5 °C ~ +35 °C
AC/DC Adapter:	Model: AP053U-24200 Input: 100-240Vac, 50/60Hz, 1.5A Output: 24V, 2A
Technical Specification of NFC	
Operating Frequency:	13.56 MHz
Type of Modulation:	ASK
Antenna Type:	Coil Antenna
Number of Antenna:	1

Note: The correctness of all data provided by customer in the test report is ensured and responsible of the customer. Any misjudgment of the test results caused by the use of incorrect data provided by customer shall be borne by the customer.

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, NFC transmitting mode
- B. Standby mode

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

Prüfbericht - Nr.: CN2634JN 004
Test Report No.:

Seite 9 von 17
Page 9 of 17

3.5 Submitted Documents

- Application Form
- Operation Description
- User Manual
- FCC/IC Label and Location Info

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10:2020, ANSI C63.10:2020+Cor. 1:2023+ C63.10a:2024.

According to clause 3.1, all tests were performed on model *CPPT401* in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 4: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	S/N
Laptop	Lenovo	ThinkPad T14	---
Smart Phone	HUAWEI	Mate40	---

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 30MHz)

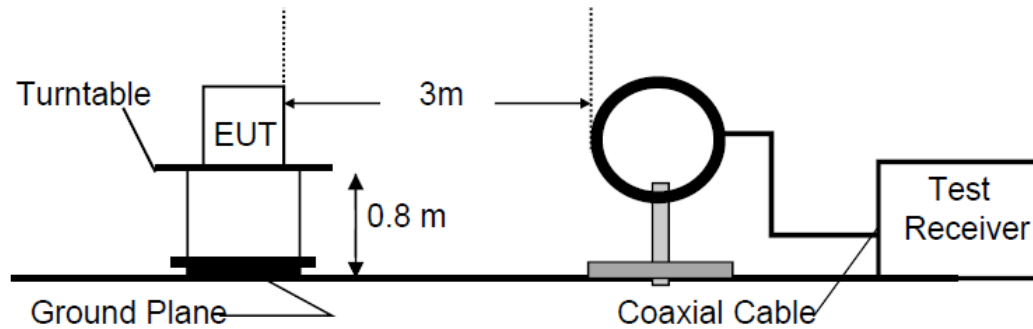


Diagram of Measurement Configuration for Radiation Test (30MHz to 1GHz)


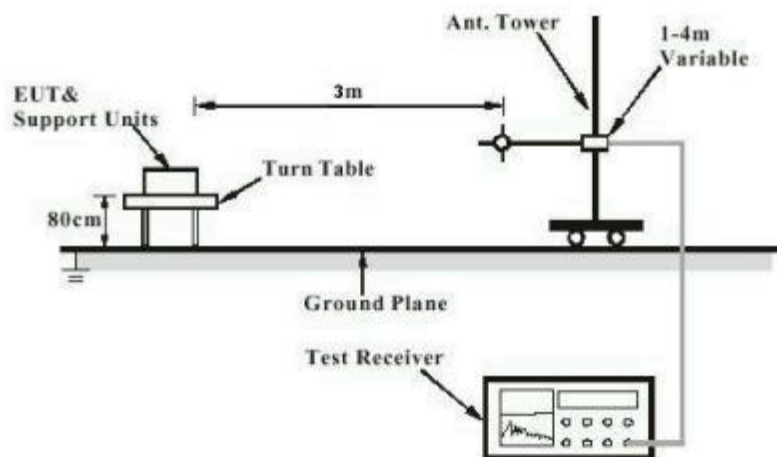


Diagram of Measurement Configuration for Mains Conduction Measurement

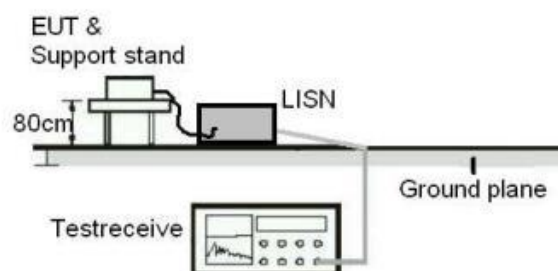

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.203
RSS-Gen Section 6.8

According to the manufacturer declared, the EUT has a Coil Antenna, permanent attachment and no consideration of replacement, refer to section 3.2 for details.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: **CN2634JN 004**
Test Report No.:Seite 13 von 17
Page 13 of 17**5.1.2 20dB and 99% Bandwidth****RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.215 (c) RSS-Gen Section 6.7
Basic standard	: ANSI C63.10:2020, ANSI C63.10:2020+Cor. 1:2023+ C63.10a:2024
Limits	: Within assigned band
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2026-07-24
Input voltage	: AC 120V, 60Hz
Operation mode	: A
Ambient temperature	: 23.8 °C
Relative humidity	: 57 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

5.1.3 Frequency Stability

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.225 (e) RSS-210, Annex B.6
Basic standard	: ANSI C63.10:2020, ANSI C63.10:2020+Cor. 1:2023+ C63.10a:2024
Limits	: $\pm 0.01\%$ of Operating Frequency (1.356 kHz)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2026-07-24
Input voltage	: AC 120V, 60Hz
Operation mode	: A
Ambient temperature	: 23.8 °C
Relative humidity	: 57 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: **CN2634JN 004**
Test Report No.:Seite 15 von 17
Page 15 of 17**5.1.4 Radiated Spurious Emission (In-Band & Out-Band Emissions)****RESULT:****Pass****Test Specification**

Test standard : FCC Part 15.225 (a)(b)(c)(d)
FCC Part 15.209 & 15.205
RSS-210 Section B.6

Basic standard : ANSI C63.10:2020, ANSI C63.10:2020+Cor. 1:2023+
C63.10a:2024

Limits : Refer to FCC Part 15.209(a)
RSS-210 Section B.6 & RSS-Gen Section 8.9

Kind of test site : 3m Semi-anechoic Chamber

Test Setup

Date of testing : 2026-07-24

Input voltage : AC 120V, 60Hz

Operation mode : A, B

Ambient temperature : Refer to test result

Relative humidity : Refer to test result

Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: **CN2634JN 004**
Test Report No.:Seite 16 von 17
Page 16 of 17

5.1.5 Conducted Emission on AC Mains

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.207(a) RSS-Gen Section 8.8
Basic standard	: ANSI C63.10:2020, ANSI C63.10:2020+Cor. 1:2023+ C63.10a:2024
Frequency range	: 0.15 – 30MHz
Classification	: Class B
Limits	: FCC Part 15.207(a) RSS-Gen Table 4
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2026-05-24
Input voltage	: AC 120V, 60Hz
Operation mode	: A
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix B.

7 List of Tables


Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty.....	7
Table 3: Technical Specification of EUT	8
Table 4: List of Accessories and Auxiliary Equipment.....	10

Appendix A: Test Results of NFC

APPENDIX A: TEST RESULTS OF NFC	1
APPENDIX A.1: TEST RESULTS OF 20DB BANDWIDTH	2
Operating mode.....	2
APPENDIX A.2: TEST RESULTS OF 99% BANDWIDTH.....	3
Operating mode.....	3
APPENDIX A.3: TEST RESULTS OF FREQUENCY STABILITY	4
APPENDIX A.4: TEST RESULTS OF RADIATED SPURIOUS EMISSION (IN-BAND & OUT-BAND EMISSIONS)	5
Operating mode.....	5
Standby.....	10
APPENDIX A.5: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	15

Appendix A.1: Test Results of 20dB Bandwidth


Operating mode

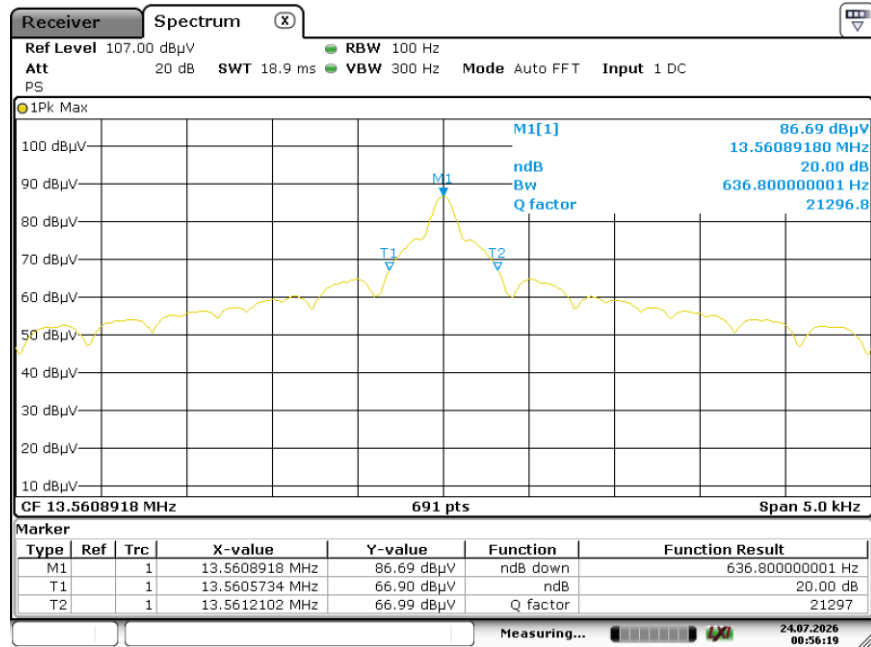

Date: 24.JUL.2026 00:56:19

Appendix A.2: Test Results of 99% Bandwidth

Operating mode

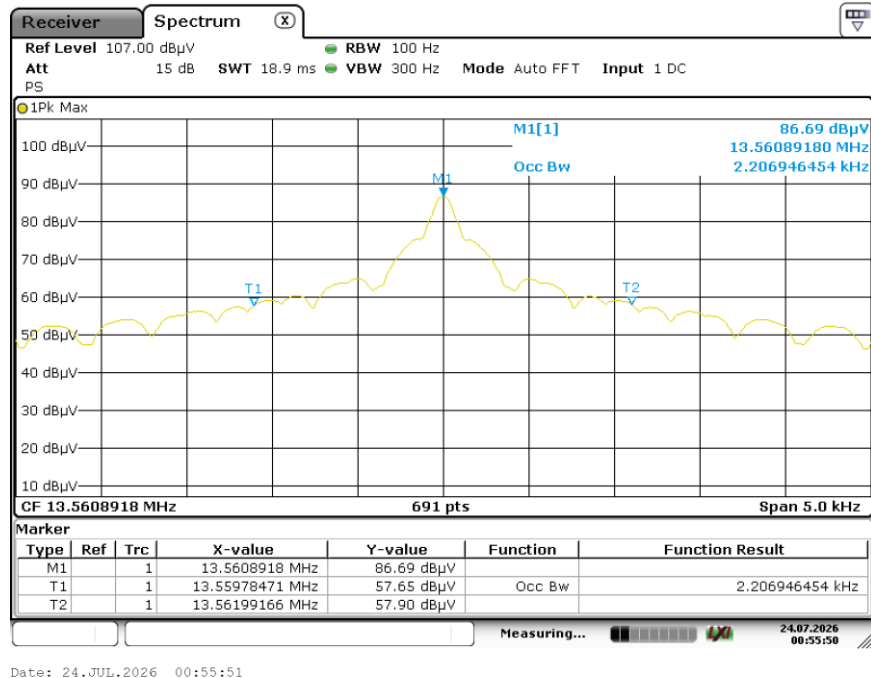

Date: 24.JUL.2026 00:55:51

Appendix A.3: Test Results of Frequency Stability

Test Frequency (MHz)	Test Conditions		Test Results (kHz)	Deviation (kHz)	Limit (kHz)	Result
	Temp(°C)	Volt(V AC)				
13.56	-20	120	13560.352	0.352	±0.01% (1.356 kHz)	Pass
	-10	120	13560.328	0.328		Pass
	0	120	13560.194	0.194		Pass
	10	120	13560.237	0.237		Pass
	20	120	13560.261	0.261		Pass
	30	120	13560.253	0.253		Pass
	40	120	13560.149	0.149		Pass
	50	120	13560.175	0.175		Pass
	20	102	13560.208	0.208		Pass
		138	13560.231	0.231		Pass

Note: Deviation (kHz) = (Test Result-13.56MHz)*1000


Appendix A.4: Test Results of Radiated Spurious Emission (In-Band & Out-Band Emissions)

Note: The highest waveform in the figure is Fundamental and/or harmonics frequency.

Operating mode

EUT Information

EUT Name: Cricut stickerpix print
Model: CPPT401
Test Mode: NFC
Order No/Sample No: A004271413-004
Test Voltage: AC 120V, 60Hz
Remark: Temp 23.8°C Humi:57%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

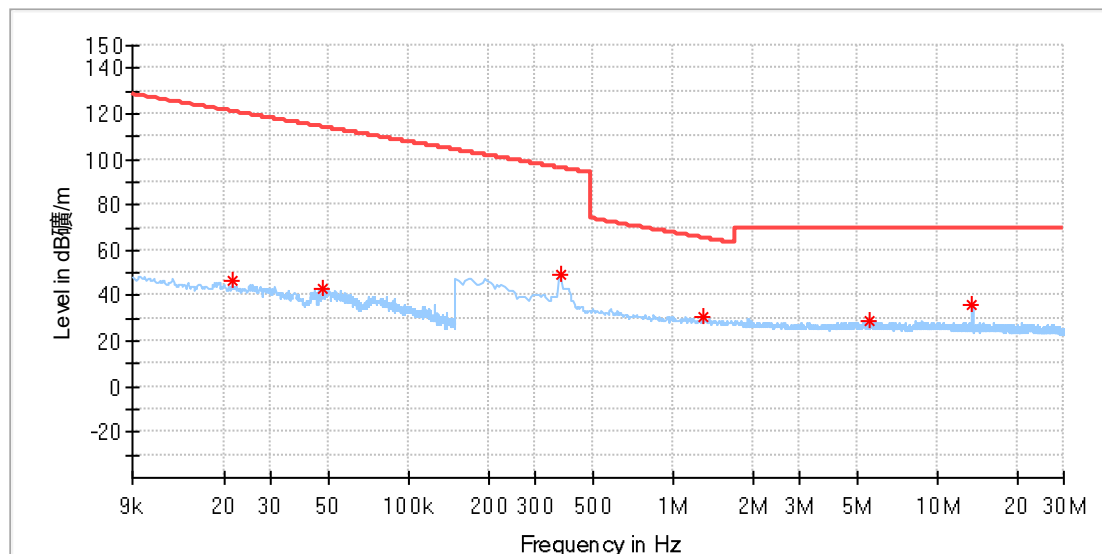

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.021589	46.55	120.90	74.35	100.0	X	137.0	19.9
0.047171	43.21	114.12	70.91	100.0	X	137.0	19.9
0.373875	49.03	96.15	47.12	100.0	X	120.0	19.9
1.308882	31.13	65.29	34.16	100.0	X	116.0	19.9
5.518610	28.65	69.50	40.85	100.0	X	199.0	20.1
13.560552	35.69	69.50	33.81	100.0	X	0.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Cricut stickerpix print
Model: CPPT401
Test Mode: NFC
Order No/Sample No: A004271413-004
Test Voltage: AC 120V, 60Hz
Remark: Temp 23.8°C Humi:57%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

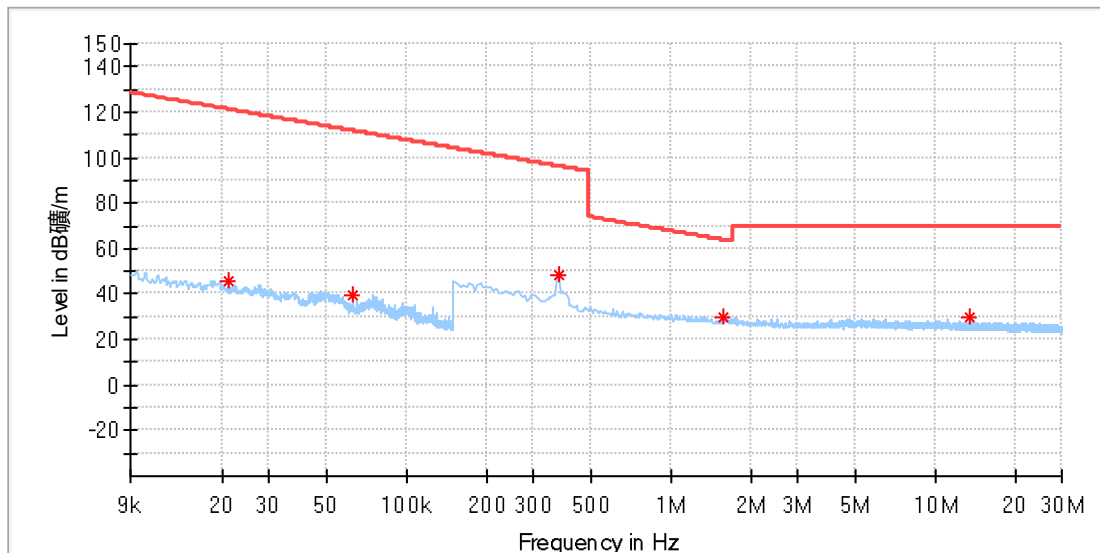

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.021186	45.55	121.07	75.52	100.0	Y	82.0	19.9
0.062479	39.86	111.68	71.82	100.0	Y	79.0	19.9
0.373875	47.94	96.15	48.21	100.0	Y	70.0	19.9
1.567875	29.98	63.73	33.74	100.0	Y	99.0	20.0
13.560552	30.03	69.50	39.47	100.0	Y	257.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Cricut stickerpix print
Model: CPPT401
Test Mode: NFC
Order No/Sample No: A004271413-004
Test Voltage: AC 120V, 60Hz
Remark: Temp 23.8°C Humi:57%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

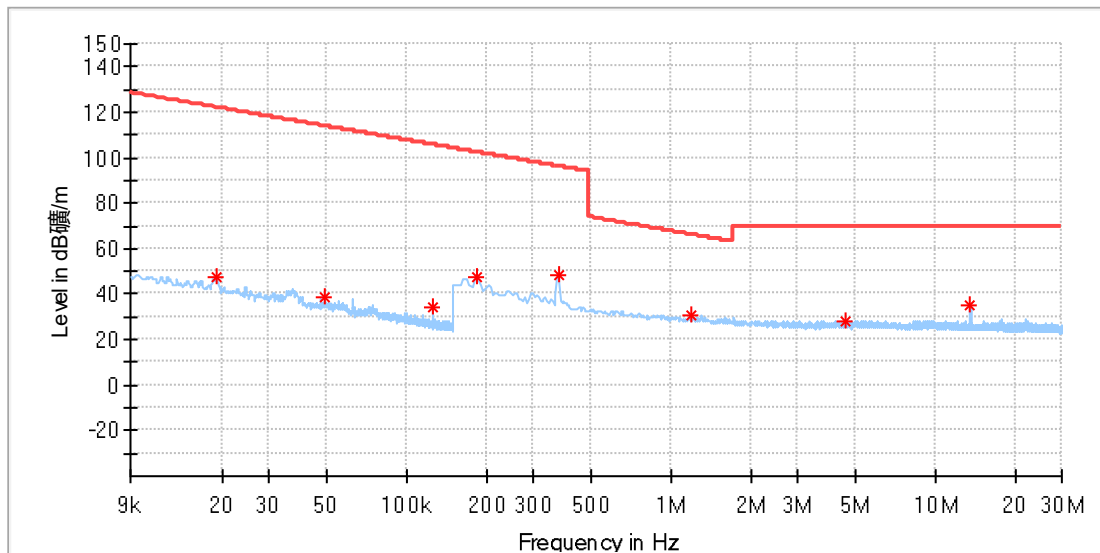

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019071	47.51	121.98	74.47	100.0	Z	200.0	19.9
0.048581	38.92	113.86	74.94	100.0	Z	171.0	19.9
0.125124	34.05	105.65	71.60	100.0	Z	241.0	19.9
0.185118	47.12	102.25	55.13	100.0	Z	126.0	19.8
0.373875	48.11	96.15	48.04	100.0	Z	280.0	19.9
1.181581	30.42	66.18	35.76	100.0	Z	306.0	19.9
4.522147	28.33	69.50	41.17	100.0	Z	158.0	20.1
13.560552	35.10	69.50	34.40	100.0	Z	324.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: Cricut stickerpix print
Model: CPPT401
Test Mode: NFC
Order No/Sample No: A004271413-004
Test Voltage: AC 120V, 60Hz
Remark: Temp 23.8°C Humi:57%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

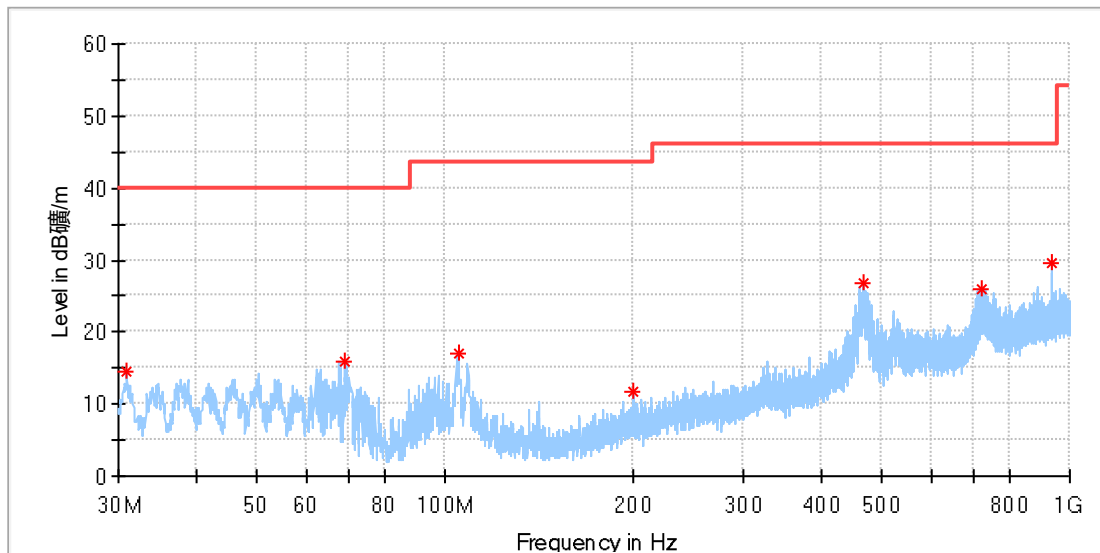

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.916111	14.42	40.00	25.58	100.0	H	0.0	-22.9
68.961667	15.97	40.00	24.03	100.0	H	68.0	-21.6
104.959444	16.93	43.50	26.57	100.0	H	293.0	-18.9
200.019444	11.60	43.50	31.90	100.0	H	20.0	-19.1
467.470000	26.86	46.00	19.14	100.0	H	20.0	-12.4
723.927222	26.09	46.00	19.91	100.0	H	353.0	-7.5
936.950000	29.70	46.00	16.30	100.0	H	100.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: Cricut stickerpix print
Model: CPPT401
Test Mode: NFC
Order No/Sample No: A004271413-004
Test Voltage: AC 120V, 60Hz
Remark: Temp 23.8°C Humi:57%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

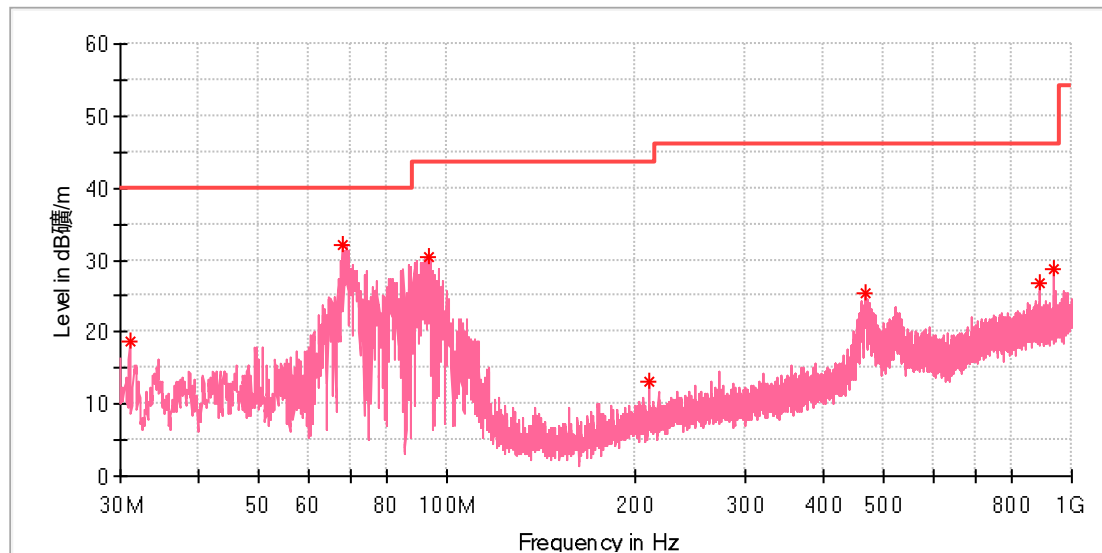

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
31.023889	18.56	40.00	21.44	100.0	V	259.0	-22.9
67.883889	32.11	40.00	7.89	100.0	V	102.0	-21.2
93.804444	30.53	43.50	12.97	100.0	V	102.0	-20.1
211.282222	13.05	43.50	30.45	100.0	V	1.0	-18.8
468.871111	25.53	46.00	20.47	100.0	V	126.0	-12.4
890.928889	26.85	46.00	19.15	100.0	V	210.0	-4.9
936.950000	28.63	46.00	17.37	100.0	V	226.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Standby

EUT Information

EUT Name:	Cricut stickerpix print
Model:	CPPT401
Test Mode:	NFC
Order No/Sample No:	A004271413-004
Test Voltage:	AC 120V, 60Hz
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

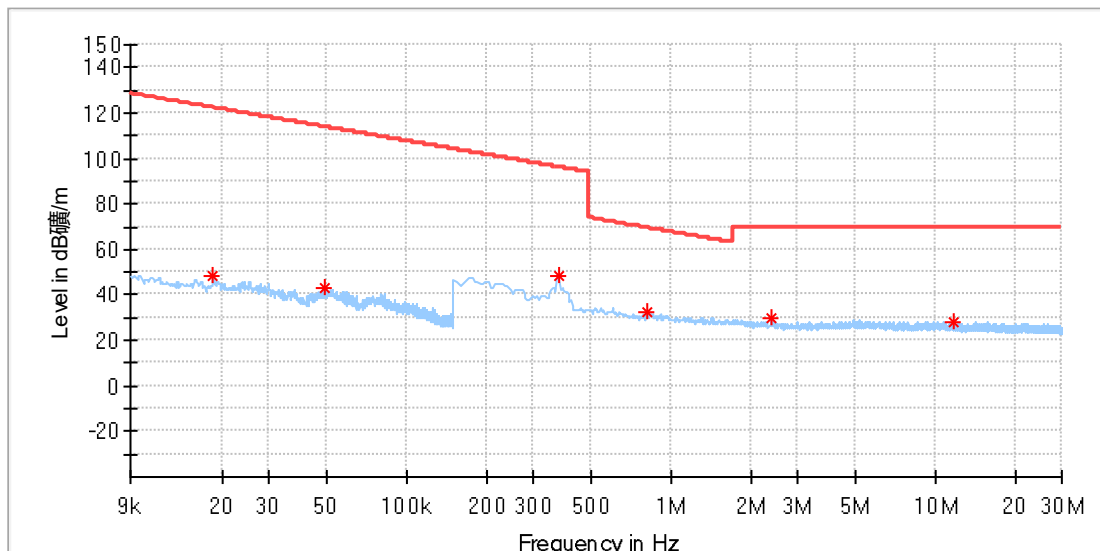

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018467	48.60	122.26	73.66	100.0	X	177.0	19.9
0.048782	43.11	113.83	70.72	100.0	X	165.0	19.9
0.373875	48.27	96.15	47.88	100.0	X	0.0	19.9
0.812846	32.48	69.42	36.93	100.0	X	188.0	19.9
2.379971	29.39	69.50	40.11	100.0	X	177.0	20.0
11.686147	28.26	69.50	41.24	100.0	X	19.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Cricut stickerpix print
Model: CPPT401
Test Mode: NFC
Order No/Sample No: A004271413-004
Test Voltage: AC 120V, 60Hz
Remark: Temp 23.8°C Humi:57%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

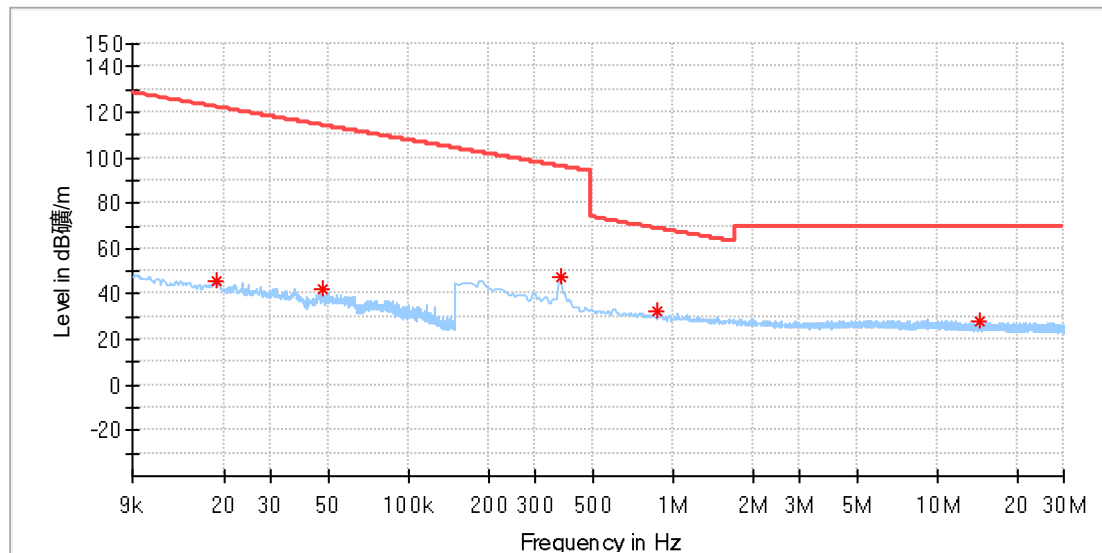

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018870	46.07	122.07	76.00	100.0	Y	247.0	19.9
0.047372	42.22	114.08	71.86	100.0	Y	88.0	19.9
0.373875	47.44	96.15	48.71	100.0	Y	165.0	19.9
0.874302	32.16	68.79	36.63	100.0	Y	335.0	19.9
14.508728	27.95	69.50	41.55	100.0	Y	83.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Cricut stickerpix print
Model: CPPT401
Test Mode: NFC
Order No/Sample No: A004271413-004
Test Voltage: AC 120V, 60Hz
Remark: Temp 23.8°C Humi:57%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

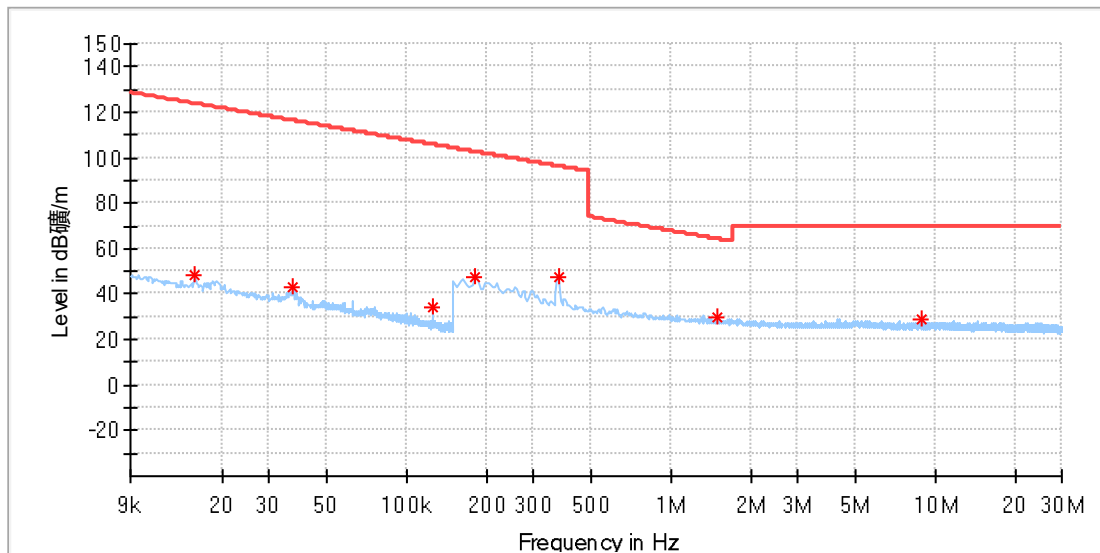

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.015748	48.34	123.64	75.30	100.0	Z	334.0	19.9
0.037099	43.39	116.20	72.82	100.0	Z	189.0	19.9
0.125023	34.30	105.66	71.36	100.0	Z	234.0	19.9
0.180728	47.64	102.46	54.82	100.0	Z	77.0	19.8
0.373875	47.72	96.15	48.43	100.0	Z	181.0	19.9
1.502030	29.91	64.10	34.18	100.0	Z	353.0	20.0
8.832838	28.82	69.50	40.68	100.0	Z	213.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Cricut stickerpix print
Model: CPPT401
Test Mode: NFC
Order No/Sample No: A004271413-004
Test Voltage: AC 120V, 60Hz
Remark: Temp 23.8°C Humi:57%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

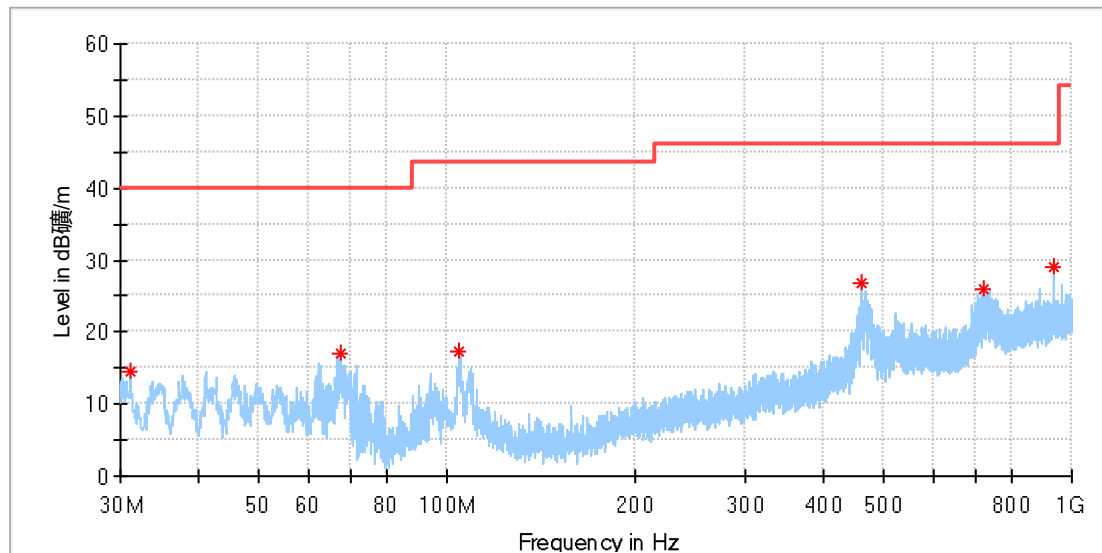

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
31.131667	14.51	40.00	25.49	100.0	H	0.0	-22.9
67.452778	17.09	40.00	22.91	100.0	H	50.0	-21.1
104.743889	17.24	43.50	26.26	100.0	H	304.0	-18.9
460.248889	26.88	46.00	19.12	100.0	H	352.0	-12.6
722.795556	25.83	46.00	20.17	100.0	H	5.0	-7.5
936.950000	28.90	46.00	17.10	100.0	H	170.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Cricut stickerpix print
Model: CPPT401
Test Mode: NFC
Order No/Sample No: A004271413-004
Test Voltage: AC 120V, 60Hz
Remark: Temp 23.8°C Humi:57%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

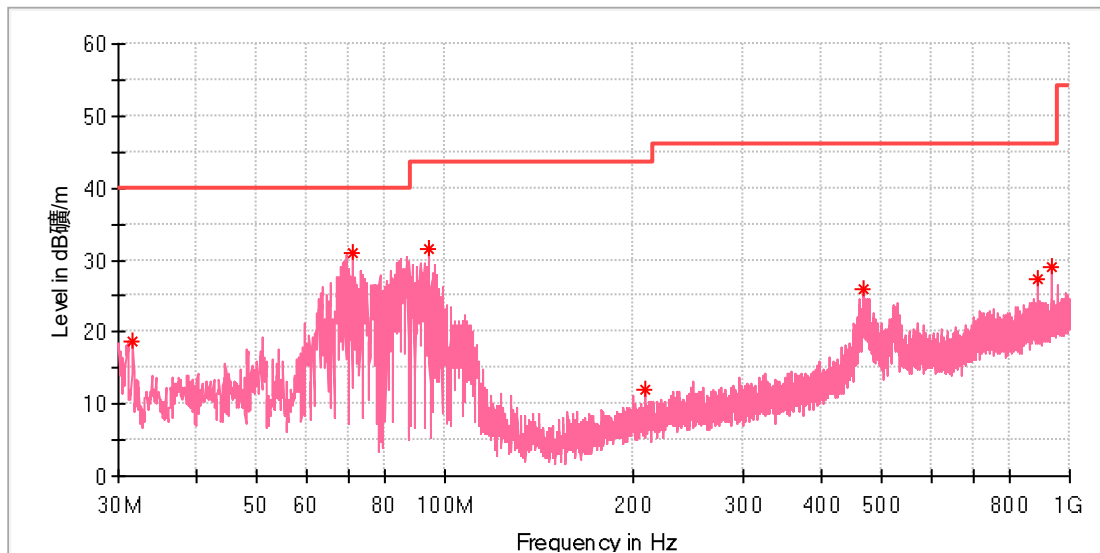

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
31.616667	18.57	40.00	21.43	100.0	V	250.0	-22.8
71.171111	31.10	40.00	8.90	100.0	V	290.0	-22.3
94.343333	31.43	43.50	12.07	100.0	V	0.0	-20.0
209.126667	12.04	43.50	31.46	100.0	V	0.0	-18.9
467.901111	25.87	46.00	20.13	100.0	V	117.0	-12.4
891.036667	27.44	46.00	18.56	100.0	V	11.0	-4.9
936.950000	28.90	46.00	17.10	100.0	V	290.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

