

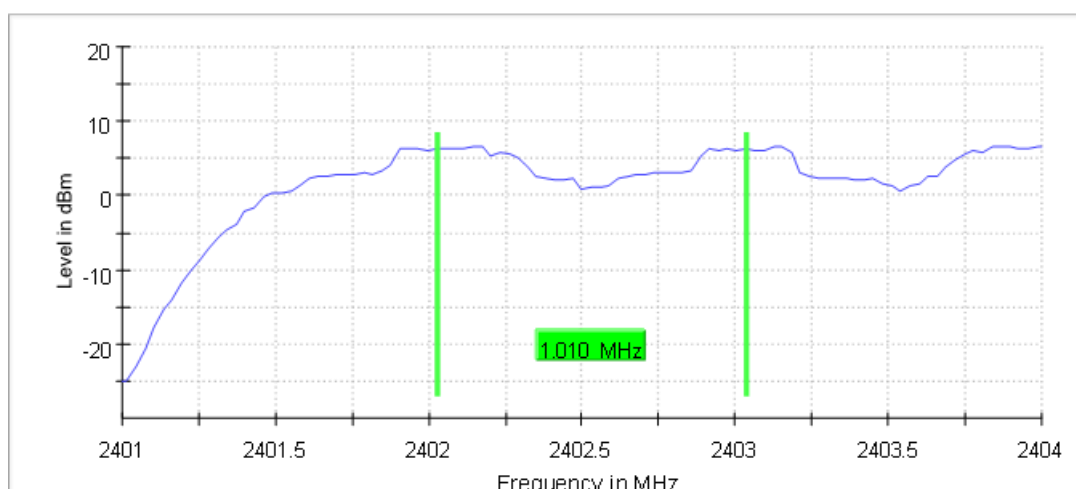
Carrier Frequency Separation (3-DH5, 2402 MHz)

DUT Frequency (MHz)	Frequency Separation (MHz)	Limit Min (MHz)	Limit Max (MHz)	Center Frequency low Channel (MHz)	Center Frequency high Channel (MHz)
2402.000000	1.009901	0.833333	---	2402.024752	2403.034653

(continuation of the "Result" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

CFS



Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40400 GHz	2.40400 GHz
Span	3.000 MHz	3.000 MHz
RBW	300.000 kHz	<= 300.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	101	~ 10
Sweeptime	1.000 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	40 / max. 150	max. 150
Stable	10 / 10	10
Max Stable Difference	0.22 dB	0.50 dB

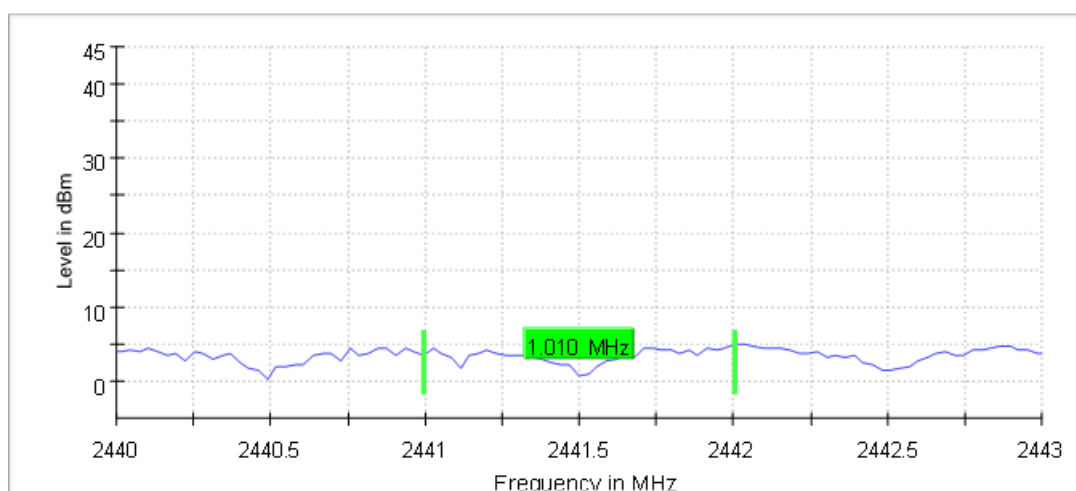
Carrier Frequency Separation (3-DH5, 2441 MHz)

DUT Frequency (MHz)	Frequency Separation (MHz)	Limit Min (MHz)	Limit Max (MHz)	Center Frequency low Channel (MHz)	Center Frequency high Channel (MHz)
2441.000000	1.009900	0.833333	---	2440.995050	2442.004950

(continuation of the "Result" table from column 6 ...)

DUT Frequency (MHz)	Result
2441.000000	PASS

CFS



Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.44000 GHz	2.44000 GHz
Stop Frequency	2.44300 GHz	2.44300 GHz
Span	3.000 MHz	3.000 MHz
RBW	300.000 kHz	<= 300.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	101	~ 10
Sweptime	1.000 ms	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	10 / 10	10
Max Stable Difference	0.00 dB	0.50 dB

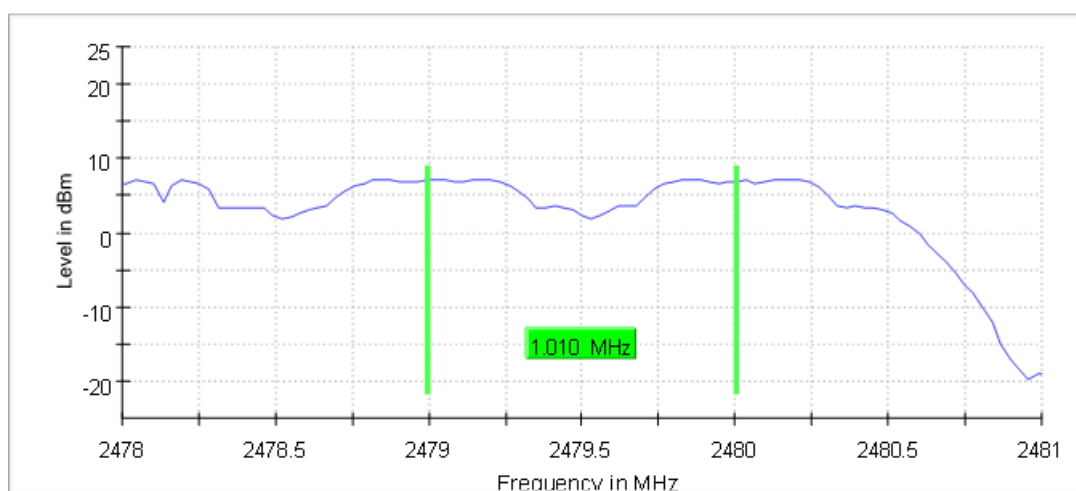
Carrier Frequency Separation (3-DH5, 2480 MHz)

DUT Frequency (MHz)	Frequency Separation (MHz)	Limit Min (MHz)	Limit Max (MHz)	Center Frequency low Channel (MHz)	Center Frequency high Channel (MHz)
2480.000000	1.009900	0.833333	---	2478.995050	2480.004950

(continuation of the "Result" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

CFS



Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47800 GHz	2.47800 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	3.000 MHz	3.000 MHz
RBW	300.000 kHz	<= 300.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	101	~ 10
Sweptime	1.000 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	2.47800 GHz	2.47800 GHz
Trace Mode	2.48100 GHz	2.48100 GHz
Sweeptype	3.000 MHz	3.000 MHz
Preamp	300.000 kHz	<= 300.000 kHz
Stablemode	300.000 kHz	>= 300.000 kHz
Stablevalue	101	~ 10
Run	1.000 ms	AUTO
Stable	0.000 dBm	0.000 dBm
Max Stable Difference	20.000 dB	AUTO

5.1.5 Number of Hopping Frequency

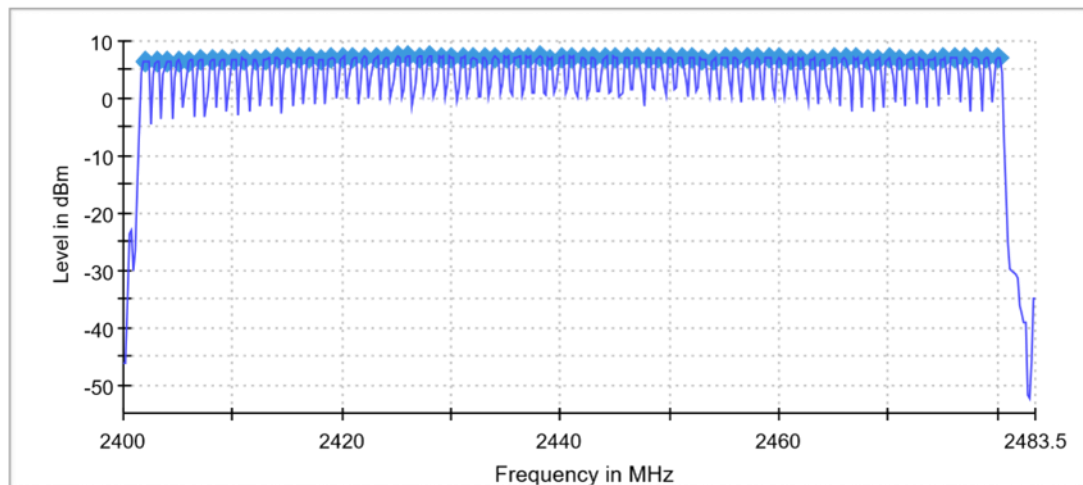
RESULT:**Pass**

Date of testing	:	2026-03-11
Ambient temperature	:	20.4°C
Relative humidity	:	38.2%
Atmospheric pressure	:	101kPa
Test requirement	:	FCC 15.247(a)(1)(iii) RSS-247 Issue 4, July 24, 2025, Clause 6.2.3.1(b)
Test procedure	:	ANSI C63.10:2020 ANSI C63.10-2020+Cor. 1-2023+C63.10a- 2024+Errata to C63.10a-2024
Test voltage	:	AC 120V, 60Hz
Test modes applied	:	A

Hopping Frequencies (1-DH5)

Channels	Limit Min	Limit Max	Result
79	15	---	PASS

Sequence



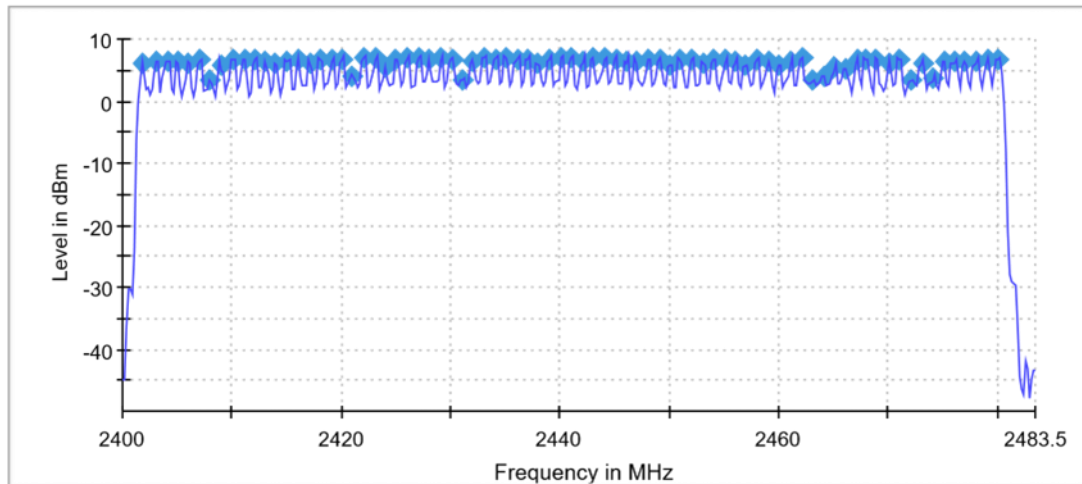
Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	200.000 kHz	<= 299.000 kHz
VBW	200.000 kHz	>= 200.000 kHz
SweepPoints	418	~ 418
SweepTime	1.060 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	91 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.38 dB	0.50 dB

Hopping Frequencies (2-DH5)

Channels	Limit Min	Limit Max	Result
79	15	---	PASS

Sequence



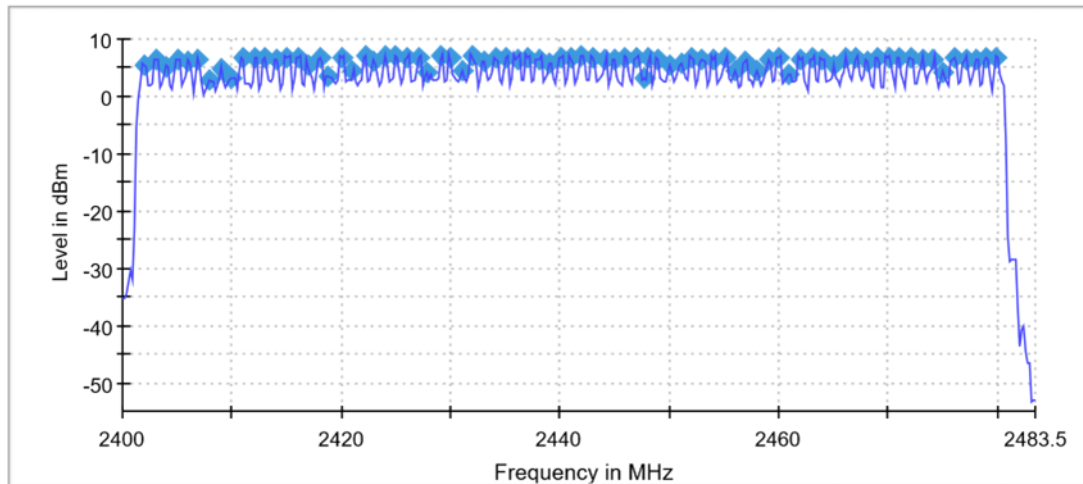
Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	200.000 kHz	<= 299.000 kHz
VBW	200.000 kHz	>= 200.000 kHz
SweepPoints	418	~ 418
Sweptime	1.060 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	130 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Hopping Frequencies (3-DH5)

Channels	Limit Min	Limit Max	Result
80	15	---	PASS

Sequence



Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	200.000 kHz	<= 299.000 kHz
VBW	200.000 kHz	>= 200.000 kHz
SweepPoints	418	~ 418
SweepTime	1.060 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	124 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

5.1.6 Time of Occupancy

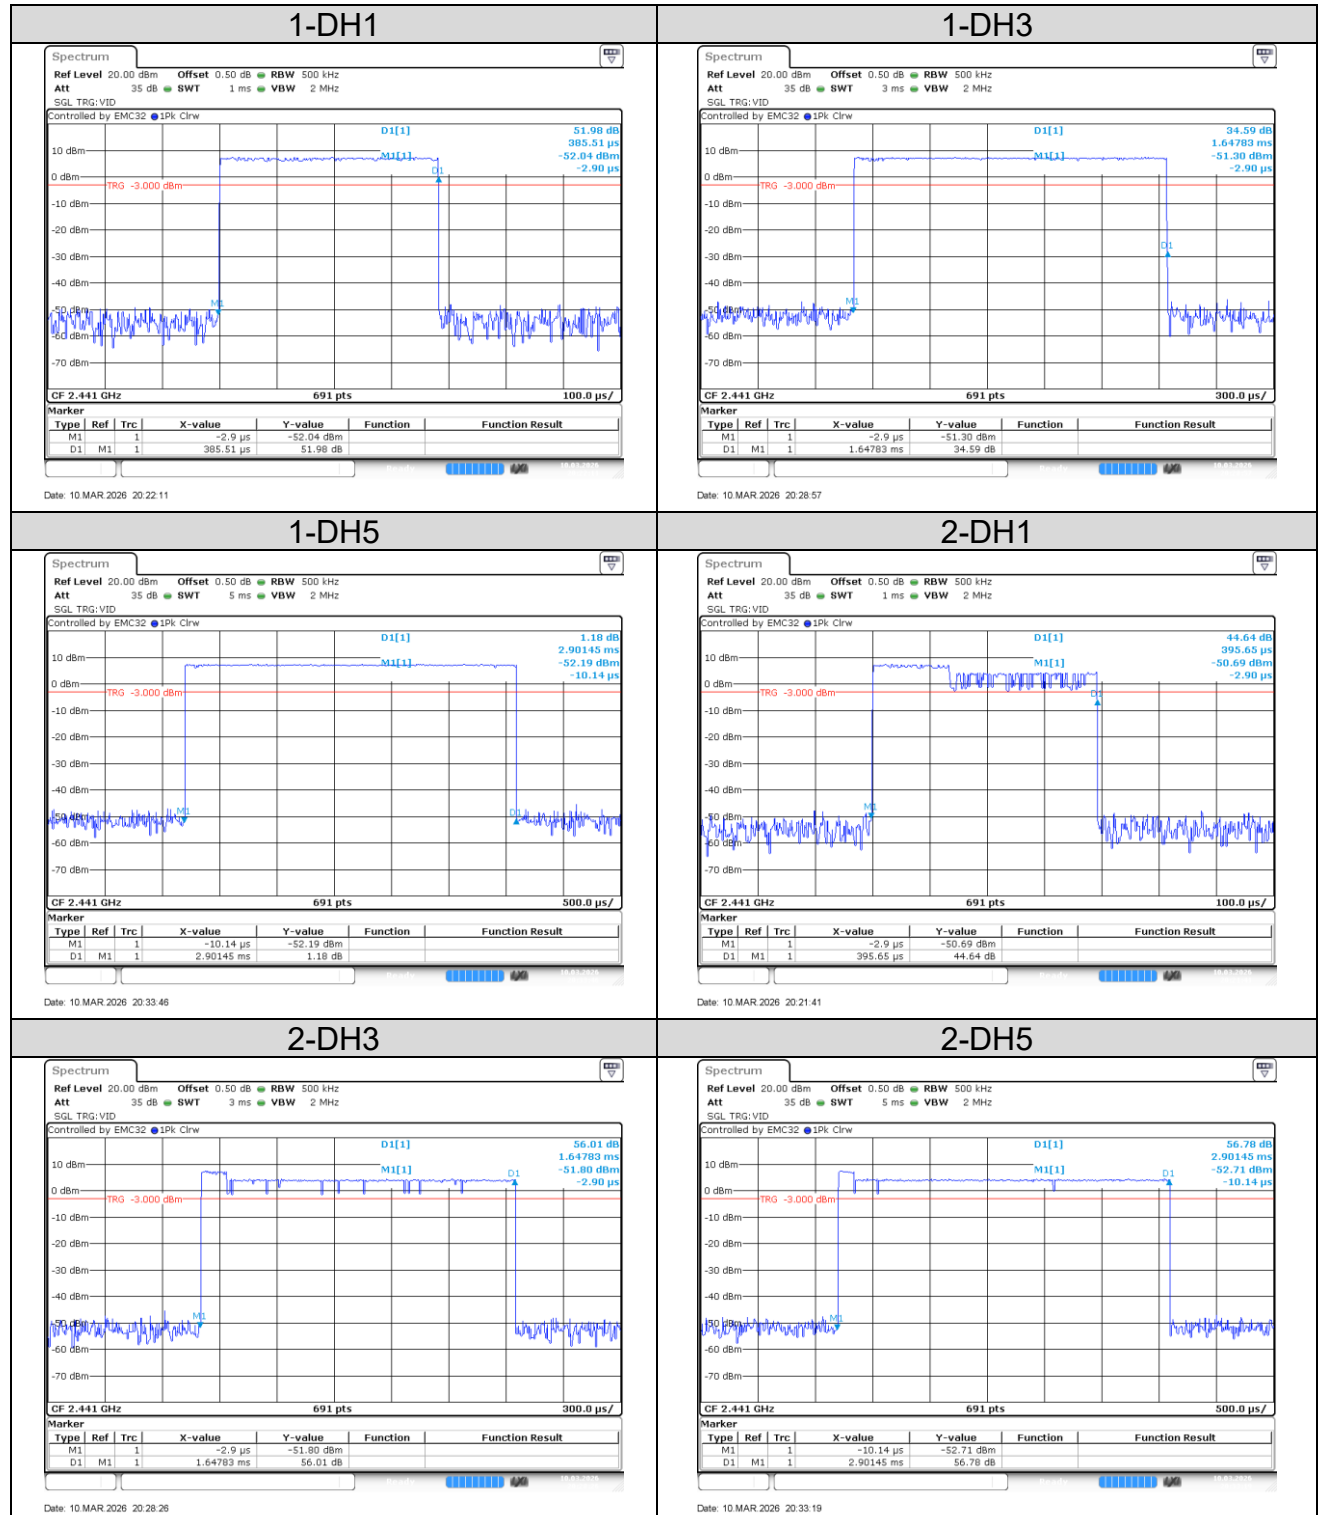
RESULT:

Pass

Date of testing	:	2026-03-10
Ambient temperature	:	20.8°C
Relative humidity	:	38.6%
Atmospheric pressure	:	101kPa
Test requirement	:	FCC 15.247(a)(1)(iii) RSS-247 Issue 4, July 24, 2025, Clause 6.2.3.1(b)
Test procedure	:	ANSI C63.10:2020 ANSI C63.10-2020+Cor. 1-2023+C63.10a- 2024+Errata to C63.10a-2024
Test voltage	:	AC 120V, 60Hz
Test modes applied	:	A

Table 10: Time of Occupancy

Mode	Frequency [MHz]	Dwell Time [ms]	Number of Hops	Time of Occupancy [ms]	Limit [ms]
1-DH1	2441	0.386	107	41.302	400
1-DH3	2441	1.648	64	105.472	400
1-DH5	2441	2.901	49	142.149	400
2-DH1	2441	0.396	113	44.748	400
2-DH3	2441	1.648	89	146.672	400
2-DH5	2441	2.901	48	139.248	400
3-DH1	2441	0.396	113	44.748	400
3-DH3	2441	1.648	69	113.712	400
3-DH5	2441	2.901	52	150.852	400

Figure 1: Dwell Time



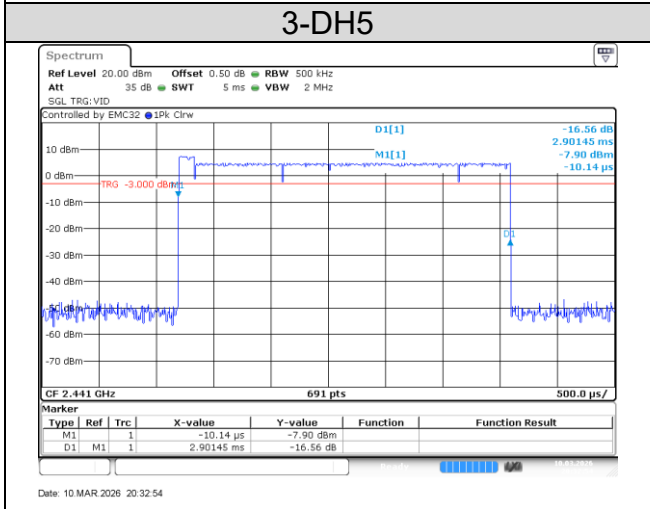
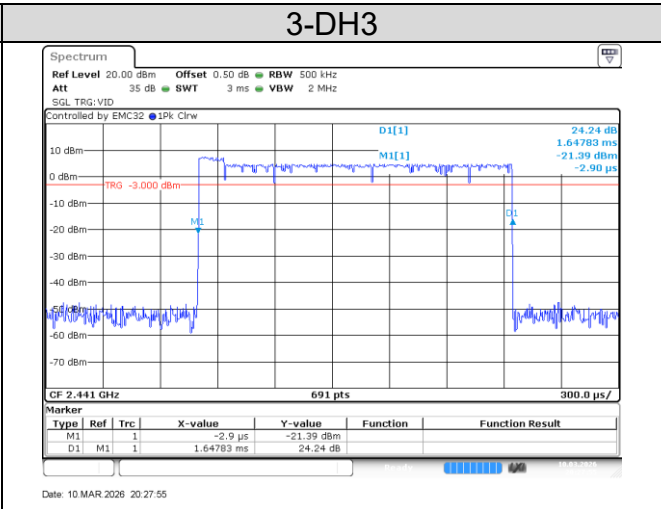
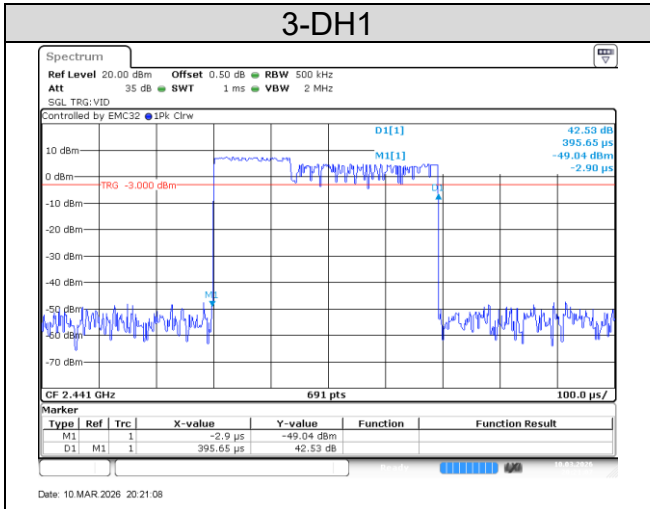
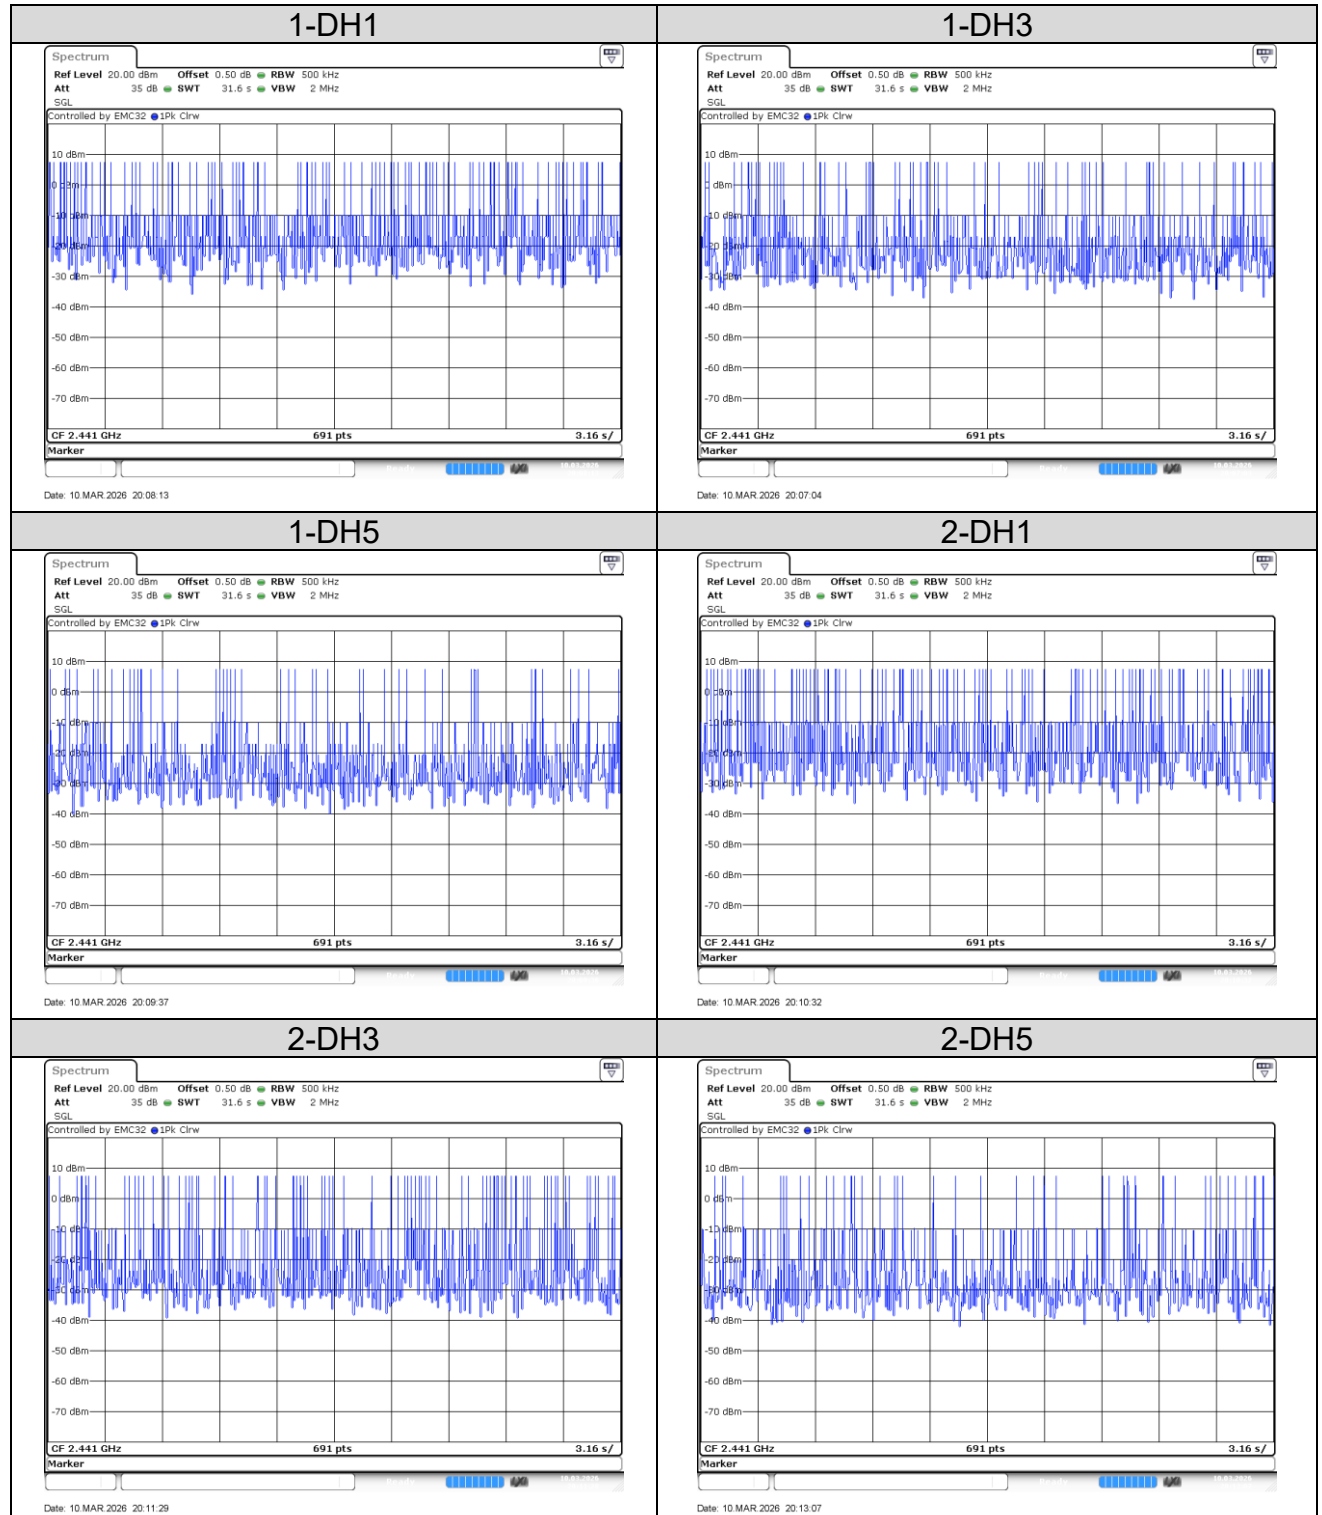
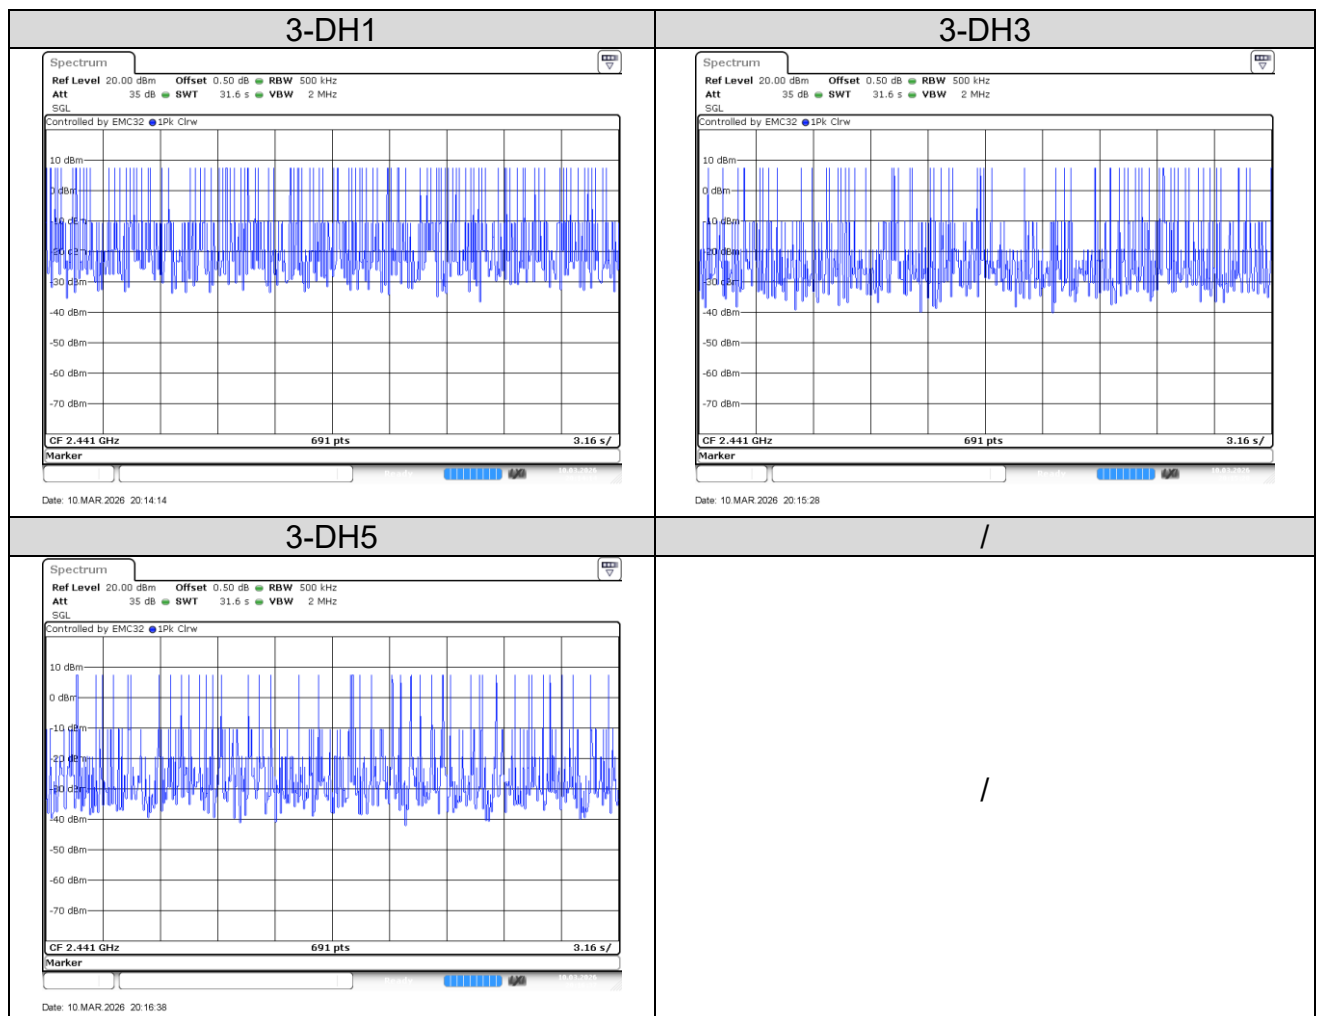


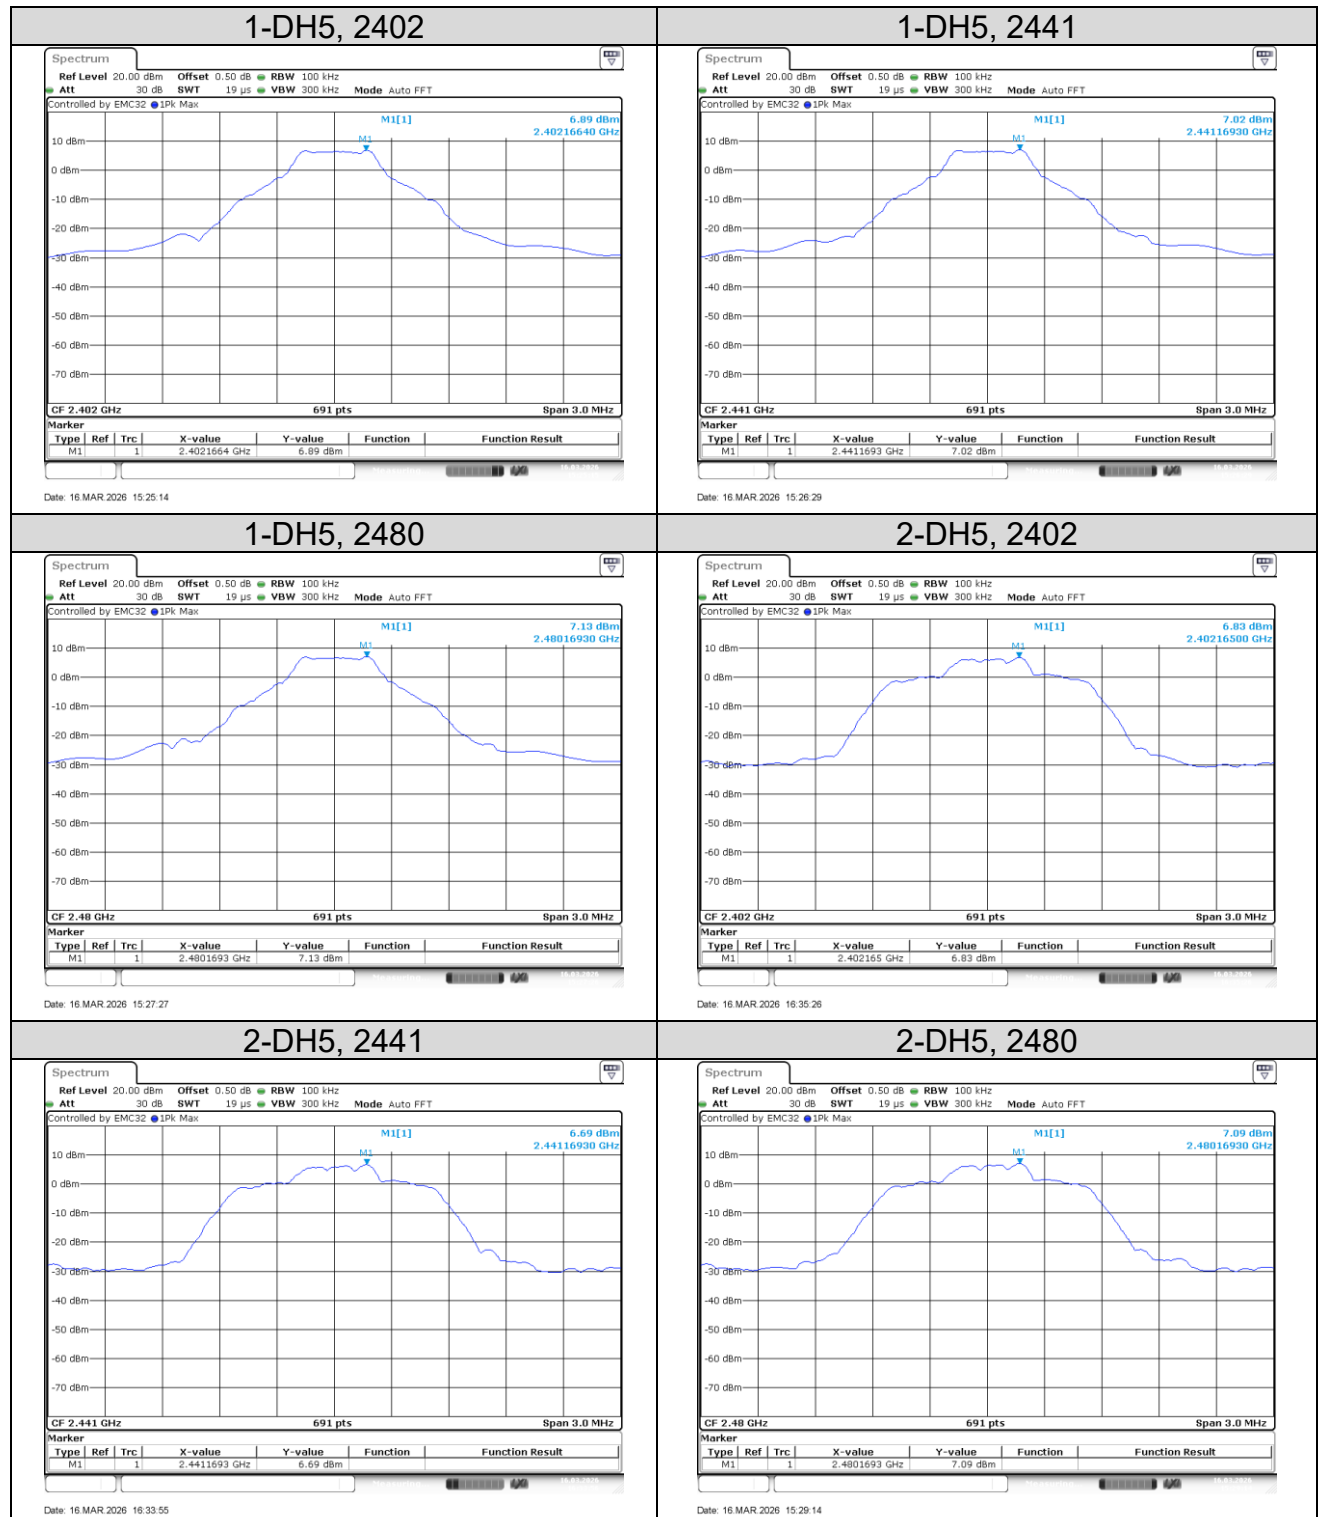
Figure 2: Number of Hops


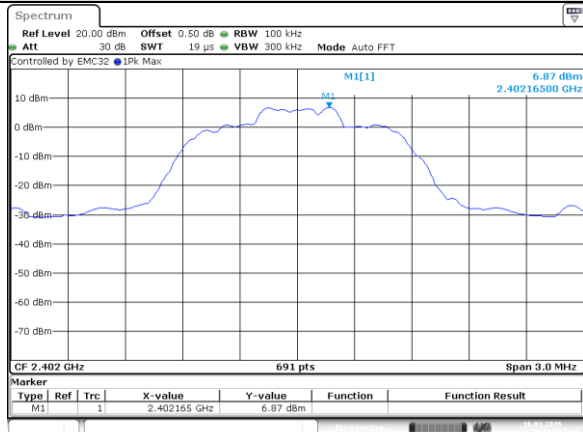


5.1.7 Conducted Band Edge and out-of Band Emissions

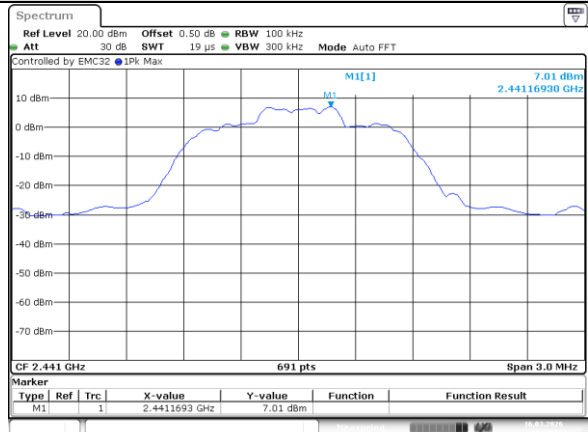
RESULT:**Pass**

Date of testing : 2026-03-10 ~ 2026-03-16
Ambient temperature : 20.5°C
Relative humidity : 38.3%
Atmospheric pressure : 101kPa
Test requirement : FCC Part 15.247(d)
RSS-247 Issue 4, July 24, 2025, Clause 6.6
Test procedure : ANSI C63.10:2020
ANSI C63.10-2020+Cor. 1-2023+C63.10a-
2024+Errata to C63.10a-2024
Test voltage : AC 120V, 60Hz
Test modes applied : A

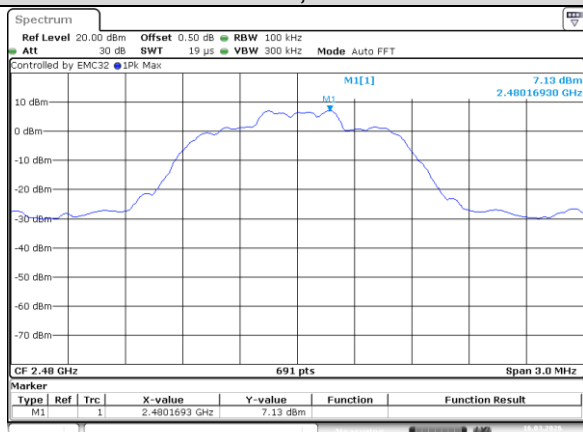
Figure 3: Reference Level


3-DH5, 2402


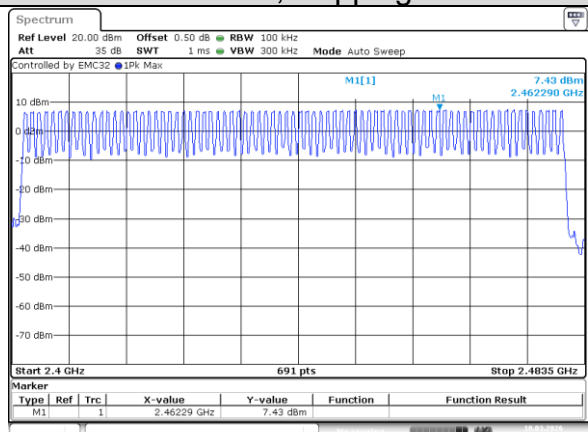
Date: 16 MAR 2026 16:41:37

3-DH5, 2441


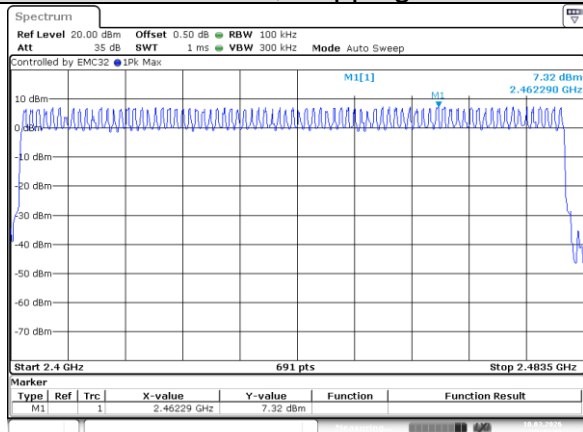
Date: 16 MAR 2026 16:43:51

3-DH5, 2480


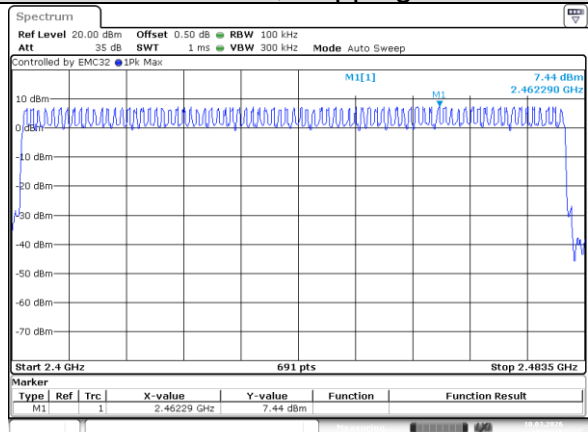
Date: 16 MAR 2026 16:45:45

1-DH5, Hopping


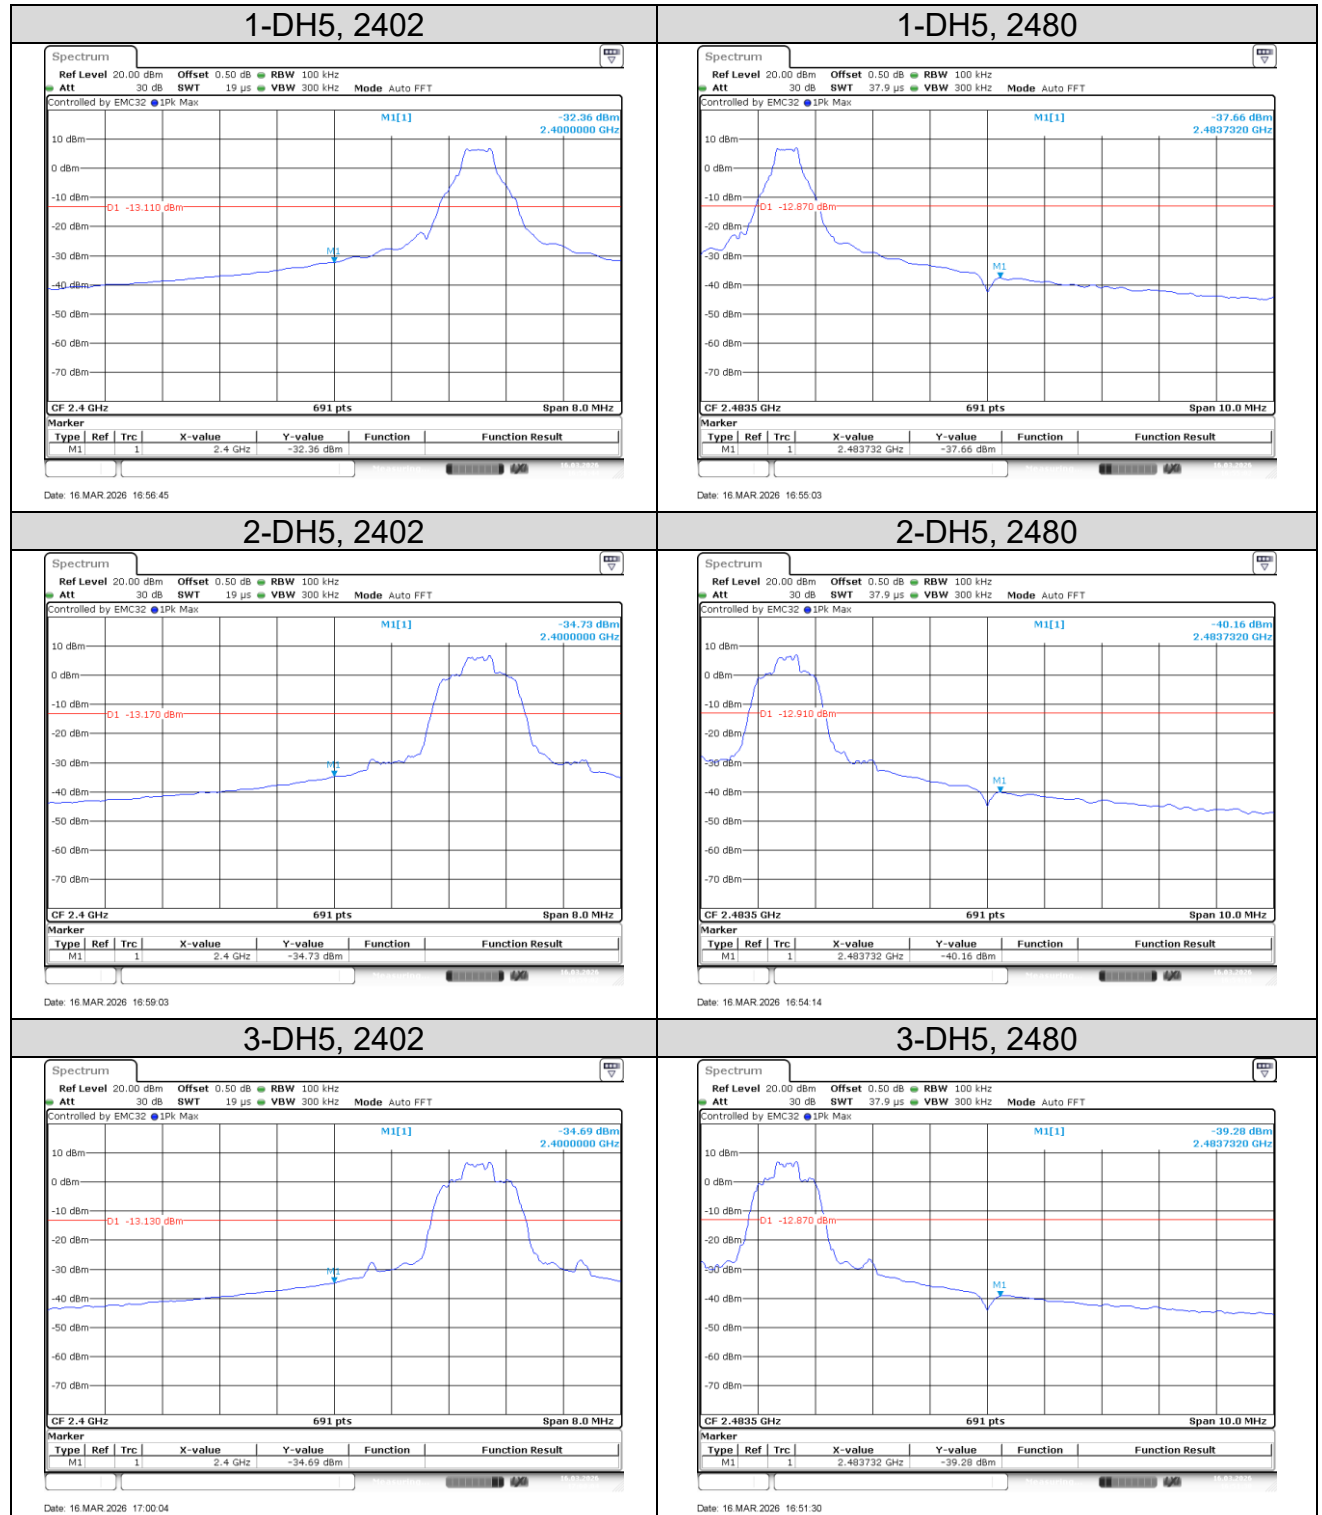
Date: 10 MAR 2026 20:43:05

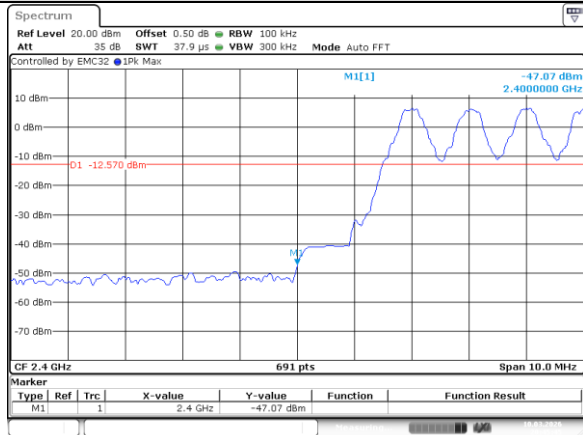
2-DH5, Hopping


Date: 10 MAR 2026 20:40:08

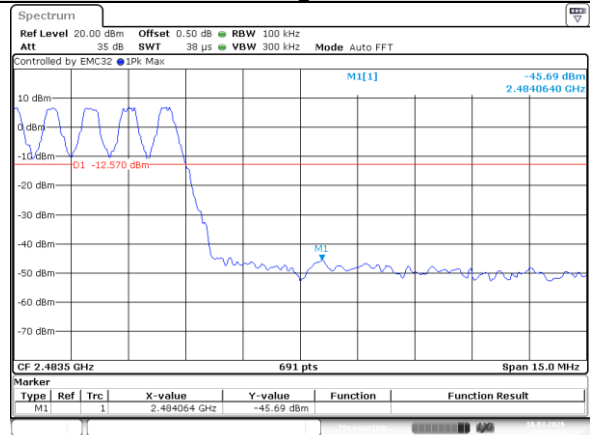
3-DH5, Hopping


Date: 10 MAR 2026 20:38:16

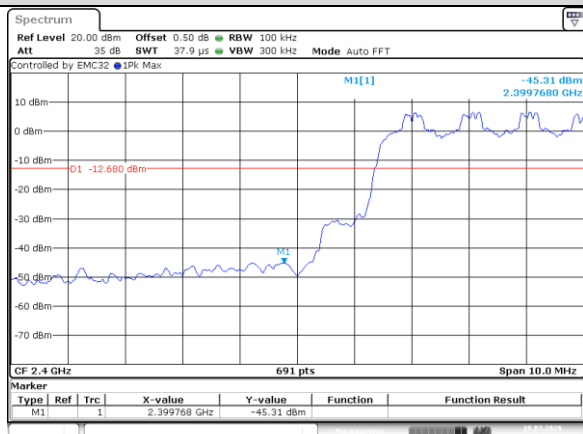
Figure 4: Conducted Band Edge


1-DH5, lower band


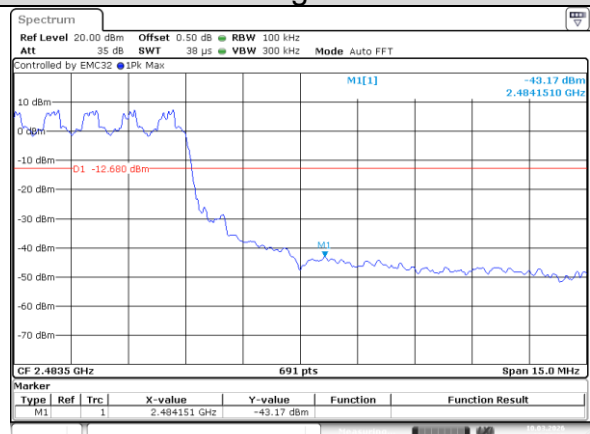
Date: 10 MAR 2026 20:45:45

1-DH5, higher band


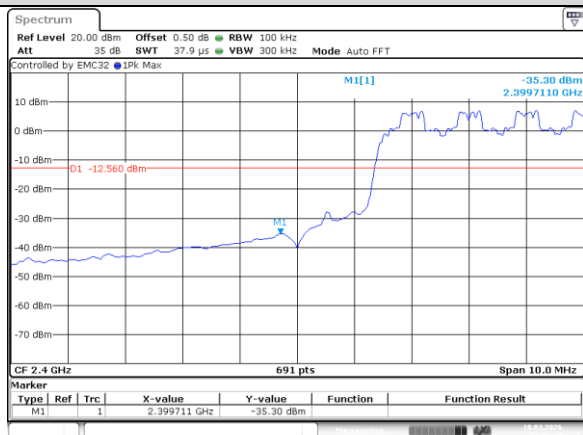
Date: 10 MAR 2026 20:44:34

2-DH5 lower band


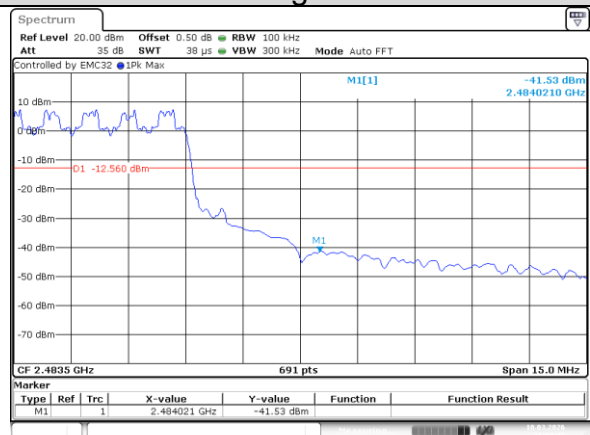
Date: 10 MAR 2026 20:53:21

2-DH5 higher band


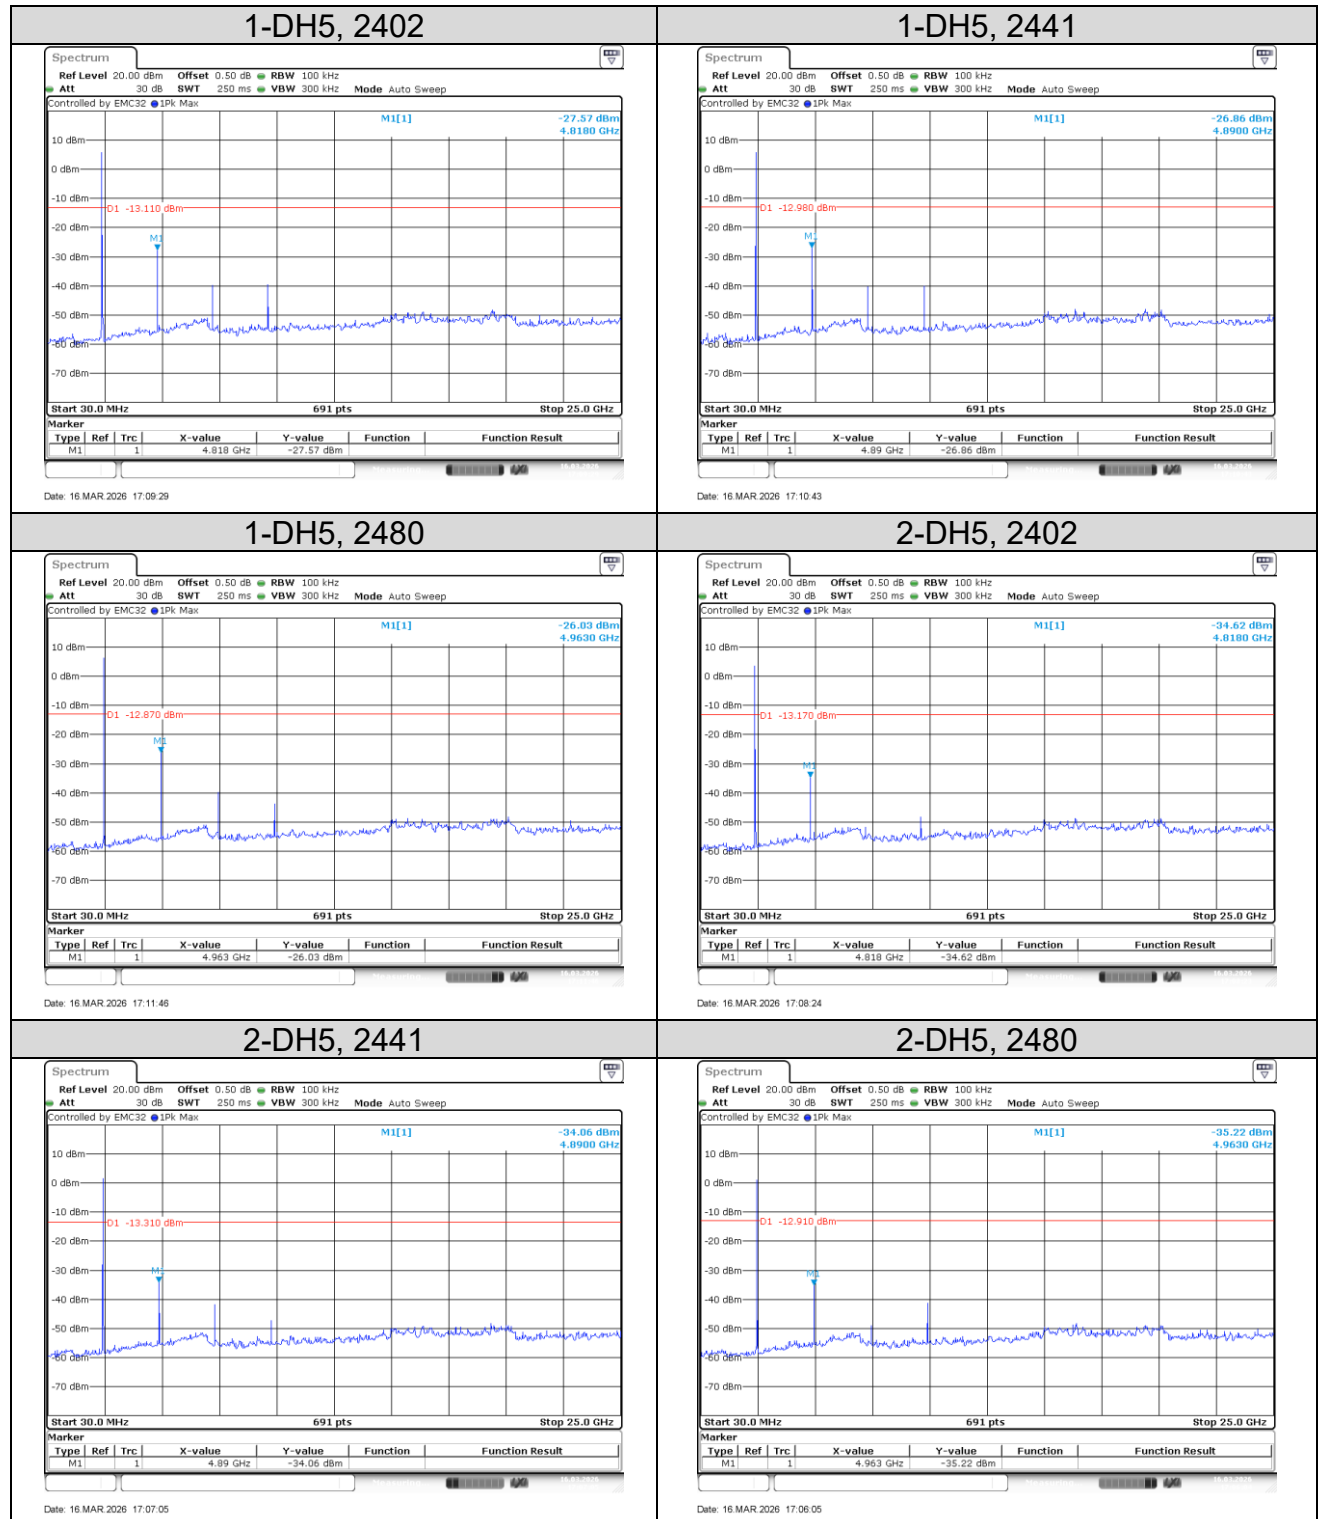
Date: 10 MAR 2026 20:58:05

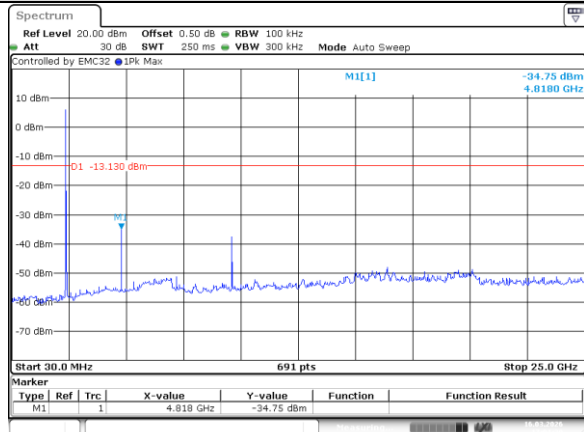
3-DH5 lower band


Date: 10 MAR 2026 21:06:30

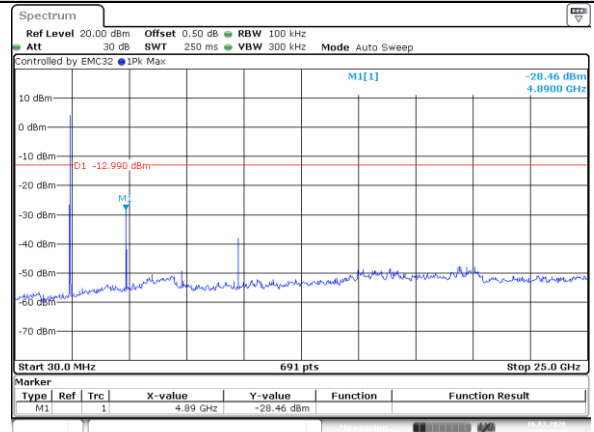
3-DH5 higher band


Date: 10 MAR 2026 21:04:45

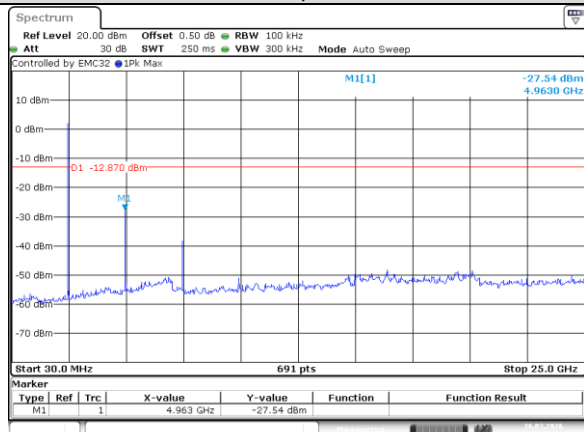
Figure 5: Conducted Spurious Emission


3-DH5, 2402


Date: 16 MAR 2026 17:01:30

3-DH5, 2441


Date: 16 MAR 2026 17:03:26

3-DH5, 2480


Date: 16 MAR 2026 17:04:25

/

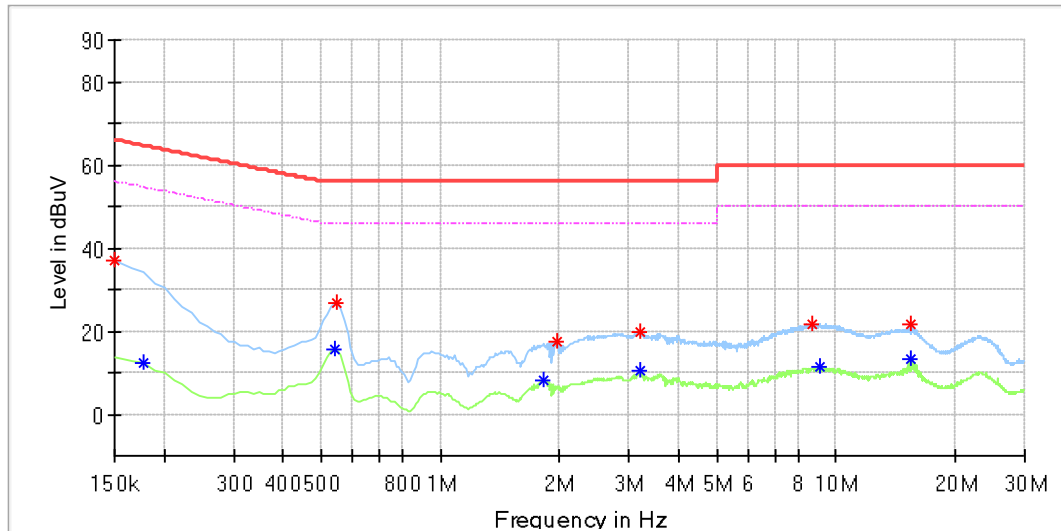
/

5.2 Emission in the Frequency Range up to 30MHz

5.2.1 Conducted Emission

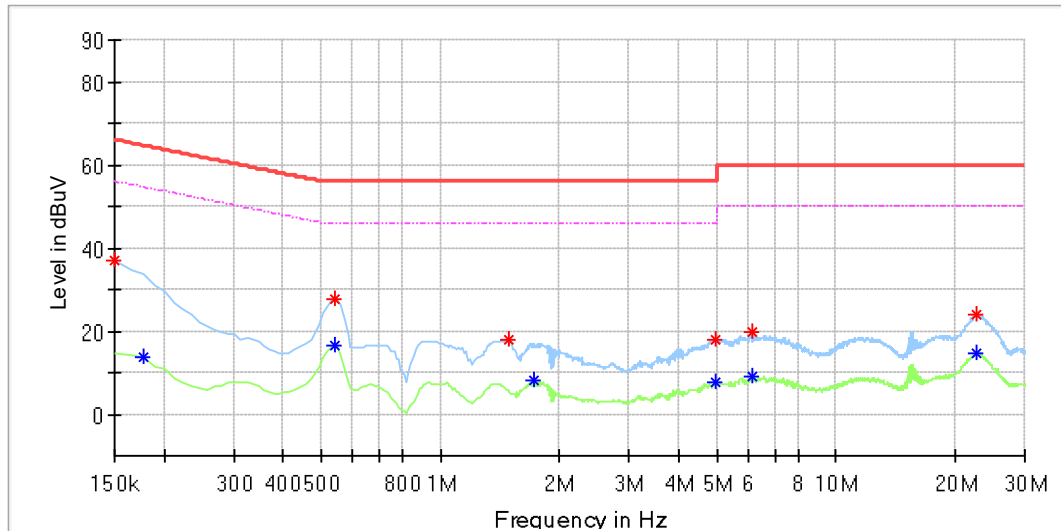
RESULT:**Pass**

Date of testing	: 2026-03-15
Ambient temperature	: 21.3°C
Relative humidity	: 45.3%
Atmospheric pressure	: 101kPa
Test requirement	: FCC Part 15.207 (a) RSS-Gen Issue 5, Amendment 2, February 2021, Clause 8.8
Test procedure	: ANSI C63.10:2020 ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024
Test voltage	: AC 120V, 60Hz
Test modes applied	: B

Figure 6: Conducted Emission, L


Critical Freqs

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line
0.150000	36.98	---	66.00	29.02	L1
0.178125	---	12.34	54.57	42.23	L1
0.538125	---	15.57	46.00	30.43	L1
0.549375	26.67	---	56.00	29.33	L1
1.820625	---	8.11	46.00	37.89	L1
1.978125	17.49	---	56.00	38.51	L1
3.181875	---	10.29	46.00	35.71	L1
3.204375	19.81	---	56.00	36.19	L1
8.660625	21.48	---	60.00	38.52	L1
9.076875	---	11.40	50.00	38.60	L1
15.478125	21.43	---	60.00	38.57	L1
15.478125	---	13.37	50.00	36.63	L1

Figure 7: Conducted Emission, N

Critical Freqs

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line
0.150000	36.76	---	66.00	29.24	N
0.178125	---	13.64	54.57	40.94	N
0.538125	27.71	---	56.00	28.29	N
0.538125	---	16.45	46.00	29.55	N
1.483125	17.82	---	56.00	38.18	N
1.730625	---	8.27	46.00	37.73	N
4.959375	17.99	---	56.00	38.01	N
4.981875	---	7.65	46.00	38.35	N
6.163125	19.54	---	60.00	40.46	N
6.163125	---	9.20	50.00	40.80	N
22.734375	---	14.71	50.00	35.29	N
22.756875	23.79	---	60.00	36.21	N

5.3 Emission in the Frequency Range above 30MHz

5.3.1 Radiated Band-Edge

RESULT:**Pass**

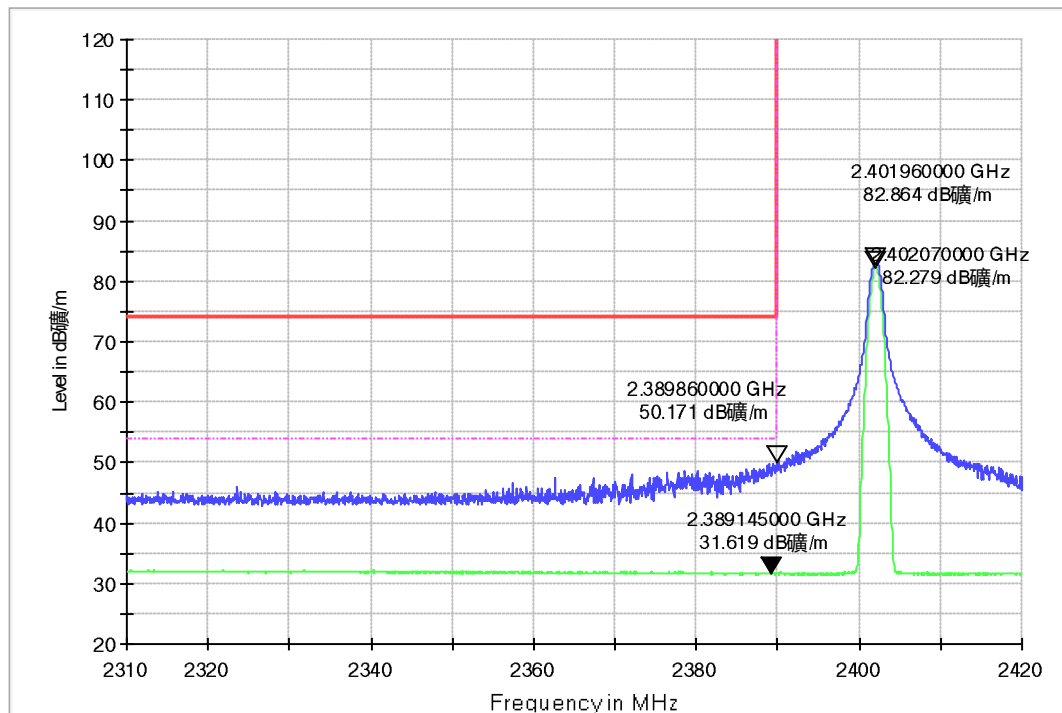
Date of testing	: 2026-03-15
Ambient temperature	: 21.4°C
Relative humidity	: 45.3%
Atmospheric pressure	: 101kPa
Test requirement	: FCC Part 15.247(d) FCC Part 15.205(a) FCC Part 15.209(a) RSS-Gen Issue 5, Amendment 2, February 2021, Clause 8.9 RSS-Gen Issue 5, Amendment 2, February 2021, Clause 8.10 RSS-247 Issue 4, July 24, 2025, Clause 6.6
Test procedure	: ANSI C63.10:2020 ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024
Test voltage	: AC 120V, 60Hz
Test modes applied	: A

Note:

All the test modes were applied, only the worst case were shown in this report.

Figure 8: Radiated Band-Edge, 1-DH5, 2402, H

XXY-2310~2410 BE 1-18GHz HL050 FSV40 Pre-10-YUNFANG


Figure 9: Radiated Band-Edge, 1-DH5, 2402, V

XXY-2310~2410 BE 1-18GHz HL050 FSV40 Pre-10-YUNFANG

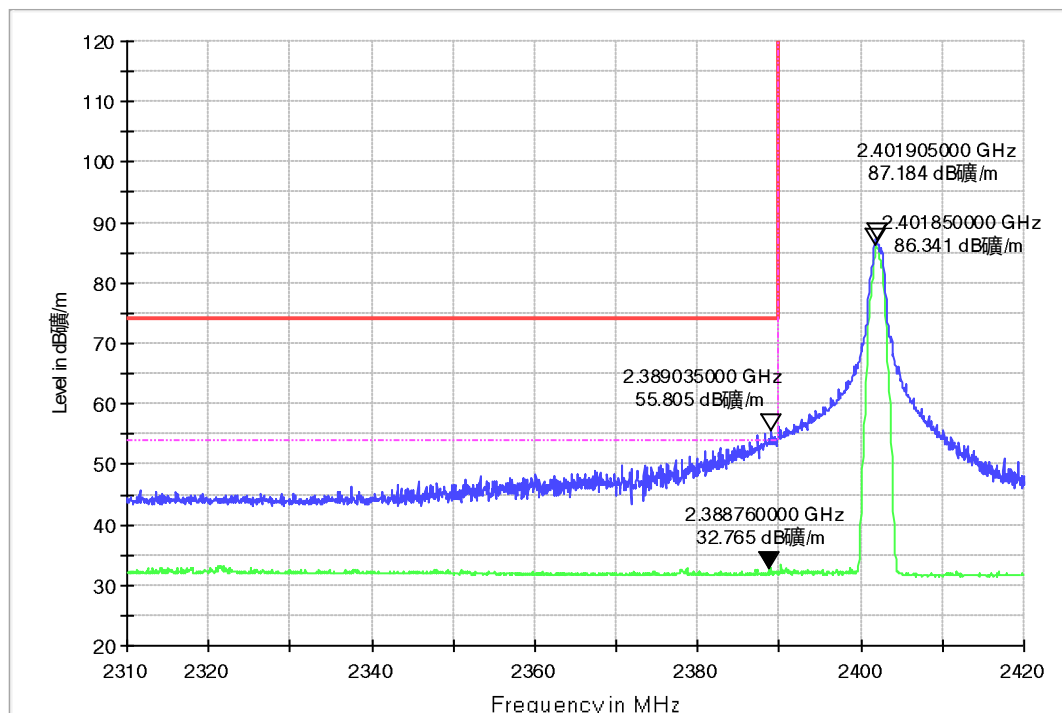
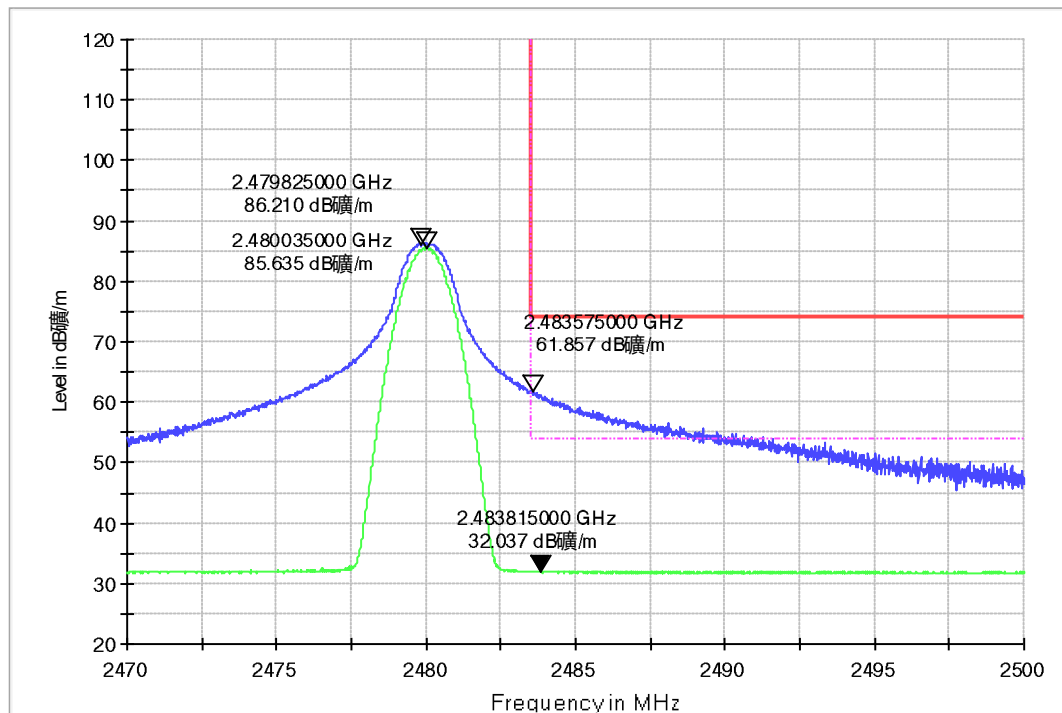


Figure 10: Radiated Band-Edge, 1-DH5, 2480, H

XXY-2470~2500 BE 1-18GHz HL050 FSV40 Pre-10-YUNFANG


Figure 11: Radiated Band-Edge, 1-DH5, 2480, V

XXY-2470~2500 BE 1-18GHz HL050 FSV40 Pre-10-YUNFANG

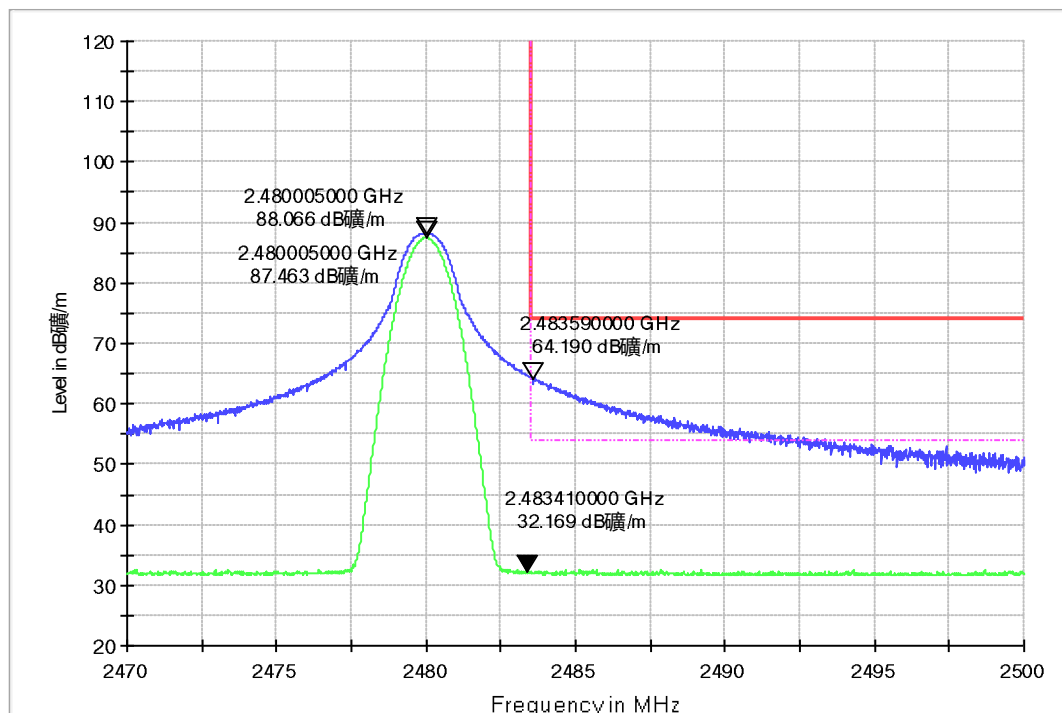
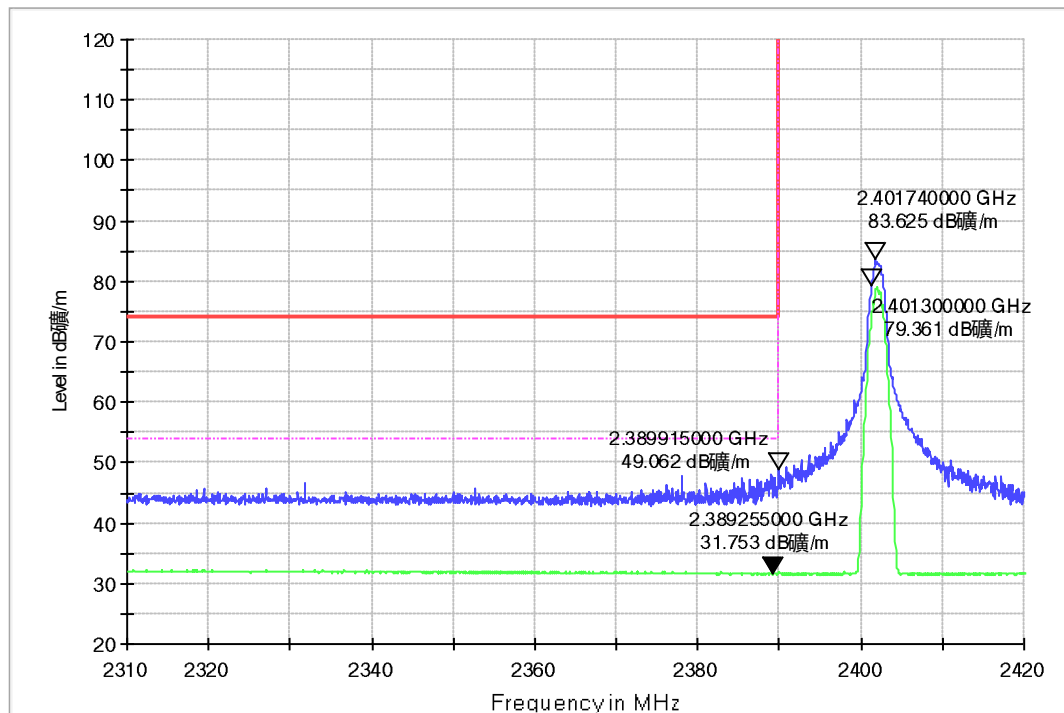


Figure 12: Radiated Band-Edge, 3-DH5, 2402, H

XXY-2310~2410 BE 1-18GHz HL050 FSV40 Pre-10-YUNFANG


Figure 13: Radiated Band-Edge, 3-DH5, 2402, V

XXY-2310~2410 BE 1-18GHz HL050 FSV40 Pre-10-YUNFANG

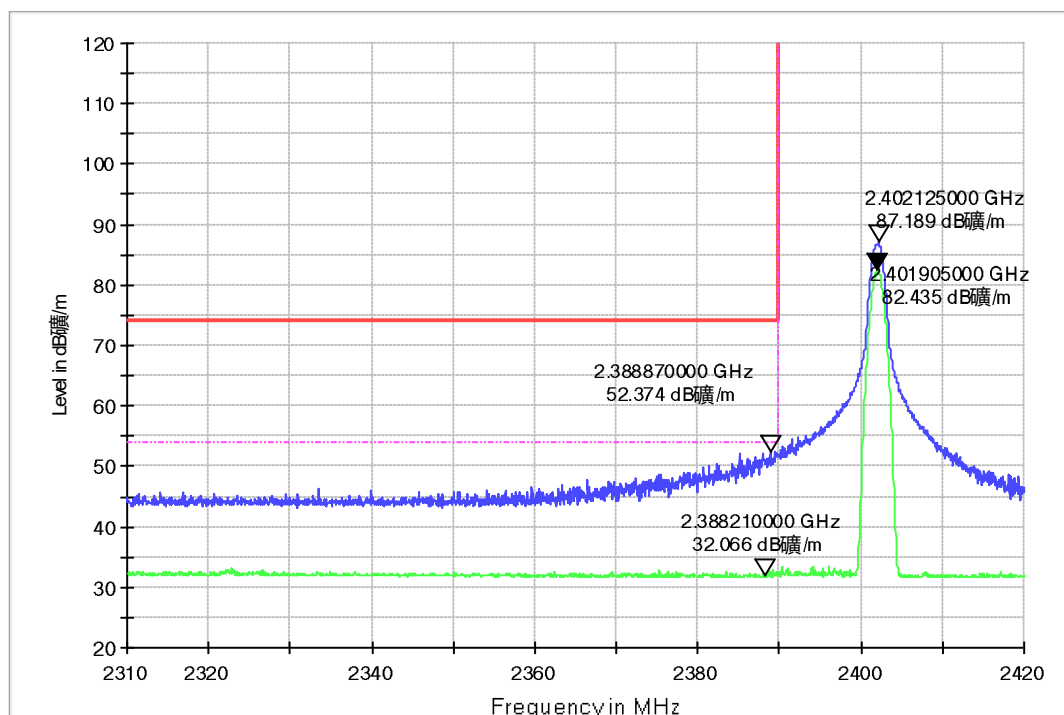
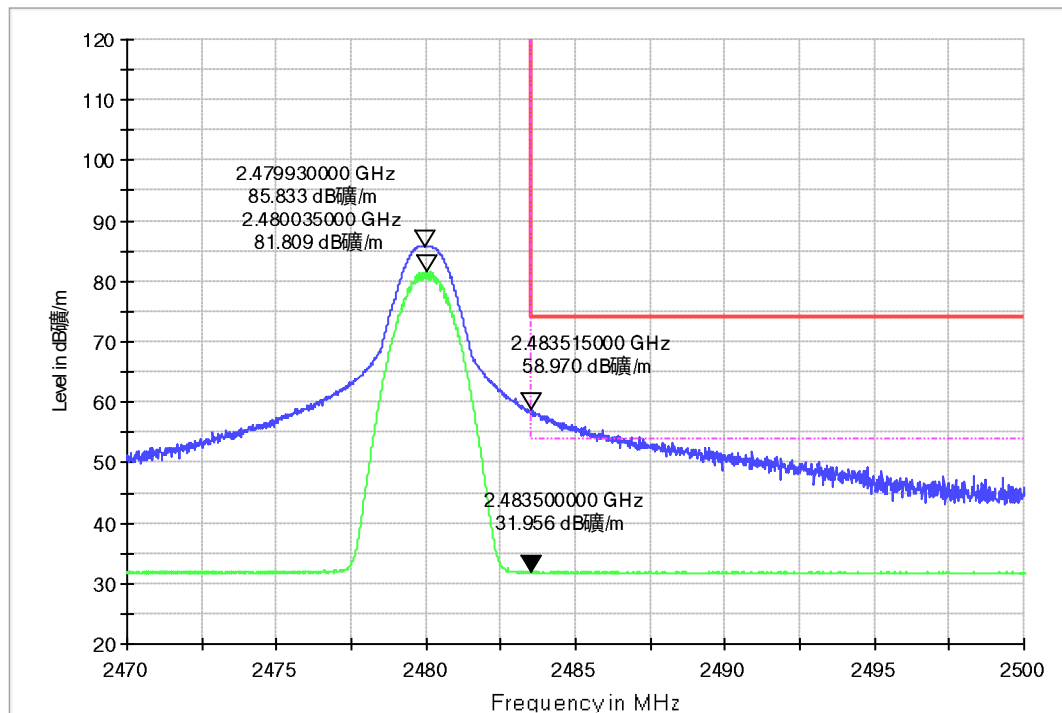
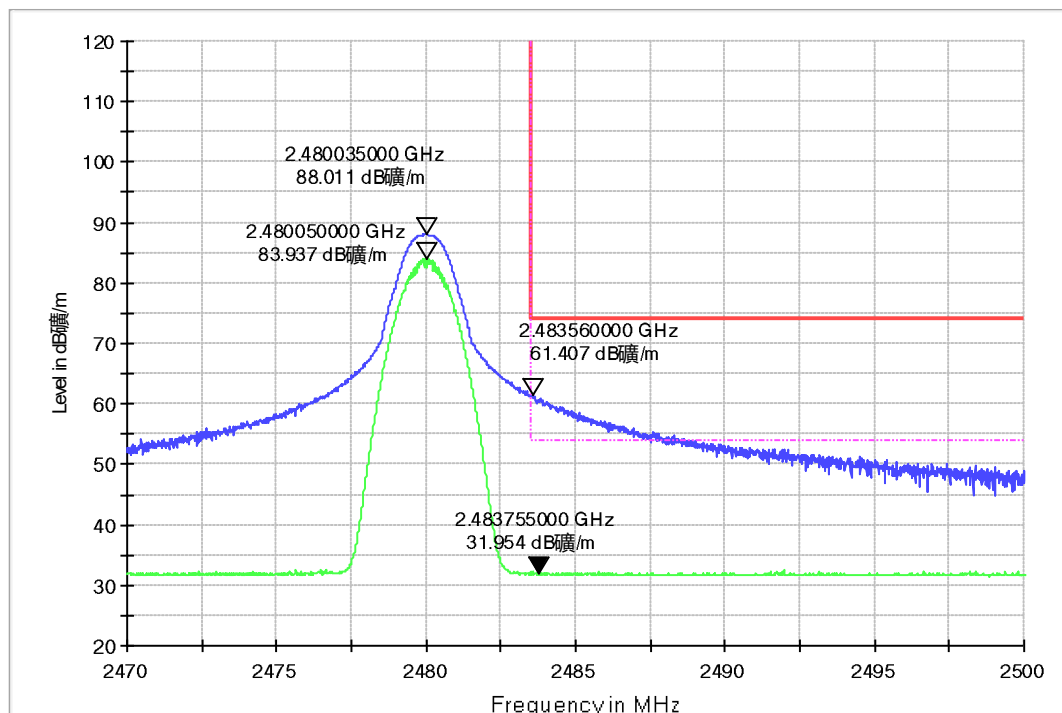


Figure 14: Radiated Band-Edge, 3-DH5, 2480, H

XXY-2470~2500 BE 1-18GHz HL050 FSV40 Pre-10-YUNFANG


Figure 15: Radiated Band-Edge, 3-DH5, 2480, V

XXY-2470~2500 BE 1-18GHz HL050 FSV40 Pre-10-YUNFANG



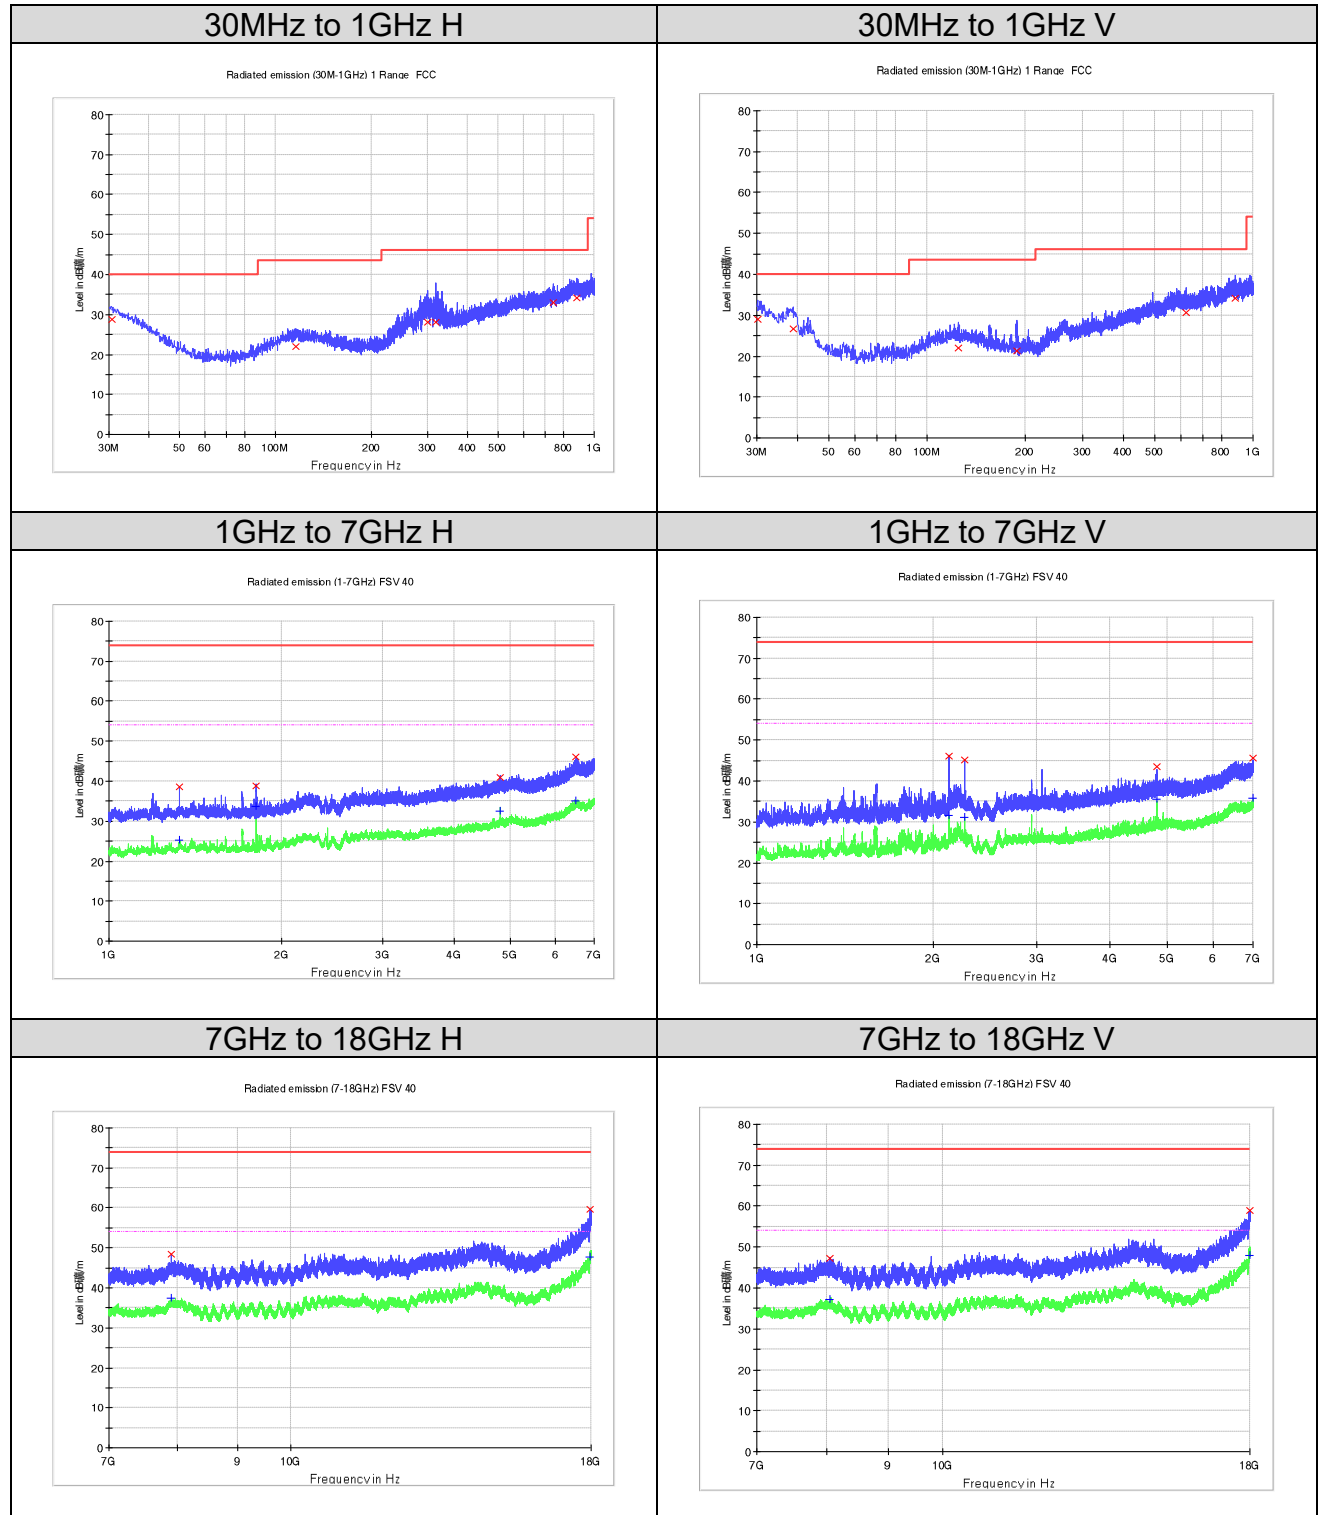
5.3.2 Radiated Spurious Emission

RESULT:**Pass**

Date of testing	:	2026-03-15
Ambient temperature	:	21.3°C
Relative humidity	:	45.6%
Atmospheric pressure	:	101kPa
Test requirement	:	FCC Part 15.247(d) FCC Part 15.209(a) RSS-Gen Issue 5, Amendment 2, February 2021, Clause 8.9 RSS-247 Issue 4, July 24, 2025, Clause 6.6
Test procedure	:	ANSI C63.10:2020 ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024
Test voltage	:	AC 120V, 60Hz
Test modes applied	:	A
Kind of test site	:	3m Anechoic Chamber

Note:

1. All the test modes were applied, only the worst case were shown in this report.
2. For the frequency range from 18GHz to 25GHz, no emission was found.

Figure 16: Radiated Spurious Emission, 1-DH5, 2402MHz


Prüfbericht - Nr.: CN26IMUB 001
Test Report No.
Seite 71 von 82
Page 71 of 82
Limit and Margin
QP

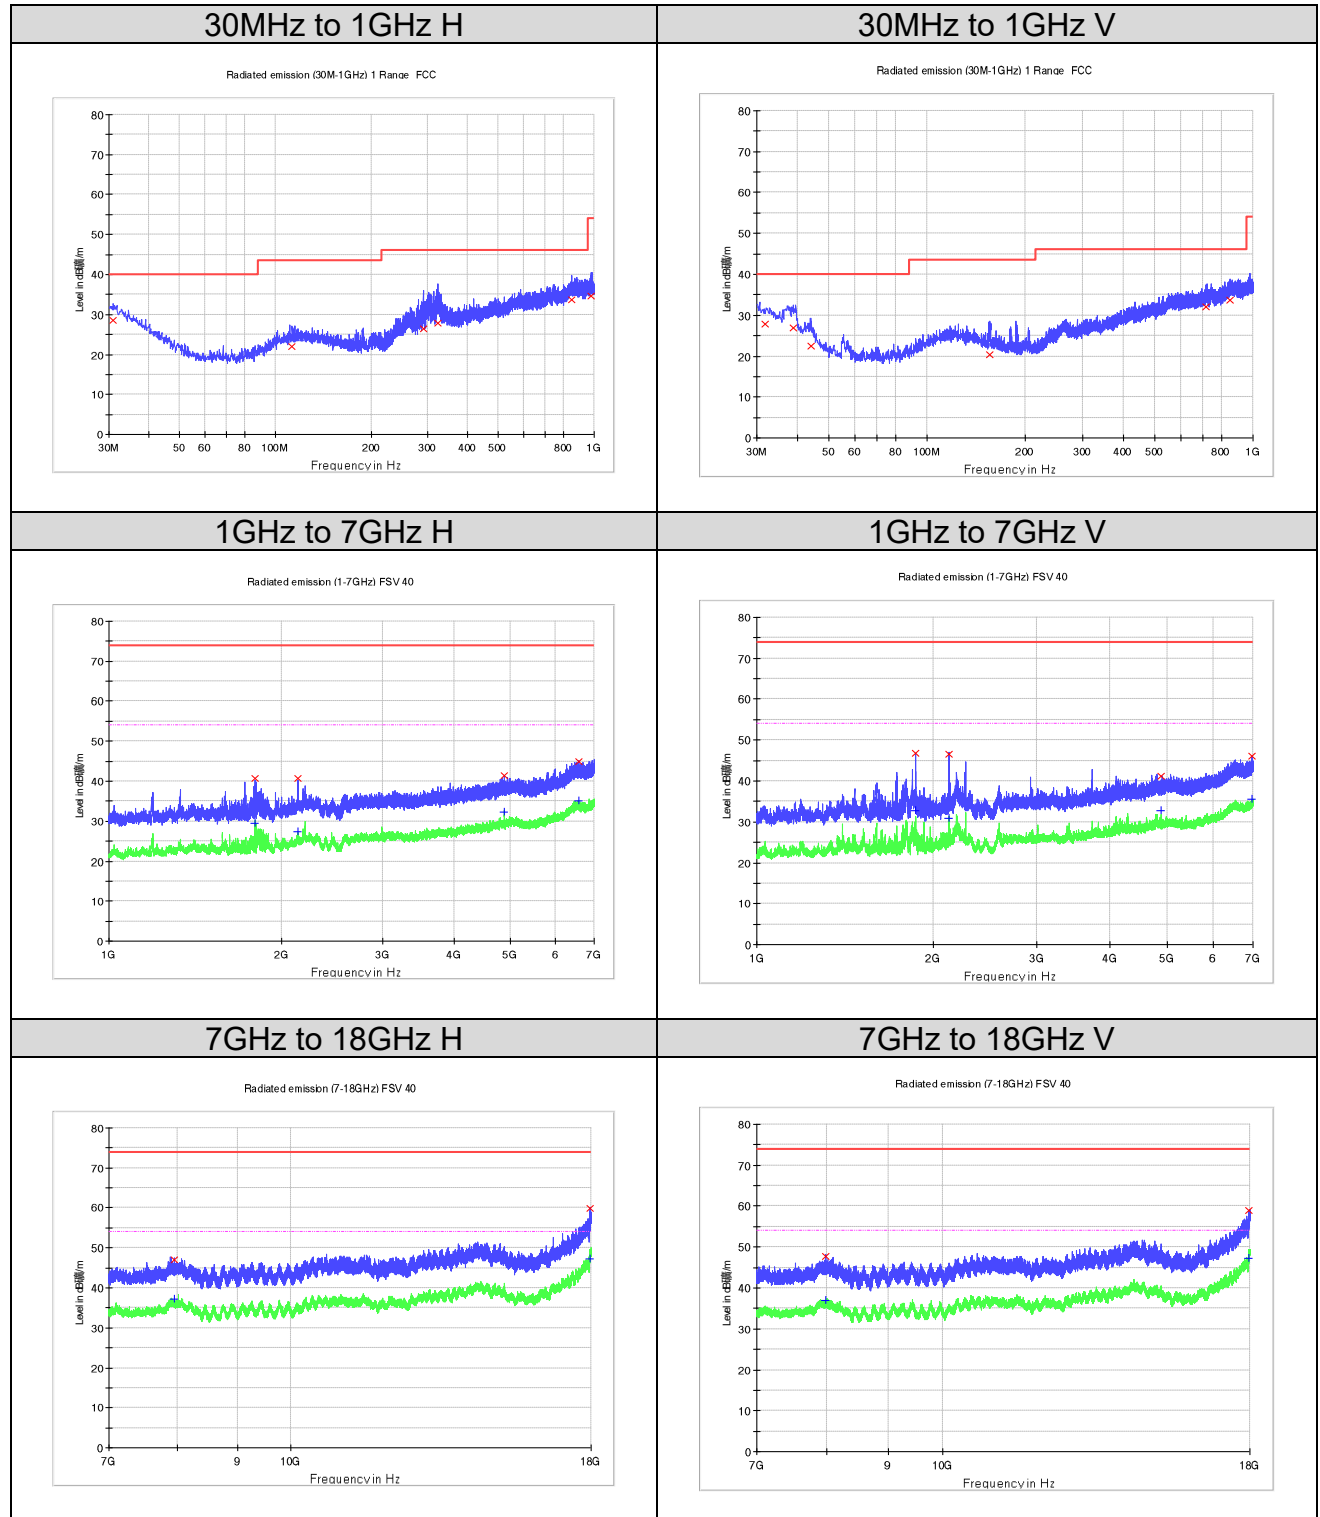
Frequency (MHz)	QuasiPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
30.606250	28.7	H	25.1	11.3	40.0
115.602500	22.0	H	18.8	21.5	43.5
300.508750	28.2	H	20.8	17.8	46.0
319.302500	28.1	H	20.9	17.9	46.0
745.253750	32.9	H	29.0	13.1	46.0
882.023750	34.1	H	29.1	11.9	46.0
30.121250	28.9	V	25.3	11.1	40.0
38.730000	26.6	V	20.5	13.4	40.0
124.332500	22.0	V	18.7	21.5	43.5
187.867500	21.2	V	15.8	22.3	43.5
623.397500	30.7	V	26.9	15.3	46.0
882.387500	34.1	V	29.2	11.9	46.0

PK

Frequency (MHz)	MaxPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1328.909091	38.5	H	-18.7	35.5	74.0
1805.909091	38.9	H	-18.7	35.1	74.0
4804.272727	41.0	H	-11.2	33.0	74.0
6512.909091	46.0	H	-7.3	28.0	74.0
7908.875000	48.4	H	-3.7	25.6	74.0
17971.468750	59.8	H	11.6	14.2	74.0
2127.727273	46.2	V	-16.5	27.8	74.0
2257.818182	45.2	V	-15.6	28.8	74.0
4803.181818	43.4	V	-11.2	30.6	74.0
6988.272727	45.6	V	-6.3	28.4	74.0
8049.125000	47.2	V	-3.5	26.8	74.0
17986.250000	58.9	V	11.9	15.1	74.0

AV

Frequency (MHz)	Average (dBµV/m)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
1328.909091	25.4	H	-18.7	28.6	54.0
1805.909091	33.6	H	-18.7	20.4	54.0
4804.272727	32.6	H	-11.2	21.5	54.0
6512.909091	35.0	H	-7.3	19.0	54.0
7908.875000	37.5	H	-3.7	16.5	54.0
17971.468750	47.7	H	11.6	6.3	54.0
2127.727273	31.7	V	-16.5	22.3	54.0
2257.818182	31.1	V	-15.6	22.9	54.0
4803.181818	35.7	V	-11.2	18.3	54.0
6988.272727	35.8	V	-6.3	18.2	54.0
8049.125000	37.3	V	-3.5	16.7	54.0
17986.250000	47.9	V	11.9	6.1	54.0

Figure 17: Radiated Spurious Emission, 1-DH5, 2441MHz


Prüfbericht - Nr.: CN26IMUB 001
Test Report No.
Seite 73 von 82
Page 73 of 82
Limit and Margin
QP

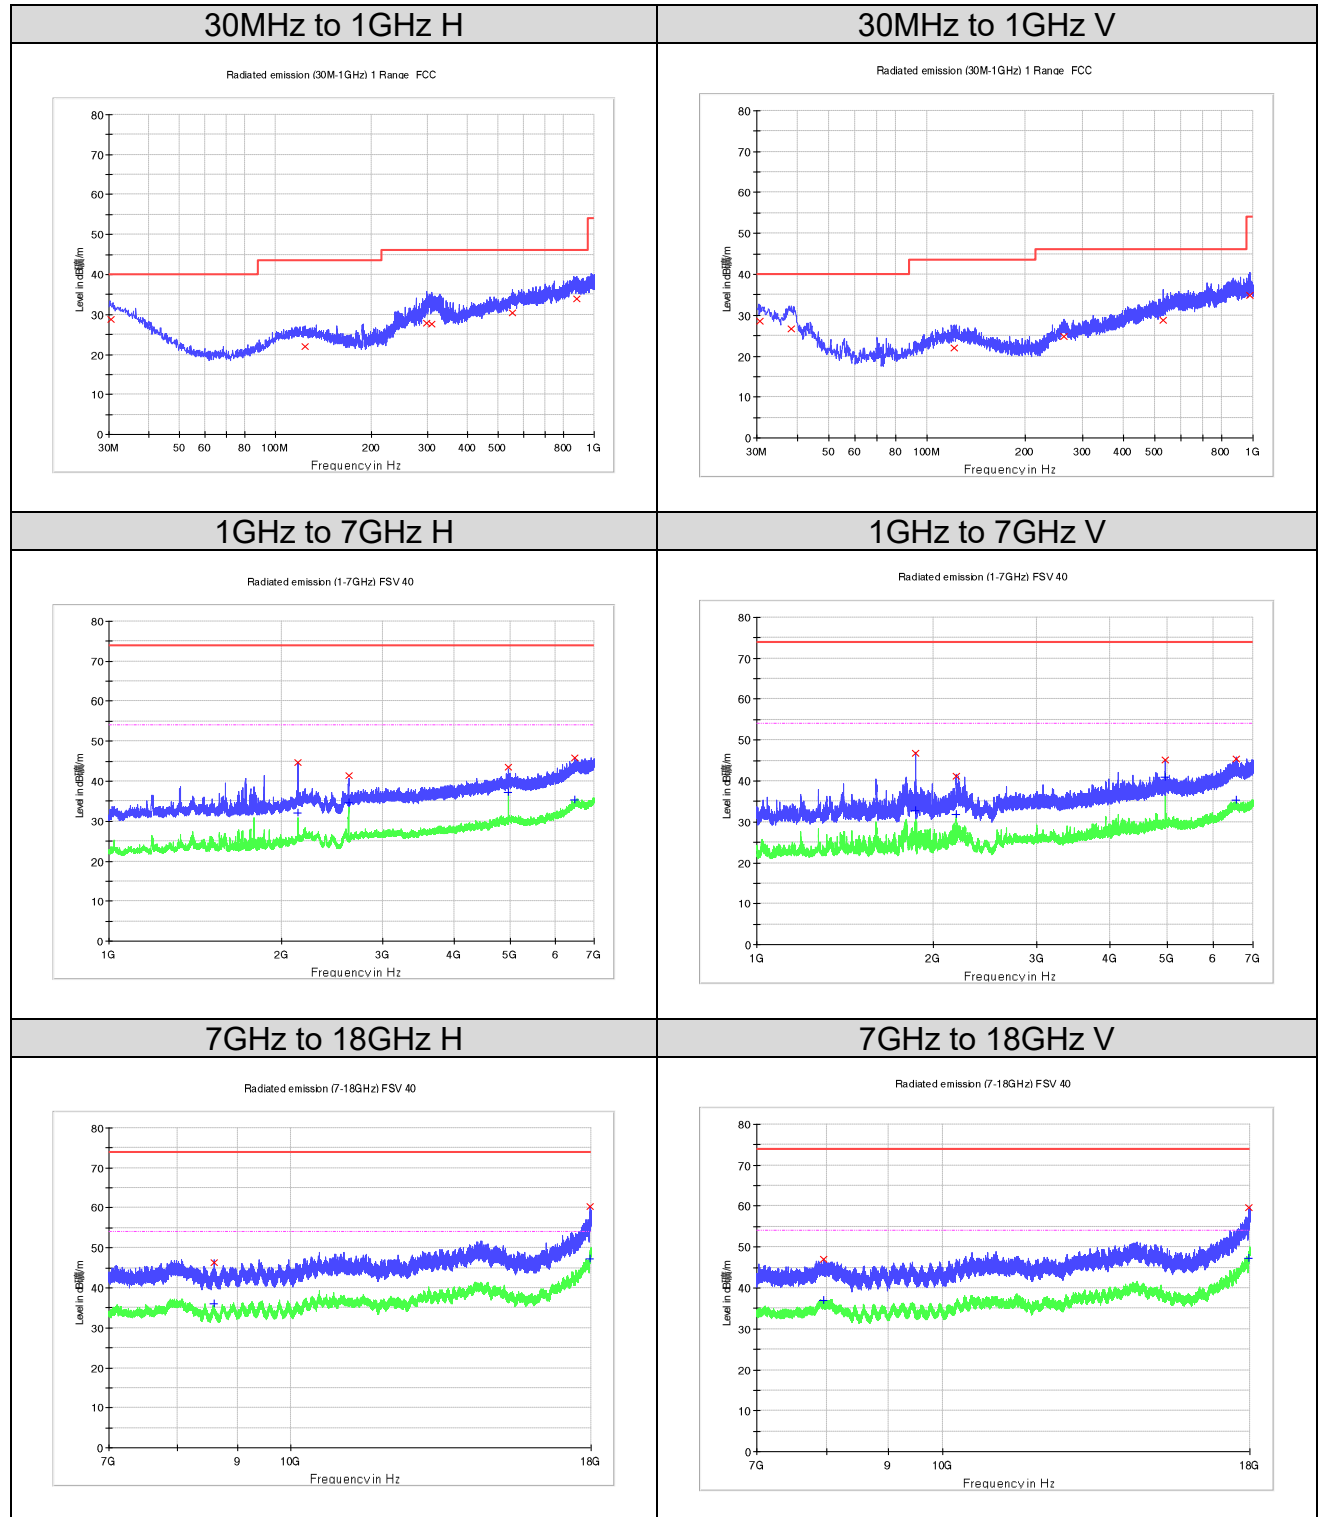
Frequency (MHz)	QuasiPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
30.970000	28.5	H	24.9	11.5	40.0
112.813750	21.9	H	18.7	21.6	43.5
290.445000	26.5	H	20.0	19.5	46.0
323.910000	27.9	H	21.2	18.1	46.0
850.377500	33.7	H	28.9	12.3	46.0
976.962500	34.7	H	30.2	19.3	54.0
31.940000	27.9	V	24.3	12.1	40.0
38.730000	27.0	V	20.5	13.0	40.0
43.943750	22.4	V	17.6	17.6	40.0
155.978750	20.4	V	16.9	23.1	43.5
719.063750	32.0	V	28.1	14.0	46.0
850.256250	33.7	V	28.9	12.3	46.0

PK

Frequency (MHz)	MaxPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1796.909091	40.6	H	-18.8	33.4	74.0
2133.181818	40.8	H	-16.4	33.2	74.0
4881.727273	41.5	H	-11.1	32.5	74.0
6592.272727	44.8	H	-7.4	29.2	74.0
7956.312500	47.1	H	-3.5	26.9	74.0
17975.937500	60.0	H	11.7	14.0	74.0
1864.272727	46.9	V	-18.5	27.1	74.0
2128.272727	46.6	V	-16.5	27.4	74.0
4881.727273	41.2	V	-11.1	32.8	74.0
6975.727273	46.1	V	-6.5	27.9	74.0
7992.406250	47.7	V	-3.3	26.3	74.0
17978.343750	59.1	V	11.7	14.9	74.0

AV

Frequency (MHz)	Average (dBµV/m)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
1796.909091	29.5	H	-18.8	24.5	54.0
2133.181818	27.3	H	-16.4	26.7	54.0
4881.727273	32.2	H	-11.1	21.8	54.0
6592.272727	35.2	H	-7.4	18.9	54.0
7956.312500	37.2	H	-3.5	16.8	54.0
17975.937500	47.2	H	11.7	6.8	54.0
1864.272727	32.8	V	-18.5	21.2	54.0
2128.272727	30.9	V	-16.5	23.1	54.0
4881.727273	32.8	V	-11.1	21.2	54.0
6975.727273	35.5	V	-6.5	18.5	54.0
7992.406250	37.1	V	-3.3	16.9	54.0
17978.343750	47.2	V	11.7	6.8	54.0

Figure 18: Radiated Spurious Emission, 1-DH5, 2480MHz


Limit and Margin
QP

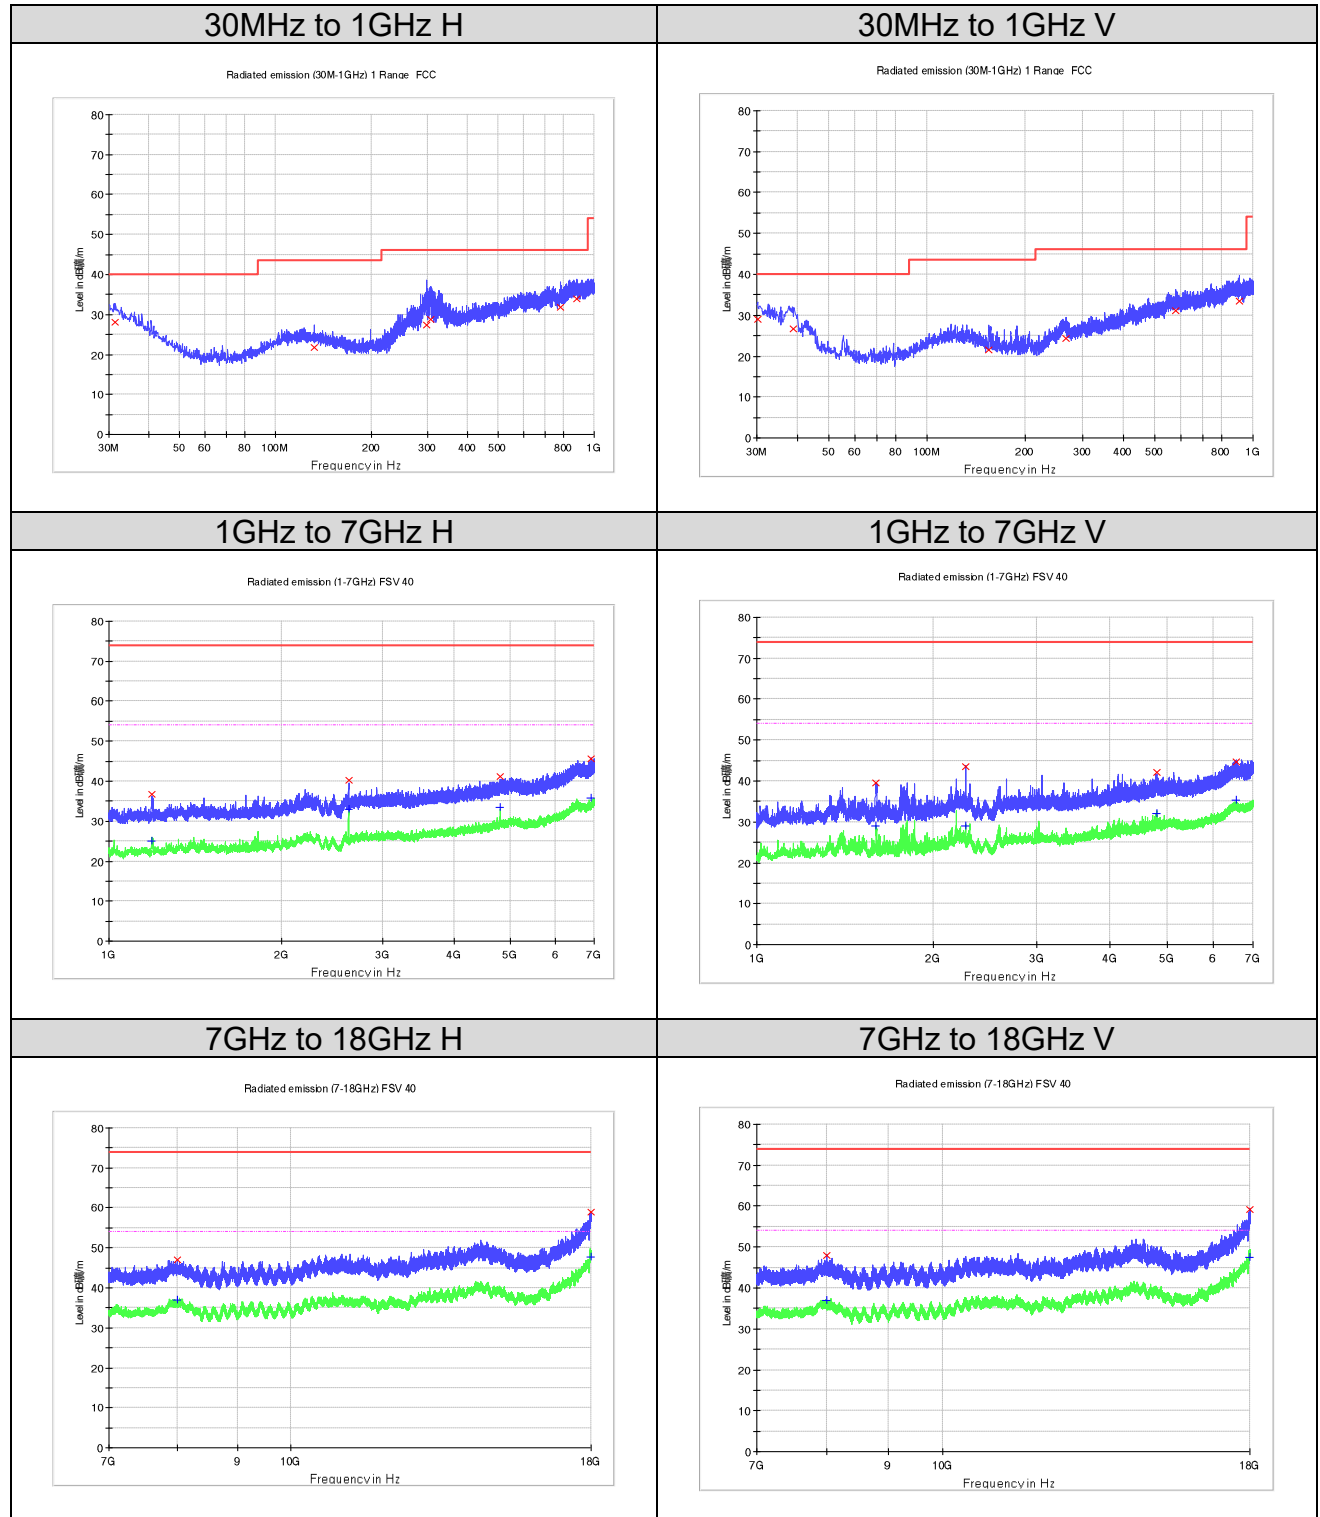
Frequency (MHz)	QuasiPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
30.363750	28.8	H	25.2	11.2	40.0
123.483750	22.0	H	18.7	21.5	43.5
297.962500	27.9	H	20.6	18.1	46.0
310.208750	27.6	H	20.2	18.4	46.0
553.193750	30.3	H	26.5	15.7	46.0
879.841250	33.9	H	28.9	12.1	46.0
30.727500	28.6	V	25.0	11.4	40.0
38.366250	26.6	V	20.7	13.5	40.0
120.937500	22.1	V	18.7	21.4	43.5
262.921250	24.9	V	21.6	21.1	46.0
531.490000	28.9	V	25.1	17.1	46.0
975.386250	34.9	V	30.3	19.2	54.0

PK

Frequency (MHz)	MaxPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
2130.181818	44.6	H	-16.4	29.4	74.0
2614.000000	41.4	H	-15.7	32.6	74.0
4960.000000	43.6	H	-11.0	30.4	74.0
6479.636364	45.9	H	-7.5	28.1	74.0
8598.781250	46.4	H	-5.3	27.6	74.0
17975.593750	60.3	H	11.7	13.7	74.0
1863.727273	46.7	V	-18.5	27.3	74.0
2189.909091	41.2	V	-15.8	32.8	74.0
4959.727273	45.1	V	-11.0	28.9	74.0
6547.545455	45.4	V	-7.3	28.6	74.0
7961.468750	46.9	V	-3.4	27.1	74.0
17978.000000	59.6	V	11.7	14.4	74.0

AV

Frequency (MHz)	Average (dBµV/m)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
2130.181818	32.0	H	-16.4	22.0	54.0
2614.000000	34.6	H	-15.7	19.4	54.0
4960.000000	37.3	H	-11.0	16.8	54.0
6479.636364	35.3	H	-7.5	18.7	54.0
8598.781250	36.1	H	-5.3	17.9	54.0
17975.593750	47.2	H	11.7	6.8	54.0
1863.727273	32.9	V	-18.5	21.1	54.0
2189.909091	31.7	V	-15.8	22.3	54.0
4959.727273	41.0	V	-11.0	13.0	54.0
6547.545455	35.3	V	-7.3	18.7	54.0
7961.468750	37.0	V	-3.4	17.0	54.0
17978.000000	47.3	V	11.7	6.8	54.0

Figure 19: Radiated Spurious Emission, 3-DH5, 2402MHz


Limit and Margin
QP

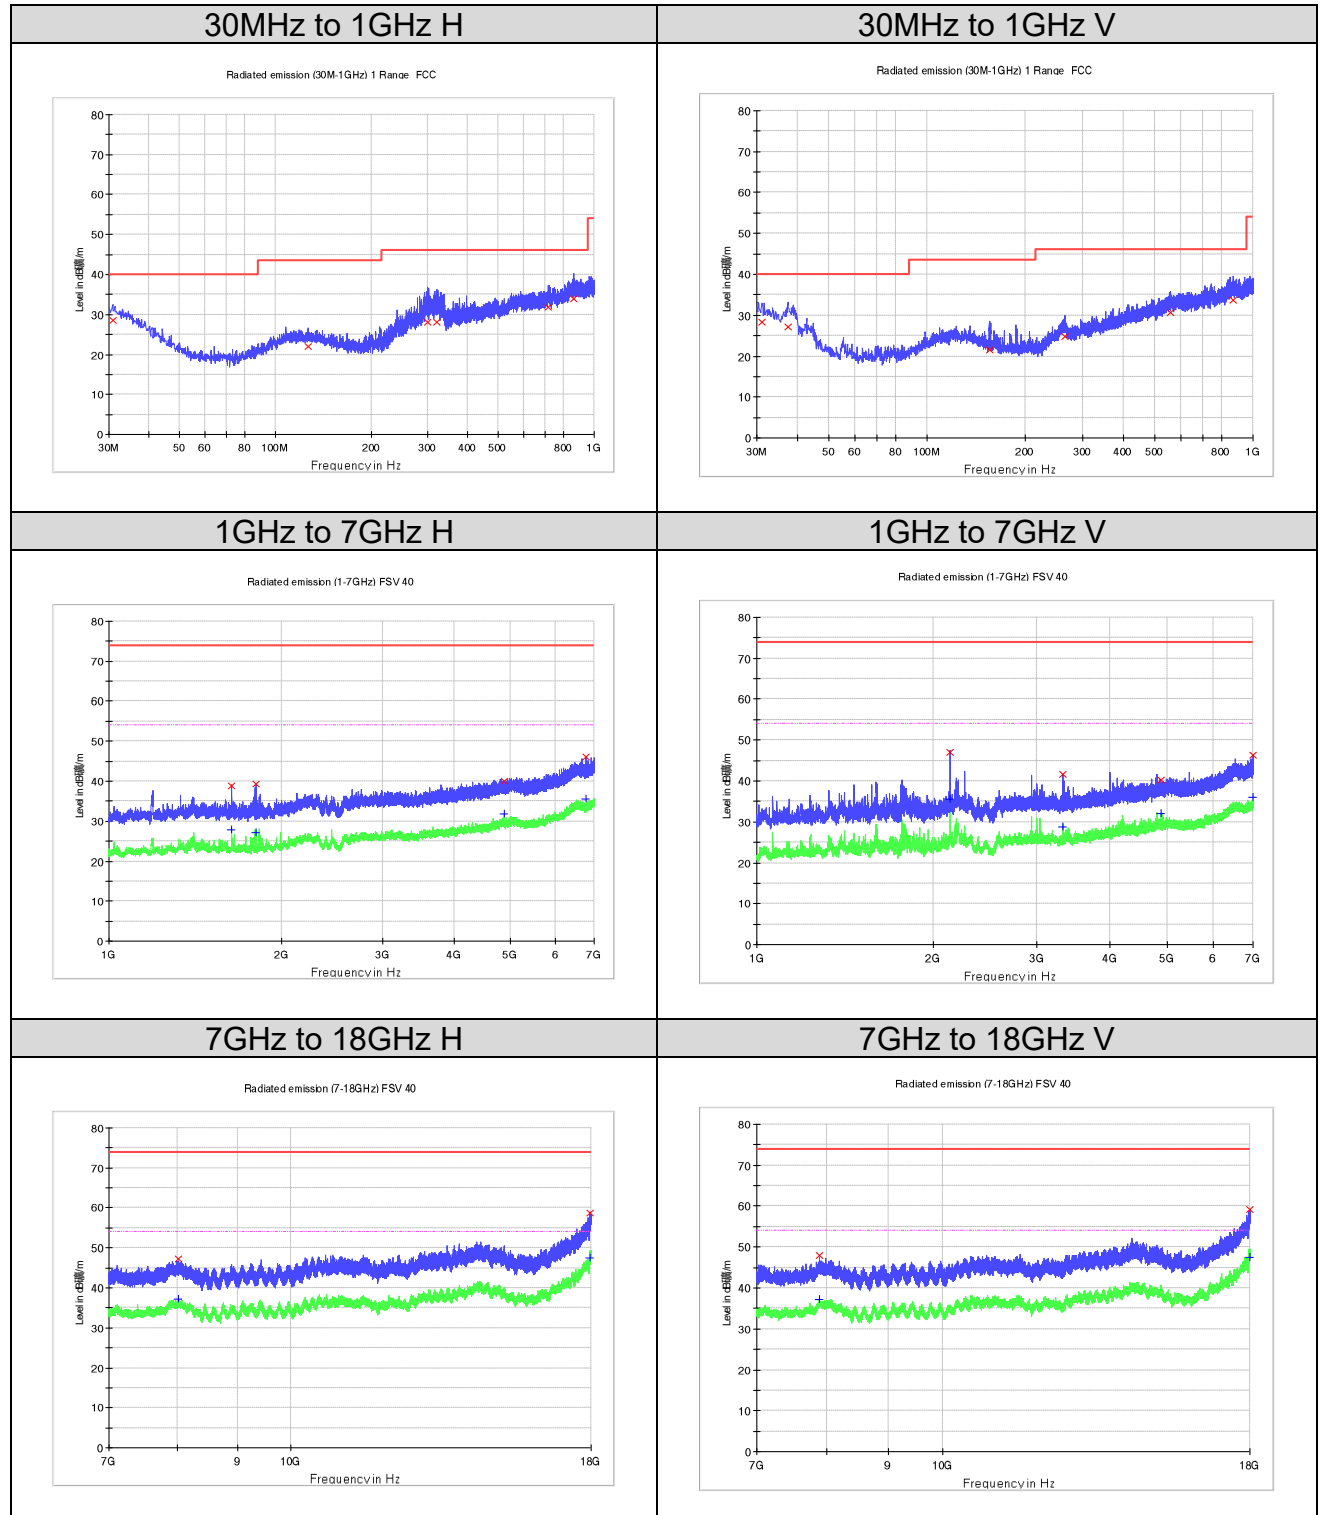
Frequency (MHz)	QuasiPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
31.455000	28.1	H	24.6	11.9	40.0
132.456250	21.8	H	18.5	21.7	43.5
297.356250	27.3	H	20.6	18.7	46.0
306.086250	28.8	H	20.4	17.2	46.0
786.236250	31.9	H	28.0	14.1	46.0
879.477500	33.8	H	28.9	12.2	46.0
30.121250	28.9	V	25.3	11.1	40.0
38.972500	26.7	V	20.4	13.3	40.0
155.008750	21.6	V	16.9	21.9	43.5
266.316250	24.3	V	21.1	21.7	46.0
580.475000	31.0	V	26.8	15.0	46.0
908.698750	33.4	V	28.7	12.6	46.0

PK

Frequency (MHz)	MaxPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1188.181818	36.7	H	-19.5	37.3	74.0
2614.000000	40.3	H	-15.7	33.7	74.0
4804.545455	41.3	H	-11.2	32.7	74.0
6908.636364	45.7	H	-7.2	28.3	74.0
7999.625000	47.0	H	-3.3	27.1	74.0
17982.812500	58.9	H	11.8	15.1	74.0
1597.545455	39.6	V	-18.9	34.4	74.0
2264.909091	43.6	V	-15.6	30.4	74.0
4802.909091	42.1	V	-11.2	31.9	74.0
6546.454546	44.7	V	-7.3	29.3	74.0
8011.656250	48.0	V	-3.3	26.1	74.0
17989.687500	59.2	V	11.9	14.8	74.0

AV

Frequency (MHz)	Average (dBµV/m)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
1188.181818	25.1	H	-19.5	29.0	54.0
2614.000000	32.9	H	-15.7	21.1	54.0
4804.545455	33.5	H	-11.2	20.5	54.0
6908.636364	35.8	H	-7.2	18.2	54.0
7999.625000	37.0	H	-3.3	17.0	54.0
17982.812500	47.8	H	11.8	6.2	54.0
1597.545455	29.0	V	-18.9	25.0	54.0
2264.909091	29.0	V	-15.6	25.0	54.0
4802.909091	32.2	V	-11.2	21.9	54.0
6546.454546	35.4	V	-7.3	18.6	54.0
8011.656250	36.9	V	-3.3	17.1	54.0
17989.687500	47.4	V	11.9	6.6	54.0

Figure 20: Radiated Spurious Emission, 3-DH5, 2441MHz


Prüfbericht - Nr.: CN26IMUB 001
Test Report No.
Seite 79 von 82
Page 79 of 82
Limit and Margin
QP

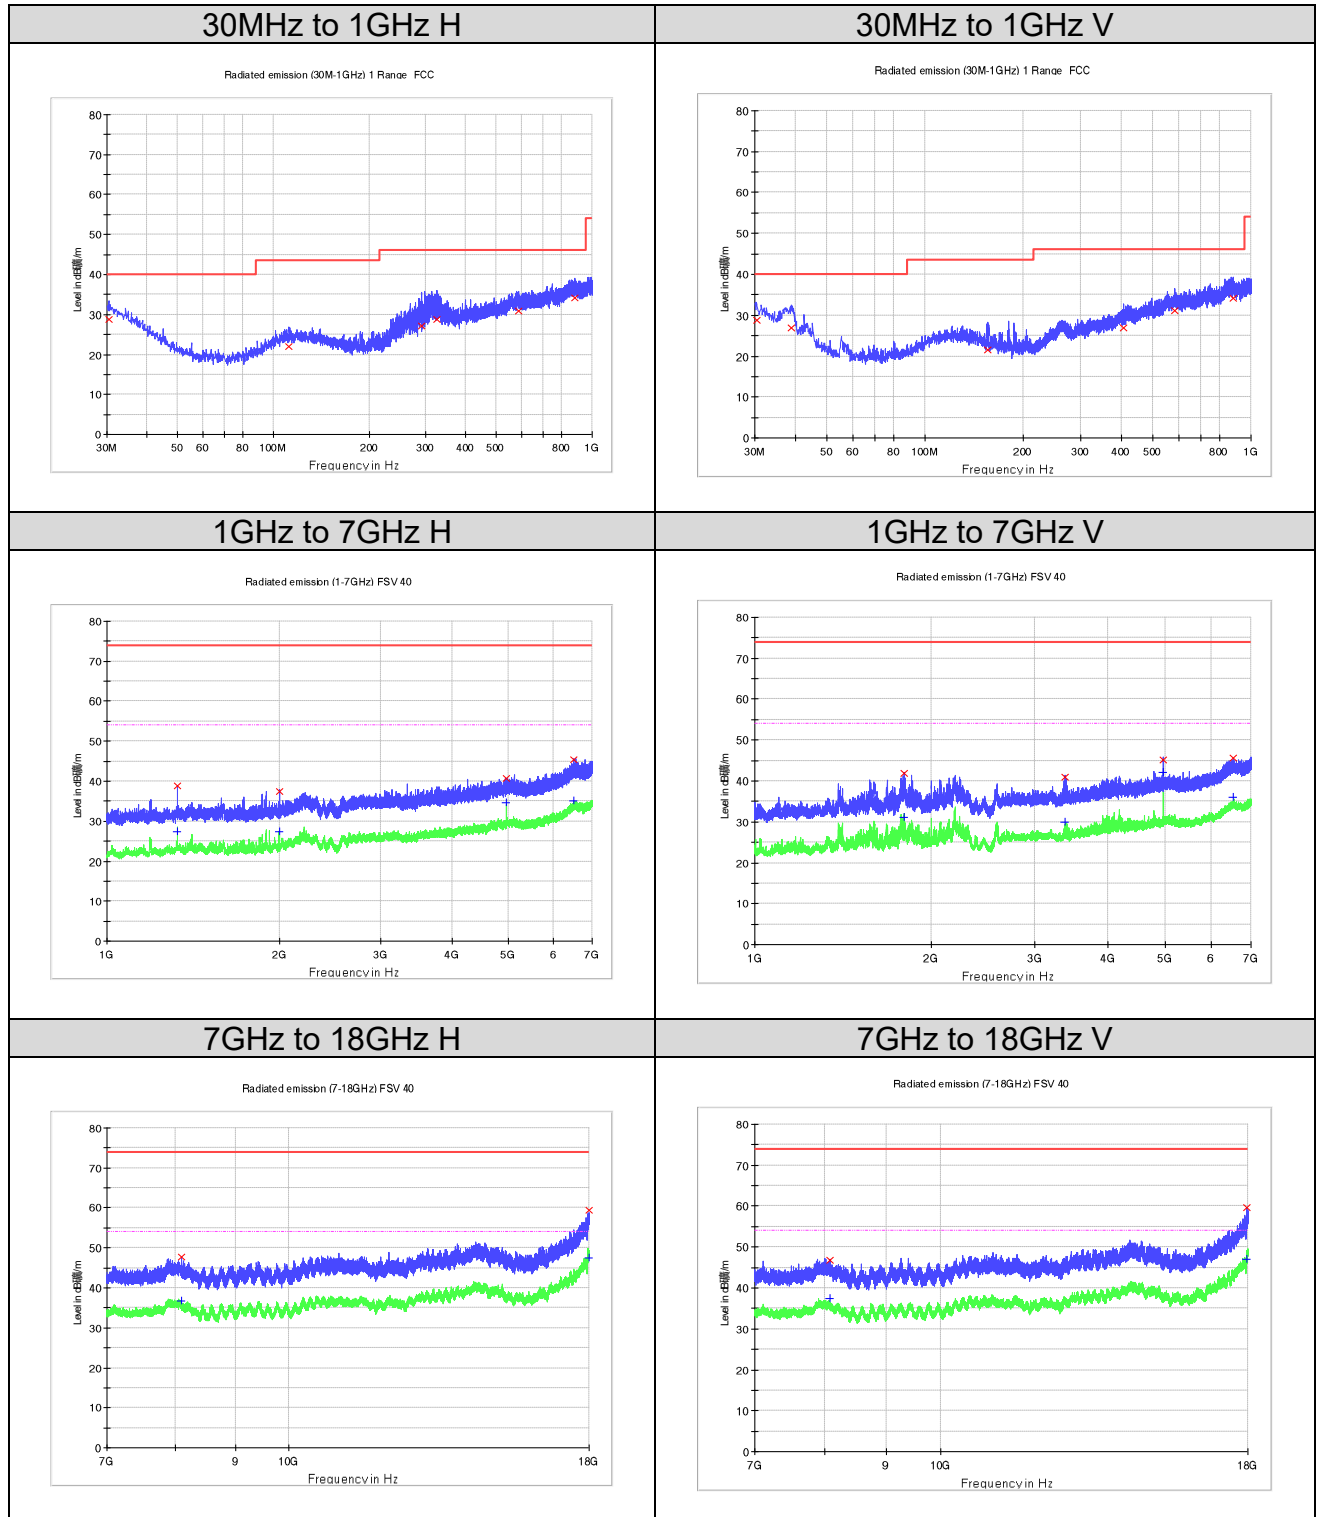
Frequency (MHz)	QuasiPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
30.848750	28.5	H	25.0	11.5	40.0
126.151250	22.0	H	18.7	21.5	43.5
300.387500	28.1	H	20.8	17.9	46.0
321.606250	28.0	H	21.2	18.0	46.0
715.668750	31.7	H	27.8	14.3	46.0
862.381250	34.0	H	29.1	12.0	46.0
31.091250	28.4	V	24.8	11.6	40.0
37.396250	27.1	V	21.3	13.0	40.0
155.130000	21.5	V	16.9	22.0	43.5
264.255000	24.7	V	21.4	21.3	46.0
559.741250	30.6	V	26.5	15.4	46.0
870.020000	33.7	V	28.8	12.3	46.0

PK

Frequency (MHz)	MaxPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1636.272727	38.9	H	-18.9	35.1	74.0
1801.818182	39.3	H	-18.7	34.7	74.0
4881.181818	39.9	H	-11.1	34.1	74.0
6783.727273	46.1	H	-7.7	27.9	74.0
8028.156250	47.1	H	-3.4	26.9	74.0
17976.281250	58.8	H	11.7	15.2	74.0
2132.090909	47.0	V	-16.4	27.0	74.0
3323.909091	41.6	V	-15.0	32.4	74.0
4881.727273	40.2	V	-11.1	33.8	74.0
6997.545455	46.4	V	-6.2	27.7	74.0
7892.031250	48.0	V	-3.9	26.0	74.0
17989.343750	59.3	V	11.9	14.8	74.0

AV

Frequency (MHz)	Average (dBµV/m)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
1636.272727	27.7	H	-18.9	26.3	54.0
1801.818182	27.2	H	-18.7	26.9	54.0
4881.181818	31.8	H	-11.1	22.2	54.0
6783.727273	35.6	H	-7.7	18.4	54.0
8028.156250	37.1	H	-3.4	16.9	54.0
17976.281250	47.5	H	11.7	6.5	54.0
2132.090909	35.6	V	-16.4	18.5	54.0
3323.909091	28.8	V	-15.0	25.3	54.0
4881.727273	32.1	V	-11.1	21.9	54.0
6997.545455	36.0	V	-6.2	18.1	54.0
7892.031250	37.2	V	-3.9	16.8	54.0
17989.343750	47.5	V	11.9	6.5	54.0

Figure 21: Radiated Spurious Emission, 3-DH5, 2480MHz


Prüfbericht - Nr.: CN26IMUB 001
Test Report No.
Seite 81 von 82
Page 81 of 82
Limit and Margin
QP

Frequency (MHz)	QuasiPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
30.363750	28.8	H	25.2	11.2	40.0
111.965000	22.0	H	18.7	21.5	43.5
290.930000	27.0	H	20.1	19.0	46.0
325.850000	28.9	H	21.3	17.1	46.0
586.173750	30.8	H	26.7	15.2	46.0
882.630000	34.1	H	29.2	11.9	46.0
30.363750	28.8	V	25.2	11.2	40.0
38.730000	27.0	V	20.5	13.0	40.0
156.100000	21.5	V	16.9	22.1	43.5
407.572500	26.9	V	23.5	19.1	46.0
581.808750	31.1	V	26.9	14.9	46.0
884.206250	34.2	V	29.3	11.8	46.0

PK

Frequency (MHz)	MaxPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1327.545455	38.8	H	-18.7	35.2	74.0
1998.181818	37.5	H	-17.7	36.5	74.0
4959.454546	40.8	H	-11.0	33.2	74.0
6490.000000	45.4	H	-7.4	28.6	74.0
8097.593750	47.7	H	-3.9	26.3	74.0
17988.312500	59.3	H	11.9	14.7	74.0
1796.636364	41.9	V	-18.8	32.1	74.0
3378.181818	40.9	V	-15.0	33.1	74.0
4959.727273	45.2	V	-11.0	28.8	74.0
6528.727273	45.7	V	-7.3	28.3	74.0
8079.375000	46.8	V	-3.7	27.2	74.0
17976.281250	59.6	V	11.7	14.4	74.0

AV

Frequency (MHz)	Average (dBµV/m)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
1327.545455	27.4	H	-18.7	26.6	54.0
1998.181818	27.4	H	-17.7	26.6	54.0
4959.454546	34.5	H	-11.0	19.5	54.0
6490.000000	35.1	H	-7.4	18.9	54.0
8097.593750	36.7	H	-3.9	17.3	54.0
17988.312500	47.6	H	11.9	6.5	54.0
1796.636364	31.1	V	-18.8	22.9	54.0
3378.181818	30.0	V	-15.0	24.0	54.0
4959.727273	42.0	V	-11.0	12.0	54.0
6528.727273	36.0	V	-7.3	18.0	54.0
8079.375000	37.4	V	-3.7	16.6	54.0
17976.281250	47.1	V	11.7	6.9	54.0

6. List of Tables

Table 1: List of Test and Measurement Equipment	7
Table 2: Measurement Uncertainty	8
Table 3: Technical Specification of EUT	9
Table 4: RF Channel List	10
Table 5: Power parameter value	11
Table 6: Special Accessories	11
Table 7: Auxiliary Equipment	12
Table 8: Antenna Requirement	13
Table 9: Peak Output Power	34
Table 10: Time of Occupancy	49

7. List of Figures

Figure 1: Dwell Time	50
Figure 2: Number of Hops	52
Figure 3: Reference Level	55
Figure 4: Conducted Band Edge	57
Figure 5: Conducted Spurious Emission	59
Figure 6: Conducted Emission, L	62
Figure 7: Conducted Emission, N	63
Figure 8: Radiated Band-Edge, 1-DH5, 2402, H	65
Figure 9: Radiated Band-Edge, 1-DH5, 2402, V	65
Figure 10: Radiated Band-Edge, 1-DH5, 2480, H	66
Figure 11: Radiated Band-Edge, 1-DH5, 2480, V	66
Figure 12: Radiated Band-Edge, 3-DH5, 2402, H	67
Figure 13: Radiated Band-Edge, 3-DH5, 2402, V	67
Figure 14: Radiated Band-Edge, 3-DH5, 2480, H	68
Figure 15: Radiated Band-Edge, 3-DH5, 2480, V	68
Figure 16: Radiated Spurious Emission, 1-DH5, 2402MHz	70
Figure 17: Radiated Spurious Emission, 1-DH5, 2441MHz	72
Figure 18: Radiated Spurious Emission, 1-DH5, 2480MHz	74
Figure 19: Radiated Spurious Emission, 3-DH5, 2402MHz	76
Figure 20: Radiated Spurious Emission, 3-DH5, 2441MHz	78
Figure 21: Radiated Spurious Emission, 3-DH5, 2480MHz	80