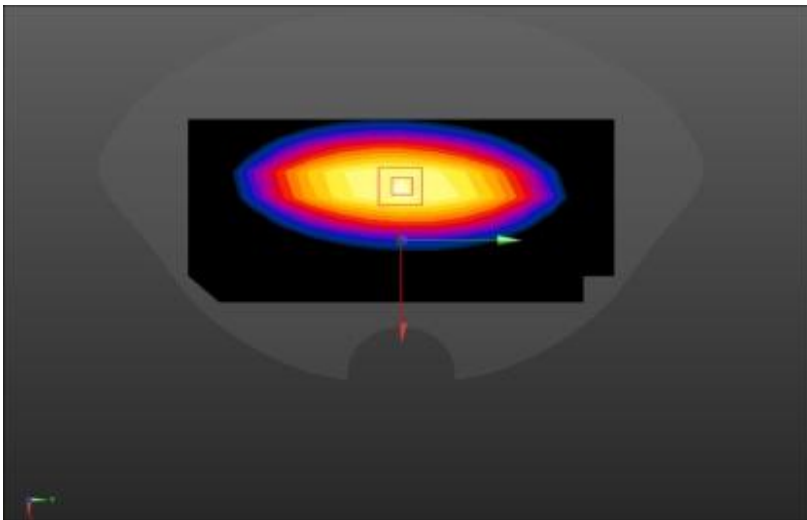
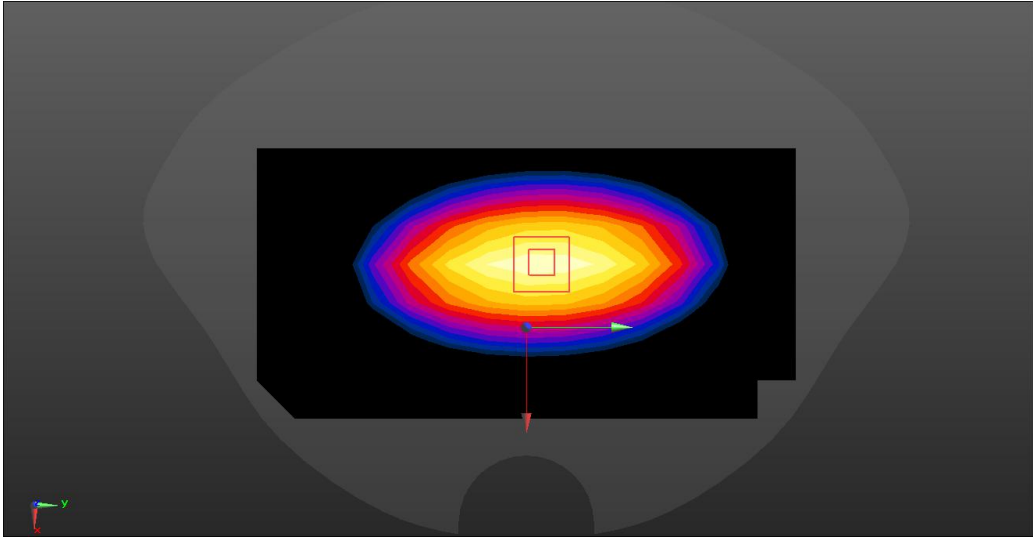


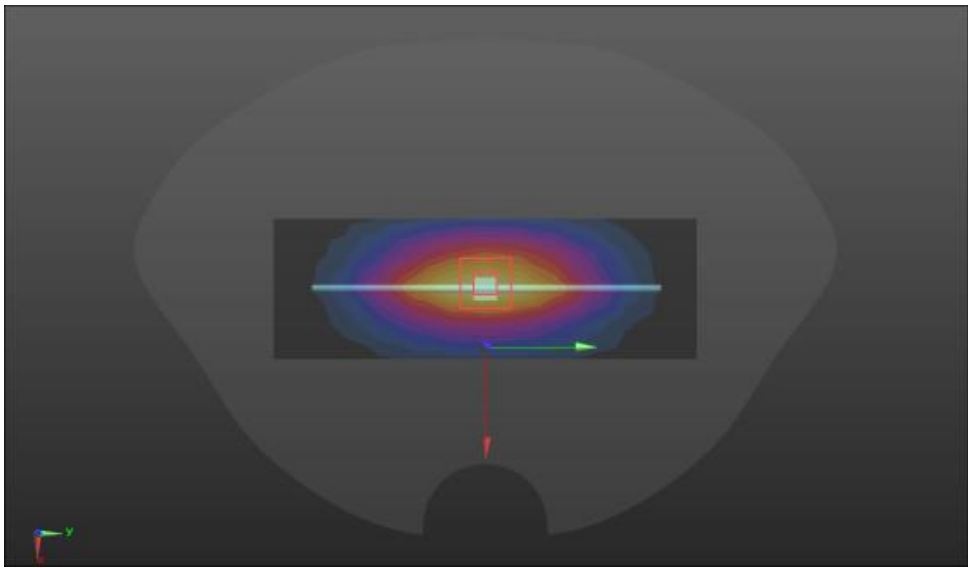
ANNEX A – TEST PLOTS

System check	750MHz(2021.10.21)
Communication System: UID 0, CW (0) Frequency: 750 MHz; Duty cycle:1:1 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.85 \text{ S/m}$; $\epsilon_r = 42.2$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.35, 6.35, 6.35); Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) System Performance Check at Frequencies 750MHz/d=15mm, Pin=250mW, dist=3.0mm (ES-Probe)/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 2.16 W/kg System Performance Check at Frequencies 750MHz/d=15mm, Pin=250mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 41.00 V/m; Power Drift = 0.13 dB Peak SAR (extrapolated) = 3.26 W/kg SAR(1 g) = 2.12 W/kg; SAR(10 g) = 1.44 W/kg Maximum value of SAR (measured) = 2.49 W/kg	
	

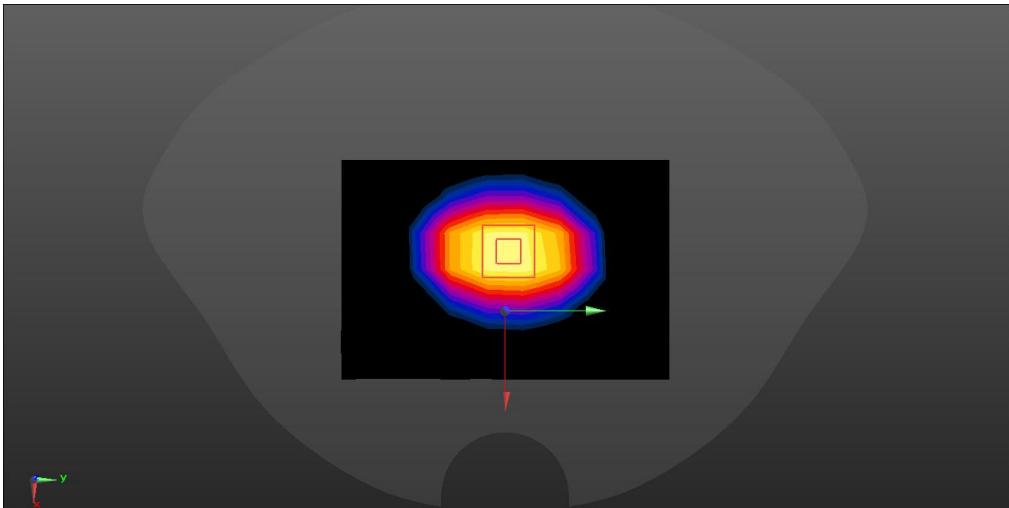
SRTC performed system check by using 250mw at antenna port

System check	835MHz(2021.10.22)
Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty cycle:1:1 Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 39.440$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.13, 6.13, 6.13); Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Configuration 835/835/Area Scan (8x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 2.72 W/kg Configuration 835/835/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 51.67 V/m; Power Drift = 0.08 dB Peak SAR (extrapolated) = 3.58 W/kg SAR(1 g) = 2.29 W/kg; SAR(10 g) = 1.59 W/kg Maximum value of SAR (measured) = 2.75 W/kg 	

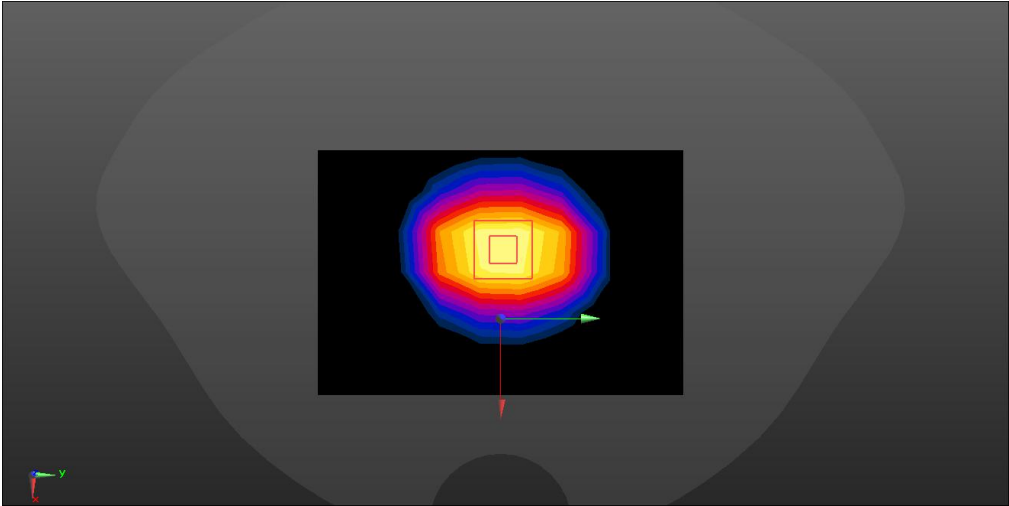
SRTC performed system check by using 250mw at antenna port

System check	900MHz(2021.10.23)
Communication System: UID 0, CW (0); Frequency: 900 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.976 \text{ S/m}$; $\epsilon_r = 40.229$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.13, 6.13, 6.13); Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) D900/Dipole 900MHz/Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 3.42 W/kg D900/Dipole 900MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 62.05 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 3.94 W/kg SAR(1 g) = 2.62 W/kg; SAR(10 g) = 1.69 W/kg Maximum value of SAR (measured) = 3.46 W/kg 	

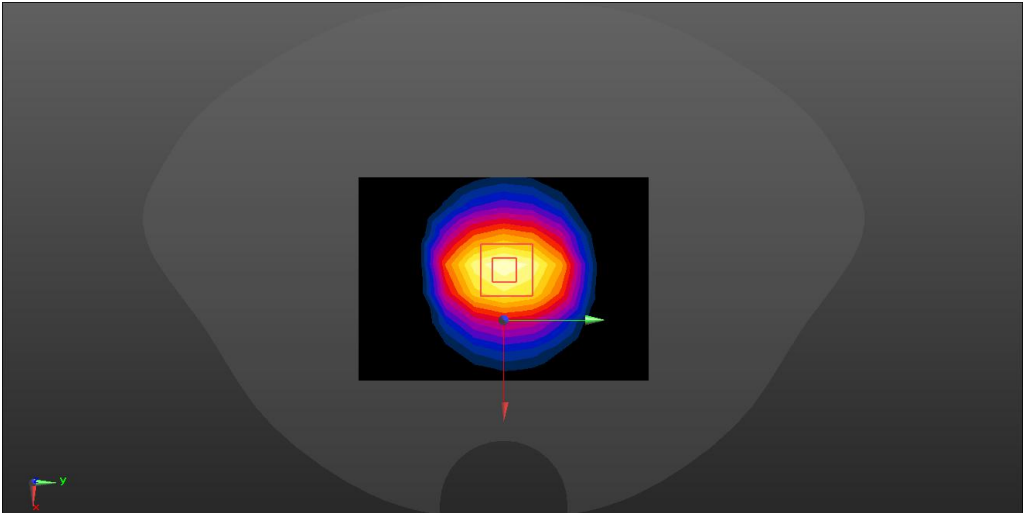
SRTC performed system check by using 250mw at antenna port

System check	1800MHz(2021.10.24)
Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty cycle:1:1 Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.364 \text{ S/m}$; $\epsilon_r = 38.789$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.08, 5.08, 5.08); Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Configuration 1800/1800/Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 8.31 W/kg Configuration 1800/1800/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 76.60 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 17.5 W/kg SAR(1 g) = 9.27W/kg; SAR(10 g) = 5.29 W/kg Maximum value of SAR (measured) = 12.1 W/kg 	

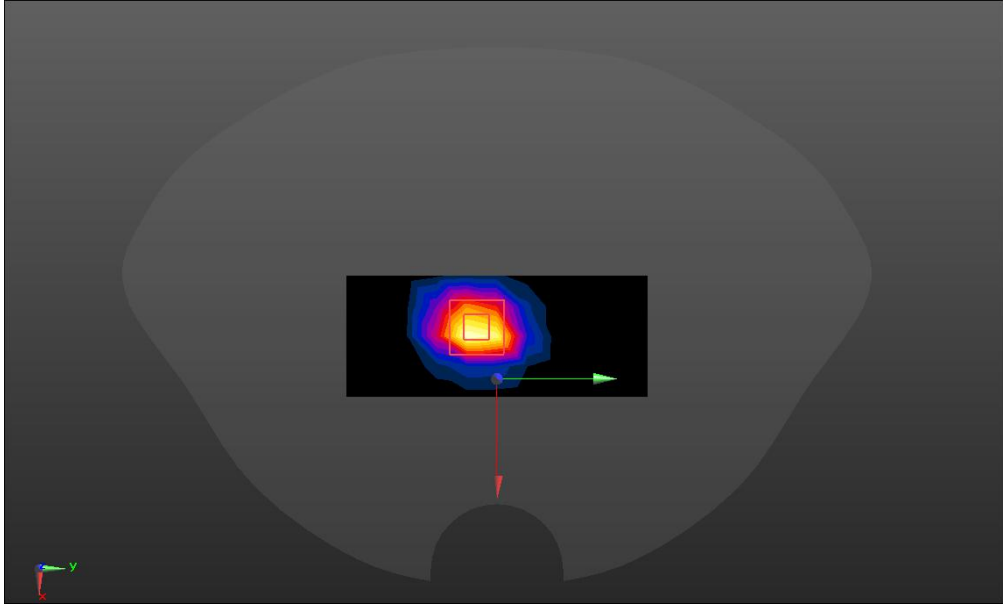
SRTC performed system check by using 250mw at antenna port

System check	2000MHz(2021.10.25)
Communication System: UID 0, CW (0); Frequency: 2000 MHz; Duty cycle:1:1 Medium parameters used: $f = 2000 \text{ MHz}$; $\sigma = 1.393 \text{ S/m}$; $\epsilon_r = 41.917$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.0, 5.0, 5.0); Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Configuration 2000/2000/Area Scan (7x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 8.40 W/kg Configuration 2000/2000/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 76.22 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 18.7 W/kg SAR(1 g) = 10.58 W/kg; SAR(10 g) = 5.08 W/kg Maximum value of SAR (measured) = 12.9 W/kg 	

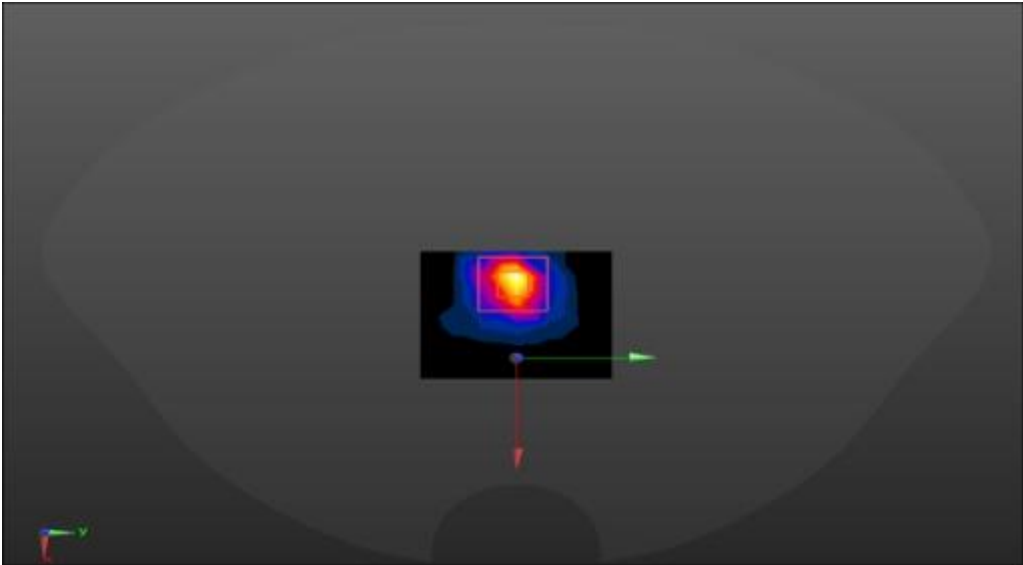
SRTC performed system check by using 250mw at antenna port

System check	2450MHz(2021.10.26)
Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty cycle:1:1 Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.835 \text{ S/m}$; $\epsilon_r = 39.044$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.5, 4.5, 4.5); Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) System Performance Check at Frequencies 2450 MHz/2450/Area Scan (8x11x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 21.2 W/kg System Performance Check at Frequencies 2450 MHz/2450/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 108.3 V/m; Power Drift = 0.19 dB Peak SAR (extrapolated) = 28.2 W/kg SAR(1 g) = 13.00 W/kg; SAR(10 g) = 5.92 W/kg Maximum value of SAR (measured) = 22.6 W/kg 	

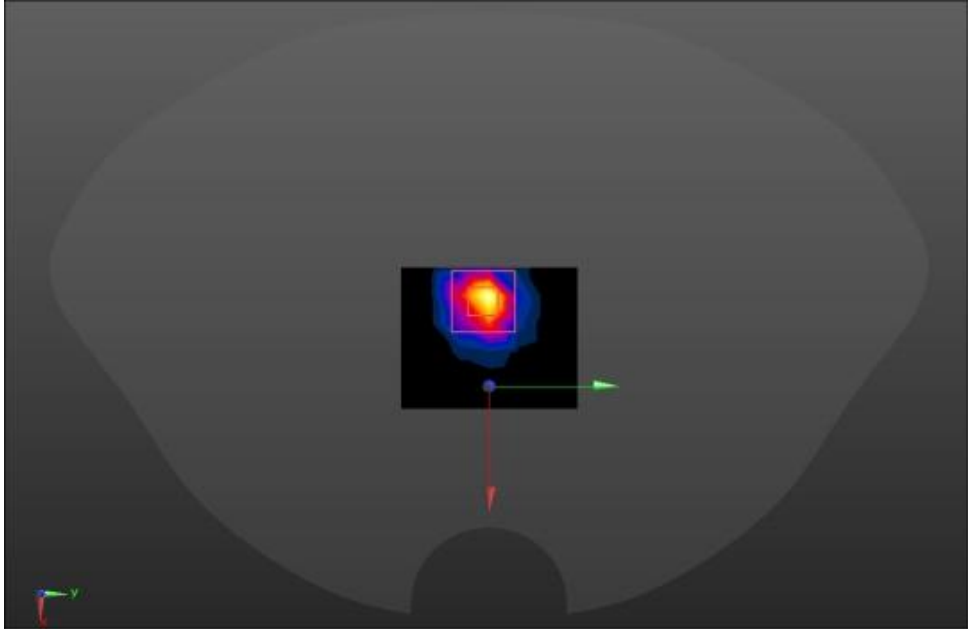
SRTC performed system check by using 250mw at antenna port

System check	2600MHz(2021.10.27)
Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 2600 \text{ MHz}$; $\sigma = 1.935 \text{ S/m}$; $\epsilon_r = 37.186$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.33, 4.33, 4.33); Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) SYSTEM CHECK 2600/Area Scan (5x11x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 22.7 W/kg SYSTEM CHECK 2600/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 102.2 V/m; Power Drift = 0.11 dB Peak SAR (extrapolated) = 33.7 W/kg SAR(1 g) = 14.82 W/kg; SAR(10 g) = 6.49 W/kg Maximum value of SAR (measured) = 26.6 W/kg 	

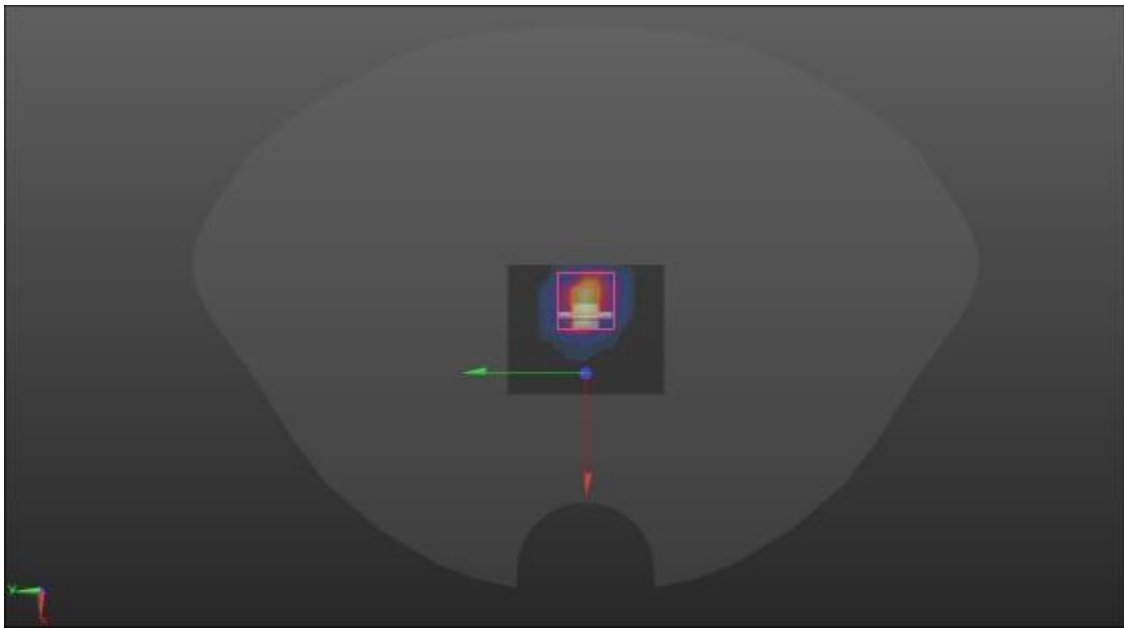
SRTC performed system check by using 250mw at antenna port

System check	5200MHz(2021.10.28)
Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 5200$ MHz; $\sigma = 4.861$ S/m; $\epsilon_r = 35.850$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.57, 5.57, 5.57) ; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Configuration 4/SYSTEM CHECK 5200MHz/Area Scan (6x7x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 1.85 W/kg Configuration 4/SYSTEM CHECK 5200MHz/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 11.17 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 3.42 W/kg SAR(1 g) = 0.78 W/kg; SAR(10 g) = 0.213 W/kg Maximum value of SAR (measured) = 2.16 W/kg 	

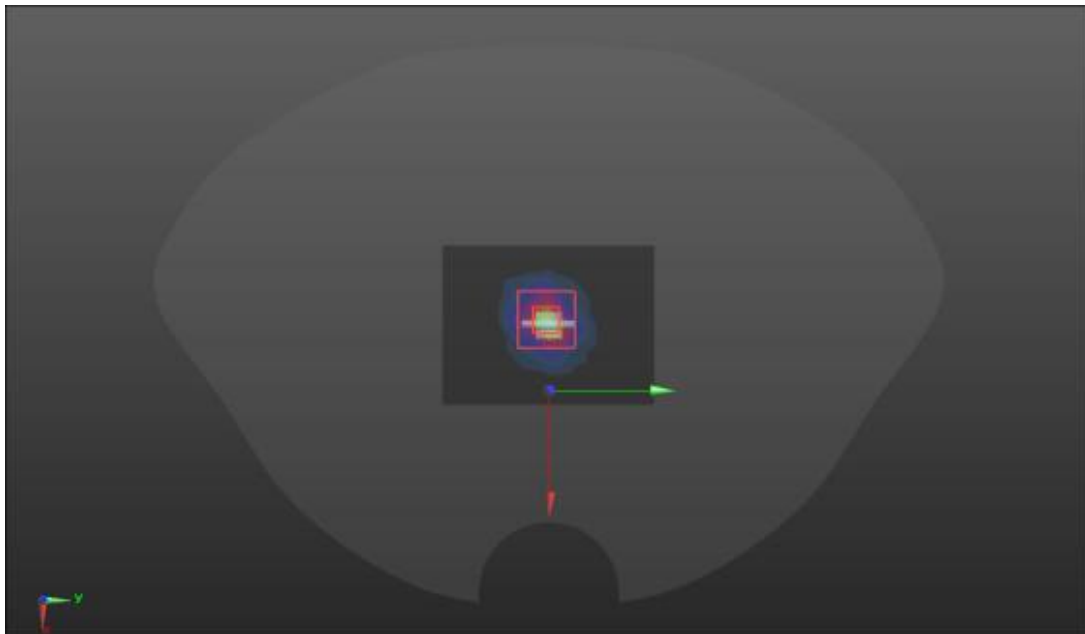
SRTC performed system check by using 10mw at antenna port

System check	5300MHz(2021.10.28)
Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 5300$ MHz; $\sigma = 4.861$ S/m; $\epsilon_r = 35.850$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.43, 5.43, 5.43) ; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/250 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Configuration 4/SYSTEM CHECK 5300MHz/Area Scan (6x7x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 1.77 W/kg Configuration 4/SYSTEM CHECK 5300MHz/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 10.42 V/m; Power Drift = 0.11 dB Peak SAR (extrapolated) = 3.85 W/kg SAR(1 g) = 0.79 W/kg; SAR(10 g) = 0.212 W/kg Maximum value of SAR (measured) = 2.19 W/kg 	

SRTC performed system check by using 10mw at antenna port

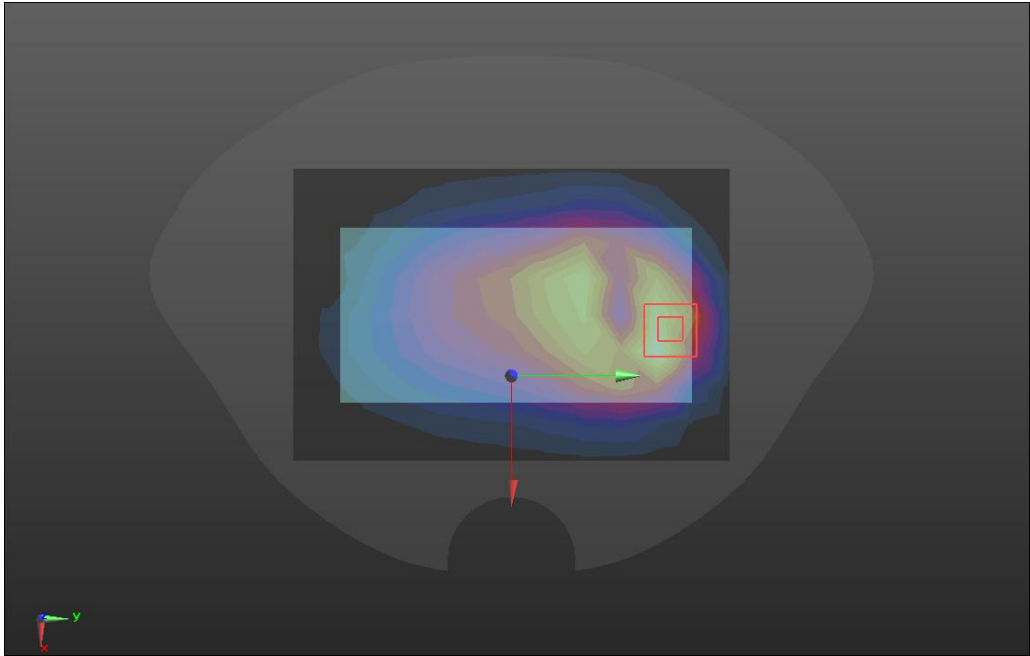
System check	5600MHz(2021.10.29)
Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 5600$ MHz; $\sigma = 4.856$ S/m; $\epsilon_r = 34.313$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(4.95, 4.95, 4.95) ; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Configuration 4/SYSTEM CHECK 5600MHz /Area Scan (6x7x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 1.71 W/kg Configuration 4/SYSTEM CHECK 5600MHz /Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 12.13 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 3.87 W/kg SAR(1 g) = 0.80 W/kg; SAR(10 g) = 0.224 W/kg Maximum value of SAR (measured) = 2.34 W/kg 	

SRTC performed system check by using 10mw at antenna port

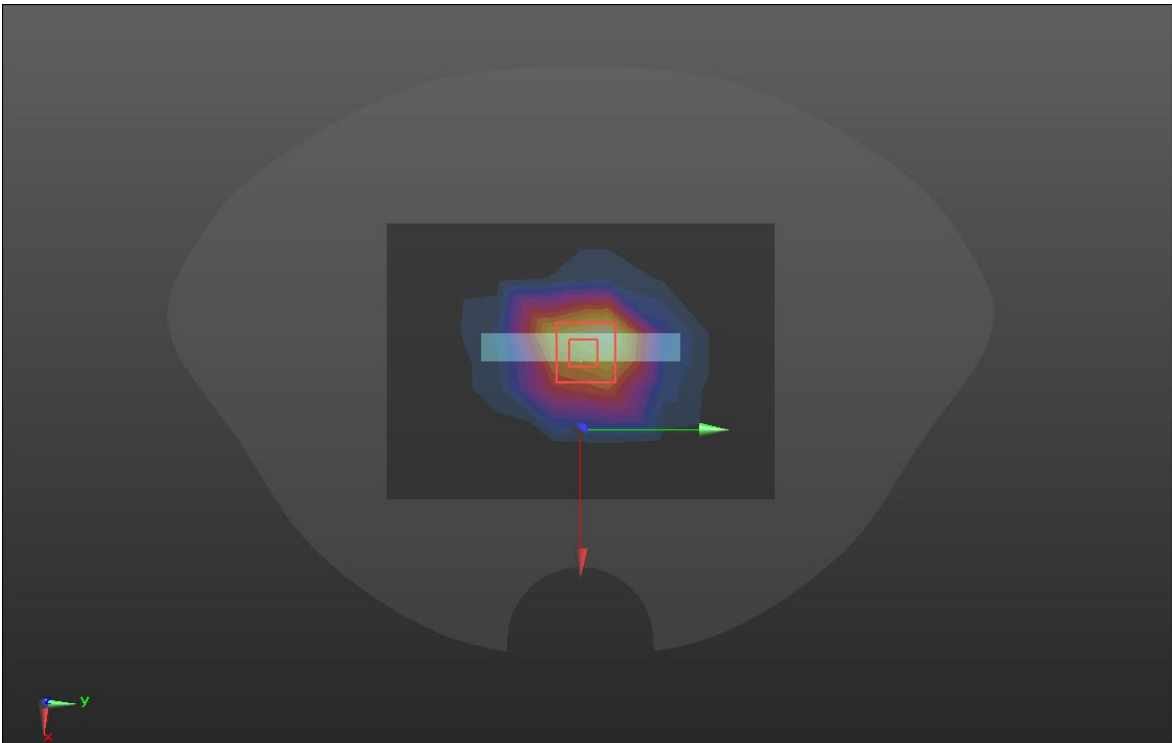
System check	5800MHz(2021.10.29)
Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 5.11 \text{ S/m}$; $\epsilon_r = 35.6$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.12, 5.12, 5.12); Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D5GV2 /D5800 SYSTEM CHECK 2/Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 1.81 W/kg D5GV2 /D5800 SYSTEM CHECK 2/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 14.34 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 3.45 W/kg SAR(1 g) = 0.78 W/kg; SAR(10 g) = 0.218 W/kg Maximum value of SAR (measured) = 1.89 W/kg 	

SRTC performed system check by using 10mw at antenna port

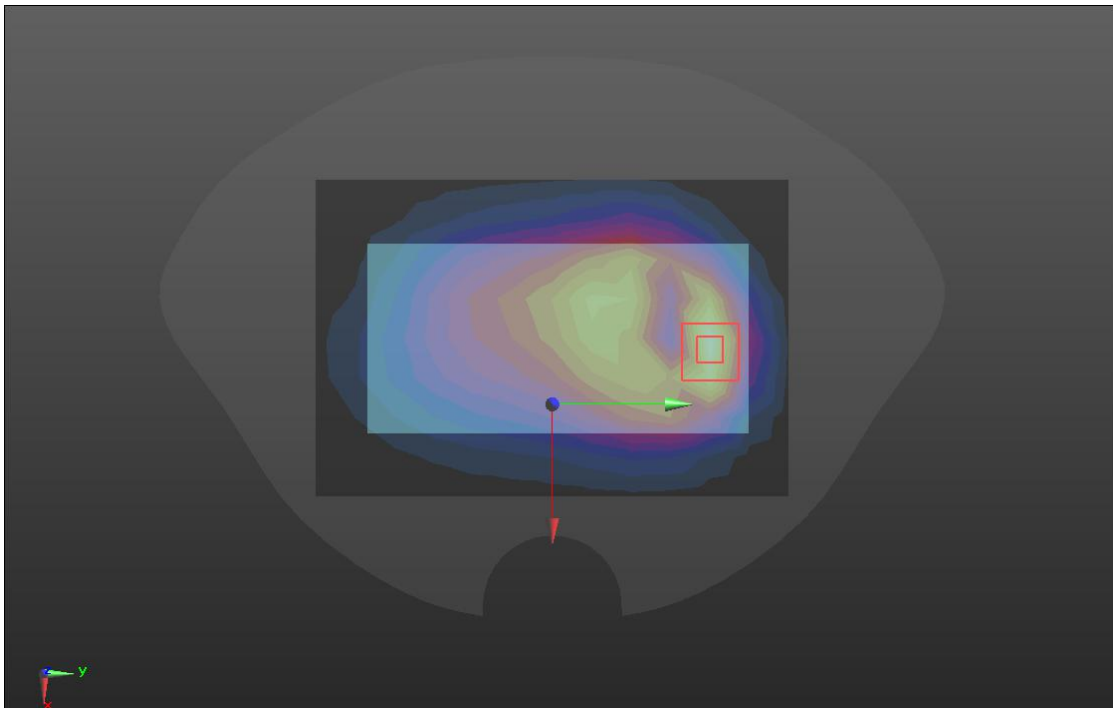
GSM 850

Hotspot	Front(2021.10.22)
Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 4:8 Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.905 \text{ S/m}$; $\epsilon_r = 41.528$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.13, 6.13, 6.13); Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) FRONT/GSM850/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.607 W/kg FRONT/GSM850/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 12.46 V/m; Power Drift = -0.09 dB Peak SAR (extrapolated) = 0.932 W/kg SAR(1 g) = 0.501 W/kg; SAR(10 g) = 0.265 W/kg	
	

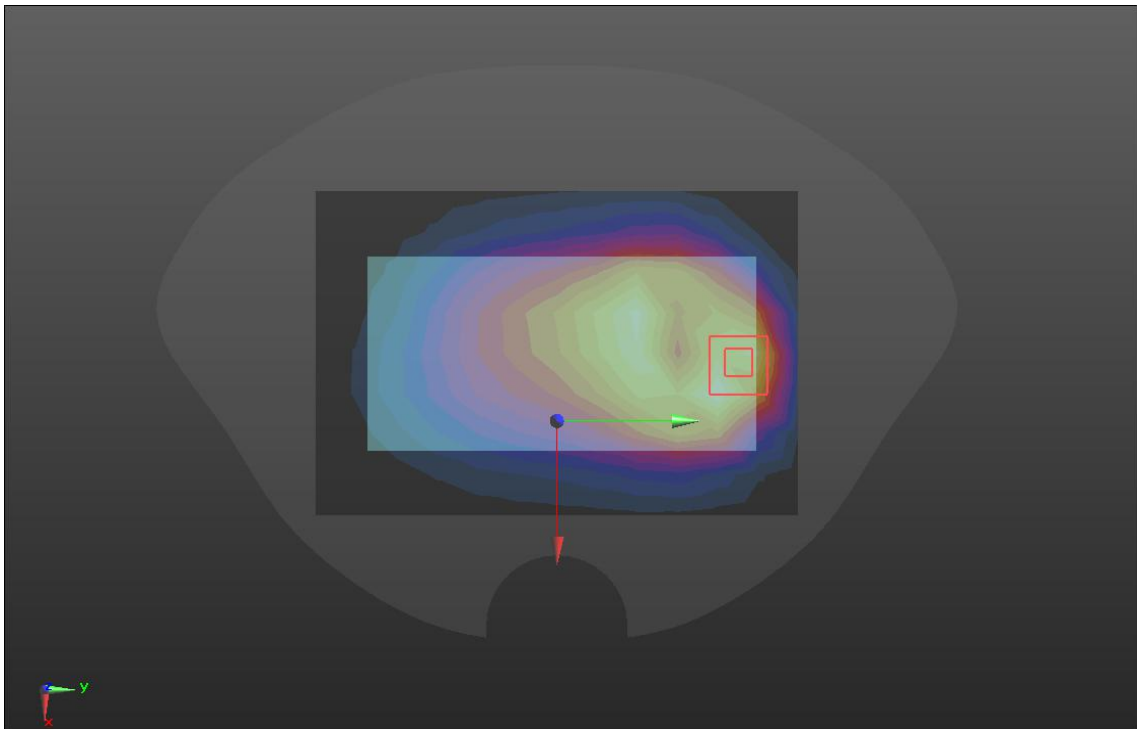
GSM 1900

Hotspot	Bottom(2021.10.24)
Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 4:8 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.08, 5.08, 5.08); Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BOTTOM/GSM1900/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm Maximum value of SAR (measured) = 0.788 W/kg BOTTOM/GSM1900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 26.58 V/m; Power Drift = -0.08 dB Peak SAR (extrapolated) = 1.39 W/kg SAR(1 g) = 0.591 W/kg; SAR(10 g) = 0.374 W/kg	
	

WCDMA BAND V

Hotspot	Front(2021.10.22)
Communication System: UID 0, WCDMA BAND 5 (0); Frequency: 836.6 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.13, 6.13, 6.13); Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) FRONT/W5/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.625 W/kg FRONT/W5/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 14.04 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 0.646 W/kg SAR(1 g) = 0.515 W/kg; SAR(10 g) = 0.283 W/kg	
	

LTE BAND 5

Hotspot	Front(2021.10.22)
Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.5 \text{ MHz}$; $\sigma = 0.905 \text{ S/m}$; $\epsilon_r = 41.528$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.13, 6.13, 6.13); Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) FRONT/LTE B5/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.438 W/kg FRONT/LTE B5/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 12.73 V/m; Power Drift = -0.00 dB Peak SAR (extrapolated) = 0.537 W/kg SAR(1 g) = 0.399 W/kg; SAR(10 g) = 0.223 W/kg 	

LTE BAND 12

Hotspot	Front (2021.10.21)
---------	--------------------

Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 42.115$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3127; ConvF(6.35, 6.35, 6.35); Calibrated: 2021/8/27;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn546; Calibrated: 2021/8/25
- Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

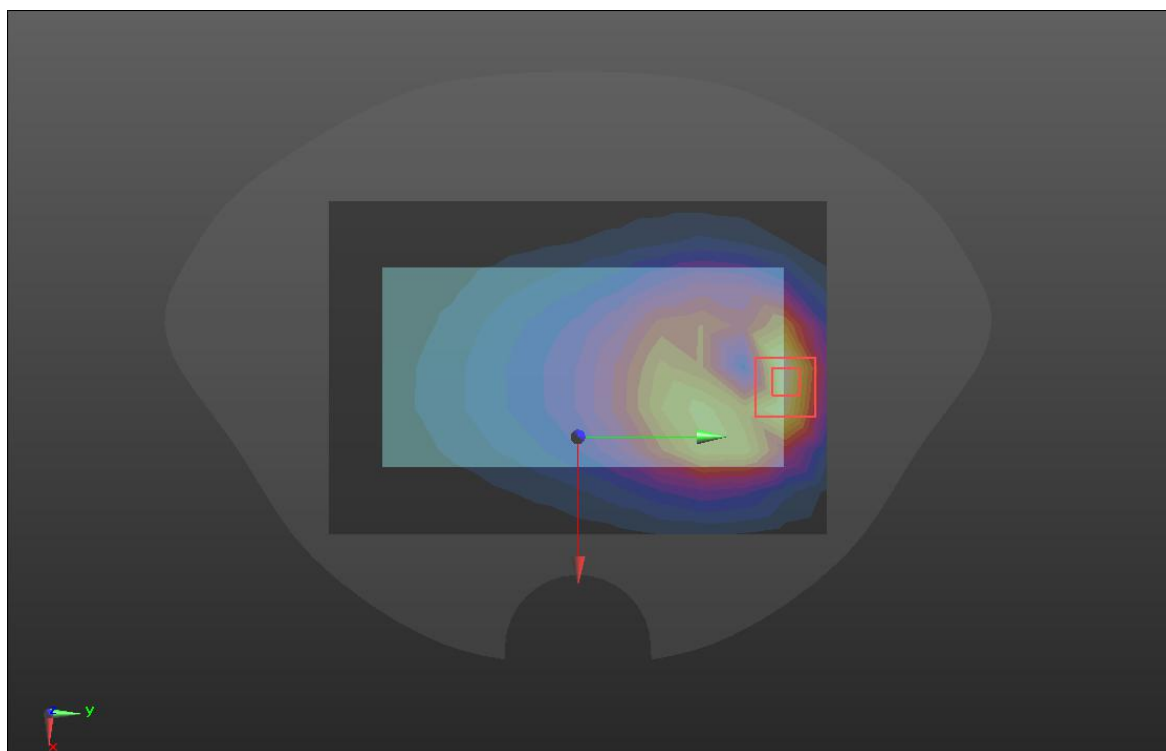
FRONT/LTE B12/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.382 W/kg

FRONT/LTE B12/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

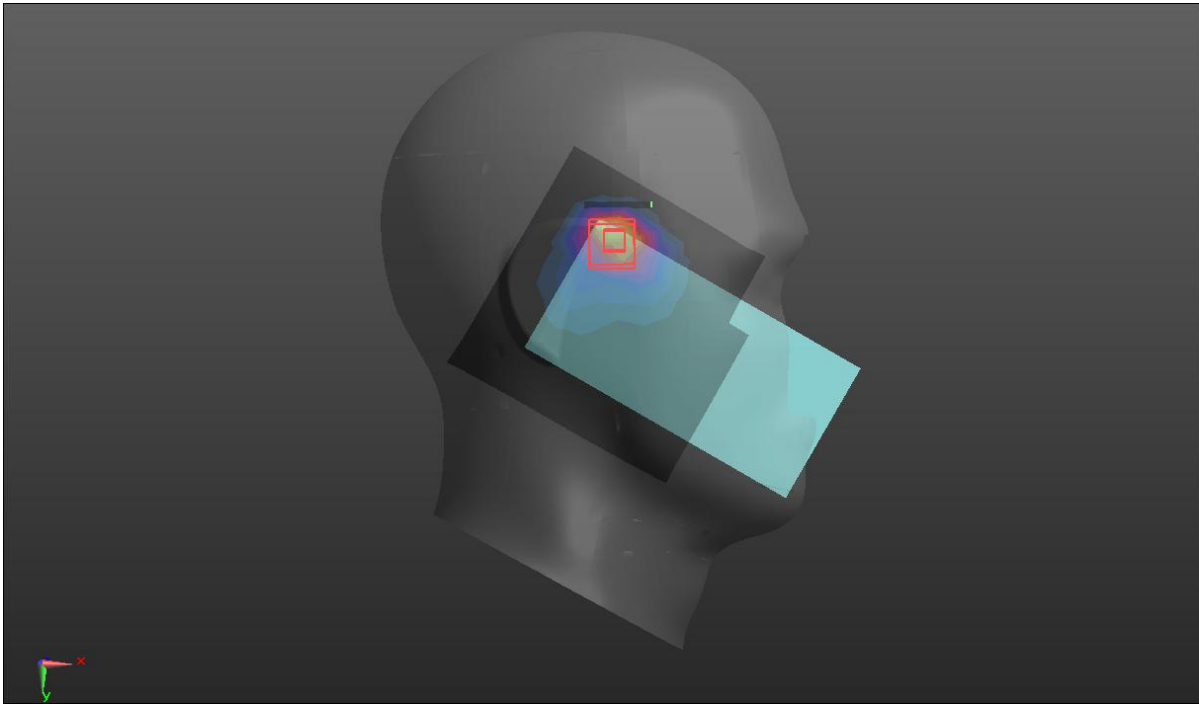
Reference Value = 11.621 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.567 W/kg

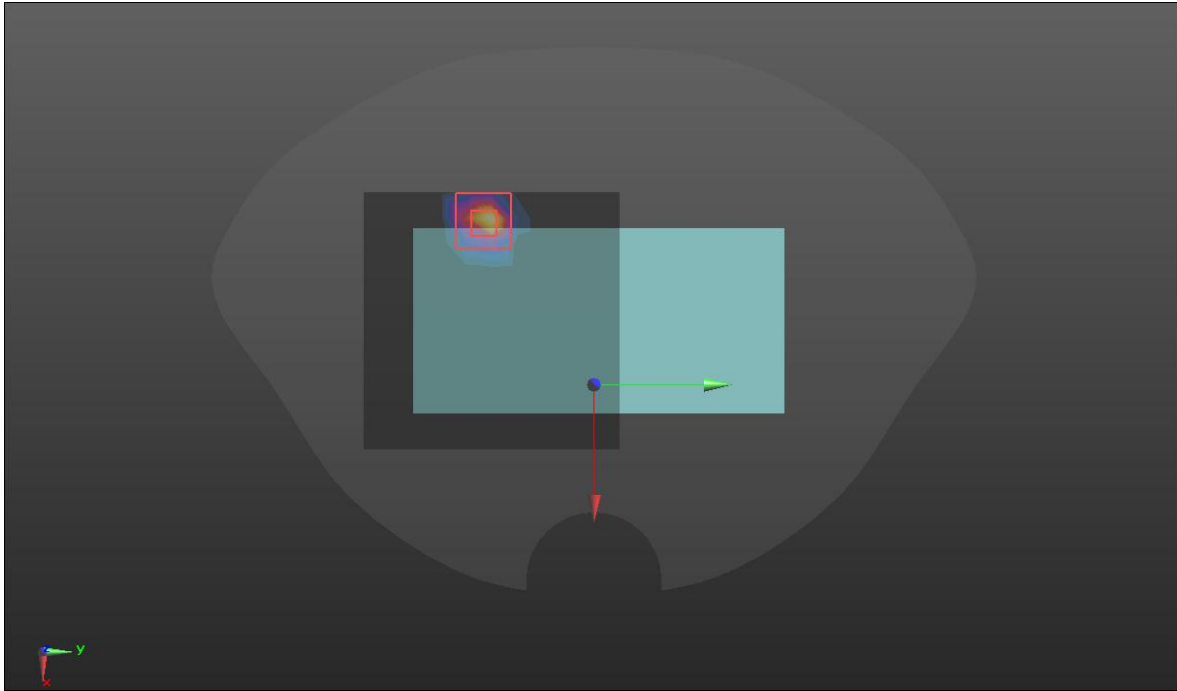
SAR(1 g) = 0.364 W/kg; SAR(10 g) = 0.285 W/kg



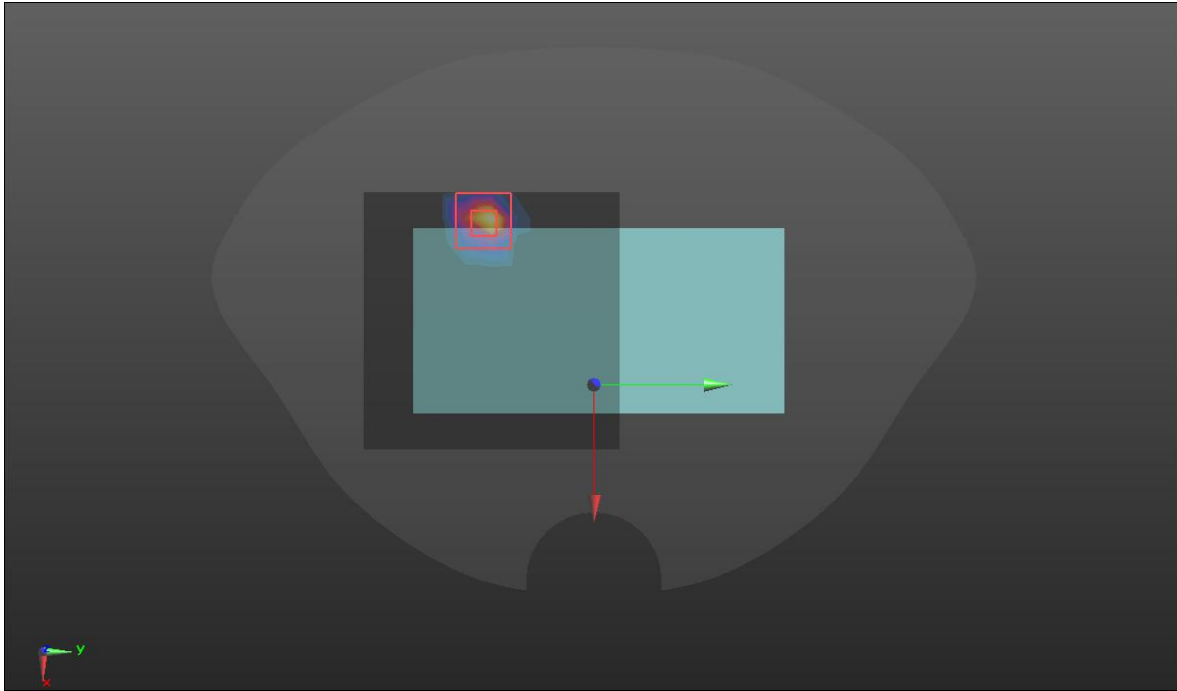
WIFI 2.4GHz

Head	Right cheek(2021.10.26)
Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2437 MHz; Duty Cycle: 1:0.9968 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 39.219$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.5, 4.5, 4.5); Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) RC/WIFI 2.4/Area Scan (11x11x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.952 W/kg RC/WIFI 2.4/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 2.88 V/m; Power Drift = 0.10 dB Peak SAR (extrapolated) = 2.04 W/kg SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.131 W/kg	
	

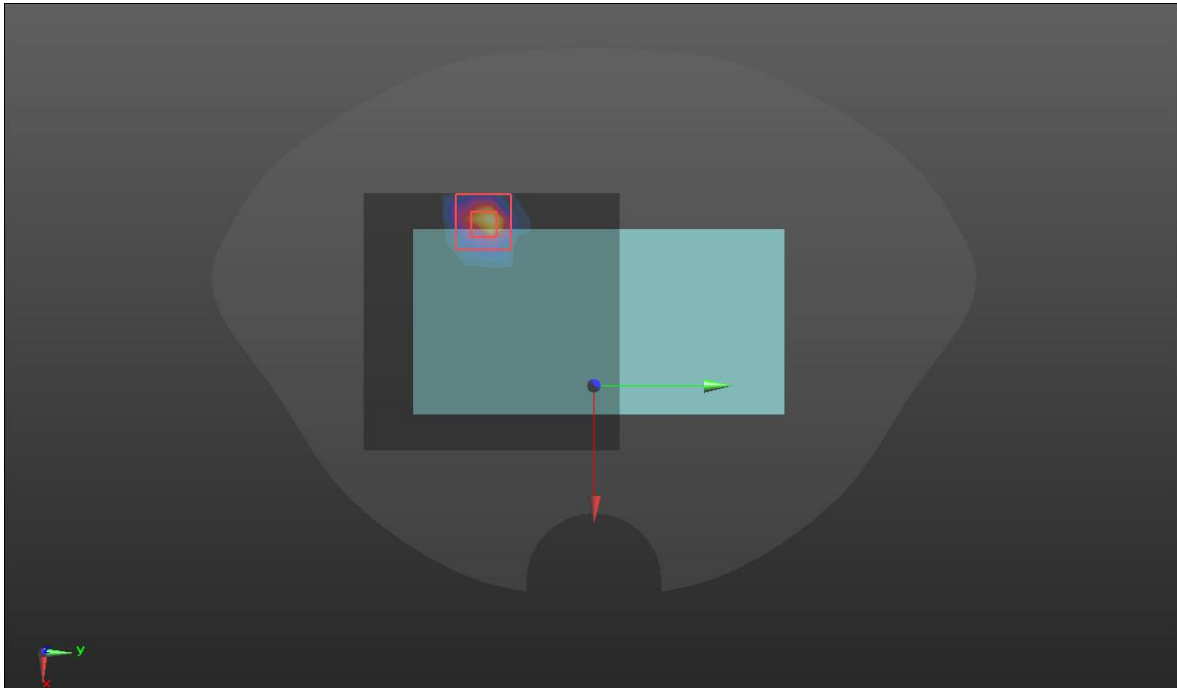
WIFI 5GHz UNII-1

Body	Back(2021.10.28)
Communication System: UID 0, WIFI 802.11 5GHz (0); Frequency: 5180 MHz ;Duty Cycle: 1:9952 Medium parameters used (interpolated): $f = 5220$ MHz; $\sigma = 4.68$ S/m; $\epsilon_r = 35.98$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.57, 5.57, 5.57); Calibrated: 2020/10/30; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Back /WIFI 5.2/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 1.85 W/kg Back /WIFI 5.2/Zoom Scan (6x6x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm Reference Value = 4.314 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 3.99 W/kg SAR(1 g) = 0.794 W/kg; SAR(10 g) = 0.657 W/kg	
	

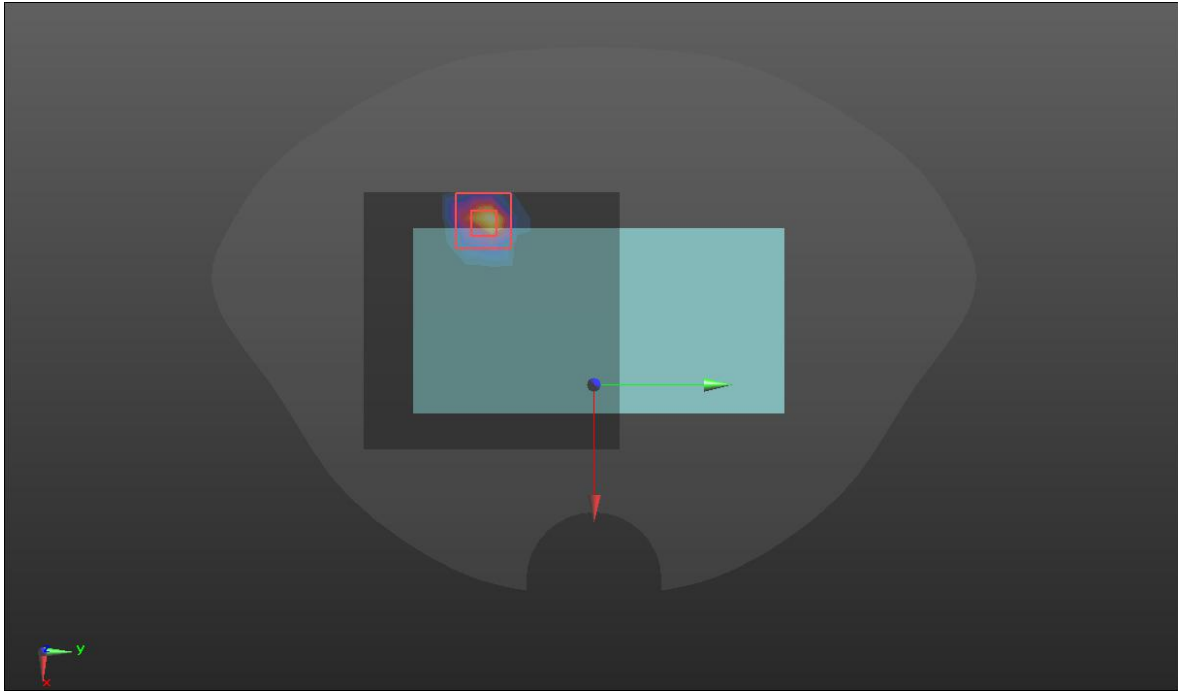
WIFI 5GHz UNII-2A

Body	Back(2021.10.28)
Communication System: UID 0, WIFI 802.11 5GHz (0); Frequency: 5280 MHz; Duty Cycle: 1:9948 Medium parameters used (interpolated): $f = 5280$ MHz; $\sigma = 4.74$ S/m; $\epsilon_r = 35.92$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.43, 5.43, 5.43); Calibrated: 2020/10/30; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Back /WIFI 5.3/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 1.87 W/kg Back /WIFI 5.3/Zoom Scan (6x6x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm Reference Value = 2.543 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 2.98 W/kg SAR(1 g) = 0.673 W/kg; SAR(10 g) = 0.525 W/kg	
	

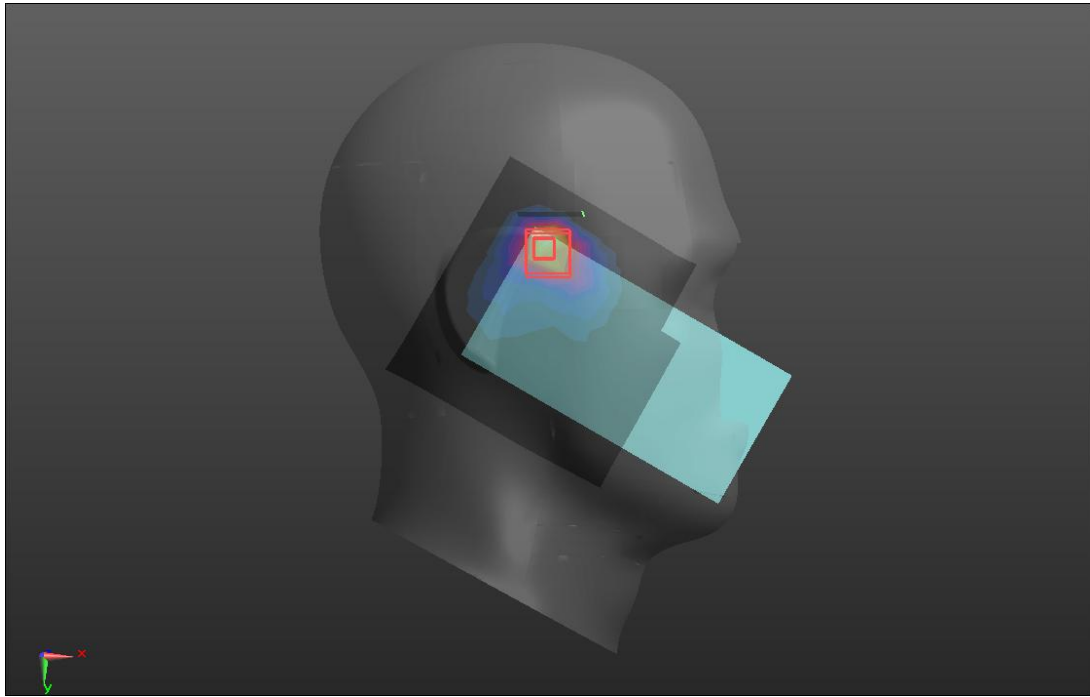
WIFI 5GHz UNII-2C

Head	Back (2021.10.29)
Communication System: UID 0, WIFI 802.11 5GHz (0); Frequency: 5580 MHz; Duty Cycle: 1:9954 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.07$ S/m; $\epsilon_r = 35.5$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(4.95, 4.95, 4.95); Calibrated: 2020/10/30; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Back /WIFI 5.6/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 0.93 W/kg Back /WIFI 5.6/Zoom Scan (6x6x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm Reference Value = 1.408 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 1.92 W/kg SAR(1 g) = 0.269 W/kg; SAR(10 g) = 0.174 W/kg	
	

WIFI 5GHz UNII-3

Head	Back (2021.10.29)
Communication System: UID 0, WIFI 802.11 5GHz (0); Frequency: 5785 MHz; Duty Cycle: 1:9956 Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.255$ S/m; $\epsilon_r = 35.315$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/10/30; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Back /WIFI 5.8/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 1.22 W/kg Back /WIFI 5.8/Zoom Scan (6x6x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm Reference Value = 1.595 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 2.83 W/kg SAR(1 g) = 0.371 W/kg; SAR(10 g) = 0.197 W/kg	
	

Bluetooth

Head	Right cheek(2021.10.26)
Communication System: UID 0, BT (0); Frequency: 2441 MHz; Duty Cycle: 1:0.902 Medium parameters used (interpolated): $f = 2441 \text{ MHz}$; $\sigma = 1.792 \text{ S/m}$; $\epsilon_r = 39.213$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.5, 4.5, 4.5); Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) RC/BT/Area Scan (11x11x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 0.456 W/kg RC/BT/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 7.470 V/m; Power Drift = 0.11 dB Peak SAR (extrapolated) = 1.02 W/kg SAR(1 g) = 0.417 W/kg; SAR(10 g) = 0.173 W/kg	
	

Note: All the modulated signal with different PAR (refers to RF WWAN report) already take into account, but not mentioned in this inherent log file template.