



Shen zhen Runicc Wirless Technology Co., LTD

Antenna Spec.

Customer/Project	HK/SW02	Frequency	908. 42±20MHz
RN P/N		Rev.	A
RF. Engineer	Jiang Ning	Approval By	
Structural Engineer	Tong		
Date	2017-05-10		
Customer Confirm			
Shenzhen Runicc Wireless Technology Co., Ltd			


Customer Satisfaction Questionnaire (Please comment on the work of our R & D and PM managers in order to better serve to you)			
RF Engineer	☐ Satisfaction	☐ Quite Satisfaction	☐ Dissatisfaction
Structural Engineer	☐ Satisfaction	☐ Quite Satisfaction	☐ Dissatisfaction
PM Manager	☐ Satisfaction	☐ Quite Satisfaction	☐ Dissatisfaction
Note:			

www.Runicc.com

Runicc Wireless Technology has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of Runicc Communication Technology.

1、Antenna Diagram

The report focuses on the test status of the SW02 main antenna with respect to various electrical performance parameters. the SW02 antenna diagram and the assembly diagram are shown below.



Antenna Diagram

2、Antenna test Equipment

Agilent E5071C vector network analyzer is used for antenna input characteristic test; Satimo starlab 3D near-field microwave darkroom is used for antenna radiation characteristic test. And Agilent 8960 E5515 comprehensive tester is used. The OTA coordinates are as follows:

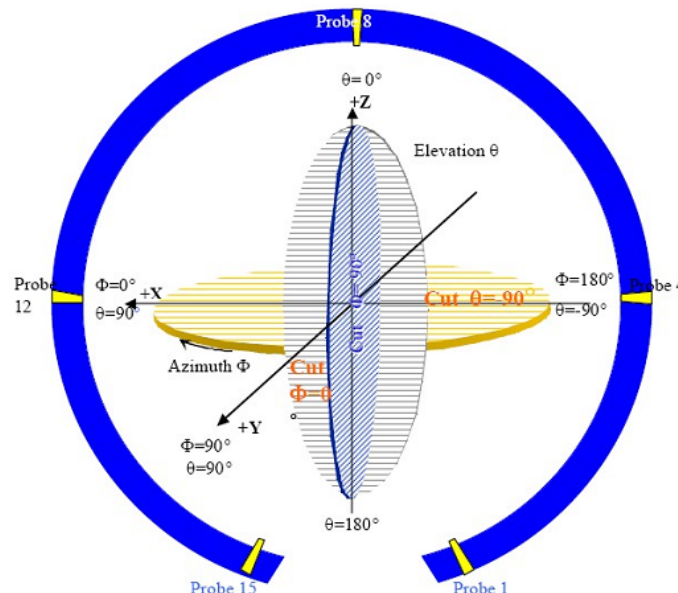



图 4 3D 微波暗室测试坐标系 (back view)

www.Runicc.com

Runicc Wireless Technology has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of Runicc Wireless Technology.

3. Antenna matching circuit

The antenna is made of a single spring soldered to the main board. Antenna matching circuit no changed, as follow original main-board .

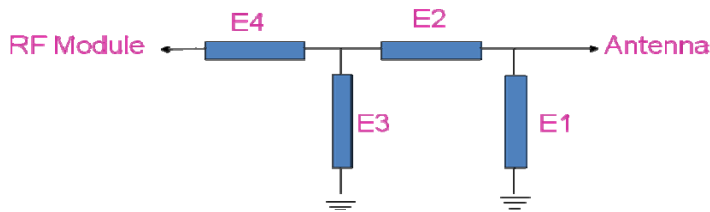

Element	Value
E1(0402)	原贴片匹配
E2(0402)	0 Ω
E3(0402)	NA
E4(0402)	0 Ω

4. Electrical Characteristics

4.1 Specification


The SW02 main antenna operates in the frequency band 908.4 ± 20 MHz; resonance is generated in this band. The following table shows the test specifications for the performance of the SW02 main antenna.

Frequency Band	VSWR
888.4MHz	1. 94
908.4MHz	1. 31
916MHz	1. 57
928.4MHz	2. 13

www.Runicc.com

Runicc Wireless Technology has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of Runicc Wireless Technology.

4.2 Passive S11 parameter:

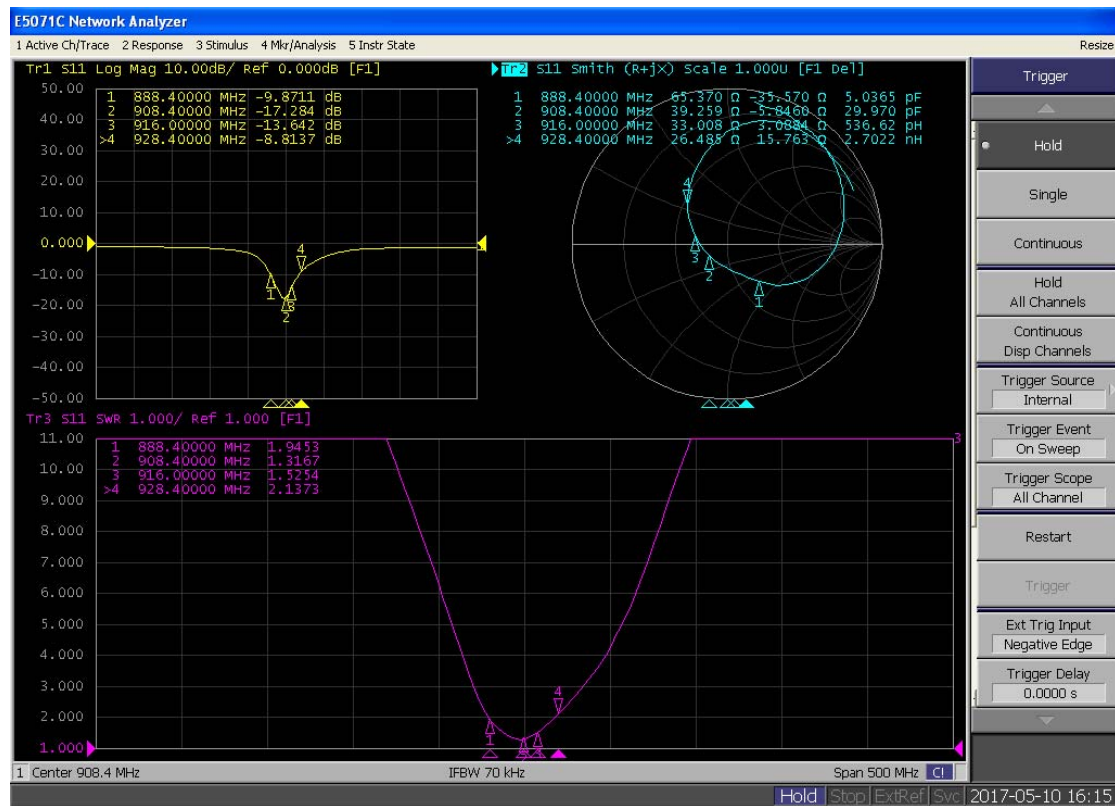

4.3 Antenna Gain&EFFIC.

chNo	Freq	TRP	PeakEIRP	MinEIRP	Directivity	Gain	Efficiency_dB	Efficiency_Pcent
1	888.4	-8.81	-4.47	-22.21	4.35	-4.47	-8.81	13.14
2	892.4	-8.19	-3.92	-22.06	4.28	-3.92	-8.19	15.15
3	896.4	-7.72	-3.70	-22.11	4.02	-3.70	-7.72	16.90
4	900.4	-7.45	-3.47	-22.40	3.98	-3.47	-7.45	18.00
5	904.4	-7.17	-2.98	-21.35	4.19	-2.98	-7.17	19.17
6	908.4	-6.99	-2.56	-21.53	4.42	-2.56	-6.99	20.02
7	912.4	-6.88	-2.27	-22.57	4.62	-2.27	-6.88	20.50
8	916.4	-6.81	-2.03	-22.82	4.78	-2.03	-6.81	20.85
9	920.4	-6.76	-1.82	-21.64	4.94	-1.82	-6.76	21.10
10	924.4	-6.82	-1.61	-20.58	5.20	-1.61	-6.82	20.81
11	928.4	-6.73	-1.27	-19.43	5.46	-1.27	-6.73	21.23

www.Runicc.com

Runicc Wireless Technology has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of Runicc Wireless Technology.

