

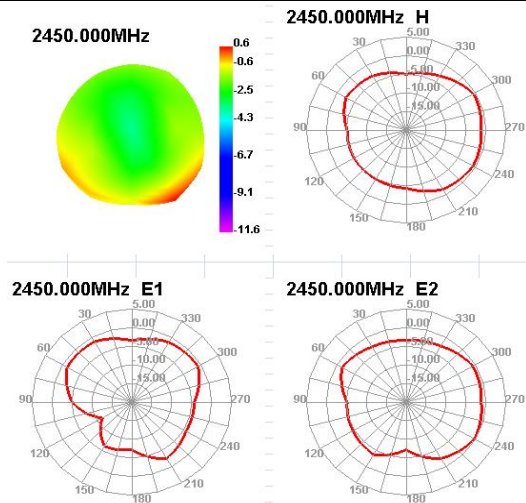




# V5\_PCB1\_V02

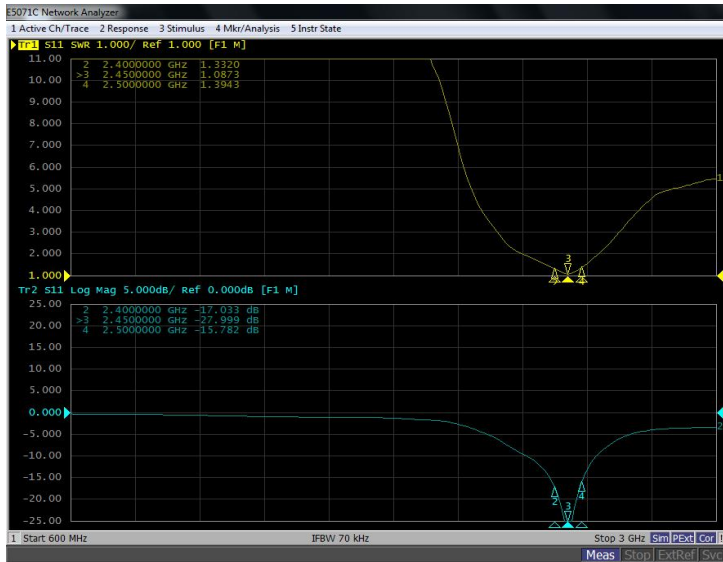

| Freq (MHz) | Effi (%) | Gain (dBi) |
|------------|----------|------------|
| 2400       | 48.81    | -0.05      |
| 2410       | 47.83    | -0.18      |
| 2420       | 49.69    | 0.01       |
| 2430       | 54.99    | 0.41       |
| 2440       | 52.46    | 0.13       |
| 2450       | 57.97    | 0.58       |
| 2460       | 52.36    | 0.14       |
| 2470       | 50.73    | -0.09      |
| 2480       | 52.89    | 0.11       |
| 2490       | 53.03    | -0.02      |
| 2500       | 48.55    | -0.44      |

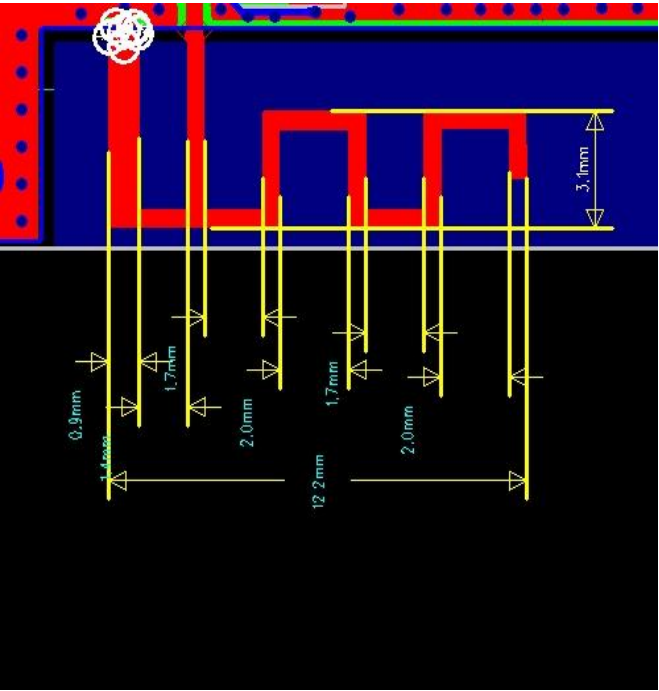

# V5\_PCB2\_V02

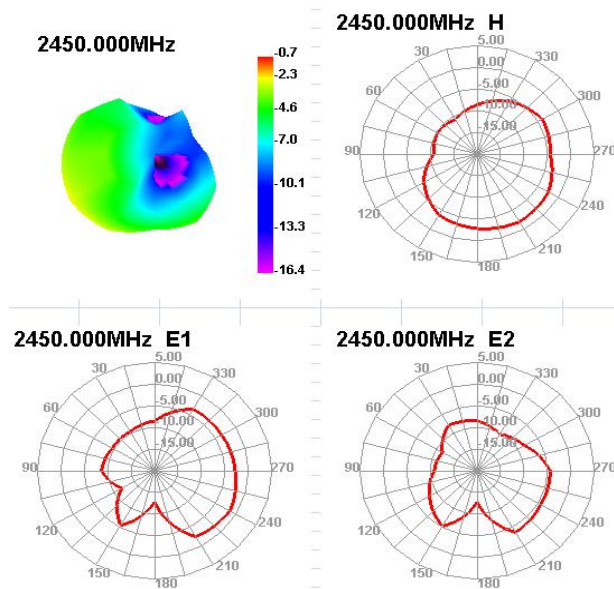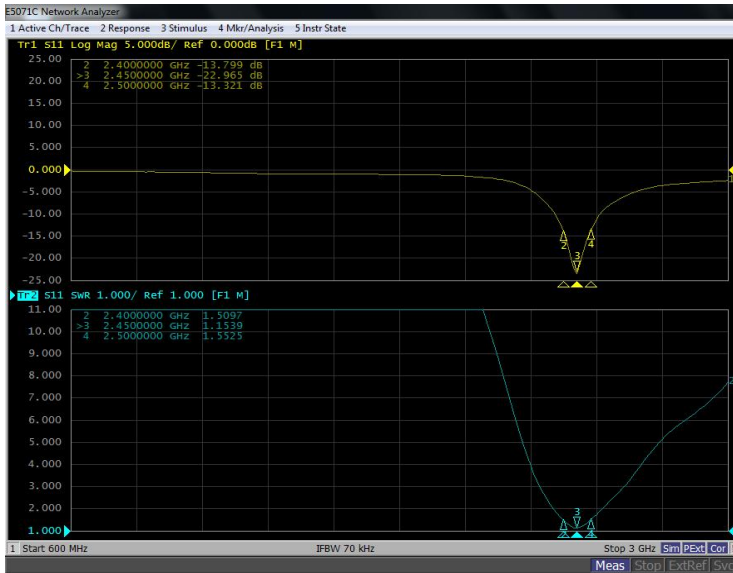

| Freq (MHz) | Effi (%) | Gain (dBi) |
|------------|----------|------------|
| 2400       | 26.54    | -0.88      |
| 2410       | 24.59    | -1.25      |
| 2420       | 25.83    | -1.15      |
| 2430       | 27.81    | -0.9       |
| 2440       | 27.5     | -0.93      |
| 2450       | 30.03    | -0.73      |
| 2460       | 26.18    | -1.12      |
| 2470       | 25.4     | -1.16      |
| 2480       | 25.64    | -1.05      |
| 2490       | 26.34    | -0.81      |
| 2500       | 23.16    | -0.35      |

