





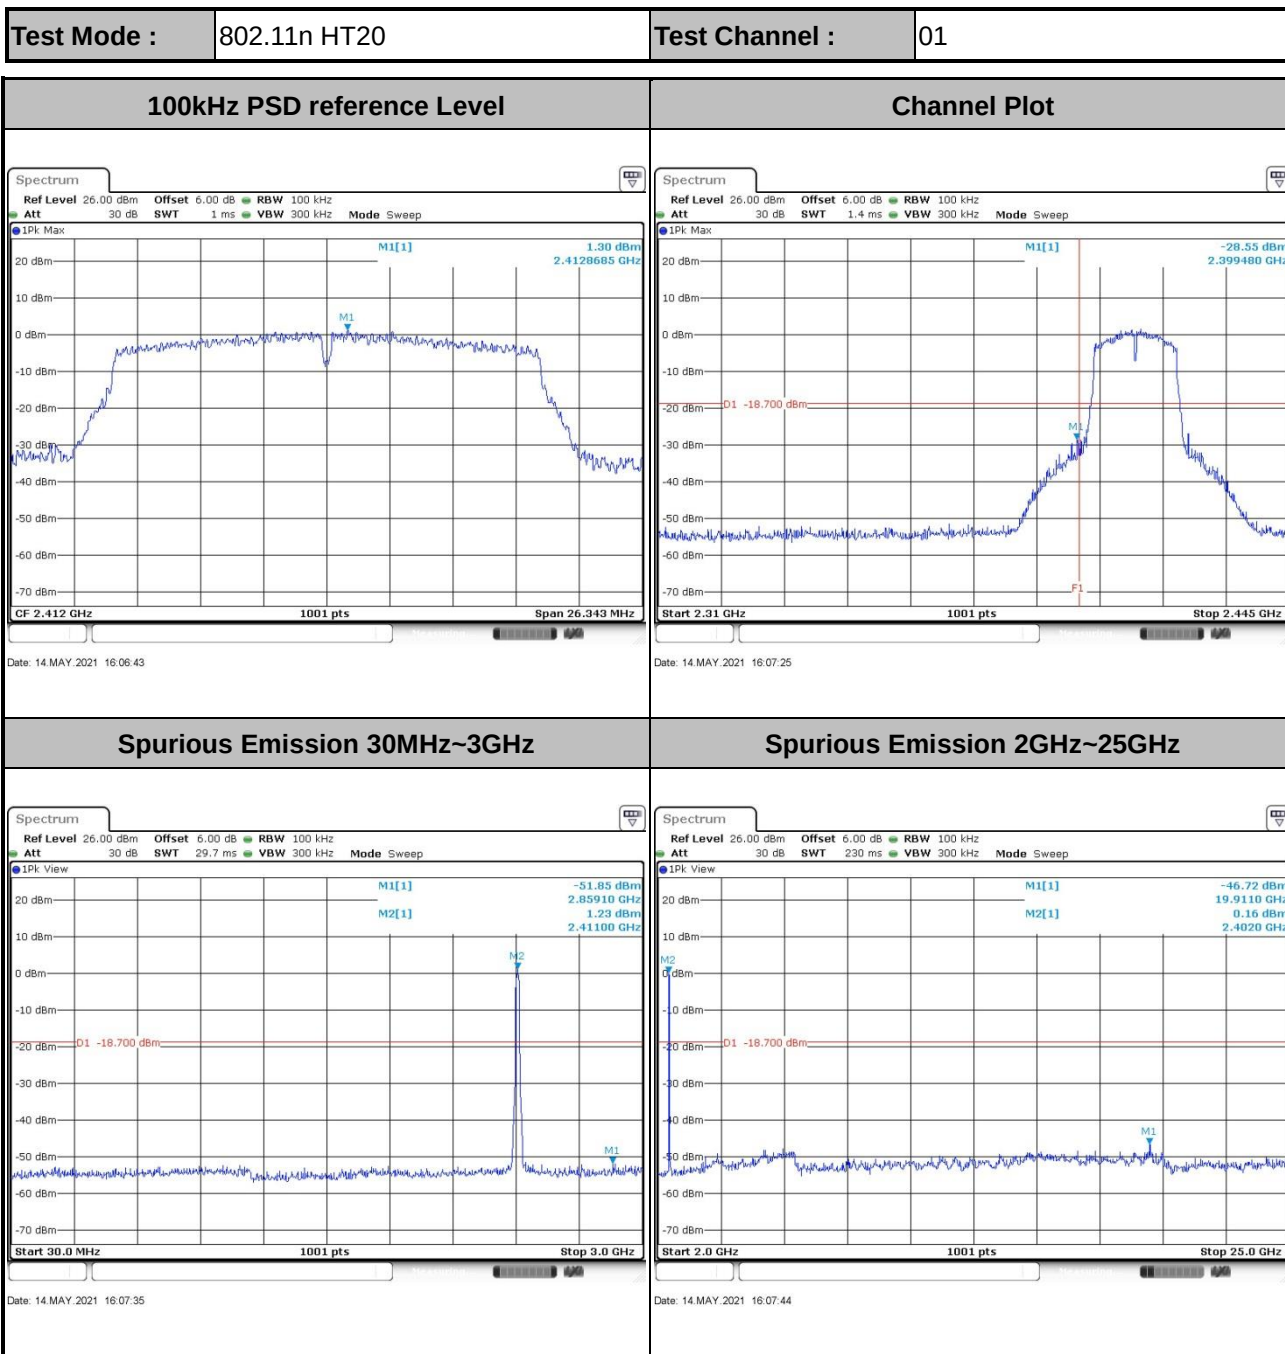


Test Mode : 802.11n HT20

Test Channel : 02


100kHz PSD reference Level

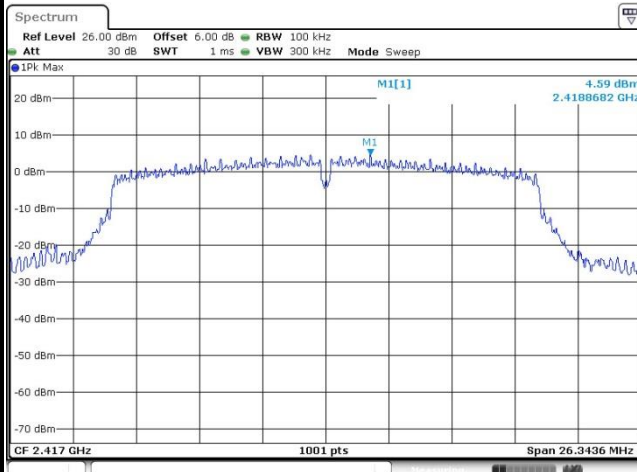


Channel Plot

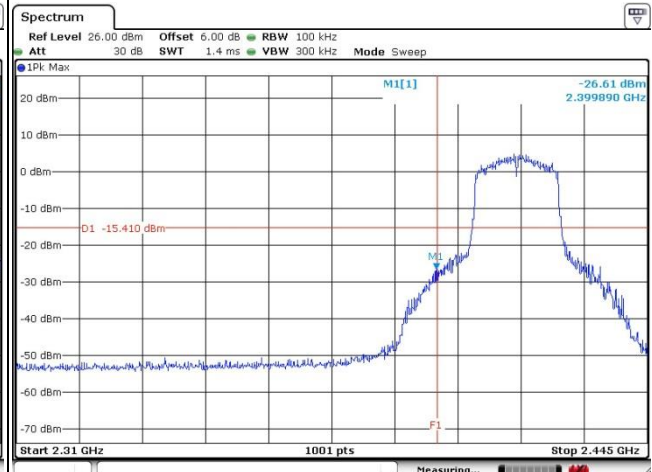

Spurious Emission 30MHz~3GHz

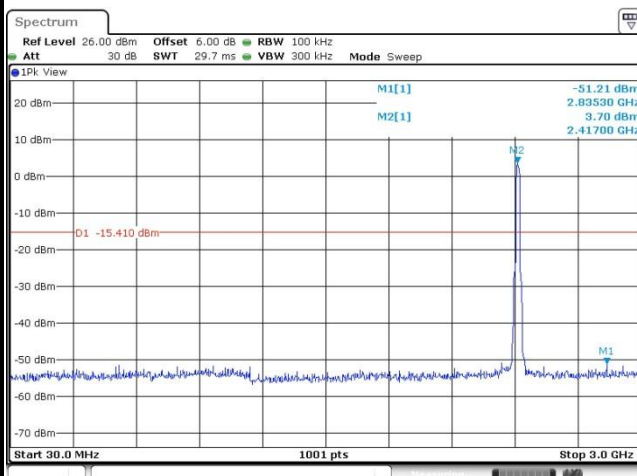


Spurious Emission 2GHz~25GHz

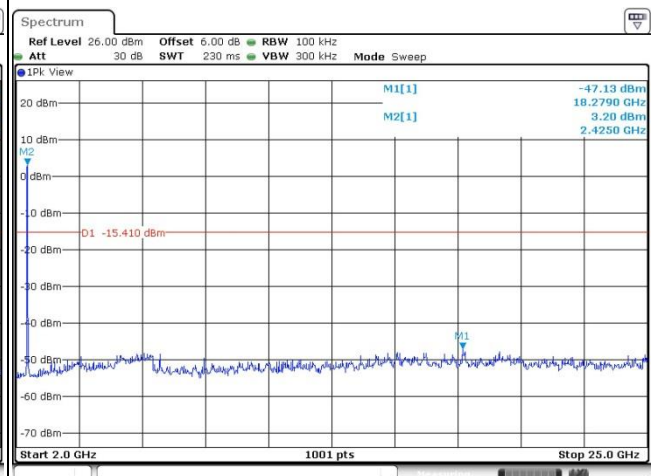




Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----


100kHz PSD reference Level

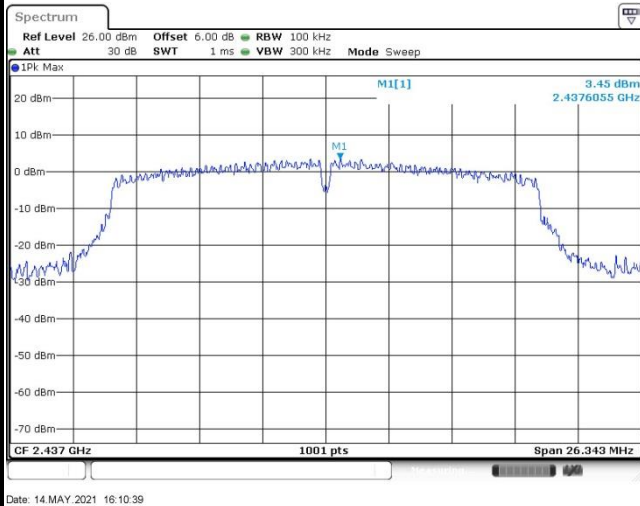

Spurious Emission 30MHz~3GHz

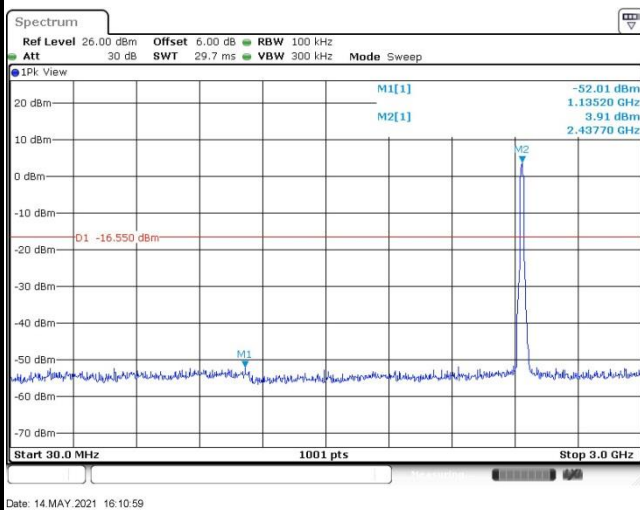


Spurious Emission 2GHz~25GHz

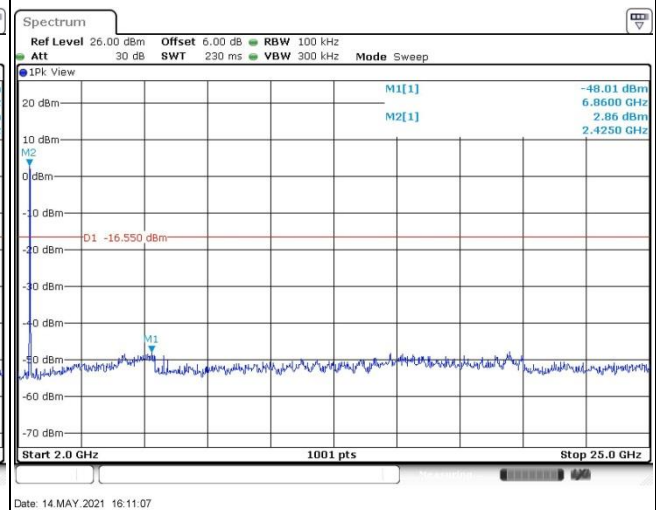




Test Mode :	802.11n HT20	Test Channel :	10
-------------	--------------	----------------	----

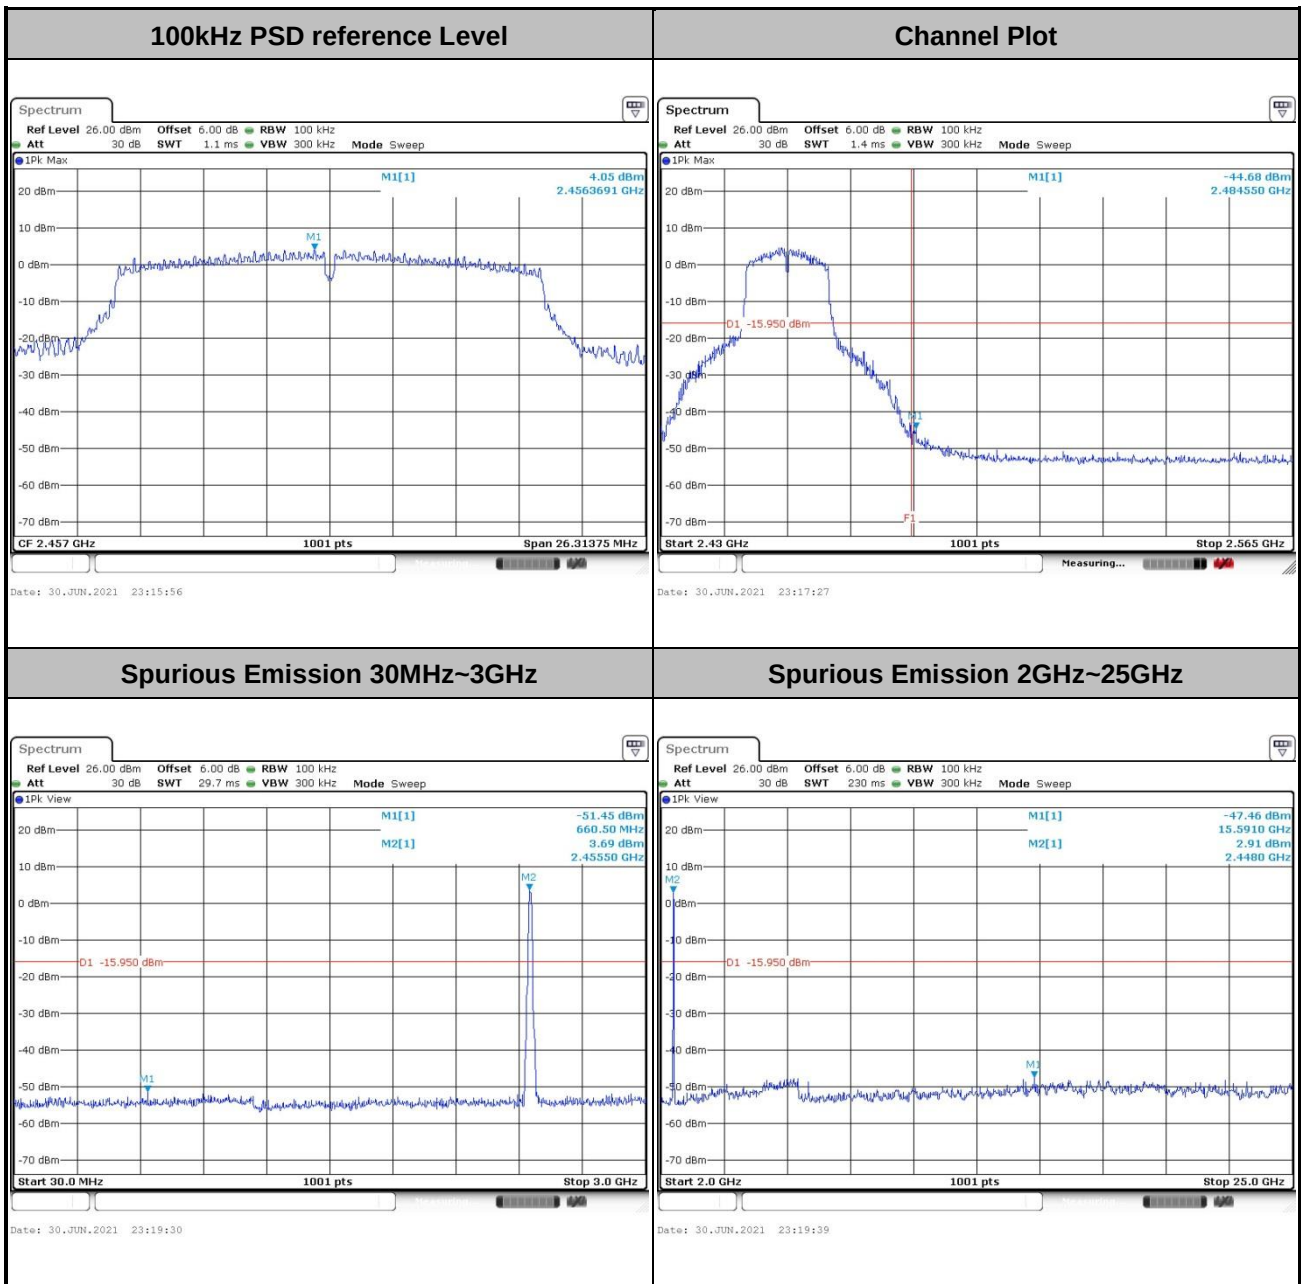



Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

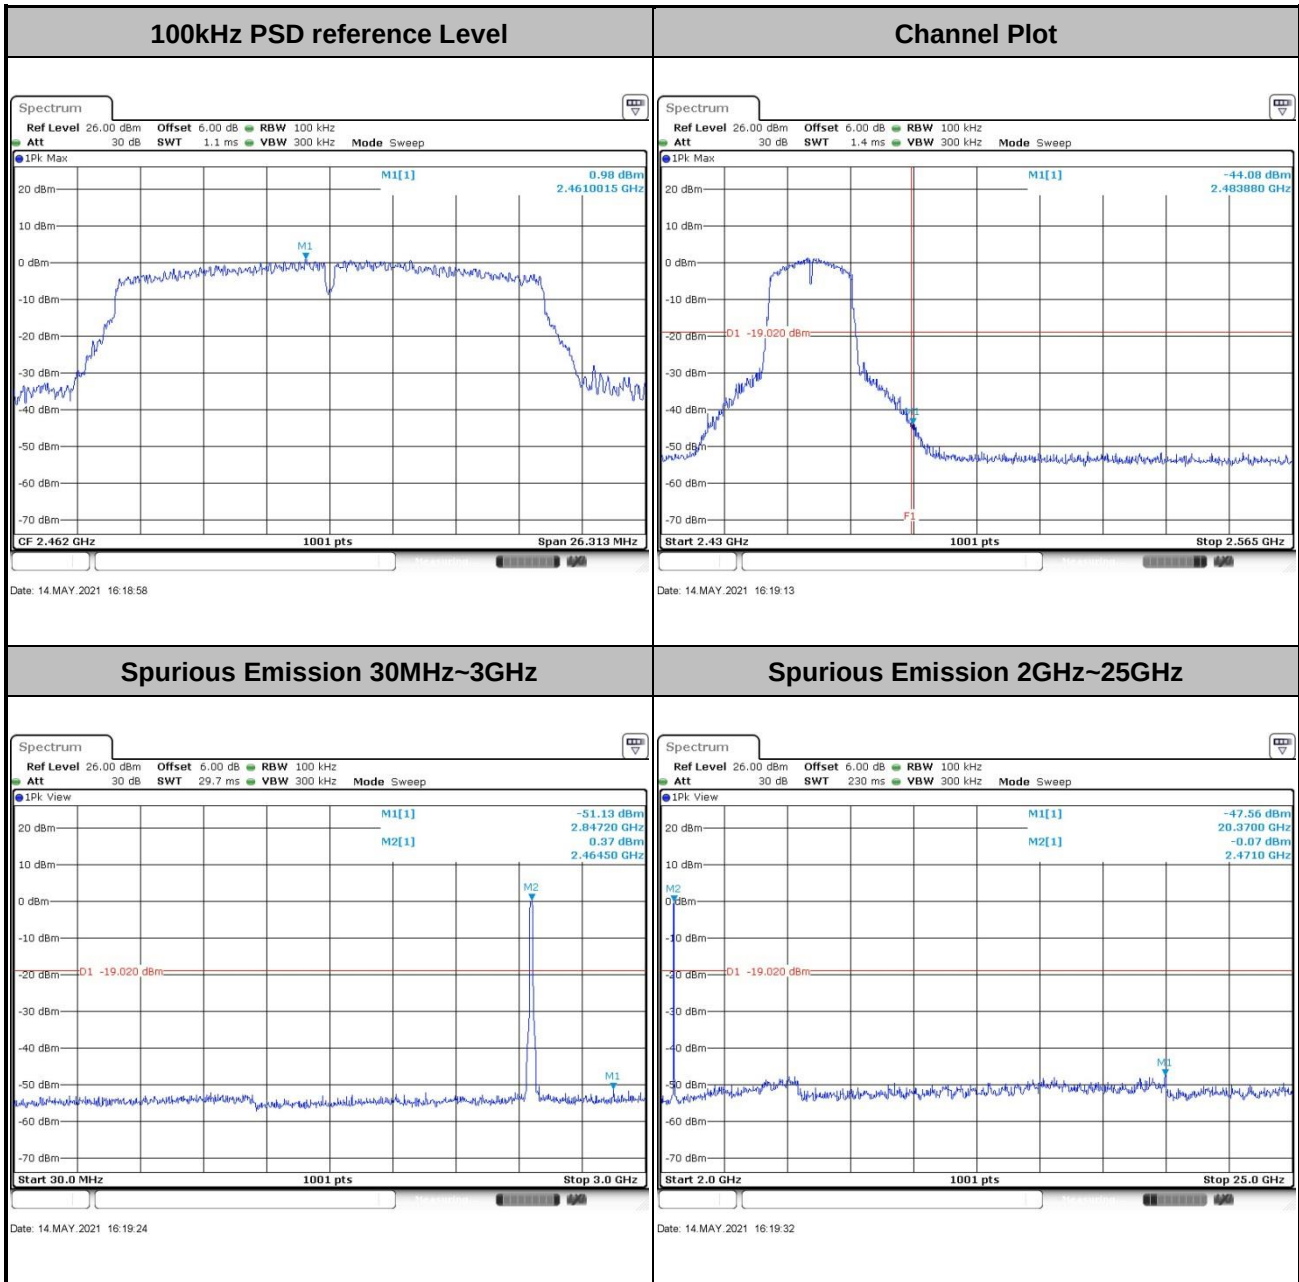

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
 - Detector function = peak;

3.5.4 Test Setup


For radiated emissions below 30MHz

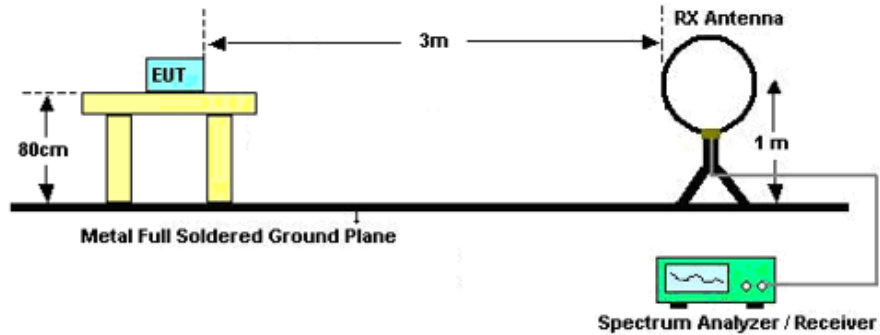

For radiated emissions from 30MHz to 1GHz

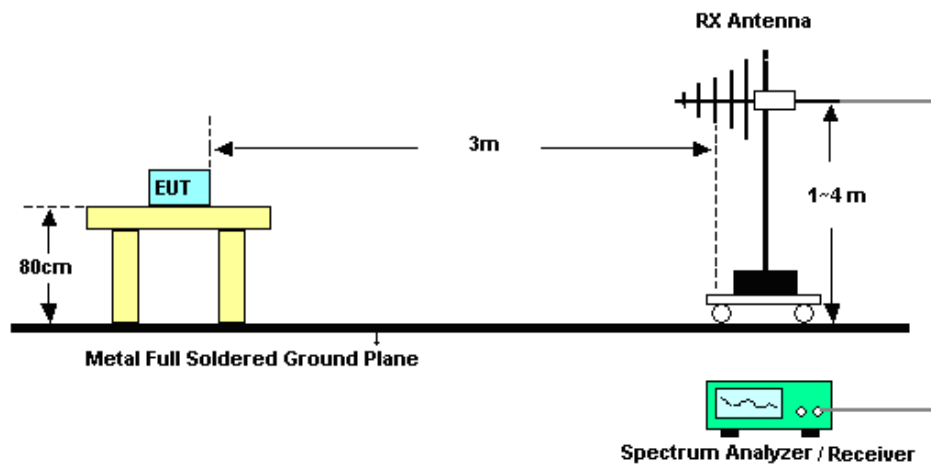

For radiated emissions above 1GHz

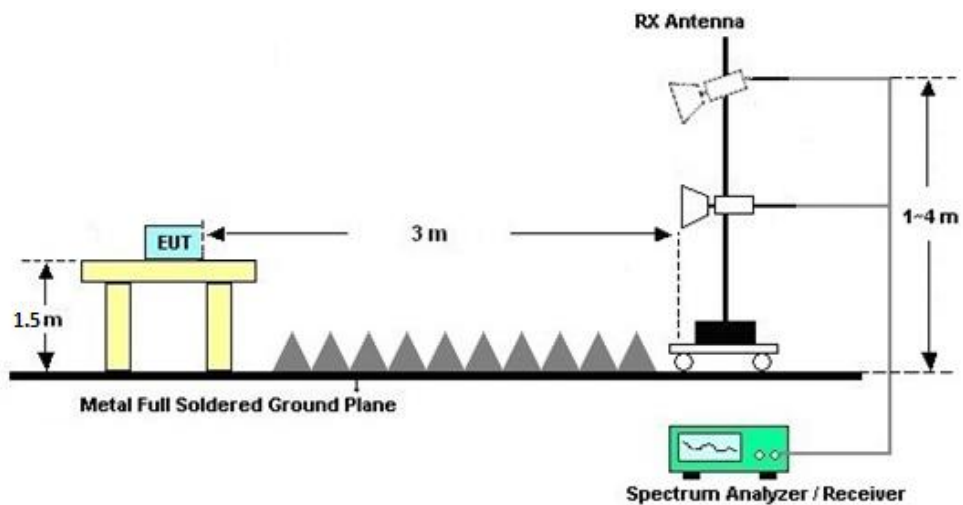



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C & D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C & D.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

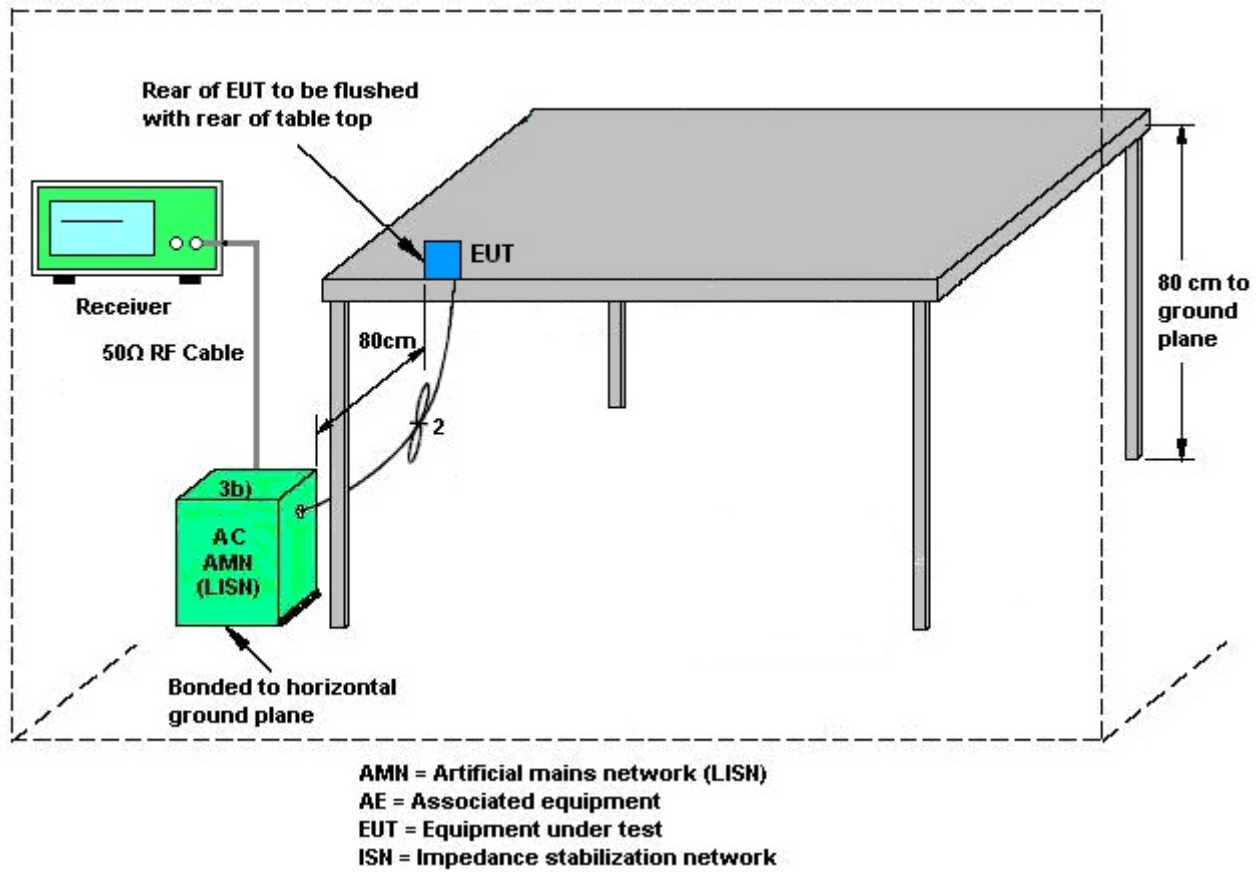

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
			DG for Power	DG for PSD	Power Limit Reduction	PSD Limit Reduction
	Ant. 1 (dBi)	Ant. 2 (dBi)	(dBi)	(dBi)	(dB)	(dB)
2.4 GHz	3.80	3.20	3.80	6.52	0.00	0.52

Power Limit Reduction = $DG(Power) - 6dBi$, (min = 0)

PSD Limit Reduction = $DG(PSD) - 6dBi$, (min = 0)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 01, 2020	May 14, 2021~ Jun. 30, 2021	Oct. 31, 2021	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 07, 2021	May 14, 2021~ Jun. 30, 2021	Jan. 06, 2022	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 07, 2021	May 14, 2021~ Jun. 30, 2021	Jan. 06, 2022	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY564000 04	3Hz~8.5GHz; Max 30dBm	Oct. 17, 2020	Apr. 30, 2021~ Jun. 30, 2021	Oct. 16, 2021	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY551502 08	10Hz~44GHz	Apr. 12, 2021	Apr. 30, 2021~ Jun. 30, 2021	Apr. 11, 2022	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 01, 2020	Apr. 30, 2021~ Jun. 30, 2021	Oct. 31, 2021	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	May 29, 2020	Apr. 30, 2021~ Jun. 30, 2021	May 28, 2021	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	May 27, 2021		May 26, 2022	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 25, 2021	Apr. 30, 2021~ Jun. 30, 2021	Apr. 24, 2022	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2020	Apr. 30, 2021~ Jun. 30, 2021	Nov. 09, 2021	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz ~1GHZ	Apr. 12, 2021	Apr. 30, 2021~ Jun. 30, 2021	Apr. 11, 2022	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 06, 2021	Apr. 30, 2021~ Jun. 30, 2021	Jan. 05, 2022	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz-18Ghz	Jan. 06, 2021	Apr. 30, 2021~ Jun. 30, 2021	Jan. 05, 2022	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY532702 03	500MHz~26.5GHz	Apr. 13, 2021	Apr. 30, 2021~ Jun. 30, 2021	Apr. 12, 2022	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Apr. 30, 2021~ Jun. 30, 2021	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Apr. 30, 2021~ Jun. 30, 2021	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Apr. 30, 2021~ Jun. 30, 2021	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 21, 2021	May 06, 2021	Apr. 20, 2022	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 17, 2020	May 06, 2021	Oct. 16, 2021	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 13, 2021	May 06, 2021	Apr. 12, 2022	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 17, 2020	May 06, 2021	Oct. 16, 2021	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------



Appendix A. Conducted Test Results

Report Number : FR082617-01C

Test Engineer:	Albert Shi/He Yong	Temperature:	21~25	°C
Test Date:	2021/5/14~2021/6/30	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2		
11b	1Mbps	2	1	2412	14.14	13.99	8.57	9.03	0.50	Pass
11b	1Mbps	2	6	2437	14.19	13.94	8.57	8.55	0.50	Pass
11b	1Mbps	2	11	2462	14.19	13.99	9.05	9.03	0.50	Pass
11g	6Mbps	2	1	2412	17.38	17.73	16.32	16.32	0.50	Pass
11g	6Mbps	2	2	2417	18.13	17.98	16.30	16.30	0.50	Pass
11g	6Mbps	2	6	2437	17.73	17.73	16.32	16.32	0.50	Pass
11g	6Mbps	2	10	2457	17.93	18.08	16.32	16.32	0.50	Pass
11g	6Mbps	2	11	2462	17.48	17.88	16.32	16.30	0.50	Pass
HT20	MCS0	2	1	2412	18.18	18.33	17.54	17.56	0.50	Pass
HT20	MCS0	2	2	2417	18.58	18.43	17.56	17.56	0.50	Pass
HT20	MCS0	2	6	2437	18.53	18.63	17.56	17.56	0.50	Pass
HT20	MCS0	2	10	2457	18.73	19.03	17.56	17.54	0.50	Pass
HT20	MCS0	2	11	2462	18.33	18.48	17.56	17.54	0.50	Pass

TEST RESULTS DATA
Peak Output Power

2.4GHz Band																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11b	1Mbps	2	1	2412	20.58	20.77	23.69	30.00		3.80		27.49		36.00		Pass
11b	1Mbps	2	6	2437	19.78	19.95	22.88	30.00		3.80		26.68		36.00		Pass
11b	1Mbps	2	11	2462	19.80	20.22	23.03	30.00		3.80		26.83		36.00		Pass
11g	6Mbps	2	1	2412	23.12	23.18	26.16	30.00		3.80		29.96		36.00		Pass
11g	6Mbps	2	2	2417	24.14	23.82	26.99	30.00		3.80		30.79		36.00		Pass
11g	6Mbps	2	6	2437	23.83	23.49	26.67	30.00		3.80		30.47		36.00		Pass
11g	6Mbps	2	10	2457	23.78	23.02	26.43	30.00		3.80		30.23		36.00		Pass
11g	6Mbps	2	11	2462	22.36	22.91	25.65	30.00		3.80		29.45		36.00		Pass
HT20	MCS0	2	1	2412	23.19	22.48	25.86	30.00		3.80		29.66		36.00		Pass
HT20	MCS0	2	2	2417	23.98	23.69	26.85	30.00		3.80		30.65		36.00		Pass
HT20	MCS0	2	6	2437	23.84	23.16	26.52	30.00		3.80		30.32		36.00		Pass
HT20	MCS0	2	10	2457	23.82	22.79	26.35	30.00		3.80		30.15		36.00		Pass
HT20	MCS0	2	11	2462	21.56	21.73	24.66	30.00		3.80		28.46		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Average Output Power

2.4GHz Band									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)		
					Ant 1	Ant 2	Ant 1	Ant 2	SUM
11b	1Mbps	2	1	2412	0.00	0.00	18.69	18.76	21.74
11b	1Mbps	2	6	2437	0.00	0.00	17.78	17.86	20.83
11b	1Mbps	2	11	2462	0.00	0.00	17.86	17.96	20.92
11g	6Mbps	2	1	2412	0.00	0.00	15.50	15.48	18.50
11g	6Mbps	2	2	2417	0.00	0.00	17.84	17.58	20.72
11g	6Mbps	2	6	2437	0.00	0.00	17.44	17.43	20.45
11g	6Mbps	2	10	2457	0.00	0.00	17.02	17.11	20.08
11g	6Mbps	2	11	2462	0.00	0.00	14.24	14.14	17.20
HT20	MCS0	2	1	2412	0.00	0.00	13.34	13.23	16.30
HT20	MCS0	2	2	2417	0.00	0.00	16.77	16.65	19.72
HT20	MCS0	2	6	2437	0.00	0.00	17.13	17.09	20.12
HT20	MCS0	2	10	2457	0.00	0.00	17.01	16.08	19.58
HT20	MCS0	2	11	2462	0.00	0.00	13.12	13.09	16.12

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant 1	Ant 2	Worse + 3.01	Ant 1	Ant 2	Ant 1	Ant 2	
11b	1Mbps	2	1	2412	-4.30	-4.31	-1.29	6.52		7.48		Pass
11b	1Mbps	2	6	2437	-5.28	-5.25	-2.24	6.52		7.48		Pass
11b	1Mbps	2	11	2462	-5.60	-5.31	-2.30	6.52		7.48		Pass
11g	6Mbps	2	1	2412	-9.24	-9.04	-6.03	6.52		7.48		Pass
11g	6Mbps	2	2	2417	-6.32	-7.23	-3.31	6.52		7.48		Pass
11g	6Mbps	2	6	2437	-7.86	-7.97	-4.85	6.52		7.48		Pass
11g	6Mbps	2	10	2457	-7.88	-7.58	-4.57	6.52		7.48		Pass
11g	6Mbps	2	11	2462	-11.22	-10.62	-7.61	6.52		7.48		Pass
HT20	MCS0	2	1	2412	-12.37	-11.94	-8.93	6.52		7.48		Pass
HT20	MCS0	2	2	2417	-7.51	-7.28	-4.27	6.52		7.48		Pass
HT20	MCS0	2	6	2437	-7.70	-7.42	-4.41	6.52		7.48		Pass
HT20	MCS0	2	10	2457	-7.66	-7.66	-4.65	6.52		7.48		Pass
HT20	MCS0	2	11	2462	-11.58	-12.03	-8.57	6.52		7.48		Pass


Measured power density (dBm) has offset with cable loss.



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

Full Spectrum

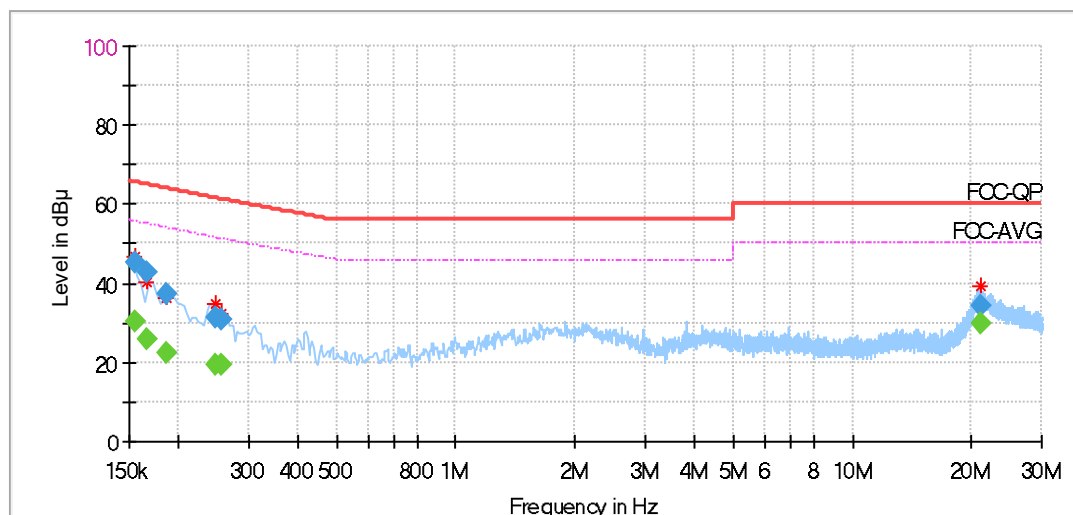


Frequency (MHz)	Quasi Peak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154500	---	30.19	55.73	25.54	L1	OFF	20.1
0.154500	45.21	---	65.73	20.52	L1	OFF	20.1
0.165638	---	26.03	55.10	29.07	L1	OFF	20.0
0.165638	42.62	---	65.11	22.49	L1	OFF	20.0
0.185775	---	22.54	54.08	31.53	L1	OFF	20.0
0.185775	37.44	---	64.10	26.66	L1	OFF	20.0
0.246300	---	19.43	51.64	32.21	L1	OFF	19.9
0.246300	31.52	---	61.68	30.16	L1	OFF	19.9
0.256669	---	19.31	51.30	31.99	L1	OFF	19.9
0.256669	30.94	---	61.34	30.40	L1	OFF	19.9
21.079350	---	29.61	50.00	20.39	L1	OFF	20.2
21.079350	34.17	---	60.00	25.83	L1	OFF	20.2



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

Full Spectrum

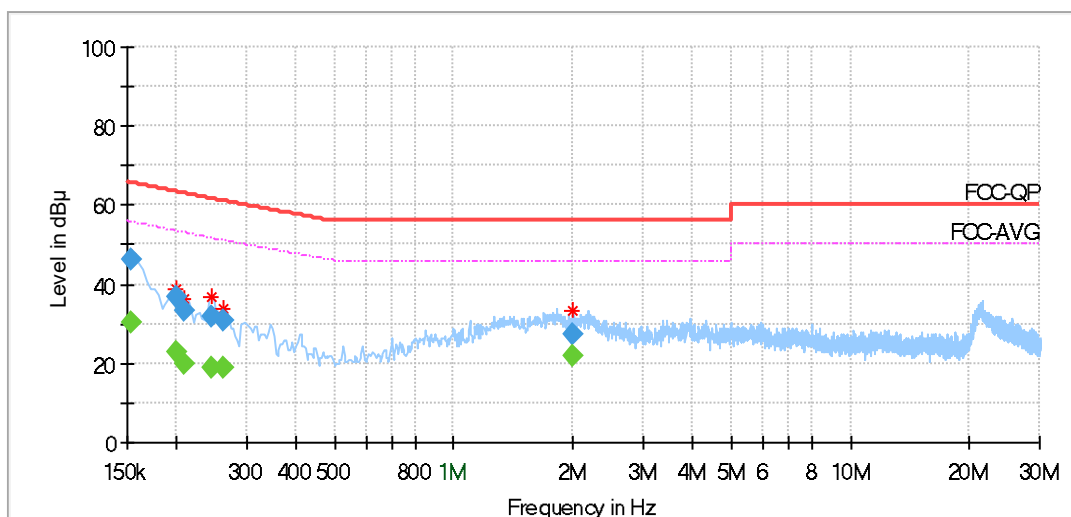

Frequency (MHz)	Quasi Peak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152962	---	30.54	55.82	25.28	N	OFF	20.2
0.152962	46.45	---	65.82	19.37	N	OFF	20.2
0.198506	---	22.91	53.49	30.58	N	OFF	20.2
0.198506	36.68	---	63.52	26.84	N	OFF	20.2
0.208931	---	20.05	53.05	33.00	N	OFF	20.2
0.208931	33.45	---	63.08	29.63	N	OFF	20.2
0.244762	---	19.09	51.69	32.61	N	OFF	20.1
0.244762	32.06	---	61.73	29.67	N	OFF	20.1
0.261169	---	18.66	51.15	32.49	N	OFF	20.1
0.261169	31.08	---	61.19	30.11	N	OFF	20.1
1.999697	---	21.67	46.00	24.33	N	OFF	19.8
1.999697	27.61	---	56.00	28.39	N	OFF	19.8



Appendix C. Radiated Spurious Emission

Test Engineer: Henzy Li	Temperature: 22~23 °C
Test Date: 2021/05/01	Relative Humidity: 41~42 %

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2386.31	58.39	-15.61	74	51.6	32.15	8.09	33.45	141	217	P	H
		2389.95	50.54	-3.46	54	43.75	32.15	8.09	33.45	141	217	A	H
	*	2410	116.31	-	-	109.44	32.2	8.11	33.44	141	217	P	H
	*	2410	113.14	-	-	106.27	32.2	8.11	33.44	141	217	A	H
		2386.05	58.78	-15.22	74	50.64	33.5	8.09	33.45	155	174	P	V
		2385.92	49.63	-4.37	54	41.49	33.5	8.09	33.45	155	174	A	V
	*	2414	113.75	-	-	105.71	33.37	8.11	33.44	155	174	P	V
	*	2414	110.78	-	-	102.74	33.37	8.11	33.44	155	174	A	V
802.11b CH 06 2437MHz		2373.05	56.1	-17.9	74	49.39	32.1	8.06	33.45	151	215	P	H
		2389.69	45.07	-8.93	54	38.28	32.15	8.09	33.45	151	215	A	H
	*	2438	113.51	-	-	106.79	32	8.16	33.44	151	215	P	H
	*	2438	110.55	-	-	103.83	32	8.16	33.44	151	215	A	H
		2486.5	55.13	-18.87	74	48.63	31.7	8.22	33.42	151	215	P	H
		2484.28	43.84	-10.16	54	37.25	31.8	8.22	33.43	151	215	A	H
		2367.2	55.87	-18.13	74	48.22	33.08	8.02	33.45	101	27	P	V
		2389.43	44.5	-9.5	54	36.36	33.5	8.09	33.45	101	27	A	V
	*	2436	104.81	-	-	96.87	33.24	8.14	33.44	101	27	P	V
	*	2436	101.78	-	-	93.84	33.24	8.14	33.44	101	27	A	V
		2490.28	55.28	-18.72	74	47.73	32.73	8.24	33.42	101	27	P	V
		2483.86	44.01	-9.99	54	36.36	32.86	8.22	33.43	101	27	A	V



802.11b CH 11 2462MHz		2491.3	56.43	-17.57	74	49.91	31.7	8.24	33.42	100	215	P	H
		2483.5	45.65	-8.35	54	39.06	31.8	8.22	33.43	100	215	A	H
	*	2464	113.18	-	-	106.52	31.9	8.19	33.43	100	215	P	H
	*	2464	110.17	-	-	103.51	31.9	8.19	33.43	100	215	A	H
		2488.54	55.9	-18.1	74	48.35	32.73	8.24	33.42	130	155	P	V
		2488.36	45.35	-8.65	54	37.8	32.73	8.24	33.42	130	155	A	V
	*	2460	108.07	-	-	100.32	32.99	8.19	33.43	130	155	P	V
	*	2460	105.03	-	-	97.28	32.99	8.19	33.43	130	155	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	50.37	-23.63	74	65.58	34.98	11.53	61.72	285	37	P	H
		4824	49.11	-4.89	54	64.32	34.98	11.53	61.72	285	37	A	H
		7236	59.42	-31.24	90.66	69.93	36.85	14.54	61.9	300	0	P	H
		4824	48.07	-25.93	74	63.42	34.84	11.53	61.72	300	360	P	V
		7236	56.72	-32.4	89.12	67.74	36.34	14.54	61.9	300	360	P	V
802.11b CH 06 2437MHz		4872	47.07	-26.93	74	62.14	35.04	11.6	61.71	300	0	P	H
		7311	56.98	-17.02	74	67.36	36.86	14.66	61.9	300	0	P	H
		7311	53.02	-0.98	54	63.4	36.86	14.66	61.9	306	322	A	H
		4872	46.14	-27.86	74	61.42	34.83	11.6	61.71	300	360	P	V
		7311	56.14	-17.86	74	66.99	36.39	14.66	61.9	108	41	P	V
		7311	52.74	-1.26	54	63.59	36.39	14.66	61.9	108	41	A	V
802.11b CH 11 2462MHz		4926	48.5	-25.5	74	63.45	35.1	11.66	61.71	300	0	P	H
		7386	56.89	-17.11	74	67.1	36.88	14.81	61.9	298	320	P	H
		7386	53.21	-0.79	54	63.42	36.88	14.81	61.9	298	320	A	H
		4926	46.79	-27.21	74	62.02	34.82	11.66	61.71	300	360	P	V
		7386	56.38	-17.62	74	67.03	36.44	14.81	61.9	117	40	P	V
		7386	53.06	-0.94	54	63.71	36.44	14.81	61.9	117	40	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2389.82	67.17	-6.83	74	60.38	32.15	8.09	33.45	132	165	P	H
		2389.95	52.58	-1.42	54	45.79	32.15	8.09	33.45	132	165	A	H
	*	2412	113.05	-	-	106.18	32.2	8.11	33.44	132	165	P	H
	*	2410	105.58	-	-	98.71	32.2	8.11	33.44	132	165	A	H
		2389.3	66.24	-7.76	74	58.1	33.5	8.09	33.45	304	44	P	V
		2389.95	50.73	-3.27	54	42.59	33.5	8.09	33.45	304	44	A	V
	*	2410	109.36	-	-	101.32	33.37	8.11	33.44	304	44	P	V
	*	2410	102.23	-	-	94.19	33.37	8.11	33.44	304	44	A	V
802.11g CH 06 2437MHz		2386.57	57.31	-16.69	74	50.52	32.15	8.09	33.45	152	211	P	H
		2389.69	46.39	-7.61	54	39.6	32.15	8.09	33.45	152	211	A	H
		2484.64	55.76	-18.24	74	49.17	31.8	8.22	33.43	152	211	P	H
		2483.56	44.39	-9.61	54	37.8	31.8	8.22	33.43	152	211	A	H
	*	2440	114.63	-	-	107.9	32	8.16	33.43	152	211	P	H
	*	2440	107.25	-	-	100.52	32	8.16	33.43	152	211	A	H
		2372.92	55.58	-18.42	74	47.68	33.29	8.06	33.45	262	7	P	V
		2389.95	44.87	-9.13	54	36.73	33.5	8.09	33.45	262	7	A	V
		2484.58	55.93	-18.07	74	48.28	32.86	8.22	33.43	262	7	P	V
		2484.22	44.45	-9.55	54	36.8	32.86	8.22	33.43	262	7	A	V
	*	2440	110.91	-	-	103.07	33.11	8.16	33.43	262	7	P	V
	*	2440	103.44	-	-	95.6	33.11	8.16	33.43	262	7	A	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 02 2417MHz		2389.56	66.8	-7.2	74	60.01	32.15	8.09	33.45	140	159	P	H
		2389.04	47.94	-6.06	54	41.15	32.15	8.09	33.45	140	159	A	H
	*	2416	114.85	-	-	107.98	32.2	8.11	33.44	140	159	P	H
	*	2418	106.88	-	-	100.11	32.1	8.11	33.44	140	159	A	H
		2389.69	65.27	-8.73	74	57.13	33.5	8.09	33.45	300	34	P	V
		2389.95	47.1	-6.9	54	38.96	33.5	8.09	33.45	300	34	A	V
	*	2420	111.12	-	-	103.18	33.24	8.14	33.44	300	34	P	V
	*	2414	103.85	-	-	95.81	33.37	8.11	33.44	300	34	A	V
802.11g CH 10 2457MHz		2484.28	67.98	-6.02	74	61.39	31.8	8.22	33.43	143	208	P	H
		2484.1	48.03	-5.97	54	41.44	31.8	8.22	33.43	143	208	A	H
		2460	114.86	-	-	108.2	31.9	8.19	33.43	143	208	P	H
		2454	106.03	-	-	99.37	31.9	8.19	33.43	143	208	A	H
		2483.56	65.85	-8.15	74	58.2	32.86	8.22	33.43	326	34	P	V
		2483.5	46.5	-7.5	54	38.85	32.86	8.22	33.43	326	34	A	V
	*	2458	110.88	-	-	103.13	32.99	8.19	33.43	326	34	P	V
	*	2458	103.43	-	-	95.68	32.99	8.19	33.43	326	34	A	V
802.11g CH 11 2462MHz		2483.62	68.53	-5.47	74	61.94	31.8	8.22	33.43	100	163	P	H
		2483.5	51.54	-2.46	54	44.95	31.8	8.22	33.43	100	163	A	H
	*	2462	110.93	-	-	104.27	31.9	8.19	33.43	100	163	P	H
	*	2460	103.78	-	-	97.12	31.9	8.19	33.43	100	163	A	H
		2484.04	62.24	-11.76	74	54.59	32.86	8.22	33.43	260	360	P	V
		2483.8	47.47	-6.53	54	39.82	32.86	8.22	33.43	260	360	A	V
	*	2460	107.59	-	-	99.84	32.99	8.19	33.43	260	360	P	V
	*	2460	100.43	-	-	92.68	32.99	8.19	33.43	260	360	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	46.11	-27.89	74	60.76	34.98	11.53	61.16	300	0	P	H
		7245	55.74	-32.26	88	65.44	36.85	14.54	61.09	300	0	P	H
		4824	44.14	-29.86	74	58.93	34.84	11.53	61.16	300	360	P	V
		7230	54.88	-28.12	83	65.13	36.33	14.51	61.09	300	360	P	V
802.11g CH 06 2437MHz		4872	49.71	-24.29	74	64.18	35.04	11.6	61.11	300	0	P	H
		7308	63.03	-10.97	74	72.58	36.86	14.66	61.07	310	324	P	H
		7308	50.58	-3.42	54	60.13	36.86	14.66	61.07	310	324	A	H
		4872	45.06	-28.94	74	59.74	34.83	11.6	61.11	300	360	P	V
		7308	63.21	-10.79	74	73.23	36.39	14.66	61.07	118	39	P	V
		7308	50.6	-3.4	54	60.62	36.39	14.66	61.07	118	39	A	V
802.11g CH 11 2462MHz		4926	45.86	-28.14	74	60.17	35.1	11.66	61.07	300	0	P	H
		7386	53.51	-20.49	74	62.88	36.88	14.81	61.06	100	311	P	H
		7386	47.08	-6.92	54	56.45	36.88	14.81	61.06	100	311	A	H
		4926	43.83	-30.17	74	58.42	34.82	11.66	61.07	300	360	P	V
		7386	48.76	-25.24	74	58.57	36.44	14.81	61.06	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. Non-restricted frequency bands limit is 100k-PSD level down 20dB.												



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 02 2417MHz		4830	48.96	-25.04	74	63.61	34.98	11.53	61.16	300	0	P	H
		7251	66	-8	74	75.66	36.85	14.57	61.08	111	311	P	H
		7251	53.21	-0.79	54	62.87	36.85	14.57	61.08	111	311	A	H
		4836	48.31	-25.69	74	63.07	34.83	11.55	61.14	300	360	P	V
		7251	65.47	-8.53	74	75.62	36.36	14.57	61.08	117	41	P	V
		7251	51.87	-2.13	54	62.02	36.36	14.57	61.08	117	41	A	V
802.11g CH 10 2457MHz		4914	48.64	-25.36	74	63	35.08	11.64	61.08	300	0	P	H
		7371	62.08	-11.92	74	71.49	36.87	14.78	61.06	212	360	P	H
		7371	50.75	-3.25	54	60.16	36.87	14.78	61.06	212	360	A	H
		4914	45.68	-28.32	74	60.3	34.82	11.64	61.08	300	360	P	V
		7371	61.13	-12.87	74	70.98	36.43	14.78	61.06	112	37	P	V
		7371	49.59	-4.41	54	59.44	36.43	14.78	61.06	112	37	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2389.04	69.4	-4.6	74	62.61	32.15	8.09	33.45	126	213	P	H
		2389.95	53.3	-0.7	54	46.51	32.15	8.09	33.45	126	213	A	H
	*	2412	112.38	-	-	105.51	32.2	8.11	33.44	126	213	P	H
	*	2410	103.24	-	-	96.37	32.2	8.11	33.44	126	213	A	H
		2389.56	68.87	-5.13	74	60.73	33.5	8.09	33.45	297	36	P	V
		2389.95	49.64	-4.36	54	41.5	33.5	8.09	33.45	297	36	A	V
	*	2414	108.13	-	-	100.09	33.37	8.11	33.44	297	36	P	V
	*	2410	99.77	-	-	91.73	33.37	8.11	33.44	297	36	A	V
802.11n HT20 CH 06 2437MHz		2388.39	56.52	-17.48	74	49.73	32.15	8.09	33.45	151	214	P	H
		2389.95	45.52	-8.48	54	38.73	32.15	8.09	33.45	151	214	A	H
	*	2440	114.29	-	-	107.56	32	8.16	33.43	151	214	P	H
	*	2438	105.61	-	-	98.89	32	8.16	33.44	151	214	A	H
		2485.9	54.88	-19.12	74	48.38	31.7	8.22	33.42	151	214	P	H
		2483.68	43.86	-10.14	54	37.27	31.8	8.22	33.43	151	214	A	H
		2384.75	55.72	-18.28	74	47.82	33.29	8.06	33.45	260	360	P	V
		2389.82	44.7	-9.3	54	36.56	33.5	8.09	33.45	260	360	A	V
	*	2436	111.17	-	-	103.23	33.24	8.14	33.44	260	360	P	V
	*	2436	102.77	-	-	94.83	33.24	8.14	33.44	260	360	A	V
		2487.7	55.69	-18.31	74	48.14	32.73	8.24	33.42	260	360	P	V
		2484.82	44.15	-9.85	54	36.5	32.86	8.22	33.43	260	360	A	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 02 2417MHz		2388.26	68.36	-5.64	74	61.57	32.15	8.09	33.45	150	210	P	H
		2389.17	50.85	-3.15	54	44.06	32.15	8.09	33.45	150	210	A	H
	*	2416	114.81	-	-	107.94	32.2	8.11	33.44	150	210	P	H
	*	2416	106.29	-	-	99.42	32.2	8.11	33.44	150	210	A	H
		2385.66	64.95	-9.05	74	56.81	33.5	8.09	33.45	300	35	P	V
		2389.95	46.44	-7.56	54	38.3	33.5	8.09	33.45	300	35	A	V
	*	2414	110.88	-	-	102.84	33.37	8.11	33.44	300	35	P	V
	*	2416	102.62	-	-	94.58	33.37	8.11	33.44	300	35	A	V
802.11n HT20 CH 10 2457MHz		2483.68	67.4	-6.6	74	60.81	31.8	8.22	33.43	144	213	P	H
		2483.5	48.88	-5.12	54	42.29	31.8	8.22	33.43	144	213	A	H
	*	2456	113.54	-	-	106.88	31.9	8.19	33.43	144	213	P	H
	*	2456	104.92	-	-	98.26	31.9	8.19	33.43	144	213	A	H
		2483.56	65.8	-8.2	74	58.15	32.86	8.22	33.43	321	29	P	V
		2483.5	46.78	-7.22	54	39.13	32.86	8.22	33.43	321	29	A	V
	*	2456	110.1	-	-	102.35	32.99	8.19	33.43	321	29	P	V
	*	2458	101.4	-	-	93.65	32.99	8.19	33.43	321	29	A	V
802.11n HT20 CH 11 2462MHz		2483.62	68.39	-5.61	74	61.8	31.8	8.22	33.43	168	212	P	H
		2483.5	53.05	-0.95	54	46.46	31.8	8.22	33.43	168	212	A	H
	*	2462	111.19	-	-	104.53	31.9	8.19	33.43	168	212	P	H
	*	2460	102.59	-	-	95.93	31.9	8.19	33.43	168	212	A	H
		2483.74	67.71	-6.29	74	60.06	32.86	8.22	33.43	254	360	P	V
		2483.5	48.99	-5.01	54	41.34	32.86	8.22	33.43	254	360	A	V
	*	2462	106.39	-	-	98.64	32.99	8.19	33.43	254	360	P	V
	*	2460	97.37	-	-	89.62	32.99	8.19	33.43	254	360	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	42.07	-31.93	74	57.28	34.98	11.53	61.72	300	0	P	H
		7236	48.11	-31.97	80.08	58.62	36.85	14.54	61.9	300	0	P	H
		4824	40.49	-33.51	74	55.84	34.84	11.53	61.72	300	360	P	V
		7230	48.21	-28.22	76.43	59.27	36.33	14.51	61.9	300	360	P	V
802.11n HT20 CH 06 2437MHz		4872	45.41	-28.59	74	60.48	35.04	11.6	61.71	300	0	P	H
		7308	57.65	-16.35	74	68.03	36.86	14.66	61.9	303	322	P	H
		7308	45.21	-8.79	54	55.59	36.86	14.66	61.9	303	322	A	H
		4872	41.11	-32.89	74	56.39	34.83	11.6	61.71	300	360	P	V
		7308	57.55	-16.45	74	68.4	36.39	14.66	61.9	109	40	P	V
		7308	44.11	-9.89	54	54.96	36.39	14.66	61.9	109	40	A	V
802.11n HT20 CH 11 2462MHz		4926	43.34	-30.66	74	58.29	35.1	11.66	61.71	300	0	P	H
		7386	49.35	-24.65	74	59.56	36.88	14.81	61.9	300	0	P	H
		4926	42.3	-31.7	74	57.53	34.82	11.66	61.71	300	360	P	V
		7386	46.98	-27.02	74	57.63	36.44	14.81	61.9	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 02 2417MHz		4836	46.3	-27.7	74	60.91	34.98	11.55	61.14	300	0	P	H
		7251	60.22	-13.78	74	69.88	36.85	14.57	61.08	153	298	P	H
		7251	51.64	-2.36	54	61.3	36.85	14.57	61.08	153	298	A	H
		4836	43.9	-30.1	74	58.66	34.83	11.55	61.14	300	360	P	V
		7251	58.34	-15.66	74	68.49	36.36	14.57	61.08	132	38	P	V
		7251	50.62	-3.38	54	60.77	36.36	14.57	61.08	132	38	A	V
802.11n HT20 CH 10 2457MHz		4914	47.82	-26.18	74	62.18	35.08	11.64	61.08	300	0	P	H
		7371	60.62	-13.38	74	70.03	36.87	14.78	61.06	132	310	P	H
		7371	52.11	-1.89	54	61.52	36.87	14.78	61.06	132	310	A	H
		4914	45.73	-28.27	74	60.35	34.82	11.64	61.08	300	360	P	V
		7371	59.09	-14.91	74	68.94	36.43	14.78	61.06	128	45	P	V
		7371	50.13	-3.87	54	59.98	36.43	14.78	61.06	128	45	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz
2.4GHz WIFI 802.11n HT20 (LF)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
2.4GHz 802.11n HT20 LF		30	23.38	-16.62	40	30.5	25	0.58	32.7	-	-	P	H
		112.45	23.97	-19.53	43.5	38.1	17.03	1.72	32.88	-	-	P	H
		142.52	27.48	-16.02	43.5	41.77	16.61	1.92	32.82	-	-	P	H
		239.52	26.85	-19.15	46	39.58	17.87	2.5	33.1	-	-	P	H
		359.8	26.6	-19.4	46	35.63	20.77	3.08	32.88	-	-	P	H
		827.34	32.61	-13.39	46	34.16	26.32	4.68	32.55	152	73	P	H
		30	28.79	-11.21	40	35.41	25.5	0.58	32.7	-	-	P	V
		120.21	33.18	-10.32	43.5	46.4	17.86	1.78	32.86	-	-	P	V
		191.99	25.57	-17.93	43.5	39.88	16.49	2.25	33.05	-	-	P	V
		359.8	40.21	-5.79	46	48.36	21.65	3.08	32.88	203	49	P	V
		413.15	31.97	-14.03	46	38.49	22.94	3.31	32.77	-	-	P	V
		958.29	30.32	-15.68	46	29.57	27.98	5.04	32.27	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Co-location:

2.4GHz 2400~2483.5MHz

WIFI 802.11n20 CH01&BLE(1Mbps)CH00 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n20 CH 01 2412MHz & BLE (1Mbps) CH00		2389.56	67.01	-6.99	74	60.22	32.15	8.09	33.45	106	214	P	H
		2389.95	52.22	-1.78	54	45.43	32.15	8.09	33.45	106	214	A	H
	*	2410	111.32	-	-	104.45	32.2	8.11	33.44	106	214	P	H
	*	2410	102.37	-	-	95.5	32.2	8.11	33.44	106	214	A	H
		2389.95	65.97	-8.03	74	57.83	33.5	8.09	33.45	183	170	P	V
		2389.95	51.2	-2.8	54	43.06	33.5	8.09	33.45	183	170	A	V
	*	2410	107.9	-	-	99.86	33.37	8.11	33.44	183	170	P	V
	*	2412	100.38	-	-	92.34	33.37	8.11	33.44	183	170	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n20 CH01&BLE(1Mbps)CH00 (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n20 CH 01 2412MHz & BLE (1Mbps) CH00		2389.82	68.21	-5.79	74	61.42	32.15	8.09	33.45	100	213	P	H
		2389.43	53.53	-0.47	54	46.74	32.15	8.09	33.45	100	213	A	H
	*	2402	109.28	-	-	102.43	32.2	8.09	33.44	100	213	P	H
	*	2402	102.82	-	-	95.97	32.2	8.09	33.44	100	213	A	H
		2389.82	65.93	-8.07	74	57.79	33.5	8.09	33.45	183	170	P	V
		2389.95	53.01	-0.99	54	44.87	33.5	8.09	33.45	183	170	A	V
	*	2402	107.34	-	-	99.19	33.5	8.09	33.44	183	170	P	V
	*	2402	101.14	-	-	92.99	33.5	8.09	33.44	183	170	A	V
Remark - No other spurious found. - All results are PASS against Peak and Average limit line.													

2.4GHz 2400~2483.5MHz

WIFI 802.11n20 CH01&BLE(1Mbps)CH00 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n20 CH 01 2412MHz & BLE (1Mbps) CH00		4804	39.41	-34.59	74	54.66	34.96	11.51	61.72	300	0	P	H
		4824	41.39	-32.61	74	56.6	34.98	11.53	61.72	300	0	P	H
		7236	46.72	-32.64	79.36	57.23	36.85	14.54	61.9	300	0	P	H
		4804	39.35	-34.65	74	54.72	34.84	11.51	61.72	300	360	P	V
		4824	40.33	-33.67	74	55.68	34.84	11.53	61.72	300	360	P	V
		7236	44.44	-31.08	75.52	55.46	36.34	14.54	61.9	300	360	P	V
Remark - No other spurious found. - All results are PASS against Peak and Average limit line.													

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)

2. Level(dBμV/m) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.







Appendix D. Radiated Spurious Emission Plots

Note symbol

-L	Low channel location
-R	High channel location







2.4GHz 2400~2483.5MHz
WIFI 802.11b (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																			
ANT	802.11b CH01 2412MHz																																																																			
1+2	Horizontal	Fundamental																																																																		
Peak	 Site : 03080-K3 Condition : FCC PART 15C 3m 3117 SN 75957 HORIZONTAL RNR 1000 000kHz VSW 0.000kHz SRT Auto <table><tr><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq Level</th><th>Limit</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2386.31</td><td>58.39</td><td>-15.61</td><td>74.00</td><td>51.60</td><td>32.15</td><td>8.09</td><td>33.45</td><td>141</td><td>217</td><td>Peak</td><td>HORIZONTAL</td></tr></table>	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq Level	Limit	Line	Level Factor	Loss Factor			MHz	dBm	dB	dBm	dB	cm	deg	1 2386.31	58.39	-15.61	74.00	51.60	32.15	8.09	33.45	141	217	Peak	HORIZONTAL	 Site : 03080-K3 Condition : FCC PART 15C 3m 3117 SN 75957 HORIZONTAL RNR 1000 000kHz VSW 0.000kHz SRT Auto <table><tr><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq Level</th><th>Limit</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2410.00</td><td>116.31</td><td>42.31</td><td>74.00</td><td>109.44</td><td>32.20</td><td>8.11</td><td>33.44</td><td>141</td><td>217</td><td>Peak</td><td>HORIZONTAL</td></tr></table>	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq Level	Limit	Line	Level Factor	Loss Factor			MHz	dBm	dB	dBm	dB	cm	deg	1 2410.00	116.31	42.31	74.00	109.44	32.20	8.11	33.44	141	217	Peak	HORIZONTAL
	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																													
Freq Level	Limit	Line	Level Factor	Loss Factor																																																																
MHz	dBm	dB	dBm	dB	cm	deg																																																														
1 2386.31	58.39	-15.61	74.00	51.60	32.15	8.09	33.45	141	217	Peak	HORIZONTAL																																																									
Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																														
Freq Level	Limit	Line	Level Factor	Loss Factor																																																																
MHz	dBm	dB	dBm	dB	cm	deg																																																														
1 2410.00	116.31	42.31	74.00	109.44	32.20	8.11	33.44	141	217	Peak	HORIZONTAL																																																									
Avg.	 Site : 03080-K3 Condition : FCC PART 15C (AVG) 3m 3117 SN 75957 HORIZONTAL RNR 1000 000kHz VSW 0.010kHz SRT Auto <table><tr><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq Level</th><th>Limit</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.95</td><td>50.54</td><td>-3.46</td><td>54.00</td><td>43.75</td><td>32.15</td><td>8.09</td><td>33.45</td><td>141</td><td>217</td><td>Average</td><td>HORIZONTAL</td></tr></table>	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq Level	Limit	Line	Level Factor	Loss Factor			MHz	dBm	dB	dBm	dB	cm	deg	1 2389.95	50.54	-3.46	54.00	43.75	32.15	8.09	33.45	141	217	Average	HORIZONTAL	 Site : 03080-K3 Condition : FCC PART 15C (AVG) 3m 3117 SN 75957 HORIZONTAL RNR 1000 000kHz VSW 0.010kHz SRT Auto <table><tr><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq Level</th><th>Limit</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2410.00</td><td>113.14</td><td>59.14</td><td>54.00</td><td>106.27</td><td>32.20</td><td>8.11</td><td>33.44</td><td>141</td><td>217</td><td>Average</td><td>HORIZONTAL</td></tr></table>	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq Level	Limit	Line	Level Factor	Loss Factor			MHz	dBm	dB	dBm	dB	cm	deg	1 2410.00	113.14	59.14	54.00	106.27	32.20	8.11	33.44	141	217	Average	HORIZONTAL
	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																													
Freq Level	Limit	Line	Level Factor	Loss Factor																																																																
MHz	dBm	dB	dBm	dB	cm	deg																																																														
1 2389.95	50.54	-3.46	54.00	43.75	32.15	8.09	33.45	141	217	Average	HORIZONTAL																																																									
Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																														
Freq Level	Limit	Line	Level Factor	Loss Factor																																																																
MHz	dBm	dB	dBm	dB	cm	deg																																																														
1 2410.00	113.14	59.14	54.00	106.27	32.20	8.11	33.44	141	217	Average	HORIZONTAL																																																									





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																									
ANT	802.11b CH01 2412MHz																																																									
1+2	Vertical	Fundamental																																																								
Peak	Site Condition : 032006-KS FCC PART 15C 3m 3117 SN 75957 VERTICAL dBm 1000 000000 VSW 0.010000 SRT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><td>1</td><td>2386.05</td><td>58.78</td><td>-15.22</td><td>74.00</td><td>50.64</td><td>33.50</td><td>8.09</td><td>33.45</td><td>155</td><td>174 Peak</td><td>VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				1	2386.05	58.78	-15.22	74.00	50.64	33.50	8.09	33.45	155	174 Peak	VERTICAL	Site Condition : 032006-KS FCC PART 15C 3m 3117 SN 75957 VERTICAL dBm 1000 000000 VSW 0.010000 SRT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><td>1</td><td>2414.00</td><td>113.75</td><td>39.75</td><td>74.00</td><td>105.71</td><td>33.37</td><td>8.11</td><td>33.44</td><td>155</td><td>174 Peak</td><td>VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				1	2414.00	113.75	39.75	74.00	105.71	33.37	8.11	33.44	155	174 Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																		
Freq	Level	Line	Level Factor	Loss Factor																																																						
1	2386.05	58.78	-15.22	74.00	50.64	33.50	8.09	33.45	155	174 Peak	VERTICAL																																															
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																			
Freq	Level	Line	Level Factor	Loss Factor																																																						
1	2414.00	113.75	39.75	74.00	105.71	33.37	8.11	33.44	155	174 Peak	VERTICAL																																															
Avg.	Site Condition : 032006-KS FCC PART 15C (AVG) 3m 3117 SN 75957 VERTICAL dBm 1000 000000 VSW 0.010000 SRT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><td>1</td><td>2385.92</td><td>49.63</td><td>-4.37</td><td>54.00</td><td>41.49</td><td>33.50</td><td>8.09</td><td>33.45</td><td>155</td><td>174 Average</td><td>VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				1	2385.92	49.63	-4.37	54.00	41.49	33.50	8.09	33.45	155	174 Average	VERTICAL	Site Condition : 032006-KS FCC PART 15C (AVG) 3m 3117 SN 75957 VERTICAL dBm 1000 000000 VSW 0.010000 SRT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><td>1</td><td>2414.00</td><td>110.78</td><td>56.78</td><td>54.00</td><td>102.74</td><td>33.37</td><td>8.11</td><td>33.44</td><td>155</td><td>174 Average</td><td>VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				1	2414.00	110.78	56.78	54.00	102.74	33.37	8.11	33.44	155	174 Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																		
Freq	Level	Line	Level Factor	Loss Factor																																																						
1	2385.92	49.63	-4.37	54.00	41.49	33.50	8.09	33.45	155	174 Average	VERTICAL																																															
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																			
Freq	Level	Line	Level Factor	Loss Factor																																																						
1	2414.00	110.78	56.78	54.00	102.74	33.37	8.11	33.44	155	174 Average	VERTICAL																																															



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																																											
ANT	802.11b CH06 2437MHz - L																																																																																											
1+2	Horizontal						Fundamental																																																																																					
Peak	 Site Condition : 030906-KS : FCC PART 15C 3m 3117 SN 75957 HORIZONTAL : RBW 1000.000kHz VBW 3000.000kHz SRT Auto <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2373.05</td><td>56.10</td><td>-17.90</td><td>74.00</td><td>49.39</td><td>32.10</td><td>8.06</td><td>33.45</td><td>151</td><td>215</td><td>Peak</td><td>HORIZONTAL</td></tr></table>  Site Condition : 030906-KS : FCC PART 15C 3m 3117 SN 75957 HORIZONTAL : RBW 1000.000kHz VBW 3000.000kHz SRT Auto <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2438.00</td><td>113.51</td><td>39.51</td><td>74.00</td><td>106.79</td><td>32.00</td><td>8.16</td><td>33.44</td><td>151</td><td>215</td><td>Peak</td><td>HORIZONTAL</td></tr></table>													Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas		Freq	Level	Line	Level	Factor	Loss				MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2373.05	56.10	-17.90	74.00	49.39	32.10	8.06	33.45	151	215	Peak	HORIZONTAL		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas		Freq	Level	Line	Level	Factor	Loss				MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2438.00	113.51	39.51	74.00	106.79	32.00	8.16	33.44	151	215	Peak	HORIZONTAL
		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																			
	Freq	Level	Line	Level	Factor	Loss																																																																																						
	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																																				
1	2373.05	56.10	-17.90	74.00	49.39	32.10	8.06	33.45	151	215	Peak	HORIZONTAL																																																																																
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																				
	Freq	Level	Line	Level	Factor	Loss																																																																																						
	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																																				
1	2438.00	113.51	39.51	74.00	106.79	32.00	8.16	33.44	151	215	Peak	HORIZONTAL																																																																																
Avg.	 Site Condition : 030906-KS : FCC PART 15C (AVG) 3m 3117 SN 75957 HORIZONTAL : RBW 1000.000kHz VBW 0.0100kHz SRT Auto <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.69</td><td>45.07</td><td>-8.93</td><td>54.00</td><td>38.28</td><td>32.15</td><td>8.09</td><td>33.45</td><td>151</td><td>215</td><td>Average</td><td>HORIZONTAL</td></tr></table>  Site Condition : 030906-KS : FCC PART 15C (AVG) 3m 3117 SN 75957 HORIZONTAL : RBW 1000.000kHz VBW 0.0100kHz SRT Auto <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2438.00</td><td>110.55</td><td>56.55</td><td>54.00</td><td>103.83</td><td>32.00</td><td>8.16</td><td>33.44</td><td>151</td><td>215</td><td>Average</td><td>HORIZONTAL</td></tr></table>													Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas		Freq	Level	Line	Level	Factor	Loss				MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2389.69	45.07	-8.93	54.00	38.28	32.15	8.09	33.45	151	215	Average	HORIZONTAL		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas		Freq	Level	Line	Level	Factor	Loss				MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2438.00	110.55	56.55	54.00	103.83	32.00	8.16	33.44	151	215	Average	HORIZONTAL
		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																			
	Freq	Level	Line	Level	Factor	Loss																																																																																						
	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																																				
1	2389.69	45.07	-8.93	54.00	38.28	32.15	8.09	33.45	151	215	Average	HORIZONTAL																																																																																
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																				
	Freq	Level	Line	Level	Factor	Loss																																																																																						
	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																																				
1	2438.00	110.55	56.55	54.00	103.83	32.00	8.16	33.44	151	215	Average	HORIZONTAL																																																																																





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																						
ANT	802.11b CH06 2437MHz - R																																						
1+2	Horizontal	Fundamental																																					
Peak	 Site Condition : 032005-KS : FCC PART 15C 3m 3117 SN 75957 HORIZONTAL : BW: 1000 050kHz VSW: 3000 000kHz SRT: Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Presamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Level</th><th>Level</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.00</td><td>55.13</td><td>-18.87</td><td>74.00</td><td>48.63</td><td>31.70</td><td>8.22</td><td>33.42</td><td>151</td><td>215</td><td>Peak</td><td>HORIZONTAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Level	Level	Factor	Factor			MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2486.00	55.13	-18.87	74.00	48.63	31.70	8.22	33.42	151	215	Peak	HORIZONTAL	-
	Over	Limit	ReadAntenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas																															
Freq	Level	Level	Level	Factor	Factor																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																
1	2486.00	55.13	-18.87	74.00	48.63	31.70	8.22	33.42	151	215	Peak	HORIZONTAL																											
Avg.	 Site Condition : 032005-KS : FCC PART 15C (AVG) 3m 3117 SN 75957 HORIZONTAL : BW: 1000 050kHz VSW: 3000 0100kHz SRT: Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Presamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Level</th><th>Level</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.28</td><td>43.84</td><td>-10.16</td><td>54.00</td><td>37.25</td><td>31.80</td><td>8.22</td><td>33.43</td><td>151</td><td>215</td><td>Average</td><td>HORIZONTAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Level	Level	Factor	Factor			MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2484.28	43.84	-10.16	54.00	37.25	31.80	8.22	33.43	151	215	Average	HORIZONTAL	-
	Over	Limit	ReadAntenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas																															
Freq	Level	Level	Level	Factor	Factor																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																
1	2484.28	43.84	-10.16	54.00	37.25	31.80	8.22	33.43	151	215	Average	HORIZONTAL																											



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																											
ANT	802.11b CH06 2437MHz - L																																																																											
1+2	Vertical	Fundamental																																																																										
Peak	Site Condition : 030904-KS FCC PART 15C 3m 3117 SN 75957 VERTICAL FSW:1000.000MHz VSW:3.010dB SRT:Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2367.20</td><td>55.87</td><td>-18.13</td><td>74.00</td><td>48.72</td><td>33.45</td><td>101</td><td>27</td><td>Peak</td><td>VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg	1	2367.20	55.87	-18.13	74.00	48.72	33.45	101	27	Peak	VERTICAL	Site Condition : 030904-KS FCC PART 15C 3m 3117 SN 75957 VERTICAL FSW:1000.000MHz VSW:3.010dB SRT:Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2436.00</td><td>104.81</td><td>30.81</td><td>74.00</td><td>96.87</td><td>33.24</td><td>8.14</td><td>33.44</td><td>101</td><td>27</td><td>Peak</td><td>VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg	1	2436.00	104.81	30.81	74.00	96.87	33.24	8.14	33.44	101	27	Peak	VERTICAL		
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
Freq	Level	Line	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																																																																					
1	2367.20	55.87	-18.13	74.00	48.72	33.45	101	27	Peak	VERTICAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Line	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																																																																					
1	2436.00	104.81	30.81	74.00	96.87	33.24	8.14	33.44	101	27	Peak	VERTICAL																																																																
Avg.	Site Condition : 030904-KS FCC PART 15C (AVG) 3m 3117 SN 75957 VERTICAL FSW:1000.000MHz VSW:3.010dB SRT:Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.43</td><td>44.50</td><td>-9.50</td><td>54.00</td><td>36.36</td><td>33.50</td><td>8.09</td><td>33.45</td><td>101</td><td>27</td><td>Average</td><td>VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg	1	2389.43	44.50	-9.50	54.00	36.36	33.50	8.09	33.45	101	27	Average	VERTICAL	Site Condition : 030904-KS FCC PART 15C (AVG) 3m 3117 SN 75957 VERTICAL FSW:1000.000MHz VSW:3.010dB SRT:Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2436.00</td><td>101.78</td><td>47.78</td><td>54.00</td><td>93.84</td><td>33.24</td><td>8.14</td><td>33.44</td><td>101</td><td>27</td><td>Average</td><td>VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg	1	2436.00	101.78	47.78	54.00	93.84	33.24	8.14	33.44	101	27	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
Freq	Level	Line	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																																																																					
1	2389.43	44.50	-9.50	54.00	36.36	33.50	8.09	33.45	101	27	Average	VERTICAL																																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Line	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																																																																					
1	2436.00	101.78	47.78	54.00	93.84	33.24	8.14	33.44	101	27	Average	VERTICAL																																																																



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																								
ANT	802.11b CH06 2437MHz - R																																								
1+2	Vertical						Fundamental																																		
Peak	 Site : 030906-KS Condition : FCC PART 15C 3m 3117 5N 75957 VERTICAL RBW: 1000 000kHz VBW: 1000 000kHz SFT: Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Presamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dBm</th></tr><tr><td>1</td><td>2490.28</td><td>55.28</td><td>-18.72</td><td>74.00</td><td>47.73</td><td>32.73</td><td>8.24</td><td>33.42</td><td>101</td><td>27</td><td>Peak</td><td>VERTICAL</td></tr></table>												Over	Limit	ReadAntenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phase	Freq	Level	Limit	Level	Factor	Loss	Factor	dBm	1	2490.28	55.28	-18.72	74.00	47.73	32.73	8.24	33.42	101	27	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phase																																	
Freq	Level	Limit	Level	Factor	Loss	Factor	dBm																																		
1	2490.28	55.28	-18.72	74.00	47.73	32.73	8.24	33.42	101	27	Peak	VERTICAL																													
Avg.	 Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 5N 75957 VERTICAL RBW: 1000 000kHz VBW: 0.0100kHz SFT: Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Presamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dBm</th></tr><tr><td>1</td><td>2483.86</td><td>44.01</td><td>-9.99</td><td>54.00</td><td>36.36</td><td>32.86</td><td>8.22</td><td>33.43</td><td>101</td><td>27</td><td>Average</td><td>VERTICAL</td></tr></table>												Over	Limit	ReadAntenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phase	Freq	Level	Limit	Level	Factor	Loss	Factor	dBm	1	2483.86	44.01	-9.99	54.00	36.36	32.86	8.22	33.43	101	27	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phase																																	
Freq	Level	Limit	Level	Factor	Loss	Factor	dBm																																		
1	2483.86	44.01	-9.99	54.00	36.36	32.86	8.22	33.43	101	27	Average	VERTICAL																													



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																		
ANT	802.11b CH11 2462MHz																																																		
1+2	Horizontal						Fundamental																																												
Peak	Site Condition : 030906-K3 FCC PART 15C 3m 3117 SN 75957 HORIZONTAL RBW 1000.000kHz VBW 3000.000kHz SRT Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>1</th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2491.30</td><td>56.43</td><td>-17.57</td><td>74.00</td><td>49.91</td><td>31.70</td><td>8.24</td><td>33.42</td><td>100</td><td>215</td><td>Peak</td><td>HORIZONTAL</td></tr></tbody></table>													Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	1	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg			1	2491.30	56.43	-17.57	74.00	49.91	31.70	8.24	33.42	100	215	Peak	HORIZONTAL	
		Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																						
1	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																										
1	2491.30	56.43	-17.57	74.00	49.91	31.70	8.24	33.42	100	215	Peak	HORIZONTAL																																							
	Site Condition : 030906-K3 FCC PART 15C 3m 3117 SN 75957 HORIZONTAL RBW 1000.000kHz VBW 3000.000kHz SRT Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>1</th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2464.00</td><td>113.18</td><td>39.18</td><td>74.00</td><td>106.02</td><td>31.90</td><td>8.19</td><td>33.43</td><td>100</td><td>215</td><td>Peak</td><td>HORIZONTAL</td></tr></tbody></table>													Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	1	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cm	deg			1	2464.00	113.18	39.18	74.00	106.02	31.90	8.19	33.43	100	215	Peak	HORIZONTAL
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																							
1	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cm	deg																																									
1	2464.00	113.18	39.18	74.00	106.02	31.90	8.19	33.43	100	215	Peak	HORIZONTAL																																							
Avg.	Site Condition : 030906-K3 FCC PART 15C (AVG) 3m 3117 SN 75957 HORIZONTAL RBW 1000.000kHz VBW 0.0100kHz SRT Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>1</th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>45.65</td><td>-8.35</td><td>54.00</td><td>39.06</td><td>31.80</td><td>8.22</td><td>33.42</td><td>100</td><td>215</td><td>Average</td><td>HORIZONTAL</td></tr></tbody></table>													Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	1	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cm	deg			1	2483.50	45.65	-8.35	54.00	39.06	31.80	8.22	33.42	100	215	Average	HORIZONTAL
		Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																						
1	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cm	deg																																									
1	2483.50	45.65	-8.35	54.00	39.06	31.80	8.22	33.42	100	215	Average	HORIZONTAL																																							
	Site Condition : 030906-K3 FCC PART 15C (AVG) 3m 3117 SN 75957 HORIZONTAL RBW 1000.000kHz VBW 0.0100kHz SRT Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>1</th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2464.00</td><td>110.17</td><td>56.17</td><td>54.00</td><td>103.51</td><td>31.90</td><td>8.19</td><td>33.43</td><td>100</td><td>215</td><td>Average</td><td>HORIZONTAL</td></tr></tbody></table>													Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	1	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cm	deg			1	2464.00	110.17	56.17	54.00	103.51	31.90	8.19	33.43	100	215	Average	HORIZONTAL
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																							
1	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cm	deg																																									
1	2464.00	110.17	56.17	54.00	103.51	31.90	8.19	33.43	100	215	Average	HORIZONTAL																																							



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																																											
ANT	802.11b CH11 2462MHz																																																																																											
1+2	Vertical	Fundamental																																																																																										
Peak	Site Condition : 030H06-KS FCC PART 15C 3m 3117 5W 75957 VERTICAL RSM 1000.000kHz VSR 3000.000kHz SRT Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm/100m</th><th>dB</th><th>dBm/100m</th><th>dBm</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2488.54</td><td>55.90</td><td>-18.10</td><td>74.00</td><td>48.35</td><td>32.73</td><td>8.24</td><td>33.42</td><td>130</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>155 Peak</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>VERTICAL</td></tr></tbody></table>	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/100m	dB	dBm/100m	dBm	dB	cm	deg		1 2488.54	55.90	-18.10	74.00	48.35	32.73	8.24	33.42	130									155 Peak									VERTICAL	Site Condition : 030H06-KS FCC PART 15C 3m 3117 5W 75957 VERTICAL RSM 1000.000kHz VSR 3000.000kHz SRT Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm/100m</th><th>dB</th><th>dBm/100m</th><th>dBm</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 * 2460.00</td><td>108.07</td><td>34.07</td><td>74.00</td><td>100.32</td><td>32.99</td><td>8.19</td><td>33.43</td><td>130</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>155 Peak</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>VERTICAL</td></tr></tbody></table>	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/100m	dB	dBm/100m	dBm	dB	cm	deg		1 * 2460.00	108.07	34.07	74.00	100.32	32.99	8.19	33.43	130									155 Peak									VERTICAL
	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																			
MHz	dBm/100m	dB	dBm/100m	dBm	dB	cm	deg																																																																																					
1 2488.54	55.90	-18.10	74.00	48.35	32.73	8.24	33.42	130																																																																																				
								155 Peak																																																																																				
								VERTICAL																																																																																				
Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																				
MHz	dBm/100m	dB	dBm/100m	dBm	dB	cm	deg																																																																																					
1 * 2460.00	108.07	34.07	74.00	100.32	32.99	8.19	33.43	130																																																																																				
								155 Peak																																																																																				
								VERTICAL																																																																																				
Avg.	Site Condition : 030H06-KS FCC PART 15C (AVG) 3m 3117 5W 75957 VERTICAL RSM 1000.000kHz VSR 0.010kHz SRT Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm/100m</th><th>dB</th><th>dBm/100m</th><th>dBm</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2488.36</td><td>45.35</td><td>-8.65</td><td>54.00</td><td>37.60</td><td>32.73</td><td>8.24</td><td>33.42</td><td>130</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>155 Average</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>VERTICAL</td></tr></tbody></table>	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/100m	dB	dBm/100m	dBm	dB	cm	deg		1 2488.36	45.35	-8.65	54.00	37.60	32.73	8.24	33.42	130									155 Average									VERTICAL	Site Condition : 030H06-KS FCC PART 15C (AVG) 3m 3117 5W 75957 VERTICAL RSM 1000.000kHz VSR 0.010kHz SRT Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm/100m</th><th>dB</th><th>dBm/100m</th><th>dBm</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 * 2460.00</td><td>105.03</td><td>51.03</td><td>54.00</td><td>97.28</td><td>32.99</td><td>8.19</td><td>33.43</td><td>130</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>155 Average</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>VERTICAL</td></tr></tbody></table>	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/100m	dB	dBm/100m	dBm	dB	cm	deg		1 * 2460.00	105.03	51.03	54.00	97.28	32.99	8.19	33.43	130									155 Average									VERTICAL
	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																			
MHz	dBm/100m	dB	dBm/100m	dBm	dB	cm	deg																																																																																					
1 2488.36	45.35	-8.65	54.00	37.60	32.73	8.24	33.42	130																																																																																				
								155 Average																																																																																				
								VERTICAL																																																																																				
Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																				
MHz	dBm/100m	dB	dBm/100m	dBm	dB	cm	deg																																																																																					
1 * 2460.00	105.03	51.03	54.00	97.28	32.99	8.19	33.43	130																																																																																				
								155 Average																																																																																				
								VERTICAL																																																																																				



WIFI 802.11b (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																
ANT	802.11b CH01 2412MHz																																																																																																
1+2	Horizontal	Vertical																																																																																															
Peak Avg.	Site Condition : 030905-KS FCC PART 15C 3m 3117 SN 75957 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>50.37</td><td>-23.63</td><td>74.00</td><td>65.58</td><td>34.98</td><td>11.53</td><td>61.72</td><td>285</td><td>37 Peak HORIZONTAL</td></tr><tr><td>2</td><td>4824.00</td><td>49.11</td><td>-4.89</td><td>54.00</td><td>64.32</td><td>34.98</td><td>11.53</td><td>61.72</td><td>285</td><td>37 Average HORIZONTAL</td></tr><tr><td>3</td><td>7236.00</td><td>59.42</td><td></td><td></td><td>69.93</td><td>36.85</td><td>14.54</td><td>61.90</td><td>300</td><td>0 Peak HORIZONTAL</td></tr></tbody></table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg		1	4824.00	50.37	-23.63	74.00	65.58	34.98	11.53	61.72	285	37 Peak HORIZONTAL	2	4824.00	49.11	-4.89	54.00	64.32	34.98	11.53	61.72	285	37 Average HORIZONTAL	3	7236.00	59.42			69.93	36.85	14.54	61.90	300	0 Peak HORIZONTAL	Site Condition : 030905-KS FCC PART 15C 3m 3117 SN 75957 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>48.07</td><td>-25.93</td><td>74.00</td><td>63.42</td><td>34.84</td><td>11.53</td><td>61.72</td><td>300</td><td>360 Peak VERTICAL</td></tr><tr><td>2</td><td>7236.00</td><td>56.72</td><td></td><td></td><td>67.74</td><td>36.34</td><td>14.54</td><td>61.90</td><td>300</td><td>360 Peak VERTICAL</td></tr></tbody></table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg		1	4824.00	48.07	-25.93	74.00	63.42	34.84	11.53	61.72	300	360 Peak VERTICAL	2	7236.00	56.72			67.74	36.34	14.54	61.90	300	360 Peak VERTICAL
	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																																									
1	4824.00	50.37	-23.63	74.00	65.58	34.98	11.53	61.72	285	37 Peak HORIZONTAL																																																																																							
2	4824.00	49.11	-4.89	54.00	64.32	34.98	11.53	61.72	285	37 Average HORIZONTAL																																																																																							
3	7236.00	59.42			69.93	36.85	14.54	61.90	300	0 Peak HORIZONTAL																																																																																							
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																																									
1	4824.00	48.07	-25.93	74.00	63.42	34.84	11.53	61.72	300	360 Peak VERTICAL																																																																																							
2	7236.00	56.72			67.74	36.34	14.54	61.90	300	360 Peak VERTICAL																																																																																							
Radiated 100K PSD	Site Condition : 030905-KS FCC PART 15C 3m 3117 SN 75957 HORIZONTAL RBW:100.000kHz VBW:300.000kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>110.66</td><td>36.66</td><td>74.00</td><td>103.79</td><td>32.20</td><td>8.11</td><td>33.44</td><td>300</td><td>0 Peak HORIZONTAL</td></tr></tbody></table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg		1	2412.00	110.66	36.66	74.00	103.79	32.20	8.11	33.44	300	0 Peak HORIZONTAL	Site Condition : 030905-KS FCC PART 15C 3m 3117 SN 75957 VERTICAL RBW:100.000kHz VBW:300.000kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>109.12</td><td>35.12</td><td>74.00</td><td>101.08</td><td>33.37</td><td>8.11</td><td>33.44</td><td>100</td><td>0 Peak VERTICAL</td></tr></tbody></table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg		1	2412.00	109.12	35.12	74.00	101.08	33.37	8.11	33.44	100	0 Peak VERTICAL																																	
	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																																									
1	2412.00	110.66	36.66	74.00	103.79	32.20	8.11	33.44	300	0 Peak HORIZONTAL																																																																																							
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																																									
1	2412.00	109.12	35.12	74.00	101.08	33.37	8.11	33.44	100	0 Peak VERTICAL																																																																																							



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																							
ANT	802.11b CH06 2437MHz																																																																							
1+2	Horizontal	Vertical																																																																						
Peak Avg.	Site : 03DH06-K3 Condition : FCC PART 15C 3m 3117 SN 75957 HORIZONTAL RBW 1000.000kHz VBW 3000.000kHz SMT Auto <table><thead><tr><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>dBμV/m</th><th>dBμV/m</th><th>dBμV</th><th>dBμV</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 4872.00 47.07 -26.93 74.00 62.14 35.04 11.60 61.71 300 0 Peak HORIZONTAL</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>2 7311.00 56.98 -17.02 74.00 67.36 36.86 14.66 61.90 300 0 Peak HORIZONTAL</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>3 7311.00 53.02 -0.98 54.00 63.40 36.86 14.66 61.90 300 322 Average HORIZONTAL</td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	dBμV/m	dBμV/m	dBμV	dBμV	cm	deg		1 4872.00 47.07 -26.93 74.00 62.14 35.04 11.60 61.71 300 0 Peak HORIZONTAL							2 7311.00 56.98 -17.02 74.00 67.36 36.86 14.66 61.90 300 0 Peak HORIZONTAL							3 7311.00 53.02 -0.98 54.00 63.40 36.86 14.66 61.90 300 322 Average HORIZONTAL							Site : 03DH06-K3 Condition : FCC PART 15C 3m 3117 SN 75957 VERTICAL RBW 1000.000kHz VBW 3000.000kHz SMT Auto <table><thead><tr><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>dBμV/m</th><th>dBμV/m</th><th>dBμV</th><th>dBμV</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 4872.00 46.14 -27.86 74.00 61.42 34.83 11.60 61.71 300 360 Peak VERTICAL</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>2 7311.00 56.14 -17.86 74.00 66.99 36.39 14.66 61.90 108 41 Peak VERTICAL</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>3 7311.00 52.74 -1.26 54.00 63.99 36.39 14.66 61.90 108 41 Average VERTICAL</td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	dBμV/m	dBμV/m	dBμV	dBμV	cm	deg		1 4872.00 46.14 -27.86 74.00 61.42 34.83 11.60 61.71 300 360 Peak VERTICAL							2 7311.00 56.14 -17.86 74.00 66.99 36.39 14.66 61.90 108 41 Peak VERTICAL							3 7311.00 52.74 -1.26 54.00 63.99 36.39 14.66 61.90 108 41 Average VERTICAL						
	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																	
dBμV/m	dBμV/m	dBμV	dBμV	cm	deg																																																																			
1 4872.00 47.07 -26.93 74.00 62.14 35.04 11.60 61.71 300 0 Peak HORIZONTAL																																																																								
2 7311.00 56.98 -17.02 74.00 67.36 36.86 14.66 61.90 300 0 Peak HORIZONTAL																																																																								
3 7311.00 53.02 -0.98 54.00 63.40 36.86 14.66 61.90 300 322 Average HORIZONTAL																																																																								
Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
dBμV/m	dBμV/m	dBμV	dBμV	cm	deg																																																																			
1 4872.00 46.14 -27.86 74.00 61.42 34.83 11.60 61.71 300 360 Peak VERTICAL																																																																								
2 7311.00 56.14 -17.86 74.00 66.99 36.39 14.66 61.90 108 41 Peak VERTICAL																																																																								
3 7311.00 52.74 -1.26 54.00 63.99 36.39 14.66 61.90 108 41 Average VERTICAL																																																																								



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																													
ANT	802.11b CH11 2462MHz																																																																																																													
1+2	Horizontal	Vertical																																																																																																												
Peak Avg.	Site Condition : CSDH05-K3 : FCC PART 15C 3m 3117 SN 75957 HORIZZONTAL : RBW 1000.000kHz VBW 3000.000kHz SMT Auto <table><thead><tr><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBμV/m</th><th>dB</th><th>dBμV/m</th><th>dBμV</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 4926.00</td><td>48.50</td><td>-25.50</td><td>74.00</td><td>63.45</td><td>35.10</td><td>11.66</td><td>61.71</td><td>300</td><td>0 Peak</td><td>HORIZZONT</td></tr><tr><td>2 7386.00</td><td>56.89</td><td>-17.11</td><td>74.00</td><td>67.16</td><td>36.88</td><td>14.81</td><td>61.90</td><td>298</td><td>320 Peak</td><td>HORIZZONT</td></tr><tr><td>3 7386.00</td><td>53.31</td><td>-0.79</td><td>54.00</td><td>63.42</td><td>36.88</td><td>14.81</td><td>61.90</td><td>298</td><td>320 Average</td><td>HORIZZONT</td></tr></tbody></table>	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor			MHz	dBμV/m	dB	dBμV/m	dBμV	dB	cm	1 4926.00	48.50	-25.50	74.00	63.45	35.10	11.66	61.71	300	0 Peak	HORIZZONT	2 7386.00	56.89	-17.11	74.00	67.16	36.88	14.81	61.90	298	320 Peak	HORIZZONT	3 7386.00	53.31	-0.79	54.00	63.42	36.88	14.81	61.90	298	320 Average	HORIZZONT	Site Condition : CSDH05-K5 : FCC PART 15C 3m 3117 SN 75957 VERTICAL : RBW 1000.000kHz VBW 3000.000kHz SMT Auto <table><thead><tr><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBμV/m</th><th>dB</th><th>dBμV/m</th><th>dBμV</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 4926.00</td><td>46.79</td><td>-27.21</td><td>74.00</td><td>62.02</td><td>34.82</td><td>11.66</td><td>61.71</td><td>300</td><td>360 Peak</td><td>VERTICAL</td></tr><tr><td>2 7386.00</td><td>56.38</td><td>-17.62</td><td>74.00</td><td>67.03</td><td>36.44</td><td>14.81</td><td>61.90</td><td>117</td><td>40 Peak</td><td>VERTICAL</td></tr><tr><td>3 7386.00</td><td>53.06</td><td>-0.94</td><td>54.00</td><td>63.71</td><td>36.44</td><td>14.81</td><td>61.90</td><td>117</td><td>40 Average</td><td>VERTICAL</td></tr></tbody></table>	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor			MHz	dBμV/m	dB	dBμV/m	dBμV	dB	cm	1 4926.00	46.79	-27.21	74.00	62.02	34.82	11.66	61.71	300	360 Peak	VERTICAL	2 7386.00	56.38	-17.62	74.00	67.03	36.44	14.81	61.90	117	40 Peak	VERTICAL	3 7386.00	53.06	-0.94	54.00	63.71	36.44	14.81	61.90	117	40 Average	VERTICAL
	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																							
Freq	Level	Line	Level Factor	Loss Factor																																																																																																										
MHz	dBμV/m	dB	dBμV/m	dBμV	dB	cm																																																																																																								
1 4926.00	48.50	-25.50	74.00	63.45	35.10	11.66	61.71	300	0 Peak	HORIZZONT																																																																																																				
2 7386.00	56.89	-17.11	74.00	67.16	36.88	14.81	61.90	298	320 Peak	HORIZZONT																																																																																																				
3 7386.00	53.31	-0.79	54.00	63.42	36.88	14.81	61.90	298	320 Average	HORIZZONT																																																																																																				
Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																								
Freq	Level	Line	Level Factor	Loss Factor																																																																																																										
MHz	dBμV/m	dB	dBμV/m	dBμV	dB	cm																																																																																																								
1 4926.00	46.79	-27.21	74.00	62.02	34.82	11.66	61.71	300	360 Peak	VERTICAL																																																																																																				
2 7386.00	56.38	-17.62	74.00	67.03	36.44	14.81	61.90	117	40 Peak	VERTICAL																																																																																																				
3 7386.00	53.06	-0.94	54.00	63.71	36.44	14.81	61.90	117	40 Average	VERTICAL																																																																																																				



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																																	
ANT	802.11g CH01 2412MHz																																																																																	
1+2	Horizontal	Fundamental																																																																																
Peak	Site : 030H0-K3 Condition : FCC PART 15C 3m 3117 SN 75957 HORIZONTAL RSH 1000 000kHz VSW 0.000dB SRT Auto <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>67.17</td><td>-6.83</td><td>74.00</td><td>60.38</td><td>32.15</td><td>8.09</td><td>33.45</td><td>132</td><td>165</td><td>Peak</td><td>HORIZONTAL</td></tr></table>		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas		Freq	Level	Line	Level Factor	Loss Factor					MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2389.82	67.17	-6.83	74.00	60.38	32.15	8.09	33.45	132	165	Peak	HORIZONTAL	Site : 030H0-K3 Condition : FCC PART 15C 3m 3117 SN 75957 HORIZONTAL RSH 1000 000kHz VSW 0.000dB SRT Auto <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>2412.00</td><td>113.05</td><td>39.05</td><td>74.00</td><td>106.18</td><td>32.20</td><td>8.11</td><td>33.44</td><td>132</td><td>165</td><td>Peak</td><td>HORIZONTAL</td></tr></table>		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas		Freq	Level	Line	Level Factor	Loss Factor					MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1 *	2412.00	113.05	39.05	74.00	106.18	32.20	8.11	33.44	132	165	Peak	HORIZONTAL
		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																									
	Freq	Level	Line	Level Factor	Loss Factor																																																																													
	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																										
1	2389.82	67.17	-6.83	74.00	60.38	32.15	8.09	33.45	132	165	Peak	HORIZONTAL																																																																						
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																										
	Freq	Level	Line	Level Factor	Loss Factor																																																																													
	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																										
1 *	2412.00	113.05	39.05	74.00	106.18	32.20	8.11	33.44	132	165	Peak	HORIZONTAL																																																																						
Avg.	Site : 030H0-K3 Condition : FCC PART 15C (AVG) 3m 3117 SN 75957 HORIZONTAL RSH 1000 000kHz VSW 0.000dB SRT Auto <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>52.58</td><td>-1.42</td><td>54.00</td><td>45.79</td><td>32.15</td><td>8.09</td><td>33.45</td><td>132</td><td>165</td><td>Average</td><td>HORIZONTAL</td></tr></table>		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas		Freq	Level	Line	Level Factor	Loss Factor					MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2389.95	52.58	-1.42	54.00	45.79	32.15	8.09	33.45	132	165	Average	HORIZONTAL	Site : 030H0-K3 Condition : FCC PART 15C (AVG) 3m 3117 SN 75957 HORIZONTAL RSH 1000 000kHz VSW 0.000dB SRT Auto <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>2410.00</td><td>105.58</td><td>51.58</td><td>54.00</td><td>98.71</td><td>32.20</td><td>8.11</td><td>33.44</td><td>132</td><td>165</td><td>Average</td><td>HORIZONTAL</td></tr></table>		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas		Freq	Level	Line	Level Factor	Loss Factor					MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1 *	2410.00	105.58	51.58	54.00	98.71	32.20	8.11	33.44	132	165	Average	HORIZONTAL
		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																									
	Freq	Level	Line	Level Factor	Loss Factor																																																																													
	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																										
1	2389.95	52.58	-1.42	54.00	45.79	32.15	8.09	33.45	132	165	Average	HORIZONTAL																																																																						
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																										
	Freq	Level	Line	Level Factor	Loss Factor																																																																													
	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																										
1 *	2410.00	105.58	51.58	54.00	98.71	32.20	8.11	33.44	132	165	Average	HORIZONTAL																																																																						







WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																									
ANT	802.11g CH01 2412MHz																																																																									
1+2	Vertical	Fundamental																																																																								
Peak	Site Condition : 032006-KS : FCC PART 15C 3m 3117 5W 75957 VERTICAL : 80W 1000.000000 VSWR 1000.000000 SRT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBm/Vm</th><th>dB</th><th>dBm/Vm</th><th>dBm/Vm</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.30</td><td>66.24</td><td>-7.76</td><td>74.00</td><td>58.10</td><td>33.45</td><td>304</td><td>44 Peak</td><td>VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dB	cm	deg	1	2389.30	66.24	-7.76	74.00	58.10	33.45	304	44 Peak	VERTICAL	Site Condition : 032006-KS : FCC PART 15C 3m 3117 5W 75957 VERTICAL : 80W 1000.000000 VSWR 1000.000000 SRT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBm/Vm</th><th>dB</th><th>dBm/Vm</th><th>dBm/Vm</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2410.00</td><td>109.36</td><td>35.36</td><td>74.00</td><td>101.32</td><td>33.37</td><td>8.11</td><td>33.44</td><td>304</td><td>44 Peak</td><td>VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dB	cm	deg	1	2410.00	109.36	35.36	74.00	101.32	33.37	8.11	33.44	304	44 Peak	VERTICAL		
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
Freq	Level	Line	Level Factor	Loss Factor																																																																						
MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dB	cm	deg																																																																			
1	2389.30	66.24	-7.76	74.00	58.10	33.45	304	44 Peak	VERTICAL																																																																	
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																			
Freq	Level	Line	Level Factor	Loss Factor																																																																						
MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dB	cm	deg																																																																			
1	2410.00	109.36	35.36	74.00	101.32	33.37	8.11	33.44	304	44 Peak	VERTICAL																																																															
Avg.	Site Condition : 032006-KS : FCC PART 15C (AVG) 3m 3117 5W 75957 VERTICAL : 80W 1000.000000 VSWR 0.010000 SRT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBm/Vm</th><th>dB</th><th>dBm/Vm</th><th>dBm/Vm</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>50.73</td><td>-3.27</td><td>54.00</td><td>42.59</td><td>33.50</td><td>8.09</td><td>33.45</td><td>304</td><td>44 Average</td><td>VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dB	cm	deg	1	2389.95	50.73	-3.27	54.00	42.59	33.50	8.09	33.45	304	44 Average	VERTICAL	Site Condition : 032006-KS : FCC PART 15C (AVG) 3m 3117 5W 75957 VERTICAL : 80W 1000.000000 VSWR 0.010000 SRT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBm/Vm</th><th>dB</th><th>dBm/Vm</th><th>dBm/Vm</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2410.00</td><td>102.23</td><td>48.23</td><td>54.00</td><td>94.19</td><td>33.37</td><td>8.11</td><td>33.44</td><td>304</td><td>44 Average</td><td>VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dB	cm	deg	1	2410.00	102.23	48.23	54.00	94.19	33.37	8.11	33.44	304	44 Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
Freq	Level	Line	Level Factor	Loss Factor																																																																						
MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dB	cm	deg																																																																			
1	2389.95	50.73	-3.27	54.00	42.59	33.50	8.09	33.45	304	44 Average	VERTICAL																																																															
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																			
Freq	Level	Line	Level Factor	Loss Factor																																																																						
MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dB	cm	deg																																																																			
1	2410.00	102.23	48.23	54.00	94.19	33.37	8.11	33.44	304	44 Average	VERTICAL																																																															







FCC RF Test Report

Report No. : FR082617-01C

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																											
ANT	802.11g CH02 2417MHz																																																																											
1+2	Horizontal					Fundamental																																																																						
Peak	 Site Condition : 032006-KS : FCC PART 15C 3m 3117 SN 75957 HORIZONTAL : RBW:1000.000kHz VSW:3.000.000kHz SFT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.50</td><td>66.80</td><td>-7.20</td><td>74.00</td><td>60.01</td><td>32.15</td><td>8.09</td><td>33.45</td><td>140</td><td>159 Peak HORIZONTAL</td></tr></tbody></table>					Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg			1	2389.50	66.80	-7.20	74.00	60.01	32.15	8.09	33.45	140	159 Peak HORIZONTAL	 Site Condition : 032006-KS : FCC PART 15C 3m 3117 SN 75957 HORIZONTAL : RBW:1000.000kHz VSW:3.000.000kHz SFT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2416.00</td><td>114.85</td><td>40.85</td><td>74.00</td><td>107.18</td><td>32.20</td><td>8.11</td><td>33.44</td><td>140</td><td>159 Peak HORIZONTAL</td></tr></tbody></table>					Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg			1	2416.00	114.85	40.85	74.00	107.18	32.20	8.11	33.44	140	159 Peak HORIZONTAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																	
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg																																																																				
1	2389.50	66.80	-7.20	74.00	60.01	32.15	8.09	33.45	140	159 Peak HORIZONTAL																																																																		
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg																																																																				
1	2416.00	114.85	40.85	74.00	107.18	32.20	8.11	33.44	140	159 Peak HORIZONTAL																																																																		
Avg.	 Site Condition : 032006-KS : FCC PART 15C (AVG) 3m 3117 SN 75957 HORIZONTAL : RBW:1000.000kHz VSW:3.010kHz SFT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.04</td><td>47.94</td><td>-6.06</td><td>54.00</td><td>41.15</td><td>32.15</td><td>8.09</td><td>33.45</td><td>140</td><td>159 Average HORIZONTAL</td></tr></tbody></table>					Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg			1	2389.04	47.94	-6.06	54.00	41.15	32.15	8.09	33.45	140	159 Average HORIZONTAL	 Site Condition : 032006-KS : FCC PART 15C (AVG) 3m 3117 SN 75957 HORIZONTAL : RBW:1000.000kHz VSW:3.010kHz SFT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2418.00</td><td>104.88</td><td>52.88</td><td>54.00</td><td>100.11</td><td>32.10</td><td>8.11</td><td>33.44</td><td>140</td><td>159 Average HORIZONTAL</td></tr></tbody></table>					Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg			1	2418.00	104.88	52.88	54.00	100.11	32.10	8.11	33.44	140	159 Average HORIZONTAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																	
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg																																																																				
1	2389.04	47.94	-6.06	54.00	41.15	32.15	8.09	33.45	140	159 Average HORIZONTAL																																																																		
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg																																																																				
1	2418.00	104.88	52.88	54.00	100.11	32.10	8.11	33.44	140	159 Average HORIZONTAL																																																																		





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																									
ANT	802.11g CH02 2417MHz																																																									
1+2	Vertical	Fundamental																																																								
Peak	 Site Condition : 032006-KS : FCC PART 15C 3m 3117 SN 75957 VERTICAL : RBW:1000.000kHz VSW:3.000.000kHz SMT:Auto <table><tr><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Poi/Phas</th></tr><tr><th>Freq Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.69</td><td>65.27</td><td>-8.73</td><td>74.00</td><td>57.13</td><td>33.50</td><td>8.09 33.45 300 34 Peak VERTICAL</td></tr></table>	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Poi/Phas	Freq Level	Line	Level Factor	Loss Factor				MHz dBuV/m	dB	dBuV/m	dB/m	dB	cm	deg	1 2389.69	65.27	-8.73	74.00	57.13	33.50	8.09 33.45 300 34 Peak VERTICAL	 Site Condition : 032006-KS : FCC PART 15C 3m 3117 SN 75957 VERTICAL : RBW:1000.000kHz VSW:3.000.000kHz SMT:Auto <table><tr><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Poi/Phas</th></tr><tr><th>Freq Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2420.00</td><td>111.12</td><td>37.12</td><td>74.00</td><td>103.18</td><td>33.34</td><td>8.14 33.44 300 34 Peak VERTICAL</td></tr></table>	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Poi/Phas	Freq Level	Line	Level Factor	Loss Factor				MHz dBuV/m	dB	dBuV/m	dB/m	dB	cm	deg	1 * 2420.00	111.12	37.12	74.00	103.18	33.34	8.14 33.44 300 34 Peak VERTICAL
	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																			
Freq Level	Line	Level Factor	Loss Factor																																																							
MHz dBuV/m	dB	dBuV/m	dB/m	dB	cm	deg																																																				
1 2389.69	65.27	-8.73	74.00	57.13	33.50	8.09 33.45 300 34 Peak VERTICAL																																																				
Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																				
Freq Level	Line	Level Factor	Loss Factor																																																							
MHz dBuV/m	dB	dBuV/m	dB/m	dB	cm	deg																																																				
1 * 2420.00	111.12	37.12	74.00	103.18	33.34	8.14 33.44 300 34 Peak VERTICAL																																																				
Avg.	 Site Condition : 032006-KS : FCC PART 15C (AVG) 3m 3117 SN 75957 VERTICAL : RBW:1000.000kHz VSW:3.010kHz SMT:Auto <table><tr><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Poi/Phas</th></tr><tr><th>Freq Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.95</td><td>47.10</td><td>-6.90</td><td>54.00</td><td>38.96</td><td>33.50</td><td>8.09 33.45 300 34 Average VERTICAL</td></tr></table>	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Poi/Phas	Freq Level	Line	Level Factor	Loss Factor				MHz dBuV/m	dB	dBuV/m	dB/m	dB	cm	deg	1 2389.95	47.10	-6.90	54.00	38.96	33.50	8.09 33.45 300 34 Average VERTICAL	 Site Condition : 032006-KS : FCC PART 15C (AVG) 3m 3117 SN 75957 VERTICAL : RBW:1000.000kHz VSW:3.010kHz SMT:Auto <table><tr><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Poi/Phas</th></tr><tr><th>Freq Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2414.00</td><td>103.85</td><td>49.85</td><td>54.00</td><td>95.81</td><td>33.37</td><td>8.11 33.44 300 34 Average VERTICAL</td></tr></table>	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Poi/Phas	Freq Level	Line	Level Factor	Loss Factor				MHz dBuV/m	dB	dBuV/m	dB/m	dB	cm	deg	1 * 2414.00	103.85	49.85	54.00	95.81	33.37	8.11 33.44 300 34 Average VERTICAL
	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																			
Freq Level	Line	Level Factor	Loss Factor																																																							
MHz dBuV/m	dB	dBuV/m	dB/m	dB	cm	deg																																																				
1 2389.95	47.10	-6.90	54.00	38.96	33.50	8.09 33.45 300 34 Average VERTICAL																																																				
Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																				
Freq Level	Line	Level Factor	Loss Factor																																																							
MHz dBuV/m	dB	dBuV/m	dB/m	dB	cm	deg																																																				
1 * 2414.00	103.85	49.85	54.00	95.81	33.37	8.11 33.44 300 34 Average VERTICAL																																																				



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																			
ANT	802.11g CH06 2437MHz - L																																																			
1+2	Horizontal						Fundamental																																													
Peak	Site : 032006-KS Condition : FCC PART 15C 3m 3117 SN 75957 HORIZONTAL RBW 1000.000kHz VBW 3000.000kHz SFT Auto <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2386.57</td><td>57.31</td><td>-16.69</td><td>74.00</td><td>50.52</td><td>32.15</td><td>8.09</td><td>33.45</td><td>152</td><td>211</td><td>Peak</td><td>HORIZONTAL</td></tr></table>													Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor					MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg		1	2386.57	57.31	-16.69	74.00	50.52	32.15	8.09	33.45	152	211	Peak	HORIZONTAL
		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																											
Freq	Level	Line	Level Factor	Loss Factor																																																
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg																																													
1	2386.57	57.31	-16.69	74.00	50.52	32.15	8.09	33.45	152	211	Peak	HORIZONTAL																																								
Avg.	Site : 032006-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 75957 HORIZONTAL RBW 1000.000kHz VBW 0.0100kHz SFT Auto <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.69</td><td>46.39</td><td>-7.61</td><td>54.00</td><td>39.60</td><td>32.15</td><td>8.09</td><td>33.45</td><td>152</td><td>211</td><td>Average</td><td>HORIZONTAL</td></tr></table>													Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor					MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg		1	2389.69	46.39	-7.61	54.00	39.60	32.15	8.09	33.45	152	211	Average	HORIZONTAL
		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																											
Freq	Level	Line	Level Factor	Loss Factor																																																
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg																																													
1	2389.69	46.39	-7.61	54.00	39.60	32.15	8.09	33.45	152	211	Average	HORIZONTAL																																								
Peak	Site : 032006-KS Condition : FCC PART 15C 3m 3117 SN 75957 HORIZONTAL RBW 1000.000kHz VBW 3000.000kHz SFT Auto <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2440.00</td><td>114.63</td><td>40.63</td><td>74.00</td><td>107.90</td><td>32.00</td><td>8.16</td><td>33.43</td><td>152</td><td>211</td><td>Peak</td><td>HORIZONTAL</td></tr></table>													Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor					MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg		1	2440.00	114.63	40.63	74.00	107.90	32.00	8.16	33.43	152	211	Peak	HORIZONTAL
		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																											
Freq	Level	Line	Level Factor	Loss Factor																																																
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg																																													
1	2440.00	114.63	40.63	74.00	107.90	32.00	8.16	33.43	152	211	Peak	HORIZONTAL																																								
Avg.	Site : 032006-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 75957 HORIZONTAL RBW 1000.000kHz VBW 0.0100kHz SFT Auto <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2440.00</td><td>107.25</td><td>53.25</td><td>54.00</td><td>100.52</td><td>32.00</td><td>8.16</td><td>33.43</td><td>152</td><td>211</td><td>Average</td><td>HORIZONTAL</td></tr></table>													Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor					MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg		1	2440.00	107.25	53.25	54.00	100.52	32.00	8.16	33.43	152	211	Average	HORIZONTAL
		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																											
Freq	Level	Line	Level Factor	Loss Factor																																																
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg																																													
1	2440.00	107.25	53.25	54.00	100.52	32.00	8.16	33.43	152	211	Average	HORIZONTAL																																								





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																						
ANT	802.11g CH06 2437MHz - R																																						
1+2	Horizontal	Fundamental																																					
Peak	 Site : 032006-KS Condition : FCC PART 15C 3m 3117 SN 79957 HORIZONTAL RSM 1000 000kHz VSW 0.000Hz SRT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.64</td><td>55.76</td><td>-18.24</td><td>74.00</td><td>49.17</td><td>31.80</td><td>8.22</td><td>33.43</td><td>152</td><td>211</td><td>Peak</td><td>HORIZONTAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2484.64	55.76	-18.24	74.00	49.17	31.80	8.22	33.43	152	211	Peak	HORIZONTAL	-
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																															
Freq	Level	Limit	Level Factor	Loss Factor																																			
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																
1	2484.64	55.76	-18.24	74.00	49.17	31.80	8.22	33.43	152	211	Peak	HORIZONTAL																											
Avg.	 Site : 032006-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 79957 HORIZONTAL RSM 1000 000kHz VSW 0.010kHz SRT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>44.39</td><td>-9.61</td><td>54.00</td><td>37.80</td><td>31.80</td><td>8.22</td><td>33.43</td><td>152</td><td>211</td><td>Average</td><td>HORIZONTAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2483.56	44.39	-9.61	54.00	37.80	31.80	8.22	33.43	152	211	Average	HORIZONTAL	-
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																															
Freq	Level	Limit	Level Factor	Loss Factor																																			
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																
1	2483.56	44.39	-9.61	54.00	37.80	31.80	8.22	33.43	152	211	Average	HORIZONTAL																											



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																									
ANT	802.11g CH06 2437MHz - L																																																																									
1+2	Vertical	Fundamental																																																																								
Peak	Site Condition : 032004-KS FCC PART 15C 3m 3117 SN 75957 VERTICAL NWB 1000 000kHz VSW 0.0000 SRT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2372.92</td><td>55.58</td><td>-18.42</td><td>74.00</td><td>47.68</td><td>33.29</td><td>8.06</td><td>33.45</td><td>262</td><td>7 Peak</td><td>VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg	1	2372.92	55.58	-18.42	74.00	47.68	33.29	8.06	33.45	262	7 Peak	VERTICAL	Site Condition : 032004-KS FCC PART 15C 3m 3117 SN 75957 VERTICAL NWB 1000 000kHz VSW 0.0000 SRT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>110.91</td><td>36.91</td><td>74.00</td><td>103.07</td><td>33.11</td><td>8.16</td><td>33.43</td><td>262</td><td>7 Peak</td><td>VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg	1	2440.00	110.91	36.91	74.00	103.07	33.11	8.16	33.43	262	7 Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
Freq	Level	Line	Level Factor	Loss Factor																																																																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																																																																			
1	2372.92	55.58	-18.42	74.00	47.68	33.29	8.06	33.45	262	7 Peak	VERTICAL																																																															
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																			
Freq	Level	Line	Level Factor	Loss Factor																																																																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																																																																			
1	2440.00	110.91	36.91	74.00	103.07	33.11	8.16	33.43	262	7 Peak	VERTICAL																																																															
Avg.	Site Condition : 032004-KS FCC PART 15C (AVG) 3m 3117 SN 75957 VERTICAL NWB 1000 000kHz VSW 0.0100 SRT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>44.87</td><td>-9.13</td><td>54.00</td><td>36.73</td><td>33.50</td><td>8.09</td><td>33.45</td><td>262</td><td>7 Average</td><td>VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg	1	2389.95	44.87	-9.13	54.00	36.73	33.50	8.09	33.45	262	7 Average	VERTICAL	Site Condition : 032004-KS FCC PART 15C (AVG) 3m 3117 SN 75957 VERTICAL NWB 1000 000kHz VSW 0.0100 SRT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>103.44</td><td>49.44</td><td>54.00</td><td>95.60</td><td>33.11</td><td>8.16</td><td>33.43</td><td>262</td><td>7 Average</td><td>VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg	1	2440.00	103.44	49.44	54.00	95.60	33.11	8.16	33.43	262	7 Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
Freq	Level	Line	Level Factor	Loss Factor																																																																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																																																																			
1	2389.95	44.87	-9.13	54.00	36.73	33.50	8.09	33.45	262	7 Average	VERTICAL																																																															
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																			
Freq	Level	Line	Level Factor	Loss Factor																																																																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																																																																			
1	2440.00	103.44	49.44	54.00	95.60	33.11	8.16	33.43	262	7 Average	VERTICAL																																																															







WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																									
ANT	802.11g CH06 2437MHz - R																																									
1+2	Vertical					Fundamental																																				
Peak	 Site : 032006-K3 Condition : FCC PART 15C 3m 3117 5N 79957 VERTICAL R99 1000 0000Hz VSW 1000 0000Hz SRT Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2484.08</td><td>55.93</td><td>-18.07</td><td>74.00</td><td>48.28</td><td>32.86</td><td>8.22</td><td>33.43</td><td>262</td><td>7 Peak VERTICAL</td></tr></table>										Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg			1	2484.08	55.93	-18.07	74.00	48.28	32.86	8.22	33.43	262	7 Peak VERTICAL	-
	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																																			
1	2484.08	55.93	-18.07	74.00	48.28	32.86	8.22	33.43	262	7 Peak VERTICAL																																
Avg.	 Site : 032006-K3 Condition : FCC PART 15C (AVG) 3m 3117 5N 79957 VERTICAL R99 1000 0000Hz VSW 0.0100Hz SRT Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2484.22</td><td>44.45</td><td>-9.55</td><td>54.00</td><td>36.80</td><td>32.86</td><td>8.22</td><td>33.43</td><td>262</td><td>7 Average VERTICAL</td></tr></table>										Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg			1	2484.22	44.45	-9.55	54.00	36.80	32.86	8.22	33.43	262	7 Average VERTICAL	-
	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																																			
1	2484.22	44.45	-9.55	54.00	36.80	32.86	8.22	33.43	262	7 Average VERTICAL																																







FCC RF Test Report

Report No. : FR082617-01C

WIFI		2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																																																																											
ANT		802.11g CH10 2457MHz																																																																																																																											
1+2		Horizontal										Fundamental																																																																																																																	
Peak																																																																																																																													
	Site : 032004-K5 Condition : FCC PART 15C 3m 3117 5W 75957 HORIZONTAL FSM: 1000, 0000Hz, YSR: 3000, 0000Hz, SRT: Auto <table><thead><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>on</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.28</td><td>67.98</td><td>-6.02</td><td>74.00</td><td>61.99</td><td>31.80</td><td>8.22</td><td>33.43</td><td>143</td><td>208</td><td>Peak</td><td>HORIZONTAL</td></tr></tbody></table>																							Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas		Freq	Level	Line	Level Factor	Loss Factor					MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on	deg	1	2484.28	67.98	-6.02	74.00	61.99	31.80	8.22	33.43	143	208	Peak	HORIZONTAL	Site : 032004-K5 Condition : FCC PART 15C 3m 3117 5W 75957 HORIZONTAL FSM: 1000, 0000Hz, YSR: 3000, 0000Hz, SRT: Auto <table><thead><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>on</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2460.00</td><td>114.86</td><td>40.86</td><td>74.00</td><td>108.20</td><td>31.90</td><td>8.19</td><td>33.43</td><td>143</td><td>208</td><td>Peak</td><td>HORIZONTAL</td></tr></tbody></table>																							Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas		Freq	Level	Line	Level Factor	Loss Factor					MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on	deg	1	2460.00	114.86	40.86	74.00	108.20	31.90	8.19	33.43	143	208	Peak
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																					
	Freq	Level	Line	Level Factor	Loss Factor																																																																																																																								
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on	deg																																																																																																																				
1	2484.28	67.98	-6.02	74.00	61.99	31.80	8.22	33.43	143	208	Peak	HORIZONTAL																																																																																																																	
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																					
	Freq	Level	Line	Level Factor	Loss Factor																																																																																																																								
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on	deg																																																																																																																				
1	2460.00	114.86	40.86	74.00	108.20	31.90	8.19	33.43	143	208	Peak	HORIZONTAL																																																																																																																	
Avg.																																																																																																																													
	Site : 032004-K5 Condition : FCC PART 15C (AVG) 3m 3117 5W 75957 HORIZONTAL FSM: 1000, 0000Hz, YSR: 0, 0100Hz, SRT: Auto <table><thead><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>on</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.10</td><td>48.03</td><td>-5.97</td><td>54.00</td><td>41.44</td><td>31.80</td><td>8.22</td><td>33.43</td><td>143</td><td>208</td><td>Average</td><td>HORIZONTAL</td></tr></tbody></table>																							Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas		Freq	Level	Line	Level Factor	Loss Factor					MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on	deg	1	2484.10	48.03	-5.97	54.00	41.44	31.80	8.22	33.43	143	208	Average	HORIZONTAL	Site : 032004-K5 Condition : FCC PART 15C (AVG) 3m 3117 5W 75957 HORIZONTAL FSM: 1000, 0000Hz, YSR: 0, 0100Hz, SRT: Auto <table><thead><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>on</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2454.00</td><td>106.03</td><td>52.03</td><td>54.00</td><td>99.37</td><td>31.90</td><td>8.19</td><td>33.43</td><td>143</td><td>208</td><td>Average</td><td>HORIZONTAL</td></tr></tbody></table>																							Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas		Freq	Level	Line	Level Factor	Loss Factor					MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on	deg	1	2454.00	106.03	52.03	54.00	99.37	31.90	8.19	33.43	143	208	Average
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																					
	Freq	Level	Line	Level Factor	Loss Factor																																																																																																																								
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on	deg																																																																																																																				
1	2484.10	48.03	-5.97	54.00	41.44	31.80	8.22	33.43	143	208	Average	HORIZONTAL																																																																																																																	
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																					
	Freq	Level	Line	Level Factor	Loss Factor																																																																																																																								
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on	deg																																																																																																																				
1	2454.00	106.03	52.03	54.00	99.37	31.90	8.19	33.43	143	208	Average	HORIZONTAL																																																																																																																	



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																															
ANT	802.11g CH10 2457MHz																																																															
1+2	Vertical	Fundamental																																																														
Peak	 Site Condition : 032004-KS FCC PART 15C 3m 3117 SN 75957 VERTICAL RSM 1000 0000Hz VSW 3000 0000Hz SMT Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2483.56</td><td>65.85</td><td>-8.15</td><td>74.00</td><td>58.20</td><td>32.86</td><td>8.22</td><td>33.43</td><td>326</td><td>34 Peak VERTICAL</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg			1	2483.56	65.85	-8.15	74.00	58.20	32.86	8.22	33.43	326	34 Peak VERTICAL	 Site Condition : 032004-KS FCC PART 15C 3m 3117 SN 75957 VERTICAL RSM 1000 0000Hz VSW 3000 0000Hz SMT Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2458.00</td><td>110.88</td><td>36.88</td><td>74.00</td><td>103.13</td><td>32.99</td><td>8.19</td><td>33.43</td><td>326</td><td>34 Peak VERTICAL</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg			1	2458.00	110.88	36.88	74.00	103.13	32.99	8.19	33.43	326	34 Peak VERTICAL
	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																																																									
1	2483.56	65.85	-8.15	74.00	58.20	32.86	8.22	33.43	326	34 Peak VERTICAL																																																						
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																																																									
1	2458.00	110.88	36.88	74.00	103.13	32.99	8.19	33.43	326	34 Peak VERTICAL																																																						
Avg.	 Site Condition : 032004-KS FCC PART 15C (AVG) 3m 3117 SN 75957 VERTICAL RSM 1000 0000Hz VSW 3.01000Hz SMT Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2483.50</td><td>66.50</td><td>-7.50</td><td>54.00</td><td>38.85</td><td>32.86</td><td>8.22</td><td>33.43</td><td>326</td><td>34 Average VERTICAL</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg			1	2483.50	66.50	-7.50	54.00	38.85	32.86	8.22	33.43	326	34 Average VERTICAL	 Site Condition : 032004-KS FCC PART 15C (AVG) 3m 3117 SN 75957 VERTICAL RSM 1000 0000Hz VSW 3.01000Hz SMT Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2458.00</td><td>103.43</td><td>49.43</td><td>54.00</td><td>95.68</td><td>32.99</td><td>8.19</td><td>33.43</td><td>326</td><td>34 Average VERTICAL</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg			1	2458.00	103.43	49.43	54.00	95.68	32.99	8.19	33.43	326	34 Average VERTICAL
	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																																																									
1	2483.50	66.50	-7.50	54.00	38.85	32.86	8.22	33.43	326	34 Average VERTICAL																																																						
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																																																									
1	2458.00	103.43	49.43	54.00	95.68	32.99	8.19	33.43	326	34 Average VERTICAL																																																						



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																	
ANT	802.11g CH11 2462MHz																																																																	
1+2	Horizontal	Fundamental																																																																
Peak	Site Condition : 032006-KS : FCC PART 15C 3m 3117 SN 75957 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SFT:Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 1 2463.62</td><td>68.53</td><td>-5.47</td><td>74.00</td><td>61.94</td><td>31.80</td><td>8.22</td><td>33.43 100 163 Peak HORIZONTAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg	1 1 2463.62	68.53	-5.47	74.00	61.94	31.80	8.22	33.43 100 163 Peak HORIZONTAL	Site Condition : 032006-KS : FCC PART 15C 3m 3117 SN 75957 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SFT:Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2462.00</td><td>110.93</td><td>36.93</td><td>74.00</td><td>104.27</td><td>31.90</td><td>8.19</td><td>33.43 100 163 Peak HORIZONTAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg	1 * 2462.00	110.93	36.93	74.00	104.27	31.90	8.19	33.43 100 163 Peak HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
Freq	Level	Line	Level Factor	Loss Factor																																																														
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg																																																											
1 1 2463.62	68.53	-5.47	74.00	61.94	31.80	8.22	33.43 100 163 Peak HORIZONTAL																																																											
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																											
Freq	Level	Line	Level Factor	Loss Factor																																																														
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg																																																											
1 * 2462.00	110.93	36.93	74.00	104.27	31.90	8.19	33.43 100 163 Peak HORIZONTAL																																																											
Avg.	Site Condition : 032006-KS : FCC PART 15C (AVG) 3m 3117 SN 75957 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SFT:Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 1 2463.50</td><td>51.54</td><td>-2.46</td><td>54.00</td><td>44.95</td><td>31.80</td><td>8.22</td><td>33.43 100 163 Average HORIZONTAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg	1 1 2463.50	51.54	-2.46	54.00	44.95	31.80	8.22	33.43 100 163 Average HORIZONTAL	Site Condition : 032006-KS : FCC PART 15C (AVG) 3m 3117 SN 75957 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SFT:Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2460.00</td><td>103.78</td><td>49.78</td><td>54.00</td><td>97.12</td><td>31.90</td><td>8.19</td><td>33.43 100 163 Average HORIZONTAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg	1 * 2460.00	103.78	49.78	54.00	97.12	31.90	8.19	33.43 100 163 Average HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
Freq	Level	Line	Level Factor	Loss Factor																																																														
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg																																																											
1 1 2463.50	51.54	-2.46	54.00	44.95	31.80	8.22	33.43 100 163 Average HORIZONTAL																																																											
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																											
Freq	Level	Line	Level Factor	Loss Factor																																																														
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg																																																											
1 * 2460.00	103.78	49.78	54.00	97.12	31.90	8.19	33.43 100 163 Average HORIZONTAL																																																											





WIFI	2.4GHz 2400~2483.5MHz Fundamental @ 3m																																																																										
ANT	802.11g CH11 2462MHz																																																																										
1+2	Vertical	Fundamental																																																																									
Peak	Site Condition : 032000-KS : FCC PART 15C 3m 3117 SN 75957 VERTICAL : RBW 1000.000kHz VBW 3000.000kHz SMT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2484.04</td><td>62.24 ~11.76</td><td>74.00</td><td>54.99</td><td>32.86</td><td>8.22</td><td>33.43</td><td>260</td><td>360</td><td>Peak</td><td>VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dB	cm	deg		1	2484.04	62.24 ~11.76	74.00	54.99	32.86	8.22	33.43	260	360	Peak	VERTICAL	Site Condition : 032000-KS : FCC PART 15C 3m 3117 SN 75957 VERTICAL : RBW 1000.000kHz VBW 3000.000kHz SMT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 *</td><td>2460.00</td><td>107.59</td><td>33.59</td><td>74.00</td><td>99.84</td><td>32.99</td><td>8.19</td><td>33.43</td><td>260</td><td>360</td><td>Peak</td><td>VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dB	cm	deg		1 *	2460.00	107.59	33.59	74.00	99.84	32.99	8.19	33.43	260	360	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																			
Freq	Level	Line	Level Factor	Loss Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dB	cm	deg																																																																					
1	2484.04	62.24 ~11.76	74.00	54.99	32.86	8.22	33.43	260	360	Peak	VERTICAL																																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
Freq	Level	Line	Level Factor	Loss Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dB	cm	deg																																																																					
1 *	2460.00	107.59	33.59	74.00	99.84	32.99	8.19	33.43	260	360	Peak	VERTICAL																																																															
Avg.	Site Condition : 032000-KS : FCC PART 15C (AVG) 3m 3117 SN 75957 VERTICAL : RBW 1000.000kHz VBW 0.0100kHz SMT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.80</td><td>47.47 ~6.53</td><td>54.00</td><td>39.82</td><td>32.86</td><td>8.22</td><td>33.43</td><td>260</td><td>360</td><td>Average</td><td>VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dB	cm	deg		1	2483.80	47.47 ~6.53	54.00	39.82	32.86	8.22	33.43	260	360	Average	VERTICAL	Site Condition : 032000-KS : FCC PART 15C (AVG) 3m 3117 SN 75957 VERTICAL : RBW 1000.000kHz VBW 0.0100kHz SMT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 *</td><td>2460.00</td><td>100.43</td><td>46.43</td><td>54.00</td><td>92.68</td><td>32.99</td><td>8.19</td><td>33.43</td><td>260</td><td>360</td><td>Average</td><td>VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dB	cm	deg		1 *	2460.00	100.43	46.43	54.00	92.68	32.99	8.19	33.43	260	360	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																			
Freq	Level	Line	Level Factor	Loss Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dB	cm	deg																																																																					
1	2483.80	47.47 ~6.53	54.00	39.82	32.86	8.22	33.43	260	360	Average	VERTICAL																																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
Freq	Level	Line	Level Factor	Loss Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dB	cm	deg																																																																					
1 *	2460.00	100.43	46.43	54.00	92.68	32.99	8.19	33.43	260	360	Average	VERTICAL																																																															



WIFI 802.11g (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																
ANT	802.11g CH01 2412MHz																																																																																																
1+2	Horizontal	Vertical																																																																																															
Peak Avg.	Site Condition : 032016-ES FCC PART 15C 3m 3117 SN 70957 HORIZONTAL 800 1000 5000Hz VSW 3000 5000Hz SPT Auto <table><thead><tr><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>46.11</td><td>-27.89</td><td>74.00</td><td>60.76</td><td>34.98</td><td>11.53</td><td>61.16</td><td>300</td><td>0 Peak</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>7240.00</td><td>55.74</td><td></td><td></td><td>65.44</td><td>36.85</td><td>14.54</td><td>61.09</td><td>300</td><td>0 Peak</td><td>HORIZONTAL</td></tr></tbody></table>	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq Level	Line	Level Factor	Loss Factor			MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg			1	4824.00	46.11	-27.89	74.00	60.76	34.98	11.53	61.16	300	0 Peak	HORIZONTAL	2	7240.00	55.74			65.44	36.85	14.54	61.09	300	0 Peak	HORIZONTAL	Site Condition : 032016-ES FCC PART 15C 3m 3117 SN 70957 VERTICAL 800 1000 5000Hz VSW 3000 5000Hz SPT Auto <table><thead><tr><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>44.14</td><td>-29.86</td><td>74.00</td><td>58.93</td><td>34.84</td><td>11.53</td><td>61.16</td><td>300</td><td>360 Peak</td><td>VERTICAL</td></tr><tr><td>2</td><td>7250.00</td><td>54.88</td><td></td><td></td><td>60.13</td><td>36.33</td><td>14.51</td><td>61.09</td><td>300</td><td>360 Peak</td><td>VERTICAL</td></tr></tbody></table>	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg			1	4824.00	44.14	-29.86	74.00	58.93	34.84	11.53	61.16	300	360 Peak	VERTICAL	2	7250.00	54.88			60.13	36.33	14.51	61.09	300	360 Peak	VERTICAL
	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																										
Freq Level	Line	Level Factor	Loss Factor																																																																																														
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																																																																																										
1	4824.00	46.11	-27.89	74.00	60.76	34.98	11.53	61.16	300	0 Peak	HORIZONTAL																																																																																						
2	7240.00	55.74			65.44	36.85	14.54	61.09	300	0 Peak	HORIZONTAL																																																																																						
Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																											
Freq Level	Line	Level Factor	Loss Factor																																																																																														
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																																																																																										
1	4824.00	44.14	-29.86	74.00	58.93	34.84	11.53	61.16	300	360 Peak	VERTICAL																																																																																						
2	7250.00	54.88			60.13	36.33	14.51	61.09	300	360 Peak	VERTICAL																																																																																						
Radiated 100K PSD	Site Condition : 032016-ES FCC PART 15C 3m 3117 SN 70957 HORIZONTAL 800 100 5000Hz VSW 300 5000Hz SPT Auto <table><thead><tr><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2410.00</td><td>108.00</td><td>34.00</td><td>74.00</td><td>101.13</td><td>32.20</td><td>8.11</td><td>33.44</td><td>300</td><td>0 Peak</td><td>HORIZONTAL</td></tr></tbody></table>	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq Level	Line	Level Factor	Loss Factor			MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg			1	2410.00	108.00	34.00	74.00	101.13	32.20	8.11	33.44	300	0 Peak	HORIZONTAL	Site Condition : 032016-ES FCC PART 15C 3m 3117 SN 70957 VERTICAL 800 100 5000Hz VSW 300 5000Hz SPT Auto <table><thead><tr><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>103.00</td><td>29.00</td><td>74.00</td><td>94.96</td><td>33.37</td><td>8.11</td><td>33.44</td><td>100</td><td>0 Peak</td><td>VERTICAL</td></tr></tbody></table>	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg			1	2412.00	103.00	29.00	74.00	94.96	33.37	8.11	33.44	100	0 Peak	VERTICAL																								
	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																										
Freq Level	Line	Level Factor	Loss Factor																																																																																														
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																																																																																										
1	2410.00	108.00	34.00	74.00	101.13	32.20	8.11	33.44	300	0 Peak	HORIZONTAL																																																																																						
Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																											
Freq Level	Line	Level Factor	Loss Factor																																																																																														
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																																																																																										
1	2412.00	103.00	29.00	74.00	94.96	33.37	8.11	33.44	100	0 Peak	VERTICAL																																																																																						

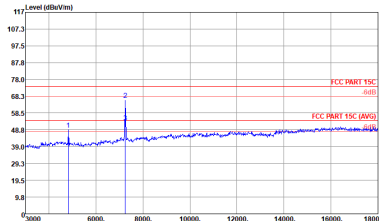
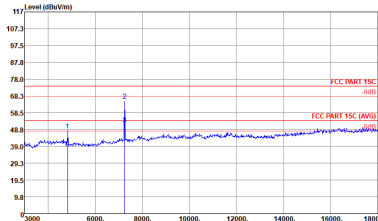


WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																															
ANT	802.11g CH02 2417MHz																																																																																																															
1+2	Horizontal	Vertical																																																																																																														
Peak Avg.	 Site : 032000-05 Condition : FCC PART 15C 3m 3117 SW 75957 HORIZONTAL RSM:1000, 0000Hz VSW:3000, 0000Hz SRT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm/Hz</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dB</th><th>dB</th><th>deg</th></tr></thead><tbody><tr><td>1 4830.00</td><td>48.96</td><td>-25.04</td><td>74.00</td><td>63.61</td><td>34.98</td><td>11.53</td><td>61.16</td><td>300</td><td>0 Peak</td><td>HORIZONTAL</td></tr><tr><td>2 7251.00</td><td>66.00</td><td>-8.00</td><td>74.00</td><td>75.66</td><td>36.85</td><td>14.57</td><td>61.08</td><td>111</td><td>311 Peak</td><td>HORIZONTAL</td></tr><tr><td>3 7251.00</td><td>53.21</td><td>-10.79</td><td>54.00</td><td>62.87</td><td>36.85</td><td>14.57</td><td>61.08</td><td>111</td><td>311 Average</td><td>HORIZONTAL</td></tr></tbody></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/Hz	Level	Line	Level	Factor	Loss	Factor	dB	dB	deg	1 4830.00	48.96	-25.04	74.00	63.61	34.98	11.53	61.16	300	0 Peak	HORIZONTAL	2 7251.00	66.00	-8.00	74.00	75.66	36.85	14.57	61.08	111	311 Peak	HORIZONTAL	3 7251.00	53.21	-10.79	54.00	62.87	36.85	14.57	61.08	111	311 Average	HORIZONTAL	 Site : 032000-05 Condition : FCC PART 15C 3m 3117 SW 75957 VERTICAL RSM:1000, 0000Hz VSW:3000, 0000Hz SRT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm/Hz</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dB</th><th>dB</th><th>deg</th></tr></thead><tbody><tr><td>1 4836.00</td><td>48.31</td><td>-25.69</td><td>74.00</td><td>63.07</td><td>34.83</td><td>11.55</td><td>61.14</td><td>300</td><td>360 Peak</td><td>VERTICAL</td></tr><tr><td>2 7251.00</td><td>65.47</td><td>-8.53</td><td>74.00</td><td>75.63</td><td>36.36</td><td>14.57</td><td>61.08</td><td>117</td><td>41 Peak</td><td>VERTICAL</td></tr><tr><td>3 7251.00</td><td>51.87</td><td>-12.13</td><td>54.00</td><td>62.02</td><td>36.36</td><td>14.57</td><td>61.08</td><td>117</td><td>41 Average</td><td>VERTICAL</td></tr></tbody></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/Hz	Level	Line	Level	Factor	Loss	Factor	dB	dB	deg	1 4836.00	48.31	-25.69	74.00	63.07	34.83	11.55	61.14	300	360 Peak	VERTICAL	2 7251.00	65.47	-8.53	74.00	75.63	36.36	14.57	61.08	117	41 Peak	VERTICAL	3 7251.00	51.87	-12.13	54.00	62.02	36.36	14.57	61.08	117	41 Average	VERTICAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																					
MHz	dBm/Hz	Level	Line	Level	Factor	Loss	Factor	dB	dB	deg																																																																																																						
1 4830.00	48.96	-25.04	74.00	63.61	34.98	11.53	61.16	300	0 Peak	HORIZONTAL																																																																																																						
2 7251.00	66.00	-8.00	74.00	75.66	36.85	14.57	61.08	111	311 Peak	HORIZONTAL																																																																																																						
3 7251.00	53.21	-10.79	54.00	62.87	36.85	14.57	61.08	111	311 Average	HORIZONTAL																																																																																																						
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																						
MHz	dBm/Hz	Level	Line	Level	Factor	Loss	Factor	dB	dB	deg																																																																																																						
1 4836.00	48.31	-25.69	74.00	63.07	34.83	11.55	61.14	300	360 Peak	VERTICAL																																																																																																						
2 7251.00	65.47	-8.53	74.00	75.63	36.36	14.57	61.08	117	41 Peak	VERTICAL																																																																																																						
3 7251.00	51.87	-12.13	54.00	62.02	36.36	14.57	61.08	117	41 Average	VERTICAL																																																																																																						



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																						
ANT	802.11g CH06 2437MHz																																																																																																						
1+2	Horizontal	Vertical																																																																																																					
Peak Avg.	Site : 020H06-K3 Condition : FCC PART 15C 3m 3117 SN 75957 HORIZONTAL RBW: 100.000kHz VBW: 3000.000kHz SMT: Auto <table><thead><tr><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 4872.00</td><td>49.71</td><td>-24.29</td><td>74.00</td><td>64.18</td><td>35.04</td><td>11.60</td><td>0 Peak</td><td>HORIZONTAL</td></tr><tr><td>2 7308.00</td><td>43.03</td><td>-10.97</td><td>74.00</td><td>72.58</td><td>36.86</td><td>14.66</td><td>61.07</td><td>310 Peak</td><td>HORIZONTAL</td></tr><tr><td>3 1 7308.00</td><td>50.58</td><td>-3.42</td><td>54.00</td><td>60.13</td><td>36.86</td><td>14.66</td><td>61.07</td><td>310 Average</td><td>HORIZONTAL</td></tr></tbody></table>	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dB	cm	deg	1 4872.00	49.71	-24.29	74.00	64.18	35.04	11.60	0 Peak	HORIZONTAL	2 7308.00	43.03	-10.97	74.00	72.58	36.86	14.66	61.07	310 Peak	HORIZONTAL	3 1 7308.00	50.58	-3.42	54.00	60.13	36.86	14.66	61.07	310 Average	HORIZONTAL	Site : 020H06-K3 Condition : FCC PART 15C 3m 3117 SN 75957 VERTICAL RBW: 100.000kHz VBW: 3000.000kHz SMT: Auto <table><thead><tr><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 4872.00</td><td>45.06</td><td>-28.94</td><td>74.00</td><td>59.74</td><td>34.83</td><td>11.60</td><td>61.11</td><td>300 Peak</td><td>VERTICAL</td></tr><tr><td>2 7308.00</td><td>43.21</td><td>-10.79</td><td>74.00</td><td>72.23</td><td>36.39</td><td>14.66</td><td>61.07</td><td>118 Peak</td><td>VERTICAL</td></tr><tr><td>3 1 7308.00</td><td>50.60</td><td>-3.40</td><td>54.00</td><td>60.62</td><td>36.39</td><td>14.66</td><td>61.07</td><td>118 Average</td><td>VERTICAL</td></tr></tbody></table>	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dB	cm	deg	1 4872.00	45.06	-28.94	74.00	59.74	34.83	11.60	61.11	300 Peak	VERTICAL	2 7308.00	43.21	-10.79	74.00	72.23	36.39	14.66	61.07	118 Peak	VERTICAL	3 1 7308.00	50.60	-3.40	54.00	60.62	36.39	14.66	61.07	118 Average	VERTICAL
	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																
Freq Level	Line	Level Factor	Loss Factor																																																																																																				
MHz	dBuV/m	dB	dBuV/m	dB	cm	deg																																																																																																	
1 4872.00	49.71	-24.29	74.00	64.18	35.04	11.60	0 Peak	HORIZONTAL																																																																																															
2 7308.00	43.03	-10.97	74.00	72.58	36.86	14.66	61.07	310 Peak	HORIZONTAL																																																																																														
3 1 7308.00	50.58	-3.42	54.00	60.13	36.86	14.66	61.07	310 Average	HORIZONTAL																																																																																														
Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																	
Freq Level	Line	Level Factor	Loss Factor																																																																																																				
MHz	dBuV/m	dB	dBuV/m	dB	cm	deg																																																																																																	
1 4872.00	45.06	-28.94	74.00	59.74	34.83	11.60	61.11	300 Peak	VERTICAL																																																																																														
2 7308.00	43.21	-10.79	74.00	72.23	36.39	14.66	61.07	118 Peak	VERTICAL																																																																																														
3 1 7308.00	50.60	-3.40	54.00	60.62	36.39	14.66	61.07	118 Average	VERTICAL																																																																																														



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																																									
ANT	802.11g CH10 2457MHz																																																																																																																									
1+2	Horizontal	Vertical																																																																																																																								
Peak	 Site Condition : 032006-K5 FCC PART 15C 3m 3117 SN 70957 HORIZONTAL RBW:1000; 0000Hz VSW:3000; 0000Hz SFT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Poss</th><th>T/Poss</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dBm</th><th>dBm</th><th>Level Factor</th><th>Loss Factor</th><th>dB</th><th>dB</th><th>dB</th><th>deg</th><th>deg</th></tr><tr><td>1</td><td>4914.00</td><td>-48.64</td><td>-35.30</td><td>74.00</td><td>63.00</td><td>35.08</td><td>11.64</td><td>61.08</td><td>300</td><td>0 Peak</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>7271.00</td><td>-62.08</td><td>-11.92</td><td>74.00</td><td>71.49</td><td>36.87</td><td>14.78</td><td>61.06</td><td>212</td><td>360 Peak</td><td>HORIZONTAL</td></tr><tr><td>3</td><td>7271.00</td><td>-50.75</td><td>-13.20</td><td>54.00</td><td>60.16</td><td>38.57</td><td>14.78</td><td>61.06</td><td>212</td><td>360 Average</td><td>HORIZONTAL</td></tr></table>		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poss	T/Poss	Remark	Pol/Phase		MHz	dBm	dBm	dBm	Level Factor	Loss Factor	dB	dB	dB	deg	deg	1	4914.00	-48.64	-35.30	74.00	63.00	35.08	11.64	61.08	300	0 Peak	HORIZONTAL	2	7271.00	-62.08	-11.92	74.00	71.49	36.87	14.78	61.06	212	360 Peak	HORIZONTAL	3	7271.00	-50.75	-13.20	54.00	60.16	38.57	14.78	61.06	212	360 Average	HORIZONTAL	 Site Condition : 032006-K5 FCC PART 15C 3m 3117 SN 70957 VERTICAL RBW:1000; 0000Hz VSW:3000; 0000Hz SFT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Poss</th><th>T/Poss</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dBm</th><th>dBm</th><th>Level Factor</th><th>Loss Factor</th><th>dB</th><th>dB</th><th>dB</th><th>deg</th><th>deg</th></tr><tr><td>1</td><td>4914.00</td><td>-45.48</td><td>-38.33</td><td>74.00</td><td>60.30</td><td>34.83</td><td>11.64</td><td>61.08</td><td>300</td><td>360 Peak</td><td>VERTICAL</td></tr><tr><td>2</td><td>7271.00</td><td>-61.13</td><td>-12.87</td><td>74.00</td><td>70.98</td><td>36.43</td><td>14.78</td><td>61.06</td><td>112</td><td>37 Peak</td><td>VERTICAL</td></tr><tr><td>3</td><td>7271.00</td><td>-49.59</td><td>-4.41</td><td>54.00</td><td>59.44</td><td>36.43</td><td>14.78</td><td>61.06</td><td>112</td><td>37 Average</td><td>VERTICAL</td></tr></table>		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poss	T/Poss	Remark	Pol/Phase		MHz	dBm	dBm	dBm	Level Factor	Loss Factor	dB	dB	dB	deg	deg	1	4914.00	-45.48	-38.33	74.00	60.30	34.83	11.64	61.08	300	360 Peak	VERTICAL	2	7271.00	-61.13	-12.87	74.00	70.98	36.43	14.78	61.06	112	37 Peak	VERTICAL	3	7271.00	-49.59	-4.41	54.00	59.44	36.43	14.78	61.06	112	37 Average	VERTICAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poss	T/Poss	Remark	Pol/Phase																																																																																																															
	MHz	dBm	dBm	dBm	Level Factor	Loss Factor	dB	dB	dB	deg	deg																																																																																																															
1	4914.00	-48.64	-35.30	74.00	63.00	35.08	11.64	61.08	300	0 Peak	HORIZONTAL																																																																																																															
2	7271.00	-62.08	-11.92	74.00	71.49	36.87	14.78	61.06	212	360 Peak	HORIZONTAL																																																																																																															
3	7271.00	-50.75	-13.20	54.00	60.16	38.57	14.78	61.06	212	360 Average	HORIZONTAL																																																																																																															
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poss	T/Poss	Remark	Pol/Phase																																																																																																															
	MHz	dBm	dBm	dBm	Level Factor	Loss Factor	dB	dB	dB	deg	deg																																																																																																															
1	4914.00	-45.48	-38.33	74.00	60.30	34.83	11.64	61.08	300	360 Peak	VERTICAL																																																																																																															
2	7271.00	-61.13	-12.87	74.00	70.98	36.43	14.78	61.06	112	37 Peak	VERTICAL																																																																																																															
3	7271.00	-49.59	-4.41	54.00	59.44	36.43	14.78	61.06	112	37 Average	VERTICAL																																																																																																															



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																		
ANT	802.11g CH11 2462MHz																																																																																		
1+2	Horizontal	Vertical																																																																																	
Peak Avg.	Site : 030805-K5 Condition : FCC PART 15C 3m 3117 SN 75957 HORIZONTAL RSM 1000 000KHz VSW 3000 000KHz SRT Auto <table><thead><tr><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>dBm/V/m</th><th>dBm/V/m</th><th>dBm/V/m</th><th>dBm/V/m</th><th>dBm/V/m</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>4926.00</td><td>45.86</td><td>-28.14</td><td>74.00</td><td>60.17</td><td>35.10</td><td>11.66</td><td>0 Peak</td><td>HORIZONTAL</td></tr><tr><td>7386.00</td><td>53.31</td><td>-20.49</td><td>74.00</td><td>62.88</td><td>36.88</td><td>14.81</td><td>61.06</td><td>311 Peak</td><td>HORIZONTAL</td></tr><tr><td>7386.00</td><td>47.08</td><td>-6.92</td><td>54.00</td><td>54.45</td><td>36.88</td><td>14.81</td><td>61.06</td><td>100</td><td>311 Average</td><td>HORIZONTAL</td></tr></tbody></table>	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	dBm/V/m	dBm/V/m	dBm/V/m	dBm/V/m	dBm/V/m	cm	deg	4926.00	45.86	-28.14	74.00	60.17	35.10	11.66	0 Peak	HORIZONTAL	7386.00	53.31	-20.49	74.00	62.88	36.88	14.81	61.06	311 Peak	HORIZONTAL	7386.00	47.08	-6.92	54.00	54.45	36.88	14.81	61.06	100	311 Average	HORIZONTAL	Site : 030805-K5 Condition : FCC PART 15C 3m 3117 SN 75957 VERTICAL RSM 1000 000KHz VSW 3000 000KHz SRT Auto <table><thead><tr><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>dBm/V/m</th><th>dBm/V/m</th><th>dBm/V/m</th><th>dBm/V/m</th><th>dBm/V/m</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>4926.00</td><td>43.83</td><td>-30.17</td><td>74.00</td><td>58.42</td><td>34.87</td><td>11.66</td><td>61.07</td><td>300</td><td>360 Peak</td><td>VERTICAL</td></tr><tr><td>7386.00</td><td>48.76</td><td>-25.24</td><td>74.00</td><td>58.57</td><td>36.44</td><td>14.81</td><td>61.06</td><td>300</td><td>360</td><td>Peak</td><td>VERTICAL</td></tr></tbody></table>	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	dBm/V/m	dBm/V/m	dBm/V/m	dBm/V/m	dBm/V/m	cm	deg	4926.00	43.83	-30.17	74.00	58.42	34.87	11.66	61.07	300	360 Peak	VERTICAL	7386.00	48.76	-25.24	74.00	58.57	36.44	14.81	61.06	300	360	Peak	VERTICAL
	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																												
dBm/V/m	dBm/V/m	dBm/V/m	dBm/V/m	dBm/V/m	cm	deg																																																																													
4926.00	45.86	-28.14	74.00	60.17	35.10	11.66	0 Peak	HORIZONTAL																																																																											
7386.00	53.31	-20.49	74.00	62.88	36.88	14.81	61.06	311 Peak	HORIZONTAL																																																																										
7386.00	47.08	-6.92	54.00	54.45	36.88	14.81	61.06	100	311 Average	HORIZONTAL																																																																									
Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																													
dBm/V/m	dBm/V/m	dBm/V/m	dBm/V/m	dBm/V/m	cm	deg																																																																													
4926.00	43.83	-30.17	74.00	58.42	34.87	11.66	61.07	300	360 Peak	VERTICAL																																																																									
7386.00	48.76	-25.24	74.00	58.57	36.44	14.81	61.06	300	360	Peak	VERTICAL																																																																								



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																										
ANT	802.11n HT20 CH01 2412MHz																																										
1+2	Horizontal						Fundamental																																				
Peak	Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 75957 HORIZONTAL RBW 1000.000kHz VBW 3000.000kHz SFT Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.04</td><td>69.40</td><td>-4.60</td><td>74.00</td><td>62.61</td><td>32.15</td><td>8.09</td><td>33.45</td><td>126</td><td>213</td><td>Peak</td><td>HORIZONTAL</td></tr></tbody></table>												Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phase	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1	2389.04	69.40	-4.60	74.00	62.61	32.15	8.09	33.45	126	213	Peak	HORIZONTAL
	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phase																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																			
1	2389.04	69.40	-4.60	74.00	62.61	32.15	8.09	33.45	126	213	Peak	HORIZONTAL																															
Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 75957 HORIZONTAL RBW 1000.000kHz VBW 3000.000kHz SFT Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>112.38</td><td>38.38</td><td>74.00</td><td>105.51</td><td>32.20</td><td>8.11</td><td>33.44</td><td>126</td><td>213</td><td>Peak</td><td>HORIZONTAL</td></tr></tbody></table>												Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phase	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1	2412.00	112.38	38.38	74.00	105.51	32.20	8.11	33.44	126	213	Peak	HORIZONTAL	
Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phase																																			
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																			
1	2412.00	112.38	38.38	74.00	105.51	32.20	8.11	33.44	126	213	Peak	HORIZONTAL																															
Avg.	Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 75957 HORIZONTAL RBW 1000.000kHz VBW 0.0100kHz SFT Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>53.30</td><td>-0.70</td><td>54.00</td><td>46.51</td><td>32.15</td><td>8.09</td><td>33.45</td><td>126</td><td>213</td><td>Average</td><td>HORIZONTAL</td></tr></tbody></table>												Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phase	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1	2389.95	53.30	-0.70	54.00	46.51	32.15	8.09	33.45	126	213	Average	HORIZONTAL
	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phase																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																			
1	2389.95	53.30	-0.70	54.00	46.51	32.15	8.09	33.45	126	213	Average	HORIZONTAL																															
Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 75957 HORIZONTAL RBW 1000.000kHz VBW 0.0100kHz SFT Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2410.00</td><td>103.24</td><td>49.24</td><td>54.00</td><td>96.37</td><td>32.20</td><td>8.11</td><td>33.44</td><td>126</td><td>213</td><td>Average</td><td>HORIZONTAL</td></tr></tbody></table>												Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phase	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1	2410.00	103.24	49.24	54.00	96.37	32.20	8.11	33.44	126	213	Average	HORIZONTAL	
Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phase																																			
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																			
1	2410.00	103.24	49.24	54.00	96.37	32.20	8.11	33.44	126	213	Average	HORIZONTAL																															



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																															
ANT	802.11n HT20 CH01 2412MHz																																																															
1+2	Vertical	Fundamental																																																														
Peak	Site Condition : 032004-KS : FCC PART 15C 3m 3117 5N 75957 VERTICAL : RBW 1000.000kHz VBW 3000.000kHz DBT Auto <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/PoS</th><th>T/PoS</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><td>1</td><td>1</td><td>2389.56</td><td>68.87</td><td>-5.13</td><td>74.00</td><td>40.73</td><td>33.50</td><td>8.09</td><td>33.45</td><td>297</td><td>36 Peak</td><td>VERTICAL</td></tr></table>		Over	Limit	ReadAntenna	Cable Preamp	A/PoS	T/PoS	Remark	Pol/Phas		Freq	Level	Line	Level Factor	Loss Factor				1	1	2389.56	68.87	-5.13	74.00	40.73	33.50	8.09	33.45	297	36 Peak	VERTICAL	Site Condition : 032004-KS : FCC PART 15C 3m 3117 5N 75957 VERTICAL : RBW 1000.000kHz VBW 3000.000kHz DBT Auto <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/PoS</th><th>T/PoS</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><td>1</td><td>1</td><td>2414.00</td><td>108.13</td><td>34.13</td><td>74.00</td><td>100.09</td><td>33.37</td><td>8.11</td><td>33.44</td><td>297</td><td>36 Peak</td><td>VERTICAL</td></tr></table>		Over	Limit	ReadAntenna	Cable Preamp	A/PoS	T/PoS	Remark	Pol/Phas		Freq	Level	Line	Level Factor	Loss Factor				1	1	2414.00	108.13	34.13	74.00	100.09	33.37	8.11	33.44	297	36 Peak	VERTICAL
		Over	Limit	ReadAntenna	Cable Preamp	A/PoS	T/PoS	Remark	Pol/Phas																																																							
	Freq	Level	Line	Level Factor	Loss Factor																																																											
1	1	2389.56	68.87	-5.13	74.00	40.73	33.50	8.09	33.45	297	36 Peak	VERTICAL																																																				
	Over	Limit	ReadAntenna	Cable Preamp	A/PoS	T/PoS	Remark	Pol/Phas																																																								
	Freq	Level	Line	Level Factor	Loss Factor																																																											
1	1	2414.00	108.13	34.13	74.00	100.09	33.37	8.11	33.44	297	36 Peak	VERTICAL																																																				
Avg.	Site Condition : 032004-KS : FCC PART 15C (Ave) 3m 3117 5N 75957 VERTICAL : RBW 1000.000kHz VBW 0.010kHz DBT Auto <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/PoS</th><th>T/PoS</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><td>1</td><td>1</td><td>2389.95</td><td>49.64</td><td>-4.36</td><td>54.00</td><td>41.50</td><td>33.50</td><td>8.09</td><td>33.45</td><td>297</td><td>36 Average</td><td>VERTICAL</td></tr></table>		Over	Limit	ReadAntenna	Cable Preamp	A/PoS	T/PoS	Remark	Pol/Phas		Freq	Level	Line	Level Factor	Loss Factor				1	1	2389.95	49.64	-4.36	54.00	41.50	33.50	8.09	33.45	297	36 Average	VERTICAL	Site Condition : 032004-KS : FCC PART 15C (Ave) 3m 3117 5N 75957 VERTICAL : RBW 1000.000kHz VBW 0.010kHz DBT Auto <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/PoS</th><th>T/PoS</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><td>1</td><td>1</td><td>2410.00</td><td>99.77</td><td>45.77</td><td>54.00</td><td>91.73</td><td>33.37</td><td>8.11</td><td>33.44</td><td>297</td><td>36 Average</td><td>VERTICAL</td></tr></table>		Over	Limit	ReadAntenna	Cable Preamp	A/PoS	T/PoS	Remark	Pol/Phas		Freq	Level	Line	Level Factor	Loss Factor				1	1	2410.00	99.77	45.77	54.00	91.73	33.37	8.11	33.44	297	36 Average	VERTICAL
		Over	Limit	ReadAntenna	Cable Preamp	A/PoS	T/PoS	Remark	Pol/Phas																																																							
	Freq	Level	Line	Level Factor	Loss Factor																																																											
1	1	2389.95	49.64	-4.36	54.00	41.50	33.50	8.09	33.45	297	36 Average	VERTICAL																																																				
	Over	Limit	ReadAntenna	Cable Preamp	A/PoS	T/PoS	Remark	Pol/Phas																																																								
	Freq	Level	Line	Level Factor	Loss Factor																																																											
1	1	2410.00	99.77	45.77	54.00	91.73	33.37	8.11	33.44	297	36 Average	VERTICAL																																																				







FCC RF Test Report





Report No. : FR082617-01C

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	802.11n HT20 CH02 2417MHz																																																											
1+2	Horizontal	Fundamental																																																										
Peak	Site Condition : 032004-KS FCC PART 15C 3m 3117 SN 75957 HORIZONTAL RBW 1000.000000 VSW 3.0000 SFT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th>dB</th><th>deg</th><th></th></tr><tr><td>1</td><td>2388.26</td><td>68.36</td><td>-5.64</td><td>74.00</td><td>61.57</td><td>32.15</td><td>8.09</td><td>33.45</td><td>150</td><td>210</td><td>Peak</td><td>HORIZONTAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor	dB	deg		1	2388.26	68.36	-5.64	74.00	61.57	32.15	8.09	33.45	150	210	Peak	HORIZONTAL	Site Condition : 032004-KS FCC PART 15C 3m 3117 SN 75957 HORIZONTAL RBW 1000.000000 VSW 3.0000 SFT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th>dB</th><th>deg</th><th></th></tr><tr><td>1</td><td>2416.00</td><td>114.81</td><td>40.81</td><td>74.00</td><td>107.84</td><td>32.20</td><td>8.11</td><td>33.44</td><td>150</td><td>210</td><td>Peak</td><td>HORIZONTAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor	dB	deg		1	2416.00	114.81	40.81	74.00	107.84	32.20	8.11	33.44	150	210	Peak	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
Freq	Level	Line	Level Factor	Loss Factor	dB	deg																																																						
1	2388.26	68.36	-5.64	74.00	61.57	32.15	8.09	33.45	150	210	Peak	HORIZONTAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
Freq	Level	Line	Level Factor	Loss Factor	dB	deg																																																						
1	2416.00	114.81	40.81	74.00	107.84	32.20	8.11	33.44	150	210	Peak	HORIZONTAL																																																
Avg.	Site Condition : 032004-KS FCC PART 15C (AVG) 3m 3117 SN 75957 HORIZONTAL RBW 1000.000000 VSW 3.0000 SFT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th>dB</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.17</td><td>50.85</td><td>-3.15</td><td>54.00</td><td>44.66</td><td>32.15</td><td>8.09</td><td>33.45</td><td>150</td><td>210</td><td>Average</td><td>HORIZONTAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor	dB	deg		1	2389.17	50.85	-3.15	54.00	44.66	32.15	8.09	33.45	150	210	Average	HORIZONTAL	Site Condition : 032004-KS FCC PART 15C (AVG) 3m 3117 SN 75957 HORIZONTAL RBW 1000.000000 VSW 3.0000 SFT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th>dB</th><th>deg</th><th></th></tr><tr><td>1</td><td>2416.00</td><td>104.29</td><td>52.29</td><td>54.00</td><td>99.42</td><td>32.20</td><td>8.11</td><td>33.44</td><td>150</td><td>210</td><td>Average</td><td>HORIZONTAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor	dB	deg		1	2416.00	104.29	52.29	54.00	99.42	32.20	8.11	33.44	150	210	Average	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
Freq	Level	Line	Level Factor	Loss Factor	dB	deg																																																						
1	2389.17	50.85	-3.15	54.00	44.66	32.15	8.09	33.45	150	210	Average	HORIZONTAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
Freq	Level	Line	Level Factor	Loss Factor	dB	deg																																																						
1	2416.00	104.29	52.29	54.00	99.42	32.20	8.11	33.44	150	210	Average	HORIZONTAL																																																





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																															
ANT	802.11n HT20 CH02 2417MHz																																																																															
1+2	Vertical	Fundamental																																																																														
Peak	 Site Condition : 032004-K5 : FCC PART 15C 3m 3117 SN 75957 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SFT:Auto <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.66</td><td>64.95</td><td>-9.05</td><td>74.00</td><td>56.81</td><td>33.50</td><td>8.09</td><td>33.45</td><td>30</td><td>Peak</td><td>VERTICAL</td></tr></table>		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor			MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1	2385.66	64.95	-9.05	74.00	56.81	33.50	8.09	33.45	30	Peak	VERTICAL	 Site Condition : 032004-K5 : FCC PART 15C 3m 3117 SN 75957 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SFT:Auto <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2414.00</td><td>110.88</td><td>36.88</td><td>74.00</td><td>102.84</td><td>33.37</td><td>8.11</td><td>33.44</td><td>30</td><td>Peak</td><td>VERTICAL</td></tr></table>		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor			MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1	2414.00	110.88	36.88	74.00	102.84	33.37	8.11	33.44	30	Peak	VERTICAL
		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																										
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																																								
1	2385.66	64.95	-9.05	74.00	56.81	33.50	8.09	33.45	30	Peak	VERTICAL																																																																					
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																										
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																																								
1	2414.00	110.88	36.88	74.00	102.84	33.37	8.11	33.44	30	Peak	VERTICAL																																																																					
Avg.	 Site Condition : 032004-K5 : FCC PART 15C (AVG) 3m 3117 SN 75957 VERTICAL : RBW:1000.000kHz VBW:0.0100kHz SFT:Auto <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>66.44</td><td>-7.56</td><td>54.00</td><td>38.30</td><td>33.50</td><td>8.09</td><td>33.45</td><td>30</td><td>Average</td><td>VERTICAL</td></tr></table>		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor			MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1	2389.95	66.44	-7.56	54.00	38.30	33.50	8.09	33.45	30	Average	VERTICAL	 Site Condition : 032004-K5 : FCC PART 15C (AVG) 3m 3117 SN 75957 VERTICAL : RBW:1000.000kHz VBW:0.0100kHz SFT:Auto <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2416.00</td><td>102.62</td><td>48.62</td><td>54.00</td><td>94.58</td><td>33.37</td><td>8.11</td><td>33.44</td><td>30</td><td>Average</td><td>VERTICAL</td></tr></table>		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor			MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1	2416.00	102.62	48.62	54.00	94.58	33.37	8.11	33.44	30	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																										
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																																								
1	2389.95	66.44	-7.56	54.00	38.30	33.50	8.09	33.45	30	Average	VERTICAL																																																																					
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																										
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																																								
1	2416.00	102.62	48.62	54.00	94.58	33.37	8.11	33.44	30	Average	VERTICAL																																																																					



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																									
ANT	802.11n HT20 CH06 2437MHz - L																																																																									
1+2	Horizontal	Fundamental																																																																								
Peak	 Site : 03DHO-KS Condition : FCC PART 15C 3m 3117 SN 75957 HORIZONTAL RBW 1000.000kHz VBW 3000.000kHz SBT Auto <table><thead><tr><th></th><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.39</td><td>56.92</td><td>-17.48</td><td>74.00</td><td>49.73</td><td>32.15</td><td>8.09</td><td>33.45</td><td>151</td><td>214 Peak</td><td>HORIZONTAL</td></tr></tbody></table>		Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dB/m	dB	cm	deg	1	2388.39	56.92	-17.48	74.00	49.73	32.15	8.09	33.45	151	214 Peak	HORIZONTAL	 Site : 03DHO-KS Condition : FCC PART 15C 3m 3117 SN 75957 HORIZONTAL RBW 1000.000kHz VBW 3000.000kHz SBT Auto <table><thead><tr><th></th><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>2440.00</td><td>114.29</td><td>40.29</td><td>74.00</td><td>107.56</td><td>32.00</td><td>8.16</td><td>33.43</td><td>151</td><td>214 Peak</td><td>HORIZONTAL</td></tr></tbody></table>		Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dB/m	dB	cm	deg	1 *	2440.00	114.29	40.29	74.00	107.56	32.00	8.16	33.43	151	214 Peak	HORIZONTAL
		Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
Freq	Level	Line	Level Factor	Loss Factor																																																																						
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	cm	deg																																																																			
1	2388.39	56.92	-17.48	74.00	49.73	32.15	8.09	33.45	151	214 Peak	HORIZONTAL																																																															
	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																			
Freq	Level	Line	Level Factor	Loss Factor																																																																						
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	cm	deg																																																																			
1 *	2440.00	114.29	40.29	74.00	107.56	32.00	8.16	33.43	151	214 Peak	HORIZONTAL																																																															
Avg.	 Site : 03DHO-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 75957 HORIZONTAL RBW 1000.000kHz VBW 0.0100kHz SBT Auto <table><thead><tr><th></th><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>45.92</td><td>-8.48</td><td>54.00</td><td>38.73</td><td>32.15</td><td>8.09</td><td>33.45</td><td>151</td><td>214 Average</td><td>HORIZONTAL</td></tr></tbody></table>		Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dB/m	dB	cm	deg	1	2389.95	45.92	-8.48	54.00	38.73	32.15	8.09	33.45	151	214 Average	HORIZONTAL	 Site : 03DHO-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 75957 HORIZONTAL RBW 1000.000kHz VBW 0.0100kHz SBT Auto <table><thead><tr><th></th><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>2438.00</td><td>105.61</td><td>51.61</td><td>54.00</td><td>98.89</td><td>32.00</td><td>8.16</td><td>33.44</td><td>151</td><td>214 Average</td><td>HORIZONTAL</td></tr></tbody></table>		Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dB/m	dB	cm	deg	1 *	2438.00	105.61	51.61	54.00	98.89	32.00	8.16	33.44	151	214 Average	HORIZONTAL
		Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
Freq	Level	Line	Level Factor	Loss Factor																																																																						
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	cm	deg																																																																			
1	2389.95	45.92	-8.48	54.00	38.73	32.15	8.09	33.45	151	214 Average	HORIZONTAL																																																															
	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																			
Freq	Level	Line	Level Factor	Loss Factor																																																																						
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	cm	deg																																																																			
1 *	2438.00	105.61	51.61	54.00	98.89	32.00	8.16	33.44	151	214 Average	HORIZONTAL																																																															





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																								
ANT	802.11n HT20 CH06 2437MHz - R																																								
1+2	Horizontal						Fundamental																																		
Peak							-																																		
	Site Condition : 032006-KS : FCC PART 15C 3m 3117 5W 75957 HORIZONTAL : RBW 1000 0000Hz VBW 3000 0000Hz SRT Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Poss</th><th>T/Poss</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2485.10</td><td>54.88</td><td>-19.12</td><td>74.00</td><td>48.38</td><td>31.70</td><td>8.22</td><td>33.42</td><td>151</td><td>214 Peak</td><td>HORIZONTAL</td></tr></tbody></table>												Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poss	T/Poss	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1	2485.10	54.88	-19.12	74.00	48.38
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poss	T/Poss	Remark	Pol/Phas																														
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																
1	2485.10	54.88	-19.12	74.00	48.38	31.70	8.22	33.42	151	214 Peak	HORIZONTAL																														
Avg.							-																																		
	Site Condition : 032006-KS : FCC PART 15C (AVG) 3m 3117 5W 75957 HORIZONTAL : RBW 1000 0000Hz VBW 0.01000Hz SRT Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Poss</th><th>T/Poss</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.68</td><td>43.86</td><td>-10.14</td><td>54.00</td><td>37.27</td><td>31.80</td><td>8.22</td><td>33.43</td><td>151</td><td>214 Average</td><td>HORIZONTAL</td></tr></tbody></table>												Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poss	T/Poss	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1	2483.68	43.86	-10.14	54.00	37.27
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poss	T/Poss	Remark	Pol/Phas																														
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																
1	2483.68	43.86	-10.14	54.00	37.27	31.80	8.22	33.43	151	214 Average	HORIZONTAL																														



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m											
ANT	802.11n HT20 CH06 2437MHz - L											
1+2	Vertical						Fundamental					
Peak	<											







WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																			
ANT	802.11n HT20 CH06 2437MHz - R																																																			
1+2	Vertical						Fundamental																																													
Peak	 Site : 030906-K3 Condition : FCC PART 15C 3m 3117 SN 75957 VERTICAL RSM 1000 000KHz VSW 3000 000KHz SRT Auto <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level</th><th>Level</th><th>Level</th><th>Level</th><th>Level</th><th>Level</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>deg</th><th>deg</th></tr><tr><td>1</td><td>2487.70</td><td>55.69</td><td>-18.31</td><td>74.00</td><td>48.14</td><td>32.73</td><td>8.24</td><td>33.42</td><td>260</td><td>360</td><td>Peak</td><td>VERTICAL</td></tr></table>													Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Level	Level	Level	Level	Level	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	deg	deg	1	2487.70	55.69	-18.31	74.00	48.14	32.73	8.24	33.42	260	360	Peak	VERTICAL
		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																											
Freq	Level	Limit	Level	Level	Level	Level	Level	Level																																												
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	deg	deg																																												
1	2487.70	55.69	-18.31	74.00	48.14	32.73	8.24	33.42	260	360	Peak	VERTICAL																																								
Avg.	 Site : 030906-K3 Condition : FCC PART 15C (AVG) 3m 3117 SN 75957 VERTICAL RSM 1000 000KHz VSW 0.010KHz SRT Auto <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level</th><th>Level</th><th>Level</th><th>Level</th><th>Level</th><th>Level</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>deg</th><th>deg</th></tr><tr><td>1</td><td>2484.82</td><td>44.15</td><td>-9.85</td><td>54.00</td><td>36.50</td><td>32.86</td><td>8.22</td><td>33.43</td><td>260</td><td>360</td><td>Average</td><td>VERTICAL</td></tr></table>													Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Level	Level	Level	Level	Level	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	deg	deg	1	2484.82	44.15	-9.85	54.00	36.50	32.86	8.22	33.43	260	360	Average	VERTICAL
		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																											
Freq	Level	Limit	Level	Level	Level	Level	Level	Level																																												
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	deg	deg																																												
1	2484.82	44.15	-9.85	54.00	36.50	32.86	8.22	33.43	260	360	Average	VERTICAL																																								







FCC RF Test Report

Report No. : FR082617-01C

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																	
ANT	802.11n HT20 CH10 2457MHz																																																																	
1+2	Horizontal	Fundamental																																																																
Peak	 Site Condition : 030906-K3 FCC PART 15C 3m 3117 SN 75957 HORIZONTAL RBW 1000.000kHz VBW 3000.000kHz SMT Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Poss</th><th>T/Poss</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>dB</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.68</td><td>67.40</td><td>-6.60</td><td>74.00</td><td>60.81</td><td>31.80</td><td>8.22</td><td>33.43</td><td>144</td><td>213 Peak</td><td>HORIZONTAL</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Poss	T/Poss	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	deg		1	2483.68	67.40	-6.60	74.00	60.81	31.80	8.22	33.43	144	213 Peak	HORIZONTAL	 Site Condition : 030906-K3 FCC PART 15C 3m 3117 SN 75957 HORIZONTAL RBW 1000.000kHz VBW 3000.000kHz SMT Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Poss</th><th>T/Poss</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>dB</th><th>deg</th><th></th></tr><tr><td>1</td><td>2456.00</td><td>113.54</td><td>39.54</td><td>74.00</td><td>106.88</td><td>31.90</td><td>8.19</td><td>33.43</td><td>144</td><td>213 Peak</td><td>HORIZONTAL</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Poss	T/Poss	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	deg		1	2456.00	113.54	39.54	74.00	106.88	31.90	8.19	33.43	144	213 Peak	HORIZONTAL
	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Poss	T/Poss	Remark	Pol/Phas																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	deg																																																										
1	2483.68	67.40	-6.60	74.00	60.81	31.80	8.22	33.43	144	213 Peak	HORIZONTAL																																																							
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Poss	T/Poss	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	deg																																																										
1	2456.00	113.54	39.54	74.00	106.88	31.90	8.19	33.43	144	213 Peak	HORIZONTAL																																																							
Avg.	 Site Condition : 030906-K3 FCC PART 15C (AVG) 3m 3117 SN 75957 HORIZONTAL RBW 1000.000kHz VBW 0.0100kHz SMT Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Poss</th><th>T/Poss</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>dB</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.50</td><td>48.88</td><td>-5.12</td><td>54.00</td><td>42.29</td><td>31.80</td><td>8.22</td><td>33.43</td><td>144</td><td>213 Average</td><td>HORIZONTAL</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Poss	T/Poss	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	deg		1	2483.50	48.88	-5.12	54.00	42.29	31.80	8.22	33.43	144	213 Average	HORIZONTAL	 Site Condition : 030906-K3 FCC PART 15C (AVG) 3m 3117 SN 75957 HORIZONTAL RBW 1000.000kHz VBW 0.0100kHz SMT Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Poss</th><th>T/Poss</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>dB</th><th>deg</th><th></th></tr><tr><td>1</td><td>2456.00</td><td>104.92</td><td>50.92</td><td>54.00</td><td>98.26</td><td>31.90</td><td>8.19</td><td>33.43</td><td>144</td><td>213 Average</td><td>HORIZONTAL</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Poss	T/Poss	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	deg		1	2456.00	104.92	50.92	54.00	98.26	31.90	8.19	33.43	144	213 Average	HORIZONTAL
	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Poss	T/Poss	Remark	Pol/Phas																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	deg																																																										
1	2483.50	48.88	-5.12	54.00	42.29	31.80	8.22	33.43	144	213 Average	HORIZONTAL																																																							
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Poss	T/Poss	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	deg																																																										
1	2456.00	104.92	50.92	54.00	98.26	31.90	8.19	33.43	144	213 Average	HORIZONTAL																																																							

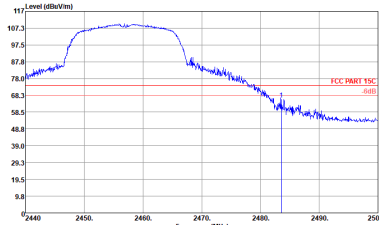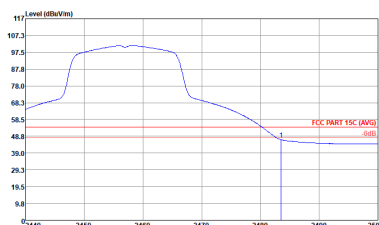

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																	
ANT	802.11n HT20 CH10 2457MHz																																																	
1+2	Vertical	Fundamental																																																
Peak	 Site Condition : 032004-K3 FCC PART 15C 3m 3117 SN 75957 VERTICAL RSM 1000.000MHz VSW 3.000.000MHz SMT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Level</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><td>1</td><td>2483.56</td><td>65.80</td><td>-8.20</td><td>74.00</td><td>58.15</td><td>32.86</td><td>8.22 33.43 321 29 Peak VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Level	Level	Factor	Loss	Factor		1	2483.56	65.80	-8.20	74.00	58.15	32.86	8.22 33.43 321 29 Peak VERTICAL	 Site Condition : 032004-K3 FCC PART 15C 3m 3117 SN 75957 VERTICAL RSM 1000.000MHz VSW 3.000.000MHz SMT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Level</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><td>1</td><td>2456.00</td><td>110.10</td><td>36.10</td><td>74.00</td><td>102.35</td><td>32.99</td><td>8.19 33.43 321 29 Peak VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Level	Level	Factor	Loss	Factor		1	2456.00	110.10	36.10	74.00	102.35	32.99	8.19 33.43 321 29 Peak VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																										
Freq	Level	Level	Level	Factor	Loss	Factor																																												
1	2483.56	65.80	-8.20	74.00	58.15	32.86	8.22 33.43 321 29 Peak VERTICAL																																											
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																											
Freq	Level	Level	Level	Factor	Loss	Factor																																												
1	2456.00	110.10	36.10	74.00	102.35	32.99	8.19 33.43 321 29 Peak VERTICAL																																											
Avg.	 Site Condition : 032004-K3 FCC PART 15C (AVG) 3m 3117 SN 75957 VERTICAL RSM 1000.000MHz VSW 3.010MHz SMT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Level</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><td>1</td><td>2483.50</td><td>46.78</td><td>-7.22</td><td>54.00</td><td>39.13</td><td>32.86</td><td>8.22 33.43 321 29 Average VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Level	Level	Factor	Loss	Factor		1	2483.50	46.78	-7.22	54.00	39.13	32.86	8.22 33.43 321 29 Average VERTICAL	 Site Condition : 032004-K3 FCC PART 15C (AVG) 3m 3117 SN 75957 VERTICAL RSM 1000.000MHz VSW 3.010MHz SMT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Level</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><td>1</td><td>2456.00</td><td>101.40</td><td>47.40</td><td>54.00</td><td>93.65</td><td>32.99</td><td>8.19 33.43 321 29 Average VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Level	Level	Factor	Loss	Factor		1	2456.00	101.40	47.40	54.00	93.65	32.99	8.19 33.43 321 29 Average VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																										
Freq	Level	Level	Level	Factor	Loss	Factor																																												
1	2483.50	46.78	-7.22	54.00	39.13	32.86	8.22 33.43 321 29 Average VERTICAL																																											
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																											
Freq	Level	Level	Level	Factor	Loss	Factor																																												
1	2456.00	101.40	47.40	54.00	93.65	32.99	8.19 33.43 321 29 Average VERTICAL																																											







WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																			
ANT	802.11n HT20 CH11 2462MHz																																																																			
1+2	Horizontal	Fundamental																																																																		
Peak	Site Condition : 03D006-KS : FCC PART 15C 3m 3117 SN 75957 HORIZONTAL : RBW 1000.000kHz VSWR 3.000, 0.000dB SRT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.62</td><td>68.39</td><td>-5.61</td><td>74.00</td><td>61.80</td><td>31.80</td><td>8.22 33.43 168 212 Peak</td><td>HORIZONTAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2483.62	68.39	-5.61	74.00	61.80	31.80	8.22 33.43 168 212 Peak	HORIZONTAL	Site Condition : 03D006-KS : FCC PART 15C 3m 3117 SN 75957 HORIZONTAL : RBW 1000.000kHz VSWR 3.000, 0.000dB SRT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>111.19</td><td>37.19</td><td>74.00</td><td>104.53</td><td>31.90</td><td>8.19 33.43 168 212 Peak</td><td>HORIZONTAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2462.00	111.19	37.19	74.00	104.53	31.90	8.19 33.43 168 212 Peak	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
Freq	Level	Limit	Level Factor	Loss Factor																																																																
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																													
1	2483.62	68.39	-5.61	74.00	61.80	31.80	8.22 33.43 168 212 Peak	HORIZONTAL																																																												
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																													
Freq	Level	Limit	Level Factor	Loss Factor																																																																
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																													
1	2462.00	111.19	37.19	74.00	104.53	31.90	8.19 33.43 168 212 Peak	HORIZONTAL																																																												
Avg.	Site Condition : 03D006-KS : FCC PART 15C (AVG) 3m 3117 SN 75957 HORIZONTAL : RBW 1000.000kHz VSWR 3.010dB SRT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>53.05</td><td>-0.95</td><td>54.00</td><td>46.46</td><td>31.80</td><td>8.22 33.43 168 212 Average</td><td>HORIZONTAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2483.50	53.05	-0.95	54.00	46.46	31.80	8.22 33.43 168 212 Average	HORIZONTAL	Site Condition : 03D006-KS : FCC PART 15C (AVG) 3m 3117 SN 75957 HORIZONTAL : RBW 1000.000kHz VSWR 3.010dB SRT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2460.00</td><td>102.59</td><td>48.59</td><td>54.00</td><td>95.93</td><td>31.90</td><td>8.19 33.43 168 212 Average</td><td>HORIZONTAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2460.00	102.59	48.59	54.00	95.93	31.90	8.19 33.43 168 212 Average	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
Freq	Level	Limit	Level Factor	Loss Factor																																																																
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																													
1	2483.50	53.05	-0.95	54.00	46.46	31.80	8.22 33.43 168 212 Average	HORIZONTAL																																																												
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																													
Freq	Level	Limit	Level Factor	Loss Factor																																																																
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																													
1	2460.00	102.59	48.59	54.00	95.93	31.90	8.19 33.43 168 212 Average	HORIZONTAL																																																												





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																																					
ANT	802.11n HT20 CH11 2462MHz																																																																																					
1+2	Vertical						Fundamental																																																																															
Peak	Site Condition : 032000-KS : FCC PART 15C 3m 3117 SN 75957 VERTICAL : RBW 1000.000kHz VBW 3000.000kHz SFT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/PoS</th><th>T/PoS</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBm/100Hz</th><th>dB</th><th>dBm/100Hz</th><th>dBm</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.74</td><td>67.71</td><td>-6.29</td><td>74.00</td><td>60.66</td><td>32.86</td><td>8.22</td><td>33.43</td><td>254</td><td>360</td><td>Peak</td><td>VERTICAL</td></tr></table>						Over	Limit	ReadAntenna	Cable Preamp	A/PoS	T/PoS	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBm/100Hz	dB	dBm/100Hz	dBm	dB	cm	deg	1	2462.74	67.71	-6.29	74.00	60.66	32.86	8.22	33.43	254	360	Peak	VERTICAL	Site Condition : 032000-KS : FCC PART 15C 3m 3117 SN 75957 VERTICAL : RBW 1000.000kHz VBW 3000.000kHz SFT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/PoS</th><th>T/PoS</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBm/100Hz</th><th>dB</th><th>dBm/100Hz</th><th>dBm</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>106.39</td><td>32.39</td><td>74.00</td><td>98.64</td><td>32.99</td><td>8.19</td><td>33.43</td><td>254</td><td>360</td><td>Peak</td><td>VERTICAL</td></tr></table>						Over	Limit	ReadAntenna	Cable Preamp	A/PoS	T/PoS	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBm/100Hz	dB	dBm/100Hz	dBm	dB	cm	deg	1	2462.00	106.39	32.39	74.00	98.64	32.99	8.19	33.43	254	360	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/PoS	T/PoS	Remark	Pol/Phas																																																																														
Freq	Level	Line	Level Factor	Loss Factor																																																																																		
MHz	dBm/100Hz	dB	dBm/100Hz	dBm	dB	cm	deg																																																																															
1	2462.74	67.71	-6.29	74.00	60.66	32.86	8.22	33.43	254	360	Peak	VERTICAL																																																																										
Over	Limit	ReadAntenna	Cable Preamp	A/PoS	T/PoS	Remark	Pol/Phas																																																																															
Freq	Level	Line	Level Factor	Loss Factor																																																																																		
MHz	dBm/100Hz	dB	dBm/100Hz	dBm	dB	cm	deg																																																																															
1	2462.00	106.39	32.39	74.00	98.64	32.99	8.19	33.43	254	360	Peak	VERTICAL																																																																										
Avg.	Site Condition : 032000-KS : FCC PART 15C (AVG) 3m 3117 SN 75957 VERTICAL : RBW 1000.000kHz VBW 0.0100kHz SFT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/PoS</th><th>T/PoS</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBm/100Hz</th><th>dB</th><th>dBm/100Hz</th><th>dBm</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.50</td><td>48.99</td><td>-5.01</td><td>54.00</td><td>41.34</td><td>32.86</td><td>8.22</td><td>33.43</td><td>254</td><td>360</td><td>Average</td><td>VERTICAL</td></tr></table>						Over	Limit	ReadAntenna	Cable Preamp	A/PoS	T/PoS	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBm/100Hz	dB	dBm/100Hz	dBm	dB	cm	deg	1	2462.50	48.99	-5.01	54.00	41.34	32.86	8.22	33.43	254	360	Average	VERTICAL	Site Condition : 032000-KS : FCC PART 15C (AVG) 3m 3117 SN 75957 VERTICAL : RBW 1000.000kHz VBW 0.0100kHz SFT Auto <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/PoS</th><th>T/PoS</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBm/100Hz</th><th>dB</th><th>dBm/100Hz</th><th>dBm</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>97.37</td><td>43.37</td><td>54.00</td><td>89.62</td><td>32.99</td><td>8.19</td><td>33.43</td><td>254</td><td>360</td><td>Average</td><td>VERTICAL</td></tr></table>						Over	Limit	ReadAntenna	Cable Preamp	A/PoS	T/PoS	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBm/100Hz	dB	dBm/100Hz	dBm	dB	cm	deg	1	2462.00	97.37	43.37	54.00	89.62	32.99	8.19	33.43	254	360	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/PoS	T/PoS	Remark	Pol/Phas																																																																														
Freq	Level	Line	Level Factor	Loss Factor																																																																																		
MHz	dBm/100Hz	dB	dBm/100Hz	dBm	dB	cm	deg																																																																															
1	2462.50	48.99	-5.01	54.00	41.34	32.86	8.22	33.43	254	360	Average	VERTICAL																																																																										
Over	Limit	ReadAntenna	Cable Preamp	A/PoS	T/PoS	Remark	Pol/Phas																																																																															
Freq	Level	Line	Level Factor	Loss Factor																																																																																		
MHz	dBm/100Hz	dB	dBm/100Hz	dBm	dB	cm	deg																																																																															
1	2462.00	97.37	43.37	54.00	89.62	32.99	8.19	33.43	254	360	Average	VERTICAL																																																																										





WIFI 802.11n HT20 (Harmonic @ 3m)

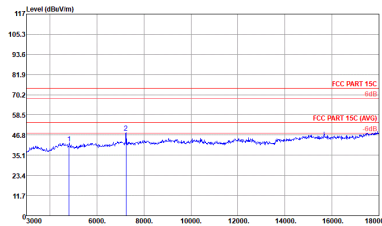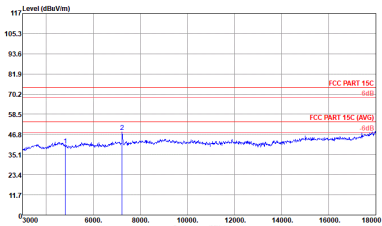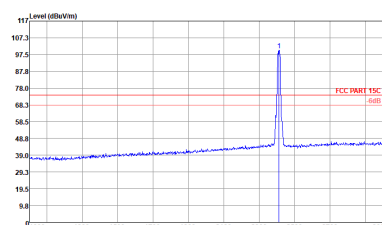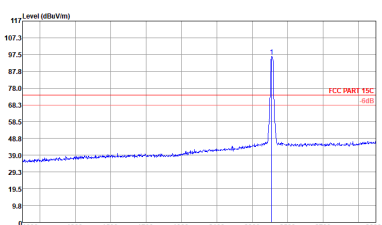WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																					
ANT	802.11n HT20 CH01 2412MHz																																																																																					
1+2	Horizontal	Vertical																																																																																				
Peak Avg.	 Site Condition : 03D060-KS FCC PART 15C 3m 3117 SN 75957 HORIZONTAL RBR:1000.000kHz VBR:3000.000kHz SRT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>42.07</td><td>-31.93</td><td>74.00</td><td>57.28</td><td>34.98</td><td>11.53</td><td>61.72</td><td>300</td><td>0 Peak</td></tr><tr><td>2</td><td>7236.00</td><td>48.11</td><td></td><td></td><td>58.62</td><td>35.85</td><td>14.54</td><td>61.90</td><td>300</td><td>0 Peak</td></tr></tbody></table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	4824.00	42.07	-31.93	74.00	57.28	34.98	11.53	61.72	300	0 Peak	2	7236.00	48.11			58.62	35.85	14.54	61.90	300	0 Peak	 Site Condition : 03D060-KS FCC PART 15C 3m 3117 SN 75957 VERTICAL RBR:1000.000kHz VBR:3000.000kHz SRT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>40.49</td><td>-33.51</td><td>74.00</td><td>55.84</td><td>34.84</td><td>11.53</td><td>61.72</td><td>300</td><td>360 Peak</td></tr><tr><td>2</td><td>7236.00</td><td>48.21</td><td></td><td></td><td>59.27</td><td>36.33</td><td>14.51</td><td>61.90</td><td>300</td><td>360 Peak</td></tr></tbody></table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	4824.00	40.49	-33.51	74.00	55.84	34.84	11.53	61.72	300	360 Peak	2	7236.00	48.21			59.27	36.33	14.51	61.90	300	360 Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																														
1	4824.00	42.07	-31.93	74.00	57.28	34.98	11.53	61.72	300	0 Peak																																																																												
2	7236.00	48.11			58.62	35.85	14.54	61.90	300	0 Peak																																																																												
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																													
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																														
1	4824.00	40.49	-33.51	74.00	55.84	34.84	11.53	61.72	300	360 Peak																																																																												
2	7236.00	48.21			59.27	36.33	14.51	61.90	300	360 Peak																																																																												
Radiated 100K PSD	 Site Condition : 03D060-KS FCC PART 15C 3m 3117 SN 75957 HORIZONTAL RBR:1000.000kHz VBR:3000.000kHz SRT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 *</td><td>2412.00</td><td>100.08</td><td>26.08</td><td>74.00</td><td>93.21</td><td>32.20</td><td>8.11</td><td>33.44</td><td>300</td><td>0 Peak</td></tr></tbody></table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1 *	2412.00	100.08	26.08	74.00	93.21	32.20	8.11	33.44	300	0 Peak	 Site Condition : 03D060-KS FCC PART 15C 3m 3117 SN 75957 VERTICAL RBR:1000.000kHz VBR:3000.000kHz SRT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 *</td><td>2410.00</td><td>96.43</td><td>22.43</td><td>74.00</td><td>88.29</td><td>33.37</td><td>8.11</td><td>33.44</td><td>100</td><td>0 Peak</td></tr></tbody></table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1 *	2410.00	96.43	22.43	74.00	88.29	33.37	8.11	33.44	100	0 Peak																						
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																													
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																														
1 *	2412.00	100.08	26.08	74.00	93.21	32.20	8.11	33.44	300	0 Peak																																																																												
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																													
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																														
1 *	2410.00	96.43	22.43	74.00	88.29	33.37	8.11	33.44	100	0 Peak																																																																												

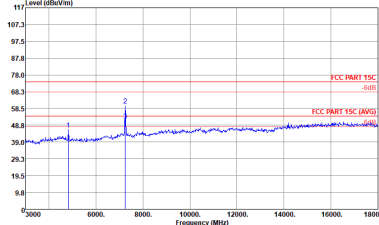



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																																									
ANT	802.11n HT20 CH02 2417MHz																																																																																																																									
1+2	Horizontal	Vertical																																																																																																																								
Peak	 Site Condition : 032006-K5 FCC PART 15C 3m 3117 SW 79957 HORIZONTAL FSW 1000, 0000Hz VSW 3000, 0000Hz SRT Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Poa</th><th>T/Poa</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>Limit</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>dB</th><th></th></tr><tr><td>1</td><td>4836.00</td><td>46.30</td><td>-17.70</td><td>74.00</td><td>40.91</td><td>34.58</td><td>11.55</td><td>61.14</td><td>300</td><td>0 Peak</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>7251.00</td><td>60.27</td><td>-13.78</td><td>74.00</td><td>49.88</td><td>36.85</td><td>14.57</td><td>61.08</td><td>153</td><td>298 Peak</td><td>HORIZONTAL</td></tr><tr><td>3</td><td>7251.00</td><td>51.64</td><td>-12.38</td><td>54.00</td><td>61.30</td><td>36.85</td><td>14.57</td><td>61.08</td><td>153</td><td>298 Average</td><td>HORIZONTAL</td></tr></table>		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poa	T/Poa	Remark	Pol/Phas		MHz	dBuV/m	Limit	Line	Level Factor	Loss Factor				dB		1	4836.00	46.30	-17.70	74.00	40.91	34.58	11.55	61.14	300	0 Peak	HORIZONTAL	2	7251.00	60.27	-13.78	74.00	49.88	36.85	14.57	61.08	153	298 Peak	HORIZONTAL	3	7251.00	51.64	-12.38	54.00	61.30	36.85	14.57	61.08	153	298 Average	HORIZONTAL	 Site Condition : 032006-K5 FCC PART 15C 3m 3117 SW 79957 VERTICAL FSW 1000, 0000Hz VSW 3000, 0000Hz SRT Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Poa</th><th>T/Poa</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>Limit</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>dB</th><th></th></tr><tr><td>1</td><td>4836.00</td><td>43.99</td><td>-30.10</td><td>74.00</td><td>68.66</td><td>34.83</td><td>11.55</td><td>61.14</td><td>300</td><td>340 Peak</td><td>VERTICAL</td></tr><tr><td>2</td><td>7251.00</td><td>58.34</td><td>-15.66</td><td>74.00</td><td>68.97</td><td>36.36</td><td>14.57</td><td>61.08</td><td>152</td><td>38 Peak</td><td>VERTICAL</td></tr><tr><td>3</td><td>7251.00</td><td>50.62</td><td>-12.38</td><td>54.00</td><td>60.77</td><td>36.36</td><td>14.57</td><td>61.08</td><td>152</td><td>38 Average</td><td>VERTICAL</td></tr></table>		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poa	T/Poa	Remark	Pol/Phas		MHz	dBuV/m	Limit	Line	Level Factor	Loss Factor				dB		1	4836.00	43.99	-30.10	74.00	68.66	34.83	11.55	61.14	300	340 Peak	VERTICAL	2	7251.00	58.34	-15.66	74.00	68.97	36.36	14.57	61.08	152	38 Peak	VERTICAL	3	7251.00	50.62	-12.38	54.00	60.77	36.36	14.57	61.08	152	38 Average	VERTICAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poa	T/Poa	Remark	Pol/Phas																																																																																																															
	MHz	dBuV/m	Limit	Line	Level Factor	Loss Factor				dB																																																																																																																
1	4836.00	46.30	-17.70	74.00	40.91	34.58	11.55	61.14	300	0 Peak	HORIZONTAL																																																																																																															
2	7251.00	60.27	-13.78	74.00	49.88	36.85	14.57	61.08	153	298 Peak	HORIZONTAL																																																																																																															
3	7251.00	51.64	-12.38	54.00	61.30	36.85	14.57	61.08	153	298 Average	HORIZONTAL																																																																																																															
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poa	T/Poa	Remark	Pol/Phas																																																																																																															
	MHz	dBuV/m	Limit	Line	Level Factor	Loss Factor				dB																																																																																																																
1	4836.00	43.99	-30.10	74.00	68.66	34.83	11.55	61.14	300	340 Peak	VERTICAL																																																																																																															
2	7251.00	58.34	-15.66	74.00	68.97	36.36	14.57	61.08	152	38 Peak	VERTICAL																																																																																																															
3	7251.00	50.62	-12.38	54.00	60.77	36.36	14.57	61.08	152	38 Average	VERTICAL																																																																																																															
Avg.																																																																																																																										



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																											
ANT	802.11n HT20 CH06 2437MHz																																																																																											
1+2	Horizontal	Vertical																																																																																										
Peak Avg.	 Site : 030806-KS Condition : FCC PART 15C 3m 3117 SN 75957 HORIZONTAL RSM 1000.000kHz VSW 3000.000kHz SMT Auto <table><thead><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th></th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4872.00</td><td>46.41</td><td>-28.89</td><td>74.00</td><td>60.48</td><td>35.04</td><td>11.60</td><td>61.71</td></tr><tr><td>2</td><td>7308.00</td><td>57.45</td><td>-16.25</td><td>74.00</td><td>68.03</td><td>36.86</td><td>14.66</td><td>61.90</td></tr><tr><td>3</td><td>7308.00</td><td>45.21</td><td>-8.79</td><td>54.00</td><td>55.59</td><td>36.86</td><td>14.66</td><td>61.90</td></tr></tbody></table>		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phase		Level	Line	Level Factor	Loss Factor	dB	dB	cm	deg	1	4872.00	46.41	-28.89	74.00	60.48	35.04	11.60	61.71	2	7308.00	57.45	-16.25	74.00	68.03	36.86	14.66	61.90	3	7308.00	45.21	-8.79	54.00	55.59	36.86	14.66	61.90	 Site : 030806-KS Condition : FCC PART 15C 3m 3117 SN 75957 VERTICAL RSM 1000.000kHz VSW 3000.000kHz SMT Auto <table><thead><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th></th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4872.00</td><td>41.11</td><td>-32.89</td><td>74.00</td><td>56.39</td><td>34.83</td><td>11.60</td><td>61.71</td></tr><tr><td>2</td><td>7308.00</td><td>57.45</td><td>-16.45</td><td>74.00</td><td>68.40</td><td>36.39</td><td>14.66</td><td>61.90</td></tr><tr><td>3</td><td>7308.00</td><td>44.11</td><td>-9.89</td><td>54.00</td><td>54.96</td><td>36.39</td><td>14.66</td><td>61.90</td></tr></tbody></table>		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phase		Level	Line	Level Factor	Loss Factor	dB	dB	cm	deg	1	4872.00	41.11	-32.89	74.00	56.39	34.83	11.60	61.71	2	7308.00	57.45	-16.45	74.00	68.40	36.39	14.66	61.90	3	7308.00	44.11	-9.89	54.00	54.96	36.39	14.66	61.90
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phase																																																																																				
	Level	Line	Level Factor	Loss Factor	dB	dB	cm	deg																																																																																				
1	4872.00	46.41	-28.89	74.00	60.48	35.04	11.60	61.71																																																																																				
2	7308.00	57.45	-16.25	74.00	68.03	36.86	14.66	61.90																																																																																				
3	7308.00	45.21	-8.79	54.00	55.59	36.86	14.66	61.90																																																																																				
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phase																																																																																				
	Level	Line	Level Factor	Loss Factor	dB	dB	cm	deg																																																																																				
1	4872.00	41.11	-32.89	74.00	56.39	34.83	11.60	61.71																																																																																				
2	7308.00	57.45	-16.45	74.00	68.40	36.39	14.66	61.90																																																																																				
3	7308.00	44.11	-9.89	54.00	54.96	36.39	14.66	61.90																																																																																				

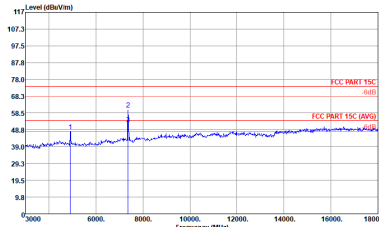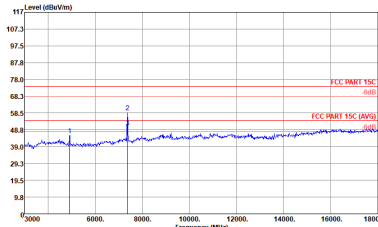

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																																									
ANT	802.11n HT20 CH10 2457MHz																																																																																																																									
1+2	Horizontal	Vertical																																																																																																																								
Peak Avg.	 Site : 032006-K5 Condition : FCC PART 15C 3m 3117 SN 70957 HORIZONTAL RBW:1000, 0000Hz VBW:3000, 0000Hz SFT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Poss</th><th>T/Poss</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>Limit</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1</td><td>4914.00</td><td>47.82</td><td>-26.18</td><td>74.00</td><td>42.18</td><td>35.08</td><td>11.64</td><td>61.08</td><td>300</td><td>0 Peak</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>7271.00</td><td>60.62</td><td>-13.38</td><td>74.00</td><td>70.03</td><td>35.87</td><td>14.78</td><td>61.06</td><td>122</td><td>310 Peak</td><td>HORIZONTAL</td></tr><tr><td>3</td><td>7271.00</td><td>52.11</td><td>-11.89</td><td>54.00</td><td>41.52</td><td>35.87</td><td>14.78</td><td>61.06</td><td>122</td><td>310 Average</td><td>HORIZONTAL</td></tr></table>		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poss	T/Poss	Remark	Pol/Phase		MHz	dBuV/m	Limit	Line	Level Factor	Loss Factor						1	4914.00	47.82	-26.18	74.00	42.18	35.08	11.64	61.08	300	0 Peak	HORIZONTAL	2	7271.00	60.62	-13.38	74.00	70.03	35.87	14.78	61.06	122	310 Peak	HORIZONTAL	3	7271.00	52.11	-11.89	54.00	41.52	35.87	14.78	61.06	122	310 Average	HORIZONTAL	 Site : 032006-K5 Condition : FCC PART 15C 3m 3117 SN 70957 VERTICAL RBW:1000, 0000Hz VBW:3000, 0000Hz SFT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Poss</th><th>T/Poss</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>Limit</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1</td><td>4914.00</td><td>45.73</td><td>-38.27</td><td>74.00</td><td>40.35</td><td>34.82</td><td>11.64</td><td>61.08</td><td>300</td><td>360 Peak</td><td>VERTICAL</td></tr><tr><td>2</td><td>7271.00</td><td>59.09</td><td>-14.91</td><td>74.00</td><td>68.94</td><td>36.43</td><td>14.78</td><td>61.06</td><td>128</td><td>40 Peak</td><td>VERTICAL</td></tr><tr><td>3</td><td>7271.00</td><td>50.13</td><td>-3.87</td><td>54.00</td><td>59.98</td><td>36.43</td><td>14.78</td><td>61.06</td><td>128</td><td>40 Average</td><td>VERTICAL</td></tr></table>		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poss	T/Poss	Remark	Pol/Phase		MHz	dBuV/m	Limit	Line	Level Factor	Loss Factor						1	4914.00	45.73	-38.27	74.00	40.35	34.82	11.64	61.08	300	360 Peak	VERTICAL	2	7271.00	59.09	-14.91	74.00	68.94	36.43	14.78	61.06	128	40 Peak	VERTICAL	3	7271.00	50.13	-3.87	54.00	59.98	36.43	14.78	61.06	128	40 Average	VERTICAL
		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poss	T/Poss	Remark	Pol/Phase																																																																																																														
	MHz	dBuV/m	Limit	Line	Level Factor	Loss Factor																																																																																																																				
1	4914.00	47.82	-26.18	74.00	42.18	35.08	11.64	61.08	300	0 Peak	HORIZONTAL																																																																																																															
2	7271.00	60.62	-13.38	74.00	70.03	35.87	14.78	61.06	122	310 Peak	HORIZONTAL																																																																																																															
3	7271.00	52.11	-11.89	54.00	41.52	35.87	14.78	61.06	122	310 Average	HORIZONTAL																																																																																																															
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poss	T/Poss	Remark	Pol/Phase																																																																																																															
	MHz	dBuV/m	Limit	Line	Level Factor	Loss Factor																																																																																																																				
1	4914.00	45.73	-38.27	74.00	40.35	34.82	11.64	61.08	300	360 Peak	VERTICAL																																																																																																															
2	7271.00	59.09	-14.91	74.00	68.94	36.43	14.78	61.06	128	40 Peak	VERTICAL																																																																																																															
3	7271.00	50.13	-3.87	54.00	59.98	36.43	14.78	61.06	128	40 Average	VERTICAL																																																																																																															



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																					
ANT	802.11n HT20 CH11 2462MHz																																																																																					
1+2	Horizontal	Vertical																																																																																				
Peak Avg.	Site Condition : 030906-KS : FCC PART 15C 3m 3117 SN 75957 HORIZONTAL : BW: 1000.000kHz VBW: 3000.000kHz SMT: Auto <table><tr><th></th><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Poss</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>dBm</th><th>dBm</th><th>dBm</th><th>dBm</th><th>dBm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4926.00</td><td>43.34</td><td>-30.66</td><td>74.00</td><td>58.29</td><td>35.10</td><td>11.66</td><td>61.71</td><td>300</td><td>0</td><td>Peak</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>7386.00</td><td>49.35</td><td>-24.65</td><td>74.00</td><td>59.56</td><td>36.88</td><td>14.81</td><td>61.90</td><td>300</td><td>0</td><td>Peak</td><td>HORIZONTAL</td></tr></table>		Over Limit	ReadAntenna	Cable Preamp	A/Poss	T/Pos	Remark	Pol/Phas		dBm	dBm	dBm	dBm	dBm	deg		1	4926.00	43.34	-30.66	74.00	58.29	35.10	11.66	61.71	300	0	Peak	HORIZONTAL	2	7386.00	49.35	-24.65	74.00	59.56	36.88	14.81	61.90	300	0	Peak	HORIZONTAL	Site Condition : 030906-KS : FCC PART 15C 3m 3117 SN 75957 VERTICAL : BW: 1000.000kHz VBW: 3000.000kHz SMT: Auto <table><tr><th></th><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Poss</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>dBm</th><th>dBm</th><th>dBm</th><th>dBm</th><th>dBm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4926.00</td><td>42.30</td><td>-31.70</td><td>74.00</td><td>57.53</td><td>34.82</td><td>11.66</td><td>61.71</td><td>300</td><td>360</td><td>Peak</td><td>VERTICAL</td></tr><tr><td>2</td><td>7386.00</td><td>46.99</td><td>-27.02</td><td>74.00</td><td>57.63</td><td>36.44</td><td>14.81</td><td>61.90</td><td>300</td><td>360</td><td>Peak</td><td>VERTICAL</td></tr></table>		Over Limit	ReadAntenna	Cable Preamp	A/Poss	T/Pos	Remark	Pol/Phas		dBm	dBm	dBm	dBm	dBm	deg		1	4926.00	42.30	-31.70	74.00	57.53	34.82	11.66	61.71	300	360	Peak	VERTICAL	2	7386.00	46.99	-27.02	74.00	57.63	36.44	14.81	61.90	300	360	Peak	VERTICAL
	Over Limit	ReadAntenna	Cable Preamp	A/Poss	T/Pos	Remark	Pol/Phas																																																																															
	dBm	dBm	dBm	dBm	dBm	deg																																																																																
1	4926.00	43.34	-30.66	74.00	58.29	35.10	11.66	61.71	300	0	Peak	HORIZONTAL																																																																										
2	7386.00	49.35	-24.65	74.00	59.56	36.88	14.81	61.90	300	0	Peak	HORIZONTAL																																																																										
	Over Limit	ReadAntenna	Cable Preamp	A/Poss	T/Pos	Remark	Pol/Phas																																																																															
	dBm	dBm	dBm	dBm	dBm	deg																																																																																
1	4926.00	42.30	-31.70	74.00	57.53	34.82	11.66	61.71	300	360	Peak	VERTICAL																																																																										
2	7386.00	46.99	-27.02	74.00	57.63	36.44	14.81	61.90	300	360	Peak	VERTICAL																																																																										







2.4GHz 2400~2483.5MHz

WIFI 802.11n20 CH01 & BLE(1Mbps) CH00 (Band Edge @ 3m)

BLE		2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																		
		BLE CH00 2402MHz																																																																		
		Horizontal	Fundamental																																																																	
Peak	Site Condition : 030804-KS FCC PART 15C 3m 3117 SN 79957 HORIZONTAL RBW 1000.000kHz VBW 3000.000kHz SMT Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm/100kHz</th><th>dB</th><th>dBm/100kHz</th><th>dBm/100kHz</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 2389.82</td><td>68.21</td><td>-5.79</td><td>74.00</td><td>61.42</td><td>32.15</td><td>8.09</td><td>33.45</td><td>100</td><td>213 Peak</td><td>HORIZONTAL</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/100kHz	dB	dBm/100kHz	dBm/100kHz	dB	dB	cm	deg			1 2389.82	68.21	-5.79	74.00	61.42	32.15	8.09	33.45	100	213 Peak	HORIZONTAL	Site Condition : 030804-KS FCC PART 15C 3m 3117 SN 79957 HORIZONTAL RBW 1000.000kHz VBW 3000.000kHz SMT Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm/100kHz</th><th>dB</th><th>dBm/100kHz</th><th>dBm/100kHz</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 2402.00</td><td>109.28</td><td>35.28</td><td>74.00</td><td>102.43</td><td>32.20</td><td>8.09</td><td>33.44</td><td>100</td><td>213 Peak</td><td>HORIZONTAL</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/100kHz	dB	dBm/100kHz	dBm/100kHz	dB	dB	cm	deg			1 2402.00	109.28	35.28	74.00	102.43	32.20	8.09	33.44	100	213 Peak	HORIZONTAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBm/100kHz	dB	dBm/100kHz	dBm/100kHz	dB	dB	cm	deg																																																												
1 2389.82	68.21	-5.79	74.00	61.42	32.15	8.09	33.45	100	213 Peak	HORIZONTAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBm/100kHz	dB	dBm/100kHz	dBm/100kHz	dB	dB	cm	deg																																																												
1 2402.00	109.28	35.28	74.00	102.43	32.20	8.09	33.44	100	213 Peak	HORIZONTAL																																																										
Avg.	Site Condition : 030804-KS FCC PART 15C (AVG) 3m 3117 SN 79957 HORIZONTAL RBW 1000.000kHz VBW 7.7000kHz SMT Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm/100kHz</th><th>dB</th><th>dBm/100kHz</th><th>dBm/100kHz</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 2389.43</td><td>53.53</td><td>-0.47</td><td>54.00</td><td>46.74</td><td>32.15</td><td>8.09</td><td>33.45</td><td>100</td><td>213 Average</td><td>HORIZONTAL</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/100kHz	dB	dBm/100kHz	dBm/100kHz	dB	dB	cm	deg			1 2389.43	53.53	-0.47	54.00	46.74	32.15	8.09	33.45	100	213 Average	HORIZONTAL	Site Condition : 030804-KS FCC PART 15C (AVG) 3m 3117 SN 79957 HORIZONTAL RBW 1000.000kHz VBW 7.7000kHz SMT Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm/100kHz</th><th>dB</th><th>dBm/100kHz</th><th>dBm/100kHz</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 2402.00</td><td>102.82</td><td>48.82</td><td>54.00</td><td>95.97</td><td>32.20</td><td>8.09</td><td>33.44</td><td>100</td><td>213 Average</td><td>HORIZONTAL</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/100kHz	dB	dBm/100kHz	dBm/100kHz	dB	dB	cm	deg			1 2402.00	102.82	48.82	54.00	95.97	32.20	8.09	33.44	100	213 Average	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBm/100kHz	dB	dBm/100kHz	dBm/100kHz	dB	dB	cm	deg																																																												
1 2389.43	53.53	-0.47	54.00	46.74	32.15	8.09	33.45	100	213 Average	HORIZONTAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBm/100kHz	dB	dBm/100kHz	dBm/100kHz	dB	dB	cm	deg																																																												
1 2402.00	102.82	48.82	54.00	95.97	32.20	8.09	33.44	100	213 Average	HORIZONTAL																																																										



BLE		2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																
		BLE CH00 2402MHz																																																																
		Vertical	Fundamental																																																															
Peak	 Site Condition : 030904-KS : FCC PART 15C 3m 3117 SN 75957 VERTICAL : RBW 1000.000kHz VBW 3000.000kHz SRT Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm/100kHz</th><th>dB</th><th>dBm/100kHz</th><th>dBm/100kHz</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2389.82</td><td>65.93</td><td>-8.07</td><td>74.00</td><td>57.79</td><td>33.50</td><td>8.09</td><td>33.45</td><td>183</td><td>170 Peak</td><td>VERTICAL</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/100kHz	dB	dBm/100kHz	dBm/100kHz	dB	cm	deg			1	2389.82	65.93	-8.07	74.00	57.79	33.50	8.09	33.45	183	170 Peak	VERTICAL	 Site Condition : 030904-KS : FCC PART 15C 3m 3117 SN 75957 VERTICAL : RBW 1000.000kHz VBW 3000.000kHz SRT Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm/100kHz</th><th>dB</th><th>dBm/100kHz</th><th>dBm/100kHz</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2402.00</td><td>107.34</td><td>33.34</td><td>74.00</td><td>99.19</td><td>33.50</td><td>8.09</td><td>33.44</td><td>183</td><td>170 Peak</td><td>VERTICAL</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/100kHz	dB	dBm/100kHz	dBm/100kHz	dB	cm	deg			1	2402.00	107.34	33.34	74.00	99.19	33.50	8.09	33.44	183	170 Peak	VERTICAL
	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																								
MHz	dBm/100kHz	dB	dBm/100kHz	dBm/100kHz	dB	cm	deg																																																											
1	2389.82	65.93	-8.07	74.00	57.79	33.50	8.09	33.45	183	170 Peak	VERTICAL																																																							
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBm/100kHz	dB	dBm/100kHz	dBm/100kHz	dB	cm	deg																																																											
1	2402.00	107.34	33.34	74.00	99.19	33.50	8.09	33.44	183	170 Peak	VERTICAL																																																							
Avg	 Site Condition : 030904-KS : FCC PART 15C (AVG) 3m 3117 SN 75957 VERTICAL : RBW 1000.000kHz VBW 2.700kHz SRT Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm/100kHz</th><th>dB</th><th>dBm/100kHz</th><th>dBm/100kHz</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2389.95</td><td>53.01</td><td>-0.99</td><td>54.00</td><td>44.87</td><td>33.50</td><td>8.09</td><td>33.45</td><td>183</td><td>170 Average</td><td>VERTICAL</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/100kHz	dB	dBm/100kHz	dBm/100kHz	dB	cm	deg			1	2389.95	53.01	-0.99	54.00	44.87	33.50	8.09	33.45	183	170 Average	VERTICAL	 Site Condition : 030904-KS : FCC PART 15C (AVG) 3m 3117 SN 75957 VERTICAL : RBW 1000.000kHz VBW 2.700kHz SRT Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm/100kHz</th><th>dB</th><th>dBm/100kHz</th><th>dBm/100kHz</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2402.00</td><td>101.14</td><td>47.14</td><td>54.00</td><td>92.99</td><td>33.50</td><td>8.09</td><td>33.44</td><td>183</td><td>170 Average</td><td>VERTICAL</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/100kHz	dB	dBm/100kHz	dBm/100kHz	dB	cm	deg			1	2402.00	101.14	47.14	54.00	92.99	33.50	8.09	33.44	183	170 Average	VERTICAL
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBm/100kHz	dB	dBm/100kHz	dBm/100kHz	dB	cm	deg																																																											
1	2389.95	53.01	-0.99	54.00	44.87	33.50	8.09	33.45	183	170 Average	VERTICAL																																																							
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBm/100kHz	dB	dBm/100kHz	dBm/100kHz	dB	cm	deg																																																											
1	2402.00	101.14	47.14	54.00	92.99	33.50	8.09	33.44	183	170 Average	VERTICAL																																																							



WIFI 802.11n20 CH01 & BLE(1Mbps) CH00 (Band Edge @ 3m)



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																													
	802.11n20 CH01 2412MHz																																																																													
	Horizontal					Fundamental																																																																								
Peak	Site Condition : 030H00-KS : FCC PART 15C 3m 3117.5N 75957 HORIZONTAL : RBW 1000.000kHz VBW 3000.000kHz SMT Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2389.56</td><td>67.01</td><td>-6.99</td><td>74.00</td><td>60.22</td><td>32.15</td><td>8.09</td><td>33.45</td><td>106</td><td>214 Peak</td><td>HORIZONTAL</td></tr></table>					Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg			1	2389.56	67.01	-6.99	74.00	60.22	32.15	8.09	33.45	106	214 Peak	HORIZONTAL	Site Condition : 030H00-KS : FCC PART 15C 3m 3117.5N 75957 HORIZONTAL : RBW 1000.000kHz VBW 3000.000kHz SMT Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2410.00</td><td>111.32</td><td>37.32</td><td>74.00</td><td>104.45</td><td>32.20</td><td>8.11</td><td>33.44</td><td>106</td><td>214 Peak</td><td>HORIZONTAL</td></tr></table>					Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	2410.00	111.32	37.32	74.00	104.45	32.20	8.11	33.44	106	214 Peak	HORIZONTAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2389.56	67.01	-6.99	74.00	60.22	32.15	8.09	33.45	106	214 Peak	HORIZONTAL																																																																			
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2410.00	111.32	37.32	74.00	104.45	32.20	8.11	33.44	106	214 Peak	HORIZONTAL																																																																			
Avg.	Site Condition : 030H00-KS : FCC PART 15C (AVG) 3m 3117.5N 75957 HORIZONTAL : RBW 1000.000kHz VBW 0.010kHz SMT Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2389.95</td><td>52.22</td><td>-1.78</td><td>54.00</td><td>45.43</td><td>32.15</td><td>8.09</td><td>33.45</td><td>106</td><td>214 Average</td><td>HORIZONTAL</td></tr></table>					Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg			1	2389.95	52.22	-1.78	54.00	45.43	32.15	8.09	33.45	106	214 Average	HORIZONTAL	Site Condition : 030H00-KS : FCC PART 15C (AVG) 3m 3117.5N 75957 HORIZONTAL : RBW 1000.000kHz VBW 0.010kHz SMT Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2410.00</td><td>102.37</td><td>48.37</td><td>54.00</td><td>95.50</td><td>32.20</td><td>8.11</td><td>33.44</td><td>106</td><td>214 Average</td><td>HORIZONTAL</td></tr></table>					Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	2410.00	102.37	48.37	54.00	95.50	32.20	8.11	33.44	106	214 Average	HORIZONTAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2389.95	52.22	-1.78	54.00	45.43	32.15	8.09	33.45	106	214 Average	HORIZONTAL																																																																			
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2410.00	102.37	48.37	54.00	95.50	32.20	8.11	33.44	106	214 Average	HORIZONTAL																																																																			



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																														
	802.11n20 CH01 2412MHz																																																																														
	Vertical										Fundamental																																																																				
Peak	Site : 030H06-KS Condition : FCC PART 15C 3m 3117 SN 75957 VERTICAL RBW: 1000.000kHz VBW: 3000.000kHz SMT: Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2389.95</td><td>65.97</td><td>-8.03</td><td>74.00</td><td>57.83</td><td>33.50</td><td>8.09</td><td>33.45</td><td>183</td><td>170 Peak</td><td>VERTICAL</td></tr></table>										Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg			1	2389.95	65.97	-8.03	74.00	57.83	33.50	8.09	33.45	183	170 Peak	VERTICAL	Site : 030H06-KS Condition : FCC PART 15C 3m 3117 SN 75957 VERTICAL RBW: 1000.000kHz VBW: 3000.000kHz SMT: Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2412.00</td><td>107.90</td><td>33.90</td><td>74.00</td><td>99.86</td><td>33.37</td><td>8.11</td><td>33.44</td><td>183</td><td>170 Peak</td><td>VERTICAL</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg			1	2412.00	107.90	33.90	74.00	99.86	33.37	8.11	33.44	183	170 Peak	VERTICAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																																							
1	2389.95	65.97	-8.03	74.00	57.83	33.50	8.09	33.45	183	170 Peak	VERTICAL																																																																				
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																																							
1	2412.00	107.90	33.90	74.00	99.86	33.37	8.11	33.44	183	170 Peak	VERTICAL																																																																				
Avg.	Site : 030H06-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 75957 VERTICAL RBW: 1000.000kHz VBW: 0.010kHz SMT: Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2389.95</td><td>51.20</td><td>-2.80</td><td>54.00</td><td>43.06</td><td>33.50</td><td>8.09</td><td>33.45</td><td>183</td><td>170 Average</td><td>VERTICAL</td></tr></table>										Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg			1	2389.95	51.20	-2.80	54.00	43.06	33.50	8.09	33.45	183	170 Average	VERTICAL	Site : 030H06-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 75957 VERTICAL RBW: 1000.000kHz VBW: 0.010kHz SMT: Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2412.00</td><td>100.38</td><td>46.38</td><td>54.00</td><td>92.34</td><td>33.37</td><td>8.11</td><td>33.44</td><td>183</td><td>170 Average</td><td>VERTICAL</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg			1	2412.00	100.38	46.38	54.00	92.34	33.37	8.11	33.44	183	170 Average	VERTICAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																																							
1	2389.95	51.20	-2.80	54.00	43.06	33.50	8.09	33.45	183	170 Average	VERTICAL																																																																				
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																																							
1	2412.00	100.38	46.38	54.00	92.34	33.37	8.11	33.44	183	170 Average	VERTICAL																																																																				



WIFI 802.11n20 CH01 & BLE (1Mbps) CH00 (Harmonic @ 3m)

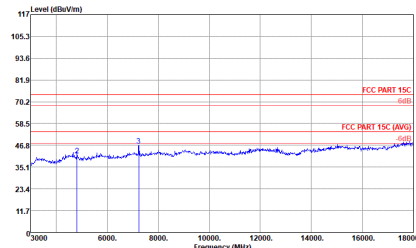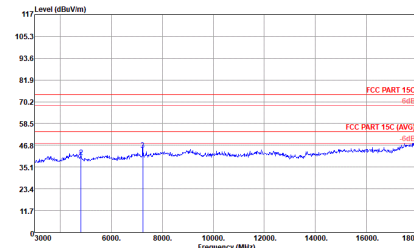WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																
802.11n20 CH01 2412MHz																																																																	
	Horizontal																																																																
Peak Avg.	 Site : 030M04-KS Condition : FCC PART 15C 3m 3117 SN 75957 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4804.00</td><td>39.41</td><td>-34.09</td><td>74.00</td><td>54.66</td><td>34.96</td><td>11.51</td><td>61.72</td><td>300</td><td>0 Peak HORIZONTAL</td></tr><tr><td>2</td><td>4824.00</td><td>41.39</td><td>-32.61</td><td>74.00</td><td>56.65</td><td>34.99</td><td>11.53</td><td>61.72</td><td>300</td><td>0 Peak HORIZONTAL</td></tr><tr><td>3</td><td>7236.00</td><td>46.72</td><td></td><td></td><td>57.23</td><td>36.85</td><td>14.54</td><td>61.90</td><td>300</td><td>0 Peak HORIZONTAL</td></tr></table>										Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg			1	4804.00	39.41	-34.09	74.00	54.66	34.96	11.51	61.72	300	0 Peak HORIZONTAL	2	4824.00	41.39	-32.61	74.00	56.65	34.99	11.53	61.72	300	0 Peak HORIZONTAL	3	7236.00	46.72			57.23	36.85	14.54	61.90	300	0 Peak HORIZONTAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																									
1	4804.00	39.41	-34.09	74.00	54.66	34.96	11.51	61.72	300	0 Peak HORIZONTAL																																																							
2	4824.00	41.39	-32.61	74.00	56.65	34.99	11.53	61.72	300	0 Peak HORIZONTAL																																																							
3	7236.00	46.72			57.23	36.85	14.54	61.90	300	0 Peak HORIZONTAL																																																							
	Vertical																																																																
	 Site : 030M04-KS Condition : FCC PART 15C 3m 3117 SN 75957 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4804.00</td><td>39.35</td><td>-34.65</td><td>74.00</td><td>54.72</td><td>34.84</td><td>11.51</td><td>61.72</td><td>300</td><td>360 Peak VERTICAL</td></tr><tr><td>2</td><td>4824.00</td><td>40.33</td><td>-33.67</td><td>74.00</td><td>55.68</td><td>34.84</td><td>11.51</td><td>61.72</td><td>300</td><td>360 Peak VERTICAL</td></tr><tr><td>3</td><td>7236.00</td><td>44.44</td><td></td><td></td><td>55.46</td><td>36.34</td><td>14.54</td><td>61.90</td><td>300</td><td>360 Peak VERTICAL</td></tr></table>										Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg			1	4804.00	39.35	-34.65	74.00	54.72	34.84	11.51	61.72	300	360 Peak VERTICAL	2	4824.00	40.33	-33.67	74.00	55.68	34.84	11.51	61.72	300	360 Peak VERTICAL	3	7236.00	44.44			55.46	36.34	14.54	61.90	300	360 Peak VERTICAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																									
1	4804.00	39.35	-34.65	74.00	54.72	34.84	11.51	61.72	300	360 Peak VERTICAL																																																							
2	4824.00	40.33	-33.67	74.00	55.68	34.84	11.51	61.72	300	360 Peak VERTICAL																																																							
3	7236.00	44.44			55.46	36.34	14.54	61.90	300	360 Peak VERTICAL																																																							

Note: For above testing, we have also tested from 18GHz to 25GHz and found no emissions.



Emission below 1GHz
2.4GHz WIFI 802.11n HT20 (LF)

WIFI	2.4GHz 2400~2483.5MHz																																																																																																																																																																																																	
ANT	802.11n HT20 LF																																																																																																																																																																																																	
1+2	Horizontal	Vertical																																																																																																																																																																																																
QP / Peak	Site : 030806-KS Condition : FCC PART 15C 3m GBL61120 SN23188 HORIZONTAL #88 100.000MHz VSW 300.000dB SBT Auto <table><tr><th>Peak</th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Poss</th><th>T/Poss</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>30.00</td><td>23.38</td><td>-16.62</td><td>40.00</td><td>30.50</td><td>75.00</td><td>0.58</td><td>32.70</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>112.40</td><td>23.97</td><td>-16.03</td><td>43.50</td><td>38.10</td><td>17.03</td><td>1.72</td><td>32.88</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr><tr><td>3</td><td>142.52</td><td>27.48</td><td>-12.52</td><td>43.50</td><td>41.77</td><td>16.01</td><td>1.92</td><td>32.82</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr><tr><td>4</td><td>239.52</td><td>26.86</td><td>-13.14</td><td>46.00</td><td>39.58</td><td>17.87</td><td>2.50</td><td>33.10</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr><tr><td>5</td><td>259.80</td><td>26.80</td><td>-13.40</td><td>46.00</td><td>35.63</td><td>20.77</td><td>3.08</td><td>32.86</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr><tr><td>6</td><td>827.34</td><td>32.61</td><td>-13.39</td><td>46.00</td><td>34.16</td><td>26.32</td><td>4.68</td><td>32.55</td><td>152</td><td>73 Peak</td><td>HORIZONTAL</td></tr></table>	Peak	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poss	T/Poss	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1	30.00	23.38	-16.62	40.00	30.50	75.00	0.58	32.70	---	Peak	HORIZONTAL	2	112.40	23.97	-16.03	43.50	38.10	17.03	1.72	32.88	---	Peak	HORIZONTAL	3	142.52	27.48	-12.52	43.50	41.77	16.01	1.92	32.82	---	Peak	HORIZONTAL	4	239.52	26.86	-13.14	46.00	39.58	17.87	2.50	33.10	---	Peak	HORIZONTAL	5	259.80	26.80	-13.40	46.00	35.63	20.77	3.08	32.86	---	Peak	HORIZONTAL	6	827.34	32.61	-13.39	46.00	34.16	26.32	4.68	32.55	152	73 Peak	HORIZONTAL	Site : 030806-KS Condition : FCC PART 15C 3m GBL61120 SN23188 VERTICAL #88 100.000MHz VSW 300.000dB SBT Auto <table><tr><th>Peak</th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Poss</th><th>T/Poss</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>30.00</td><td>28.79</td><td>-11.21</td><td>40.00</td><td>35.41</td><td>25.50</td><td>0.58</td><td>32.70</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr><tr><td>2</td><td>112.41</td><td>33.10</td><td>-12.90</td><td>43.50</td><td>46.40</td><td>17.86</td><td>1.78</td><td>32.86</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr><tr><td>3</td><td>142.52</td><td>35.57</td><td>-10.43</td><td>43.50</td><td>39.88</td><td>16.69</td><td>2.25</td><td>33.05</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr><tr><td>4</td><td>239.80</td><td>40.21</td><td>-5.79</td><td>46.00</td><td>48.30</td><td>21.65</td><td>3.08</td><td>32.89</td><td>203</td><td>49 Peak</td><td>VERTICAL</td></tr><tr><td>5</td><td>412.10</td><td>31.97</td><td>-14.03</td><td>46.00</td><td>38.99</td><td>22.96</td><td>3.31</td><td>32.77</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr><tr><td>6</td><td>958.29</td><td>30.32</td><td>-15.68</td><td>46.00</td><td>29.57</td><td>27.98</td><td>5.04</td><td>32.27</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr></table>	Peak	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poss	T/Poss	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1	30.00	28.79	-11.21	40.00	35.41	25.50	0.58	32.70	---	Peak	VERTICAL	2	112.41	33.10	-12.90	43.50	46.40	17.86	1.78	32.86	---	Peak	VERTICAL	3	142.52	35.57	-10.43	43.50	39.88	16.69	2.25	33.05	---	Peak	VERTICAL	4	239.80	40.21	-5.79	46.00	48.30	21.65	3.08	32.89	203	49 Peak	VERTICAL	5	412.10	31.97	-14.03	46.00	38.99	22.96	3.31	32.77	---	Peak	VERTICAL	6	958.29	30.32	-15.68	46.00	29.57	27.98	5.04	32.27	---	Peak	VERTICAL
Peak	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poss	T/Poss	Remark	Pol/Phas																																																																																																																																																																																							
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																																																																																																																																									
1	30.00	23.38	-16.62	40.00	30.50	75.00	0.58	32.70	---	Peak	HORIZONTAL																																																																																																																																																																																							
2	112.40	23.97	-16.03	43.50	38.10	17.03	1.72	32.88	---	Peak	HORIZONTAL																																																																																																																																																																																							
3	142.52	27.48	-12.52	43.50	41.77	16.01	1.92	32.82	---	Peak	HORIZONTAL																																																																																																																																																																																							
4	239.52	26.86	-13.14	46.00	39.58	17.87	2.50	33.10	---	Peak	HORIZONTAL																																																																																																																																																																																							
5	259.80	26.80	-13.40	46.00	35.63	20.77	3.08	32.86	---	Peak	HORIZONTAL																																																																																																																																																																																							
6	827.34	32.61	-13.39	46.00	34.16	26.32	4.68	32.55	152	73 Peak	HORIZONTAL																																																																																																																																																																																							
Peak	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poss	T/Poss	Remark	Pol/Phas																																																																																																																																																																																							
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																																																																																																																																									
1	30.00	28.79	-11.21	40.00	35.41	25.50	0.58	32.70	---	Peak	VERTICAL																																																																																																																																																																																							
2	112.41	33.10	-12.90	43.50	46.40	17.86	1.78	32.86	---	Peak	VERTICAL																																																																																																																																																																																							
3	142.52	35.57	-10.43	43.50	39.88	16.69	2.25	33.05	---	Peak	VERTICAL																																																																																																																																																																																							
4	239.80	40.21	-5.79	46.00	48.30	21.65	3.08	32.89	203	49 Peak	VERTICAL																																																																																																																																																																																							
5	412.10	31.97	-14.03	46.00	38.99	22.96	3.31	32.77	---	Peak	VERTICAL																																																																																																																																																																																							
6	958.29	30.32	-15.68	46.00	29.57	27.98	5.04	32.27	---	Peak	VERTICAL																																																																																																																																																																																							




Appendix E. Duty Cycle Plots


Antenna	Band	Duty Cycle(%)	Duty Factor(dB)	T(ms)	1/T(kHz)	VBW Setting
1+2	802.11b	100	0	-	-	10Hz
1+2	802.11g	100	0	-	-	10Hz
1+2	802.11n HT20	100	0	-	-	10Hz
1	Bluetooth LE 1Mbps	60.65	0.37971	2.17	2.634	2.7KHz



802.11b

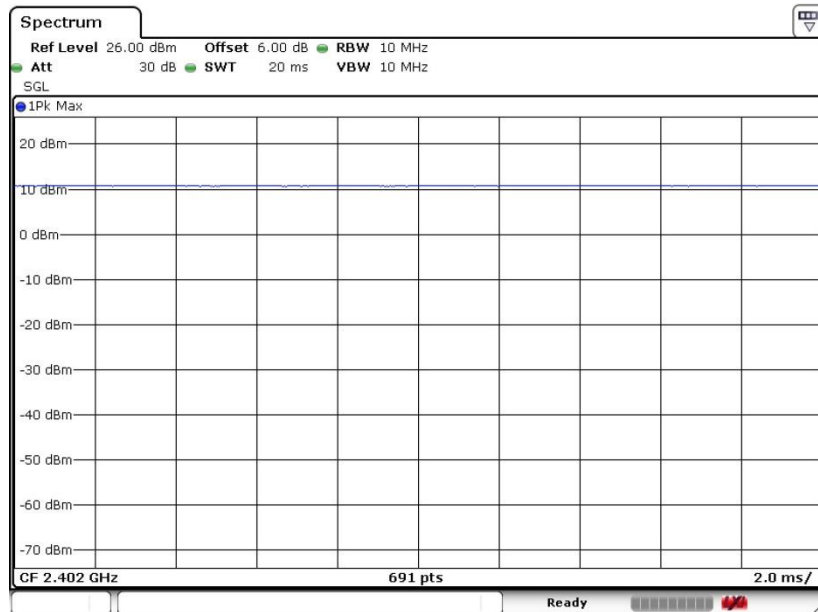


802.11g

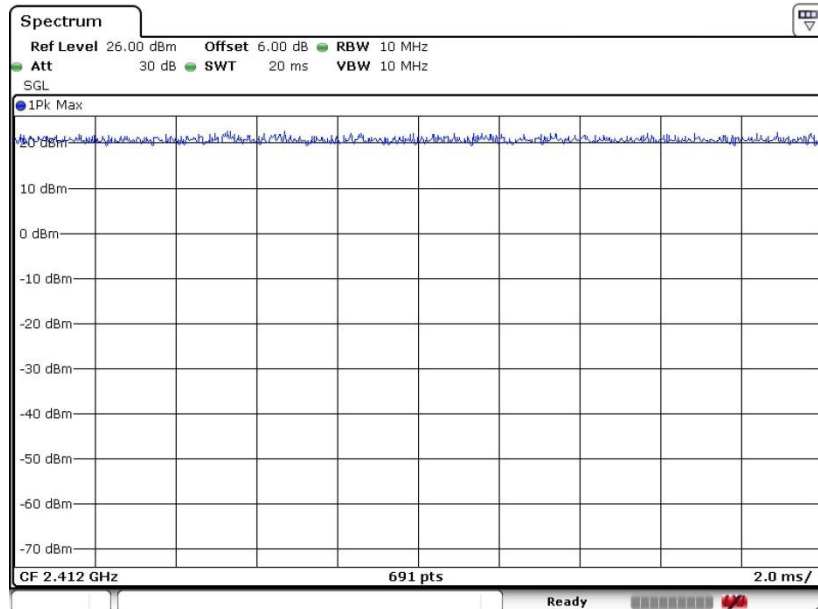



802.11n HT20

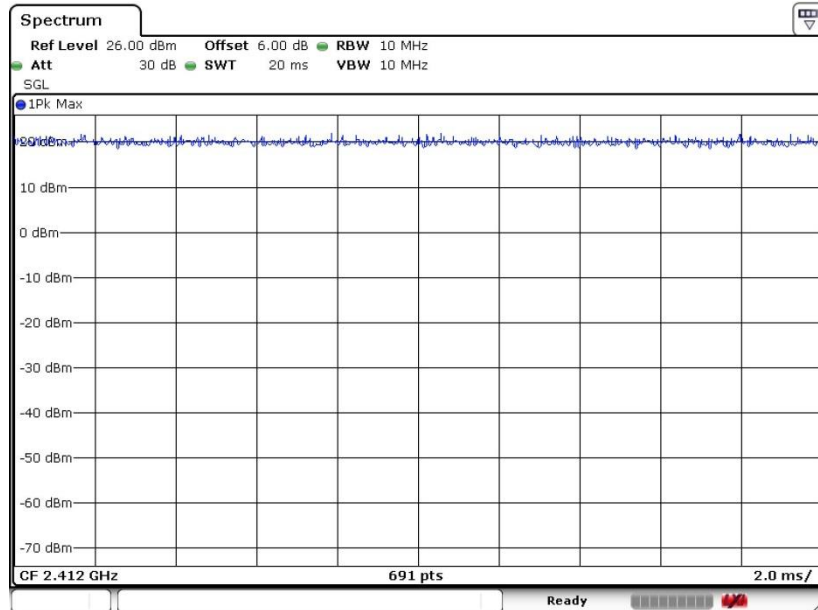

Bluetooth LE 1Mbps

