



RADIO TEST REPORT

Applicant	:	Peak Design
Address of Applicant	:	2415 3rd St Ste 270 San Francisco CA 94107 USA
Manufacturer	:	Peak Design
Address of Manufacturer	:	2415 3rd St Ste 270 San Francisco CA 94107 USA
Equipment under Test	:	WIRELESS KICKSTAND TRAVEL BATTERY
Model No.	:	M-BT-S5
Trade Mark	:	 , peak design
FCC ID	:	2AZ94MBTS5
Test Standard(s)	:	47 CFR Part 15 Subpart C ANSI C63.10-2020
Report No.	:	DDT-RE26071535-1E03
Issue Date	:	2026/09/12
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

REPORT

Table of Contents

1.	Summary of Test Results	5
2.	General Test Information.....	6
2.1.	Description of EUT	6
2.2.	Accessories of EUT	6
2.3.	Block diagram of EUT configuration for test.....	6
2.4.	Decision of final test mode	7
2.5.	Deviations of test standard	7
2.6.	Test environment conditions	7
2.7.	Test laboratory	7
2.8.	Measurement uncertainty	8
3	20 dB Bandwidth	9
3.1.	Test equipment.....	9
3.2.	Block diagram of test setup	9
3.3.	Limits	9
3.4.	Test procedure	9
3.5.	Test result.....	10
3.6.	Original test data	10
4.	Radiated Emission	11
4.1.	Test equipment.....	11
4.2.	Block diagram of test setup	12
4.3.	Limits	13
4.4.	Assistant equipment used for test	13
4.5.	Test procedure	13
4.6.	Test result.....	14
4.7.	Test data	15
5.	Power Line Conducted Emissions.....	31
5.1.	Test equipment.....	31
5.2.	Block diagram of test setup	31
5.3.	Limits	32
5.4.	Assistant equipment used for test	32
5.5.	Test procedure	32
5.6.	Test result.....	32
5.7.	Test data	33
6.	Test Setup Photograph	35
7.	Photos of the EUT	38

Test Report Declare

Applicant	:	Peak Design
Address of Applicant	:	2415 3rd St Ste 270 San Francisco CA 94107 USA
Equipment under Test	:	WIRELESS KICKSTAND TRAVEL BATTERY
Model No.	:	M-BT-S5
Manufacturer	:	Peak Design
Address of Manufacturer	:	2415 3rd St Ste 270 San Francisco CA 94107 USA

Test Standard Used:

47 CFR Part 15 Subpart C
ANSI C63.10-2020

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE26071535-1E03		
Date of Receipt:	2026/07/21	Date of Test:	2026/07/21~2026/08/31

Created: Zeng Zhongyao	Reviewed: Zoe Peng	Approved: Ella Gong
		
2026/09/09	2026/09/12	2026/09/12

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Version	Revision Content	Issue Date	Approved
V0	Initial issue	2026/09/12	Ella Gong

1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	20 dB Bandwidth	47 CFR Part 15 15.215	/	Pass
2	Radiated Emission	47 CFR Part 15 15.205, FCC Part 15: 15.209	/	Pass
3	Antenna Requirement	47 CFR Part 15 15.203	/	Pass
4	Power Line Conducted Emissions	47 CFR Part 15 15.207(a)	/	Pass

Note: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.

2. General Test Information

2.1. Description of EUT

EUT Name	: WIRELESS KICKSTAND TRAVEL BATTERY
Model Number	: M-BT-S5
Difference of model number	: /
EUT Function Description	: Please reference user manual of this device
Power Supply	: Li-ion Battery: 5000mAh, 3.91V, 19.55Wh USB-C Input, While Wireless Output: 5V/9V/12V=3A, 15V=2.4A (36W MAX) USB-C Input/Output, No Wireless Output: 5V=3A, 9V=2.22A (20W MAX) Wireless Output: 15W MAX (Battery Only), 25W MAX (Pass Through) Combined Output: 5V=2A (USB-C) + 5W (Wireless)Supported
Hardware Version	: V1.3
Software Version	: V1.3
Wireless charging operation frequency	: 111KHz-147KHz, 360KHz
Antenna Type	: Inductive loop coil antenna

Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.


“☑” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.

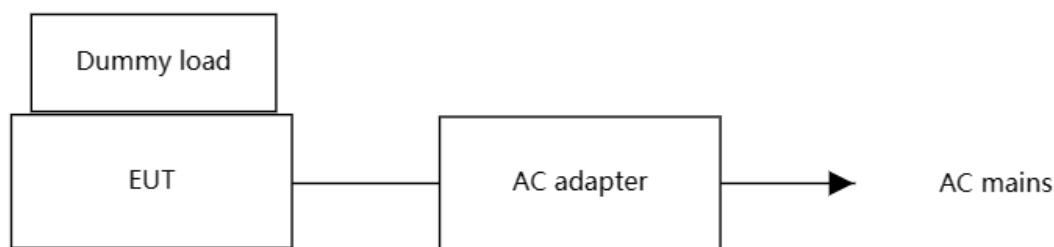
2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
Dummy load	N/A	N/A	N/A
Phone	Apple	Iphone 15pro	N/A

2.3. Block diagram of EUT configuration for test

For mode 1:





For mode 2:



2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

For mode 1: Tx mode (Phone, 25W load)

For mode 2: Standby mode

Note: Scan with mode 1 and mode 2, the worst case is mode 1 Tx mode (25W load) and recorded in this report

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118

2.8. Measurement uncertainty

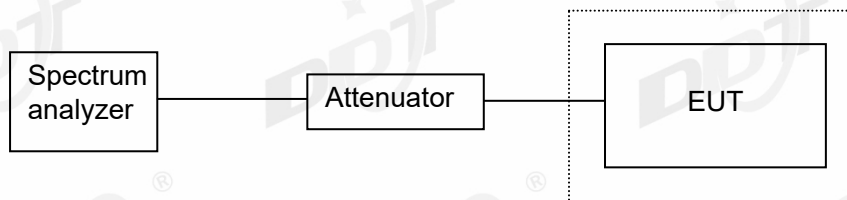
Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method) 5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$) 1.66 dB ($8 \text{ GHz} \leq f < 26.5 \text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V) 4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz) 4.40 dB (6 GHz - 18 GHz) 3.54 dB (18 GHz - 26 GHz) 4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz) 3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3 20 dB Bandwidth

3.1. Test equipment

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☒ RF Connected Test (RF Measurement System 1#)				
SIGNAL ANALYZER	R&S	FSQ26	101272	2027/02/27
Wideband Radio Communication Tester	R&S	CMW500	117491	2027/02/27
MXG Vector Signal Generator	KEYSIGHT	N5182B	MY59100192	2027/02/27
MXG Vector Signal Generator	Agilent	N5182A	MY47420658	2027/02/27
RF Control Unit	Tonscend	JS0806-2	158060010	2027/02/27
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2027/02/27
Test Software	Tonscend	JS1120-3	V3.6.21	N/A

3.2. Block diagram of test setup



3.3. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

3.4. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The bandwidth of the fundamental frequency was measured by spectrum analyzer with 300 Hz RBW and 1 kHz VBW. The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

Freq. (kHz)	20 dB bandwidth Result (kHz)	Conclusion
134.08	0.779	Pass
359.99	0.779	Pass

134.08 kHz

Ref -20 dBm Att 5 dB

* RBW 300 Hz
* VBW 1 kHz
S/V 35 ns

Marker 1 [T1]
-41.61 dBm
134.081730769 kHz

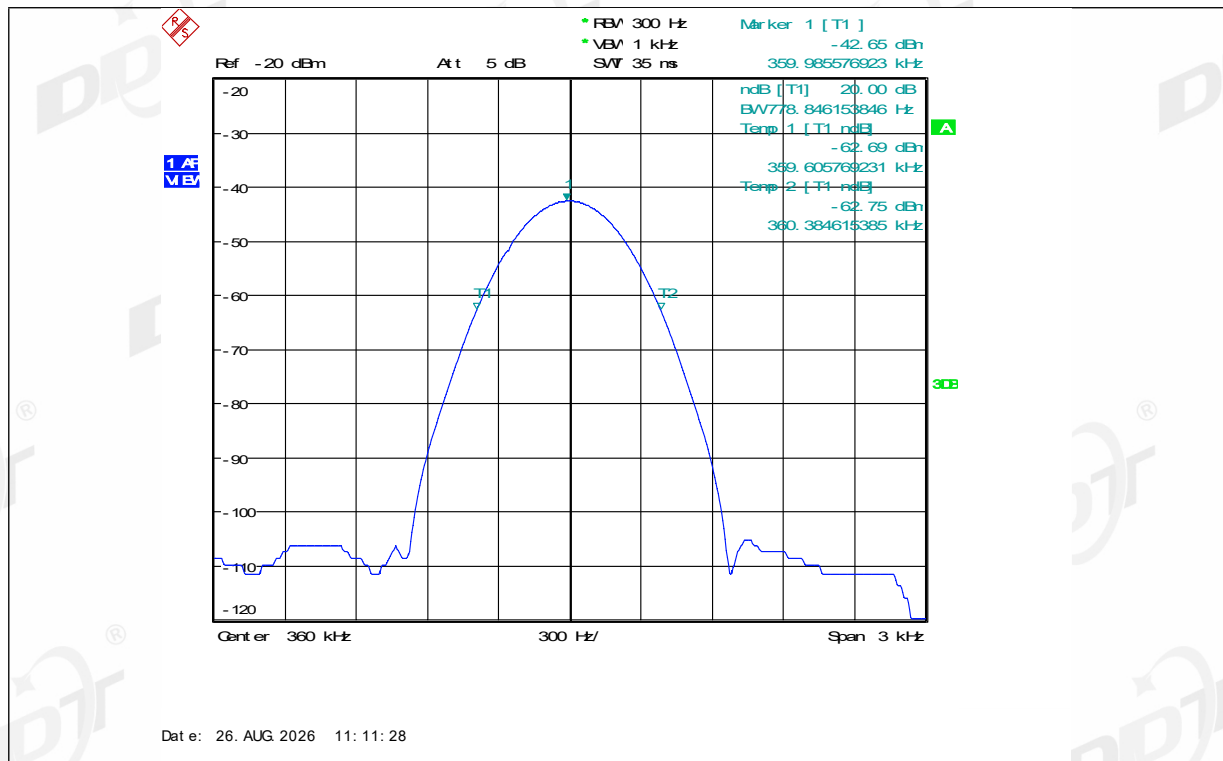
1 AT VEB

ndB [T1] 20.00 dB
BW/778.846153846 Hz
Temp 1 [T1] ndB
-61.82 dBm
133.682692308 kHz
Temp 2 [T1] ndB
-61.55 dBm
134.461538462 kHz

Center 134.0817308 kHz 300 Hz/ Span 3 kHz

Date: 26. AUG. 2026 11:13:10

359.99 kHz



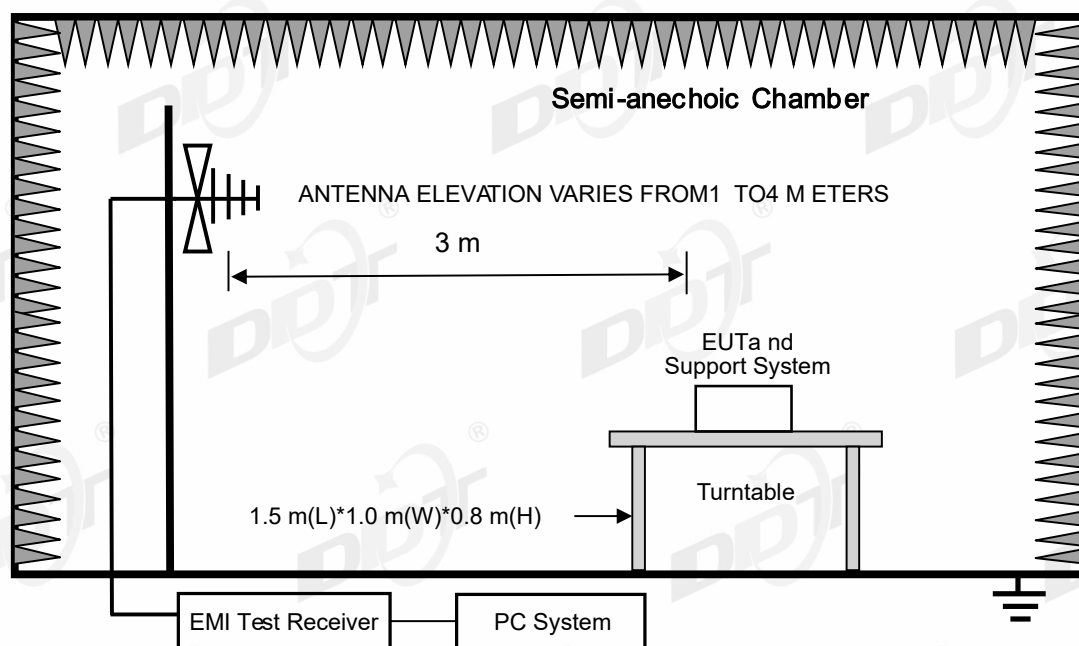
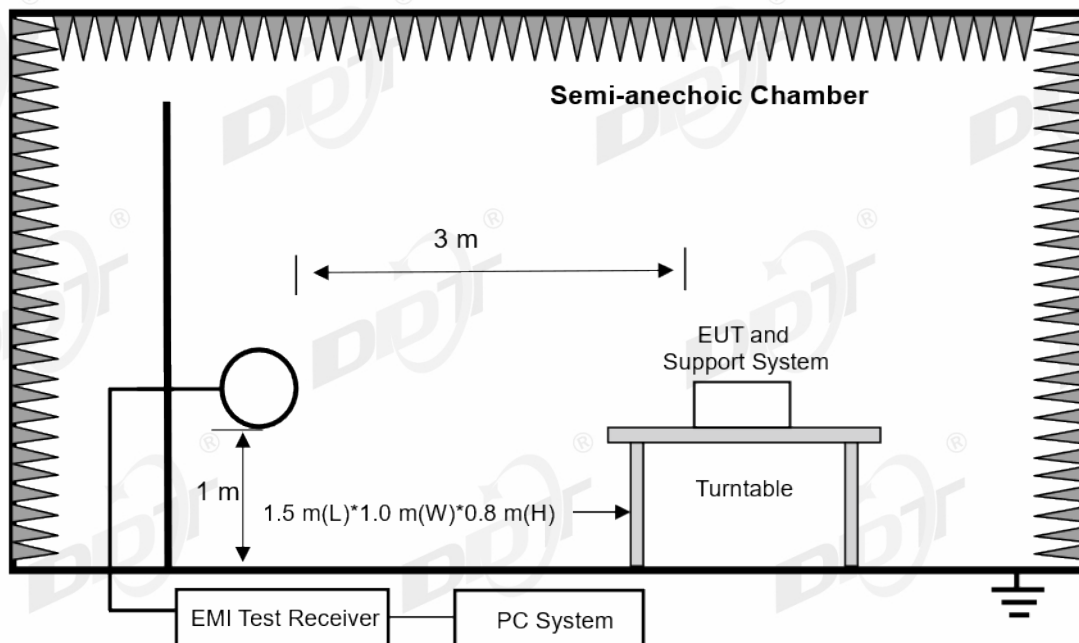
4. Radiated Emission

4.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2027/02/27
RF cable	Zhongke Junchuang	Z805UF-NJ-NJ-10M	DDT-ZC05591	2026/10/10
RF cable	Zhongke Junchuang	Z805UF-NJ-NJ-3M	DDT-ZC05590	2026/10/10
RF cable	Zhongke Junchuang	JCTB510-NJW-NJW-0.6M	DDT-ZC04595	2026/10/10
RF cable	Zhongke Junchuang	JCT40P-2.92J-2.92J-1M	DDT-ZC03802	2026/10/10
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2026/10/10
RF cable	Zhongke Junchuang	JCT40P-2.92J-2.92J-5M	DDT-ZC03800	2026/10/10
Radiation disturbance fully automated test software	Tonscend	JS32-RE (V5.0.0)	DDT-ZC02739	/
Pre-amplifier	SONOMA	310N	DDT-ZC01969	2027/06/25
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2027/03/05
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2027/07/08
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2027/02/27
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2027/02/27
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2027/02/27
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
Broad-Band Horn	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04

Antenna				
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2027/07/10
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC02129	2027/07/10
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2027/07/10
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2027/02/27

4.2. Block diagram of test setup



4.3. Limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		uV/m	dB(uV)/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30~ 88	3	100	40.0
88~ 216	3	150	43.5
216~ 960	3	200	46.0
960~ 1000	3	500	54.0

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dBuV/m}) = \text{Limit}_{300\text{m}}(\text{dBuV/m}) + 40\text{Log}(300\text{m}/3\text{m}) = \text{Limit}_{300\text{m}}(\text{dBuV/m}) + 80$$

$$\text{Limit}_{3\text{m}}(\text{dBuV/m}) = \text{Limit}_{30\text{m}}(\text{dBuV/m}) + 40\text{Log}(30\text{m}/3\text{m}) = \text{Limit}_{30\text{m}}(\text{dBuV/m}) + 40$$

4.4. Assistant equipment used for test

Accessories	Manufacturer	Model number	Description
Dummy load	N/A	N/A	N/A
Phone	Apple	Iphone 15pro	N/A

4.5. Test procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m

According ANSI C63.10-2020 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30MHz, the trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the

horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10-2020 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10-2020 clause 4.1.5.2.2 procedure for average measure.

(8) For portable device, X axis, Y axis, Z axis are tested, and worse setup is reported.

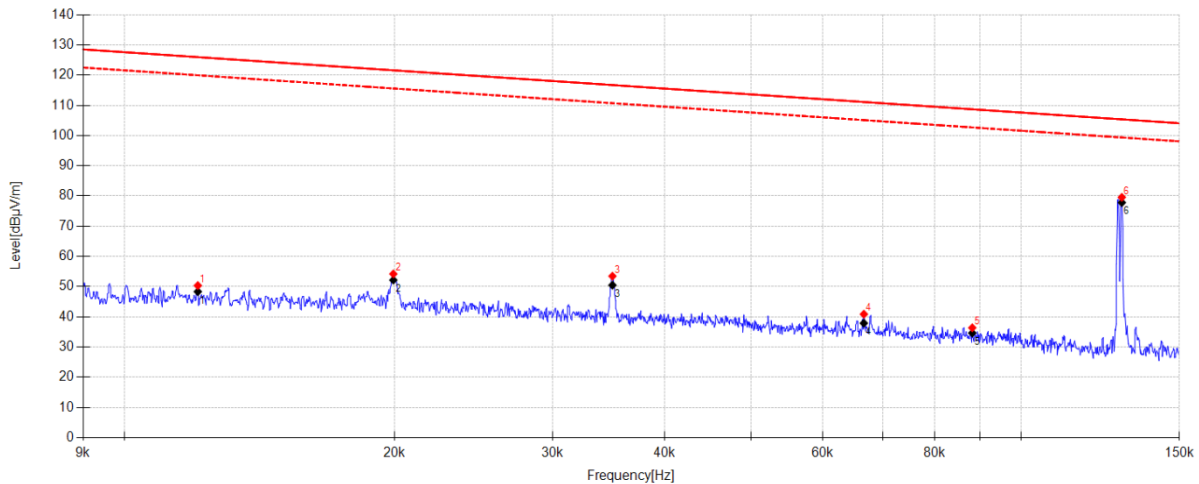
4.6. Test result

PASS. (See below detailed test result)

4.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-09-03 **Tested By:** Zhang Yibo
Test Mode: 5W WPT TX Mode **Power Supply:** Battery
Condition: Temp:22.2°C;Humi:51.6% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26071535-1E\0903 FCC BELOW 1G WPT\20260903-055247_V
Memo: Sample Number:S26071535-034, 111KHz-147KHz



Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	0.012	59.56	20.21	3.07	-32.50	50.34	125.96	75.62	PK	Coaxial
2	0.020	63.28	20.25	3.16	-32.51	54.18	121.60	67.42	PK	Coaxial
3	0.035	62.46	20.27	3.25	-32.53	53.45	116.72	63.27	PK	Coaxial
4	0.067	49.82	20.12	3.48	-32.56	40.86	111.11	70.25	PK	Coaxial
5	0.088	45.10	20.28	3.57	-32.59	36.36	108.69	72.33	PK	Coaxial
6	0.129	88.09	20.40	3.66	-32.60	79.55	105.36	25.81	PK	Coaxial

Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	0.012	57.53	20.21	3.07	48.31	125.94	77.63	QP	Coaxial
2	0.020	61.25	20.25	3.16	52.15	121.62	69.47	QP	Coaxial
3	0.035	59.47	20.27	3.25	50.46	116.72	66.26	QP	Coaxial
4	0.067	46.83	20.12	3.48	37.87	111.12	73.25	QP	Coaxial
5	0.088	43.36	20.28	3.57	34.62	108.69	74.07	QP	Coaxial
6	0.129	86.35	20.40	3.66	77.81	105.36	27.55	QP	Coaxial

Note:1. Level = Reading + Cable Loss + Antenna Factor + AMP

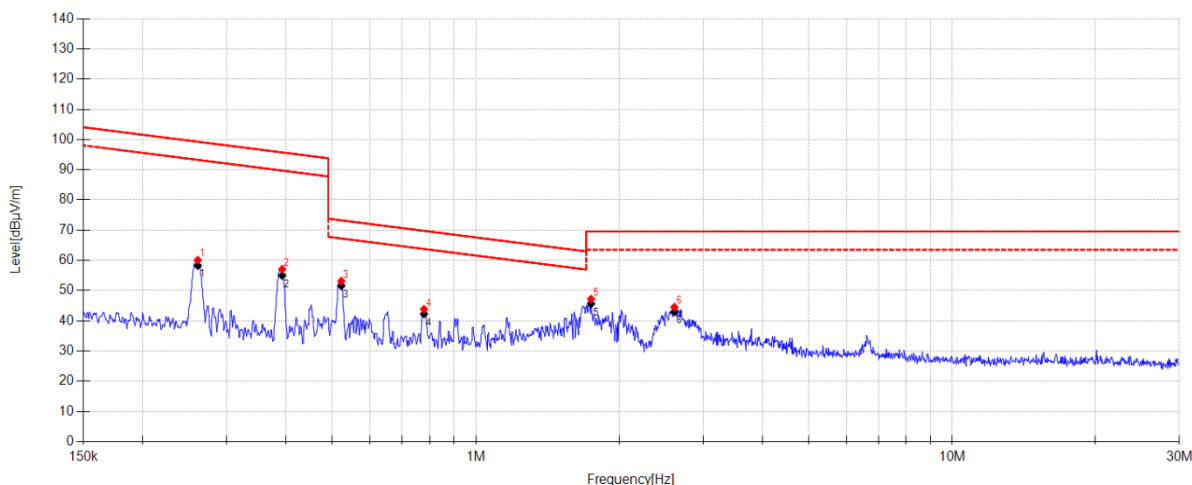
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: 9kHz-150kHz RBW: 300Hz, VBW: 1 kHz, Sweep time: auto.

150kHz-30MHz RBW: 10kHz, VBW: 30kHz, Sweep time: auto.

4. Measured at antenna position coaxial and coplanar, only record the worst case of Coaxial.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-09-03**Tested By:** Zhang Yibo**Test Mode:** 5W WPT TX Mode**Power Supply:** Battery**Condition:** Temp:22.2°C;Humi:51.6%**Test Site:** DDT 3# Chamber**File Path:** d:\ts\2026 report data\Q26071535-1E\0903 FCC BELOW 1G WPT\20260903-055503_V**Memo:** Sample Number:S26071535-034, 111KHz-147KHz

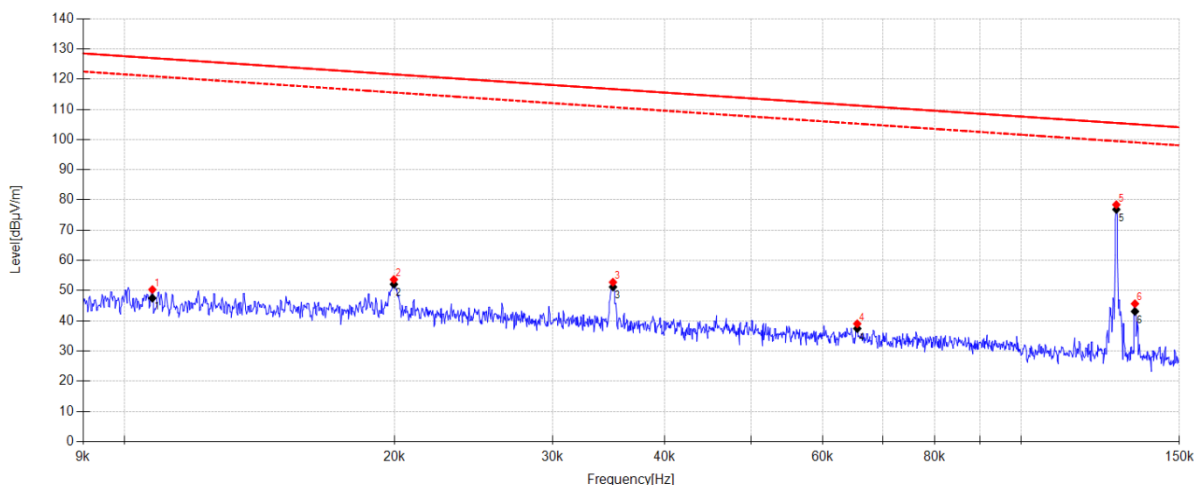
Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	0.261	68.68	20.27	3.76	-32.60	60.11	99.27	39.16	PK	Coaxial
2	0.392	65.70	20.23	3.76	-32.60	57.09	95.73	38.64	PK	Coaxial
3	0.522	61.78	20.20	3.76	-32.60	53.14	73.25	20.11	PK	Coaxial
4	0.779	52.43	20.26	3.75	-32.60	43.84	69.78	25.94	PK	Coaxial
5	1.746	55.80	20.23	3.75	-32.58	47.20	69.54	22.34	PK	Coaxial
6	2.611	53.20	20.14	3.74	-32.55	44.53	69.54	25.01	PK	Coaxial

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	0.261	66.82	20.27	3.76	58.25	99.27	41.02	QP	Coaxial	
2	0.392	63.59	20.23	3.76	54.98	95.73	40.75	QP	Coaxial	
3	0.522	60.21	20.20	3.76	51.57	73.25	21.68	QP	Coaxial	
4	0.779	50.86	20.26	3.75	42.27	69.78	27.51	QP	Coaxial	
5	1.746	54.23	20.23	3.75	45.63	69.54	23.91	QP	Coaxial	
6	2.611	51.63	20.14	3.74	42.96	69.54	26.58	QP	Coaxial	

Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
- Test setup: 9kHz-150kHz RBW: 300Hz, VBW: 1 kHz, Sweep time: auto.
150kHz-30MHz RBW: 10kHz, VBW: 30kHz, Sweep time: auto.
- Measured at antenna position coaxial and coplanar, only record the worst case of Coaxial.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-09-03**Tested By:** Zhang Yibo**Test Mode:** 7.5W WPT TX Mode**Power Supply:** Battery**Condition:** Temp:22.2°C;Humi:51.6%**Test Site:** DDT 3# Chamber**File Path:** d:\ts\2026 report data\Q26071535-1E\0903 FCC BELOW 1G WPT\20260903-055754_V**Memo:** Sample Number:S26071535-034, 111KHz-147KHz

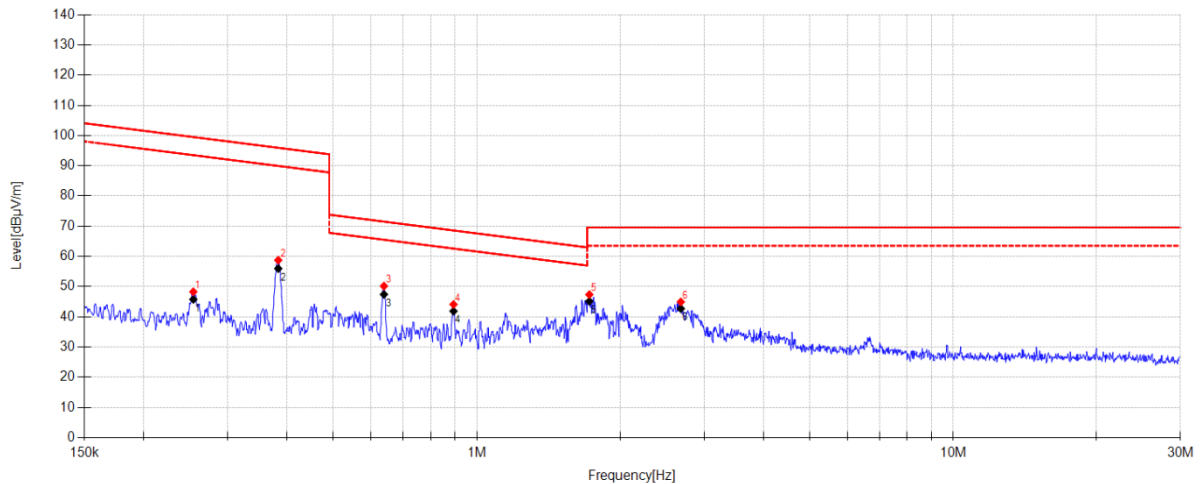
Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	0.011	59.56	20.21	3.06	-32.50	50.33	126.97	76.64	PK	Coaxial
2	0.020	62.76	20.25	3.16	-32.51	53.66	121.59	67.93	PK	Coaxial
3	0.035	61.77	20.27	3.25	-32.53	52.76	116.70	63.94	PK	Coaxial
4	0.066	47.97	20.12	3.47	-32.56	39.00	111.26	72.26	PK	Coaxial
5	0.128	86.96	20.40	3.67	-32.60	78.43	105.48	27.05	PK	Coaxial
6	0.134	54.17	20.38	3.69	-32.60	45.64	105.07	59.43	PK	Coaxial

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	0.011	56.73	20.21	3.06	47.50	127.01	79.51	QP	Coaxial	
2	0.020	61.18	20.25	3.16	52.08	121.58	69.50	QP	Coaxial	
3	0.035	60.19	20.27	3.25	51.18	116.69	65.51	QP	Coaxial	
4	0.066	46.39	20.12	3.47	37.42	111.26	73.84	QP	Coaxial	
5	0.128	85.38	20.40	3.67	76.85	105.48	28.63	QP	Coaxial	
6	0.134	51.63	20.38	3.69	43.10	105.07	61.97	QP	Coaxial	

Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
- Test setup: 9kHz-150kHz RBW: 300Hz, VBW: 1 kHz, Sweep time: auto.
150kHz-30MHz RBW: 10kHz, VBW: 30kHz, Sweep time: auto.
- Measured at antenna position coaxial and coplanar, only record the worst case of Coaxial.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-09-03**Tested By:** Zhang Yibo**Test Mode:** 7.5W WPT TX Mode**Power Supply:** Battery**Condition:** Temp:22.2°C;Humi:51.6%**Test Site:** DDT 3# Chamber**File Path:** d:\ts\2026 report data\Q26071535-1E\0903 FCC BELOW 1G WPT\20260903-055859_V**Memo:** Sample Number:S26071535-034, 111KHz-147KHz

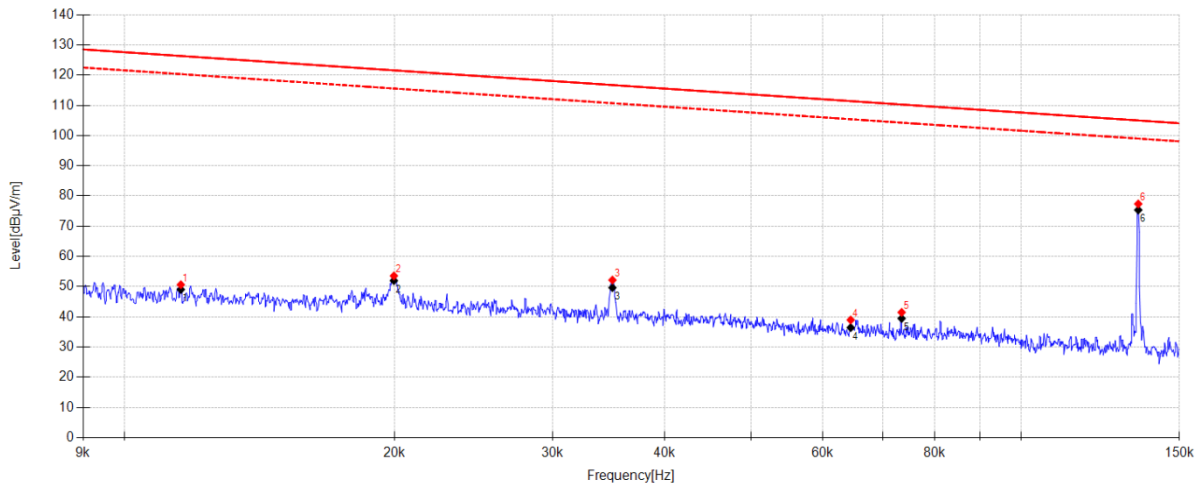
Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	0.254	56.84	20.27	3.76	-32.60	48.27	99.50	51.23	PK	Coaxial
2	0.383	67.34	20.23	3.76	-32.60	58.73	95.94	37.21	PK	Coaxial
3	0.638	58.78	20.23	3.76	-32.60	50.17	71.50	21.33	PK	Coaxial
4	0.894	52.66	20.28	3.75	-32.60	44.09	68.58	24.49	PK	Coaxial
5	1.723	55.95	20.23	3.75	-32.58	47.35	69.54	22.19	PK	Coaxial
6	2.681	53.60	20.13	3.74	-32.54	44.93	69.54	24.61	PK	Coaxial

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	0.254	54.32	20.27	3.76	45.75	99.50	53.75	QP	Coaxial	
2	0.383	64.57	20.23	3.76	55.96	95.94	39.98	QP	Coaxial	
3	0.638	56.01	20.23	3.76	47.40	71.50	24.10	QP	Coaxial	
4	0.894	50.43	20.28	3.75	41.86	68.58	26.72	QP	Coaxial	
5	1.723	53.72	20.23	3.75	45.12	69.54	24.42	QP	Coaxial	
6	2.681	51.37	20.13	3.74	42.70	69.54	26.84	QP	Coaxial	

Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
- Test setup: 9kHz-150kHz RBW: 300Hz, VBW: 1 kHz, Sweep time: auto.
150kHz-30MHz RBW: 10kHz, VBW: 30kHz, Sweep time: auto.
- Measured at antenna position coaxial and coplanar, only record the worst case of Coaxial.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-09-03**Tested By:** Zhang Yibo**Test Mode:** 15W WPT TX Mode**Power Supply:** Battery**Condition:** Temp:22.2°C;Humi:51.6%**Test Site:** DDT 3# Chamber**File Path:** d:\ts\2026 report data\Q26071535-1E\0903 FCC BELOW 1G WPT\20260903-054035_V**Memo:** Sample Number:S26071535-034, 111KHz-147KHz

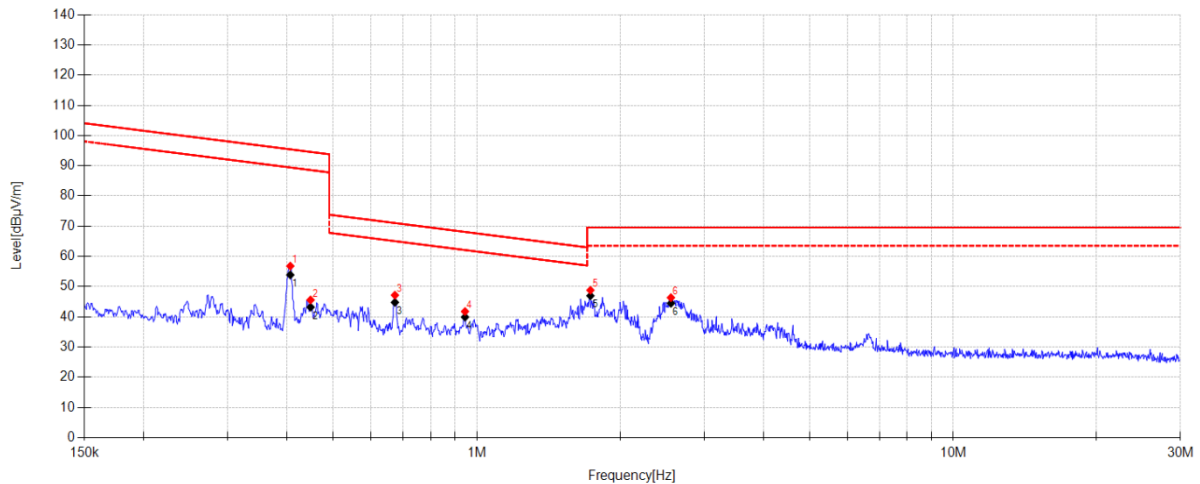
Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	0.012	59.83	20.21	3.07	-32.50	50.61	126.34	75.73	PK	Coaxial
2	0.020	62.64	20.25	3.16	-32.51	53.54	121.59	68.05	PK	Coaxial
3	0.035	61.17	20.27	3.25	-32.53	52.16	116.72	64.56	PK	Coaxial
4	0.065	47.91	20.13	3.46	-32.56	38.94	111.40	72.46	PK	Coaxial
5	0.074	50.38	20.14	3.51	-32.57	41.46	110.27	68.81	PK	Coaxial
6	0.135	85.88	20.38	3.70	-32.60	77.36	105.00	27.64	PK	Coaxial

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	0.012	58.25	20.21	3.07	49.03	126.31	77.28	QP	Coaxial	
2	0.020	61.06	20.25	3.16	51.96	121.58	69.62	QP	Coaxial	
3	0.035	58.63	20.27	3.25	49.62	116.72	67.10	QP	Coaxial	
4	0.065	45.37	20.13	3.46	36.40	111.41	75.01	QP	Coaxial	
5	0.074	48.37	20.14	3.51	39.45	110.27	70.82	QP	Coaxial	
6	0.135	83.87	20.38	3.70	75.35	104.99	29.64	QP	Coaxial	

Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: 9kHz-150kHz RBW: 300Hz, VBW: 1 kHz, Sweep time: auto.
150kHz-30MHz RBW: 10kHz, VBW: 30kHz, Sweep time: auto.
4. Measured at antenna position coaxial and coplanar, only record the worst case of Coaxial.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-09-03**Tested By:** Zhang Yibo**Test Mode:** 15W WPT TX Mode**Power Supply:** Battery**Condition:** Temp:22.2°C;Humi:51.6%**Test Site:** DDT 3# Chamber**File Path:** d:\ts\2026 report data\Q26071535-1E\0903 FCC BELOW 1G WPT\20260903-054255_V**Memo:** Sample Number:S26071535-034, 111KHz-147KHz

Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	0.406	65.40	20.23	3.76	-32.60	56.79	95.43	38.64	PK	Coaxial
2	0.448	54.20	20.21	3.76	-32.60	45.57	94.58	49.01	PK	Coaxial
3	0.673	55.76	20.23	3.76	-32.60	47.15	71.04	23.89	PK	Coaxial
4	0.945	50.32	20.29	3.75	-32.60	41.76	68.10	26.34	PK	Coaxial
5	1.732	57.40	20.23	3.75	-32.58	48.80	69.54	20.74	PK	Coaxial
6	2.557	55.00	20.14	3.74	-32.55	46.33	69.54	23.21	PK	Coaxial

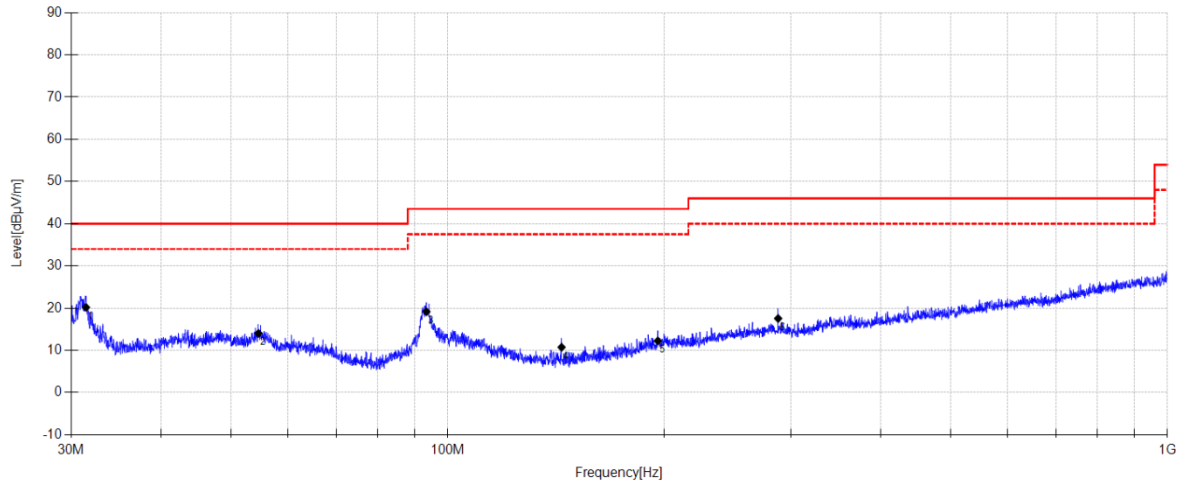
Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	0.406	62.47	20.23	3.76	53.86	95.44	41.58	QP	Coaxial	
2	0.448	51.81	20.21	3.76	43.18	94.58	51.40	QP	Coaxial	
3	0.673	53.37	20.23	3.76	44.76	71.04	26.28	QP	Coaxial	
4	0.945	48.47	20.29	3.75	39.91	68.10	28.19	QP	Coaxial	
5	1.732	55.55	20.23	3.75	46.95	69.54	22.59	QP	Coaxial	
6	2.557	53.15	20.14	3.74	44.48	69.54	25.06	QP	Coaxial	

Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: 9kHz-150kHz RBW: 300Hz, VBW: 1 kHz, Sweep time: auto.
150kHz-30MHz RBW: 10kHz, VBW: 30kHz, Sweep time: auto.
4. Measured at antenna position coaxial and coplanar, only record the worst case of Coaxial.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-09-03 **Tested By:** Zhang Yibo
Test Mode: 5W WPT TX Mode **Power Supply:** Battery
Condition: Temp:22.2°C;Humi:51.6% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26071535-1E\0903 FCC BELOW 1G WPT\3
Memo: Sample Number:S26071535-034, 111KHz-147KHz

**Final Data List**

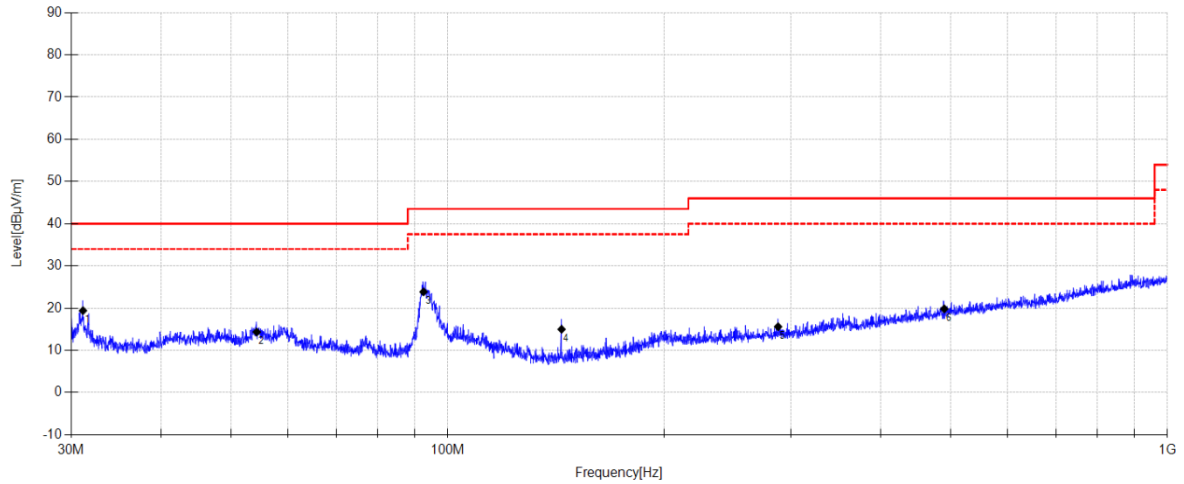
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31.443	38.1	10.59	3.80	20.19	40.00	19.81	QP	Horizontal
2	54.598	28.99	13.32	4.02	14.03	40.00	25.97	QP	Horizontal
3	93.419	36.72	10.47	4.27	19.16	43.50	24.34	QP	Horizontal
4	143.986	30.82	7.70	4.56	10.74	43.50	32.76	QP	Horizontal
5	195.886	28.99	10.79	4.86	12.24	43.50	31.26	QP	Horizontal
6	287.860	31.57	13.16	5.23	17.56	46.00	28.44	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-09-03 **Tested By:** Zhang Yibo
Test Mode: 5W WPT TX Mode **Power Supply:** Battery
Condition: Temp:22.2°C;Humi:51.6% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26071535-1E\0903 FCC BELOW 1G WPT4
Memo: Sample Number:S26071535-034, 111KHz-147KHz

**Final Data List**

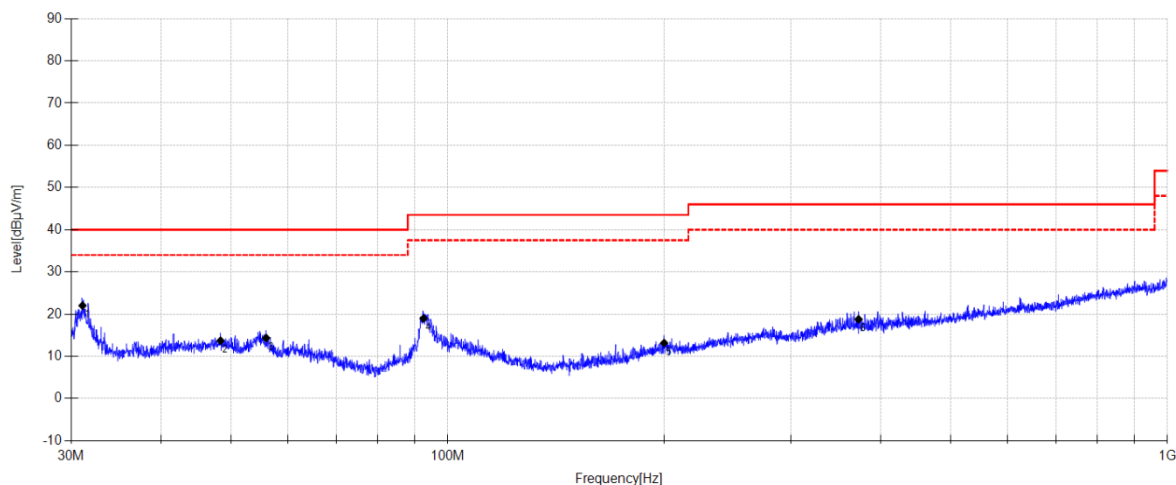
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31.136	37.38	10.53	3.80	19.41	40.00	20.59	QP	Vertical
2	54.293	29.23	13.41	4.01	14.35	40.00	25.65	QP	Vertical
3	92.571	41.56	10.34	4.26	23.86	43.50	19.64	QP	Vertical
4	143.986	35.07	7.70	4.56	14.99	43.50	28.51	QP	Vertical
5	287.860	29.61	13.16	5.23	15.60	46.00	30.40	QP	Vertical
6	489.783	29.81	16.60	6.01	19.83	46.00	26.17	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-09-03 **Tested By:** Zhang Yibo
Test Mode: 7.5W WPT TX Mode **Power Supply:** Battery
Condition: Temp:22.2°C;Humi:51.6% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26071535-1E\0903 FCC BELOW 1G WPT\1
Memo: Sample Number:S26071535-034, 111KHz-147KHz

**Final Data List**

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31.092	40.01	10.52	3.80	22.03	40.00	17.97	QP	Horizontal
2	48.361	28.17	13.86	3.97	13.70	40.00	26.30	QP	Horizontal
3	55.954	29.71	12.91	4.03	14.35	40.00	25.65	QP	Horizontal
4	92.571	36.68	10.34	4.26	18.98	43.50	24.52	QP	Horizontal
5	199.910	29.49	11.19	4.88	13.16	43.50	30.34	QP	Horizontal
6	372.339	31.03	14.64	5.59	18.79	46.00	27.21	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-09-03

Tested By:

Zhang Yibo

Test Mode:

7.5W WPT TX Mode

Power Supply:

Battery

Condition:

Temp:22.2°C;Humi:51.6%

Test Site:

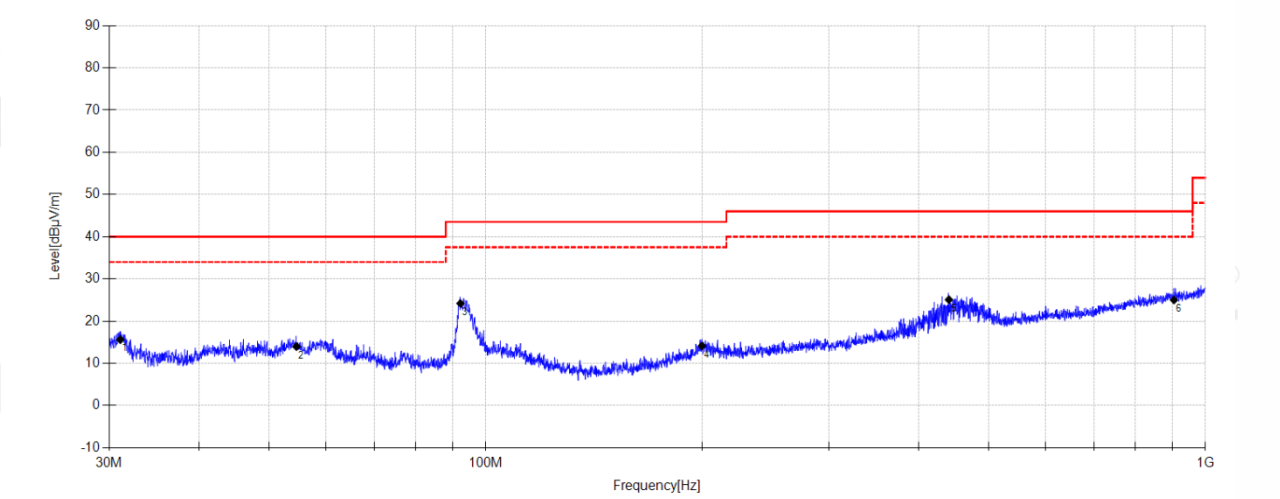
DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26071535-1E\0903 FCC BELOW 1G WPT\2

Memo:

Sample Number:S26071535-034, 111KHz-147KHz



Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31.070	33.62	10.51	3.79	15.62	40.00	24.38	QP	Vertical
2	54.598	28.94	13.32	4.02	13.98	40.00	26.02	QP	Vertical
3	92.247	41.86	10.38	4.26	24.20	43.50	19.30	QP	Vertical
4	199.770	30.48	11.18	4.88	14.14	43.50	29.36	QP	Vertical
5	440.269	35.88	15.91	5.84	25.09	46.00	20.91	QP	Vertical
6	904.595	27.95	21.82	7.12	25.02	46.00	20.98	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-09-03

Tested By:

Zhang Yibo

Test Mode:

15W WPT TX Mode

Power Supply:

Battery

Condition:

Temp:22.2°C;Humi:51.6%

Test Site:

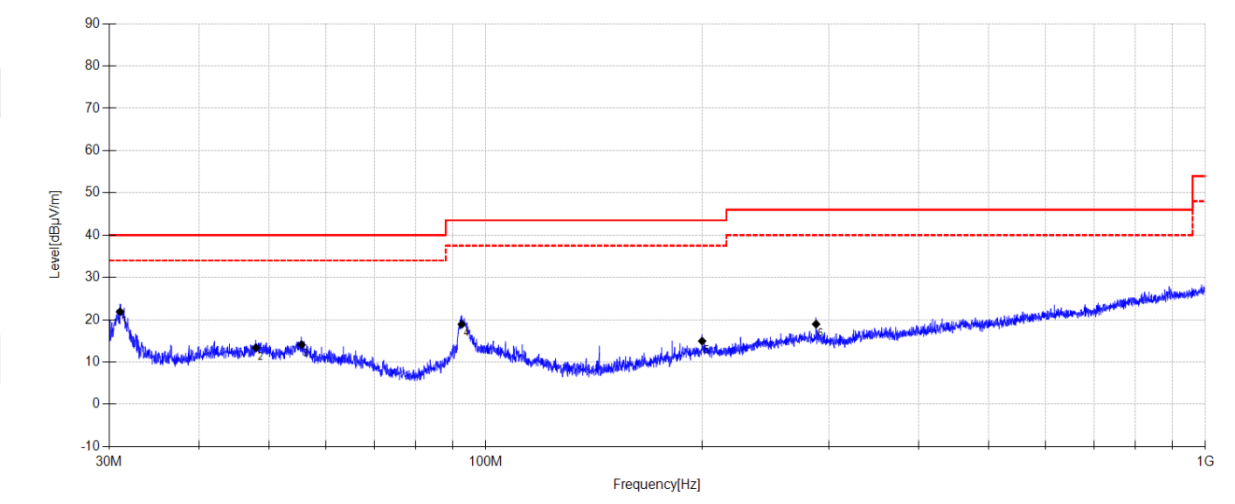
DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26071535-1E\0903 FCC BELOW 1G WPT\5

Memo:

Sample Number:S26071535-034, 111KHz-147KHz



Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31.049	39.88	10.51	3.79	21.88	40.00	18.12	QP	Horizontal
2	47.956	27.8	13.89	3.97	13.36	40.00	26.64	QP	Horizontal
3	55.486	29.33	13.05	4.02	14.10	40.00	25.90	QP	Horizontal
4	92.636	36.61	10.34	4.26	18.91	43.50	24.59	QP	Horizontal
5	199.910	31.28	11.19	4.88	14.95	43.50	28.55	QP	Horizontal
6	287.860	32.97	13.16	5.23	18.96	46.00	27.04	QP	Horizontal

Note:

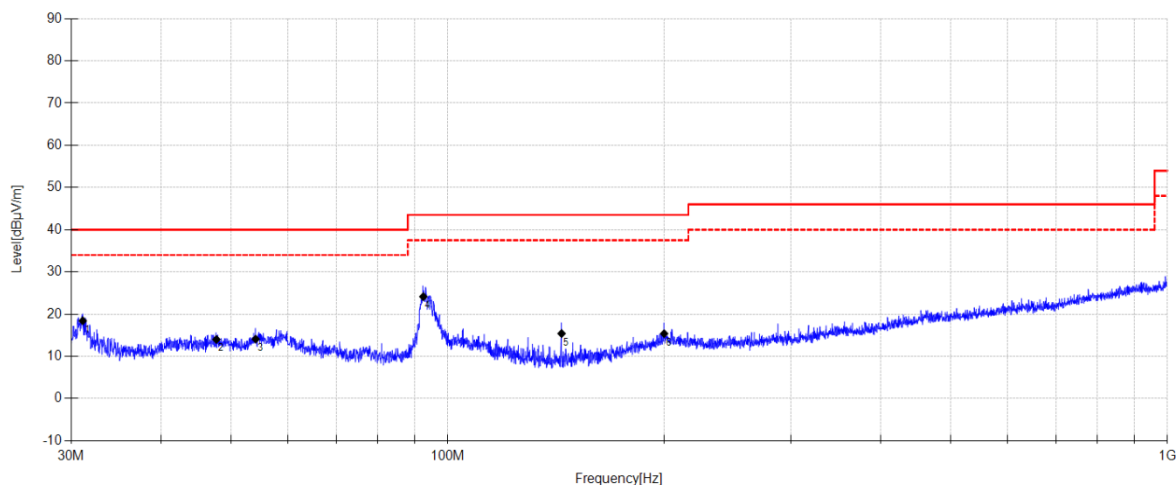
1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-09-03 **Tested By:** Zhang Yibo
Test Mode: 15W WPT TX Mode **Power Supply:** Battery
Condition: Temp:22.2°C;Humi:51.6% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26071535-1E\0903 FCC BELOW 1G WPT\6
Memo: Sample Number:S26071535-034, 111KHz-147KHz

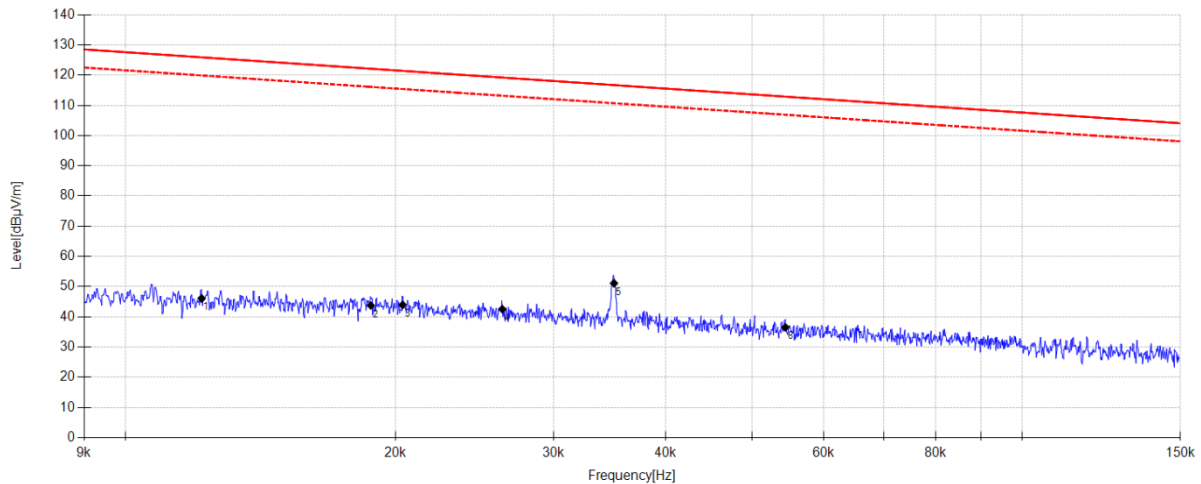
**Final Data List**

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31.114	36.41	10.52	3.80	18.43	40.00	21.57	QP	Vertical
2	47.721	28.5	13.84	3.97	14.01	40.00	25.99	QP	Vertical
3	54.103	28.91	13.47	4.01	14.09	40.00	25.91	QP	Vertical
4	92.506	41.83	10.35	4.26	24.14	43.50	19.36	QP	Vertical
5	143.986	35.48	7.70	4.56	15.40	43.50	28.10	QP	Vertical
6	199.910	31.71	11.19	4.88	15.38	43.50	28.12	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

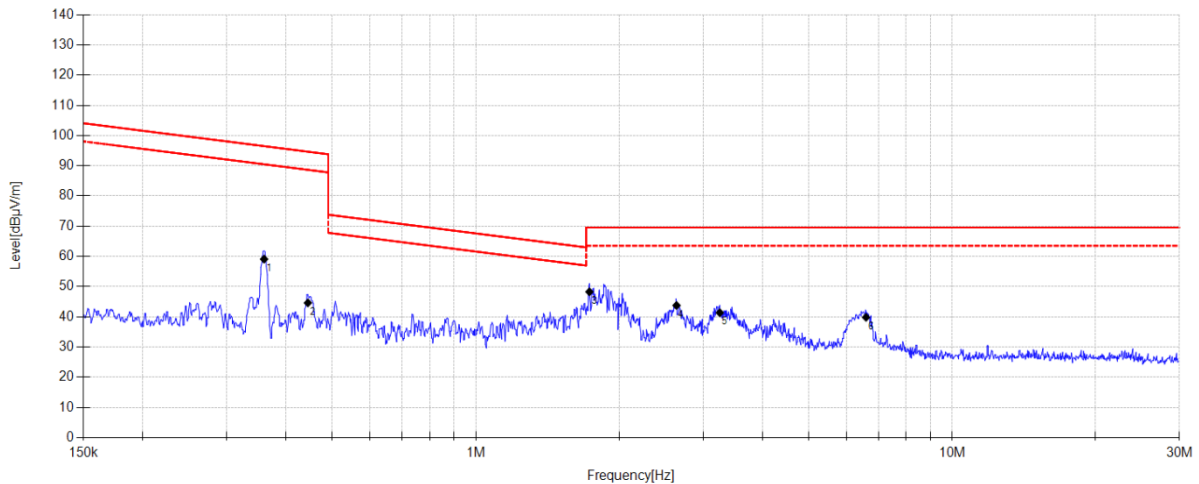
Test Date: 2026-09-12**Tested By:** Zhang Yibo**Test Mode:** WPT TX Mode**Power Supply:** Battery**Condition:** Temp:19.5°C;Humi:44.1%**Test Site:** DDT 3# Chamber**File Path:** d:\ts\2026 report data\Q26071535-1E\0912 FCC BELOW 1G WPT\20260912-024517_V**Memo:** Sample Number:S26071535-009

Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	0.012	55.3	20.22	3.07	46.09	125.87	79.78	QP	Coaxial
2	0.019	52.88	20.25	3.15	43.77	122.11	78.34	QP	Coaxial
3	0.020	53.03	20.25	3.16	43.93	121.40	77.47	QP	Coaxial
4	0.026	51.56	20.28	3.19	42.51	119.20	76.69	QP	Coaxial
5	0.035	60.1	20.27	3.25	51.09	116.69	65.60	QP	Coaxial
6	0.054	45.46	20.18	3.39	36.48	112.89	76.41	QP	Coaxial

Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: 9kHz-150kHz RBW: 300Hz, VBW: 1 kHz, Sweep time: auto.
150kHz-30MHz RBW: 10kHz, VBW: 30kHz, Sweep time: auto.
4. Measured at antenna position coaxial and coplanar, only record the worst case of Coaxial.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-09-12**Tested By:** Zhang Yibo**Test Mode:** WPT TX Mode**Power Supply:** Battery**Condition:** Temp:19.5°C;Humi:44.1%**Test Site:** DDT 3# Chamber**File Path:** d:\ts\2026 report data\Q26071535-1E\0912 FCC BELOW 1G WPT\20260912-024835_V**Memo:** Sample Number:S26071535-009

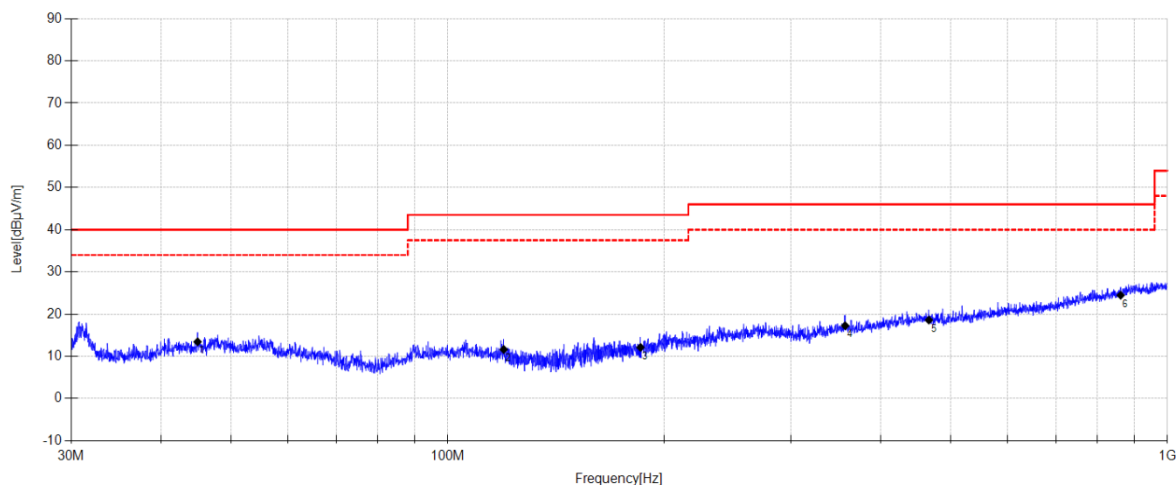
Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	0.359	67.68	20.24	3.76	59.08	96.49	37.41	QP	Coaxial
2	0.444	53.23	20.22	3.76	44.61	94.65	50.04	QP	Coaxial
3	1.732	56.87	20.23	3.75	48.27	69.54	21.27	QP	Coaxial
4	2.639	52.43	20.14	3.74	43.76	69.54	25.78	QP	Coaxial
5	3.253	50.01	20.13	3.73	41.35	69.54	28.19	QP	Coaxial
6	6.597	48.55	19.98	3.70	39.82	69.54	29.72	QP	Coaxial

Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: 9kHz-150kHz RBW: 300Hz, VBW: 1 kHz, Sweep time: auto.
150kHz-30MHz RBW: 10kHz, VBW: 30kHz, Sweep time: auto.
4. Measured at antenna position coaxial and coplanar, only record the worst case of Coaxial.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-21 **Tested By:** Zhang Yibo
Test Mode: WPT 25W TX Mode **Power Supply:** Battery
Condition: Temp:20.1°C;Humi:51.0% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26071535-1E\0821 FCC BELOW 1G\1
Memo: Sample Number:S26071535-034, 360KHz

**Final Data List**

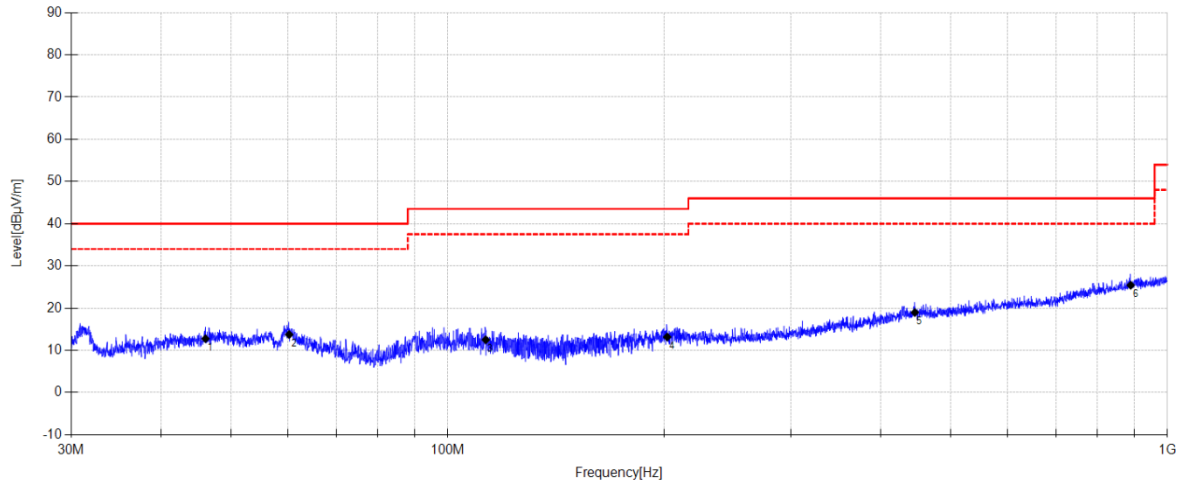
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	44.928	28.09	13.71	3.95	13.45	40.00	26.55	QP	Horizontal
2	119.655	29.75	9.80	4.41	11.64	43.50	31.86	QP	Horizontal
3	185.330	30.02	9.70	4.79	12.12	43.50	31.38	QP	Horizontal
4	356.749	29.32	14.87	5.52	17.25	46.00	28.75	QP	Horizontal
5	466.324	28.97	16.27	5.93	18.60	46.00	27.40	QP	Horizontal
6	861.268	28.13	21.43	7.04	24.47	46.00	21.53	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-21 **Tested By:** Zhang Yibo
Test Mode: WPT 25W TX Mode **Power Supply:** Battery
Condition: Temp:20.1°C;Humi:51.0% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26071535-1E\0821 FCC BELOW 1G\2
Memo: Sample Number:S26071535-034, 360KHz

**Final Data List**

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	46.077	27.31	13.79	3.96	12.76	40.00	27.24	QP	Vertical
2	60.229	29.83	12.15	4.06	13.74	40.00	26.26	QP	Vertical
3	112.969	29.53	10.90	4.38	12.50	43.50	31.00	QP	Vertical
4	201.882	29.56	11.12	4.89	13.17	43.50	30.33	QP	Vertical
5	445.860	29.64	16.02	5.86	18.97	46.00	27.03	QP	Vertical
6	889.500	28.52	21.78	7.09	25.43	46.00	20.57	QP	Vertical

Note:

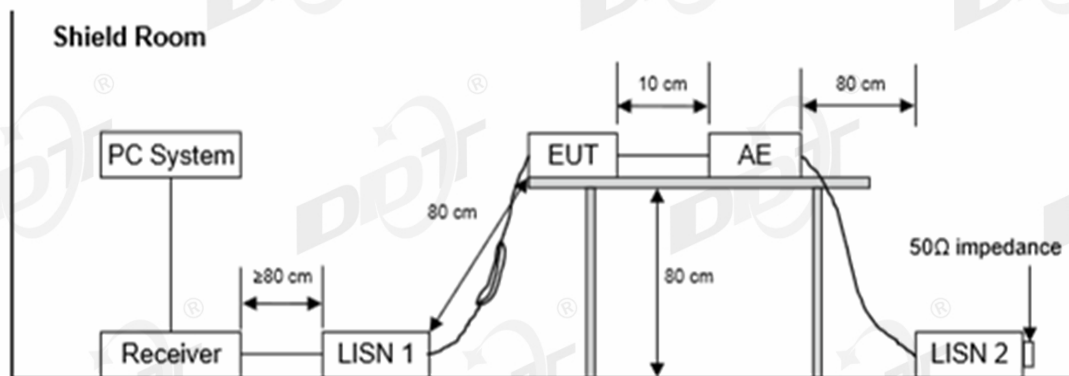
1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

5. Power Line Conducted Emissions

5.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2027/02/27
RF cable	Zhongke Junchuang	Z805UF-NJ-NJ-10M	DDT-ZC05591	2026/10/10
RF cable	Zhongke Junchuang	Z805UF-NJ-NJ-3M	DDT-ZC05590	2026/10/10
RF cable	Zhongke Junchuang	JCTB510-NJW-NJW-0.6M	DDT-ZC04595	2026/10/10
RF cable	Zhongke Junchuang	JCT40P-2.92J-2.92J-1M	DDT-ZC03802	2026/10/10
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2026/10/10
RF cable	Zhongke Junchuang	JCT40P-2.92J-2.92J-5M	DDT-ZC03800	2026/10/10
Radiation disturbance fully automated test software	Tonscend	JS32-RE (V5.0.0)	DDT-ZC02739	/
Pre-amplifier	SONOMA	310N	DDT-ZC01969	2027/06/25
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2027/03/05
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2027/07/08
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2027/02/27
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2027/02/27
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2027/02/27
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2027/07/10
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC02129	2027/07/10
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2027/07/10
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2027/02/27

5.2. Block diagram of test setup



5.3. Limits

Frequency	Quasi-Peak Level dB(mV)	Average Level dB(mV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

5.4. Assistant equipment used for test

Accessories	Manufacturer	Model number	Description
Dummy load	N/A	N/A	N/A
Phone	Apple	Iphone 15pro	N/A

5.5. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

5.6. Test result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “----” means Peak detection; “----” means Average detection.

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded the worst case.

5.7. Test data

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2026 CE Report Data\Q26071535-1E\0723 CE.EM6

Test Date : 2026-07-28

Tested By : Li Xiongbín

Power Supply : AC 120V/60Hz

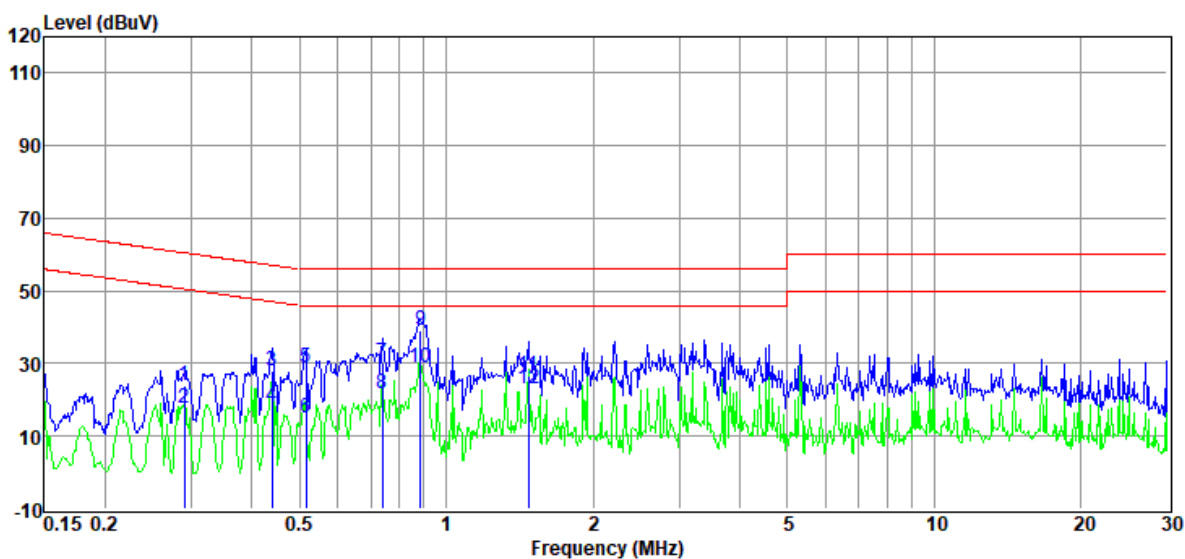
Test Mode : WPT TX Mode

Condition : TEMP:21.8°C, RH:57.4%

LISN : 2026 1# ENV 216/NEUTRAL

Memo : S26071535-010

Data: 26



Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.29	4.33	9.59	0.00	9.87	23.79	60.50	36.71	QP	NEUTRAL
2	0.29	-1.65	9.59	0.00	9.87	17.81	50.50	32.69	Average	NEUTRAL
3	0.44	8.31	9.58	0.00	9.87	27.76	57.07	29.31	QP	NEUTRAL
4	0.44	-1.32	9.58	0.00	9.87	18.13	47.07	28.94	Average	NEUTRAL
5	0.52	9.25	9.59	0.00	9.87	28.71	56.00	27.29	QP	NEUTRAL
6	0.52	-4.27	9.59	0.00	9.87	15.19	46.00	30.81	Average	NEUTRAL
7	0.74	10.84	9.59	0.01	9.87	30.31	56.00	25.69	QP	NEUTRAL
8	0.74	2.33	9.59	0.01	9.87	21.80	46.00	24.20	Average	NEUTRAL
9	0.88	19.65	9.60	0.01	9.87	39.13	56.00	16.87	QP	NEUTRAL
10	0.88	9.56	9.60	0.01	9.87	29.04	46.00	16.96	Average	NEUTRAL
11	1.47	7.29	9.60	0.01	9.87	26.77	56.00	29.23	QP	NEUTRAL
12	1.47	3.36	9.60	0.01	9.87	22.84	46.00	23.16	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2026 CE Report Data\Q26071535-1E\0723 CE.EM6

Test Date : 2026-07-28

Tested By : Li Xiongbín

Power Supply : AC 120V/60Hz

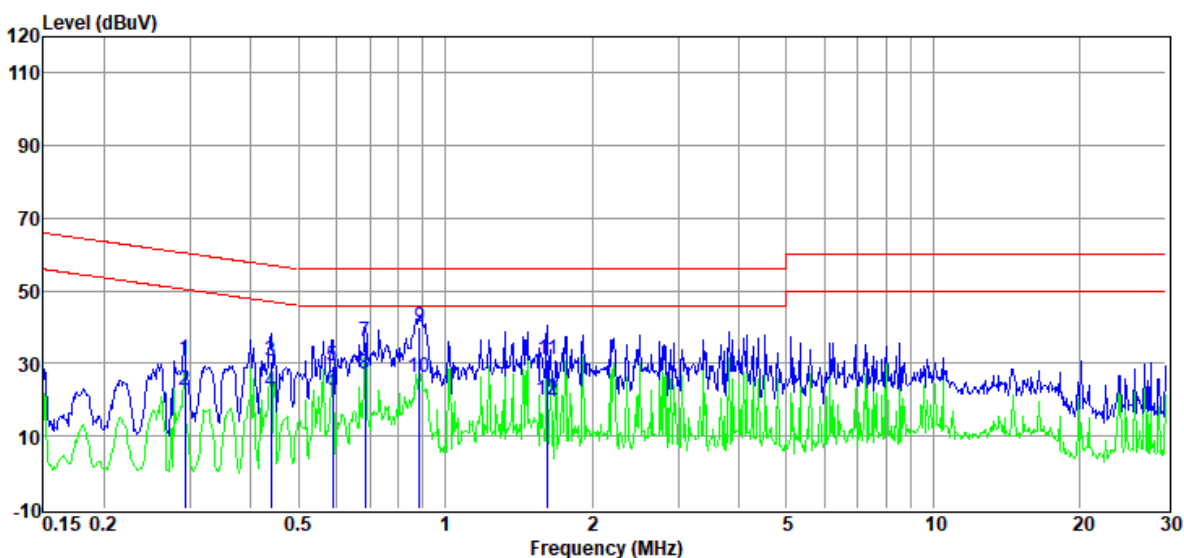
Test Mode : WPT TX Mode

Condition : TEMP:21.8°C, RH:57.4%

LISN : 2026 1# ENV 216/LINE

Memo : S26071535-010

Data: 28



Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Margin (dB)	Detector	Phase
1	0.29	11.72	9.57	0.00	9.87	31.16	60.46	29.30	QP	LINE
2	0.29	3.20	9.57	0.00	9.87	22.64	50.46	27.82	Average	LINE
3	0.44	11.28	9.57	0.00	9.87	30.72	57.07	26.35	QP	LINE
4	0.44	2.69	9.57	0.00	9.87	22.13	47.07	24.94	Average	LINE
5	0.59	9.99	9.58	0.00	9.87	29.44	56.00	26.56	QP	LINE
6	0.59	2.97	9.58	0.00	9.87	22.42	46.00	23.58	Average	LINE
7	0.69	16.74	9.58	0.01	9.87	36.20	56.00	19.80	QP	LINE
8	0.69	7.66	9.58	0.01	9.87	27.12	46.00	18.88	Average	LINE
9	0.88	20.43	9.59	0.01	9.87	39.90	56.00	16.10	QP	LINE
10	0.88	6.93	9.59	0.01	9.87	26.40	46.00	19.60	Average	LINE
11	1.62	11.48	9.60	0.01	9.87	30.96	56.00	25.04	QP	LINE
12	1.62	0.43	9.60	0.01	9.87	19.91	46.00	26.09	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

7. Photos of the EUT

Please refer to DDT-Q26071535-1E appendix I

-----End Report-----