

INSTRUCTION

Please read the instruction carefully and keep it properly.

For user manual, add following comment

This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC caution:

This equipment complies with FCC's (IC'S) RF radiation exposure limits set forth for an uncontrolled environment. The antenna(s) used for this transmitter must be installed and operated to provide a separation distance of at least 20 cm from all persons and must not be collocated or operating in conjunction with any other antenna or transmitter. Installers must ensure that 20cm separation distance will be maintained between the device (excluding its handset) and users.

FCC Statement:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following.

measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

PRODUCT FUNCTION

This combination rectangular tail light integrates the tail light, stop light, turning light, reverse light, warning light, and license plate light. It is typically used on the rear of RVs, trucks, trailers, tow trucks, construction vehicles, and other specialized vehicles.



SPECIFICATION

Lamp Function	Power Consumption	LED Color
Tail Light	1.6W	●
Stop Light	3.2W	●
Turning Light	3.2W	●
Reverse	1.6W	●
Warning Light	3.2W	●
License Plate Light	0.5W	○

Charging interface: Type-C

Electric core: Single section 21700 lithium ion


Capacity: 3.7V 5000mAh

Input Voltage: 5V

Charging time: About 4H

Discharging time: Tail Light: 11H; Reverse: 5H;
Turning Light/Stop Light: 11H; Warning Light: 9.5H



DIMENSION

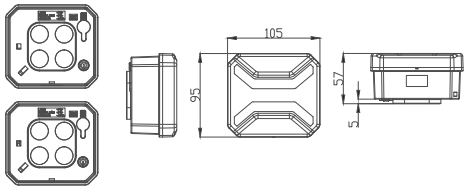

CONTENTS



CHARGING

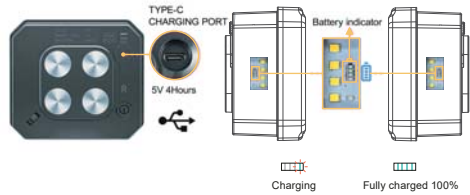


TURN ON:


1. Short press the power button.
2. The power indicator will light up, confirming the device is on.
3. The battery indicator will also light up briefly and automatically turn off after 35 seconds.

TURN OFF:

1. Short press the power button. This turns off the main lights and the power indicator.
2. The battery indicator light will automatically turn off after approximately 35 seconds. (Optional) Doublepress the power button within 1 second to turn off the lamp immediately

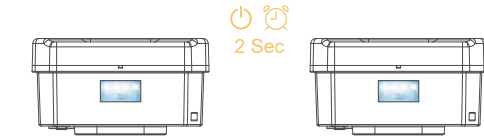


LICENSE PLATE LIGHT : Long press for two seconds to turn on the license plate light separately
Long press for two seconds again to turn off the license plate light.

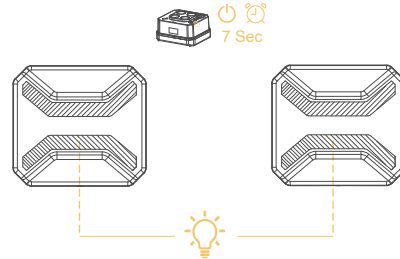

WARNING LIGHT : **Turn on the warning light:** Press and hold for 7 seconds until the Tail light illuminates then release the button to turn on the warning light.
Turn off the warning light: Press and hold for 7 seconds until the Tail light illuminates then release the button to turn off the warning light.

PAIRING

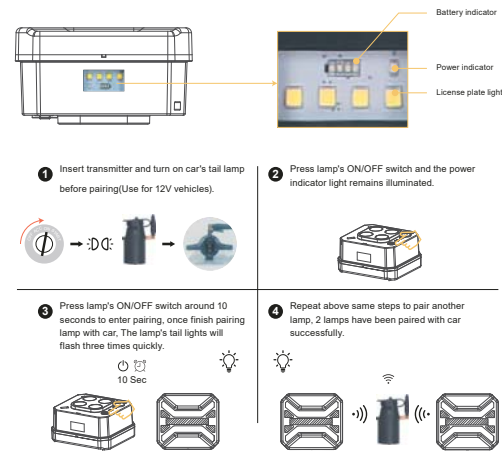

CAUTION

1. Fully charge battery before use.
2. Check the battery life before use.
3. Check light if working correctly before use.
4. Charge the battery every 3 months if not in use.
5. Check light regularly when use for long hours.



INSTALLATION

Installation Method: Magnetic Fixation

- (1) Remove the protective film from the magnet.
- (2) Choose a suitable installation location.
- (3) Thoroughly clean the installation surface to ensure it is free of dust and oil for a secure attachment.
- (4) Attach the light to the installation surface (left light on the left side-marked with an "L" on the back, right light on the right side-marked with an "R" on the back), and check to ensure it is securely installed.



Protective Measure: Steel Wire Rope

- (1) Preparation: The car light has a dedicated hole for securing the steel.
- (2) Wire rope.
Threading the Wire: Thread the steel wire rope through the designated hole on the back of the car light and loop it around.
- (3) Securing the Light: Pass the steel wire rope through the desired mounting location, securely fasten the car light, preventing accidental dislodging during driving.



MAINTENANCE

Before use, please check if the trailer light is damaged or loose and keep it clean and dry. Do not stack any items or apply any liquids on the trailer light. If there is dust, please use a soft brush or air gun for cleaning. If the trailer light cannot work properly, please contact after-sales service.