

TEST REPORT

Applicant: NOTHING TECHNOLOGY LIMITED
Address: Bedford House, 21A John Street, London, United Kingdom WC1N 2BF
Equipment Type: Wireless Headphone
Model Name: B192
Brand Name: NOTHING
FCC ID: 2AZEQ-B192
ISED Number: 27102-B192
47 CFR Part 15 Subpart B
Test Standard: ICES-003 (Issue 7, October 15, 2020)
ANSI C63.4-2014
Sample Arrival Date: Jul. 06, 2026
Test Date: Jul. 08, 2026 - Jul. 10, 2026
Date of Issue: Jul 27, 2026

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

**Tested by:** Liu Chenfang**Checked by:** Xiong Chong**Approved by:** Tolan Tu

(Testing Director)

*Liu Chenfang**Xiong Chong**Tolan Tu*

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Jul. 27, 2026</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1 GENERAL INFORMATION	3
1.1 Test Laboratory	3
1.2 Test Location.....	3
2 PRODUCT INFORMATION	4
2.1 Applicant Information.....	4
2.2 Manufacturer Information	4
2.3 General Description for Equipment under Test (EUT).....	4
2.4 Ancillary Equipment.....	4
2.5 Technical Information	5
3 SUMMARY OF TEST RESULTS	6
3.1 Test Standards.....	6
3.2 Verdict.....	6
3.3 Test Uncertainty	6
4 GENERAL TEST CONFIGURATIONS.....	7
4.1 Test Enclosure List.....	7
4.2 Test Configurations	7
4.3 Test Setups.....	8
5 TEST ITEMS.....	10
5.1 Emission Tests.....	10
ANNEX A TEST RESULTS.....	15
A.1 Radiated Emission	15
A.2 Conducted Emission, AC Ports	24
ANNEX B TEST SETUP PHOTOS	27
ANNEX C EUT EXTERNAL PHOTOS	27
ANNEX D EUT INTERNAL PHOTOS	27

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	601, Building 2, Intelligent Connected Vehicle Industrial Park, No.55, Xiangshan Road, Luotian Community, Yanluo Sub-district, Bao'an District, Shenzhen
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Building 2, Intelligent Connected Vehicle Industrial Park, No.55, Xiangshan Road, Luotian Community, Yanluo Sub-district, Bao'an District, Shenzhen, Guangdong
	☐ 1/F., Building B, Ganghongji High-Tech Intelligent Industrial Park, No.1008, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The CAB identifier number is CN0030. The certification body is American Association for Laboratory Accreditation (A2LA).

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	NOTHING TECHNOLOGY LIMITED
Address	Bedford House, 21A John Street, London, United Kingdom WC1N 2BF

2.2 Manufacturer Information

Manufacturer	NOTHING TECHNOLOGY LIMITED
Address	Bedford House, 21A John Street, London, United Kingdom WC1N 2BF

2.3 General Description for Equipment under Test (EUT)

EUT Name	Wireless Headphone
Model Name Under Test	B192
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	V3.0
Software Version	V1.0.1.29
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	N/A
	Model No.	721255PN4
	Serial No.	N/A
	Capacitance	530mAh
	Rated Voltage	3.85 V
	Limited Voltage	N/A
Ancillary Equipment 2	Type-C Cable	
	Length (Approx.)	1.2 m
Ancillary Equipment 3	AUX Cable	
	Length (Approx.)	1.22 m

2.5 Technical Information

Network and Wireless connectivity	Bluetooth
Classification of equipment	Class B
The highest internal frequency of EUT	2.48 GHz

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Unintentional Radiators
2	ICES-003 (Issue 7, October 15, 2020)	Information Technology Equipment (Including Digital Apparatus)
3	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	ISED Rule	Test Verdict	Remark
1	Radiated Emission	15.109	ICES-003, 3.2.2	Pass	--
2	Conducted Emission, AC Ports	15.107	ICES-003, 3.2.1	Pass	--

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions (9 kHz-30 MHz)-AMN	3.2 dB
Radiated emissions (30 MHz-1 GHz)-10m#2	4.3 dB
Radiated emissions (1 GHz-18 GHz)-966#2	5.0 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Enclosure List

Description	Manufacturer	Model	Serial No.	Length	Description	Use
Mobile Phone	XIAOMI	M2003J15SC	N/A	N/A	N/A	☒
Mobile Phone	XIAOMI	MI 5X	N/A	N/A	N/A	☒
Adapter	XIAOMI	AD100G	N/A	N/A	N/A	☒
Adapter	VIVO	V12060L1B0-CN	N/A	N/A	N/A	☒

4.2 Test Configurations

All test modes of EUT are listed in the table below.


Test Mode Configuration	Description
Mode 1	<u>The AUX Audio Playback Test Mode</u> EUT + Battery + Type-C Cable + Adapter + AUX Cable + Mobile Phone
Mode 2	<u>The Type-C Audio Playback Test Mode</u> EUT + Battery + Type-C Cable + Mobile Phone

Test Case	Test Mode Configuration	Worst Mode
Radiated Emission	Mode 1~Mode 2	1
Conducted Emission, AC Ports	Mode 1	1


Note: All operation modes were tested, but only test data of the worst mode was presented in this report.

4.3 Test Setups


Test Setup 1

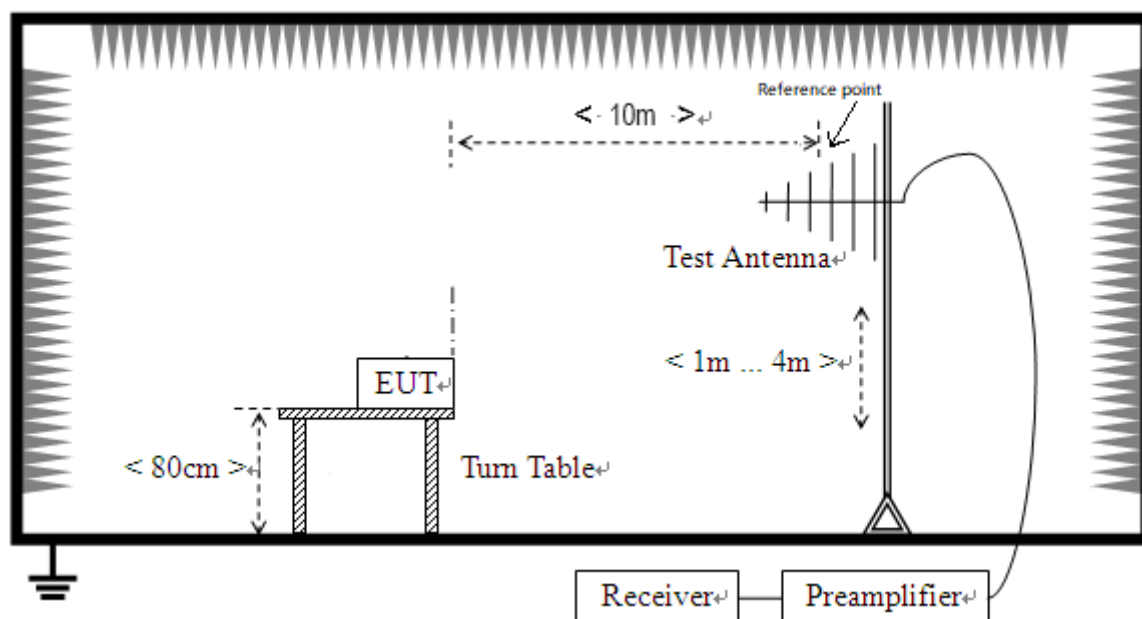

Radiated Emission (30 MHz-1 GHz)

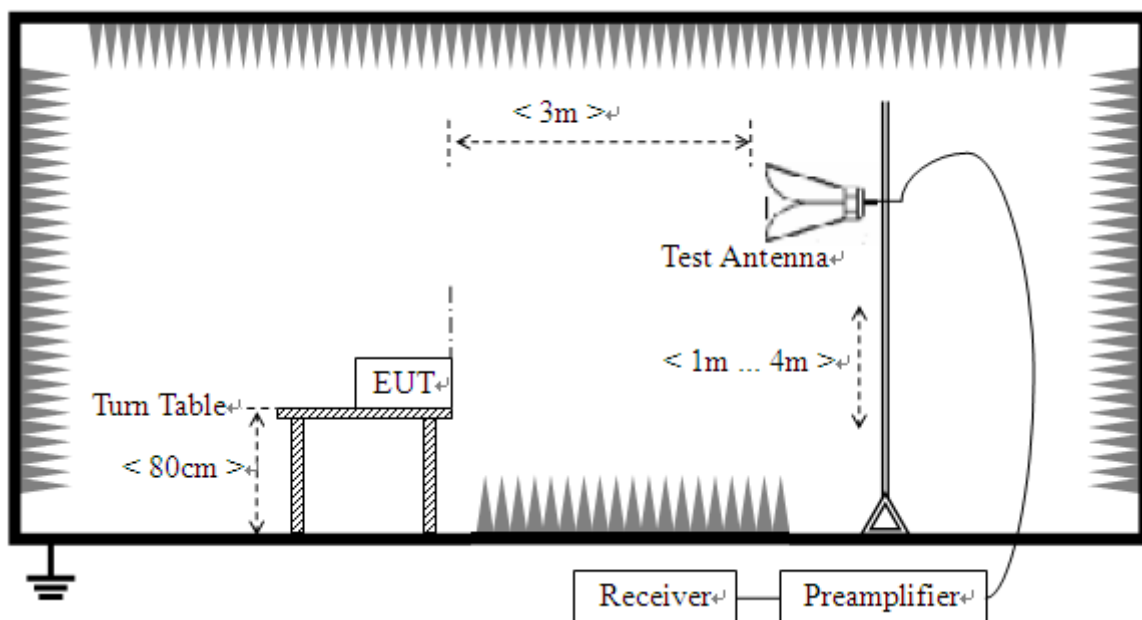

Radiated Emission (above 1 GHz)

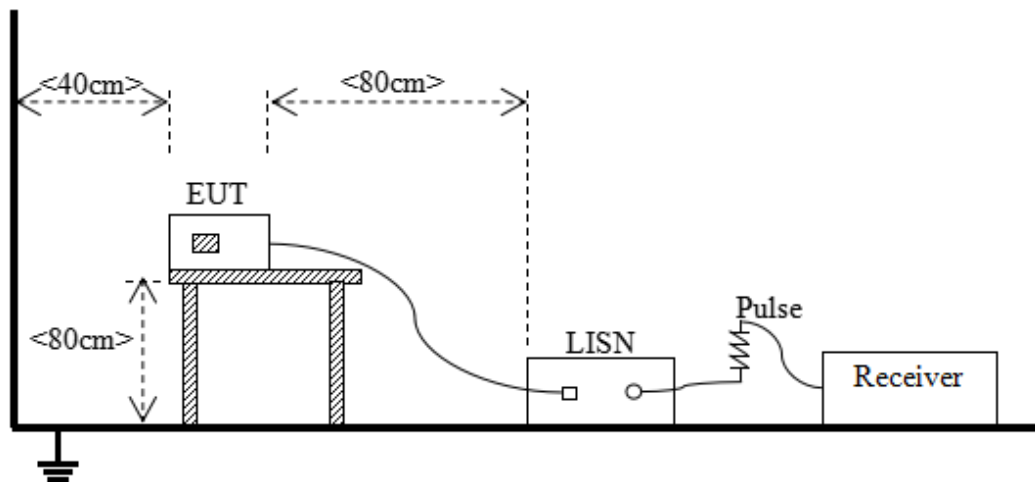Test Setup 2

Conducted Emissions, AC Ports

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated Emission

5.1.1.1 Limit

FCC:

Frequency range (MHz)	Class A (at 10 m)		Class B (at 10 m)
	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)
30 - 88	90	39	29.5
88 - 216	150	43.5	33
216 - 960	210	46.4	35.5
Above 960	300	49.5	43.5

NOTE:

- 1) Field Strength (dB $\mu\text{V/m}$) = $20 \cdot \log [\text{Field Strength } (\mu\text{V/m})]$.
- 2) In the emission tables above, the tighter limit applies at the band edges.
- 3) For 30 MHz to 1000 MHz, the CISPR quasi-peak is employed.

For above 1000 MHz, according to the requirements of FCC 15.35, unless otherwise specified, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

Frequency range (GHz)	Class B (at 3 m)			Class A (at 3 m)	
	Field Strength ($\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)
1 - F_M	500	54	74	60	80

Note 1: The highest measurement frequency, F_M , in GHz, shall be determined as next Table.

Note 2: Average Class A limit at 3m L_{3m} is determined by the following conversion formula:

$$L_{3m} = L_{10m} + 20 \cdot \log(d_{10m}/d_{3m})$$

Where:

L_{3m} is Average Class A limit at 3m;

L_{10m} is Average Class A limit at 10m;

d_{10m} is Measurement distance in 10m;

d_{3m} is Measurement distance in 3m.

For this case: $L_{3m} = 49.5 + 20 \cdot \log(10/3) = 60$ (dB $\mu\text{V/m}$).

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
$F_X \leq 108 \text{ MHz}$	1 GHz
$108 \text{ MHz} \leq F_X \leq 500 \text{ MHz}$	2 GHz
$500 \text{ MHz} \leq F_X \leq 1 \text{ GHz}$	5 GHz
$F_X \geq 1 \text{ GHz}$	$5 \cdot F_X$

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
	or 40 GHz, whichever is lower.
Note: F_X is Highest frequency generated or used in the device or on which the device operates or tunes.	

IC:

Frequency range (MHz)	Class A (10 m)	Class B (10 m)
	Quasi-peak (dB μ V/m)	Quasi-peak (dB μ V/m)
30 - 88	40.0	30.0
88 - 216	43.5	33.1
216 - 230	46.4	35.6
230 - 960	47.0	37.0
960 - 1000	49.5	43.5
Note: The more stringent limit applies at transition frequencies.		

Frequency range (GHz)	Class A (3 m)		Class B (3 m)	
	Average (dB μ V/m)	Peak (dB μ V/m)	Average (dB μ V/m)	Peak (dB μ V/m)
1 - F_M	60	80	54	74
Note:				
1. The highest measurement frequency, F_M , in GHz, shall be determined as next Table.				
2. The measurement bandwidth shall be 1 MHz or greater.				
3. These limit levels apply for a measurement distance of 3 m. If using a different measurement distance, the measured levels shall be extrapolated to the 3 m limit distance using a factor of 20 dB per decade of distance. The measurement distance shall place the measurement antenna in the far field of the ITE or digital apparatus under test.				
4. The test site shall have been validated at the distance used for radiated emission measurements on the ITE or digital apparatus under test.				

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
$F_X \leq 108$ MHz	1GHz
108 MHz $\leq F_X \leq 500$ MHz	2GHz
500 MHz $\leq F_X \leq 1$ GHz	5GHz
$F_X \geq 1$ GHz	5 * F_X up to a maximum of 40 GHz
Note: F_X is the highest fundamental frequency generated and/or used in the ITE or digital apparatus under test.	

5.1.1.2 Test Setup

Refer to 4.3 section (test setup 1) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.1.1.3 Test Procedure

The test employing the methods of measurement described in the publication referenced in ICES-003 Section 3(b) (ANSI C63.4) and ANSI C63.4;

All Radiated Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

The measurement frequency range is from 30 MHz to the 5th harmonic of the maximum frequency of the EUT internal source. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak for $f < 1$ GHz, peak & RMS Average for $f \geq 1$ GHz

Trace = max hold

5.1.1.4 Test Result and Test Equipment List

Please refer to ANNEX A.1.

NOTE:

1. Results (dB μ V/m) = Reading (dB μ V) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)

3. Margin = Limit – Results

5.1.2 Conducted Emission, AC Ports

5.1.2.1 Test Limit

Frequency range (MHz)	Class A	
	Quasi-peak (dBμV)	Average (dBμV)
0.15 - 0.50	79	66
0.50 - 30	73	60

Frequency range (MHz)	Class B	
	Quasi-peak (dBμV)	Average (dBμV)
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.
- 3) The limit using ANSI C63.4.

5.1.2.2 Test Setup

Refer to 4.3 section test (test setup 2) for conducted emission, the photo of test setup please refer to ANNEX B.

5.1.2.3 Test Procedure

The test employing the methods of measurement described in the publication referenced in Section 3(b) (ANSI C63.4);

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

Use the following spectrum analyzer settings:

RBW = 9 kHz

VBW $\geq$ RBW

Sweep = 10ms

Detector function =peak & Average

Trace = max hold

5.1.2.4 Test Result and Test Equipment List

Please refer to ANNEX A.2.

NOTE:

1. Results (dB μ V) = Reading (dB μ V) + Factor (dB)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Margin = Limit – Results

ANNEX A TEST RESULTS


A.1 Radiated Emission

Note 1: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Sample No.	EE26040125-001-S16 EE26040125-001-A01	Temperature	20.1℃~20.1℃
Humidity	64%RH~65%RH	Pressure	100.0kPa~100.2kPa
Test Engineer	Zhou Haonan;Ya Jingtang	Test Date	2026.07.08~2026.07.09


Test Mode 1

1) Test Antenna Vertical, 30 MHz – 1 GHz (FCC)

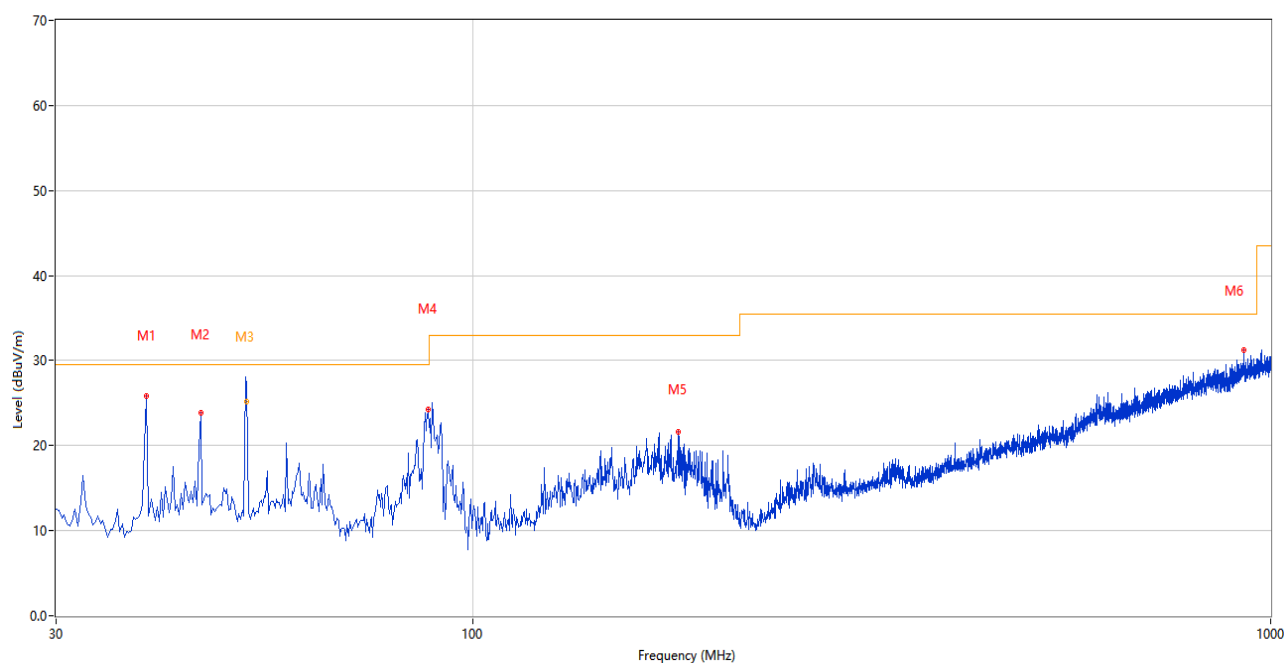


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	38.970	25.87	-29.70	29.5	3.63	Peak	8.00	200	Vertical	Pass
2	45.516	23.89	-29.13	29.5	5.61	Peak	139.00	100	Vertical	Pass
3	51.998	26.48	-29.11	29.5	3.02	Peak	85.00	117	Vertical	N/A
3*	51.998	25.22	-29.11	29.5	4.28	QP	85.00	117	Vertical	Pass
4	87.943	24.23	-34.69	29.5	5.27	Peak	8.00	200	Vertical	Pass
5	181.040	21.65	-29.71	33.0	11.35	Peak	343.00	100	Vertical	Pass
6	926.298	31.23	-12.01	35.5	4.27	Peak	109.00	100	Vertical	Pass

2) Test Antenna Horizontal, 30 MHz – 1 GHz (FCC)

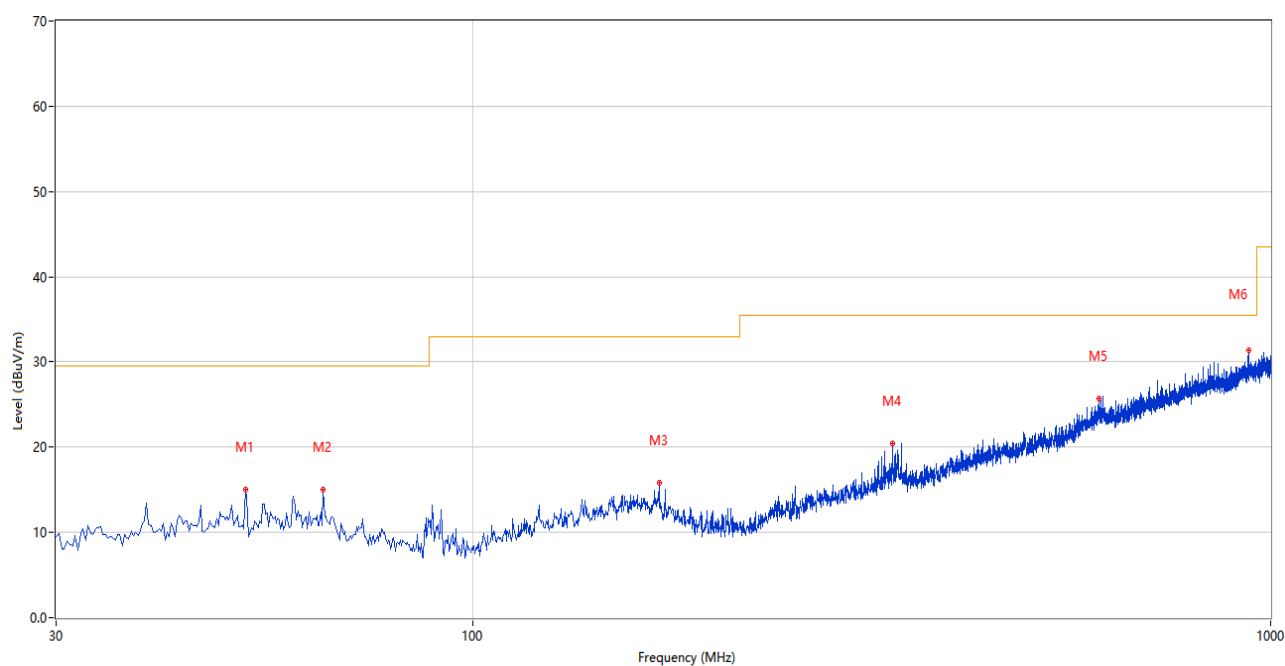


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	51.820	14.98	-29.11	29.5	14.52	Peak	195.00	200	Horizontal	Pass
2	64.911	15.04	-30.32	29.5	14.46	Peak	360.00	200	Horizontal	Pass
3	171.100	15.79	-28.44	33.0	17.21	Peak	268.00	200	Horizontal	Pass
4	335.716	20.48	-25.54	35.5	15.02	Peak	248.00	200	Horizontal	Pass
5	609.188	25.73	-17.24	35.5	9.77	Peak	233.00	100	Horizontal	Pass
6	938.178	31.35	-11.87	35.5	4.15	Peak	228.00	100	Horizontal	Pass

3) Test Antenna Vertical, 30 MHz – 1 GHz (IC)

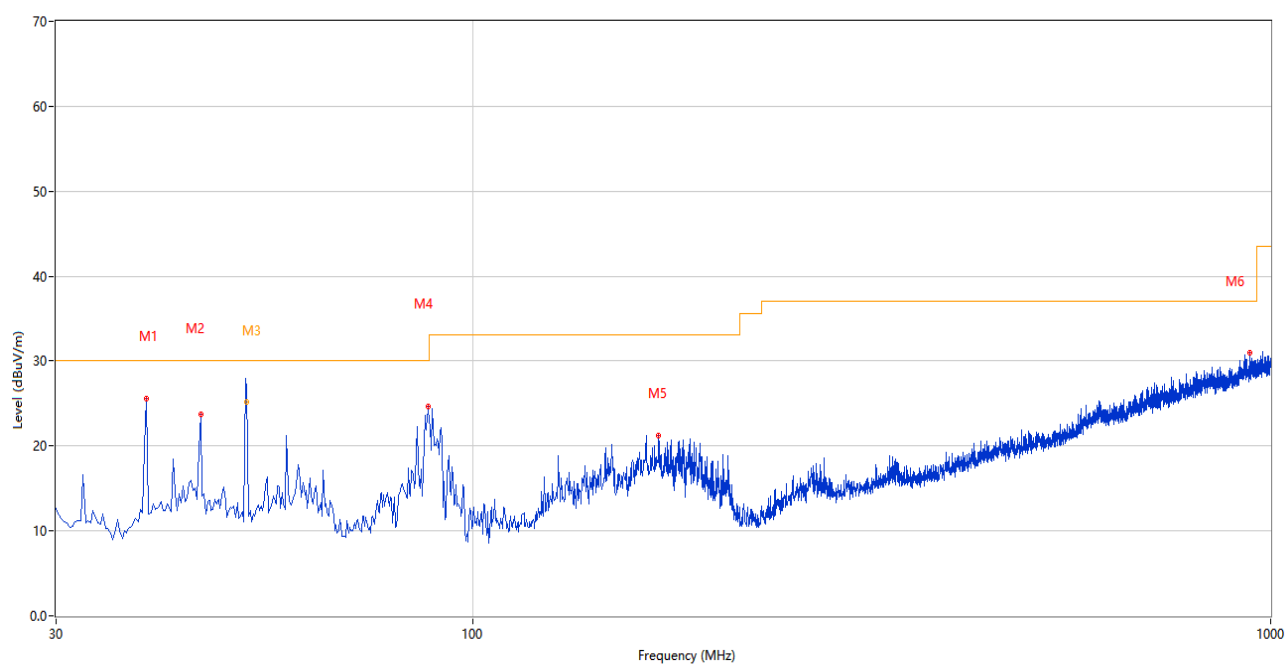

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	38.970	25.58	-29.70	30.0	4.42	Peak	15.00	100	Vertical	Pass
2	45.516	23.70	-29.13	30.0	6.30	Peak	124.00	200	Vertical	Pass
3	51.998	26.27	-29.11	30.0	3.73	Peak	93.00	102	Vertical	N/A
3*	51.998	25.12	-29.11	30.0	4.88	QP	93.00	102	Vertical	Pass
4	87.943	24.66	-34.69	30.0	5.34	Peak	356.00	200	Vertical	Pass
5	170.857	21.20	-28.41	33.1	11.90	Peak	341.00	100	Vertical	Pass
6	940.602	30.93	-11.90	37.0	6.07	Peak	129.00	100	Vertical	Pass

4) Test Antenna Horizontal, 30 MHz – 1 GHz (IC)

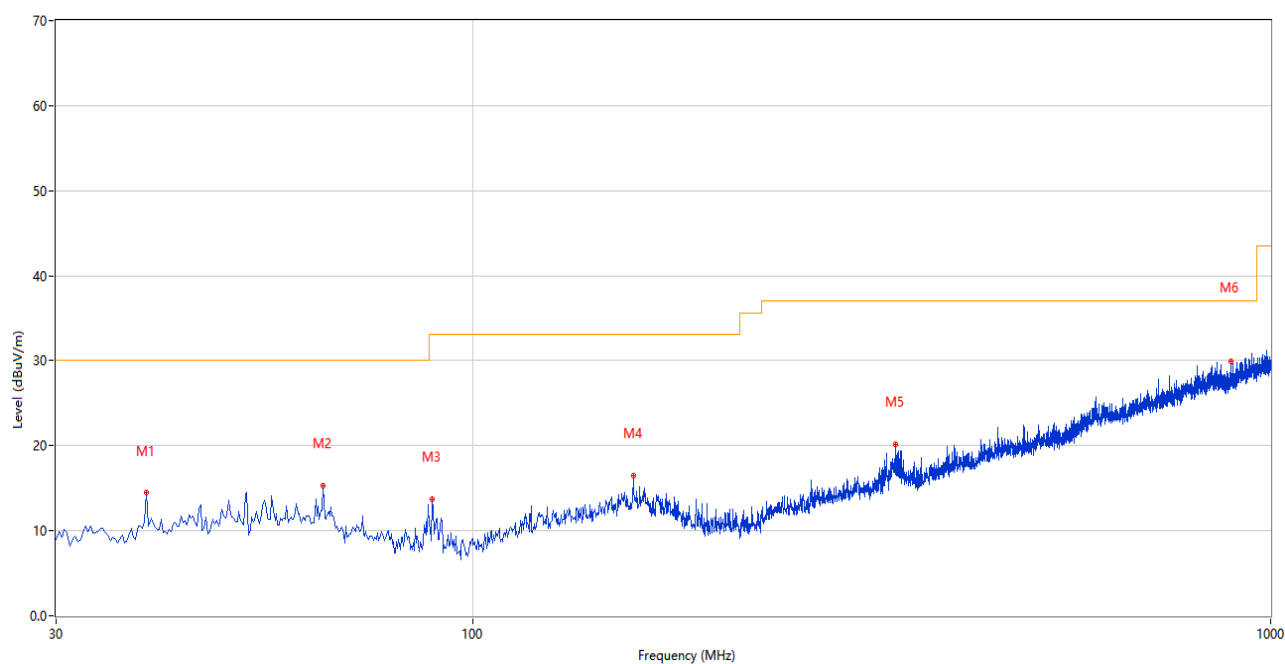


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	38.970	14.44	-29.70	30.0	15.56	Peak	101.00	200	Horizontal	Pass
2	64.911	15.33	-30.32	30.0	14.67	Peak	360.00	200	Horizontal	Pass
3	88.913	13.75	-34.86	33.1	19.35	Peak	56.00	200	Horizontal	Pass
4	158.735	16.51	-28.06	33.1	16.59	Peak	70.00	200	Horizontal	Pass
5	338.868	20.12	-25.49	37.0	16.88	Peak	61.00	200	Horizontal	Pass
6	890.660	29.89	-12.99	37.0	7.11	Peak	97.00	100	Horizontal	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Below 1 GHz						
EMI Receiver	ROHDE&S CHWARZ	ESR7	103027	2025.10.30	2026.10.29	☒
Amplifier (30MHz-1GHz)	COM-MV	ZT30-1000M	B2018054558	2025.11.26	2026.11.25	☒
Test Antenna- Bi-Log	SCHWARZ BECK	VULB 9168	00883	2025.03.23	2028.03.22	☒
Anechoic Chamber(10m#2)	YiHeng	21m*11m*8m	101-1	2025.10.16	2028.10.15	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☒


Test Mode 1

5) Test Antenna Vertical, 1 GHz – 12.75 GHz

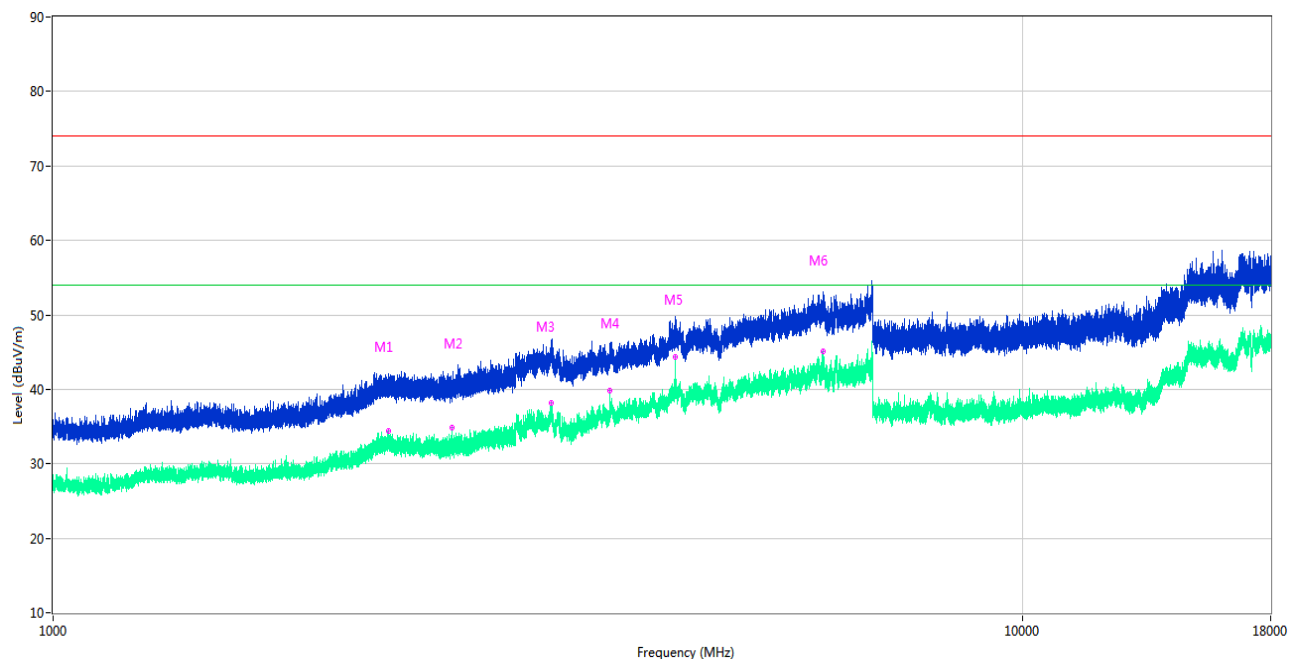

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2215.300	41.35	-10.32	74.0	32.65	Peak	167.00	200	Vertical	Pass
1**	2215.300	34.40	-10.32	54.0	19.60	AV	167.00	200	Vertical	Pass
2	2579.500	39.87	-9.86	74.0	34.13	Peak	55.00	100	Vertical	Pass
2**	2579.500	34.93	-9.86	54.0	19.07	AV	55.00	100	Vertical	Pass
3	3266.000	43.87	-4.88	74.0	30.13	Peak	0.00	200	Vertical	Pass
3**	3266.000	38.17	-4.88	54.0	15.83	AV	0.00	200	Vertical	Pass
4	3750.200	44.96	-4.87	74.0	29.04	Peak	309.00	100	Vertical	Pass
4**	3750.200	39.87	-4.87	54.0	14.13	AV	309.00	100	Vertical	Pass
5	4375.200	49.45	-2.68	74.0	24.55	Peak	228.00	100	Vertical	Pass
5**	4375.200	44.35	-2.68	54.0	9.65	AV	228.00	100	Vertical	Pass
6	6227.800	51.15	3.85	74.0	22.85	Peak	31.00	100	Vertical	Pass
6**	6227.800	45.04	3.85	54.0	8.96	AV	31.00	100	Vertical	Pass

6) Test Antenna Horizontal, 1 GHz – 12.75 GHz

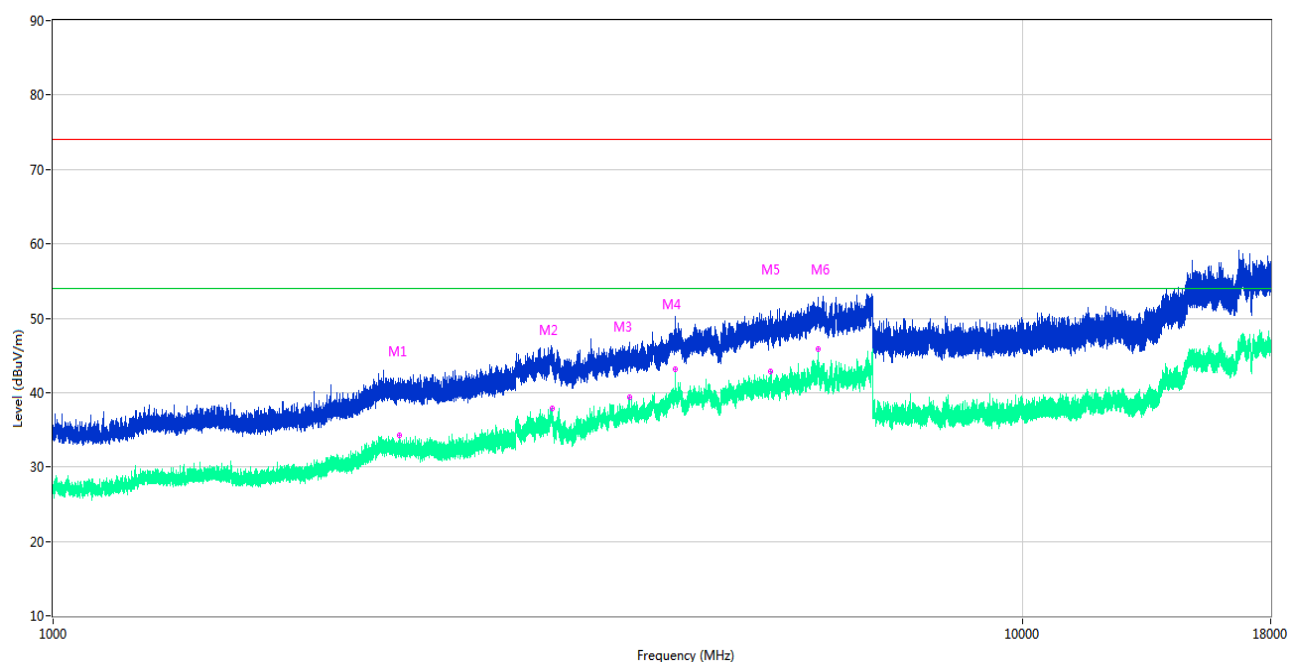

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2274.800	39.58	-10.22	74.0	34.42	Peak	0.00	100	Horizontal	Pass
1**	2274.800	34.21	-10.22	54.0	19.79	AV	0.00	100	Horizontal	Pass
2	3272.200	44.35	-5.04	74.0	29.65	Peak	211.00	100	Horizontal	Pass
2**	3272.200	37.91	-5.04	54.0	16.09	AV	211.00	100	Horizontal	Pass
3	3925.400	45.64	-4.45	74.0	28.36	Peak	81.00	200	Horizontal	Pass
3**	3925.400	39.38	-4.45	54.0	14.62	AV	81.00	200	Horizontal	Pass
4	4375.200	49.46	-2.68	74.0	24.54	Peak	129.00	200	Horizontal	Pass
4**	4375.200	43.21	-2.68	54.0	10.79	AV	129.00	200	Horizontal	Pass
5	5490.000	47.97	0.69	74.0	26.03	Peak	259.00	100	Horizontal	Pass
5**	5490.000	42.80	0.69	54.0	11.20	AV	259.00	100	Horizontal	Pass
6	6151.400	50.70	3.46	74.0	23.30	Peak	10.00	100	Horizontal	Pass
6**	6151.400	45.83	3.46	54.0	8.17	AV	10.00	100	Horizontal	Pass


Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Above 1 GHz						
EMI Receiver	Keysight	N9038A	MY55330120	2026.06.02	2027.06.01	☒
Amplifier (1-12GHz)	Advanced Microwave	WLA652A	1740103	2025.11.26	2026.11.25	☒
Amplifier (0.8-21GHz)	Mini-Circuits	ZVA-213-S+	225321316	2025.11.25	2026.11.24	☒
Test Antenna- Horn	SCHWARZB ECK	BBHA 9120D	01917	2025.05.20	2028.05.19	☒
Anechoic Chamber(966#2)	YiHeng	9m*6m*6m	106-1	2026.01.20	2029.01.19	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☒

A.2 Conducted Emission, AC Ports

Sample No.	EE26040125-001-S16 EE26040125-001-A01	Temperature	20.5℃
Humidity	59%RH	Pressure	100.0kPa
Test Engineer	Huang Penghui	Test Date	2026.07.10


Test Mode 1

1) AC Ports - L Phase

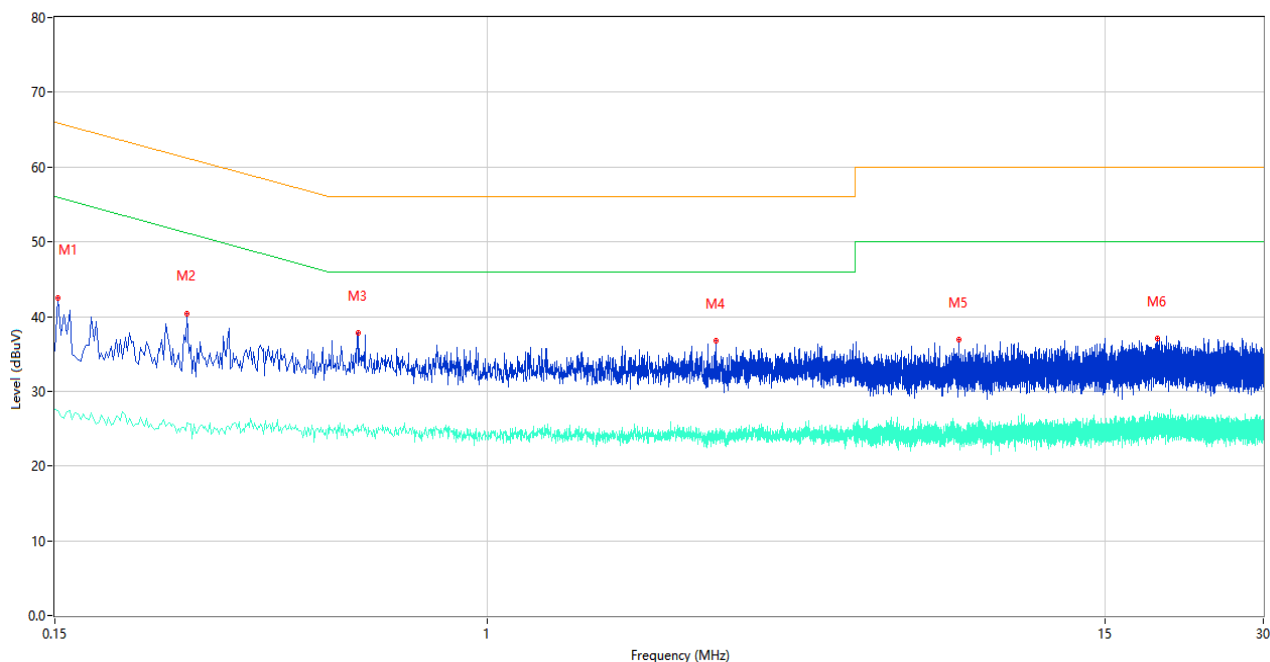

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.152	42.53	9.86	65.89	23.36	Peak	L	Pass
1**	0.152	27.45	9.86	55.89	28.44	AV	L	Pass
2	0.268	40.45	9.82	61.18	20.73	Peak	L	Pass
2**	0.268	25.79	9.82	51.18	25.39	AV	L	Pass
3	0.568	37.81	10.14	56.00	18.19	Peak	L	Pass
3**	0.568	25.23	10.14	46.00	20.77	AV	L	Pass
4	2.726	36.80	10.17	56.00	19.20	Peak	L	Pass
4**	2.726	24.95	10.17	46.00	21.05	AV	L	Pass
5	7.912	36.91	10.33	60.00	23.09	Peak	L	Pass
5**	7.912	24.31	10.33	50.00	25.69	AV	L	Pass
6	18.884	37.01	11.02	60.00	22.99	Peak	L	Pass
6**	18.884	27.05	11.02	50.00	22.95	AV	L	Pass

2) AC Ports - N Phase

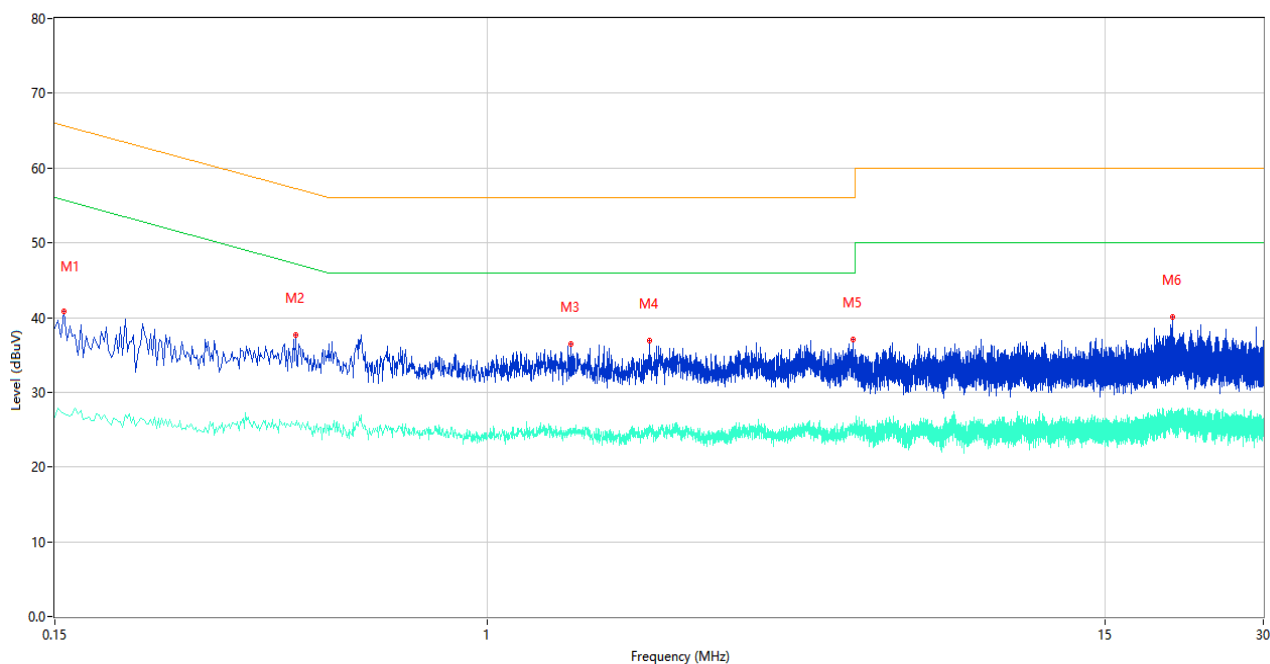

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.156	40.87	9.86	65.67	24.80	Peak	N	Pass
1**	0.156	27.15	9.86	55.67	28.52	AV	N	Pass
2	0.432	37.62	10.28	57.21	19.59	Peak	N	Pass
2**	0.432	25.55	10.28	47.21	21.66	AV	N	Pass
3	1.438	36.50	10.04	56.00	19.50	Peak	N	Pass
3**	1.438	24.95	10.04	46.00	21.05	AV	N	Pass
4	2.030	36.88	10.45	56.00	19.12	Peak	N	Pass
4**	2.030	24.78	10.45	46.00	21.22	AV	N	Pass
5	4.960	37.10	10.35	56.00	18.90	Peak	N	Pass
5**	4.960	24.37	10.35	46.00	21.63	AV	N	Pass
6	20.156	40.06	11.01	60.00	19.94	Peak	N	Pass
6**	20.156	24.97	11.01	50.00	25.03	AV	N	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2025.09.25	2026.09.24	☒
LISN	SCHWARZBECK	NSLK 8127	8127-687	2026.03.25	2027.03.24	☒
Shielded Room	ChangChuang	4m*4m*3m	662	2025.10.12	2028.10.11	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☒

ANNEX B TEST SETUP PHOTOS

Please refer the document “Ti-EE26060166-AE.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “Ti-EE26060166-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “Ti-EE26060166-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--