

TEST REPORT

Applicant: NOTHING TECHNOLOGY LIMITED
Address: Bedford House, 21A John Street, London, United Kingdom WC1N 2BF
Equipment Type: Portable Wireless Speaker
Model Name: E494
Brand Name: cmf by NOTHING
FCC ID: 2AZEQ-E494
ISED Number: 27102-E494
47 CFR Part 15 Subpart B
Test Standard: ICES-003 (Issue 7, October 15, 2020)
ANSI C63.4-2014
Sample Arrival Date: Jun. 22, 2026
Test Date: Jun. 25, 2026 - Jul. 28, 2026
Date of Issue: Aug. 25, 2026

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

**Tested by:** Loring Tan**Checked by:** Xiong Chong**Approved by:** Tolan Tu
(Testing Director)

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Aug. 18, 2026</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Aug. 25, 2026</u>	<u>Update the test date and ANNEX B TEST SETUP PHOTOS Above 1 GHz test setup photo</u>

TABLE OF CONTENTS

1 GENERAL INFORMATION	4
1.1 Test Laboratory	4
1.2 Test Location	4
2 PRODUCT INFORMATION	5
2.1 Applicant Information	5
2.2 Manufacturer Information	5
2.3 General Description for Equipment under Test (EUT)	5
2.4 Ancillary Equipment	5
2.5 Technical Information	5
3 SUMMARY OF TEST RESULTS	6
3.1 Test Standards	6
3.2 Verdict	6
3.3 Test Uncertainty	6
4 GENERAL TEST CONFIGURATIONS	7
4.1 Test Enclosure List	7
4.2 Test Configurations	7
4.3 Test Setups	8
5 TEST ITEMS	10
5.1 Emission Tests	10
ANNEX A TEST RESULTS	15
A.1 Radiated Emission	15
A.2 Conducted Emission, AC Ports	24
ANNEX B TEST SETUP PHOTOS	27

ANNEX C EUT EXTERNAL PHOTOS	27
ANNEX D EUT INTERNAL PHOTOS	27

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	601, Building 2, Intelligent Connected Vehicle Industrial Park, No.55, Xiangshan Road, Luotian Community, Yanluo Sub-district, Bao'an District, Shenzhen
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Building 2, Intelligent Connected Vehicle Industrial Park, No.55, Xiangshan Road, Luotian Community, Yanluo Sub-district, Bao'an District, Shenzhen, Guangdong
	☐ 1/F., Building B, Ganghongji High-Tech Intelligent Industrial Park, No.1008, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The CAB identifier number is CN0030. The certification body is American Association for Laboratory Accreditation (A2LA).

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	NOTHING TECHNOLOGY LIMITED
Address	Bedford House, 21A John Street, London, United Kingdom WC1N 2BF

2.2 Manufacturer Information

Manufacturer	NOTHING TECHNOLOGY LIMITED
Address	Bedford House, 21A John Street, London, United Kingdom WC1N 2BF

2.3 General Description for Equipment under Test (EUT)

EUT Name	Portable Wireless Speaker
Model Name Under Test	E494
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	25511
Software Version	V1.0.1.13
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	N/A
	Model No.	CT001
	Serial No.	N/A
	Capacity	2600 mAh
	Rated Voltage	3.6 V
	Limit Charge Voltage	4.2 V

2.5 Technical Information

Network and Wireless connectivity	Bluetooth, NFC
Classification of equipment	Class B
The highest internal frequency of EUT	2.4GHz

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Unintentional Radiators
2	ICES-003 (Issue 7, October 15, 2020)	Information Technology Equipment (Including Digital Apparatus)
3	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	ISED Rule	Test Verdict	Remark
1	Radiated Emission	15.109	ICES-003, 3.2.2	Pass	--
2	Conducted Emission, AC Ports	15.107	ICES-003, 3.2.1	Pass	--

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions (9 kHz-30 MHz)-AMN	3.2 dB
Radiated emissions (30 MHz-1 GHz)-966#5	4.6 dB
Radiated emissions (1 GHz-18 GHz)-966#5	5.1 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Enclosure List

Description	Manufacturer	Model	Serial No.	Length	Description	Use
Adapter	OPPO	0P52YAUH	N/A	N/A	N/A	☒
Adapter	OPPO	AK779GB	N/A	N/A	N/A	☒
Data Cable	OPPO	N/A	N/A	1.0M	N/A	☒
Mobile Phone	XIAOMI	MI 5X	N/A	N/A	N/A	☒
Laptop	Lenovo	ZhaoYang K4e-IAP	N/A	N/A	N/A	☒

4.2 Test Configurations

All test modes of EUT are listed in the table below.


Test Mode Configuration	Description
Mode 1	<u>The Charging Test Mode</u> EUT + Battery + Adapter + Data Cable
Mode 2	<u>The Wired playback Test Mode</u> EUT + Battery + Data Cable + Laptop
Mode 3	<u>The BT link Test Mode</u> EUT + Battery+ Mobile Phone + BT link

Test Case	Test Mode Configuration	Worst Mode
Radiated Emission	Mode 1~Mode 3	1
Conducted Emission, AC Ports	Mode 1	1


Note: All operation modes were tested, but only test data of the worst mode was presented in this report.

4.3 Test Setups


Test Setup 1

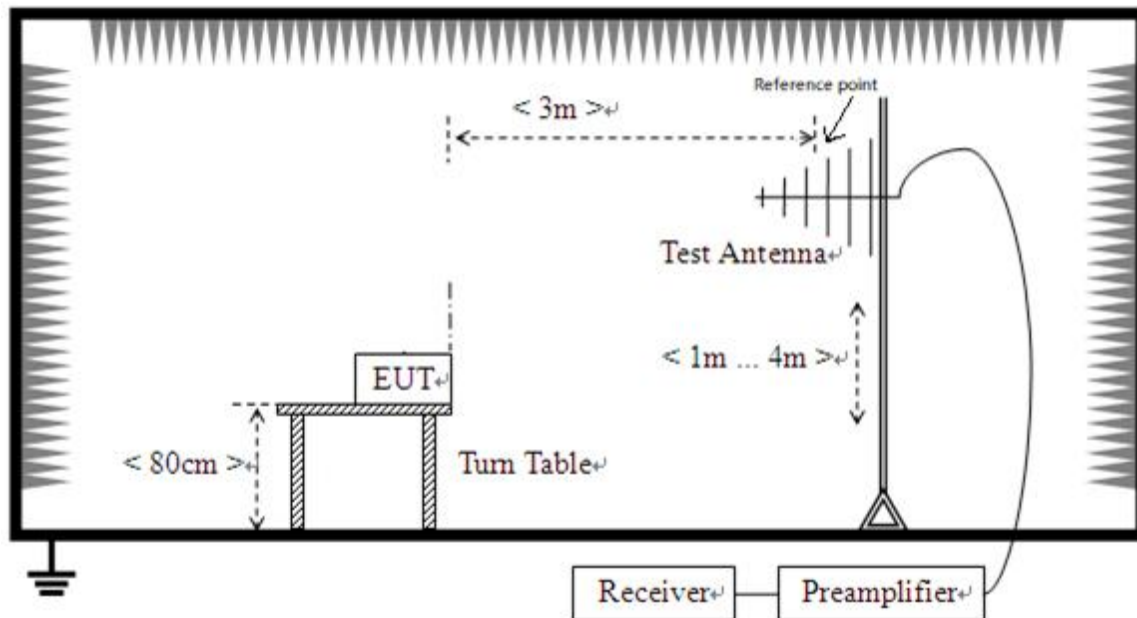

Radiated Emission (30 MHz-1 GHz)

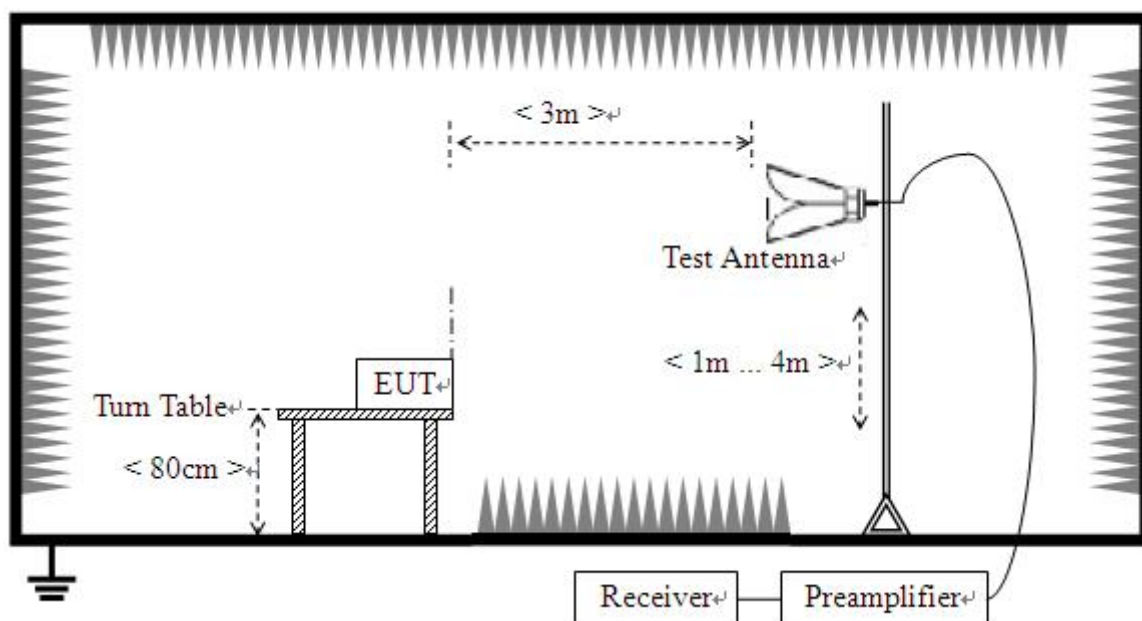

Radiated Emission (above 1 GHz)

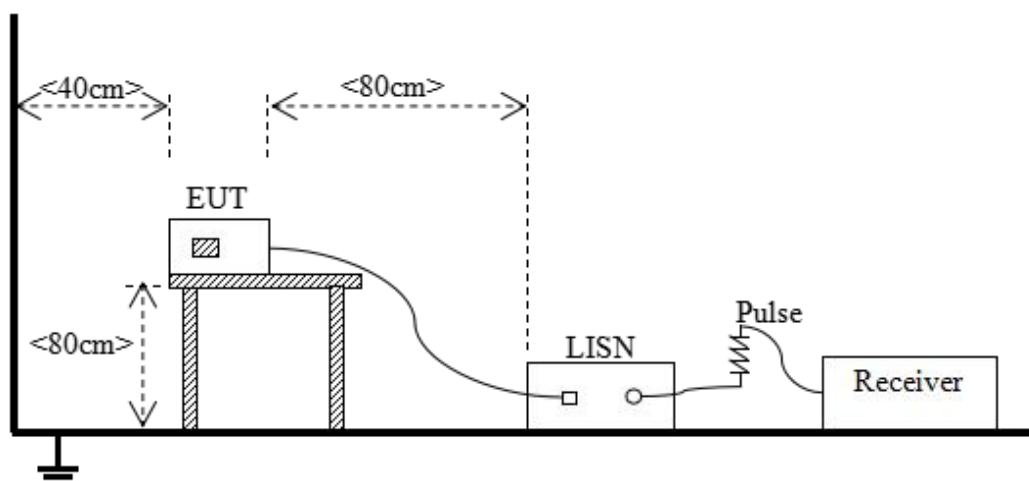Test Setup 2

Conducted Emissions, AC Ports

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated Emission

5.1.1.1 Limit

FCC:

Frequency range (MHz)	Class B (at 3 m)		Class A (at 3 m)
	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)
30 - 88	100	40	49.5
88 - 216	150	43.5	54
216 - 960	200	46	56.9
Above 960	500	54	60

NOTE:

- 1) Field Strength (dB $\mu\text{V/m}$) = $20 \cdot \log [\text{Field Strength } (\mu\text{V/m})]$.
- 2) In the emission tables above, the tighter limit applies at the band edges.
- 3) For 30 MHz to 1000 MHz, the CISPR quasi-peak is employed.

For above 1000 MHz, according to the requirements of FCC 15.35, unless otherwise specified, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

Frequency range (GHz)	Class B (at 3 m)			Class A (at 3 m)	
	Field Strength ($\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)
1 - F_M	500	54	74	60	80

Note 1: The highest measurement frequency, F_M , in GHz, shall be determined as next Table.

Note 2: Average Class A limit at 3m L_{3m} is determined by the following conversion formula:

$$L_{3m} = L_{10m} + 20 \cdot \log(d_{10m}/d_{3m})$$

Where:

L_{3m} is Average Class A limit at 3m;

L_{10m} is Average Class A limit at 10m;

d_{10m} is Measurement distance in 10m;

d_{3m} is Measurement distance in 3m.

For this case: $L_{3m} = 49.5 + 20 \cdot \log(10/3) = 60$ (dB $\mu\text{V/m}$).

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
$F_X \leq 108 \text{ MHz}$	1 GHz
$108 \text{ MHz} \leq F_X \leq 500 \text{ MHz}$	2 GHz
$500 \text{ MHz} \leq F_X \leq 1 \text{ GHz}$	5 GHz
$F_X \geq 1 \text{ GHz}$	$5 \cdot F_X$

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
	or 40 GHz, whichever is lower.
Note: F_X is Highest frequency generated or used in the device or on which the device operates or tunes.	

IC:

Frequency range (MHz)	Class A (3 m)	Class B (3 m)
	Quasi-peak (dB μ V/m)	Quasi-peak (dB μ V/m)
30 - 88	50.0	40.0
88 - 216	54.0	43.5
216 - 230	56.9	46.0
230 - 960	57.0	47.0
960 - 1000	60.0	54.0
Note: The more stringent limit applies at transition frequencies.		

Frequency range (GHz)	Class A (3 m)		Class B (3 m)	
	Average (dB μ V/m)	Peak (dB μ V/m)	Average (dB μ V/m)	Peak (dB μ V/m)
1 - F_M	60	80	54	74

Note:

1. The highest measurement frequency, F_M , in GHz, shall be determined as next Table.
2. The measurement bandwidth shall be 1 MHz or greater.
3. These limit levels apply for a measurement distance of 3 m. If using a different measurement distance, the measured levels shall be extrapolated to the 3 m limit distance using a factor of 20 dB per decade of distance. The measurement distance shall place the measurement antenna in the far field of the ITE or digital apparatus under test.
4. The test site shall have been validated at the distance used for radiated emission measurements on the ITE or digital apparatus under test.

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
$F_X \leq 108$ MHz	1GHz
$108 \text{ MHz} \leq F_X \leq 500$ MHz	2GHz
$500 \text{ MHz} \leq F_X \leq 1$ GHz	5GHz
$F_X \geq 1$ GHz	$5 * F_X$ up to a maximum of 40 GHz
Note: F_X is the highest fundamental frequency generated and/or used in the ITE or digital apparatus under test.	

5.1.1.2 Test Setup

Refer to 4.3 section (test setup 1) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.1.1.3 Test Procedure

The test employing the methods of measurement described in the publication referenced in ICES-003

Section 3(b) (ANSI C63.4) and ANSI C63.4;

All Radiated Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

The measurement frequency range is from 30 MHz to the 5th harmonic of the maximum frequency of the EUT internal source. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak for $f < 1$ GHz, peak & RMS Average for $f \geq 1$ GHz

Trace = max hold

5.1.1.4 Test Result and Test Equipment List

Please refer to ANNEX A.1.

NOTE:

1. Results (dB μ V/m) = Reading (dB μ V) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)

3. Margin = Limit – Results

5.1.2 Conducted Emission, AC Ports

5.1.2.1 Test Limit

Frequency range (MHz)	Class A	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	79	66
0.50 - 30	73	60

Frequency range (MHz)	Class B	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.
- 3) The limit using ANSI C63.4.

5.1.2.2 Test Setup

Refer to 4.3 section test (test setup 2) for conducted emission, the photo of test setup please refer to ANNEX B.

5.1.2.3 Test Procedure

The test employing the methods of measurement described in the publication referenced in Section 3(b) (ANSI C63.4);

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

Use the following spectrum analyzer settings:

RBW = 9 kHz

VBW $\geq$ RBW

Sweep = 10ms

Detector function =peak & Average

Trace = max hold

5.1.2.4 Test Result and Test Equipment List

Please refer to ANNEX A.2.

NOTE:

1. Results (dB μ V) = Reading (dB μ V) + Factor (dB)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Margin = Limit – Results

ANNEX A TEST RESULTS


A.1 Radiated Emission

Note 1: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Sample No.	EE26060266-001-S03	Temperature	25.7℃
Humidity	65%RH	Pressure	100.4kPa
Test Engineer	Li Jianping	Test Date	2026.07.28


Test Mode 1

1) Test Antenna Vertical, 30 MHz – 1 GHz (FCC)

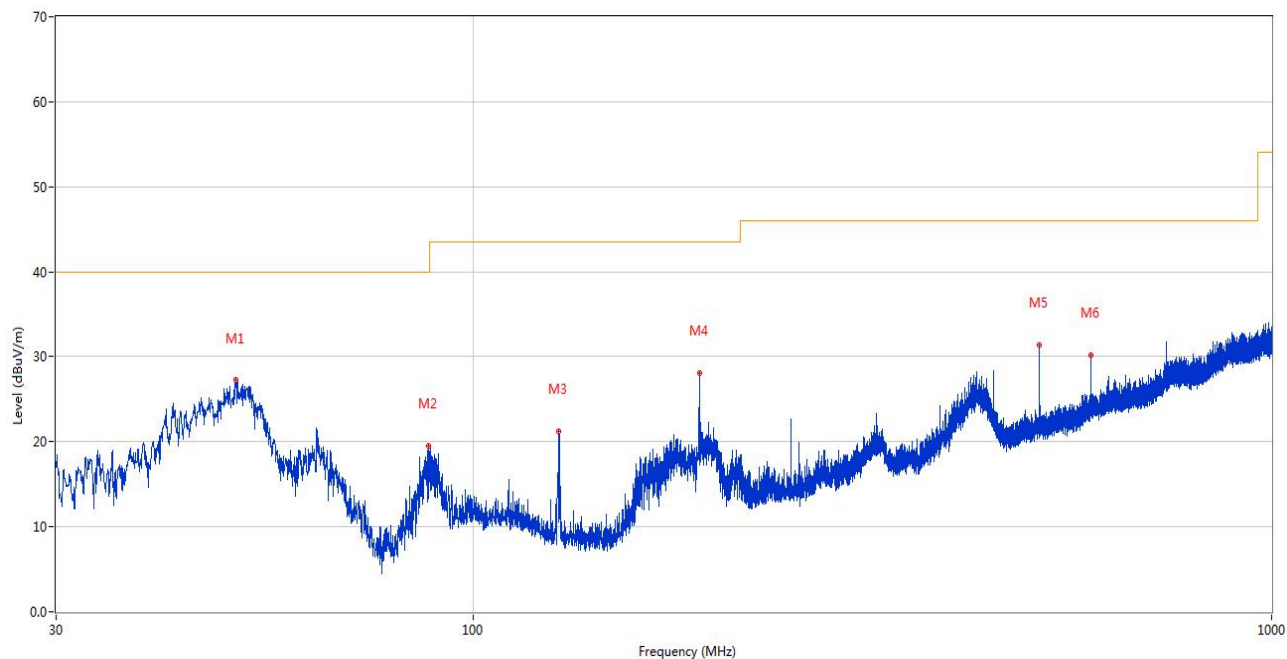


No.	Frequency (MHz)	Results (dBUV/m)	Factor (dB)	Limit (dBUV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	50.322	27.22	-24.09	40.0	12.78	Peak	9.90	100	Vertical	Pass
2	87.812	19.56	-28.52	40.0	20.44	Peak	133.30	100	Vertical	Pass
3	128.018	21.28	-28.07	43.5	22.22	Peak	310.20	100	Vertical	Pass
4	192.038	28.08	-24.90	43.5	15.42	Peak	9.90	100	Vertical	Pass
5	511.993	31.35	-15.56	46.0	14.65	Peak	327.90	100	Vertical	Pass
6	594.006	30.13	-12.87	46.0	15.87	Peak	238.90	100	Vertical	Pass

2) Test Antenna Horizontal, 30 MHz – 1 GHz (FCC)

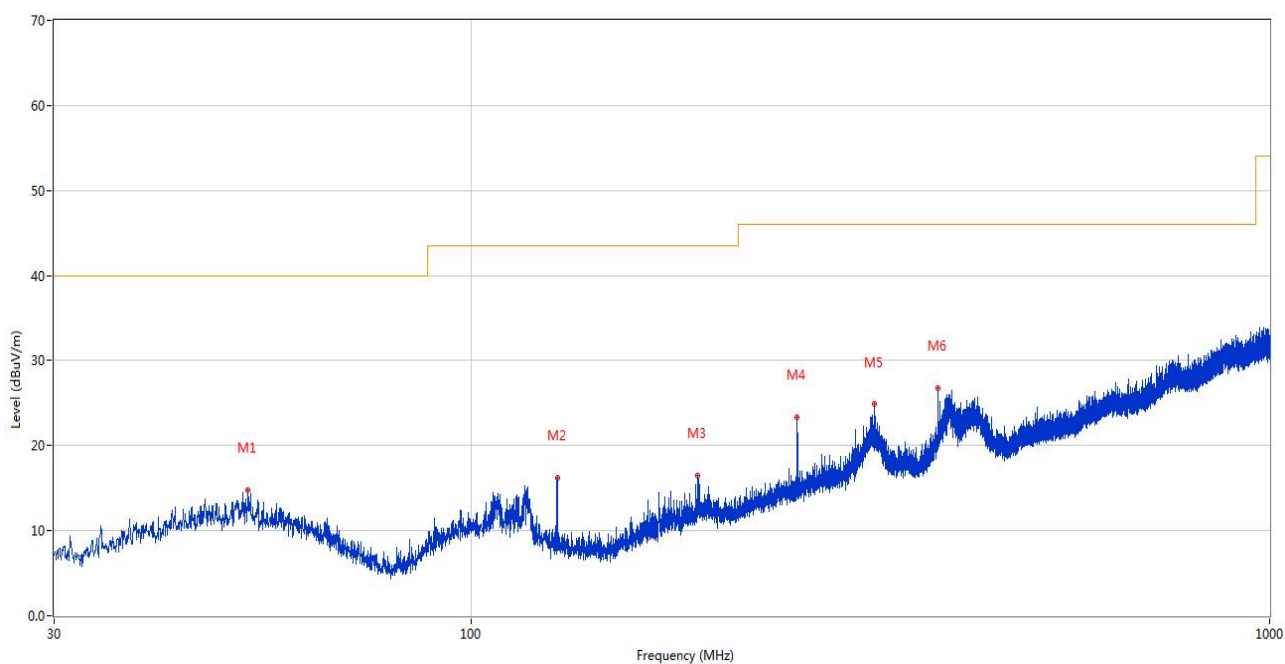


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	52.504	14.82	-24.11	40.0	25.18	Peak	257.10	100	Horizontal	Pass
2	128.067	16.22	-28.07	43.5	27.28	Peak	251.00	100	Horizontal	Pass
3	191.990	16.48	-24.91	43.5	27.02	Peak	113.90	100	Horizontal	Pass
4	256.010	23.39	-22.59	46.0	22.61	Peak	166.40	100	Horizontal	Pass
5	319.982	24.85	-20.98	46.0	21.15	Peak	173.60	100	Horizontal	Pass
6	384.002	26.77	-18.93	46.0	19.23	Peak	292.50	100	Horizontal	Pass

3) Test Antenna Vertical, 30 MHz – 1 GHz (IC)

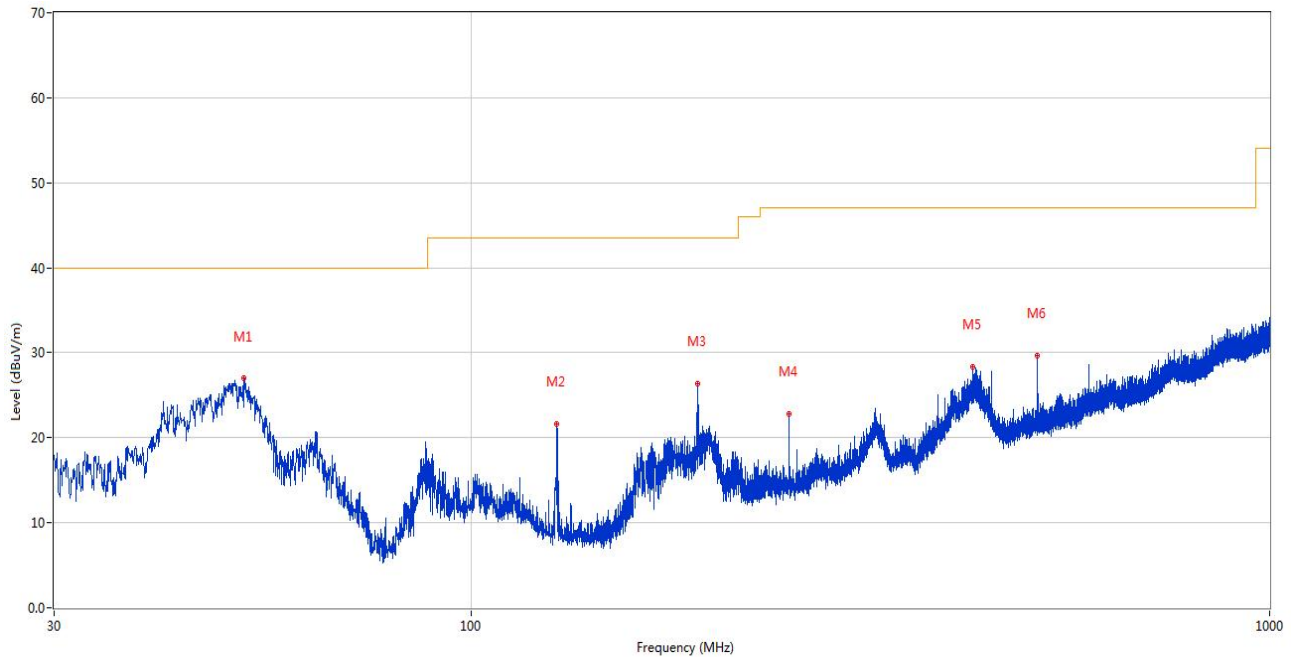

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	51.922	26.96	-24.05	40.0	13.04	Peak	345.60	100	Vertical	Pass
2	128.018	21.59	-28.07	43.5	21.91	Peak	275.90	100	Vertical	Pass
3	192.038	26.38	-24.90	43.5	17.12	Peak	7.70	100	Vertical	Pass
4	249.996	22.80	-22.80	47.0	24.20	Peak	44.70	100	Vertical	Pass
5	425.081	28.39	-17.59	47.0	18.61	Peak	242.10	100	Vertical	Pass
6	512.042	29.65	-15.56	47.0	17.35	Peak	356.60	100	Vertical	Pass

4) Test Antenna Horizontal, 30 MHz – 1 GHz (IC)

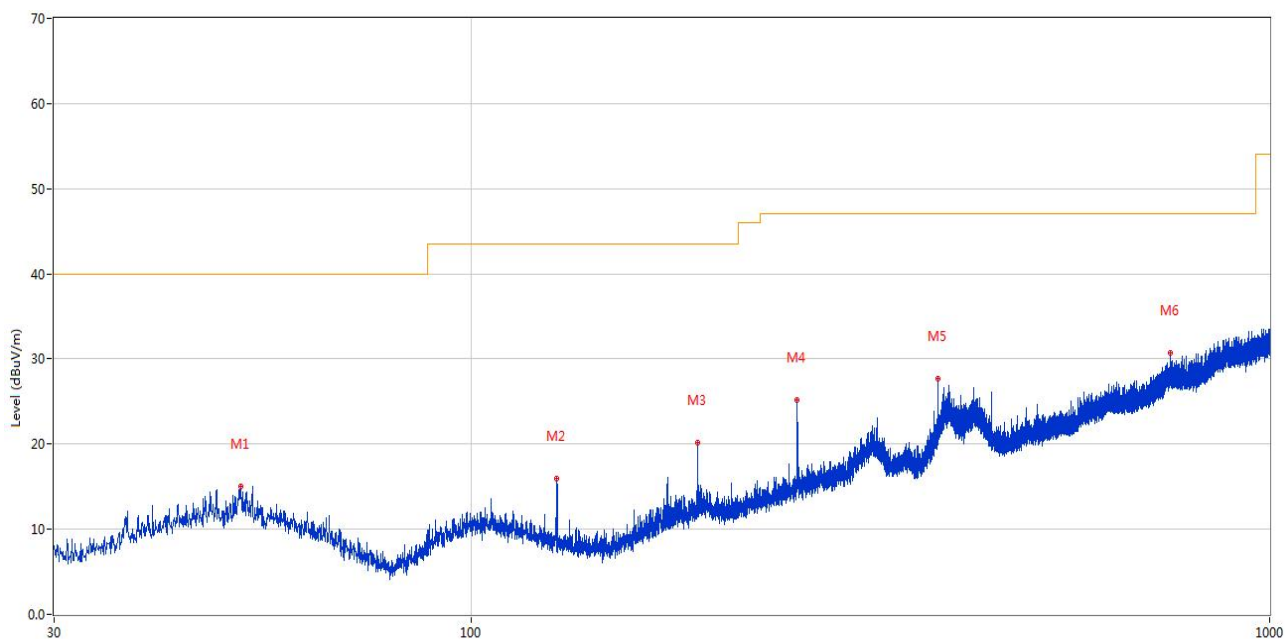


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	51.437	14.98	-24.07	40.0	25.02	Peak	99.00	100	Horizontal	Pass
2	128.018	15.93	-28.07	43.5	27.57	Peak	245.00	100	Horizontal	Pass
3	191.990	20.12	-24.91	43.5	23.38	Peak	141.60	100	Horizontal	Pass
4	256.010	25.23	-22.59	47.0	21.77	Peak	214.60	100	Horizontal	Pass
5	384.050	27.65	-18.93	47.0	19.35	Peak	73.00	100	Horizontal	Pass
6	750.613	30.76	-8.91	47.0	16.24	Peak	52.50	100	Horizontal	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Below 1 GHz						
EMI Receiver	Keysight	N9038A	MY53220118	2025.09.25	2026.09.24	☒
Amplifier (30MHz-1GHz)	COM-MV	ZT30-1000M	B2017119082	2025.11.25	2026.11.24	☒
Test Antenna- Bi-Log	SCHWARZB ECK	VULB 9163	9163-624	2024.07.06	2027.07.05	☒
Anechoic Chamber (#5)	ChangNing	9m*6m*6m	104-1	2025.10.13	2028.10.12	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☒


Test Mode 1

5) Test Antenna Vertical, 1 GHz – 12.75 GHz

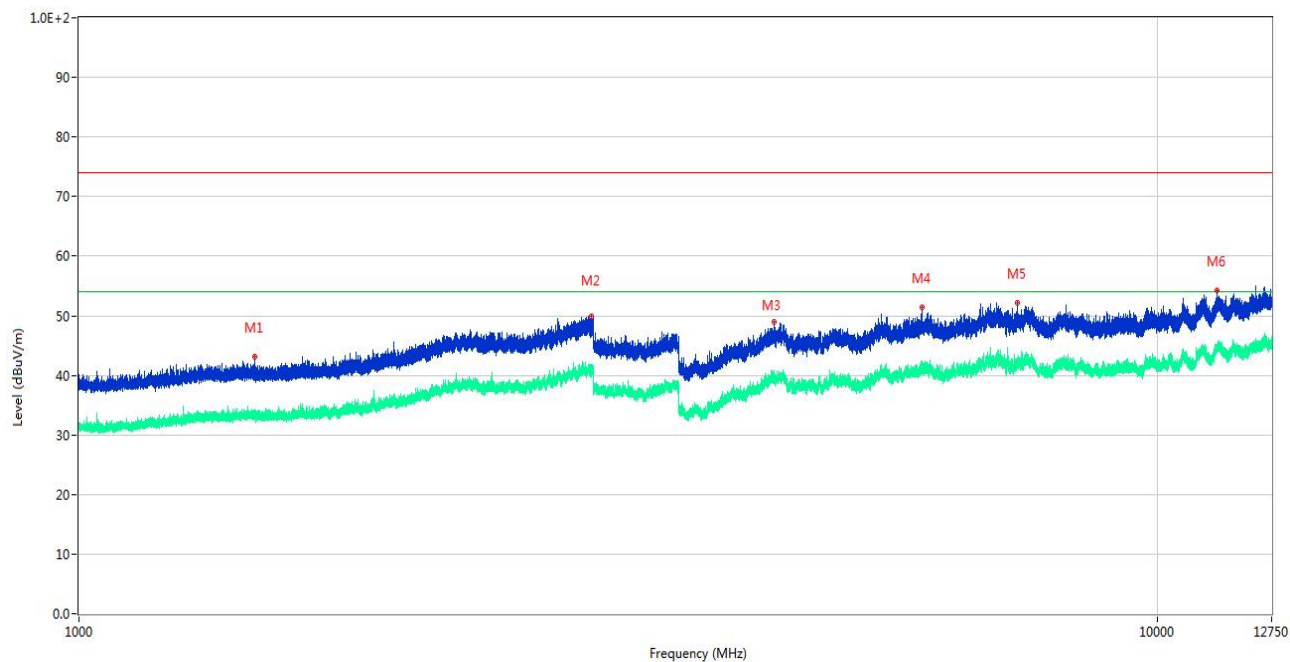

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1455.100	43.05	-13.31	74.0	30.95	Peak	97.80	100	Vertical	Pass
1**	1455.100	33.66	-13.31	54.0	20.34	AV	97.80	100	Vertical	Pass
2	2988.100	49.94	-3.62	74.0	24.06	Peak	328.50	100	Vertical	Pass
2**	2988.100	40.28	-3.62	54.0	13.72	AV	328.50	100	Vertical	Pass
3	4404.600	48.96	-0.31	74.0	25.04	Peak	329.50	100	Vertical	Pass
3**	4404.600	40.06	-0.31	54.0	13.94	AV	329.50	100	Vertical	Pass
4	6050.200	51.36	-0.30	74.0	22.64	Peak	252.10	100	Vertical	Pass
4**	6050.200	41.05	-0.30	54.0	12.95	AV	252.10	100	Vertical	Pass
5	7405.375	52.11	19.65	74.0	21.89	Peak	0.00	100	Vertical	Pass
5**	7405.375	41.62	19.65	54.0	12.38	AV	0.00	100	Vertical	Pass
6	11337.513	54.16	22.46	74.0	19.84	Peak	340.00	100	Vertical	Pass
6**	11337.513	45.00	22.46	54.0	9.00	AV	340.00	100	Vertical	Pass

6) Test Antenna Horizontal, 1 GHz – 12.75 GHz

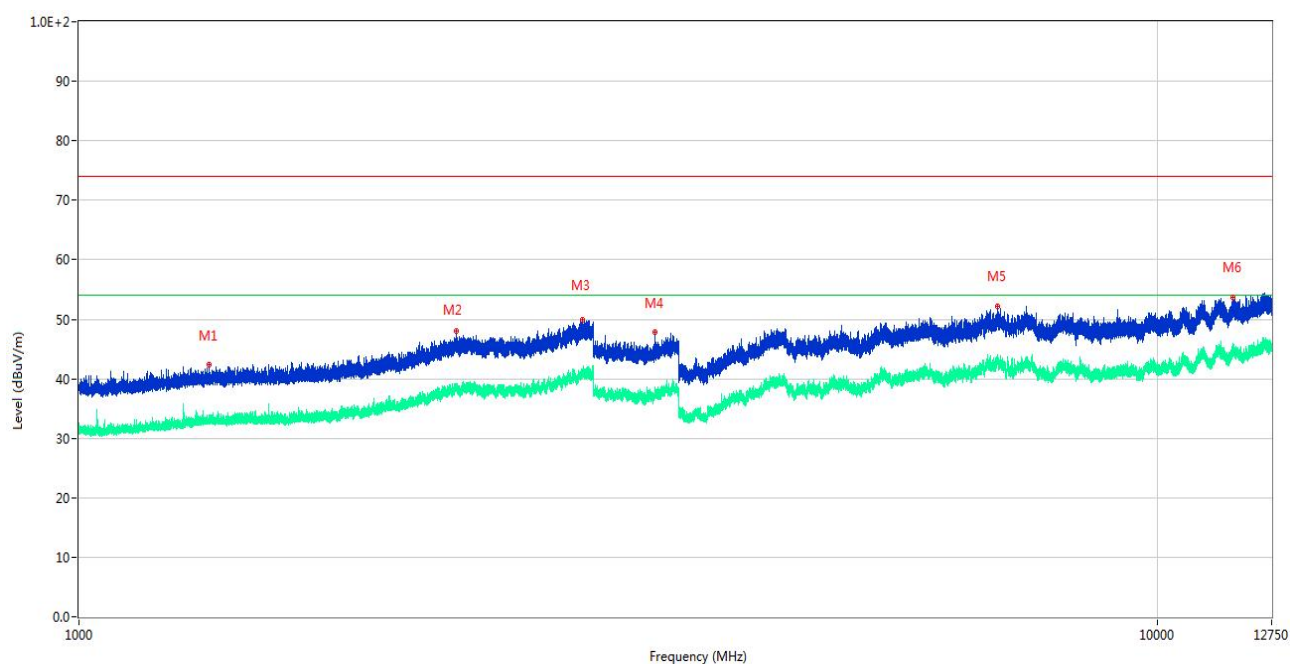

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1320.900	42.31	-13.40	74.0	31.69	Peak	360.00	100	Horizontal	Pass
1**	1320.900	32.91	-13.40	54.0	21.09	AV	360.00	100	Horizontal	Pass
2	2236.600	48.00	-7.91	74.0	26.00	Peak	210.60	100	Horizontal	Pass
2**	2236.600	38.87	-7.91	54.0	15.13	AV	210.60	100	Horizontal	Pass
3	2929.500	49.86	-4.20	74.0	24.14	Peak	60.70	100	Horizontal	Pass
3**	2929.500	41.13	-4.20	54.0	12.87	AV	60.70	100	Horizontal	Pass
4	3420.000	47.83	-6.67	74.0	26.17	Peak	115.00	100	Horizontal	Pass
4**	3420.000	38.61	-6.67	54.0	15.39	AV	115.00	100	Horizontal	Pass
5	7096.888	52.20	20.28	74.0	21.80	Peak	159.70	100	Horizontal	Pass
5**	7096.888	43.64	20.28	54.0	10.36	AV	159.70	100	Horizontal	Pass
6	11749.787	53.75	22.91	74.0	20.25	Peak	143.70	100	Horizontal	Pass
6**	11749.787	44.87	22.91	54.0	9.13	AV	143.70	100	Horizontal	Pass


Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Above 1 GHz						
EMI Receiver	Keysight	N9038A	MY53220118	2025.09.25	2026.09.24	☒
Amplifier (1-12GHz)	COM-MV	DLNAB-1000- 12000-002	18080279	2025.11.25	2026.11.24	☒
Amplifier (0.8-21GHz)	Mini-Circuits	ZVA-213-S+	619201336	2025.11.25	2026.11.24	☒
Test Antenna- Horn	SCHWARZB ECK	BBHA 9120D	1148	2025.05.28	2028.05.27	☒
Anechoic Chamber (#5)	ChangNing	9m*6m*6m	104-1	2025.10.13	2028.10.12	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☒

A.2 Conducted Emission, AC Ports

Sample No.	EE26060266-001-S03	Temperature	25.2℃
Humidity	50%RH	Pressure	100.1kPa
Test Engineer	Yang Yang	Test Date	2026.06.25


Test Mode 1

1) AC Ports - L Phase

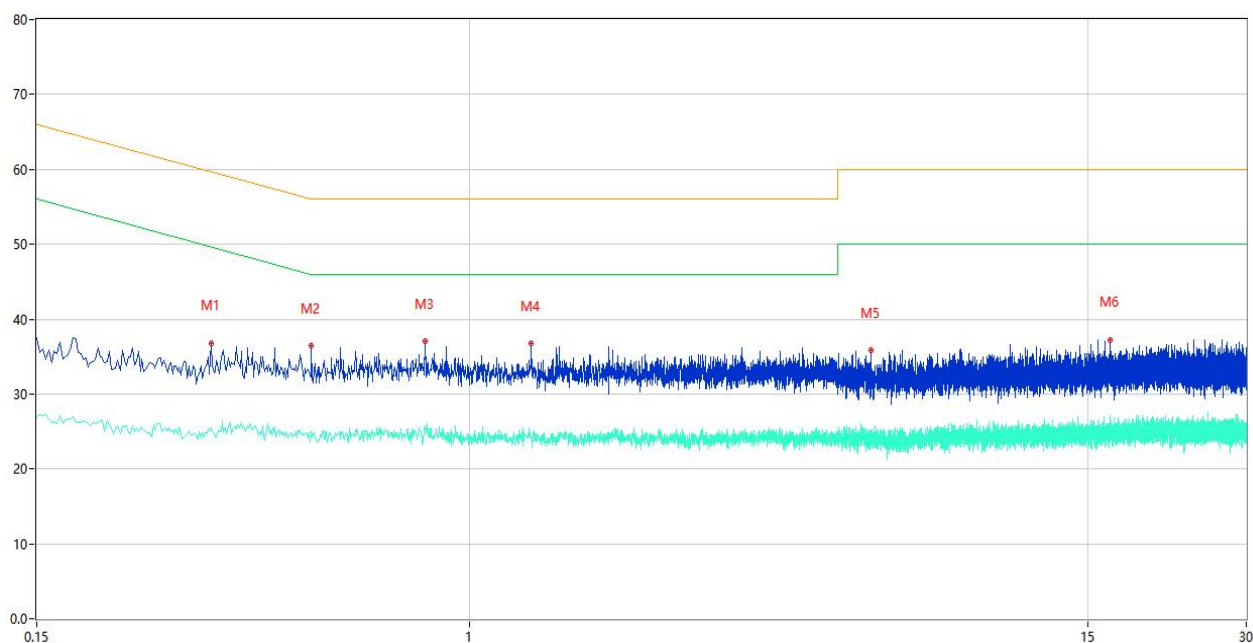

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.322	36.81	10.26	59.66	22.85	Peak	L	Pass
1**	0.322	25.46	10.26	49.66	24.20	AV	L	Pass
2	0.500	36.50	10.04	56.00	19.50	Peak	L	Pass
2**	0.500	24.97	10.04	46.00	21.03	AV	L	Pass
3	0.822	37.04	10.63	56.00	18.96	Peak	L	Pass
3**	0.822	25.70	10.63	46.00	20.30	AV	L	Pass
4	1.310	36.72	10.46	56.00	19.28	Peak	L	Pass
4**	1.310	24.47	10.46	46.00	21.53	AV	L	Pass
5	5.802	35.90	10.26	60.00	24.10	Peak	L	Pass
5**	5.802	24.77	10.26	50.00	25.23	AV	L	Pass
6	16.536	37.27	11.06	60.00	22.73	Peak	L	Pass
6**	16.536	25.71	11.06	50.00	24.29	AV	L	Pass

2) AC Ports - N Phase

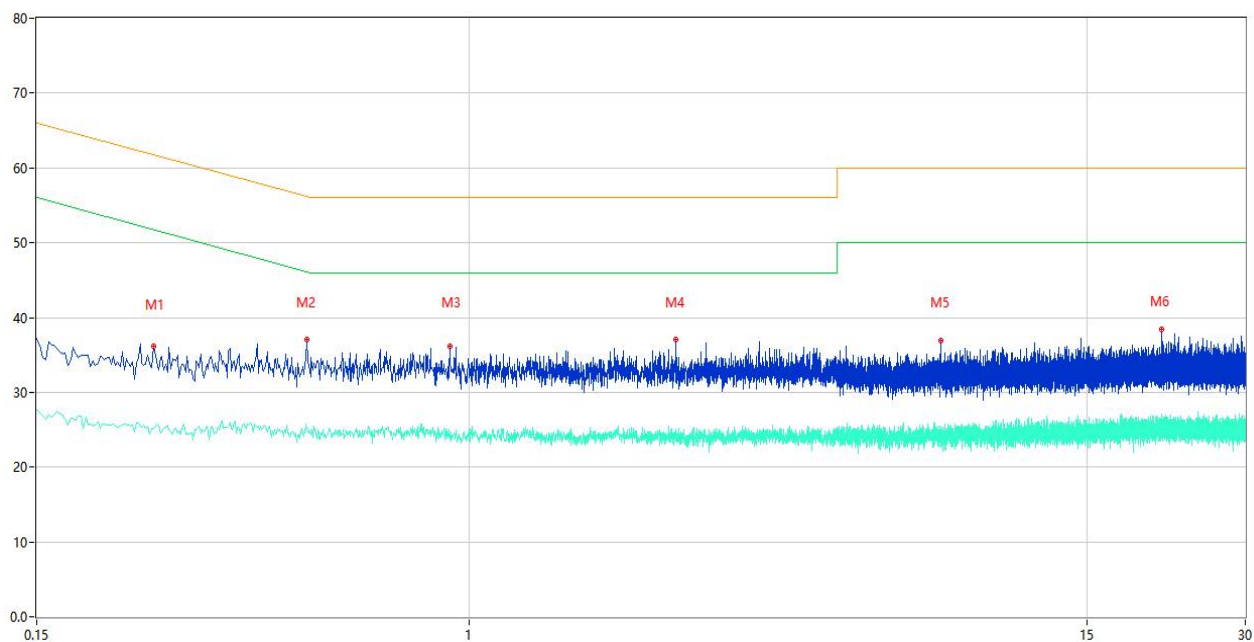

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.250	36.20	9.82	61.76	25.56	Peak	N	Pass
1**	0.250	25.15	9.82	51.76	26.61	AV	N	Pass
2	0.490	37.07	10.05	56.17	19.10	Peak	N	Pass
2**	0.490	25.11	10.05	46.17	21.06	AV	N	Pass
3	0.918	36.11	10.20	56.00	19.89	Peak	N	Pass
3**	0.918	23.72	10.20	46.00	22.28	AV	N	Pass
4	2.474	37.07	10.23	56.00	18.93	Peak	N	Pass
4**	2.474	24.66	10.23	46.00	21.34	AV	N	Pass
5	7.910	36.91	10.32	60.00	23.09	Peak	N	Pass
5**	7.910	24.62	10.32	50.00	25.38	AV	N	Pass
6	20.762	38.39	11.13	60.00	21.61	Peak	N	Pass
6**	20.762	26.48	11.13	50.00	23.52	AV	N	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2025.09.25	2026.09.24	☒
LISN	SCHWARZBECK	NSLK 8127	8127-687	2026.03.25	2027.03.24	☒
Shielded Room	ChangChuang	4m*4m*3m	662	2025.10.12	2028.10.11	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☒

ANNEX B TEST SETUP PHOTOS

Please refer the document “Ti-EE26060767-AE.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “Ti-EE26060767-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “Ti-EE26060767-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--