FCC Test Report

Report No.:	RFBCKS-WTW-P21020435
FCC ID:	2AZFR-AR1
Test Model:	AR1
Received Date:	Feb. 20, 2021
Test Date:	Feb. 25 to Mar. 10, 2021
Issued Date:	Apr. 21, 2021
Applicant:	Palo Alto Networks Inc.
Address:	3000 Tannery Way, Santa Clara, CA 95054
Issued By:	Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory
Lab Address:	E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan
Test Location:	E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan
FCC Registration / Designation Number:	723255 / TW2022

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record **4**

1 Certificate of Conformity **5**

2 Summary of Test Results **6**

2.1 Measurement Uncertainty 6
2.2 Modification Record 6

3 General Information **7**

3.1 General Description of EUT 7
3.2 Description of Test Modes 10
3.2.1 Test Mode Applicability and Tested Channel Detail 11
3.3 Duty Cycle of Test Signal 13
3.4 Description of Support Units 14
3.4.1 Configuration of System under Test 15
3.5 General Description of Applied Standards and References 16

4 Test Types and Results **17**

4.1 Radiated Emission and Bandedge Measurement 17
4.1.1 Limits of Radiated Emission and Bandedge Measurement 17
4.1.2 Test Instruments 18
4.1.3 Test Procedures 20
4.1.4 Deviation from Test Standard 21
4.1.5 Test Setup 21
4.1.6 EUT Operating Conditions 22
4.1.7 Test Results 23
4.2 Conducted Emission Measurement 37
4.2.1 Limits of Conducted Emission Measurement 37
4.2.2 Test Instruments 37
4.2.3 Test Procedures 38
4.2.4 Deviation from Test Standard 38
4.2.5 Test Setup 38
4.2.6 EUT Operating Conditions 38
4.2.7 Test Results 39
4.3 6dB Bandwidth Measurement 41
4.3.1 Limits of 6dB Bandwidth Measurement 41
4.3.2 Test Setup 41
4.3.3 Test Instruments 41
4.3.4 Test Procedure 41
4.3.5 Deviation from Test Standard 41
4.3.6 EUT Operating Conditions 41
4.3.7 Test Result 42
4.4 Conducted Output Power Measurement 44
4.4.1 Limits of Conducted Output Power Measurement 44
4.4.2 Test Setup 44
4.4.3 Test Instruments 44
4.4.4 Test Procedures 44
4.4.5 Deviation from Test Standard 44
4.4.6 EUT Operating Conditions 44
4.4.7 Test Results 45
4.5 Power Spectral Density Measurement 48
4.5.1 Limits of Power Spectral Density Measurement 48
4.5.2 Test Setup 48
4.5.3 Test Instruments 48
4.5.4 Test Procedure 48
4.5.5 Deviation from Test Standard 48
4.5.6 EUT Operating Condition 48

4.5.7 Test Results 49
4.6 Conducted Out of Band Emission Measurement 51
4.6.1 Limits of Conducted Out of Band Emission Measurement 51
4.6.2 Test Setup 51
4.6.3 Test Instruments 51
4.6.4 Test Procedure 51
4.6.5 Deviation from Test Standard 51
4.6.6 EUT Operating Condition 51
4.6.7 Test Results 51

5 Pictures of Test Arrangements 68

Annex A - Band-Edge Measurement 69

Appendix – Information of the Testing Laboratories 73

Release Control Record

Issue No.	Description	Date Issued
RFBCKS-WTW-P21020435	Original release.	Apr. 21, 2021

1 Certificate of Conformity

Product: Okyo Garde

Brand: OKYO

Test Model: AR1

Sample Status: Engineering sample

Applicant: Palo Alto Networks Inc.

Test Date: Feb. 25 to Mar. 10, 2021

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Cherry Chuo , **Date:** Apr. 21, 2021
Cherry Chuo / Specialist

Approved by : , **Date:** Apr. 21, 2021
Clark Lin / Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -17.52dB at 0.15000MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2389.93MHz and 2387.05MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex(MHF) not a standard connector.

Note:
1. For 2.4GHz band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Conducted emissions	-	2.5 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.5 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.1 dB
	18GHz ~ 40GHz	5.3 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Okyo Garde
Brand	OKYO
Test Model	AR1
Status of EUT	Engineering sample
Power Supply Rating	12Vdc from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT (20/40) mode in 2.4GHz 1024QAM for OFDMA in 11ax HE mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: up to 11 Mbps 802.11a/g: up to 54 Mbps 802.11n: up to 600 Mbps 802.11ac: up to 1733.3 Mbps 802.11ax: up to 2401.9 Mbps
Operating Frequency	**2.4GHz:** 2.412 ~ 2.462 GHz **5GHz:** 5.18~ 5.24 GHz, 5.26 ~ 5.32 GHz, 5.50 ~ 5.72 GHz, 5.745 ~ 5.825 GHz
Number of Channel	**2.4GHz:** 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 11 802.11n (HT40), VHT40, 802.11ax (HE40): 7 **5GHz:** 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 25 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 12 802.11ac (VHT80), 802.11ax (HE80): 6
Output Power	**CDD Mode:** **2.412 ~ 2.462 GHz:** 475.491 mW **5.18 ~ 5.24 GHz:** 441.267 mW **5.26 ~ 5.32 GHz:** 247.522 mW **5.5 ~ 5.72 GHz:** 242.505 mW **5.745 ~ 5.825 GHz:** 467.378 mW **Beamforming Mode:** **2.412 ~ 2.462 GHz:** 449.66 mW **5.18 ~ 5.24 GHz:** 331.426 mW **55.26 ~ 5.32 GHz:** 83.005 mW **5.5 ~ 5.72 GHz:** 86.533 mW **5.745 ~ 5.825 GHz:** 343.809 mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x1, AC Power cord x1 (Unshielded, 1m)
Cable Supplied	Ethernet cable x1 (Unshielded, 1m)

Note:

1. The EUT has below radios as following table:

Radio 1	Radio 2	Radio 3
WLAN 2.4GHz	WLAN 5GHz (Low Band)	WLAN 5GHz (High Band)

2. Simultaneously transmission condition.

Condition	Technology		
1	WLAN 2.4GHz	WLAN 5GHz (Low Band)	WLAN 5GHz (High Band)
Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.			

3. The EUT power needs to be supplied from a power adapter, the information is as below table:

Brand	Model No.	Spec.
LITEON	HA-1600-12	Input: 100-240Vac, ~1.7A, 50-60Hz Output: 12Vdc, 5.0A, 60.0W DC output cable (Unshielded, 1 m with one core)

4. The antennas provided to the EUT, please refer to the following table:

Antenna No.	RF Chain No.	Antenna Net Gain (dBi)	Frequency Range	Antenna Type	Connector Type	Cable Length
1	2.4G Chain3	3.6	2.4~2.4835 GHz	PCB	i-pex(MHF)	105 mm
	5G (Low Band) Chain3	5.2	5.15~5.35 GHz			
2	2.4G Chain2	2.9	2.4~2.4835 GHz	PCB	i-pex(MHF)	146 mm
	5G (Low Band) Chain2	4.6	5.15~5.35 GHz			
3	2.4G Chain1	3.6	2.4~2.4835 GHz	PCB	i-pex(MHF)	53 mm
	5G (Low Band) Chain1	4.7	5.15~5.35 GHz			
4	2.4G Chain0	3.5	2.4~2.4835 GHz	PCB	i-pex(MHF)	122 mm
	5G (Low Band) Chain0	4.5	5.15~5.35 GHz			
5	5G (High Band) Chain3	4.5	5.47~5.85 GHz	PCB	i-pex(MHF)	71 mm
6	5G (High Band) Chain2	4.6	5.47~5.85 GHz	PCB	i-pex(MHF)	119 mm
7	5G (High Band) Chain1	4.8	5.47~5.85 GHz	PCB	i-pex(MHF)	75 mm
8	5G (High Band) Chain0	4.4	5.47~5.85 GHz	PCB	i-pex(MHF)	54 mm

5. The EUT incorporates a MIMO function.

2.4GHz Band		
MODULATION MODE	**TX & RX CONFIGURATION**	
802.11b	4TX	4RX
802.11g	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
VHT20	4TX	4RX
VHT40	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX
5GHz Band		
MODULATION MODE	**TX & RX CONFIGURATION**	
802.11a	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
802.11ac (VHT20)	4TX	4RX
802.11ac (VHT40)	4TX	4RX
802.11ac (VHT80)	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX
802.11ax (HE80)	4TX	4RX

Note:
1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
2. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
3. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz), VHT mode for 20MHz (40MHz) and 802.11ax mode for 20MHz (40MHz), therefore the manufacturer will control the power for 802.11n/ VHT mode is the same as the 802.11ax mode or more lower than it and investigated worst case to representative mode in test report. (Final test mode refer to section 3.2.1)

6. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.
7. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20), VHT20 and 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40), VHT40 and 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G:** Radiated Emission above 1GHz & Bandedge Measurement **RE<1G:** Radiated Emission below 1GHz

PLC: Power Line Conducted Emission **APCM:** Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE PARAMETER
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1Mb/s
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6Mb/s
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Radiated Emission Test (Below 1GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE PARAMETER
802.11b	1 to 11	6	DSSS	DBPSK	1Mb/s

Power Line Conducted Emission Test:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE PARAMETER
802.11b	1 to 11	6	DSSS	DBPSK	1Mb/s

Antenna Port Conducted Measurement:

☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	**AVAILABLE CHANNEL**	**TESTED CHANNEL**	**MODULATION TECHNOLOGY**	**MODULATION TYPE**	**DATA RATE PARAMETER**
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1Mb/s
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6Mb/s
VHT20 (Output power only)	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
VHT40 (Output power only)	3 to 9	3, 6, 9	OFDM	BPSK	MCS0
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0
Beamforming Mode (output power only)					
MODE	**AVAILABLE CHANNEL**	**TESTED CHANNEL**	**MODULATION TECHNOLOGY**	**MODULATION TYPE**	**DATA RATE PARAMETER**
VHT20	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
VHT40	3 to 9	3, 6, 9	OFDM	BPSK	MCS0
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	25deg. C, 67%RH	120Vac, 60Hz	Sampson Chen
RE<1G	23deg. C, 64%RH	120Vac, 60Hz	Sampson Chen
PLC	25deg. C, 66%RH	120Vac, 60Hz	Sampson Chen
APCM	25deg. C, 60%RH	120Vac, 60Hz	Eric Peng

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is < 98%, duty factor shall be considered.

802.11b: Duty cycle = 11.816 ms /12.368 ms=0.955, Duty factor = 10 * log (1/Duty cycle) = 0.20 dB
802.11g: Duty cycle = 1.975 ms /2.104 ms=0.939, Duty factor = 10 * log (1/Duty cycle) = 0.27 dB
802.11ax (HE20): Duty cycle = 5.453 ms /5.696 ms=0.957, Duty factor = 10 * log (1/Duty cycle) = 0.19 dB
802.11ax (HE40): Duty cycle = 5.448 ms /5.773 ms=0.944, Duty factor = 10 * log (1/Duty cycle) = 0.25 dB

802.11b

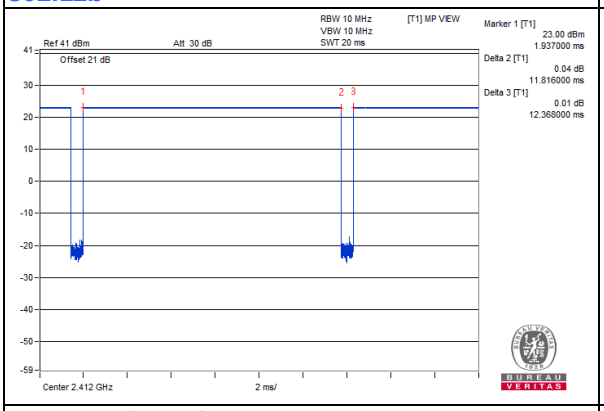

802.11g

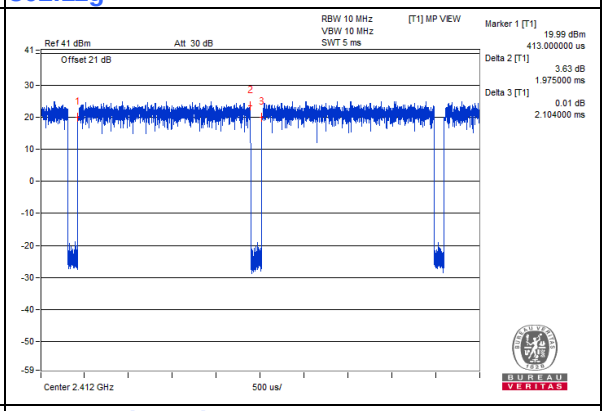

802.11ax (HE20)

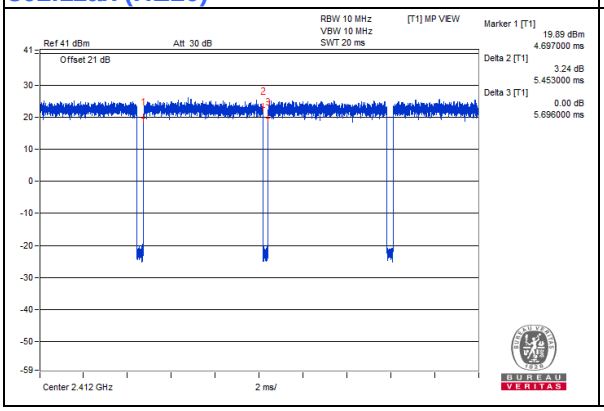

802.11ax (HE40)

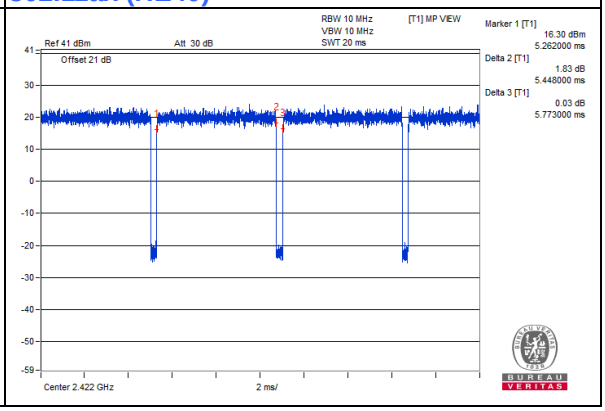

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No	FCC ID	Remarks
A.	Laptop	Lenovo	20U5S01X00 L14	PF-1ANPYA	NA	Provided by Lab
B.	Switch	D-Link	DGS-1005D	DR8WC92000523	NA	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1	No	1	Supplied by client
2.	AC Cable	1	1	No	0	Supplied by client
3.	RJ-45 Cable	1	1	No	0	Supplied by client
4.	RJ-45 Cable	2	10	No	0	Provided by Lab
5.	RJ-45 Cable	1	10	No	0	Provided by Lab

Note: The core(s) is(are) originally attached to the cable(s).

3.4.1 Configuration of System under Test

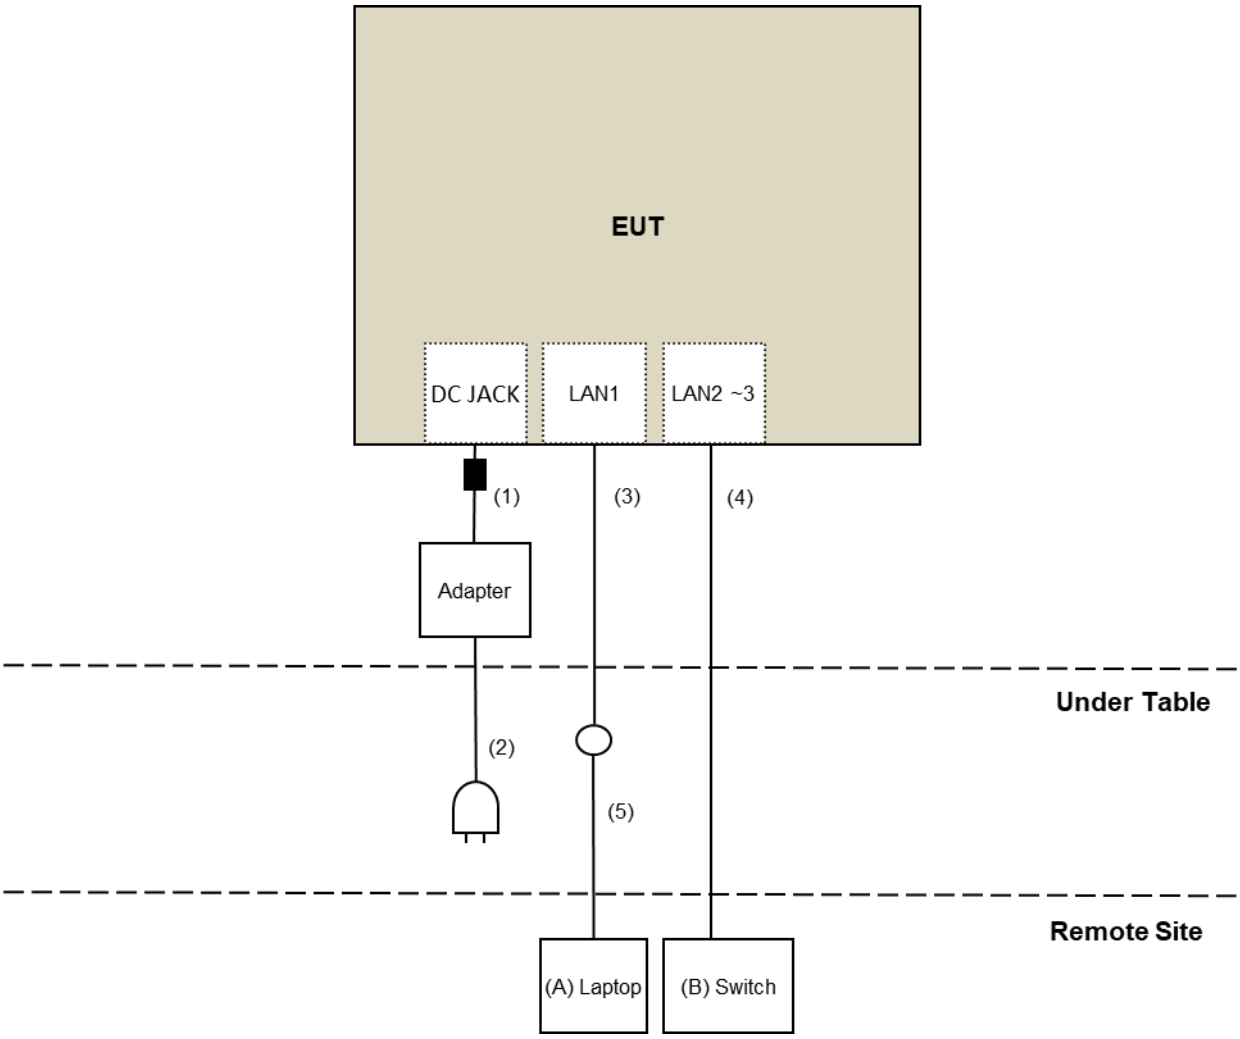

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC Part 15, Subpart C (15.247)
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 15.247 Meas Guidance v05r02
KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

For Radiated emission & Bandedge test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210202	Dec. 01, 2020	Nov. 30, 2021
Pre-Amplifier EMCI	EMC001340	980142	May 25, 2020	May 24, 2021
Loop Antenna Electro-Metrics	EM-6879	264	Mar. 05, 2021	Mar. 04, 2022
RF Cable	5D-FB	LOOPCAB-001	Jan. 07, 2021	Jan. 06, 2022
RF Cable	5D-FB	LOOPCAB-002	Jan. 07, 2021	Jan. 06, 2022
Pre-Amplifier EMCI	EMC330N	980701	Mar. 11, 2020	Mar. 10, 2021
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Nov. 06, 2020	Nov. 05, 2021
RF Cable	8D	966-6-1	Apr. 04, 2020	Apr. 03, 2021
RF Cable	8D	966-4-2	Mar. 18, 2020	Mar. 17, 2021
RF Cable	8D	966-4-3	Mar. 18, 2020	Mar. 17, 2021
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-03	Jan. 11, 2021	Jan. 10, 2022
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Nov. 22, 2020	Nov. 21, 2021
Pre-Amplifier EMCI	EMC 12630 SE	980638	Apr. 08, 2020	Apr. 07, 2021
RF Cable	EMC104-SM-SM-1200	160922	Dec. 25, 2020	Dec. 24, 2021
RF Cable	EMC104-SM-SM-2000	180502	Apr. 29, 2020	Apr. 28, 2021
RF Cable	EMC104-SM-SM-6000	180418	Apr. 29, 2020	Apr. 28, 2021
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 11, 2021	Jan. 10, 2022
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 22, 2020	Nov. 21, 2021
RF Cable	EMC102-KM-KM-1200	160924	Jan. 11, 2021	Jan. 10, 2022
RF Cable	EMC-KM-KM-4000	200214	Mar. 11, 2020	Mar. 10, 2021
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Tested Date: Mar. 09 to 10, 2021

For other test

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	May 29, 2020	May 28, 2021
Power meter Anritsu	ML2495A	1529002	July 22, 2020	July 21, 2021
Power sensor Anritsu	MA2411B	1339443	July 22, 2020	July 21, 2021
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 14, 2020	Apr. 13, 2021
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA

NOTE:
1. The test was performed in Oven room 2.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. Tested Date: Mar. 06, 2021

4.1.3 Test Procedures

For Radiated emission below 30MHz

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is ≥ 1/T (Duty cycle < 98%) or 10Hz (Duty cycle ≥ 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard

No deviation.

4.1.5 Test Setup

For Radiated emission below 30MHz

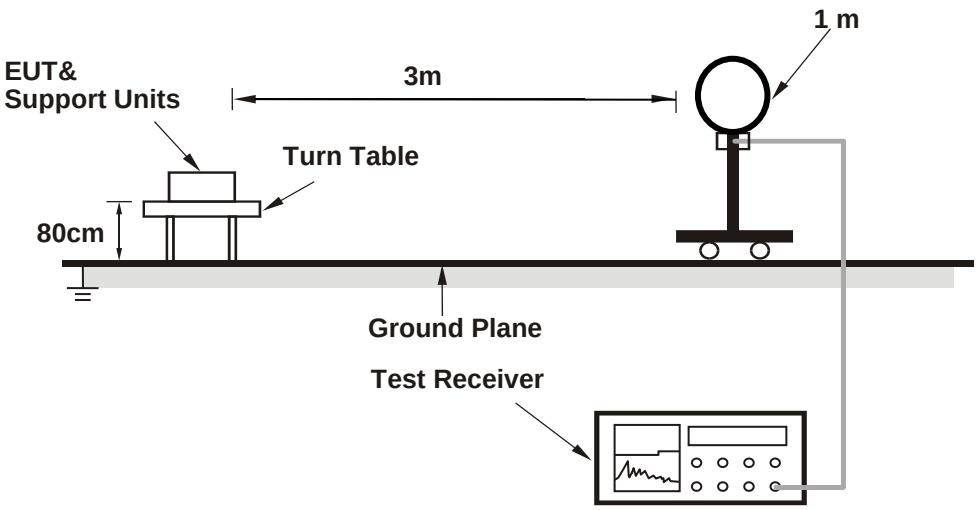

For Radiated emission 30MHz to 1GHz

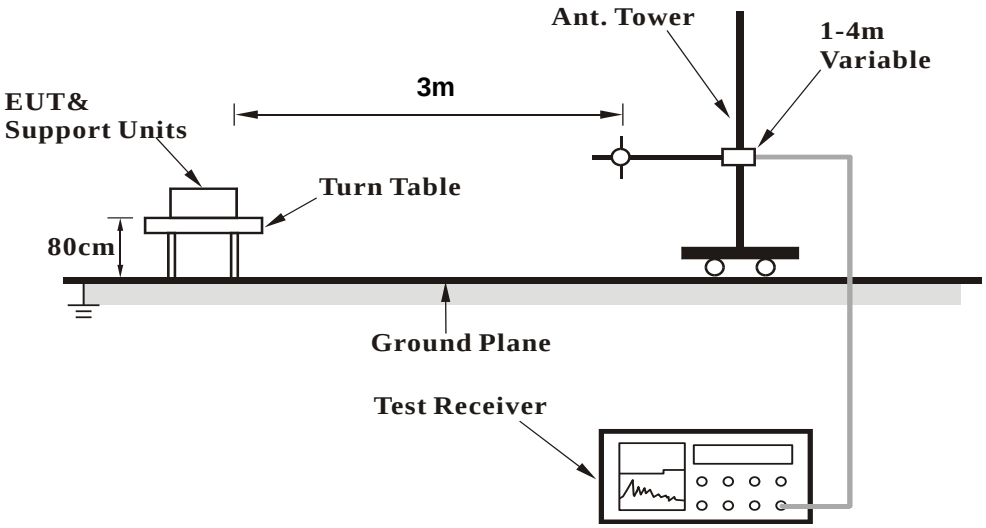

For Radiated emission above 1GHz

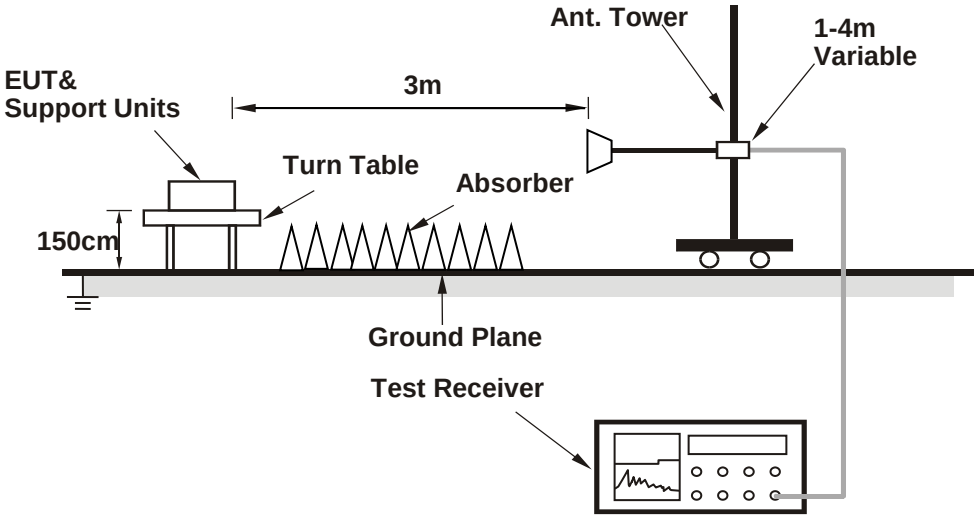

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

a. Connected the EUT with the Laptop which is placed on remote site.
b. Controlling software (qdart_conn.win.1.0_installer_00079.1_CS.zip) has been activated to set the EUT under transmission condition continuously at specific channel frenquency.

4.1.7 Test Results

Above 1GHz Data：

RF Mode	TX 802.11b	**Channel**	CH 1：2412 MHz
Frequency Range	1GHz ~ 25GHz	**Detector Function**	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	2389.21	56.0 PK	74.0	-18.0	1.72 H	126	60.4	-4.4
2	2389.21	47.3 AV	54.0	-6.7	1.72 H	126	51.7	-4.4
3	*2412.00	118.4 PK			1.72 H	126	122.8	-4.4
4	*2412.00	116.2 AV			1.72 H	126	120.6	-4.4
5	4824.00	46.0 PK	74.0	-28.0	1.99 H	160	45.9	0.1
6	4824.00	44.1 AV	54.0	-9.9	1.99 H	160	44.0	0.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	2388.90	55.5 PK	74.0	-18.5	1.80 V	231	59.9	-4.4
2	2388.90	45.7 AV	54.0	-8.3	1.80 V	231	50.1	-4.4
3	*2412.00	116.9 PK			1.80 V	231	121.3	-4.4
4	*2412.00	113.4 AV			1.80 V	231	117.8	-4.4
5	4824.00	41.7 PK	74.0	-32.3	1.77 V	150	41.6	0.1
6	4824.00	37.6 AV	54.0	-16.4	1.77 V	150	37.5	0.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 6：2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.1 PK	74.0	-19.9	1.97 H	124	58.6	-4.5
2	2390.00	42.0 AV	54.0	-12.0	1.97 H	124	46.5	-4.5
3	*2437.00	117.6 PK			1.97 H	124	122.0	-4.4
4	*2437.00	115.3 AV			1.97 H	124	119.7	-4.4
5	2483.50	53.6 PK	74.0	-20.4	1.97 H	124	58.1	-4.5
6	2483.50	41.9 AV	54.0	-12.1	1.97 H	124	46.4	-4.5
7	4874.00	46.3 PK	74.0	-27.7	1.00 H	263	46.2	0.1
8	4874.00	44.5 AV	54.0	-9.5	1.00 H	263	44.4	0.1
9	7311.00	41.2 PK	74.0	-32.8	1.35 H	187	34.9	6.3
10	7311.00	33.4 AV	54.0	-20.6	1.35 H	187	27.1	6.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.5 PK	74.0	-19.5	2.03 V	61	59.0	-4.5
2	2390.00	42.8 AV	54.0	-11.2	2.03 V	61	47.3	-4.5
3	*2437.00	116.6 PK			2.03 V	61	121.0	-4.4
4	*2437.00	114.2 AV			2.03 V	61	118.6	-4.4
5	2483.50	53.2 PK	74.0	-20.8	2.03 V	61	57.7	-4.5
6	2483.50	42.3 AV	54.0	-11.7	2.03 V	61	46.8	-4.5
7	4874.00	41.6 PK	74.0	-32.4	1.76 V	152	41.5	0.1
8	4874.00	37.5 AV	54.0	-16.5	1.76 V	152	37.4	0.1
9	7311.00	41.1 PK	74.0	-32.9	1.58 V	246	34.8	6.3
10	7311.00	32.4 AV	54.0	-21.6	1.58 V	246	26.1	6.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 11：2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	117.1 PK			1.91 H	131	121.5	-4.4
2	*2462.00	115.5 AV			1.91 H	131	119.9	-4.4
3	2484.83	54.7 PK	74.0	-19.3	1.91 H	131	59.2	-4.5
4	2484.83	44.6 AV	54.0	-9.4	1.91 H	131	49.1	-4.5
5	4924.00	41.8 PK	74.0	-32.2	1.51 H	259	41.5	0.3
6	4924.00	39.6 AV	54.0	-14.4	1.51 H	259	39.3	0.3
7	7386.00	41.1 PK	74.0	-32.9	1.33 H	189	34.5	6.6
8	7386.00	33.3 AV	54.0	-20.7	1.33 H	189	26.7	6.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.6 PK			2.02 V	46	121.0	-4.4
2	*2462.00	114.2 AV			2.02 V	46	118.6	-4.4
3	2484.80	54.3 PK	74.0	-19.7	2.02 V	46	58.8	-4.5
4	2484.80	42.9 AV	54.0	-11.1	2.02 V	46	47.4	-4.5
5	4924.00	41.3 PK	74.0	-32.7	1.71 V	145	41.0	0.3
6	4924.00	37.0 AV	54.0	-17.0	1.71 V	145	36.7	0.3
7	7386.00	40.5 PK	74.0	-33.5	1.58 V	237	33.9	6.6
8	7386.00	31.9 AV	54.0	-22.1	1.58 V	237	25.3	6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 1：2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.93	64.8 PK	74.0	-9.2	1.74 H	127	69.2	-4.4
2	2389.93	53.3 AV	54.0	-0.7	1.74 H	127	57.7	-4.4
3	*2412.00	117.8 PK			1.74 H	127	122.2	-4.4
4	*2412.00	108.7 AV			1.74 H	127	113.1	-4.4
5	4824.00	41.1 PK	74.0	-32.9	1.49 H	235	41.0	0.1
6	4824.00	39.2 AV	54.0	-14.8	1.49 H	235	39.1	0.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.0 PK	74.0	-10.0	1.83 V	132	68.5	-4.5
2	2390.00	49.7 AV	54.0	-4.3	1.83 V	132	54.2	-4.5
3	*2412.00	115.6 PK			1.83 V	132	120.0	-4.4
4	*2412.00	105.9 AV			1.83 V	132	110.3	-4.4
5	4824.00	41.5 PK	74.0	-32.5	1.77 V	163	41.4	0.1
6	4824.00	37.3 AV	54.0	-16.7	1.77 V	163	37.2	0.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 6：2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.7 PK	74.0	-18.3	1.99 H	128	60.2	-4.5
2	2390.00	42.6 AV	54.0	-11.4	1.99 H	128	47.1	-4.5
3	*2437.00	117.1 PK			1.99 H	128	121.5	-4.4
4	*2437.00	108.1 AV			1.99 H	128	112.5	-4.4
5	2483.50	55.9 PK	74.0	-18.1	1.99 H	128	60.4	-4.5
6	2483.50	42.6 AV	54.0	-11.4	1.99 H	128	47.1	-4.5
7	4874.00	41.2 PK	74.0	-32.8	1.46 H	249	41.1	0.1
8	4874.00	39.2 AV	54.0	-14.8	1.46 H	249	39.1	0.1
9	7311.00	41.2 PK	74.0	-32.8	1.31 H	193	34.9	6.3
10	7311.00	33.4 AV	54.0	-20.6	1.31 H	193	27.1	6.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.9 PK	74.0	-19.1	2.00 V	63	59.4	-4.5
2	2390.00	43.0 AV	54.0	-11.0	2.00 V	63	47.5	-4.5
3	*2437.00	115.9 PK			2.00 V	63	120.3	-4.4
4	*2437.00	106.5 AV			2.00 V	63	110.9	-4.4
5	2483.50	52.7 PK	74.0	-21.3	2.00 V	63	57.2	-4.5
6	2483.50	42.0 AV	54.0	-12.0	2.00 V	63	46.5	-4.5
7	4874.00	42.1 PK	74.0	-31.9	1.81 V	156	42.0	0.1
8	4874.00	37.7 AV	54.0	-16.3	1.81 V	156	37.6	0.1
9	7311.00	41.0 PK	74.0	-33.0	1.60 V	236	34.7	6.3
10	7311.00	32.3 AV	54.0	-21.7	1.60 V	236	26.0	6.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 11：2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	115.7 PK			1.87 H	127	120.1	-4.4
2	*2462.00	108.2 AV			1.87 H	127	112.6	-4.4
3	2483.63	63.0 PK	74.0	-11.0	1.87 H	127	67.5	-4.5
4	2483.63	53.0 AV	54.0	-1.0	1.87 H	127	57.5	-4.5
5	4924.00	42.3 PK	74.0	-31.7	1.47 H	267	42.0	0.3
6	4924.00	39.8 AV	54.0	-14.2	1.47 H	267	39.5	0.3
7	7386.00	40.5 PK	74.0	-33.5	1.30 H	191	33.9	6.6
8	7386.00	32.9 AV	54.0	-21.1	1.30 H	191	26.3	6.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.8 PK			2.26 V	135	119.2	-4.4
2	*2462.00	105.3 AV			2.26 V	135	109.7	-4.4
3	2484.80	54.6 PK	74.0	-19.4	2.26 V	135	59.1	-4.5
4	2484.80	43.0 AV	54.0	-11.0	2.26 V	135	47.5	-4.5
5	4924.00	41.5 PK	74.0	-32.5	1.73 V	138	41.2	0.3
6	4924.00	37.5 AV	54.0	-16.5	1.73 V	138	37.2	0.3
7	7386.00	40.8 PK	74.0	-33.2	1.56 V	261	34.2	6.6
8	7386.00	32.1 AV	54.0	-21.9	1.56 V	261	25.5	6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 1：2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.93	65.5 PK	74.0	-8.5	1.74 H	125	69.9	-4.4
2	**2389.93**	**53.9 AV**	**54.0**	**-0.1**	**1.74 H**	**125**	**58.3**	**-4.4**
3	*2412.00	119.2 PK			1.74 H	125	123.6	-4.4
4	*2412.00	108.2 AV			1.74 H	125	112.6	-4.4
5	4824.00	41.0 PK	74.0	-33.0	1.45 H	233	40.9	0.1
6	4824.00	39.2 AV	54.0	-14.8	1.45 H	233	39.1	0.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.10	64.9 PK	74.0	-9.1	2.16 V	215	69.3	-4.4
2	2388.10	50.2 AV	54.0	-3.8	2.16 V	215	54.6	-4.4
3	*2412.00	116.7 PK			2.16 V	215	121.1	-4.4
4	*2412.00	105.6 AV			2.16 V	215	110.0	-4.4
5	4824.00	41.9 PK	74.0	-32.1	1.81 V	148	41.8	0.1
6	4824.00	37.3 AV	54.0	-16.7	1.81 V	148	37.2	0.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 6：2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.6 PK	74.0	-20.4	1.79 H	121	58.1	-4.5
2	2390.00	43.7 AV	54.0	-10.3	1.79 H	121	48.2	-4.5
3	*2437.00	121.4 PK			1.79 H	121	125.8	-4.4
4	*2437.00	109.6 AV			1.79 H	121	114.0	-4.4
5	2483.50	53.9 PK	74.0	-20.1	1.79 H	121	58.4	-4.5
6	2483.50	43.2 AV	54.0	-10.8	1.79 H	121	47.7	-4.5
7	4874.00	41.7 PK	74.0	-32.3	1.54 H	259	41.6	0.1
8	4874.00	39.4 AV	54.0	-14.6	1.54 H	259	39.3	0.1
9	7311.00	41.3 PK	74.0	-32.7	1.37 H	198	35.0	6.3
10	7311.00	33.5 AV	54.0	-20.5	1.37 H	198	27.2	6.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.4 PK	74.0	-19.6	1.99 V	56	58.9	-4.5
2	2390.00	42.8 AV	54.0	-11.2	1.99 V	56	47.3	-4.5
3	*2437.00	115.7 PK			1.99 V	56	120.1	-4.4
4	*2437.00	106.5 AV			1.99 V	56	110.9	-4.4
5	2483.50	53.3 PK	74.0	-20.7	1.99 V	56	57.8	-4.5
6	2483.50	42.3 AV	54.0	-11.7	1.99 V	56	46.8	-4.5
7	4874.00	41.4 PK	74.0	-32.6	1.73 V	143	41.3	0.1
8	4874.00	37.5 AV	54.0	-16.5	1.73 V	143	37.4	0.1
9	7311.00	41.1 PK	74.0	-32.9	1.61 V	261	34.8	6.3
10	7311.00	32.3 AV	54.0	-21.7	1.61 V	261	26.0	6.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 11：2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	118.8 PK			1.93 H	104	123.2	-4.4
2	*2462.00	107.9 AV			1.93 H	104	112.3	-4.4
3	2483.71	64.2 PK	74.0	-9.8	1.93 H	104	68.7	-4.5
4	2483.71	53.4 AV	54.0	-0.6	1.93 H	104	57.9	-4.5
5	4924.00	41.1 PK	74.0	-32.9	1.55 H	265	40.8	0.3
6	4924.00	39.1 AV	54.0	-14.9	1.55 H	265	38.8	0.3
7	7386.00	41.5 PK	74.0	-32.5	1.29 H	190	34.9	6.6
8	7386.00	33.4 AV	54.0	-20.6	1.29 H	190	26.8	6.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.4 PK			2.13 V	223	120.8	-4.4
2	*2462.00	105.4 AV			2.13 V	223	109.8	-4.4
3	2484.00	58.0 PK	74.0	-16.0	2.13 V	223	62.5	-4.5
4	2484.00	46.1 AV	54.0	-7.9	2.13 V	223	50.6	-4.5
5	4924.00	41.7 PK	74.0	-32.3	1.74 V	162	41.4	0.3
6	4924.00	37.8 AV	54.0	-16.2	1.74 V	162	37.5	0.3
7	7386.00	41.3 PK	74.0	-32.7	1.58 V	254	34.7	6.6
8	7386.00	32.5 AV	54.0	-21.5	1.58 V	254	25.9	6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 3：2422 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.05	65.2 PK	74.0	-8.8	2.15 H	111	69.6	-4.4
2	**2387.05**	**53.9 AV**	**54.0**	**-0.1**	**2.15 H**	**111**	**58.3**	**-4.4**
3	*2422.00	116.4 PK			2.15 H	111	120.8	-4.4
4	*2422.00	105.7 AV			2.15 H	111	110.1	-4.4
5	4844.00	42.4 PK	74.0	-31.6	1.48 H	245	42.3	0.1
6	4844.00	40.0 AV	54.0	-14.0	1.48 H	245	39.9	0.1
7	7266.00	41.0 PK	74.0	-33.0	1.29 H	182	34.8	6.2
8	7266.00	33.0 AV	54.0	-21.0	1.29 H	182	26.8	6.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2385.50	59.5 PK	74.0	-14.5	2.32 V	44	63.9	-4.4
2	2385.50	47.4 AV	54.0	-6.6	2.32 V	44	51.8	-4.4
3	*2422.00	114.7 PK			2.32 V	44	119.1	-4.4
4	*2422.00	102.8 AV			2.32 V	44	107.2	-4.4
5	4844.00	42.2 PK	74.0	-31.8	1.73 V	146	42.1	0.1
6	4844.00	37.8 AV	54.0	-16.2	1.73 V	146	37.7	0.1
7	7266.00	40.8 PK	74.0	-33.2	1.60 V	258	34.6	6.2
8	7266.00	32.0 AV	54.0	-22.0	1.60 V	258	25.8	6.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 6：2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.7 PK	74.0	-16.3	2.11 H	108	62.2	-4.5
2	2390.00	45.1 AV	54.0	-8.9	2.11 H	108	49.6	-4.5
3	*2437.00	116.7 PK			2.11 H	108	121.1	-4.4
4	*2437.00	106.1 AV			2.11 H	108	110.5	-4.4
5	2483.50	65.9 PK	74.0	-8.1	2.11 H	108	70.4	-4.5
6	2483.50	53.4 AV	54.0	-0.6	2.11 H	108	57.9	-4.5
7	4874.00	41.5 PK	74.0	-32.5	1.46 H	250	41.4	0.1
8	4874.00	39.4 AV	54.0	-14.6	1.46 H	250	39.3	0.1
9	7311.00	41.7 PK	74.0	-32.3	1.34 H	203	35.4	6.3
10	7311.00	33.8 AV	54.0	-20.2	1.34 H	203	27.5	6.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.2 PK	74.0	-18.8	1.98 V	73	59.7	-4.5
2	2390.00	43.1 AV	54.0	-10.9	1.98 V	73	47.6	-4.5
3	*2437.00	115.2 PK			1.98 V	73	119.6	-4.4
4	*2437.00	103.4 AV			1.98 V	73	107.8	-4.4
5	2483.50	52.9 PK	74.0	-21.1	1.98 V	73	57.4	-4.5
6	2483.50	42.1 AV	54.0	-11.9	1.98 V	73	46.6	-4.5
7	4874.00	41.7 PK	74.0	-32.3	1.78 V	151	41.6	0.1
8	4874.00	37.6 AV	54.0	-16.4	1.78 V	151	37.5	0.1
9	7311.00	40.7 PK	74.0	-33.3	1.55 V	240	34.4	6.3
10	7311.00	32.2 AV	54.0	-21.8	1.55 V	240	25.9	6.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 9：2452 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	115.8 PK			1.91 H	106	120.2	-4.4
2	*2452.00	105.3 AV			1.91 H	106	109.7	-4.4
3	2483.50	65.0 PK	74.0	-9.0	1.91 H	106	69.5	-4.5
4	2483.50	53.8 AV	54.0	-0.2	1.91 H	106	58.3	-4.5
5	4904.00	41.6 PK	74.0	-32.4	1.57 H	253	41.4	0.2
6	4904.00	39.2 AV	54.0	-14.8	1.57 H	253	39.0	0.2
7	7356.00	41.5 PK	74.0	-32.5	1.31 H	189	35.1	6.4
8	7356.00	33.5 AV	54.0	-20.5	1.31 H	189	27.1	6.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	114.3 PK			2.58 V	52	118.7	-4.4
2	*2452.00	102.5 AV			2.58 V	52	106.9	-4.4
3	2485.60	70.5 PK	74.0	-3.5	2.58 V	52	75.0	-4.5
4	2485.60	52.1 AV	54.0	-1.9	2.58 V	52	56.6	-4.5
5	4904.00	41.0 PK	74.0	-33.0	1.74 V	164	40.8	0.2
6	4904.00	37.2 AV	54.0	-16.8	1.74 V	164	37.0	0.2
7	7356.00	41.1 PK	74.0	-32.9	1.60 V	239	34.7	6.4
8	7356.00	32.4 AV	54.0	-21.6	1.60 V	239	26.0	6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Below 1GHz Data:

RF Mode	TX 802.11b	Channel	CH 6：2437 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	84.05	28.5 QP	40.0	-11.5	2.50 H	113	42.9	-14.4
2	102.70	30.3 QP	43.5	-13.2	2.00 H	294	42.8	-12.5
3	157.53	26.9 QP	43.5	-16.6	1.50 H	103	35.4	-8.5
4	405.49	27.4 QP	46.0	-18.6	2.50 H	360	33.0	-5.6
5	620.44	31.6 QP	46.0	-14.4	1.50 H	49	32.2	-0.6
6	742.20	32.9 QP	46.0	-13.1	2.50 H	137	31.4	1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

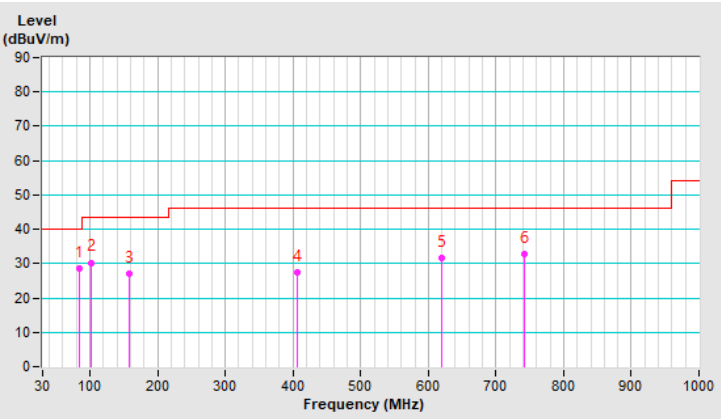

RF Mode	TX 802.11b	Channel	CH 6：2437 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.69	36.0 QP	40.0	-4.0	1.00 V	354	45.5	-9.5
2	106.43	26.3 QP	43.5	-17.2	1.00 V	5	38.2	-11.9
3	133.90	25.8 QP	43.5	-17.7	1.50 V	80	35.2	-9.4
4	455.34	28.1 QP	46.0	-17.9	1.00 V	286	32.2	-4.1
5	651.30	31.4 QP	46.0	-14.6	2.50 V	350	31.7	-0.3
6	933.22	35.8 QP	46.0	-10.2	1.00 V	282	31.4	4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

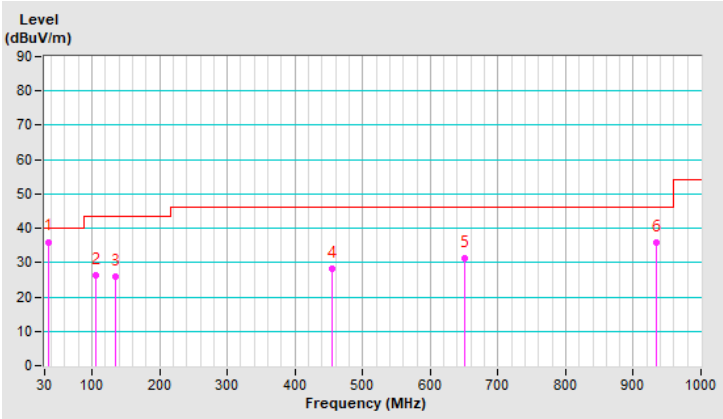

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 20, 2020	Oct. 19, 2021
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 27, 2020	Oct. 26, 2021
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 19, 2020	Mar. 18, 2021
50 ohms Terminator	50	3	Oct. 26, 2020	Oct. 25, 2021
RF Cable	5D-FB	COCCAB-001	Sep. 26, 2020	Sep. 25, 2021
Fixed attenuator EMCI	STI02-2200-10	005	Aug. 29, 2020	Aug. 28, 2021
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
3 Tested Date: Feb. 25, 2021

4.2.3 Test Procedures

a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.

b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

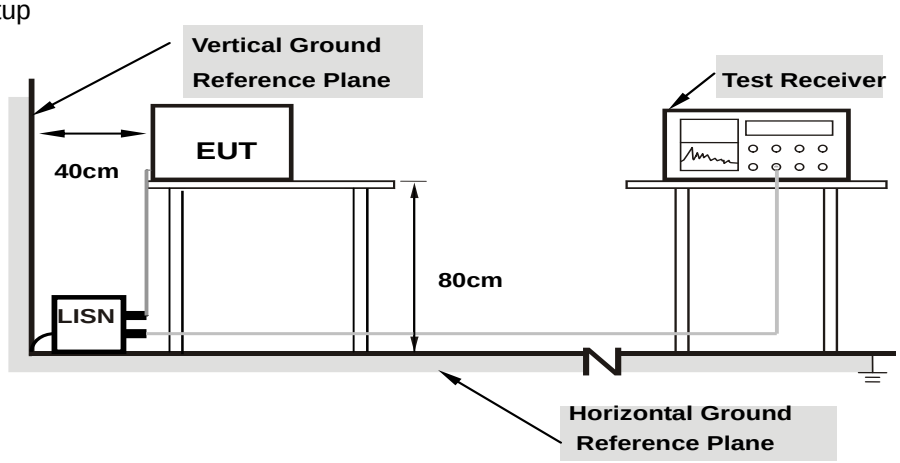

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.

4.2.7 Test Results

RF Mode	TX 802.11b	Channel	CH 6：2437 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	**0.15000**	**9.95**	**38.53**	**24.19**	**48.48**	**34.14**	**66.00**	**56.00**	**-17.52**	**-21.86**
2	0.18906	9.97	30.69	12.52	40.66	22.49	64.08	54.08	-23.42	-31.59
3	0.23594	9.97	25.57	10.74	35.54	20.71	62.24	52.24	-26.70	-31.53
4	0.30625	9.98	17.60	5.70	27.58	15.68	60.07	50.07	-32.49	-34.39
5	0.47813	10.00	13.16	6.87	23.16	16.87	56.37	46.37	-33.21	-29.50
6	0.66172	10.01	19.05	11.94	29.06	21.95	56.00	46.00	-26.94	-24.05

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

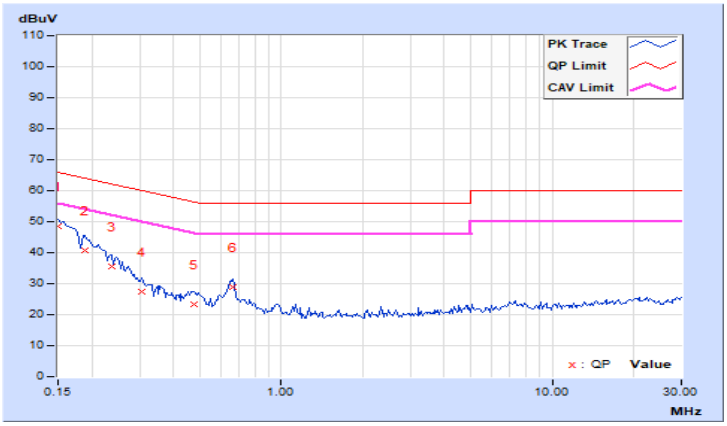

RF Mode	TX 802.11b	Channel	CH 6：2437 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	9.93	32.16	12.41	42.09	22.34	65.38	55.38	-23.29	-33.04
2	0.20078	9.95	27.90	13.96	37.85	23.91	63.58	53.58	-25.73	-29.67
3	0.23984	9.95	23.77	12.53	33.72	22.48	62.10	52.10	-28.38	-29.62
4	0.29453	9.95	17.42	5.58	27.37	15.53	60.40	50.40	-33.03	-34.87
5	0.66563	9.98	12.27	6.08	22.25	16.06	56.00	46.00	-33.75	-29.94
6	3.31641	10.09	6.56	3.85	16.65	13.94	56.00	46.00	-39.35	-32.06

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

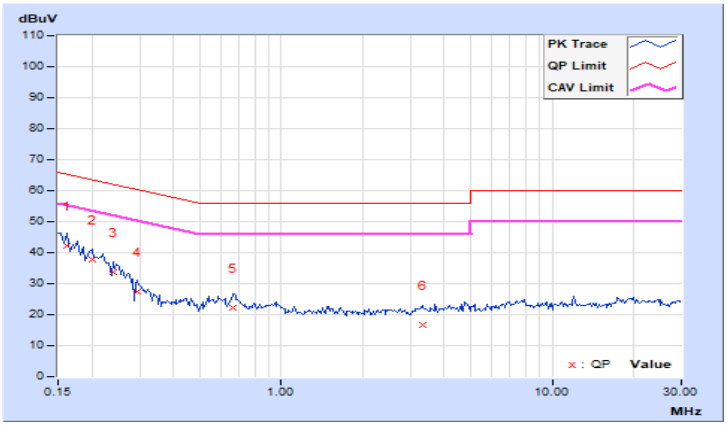

4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

a. Set resolution bandwidth (RBW) = 100kHz
b. Set the video bandwidth (VBW) ≥ 3 x RBW, Detector = Peak.
c. Trace mode = max hold.
d. Sweep = auto couple.
e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

CDD Mode

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	7.58	8.08	8.08	7.11	0.5	PASS
6	2437	7.64	8.07	7.58	7.14	0.5	PASS
11	2462	7.61	8.09	8.09	8.09	0.5	PASS

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	16.33	16.33	16.38	16.34	0.5	PASS
6	2437	16.33	16.1	16.37	16.03	0.5	PASS
11	2462	16.35	16.35	16.39	16.12	0.5	PASS

802.11ax (HE20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	18.98	18.89	18.68	18.82	0.5	PASS
6	2437	19.04	18.97	18.51	18.93	0.5	PASS
11	2462	18.94	18.94	18.9	18.84	0.5	PASS

802.11ax (HE40)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
3	2422	38.03	38.01	38.04	37.97	0.5	PASS
6	2437	38.06	37.94	37.78	38.09	0.5	PASS
9	2452	37.61	37.69	37.93	37.74	0.5	PASS

Spectrum Plot of Worst Value

802.11b / Chain 3 : CH1

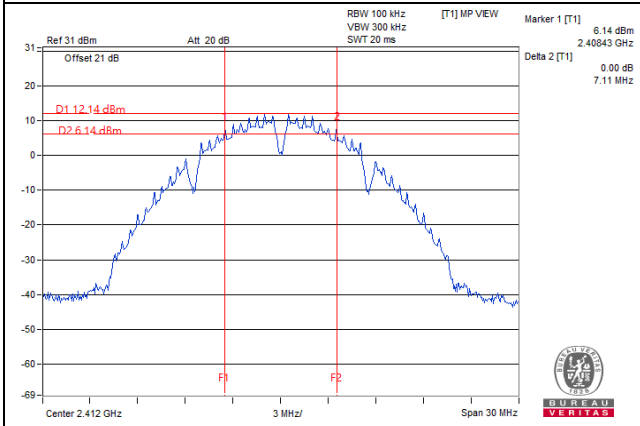

802.11g / Chain 3 : CH6

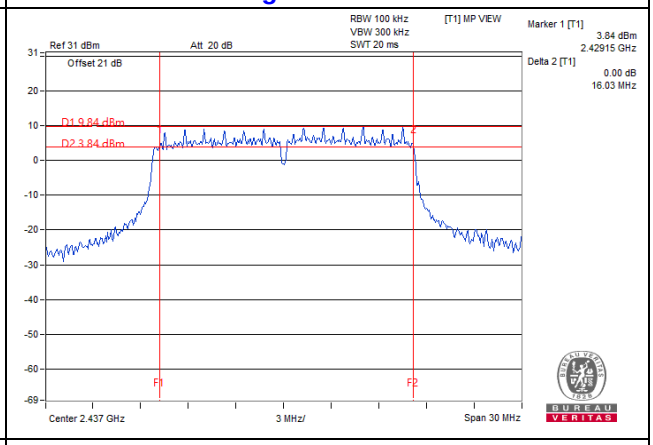

802.11ax (HE20) / Chain 2 : CH6

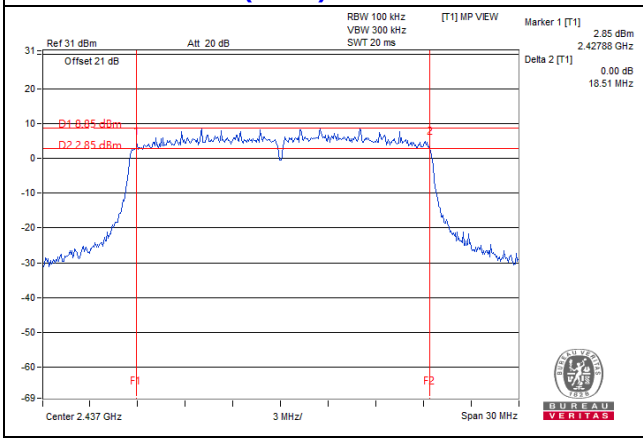

802.11ax (HE40) / Chain 0 : CH9

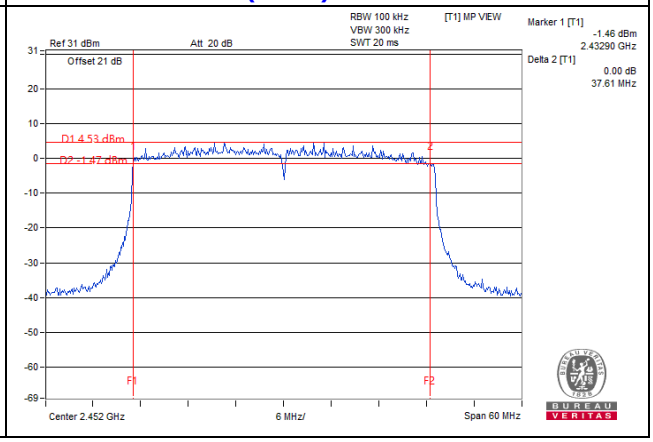

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;
Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT};
Array Gain = 5 log(N_{ANT}/N_{SS}) dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = 10 log(N_{ANT}/N_{SS}) dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

CDD Mode

802.11b

Chan.	Frequency (MHz)	Avg. Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	20.63	20.74	20.73	20.44	463.155	26.66	30	Pass
6	2437	20.79	20.62	20.74	20.85	475.491	26.77	30	Pass
11	2462	20.65	20.58	20.62	20.44	456.44	26.59	30	Pass

802.11g

Chan.	Frequency (MHz)	Avg. Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	19.40	19.54	19.52	19.68	359.479	25.56	30	Pass
6	2437	20.47	20.65	20.71	20.72	463.367	26.66	30	Pass
11	2462	19.45	19.50	19.58	19.59	359.003	25.55	30	Pass

VHT20

Chan.	Frequency (MHz)	Avg. Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	18.80	18.81	18.73	18.91	304.339	24.83	30	Pass
6	2437	20.38	20.48	20.27	20.59	441.796	26.45	30	Pass
11	2462	18.38	18.42	18.36	18.66	280.368	24.48	30	Pass

VHT40

Chan.	Frequency (MHz)	Avg. Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	19.10	19.02	19.14	19.31	328.428	25.16	30	Pass
6	2437	19.58	19.57	19.74	19.84	371.927	25.70	30	Pass
9	2452	18.35	18.67	18.64	18.88	292.394	24.66	30	Pass

802.11ax (HE20)

Chan.	Frequency (MHz)	Avg. Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	19.08	19.02	18.96	19.14	321.449	25.07	30	Pass
6	2437	20.51	20.54	20.38	20.60	449.66	26.53	30	Pass
11	2462	18.61	18.71	18.57	18.87	295.948	24.71	30	Pass

802.11ax (HE40)

Chan.	Frequency (MHz)	Avg. Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	19.31	19.27	19.38	19.52	346.071	25.39	30	Pass
6	2437	19.86	19.80	19.95	20.08	393.041	25.94	30	Pass
9	2452	18.59	18.91	18.85	19.10	308.1	24.89	30	Pass

Beamforming Mode

VHT20

Chan.	Frequency (MHz)	Avg. Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	18.80	18.81	18.73	18.91	304.339	24.83	26.57	Pass
6	2437	20.38	20.48	20.27	20.59	441.796	26.45	26.57	Pass
11	2462	18.38	18.42	18.36	18.66	280.368	24.48	26.57	Pass

Note: Directional gain = 10 log[$(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2$ /4] = 9.43dBi > 6dBi , so the power limit shall be reduced to 30-(9.43-6) = 26.57dBm.

VHT40

Chan.	Frequency (MHz)	Avg. Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	19.10	19.02	19.14	19.31	328.428	25.16	26.57	Pass
6	2437	19.58	19.57	19.74	19.84	371.927	25.70	26.57	Pass
9	2452	18.35	18.67	18.64	18.88	292.394	24.66	26.57	Pass

Note: Directional gain = 10 log[$(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2$ /4] = 9.43dBi > 6dBi , so the power limit shall be reduced to 30-(9.43-6) = 26.57dBm.

802.11ax (HE20)

Chan.	Frequency (MHz)	Avg. Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	19.08	19.02	18.96	19.14	321.449	25.07	26.57	Pass
6	2437	20.51	20.54	20.38	20.60	449.66	26.53	26.57	Pass
11	2462	18.61	18.71	18.57	18.87	295.948	24.71	26.57	Pass

Note: Directional gain = 10 log[$(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2$ /4] = 9.43dBi > 6dBi , so the power limit shall be reduced to 30-(9.43-6) = 26.57dBm.

802.11ax (HE40)

Chan.	Frequency (MHz)	Avg. Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	19.31	19.27	19.38	19.52	346.071	25.39	26.57	Pass
6	2437	19.86	19.80	19.95	20.08	393.041	25.94	26.57	Pass
9	2452	18.59	18.91	18.85	19.10	308.1	24.89	26.57	Pass

Note: Directional gain = 10 log[$(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2$ /4] = 9.43dBi > 6dBi , so the power limit shall be reduced to 30-(9.43-6) = 26.57dBm.

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

a) Measure the duty cycle (x).
b) Set instrument center frequency to DTS channel center frequency.
c) Set span to at least 1.5 times the OBW.
d) Set RBW to: 3 kHz ≤ RBW ≤ 100 kHz..
e) Set VBW ≥3 x RBW.
f) Detector = power averaging (RMS) or sample detector (when RMS not available).
g) Ensure that the number of measurement points in the sweep ≥ 2 x span/RBW.
h) Sweep time = auto couple.
i) Do not use sweep triggering. Allow sweep to “free run”.
j) Employ trace averaging (RMS) mode over a minimum of 100 traces.
k) Use the peak marker function to determine the maximum amplitude level.
l) Add 10 log (1/x), where x is the duty cycle measured in step (a, to the measured PSD to compute the average PSD during the actual transmission time.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

CDD Mode

802.11b

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/3kHz)				Duty Factor (dB)	Total PSD (mW/3kHz)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3					
1	2412	-8.57	-8.86	-9.15	-8.89	0.20	0.544	-2.64	4.57	PASS
6	2437	-9.45	-8.21	-8.40	-8.80	0.20	0.5661	-2.47	4.57	PASS
11	2462	-8.34	-8.91	-8.81	-8.86	0.20	0.5617	-2.50	4.57	PASS

Note:
1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = 10 log[$(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2$ /4] = 9.43dBi > 6dBi , so the power density limit shall be reduced to 8-(9.43-6) = 4.57dBm.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11g

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/3kHz)				Duty Factor (dB)	Total PSD (mW/3kHz)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3					
1	2412	-14.03	-13.70	-14.26	-13.27	0.27	0.17768	-7.50	4.57	PASS
6	2437	-12.75	-13.01	-12.29	-12.48	0.27	0.23288	-6.33	4.57	PASS
11	2462	-13.48	-13.77	-13.27	-13.70	0.27	0.18814	-7.26	4.57	PASS

Note:
1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = 10 log[$(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2$ /4] = 9.43dBi > 6dBi , so the power density limit shall be reduced to 8-(9.43-6) = 4.57dBm.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/3kHz)				Duty Factor (dB)	Total PSD (mW/3kHz)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3					
1	2412	-17.02	-17.11	-17.27	-17.62	0.19	0.07872	-11.04	4.57	PASS
6	2437	-16.92	-16.19	-15.61	-16.16	0.19	0.10034	-9.99	4.57	PASS
11	2462	-17.76	-18.00	-17.83	-17.05	0.19	0.07187	-11.43	4.57	PASS

Note:
1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = 10 log[$(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2$ /4] = 9.43dBi > 6dBi , so the power density limit shall be reduced to 8-(9.43-6) = 4.57dBm.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/3kHz)				Duty Factor (dB)	Total PSD (mW/3kHz)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3					
3	2422	-19.63	-19.81	-19.57	-19.48	0.25	0.04625	-13.35	4.57	PASS
6	2437	-18.98	-19.18	-18.91	-18.36	0.25	0.05528	-12.57	4.57	PASS
9	2452	-20.23	-19.08	-20.35	-19.69	0.25	0.044303	-13.54	4.57	PASS

Note:
1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = 10 log[$(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2$ /4] = 9.43dBi > 6dBi , so the power density limit shall be reduced to 8-(9.43-6) = 4.57dBm.
3. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value

802.11b / Chain 1 : CH6

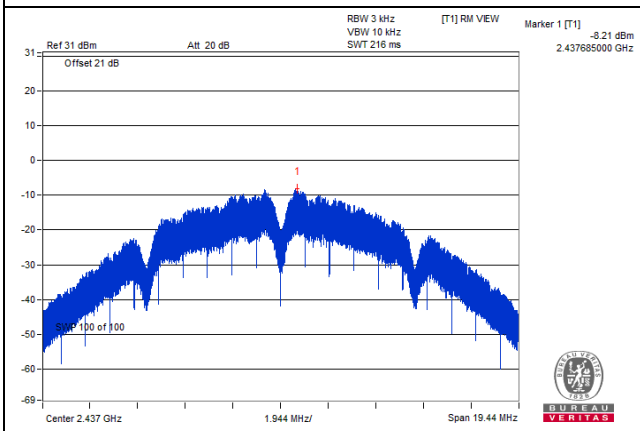

802.11g / Chain 2 : CH6

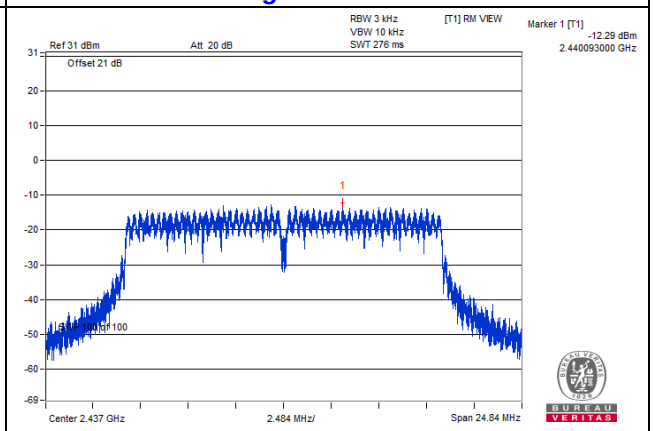

802.11ax (HE20) / Chain 2 : CH6

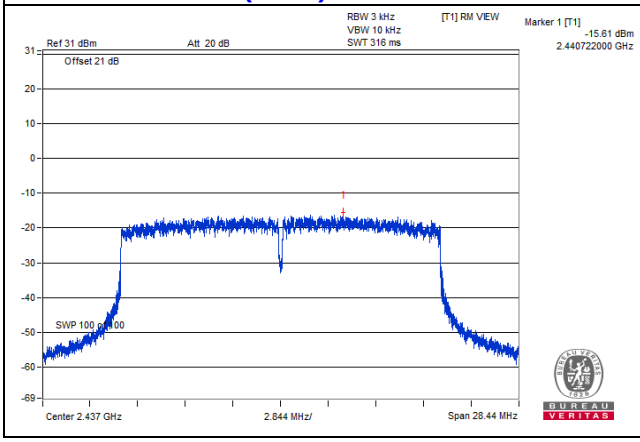

802.11ax (HE40) / Chain 3 : CH6

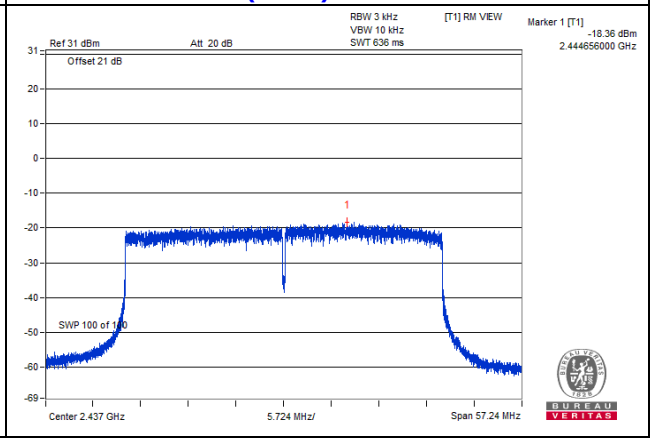

4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW ≥ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW ≥ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Same as Item 4.3.6

4.6.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

802.11b

Maximum REF

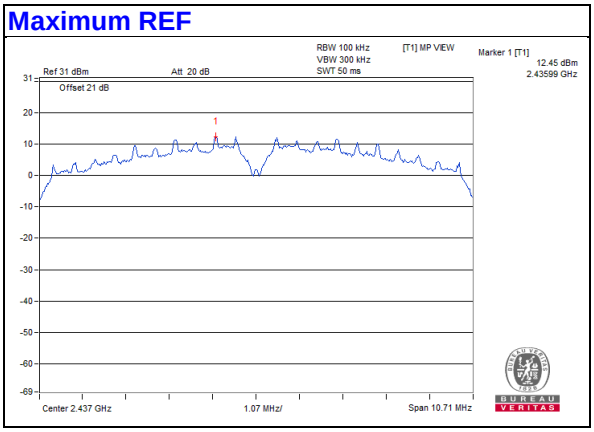

Chain 0

CH 1

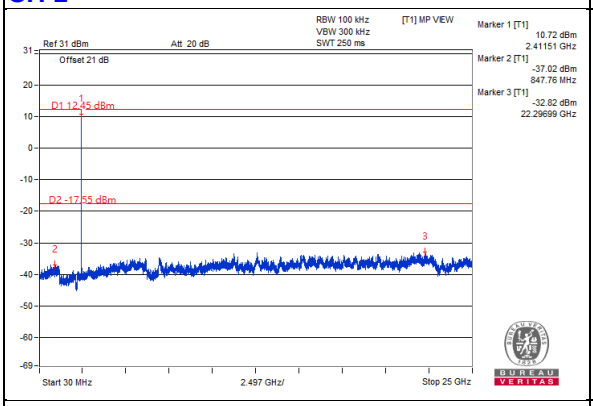

CH 6

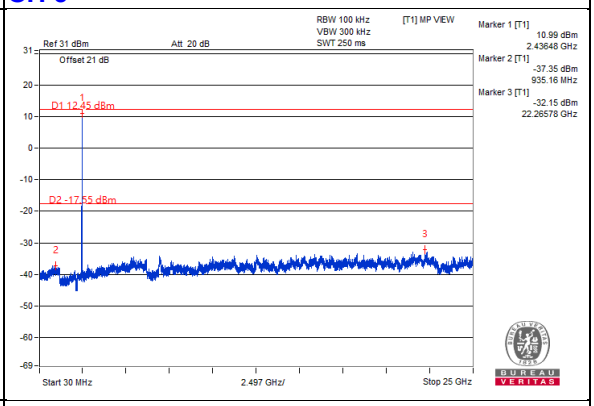

CH 11

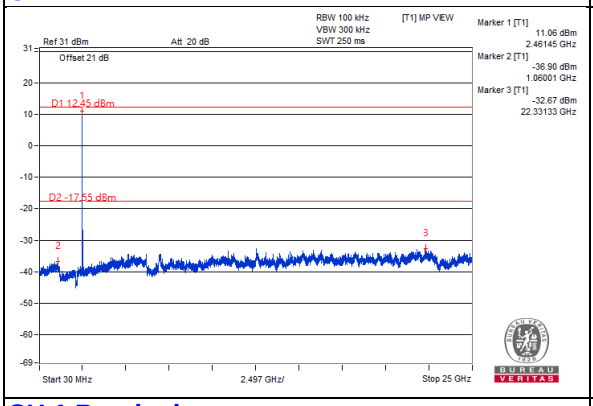

CH 1 Band edge

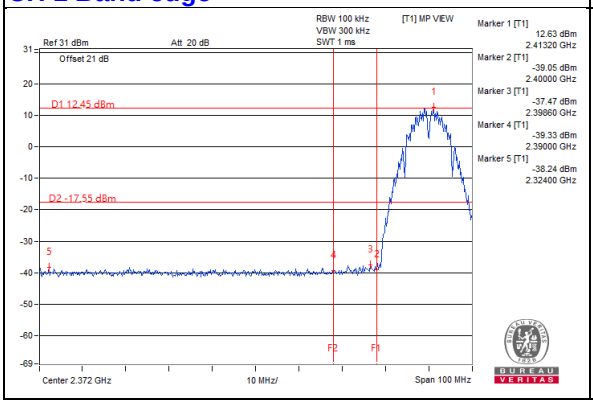

CH 11 Band edge

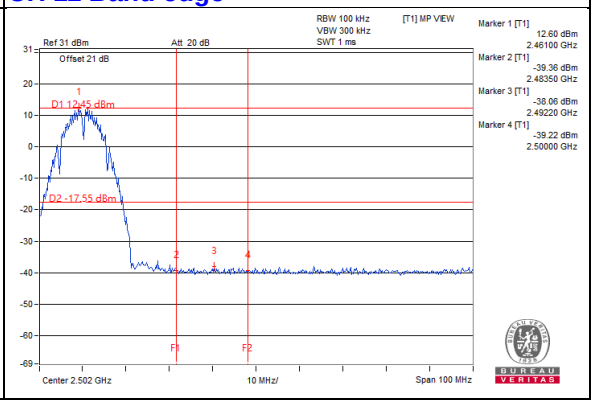

Chain 1

CH 1

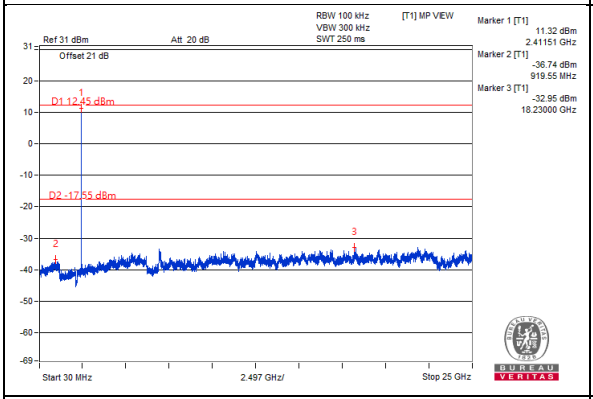

CH 6

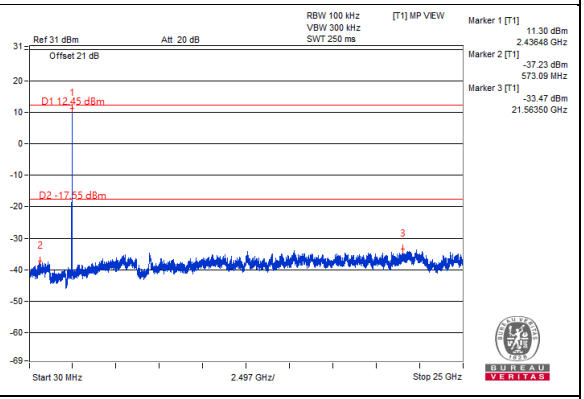

CH 11

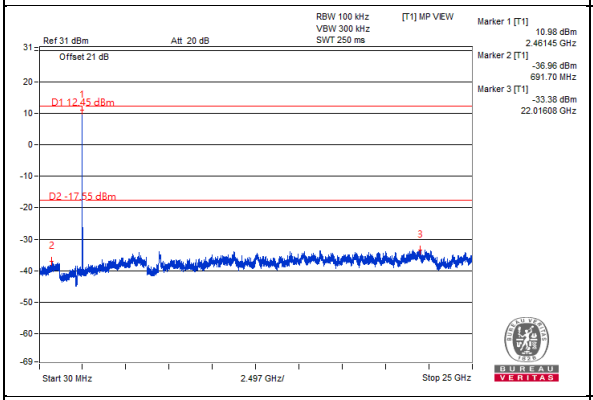

CH 1 Band edge

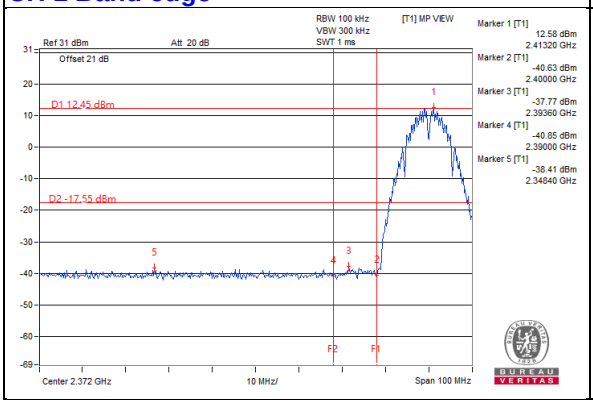

CH 11 Band edge

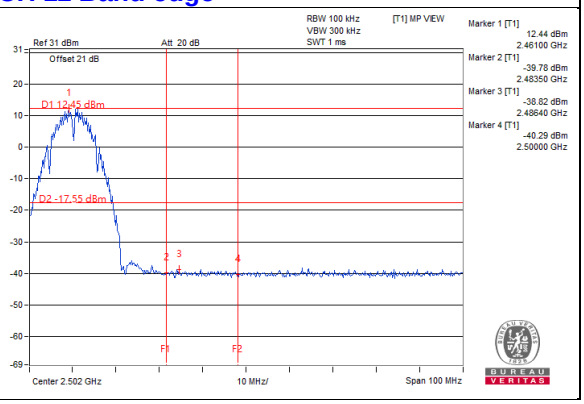

Chain 2

CH 1

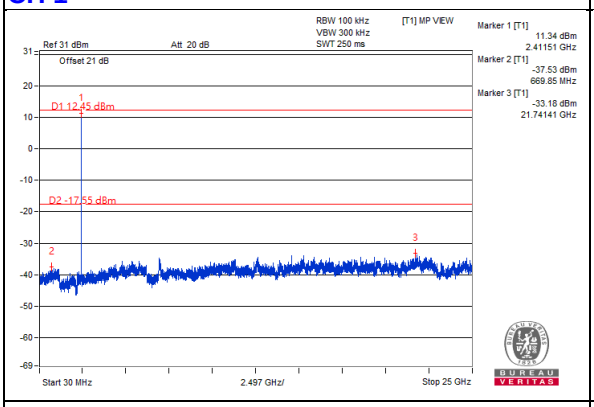

CH 6

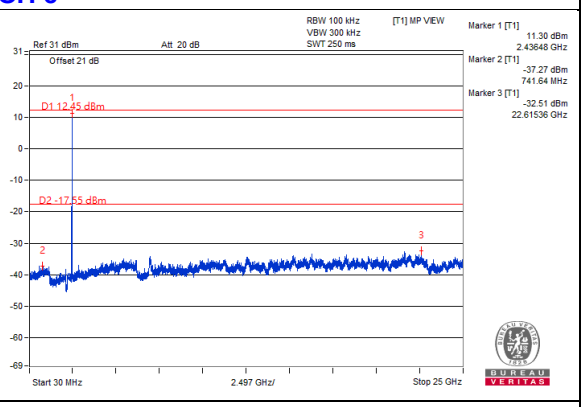

CH 11

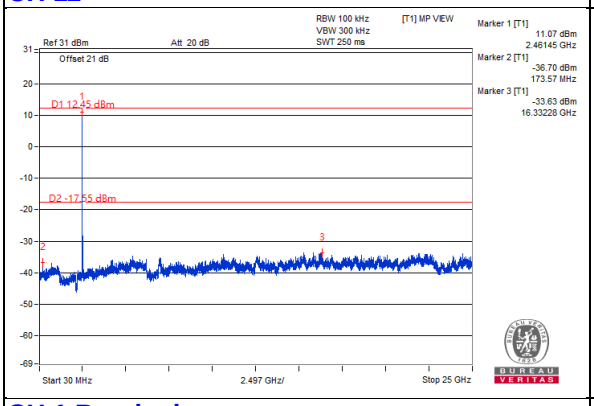

CH 1 Band edge

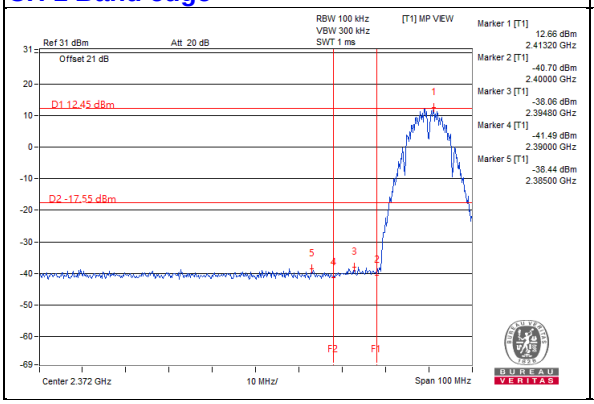

CH 11 Band edge

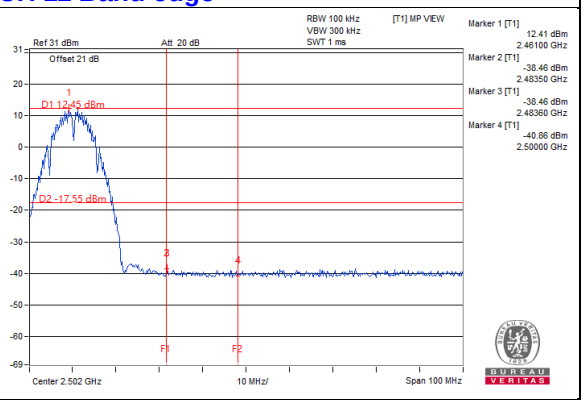

Chain 3

CH 1

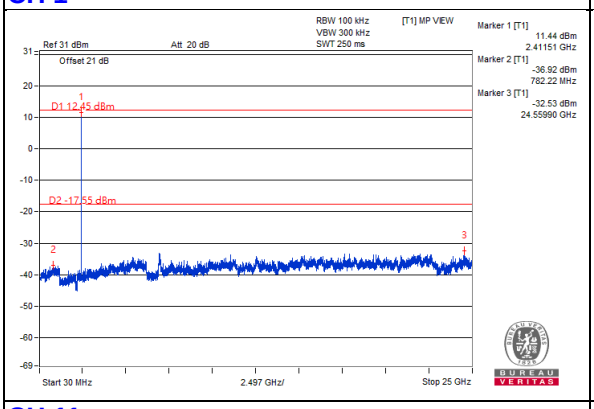

CH 6

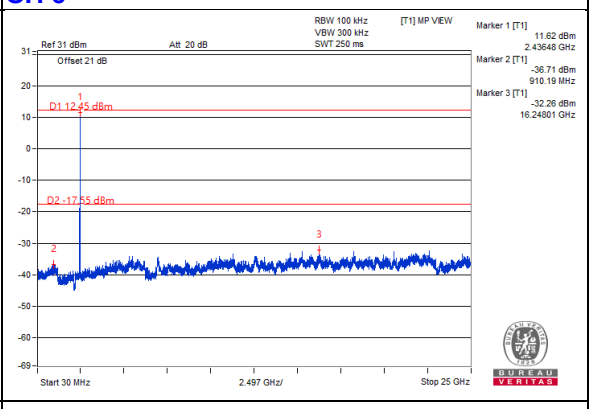

CH 11

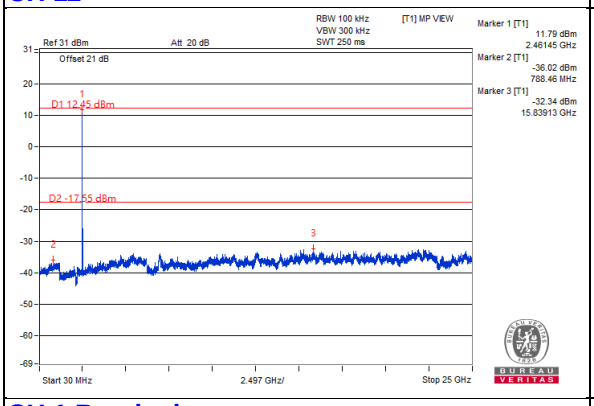

CH 1 Band edge

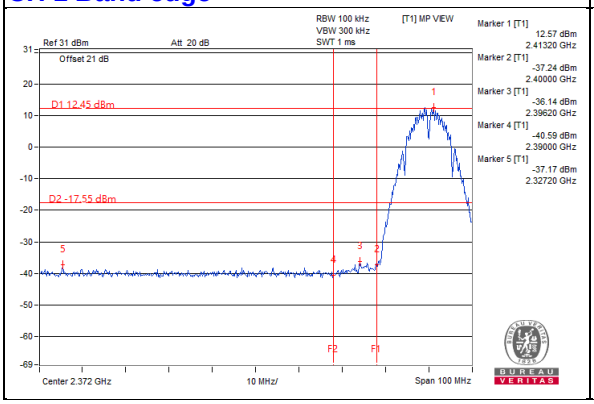

CH 11 Band edge

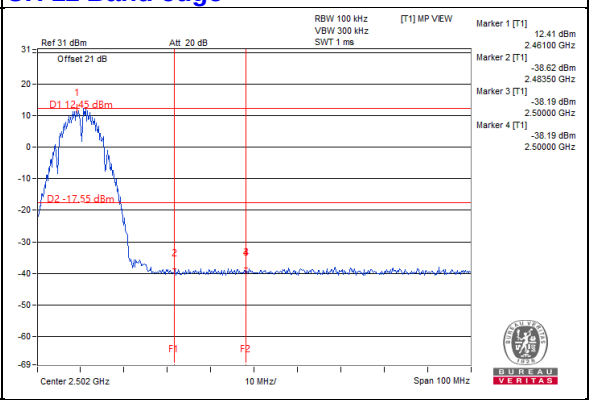

802.11g

Maximum REF

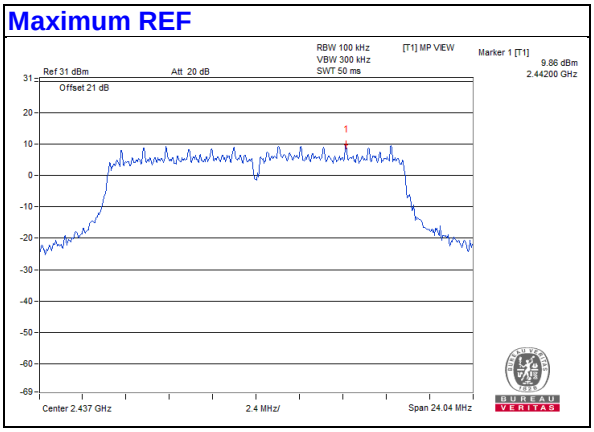

Chain 0

CH 1

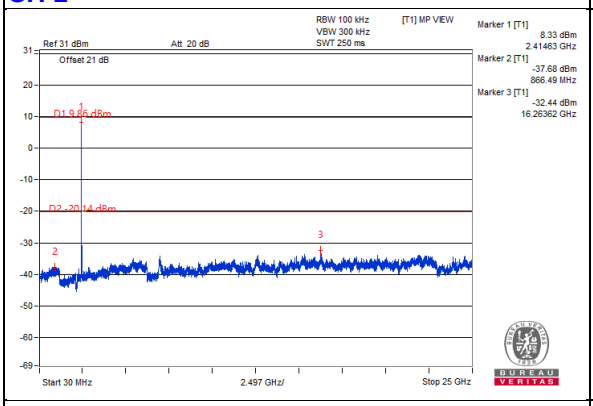

CH 6

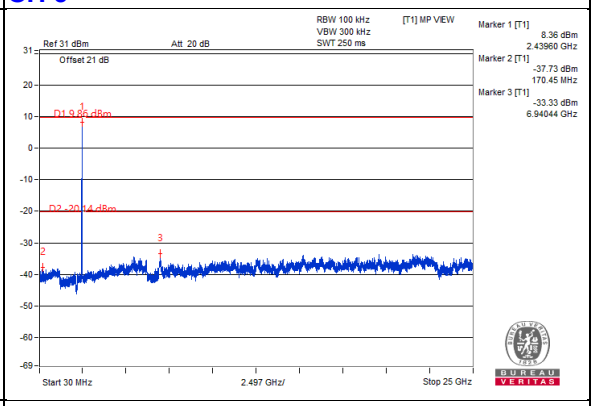

CH 11

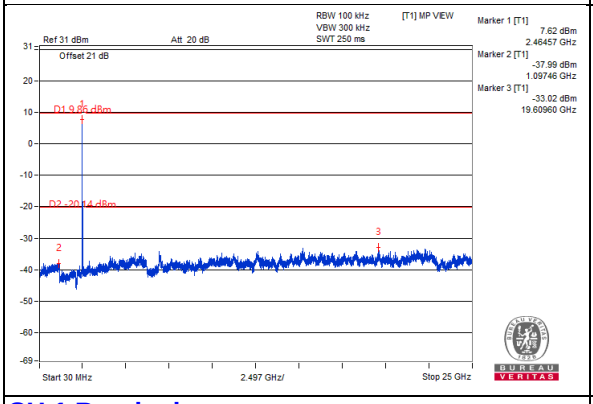

CH 1 Band edge

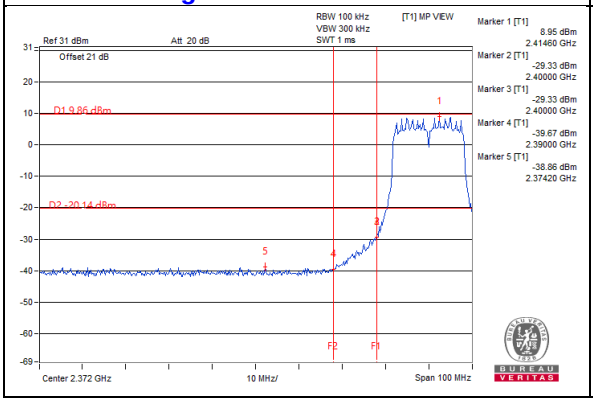

CH 11 Band edge

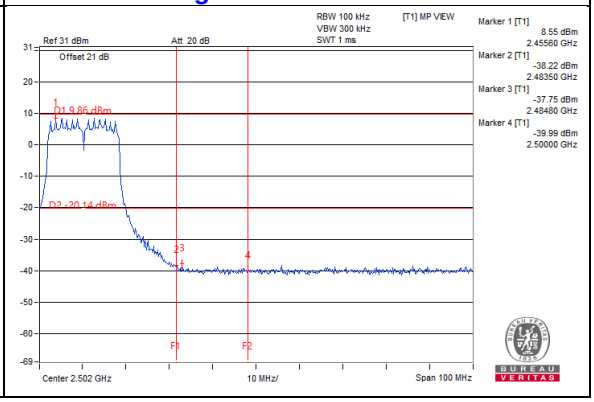

Chain 1

CH 1

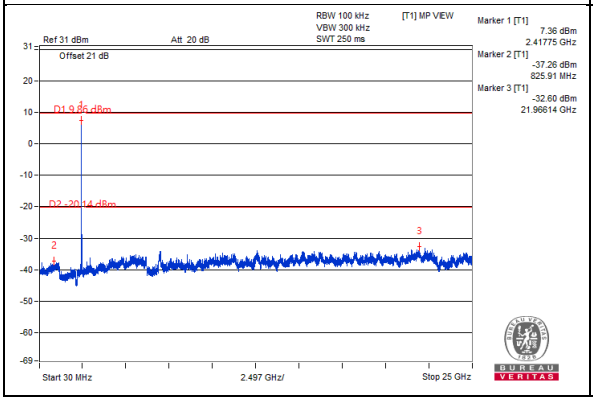

CH 6

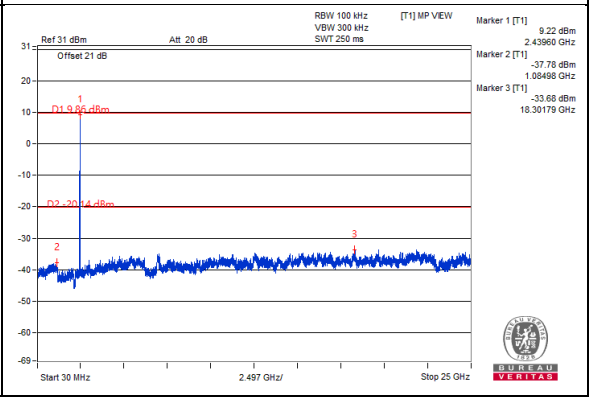

CH 11

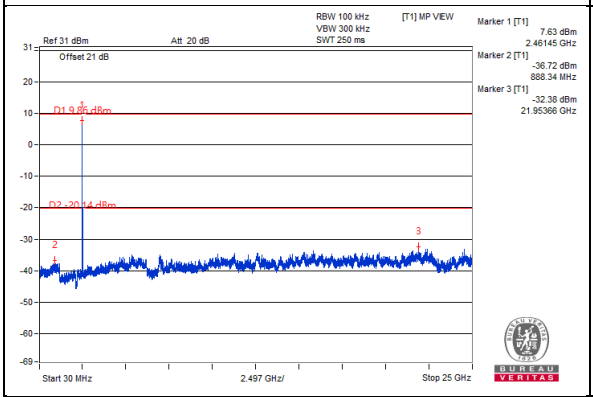

CH 1 Band edge

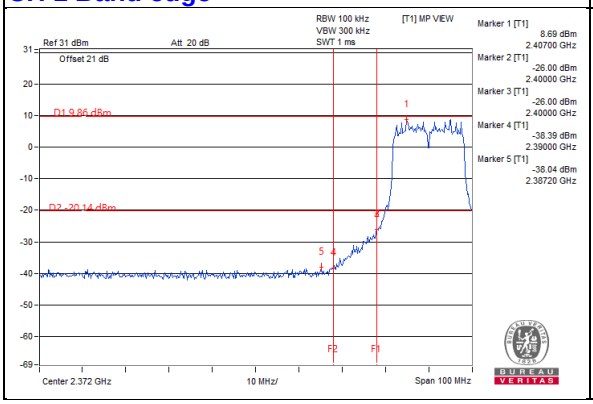

CH 11 Band edge

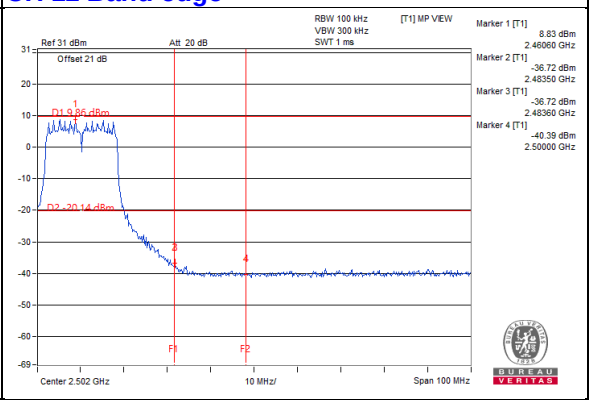

Chain 2

CH 1

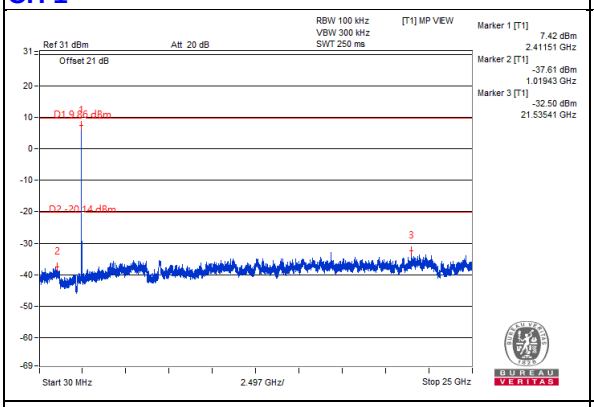

CH 6

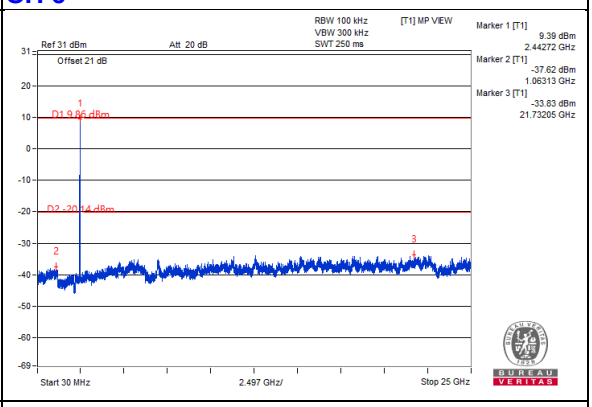

CH 11

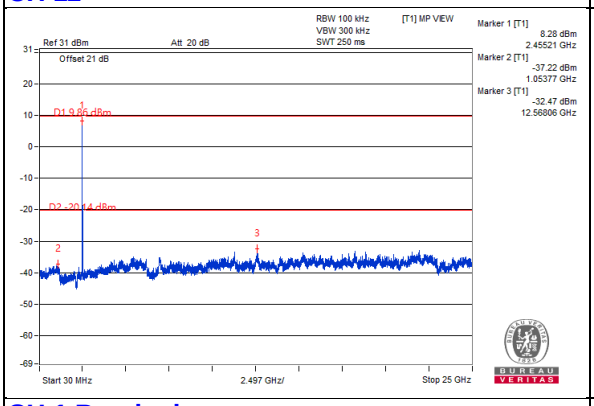

CH 1 Band edge

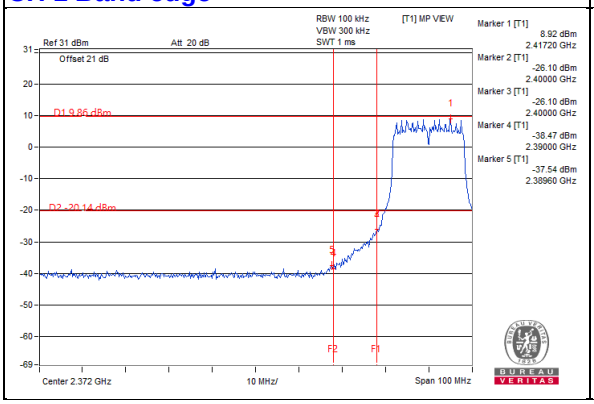

CH 11 Band edge

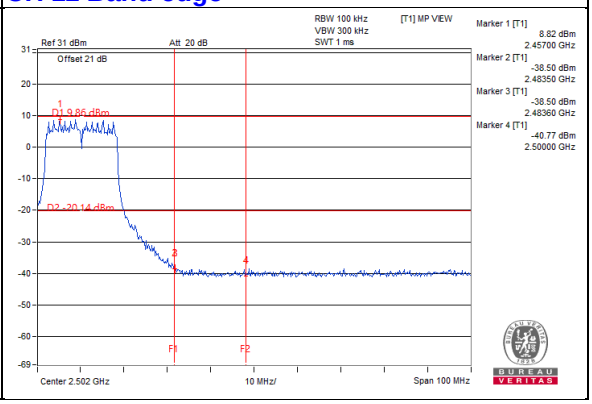

Chain 3

CH 1

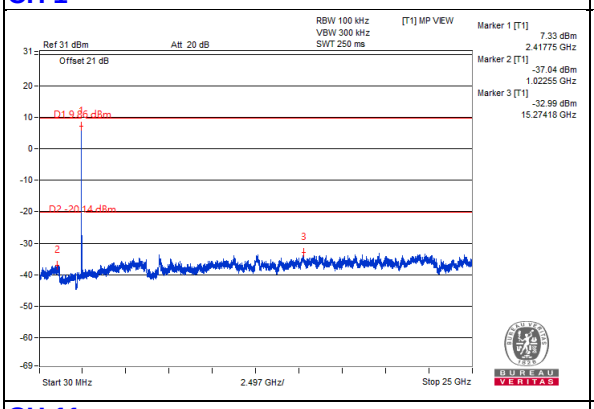

CH 6

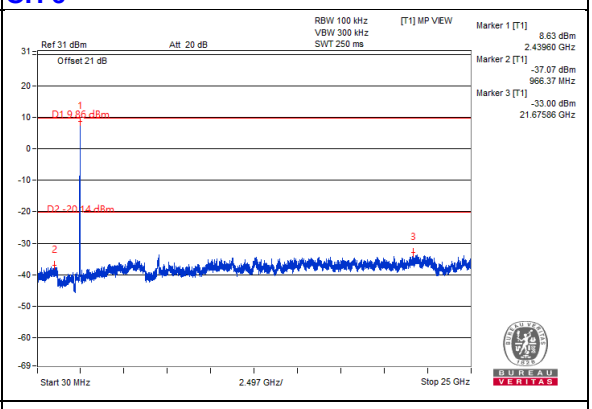

CH 11

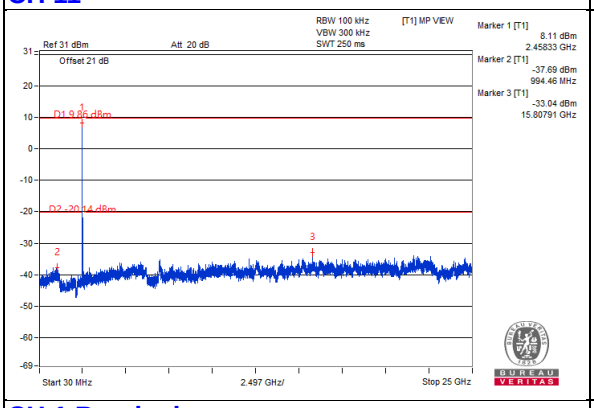

CH 1 Band edge

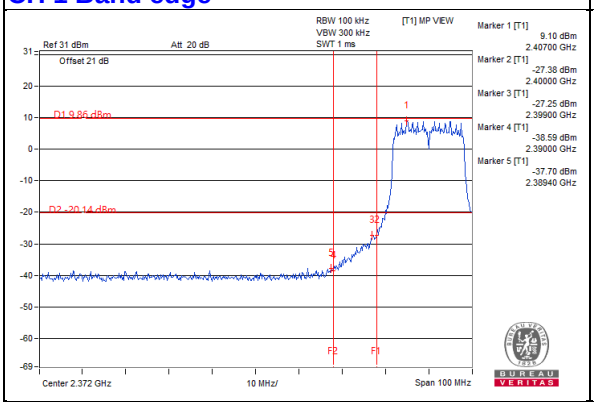

CH 11 Band edge

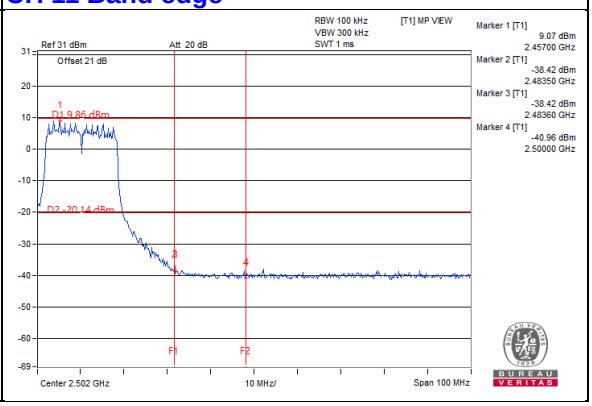

802.11ax (HE20)

Maximum REF

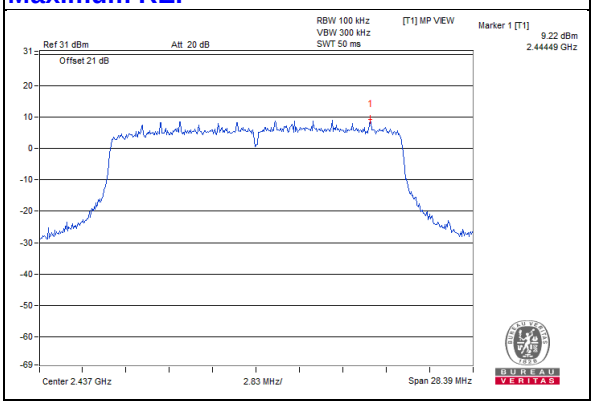

Chain 0

CH 1

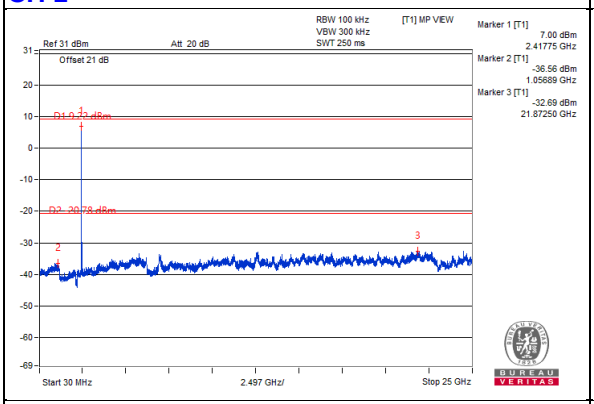

CH 6

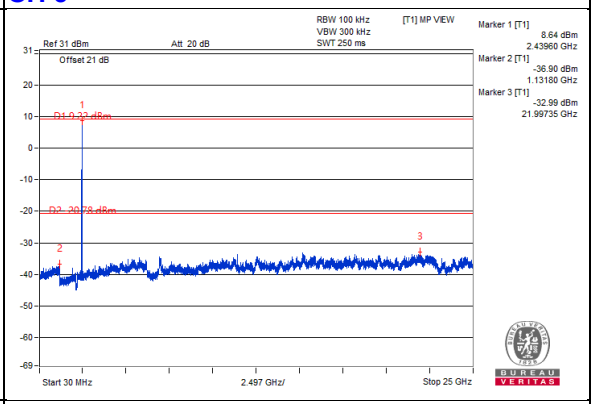

CH 11

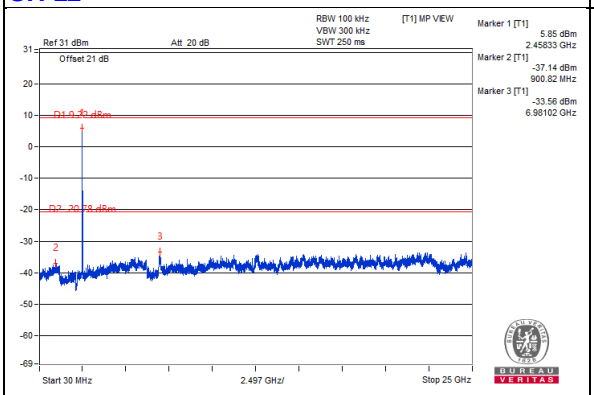

CH 1 Band edge

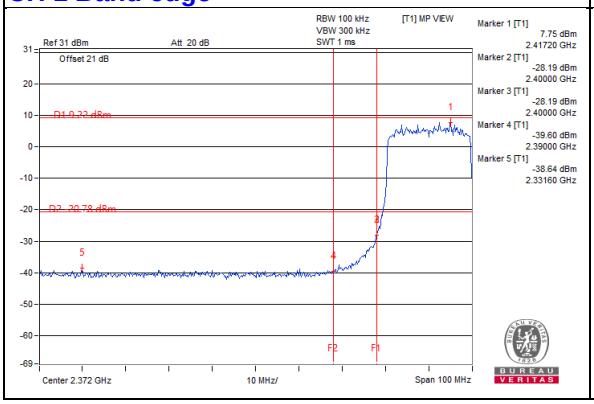

CH 11 Band edge

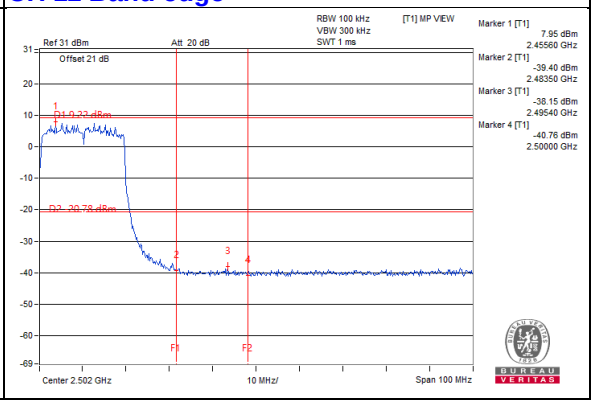

Chain 1

CH 1

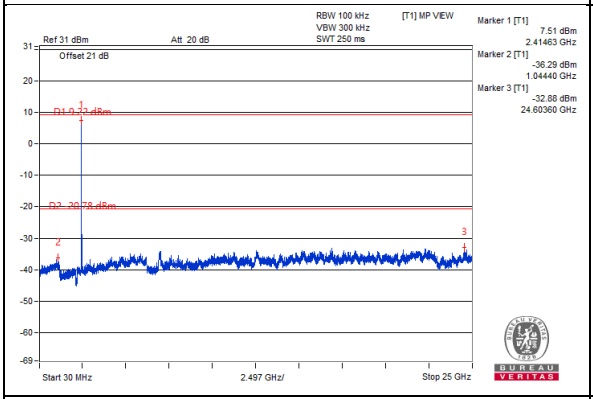

CH 6

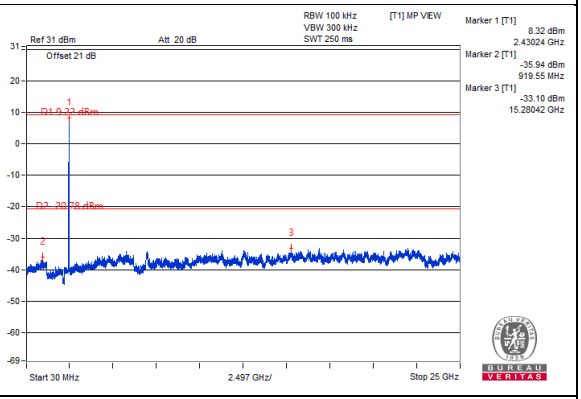

CH 11

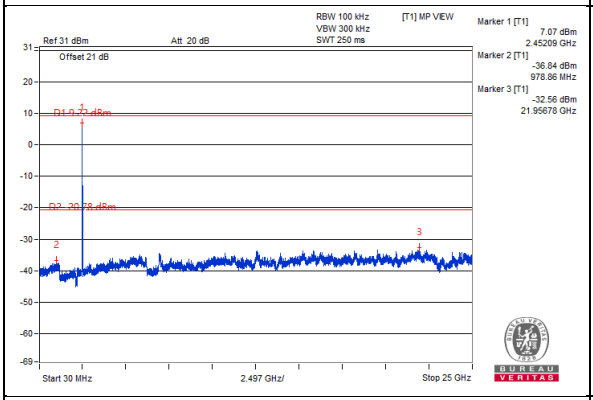

CH 1 Band edge

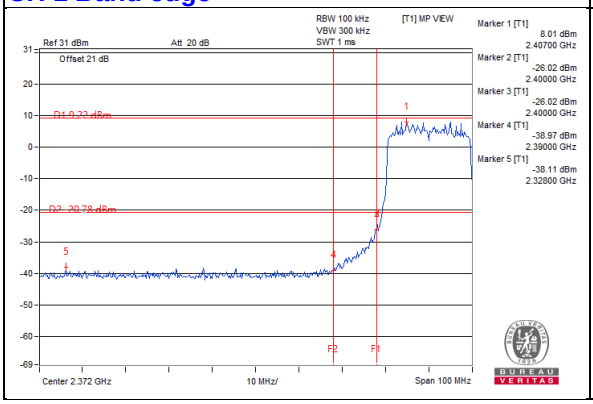

CH 11 Band edge

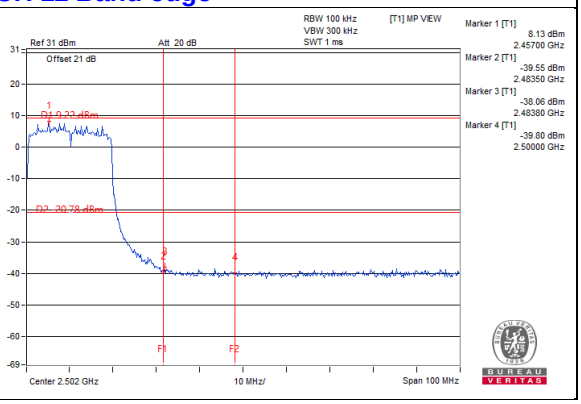

Chain 2

CH 1

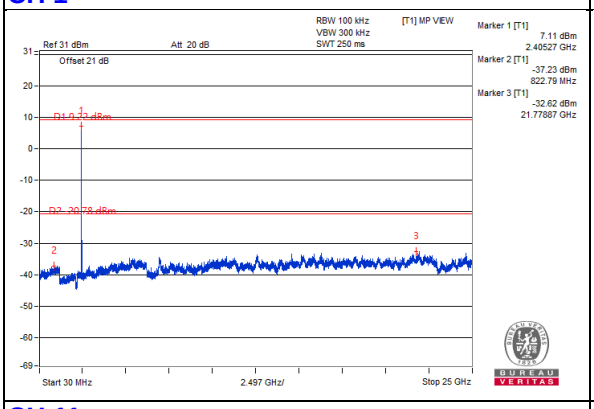

CH 6

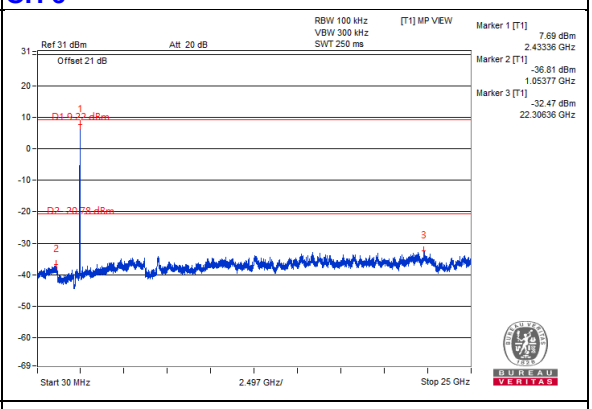

CH 11

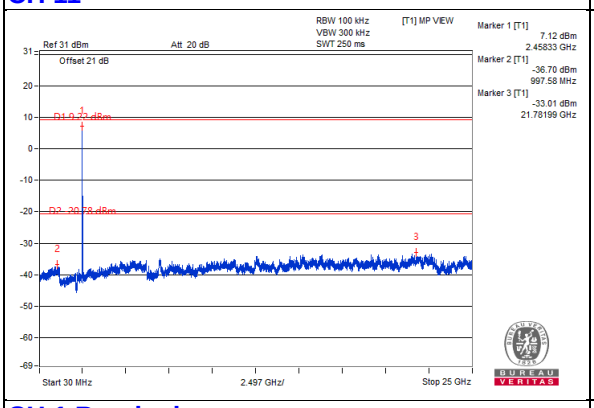

CH 1 Band edge

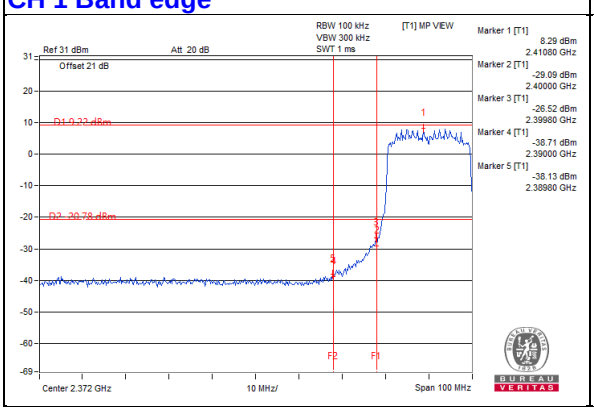

CH 11 Band edge

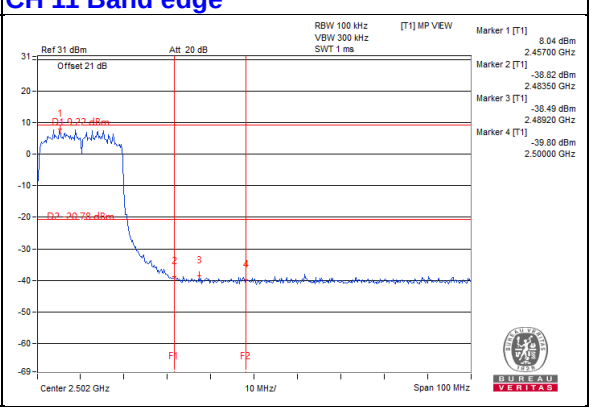

Chain 3

CH 1

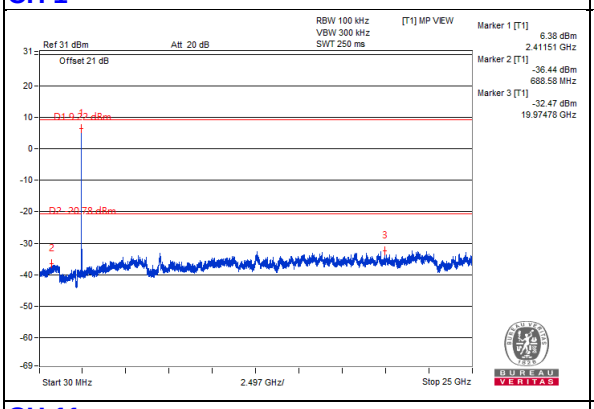

CH 6

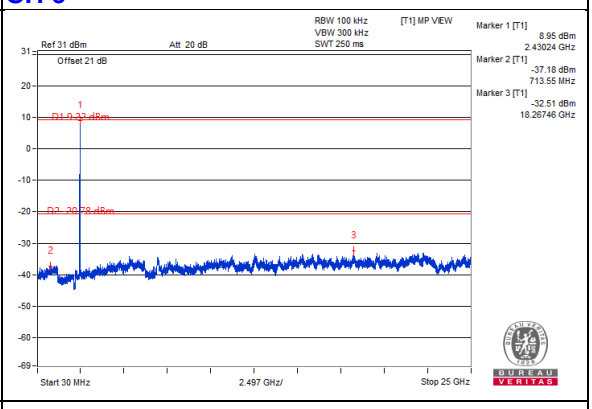

CH 11

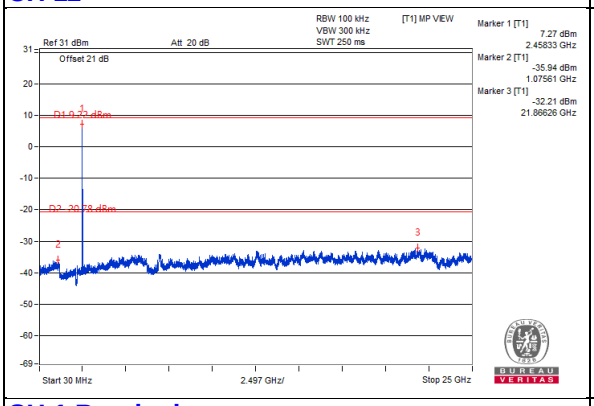

CH 1 Band edge

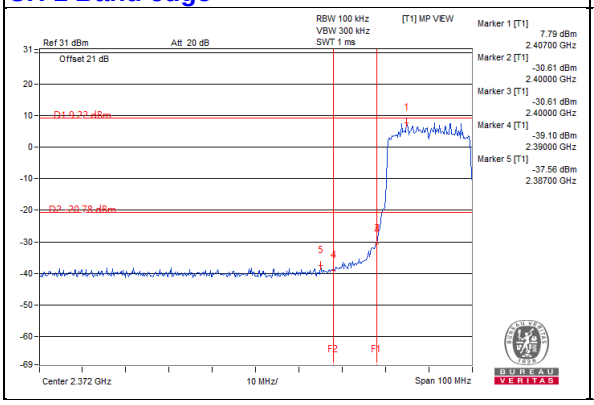

CH 11 Band edge

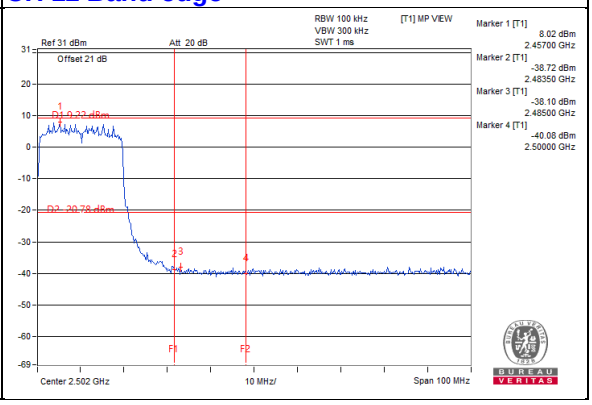

802.11ax (HE40)

Maximum REF

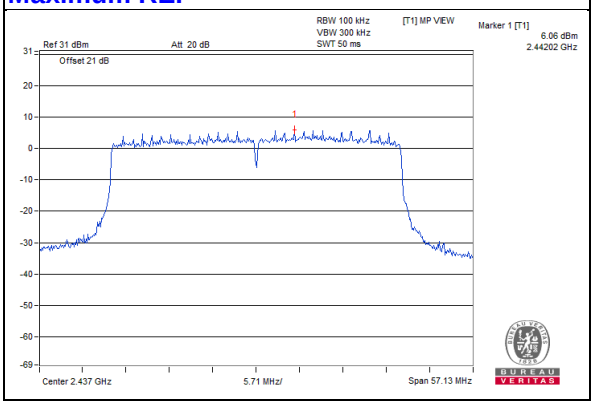

Chain 0

CH 3

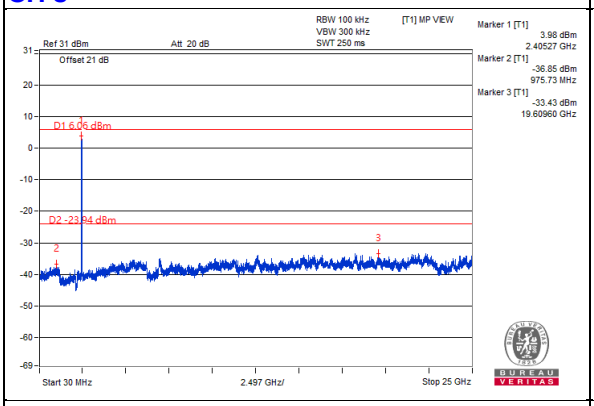

CH 6

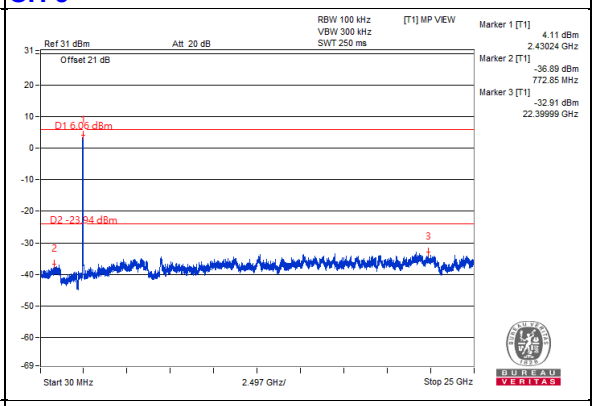

CH 9

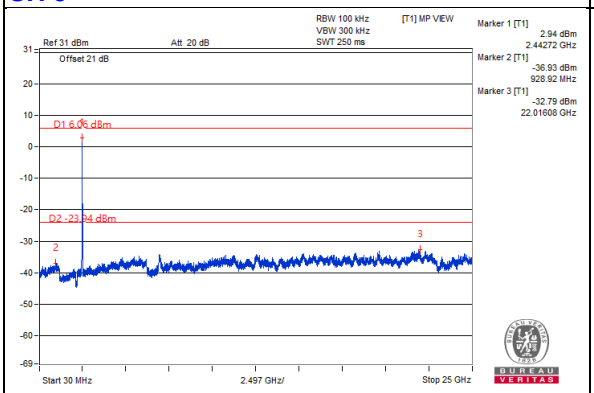

CH 3 Band edge

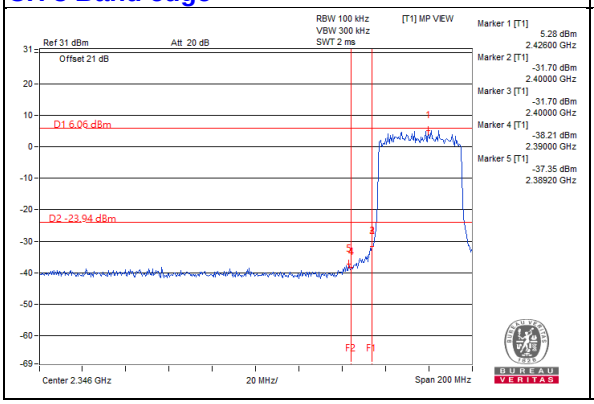

CH 9 Band edge

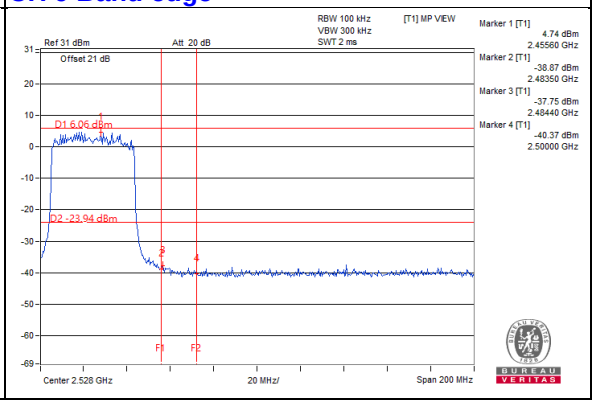

Chain 1

CH 3

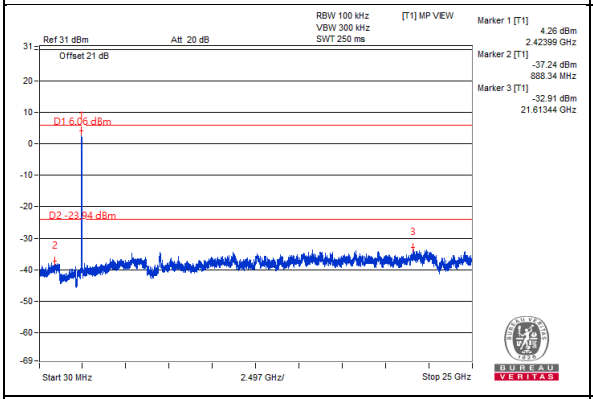

CH 6

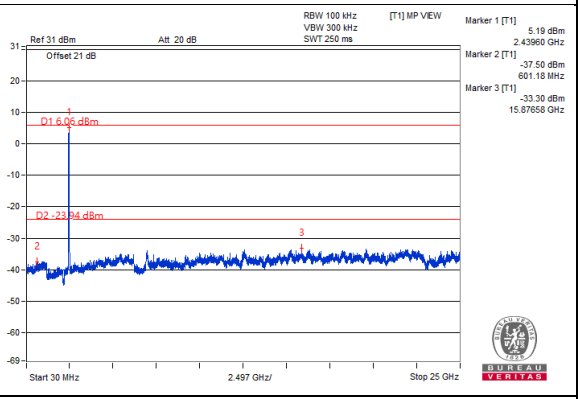

CH 9

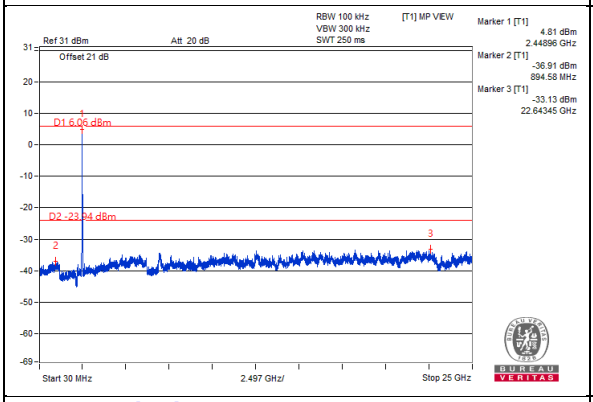

CH 3 Band edge

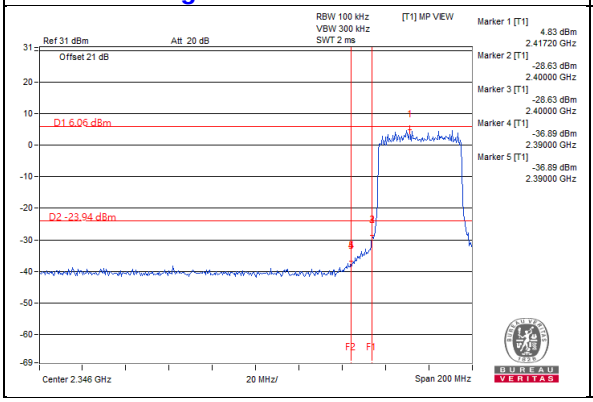

CH 9 Band edge

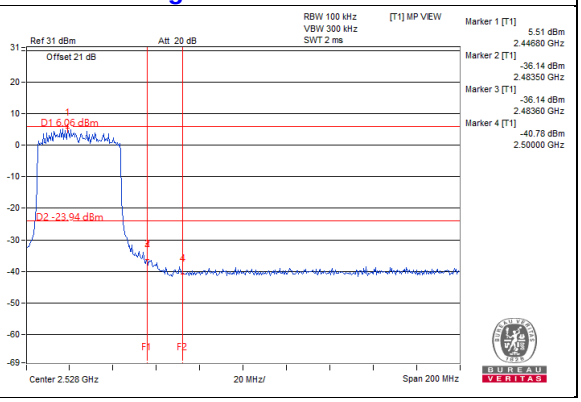

Chain 2

CH 3

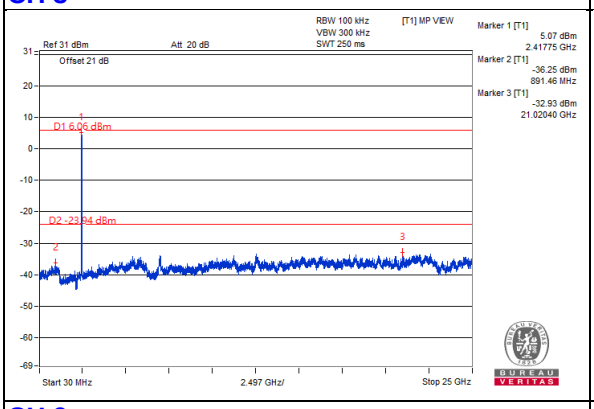

CH 6

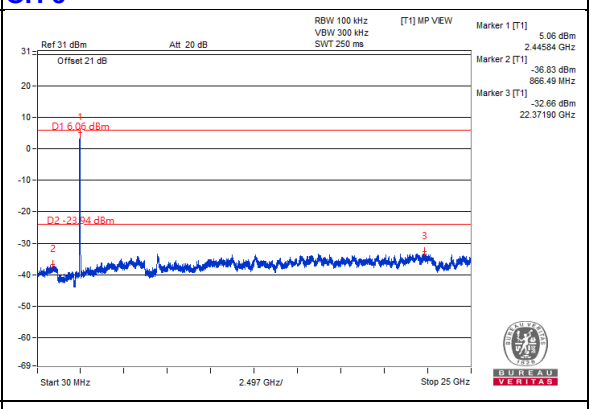

CH 9

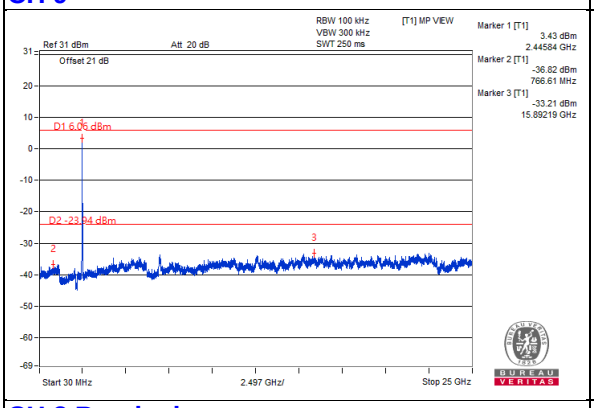

CH 3 Band edge

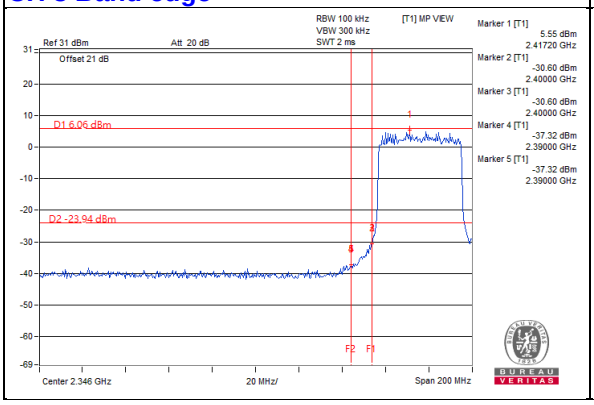

CH 9 Band edge

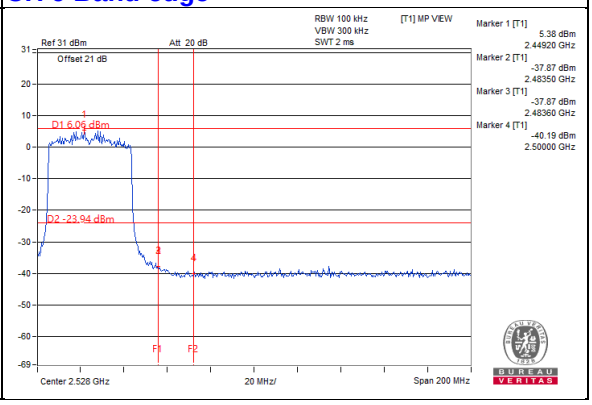

Chain 3

CH 3

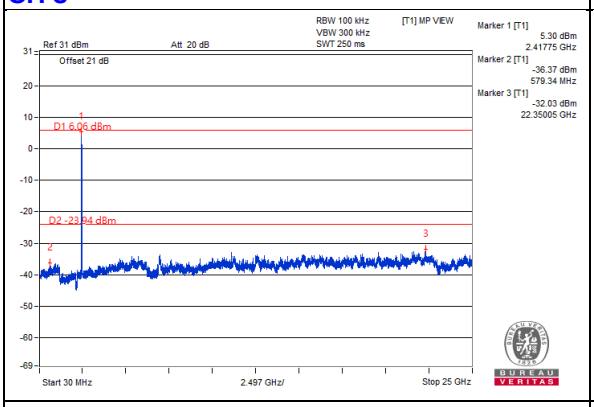

CH 6

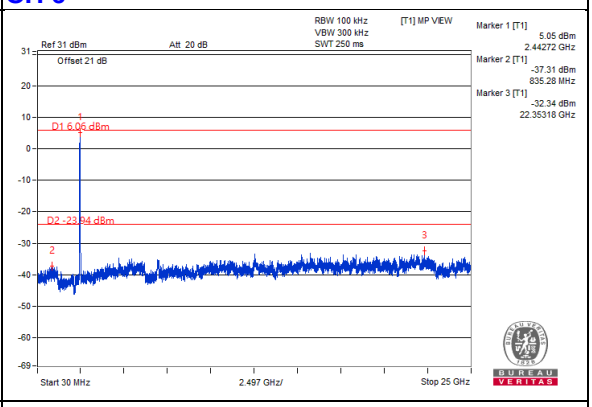

CH 9

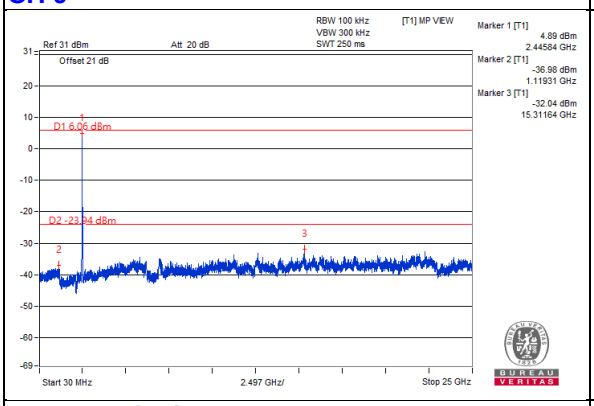

CH 3 Band edge

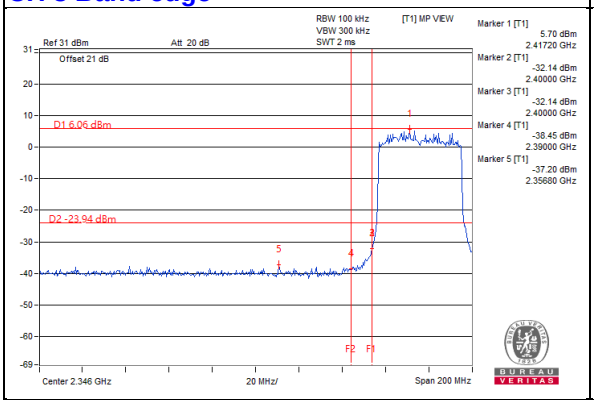

CH 9 Band edge

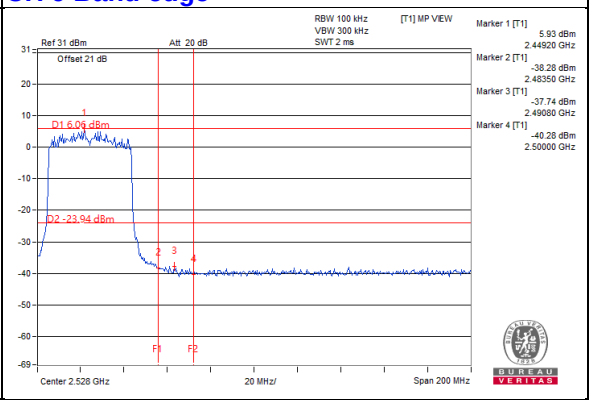

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Annex A - Band-Edge Measurement

802.11b Channel 1

Horizontal (Peak)	Horizontal (Average)
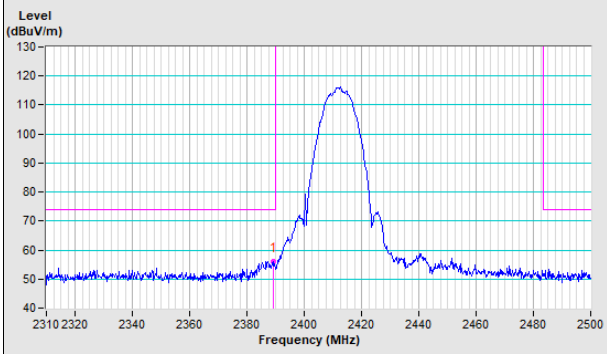	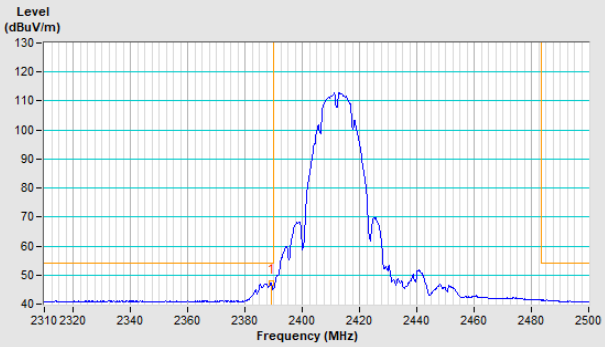
Vertical (Peak)	**Vertical (Average)**
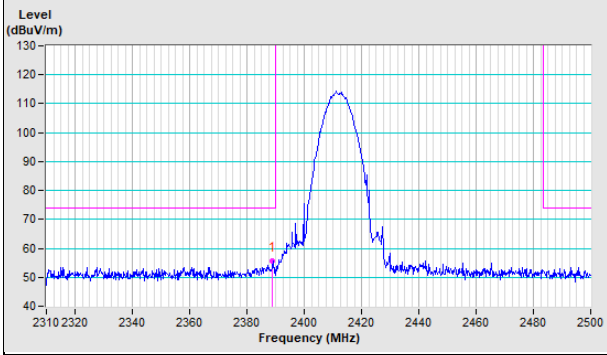	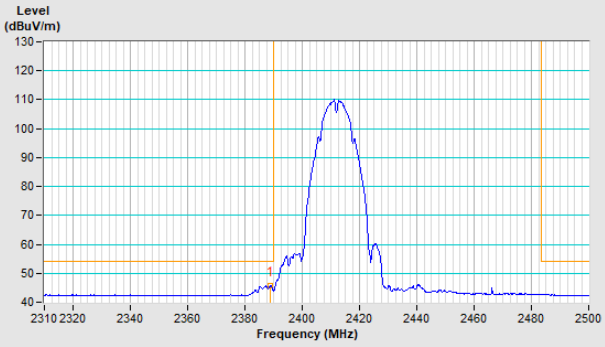

802.11b Channel 11

Horizontal (Peak)	Horizontal (Average)
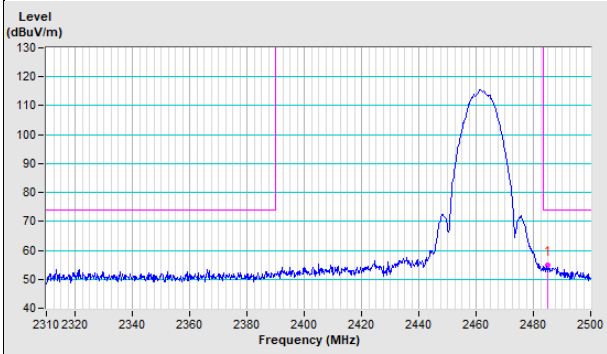	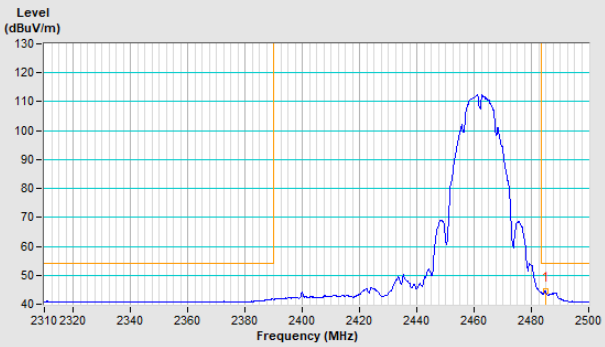
Vertical (Peak)	**Vertical (Average)**
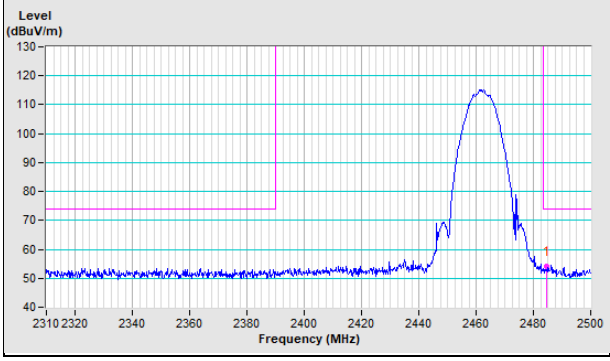	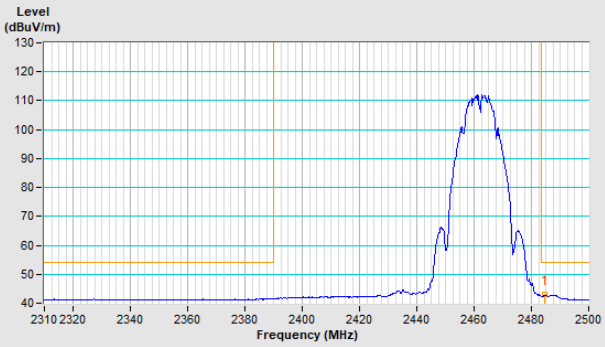

802.11g Channel 1

Horizontal (Peak)

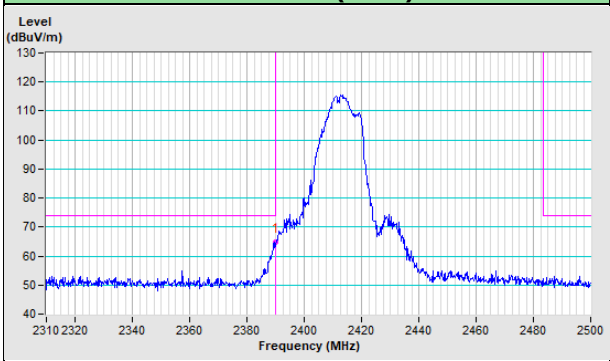

Horizontal (Average)

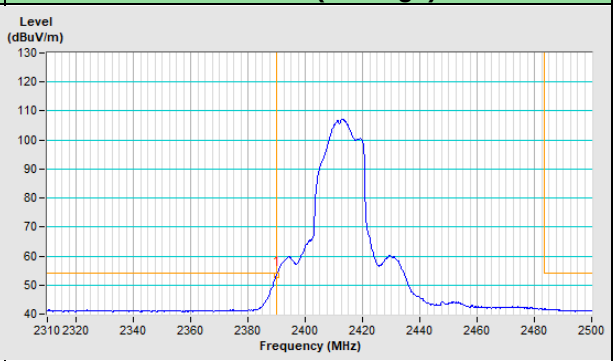

Vertical (Peak)

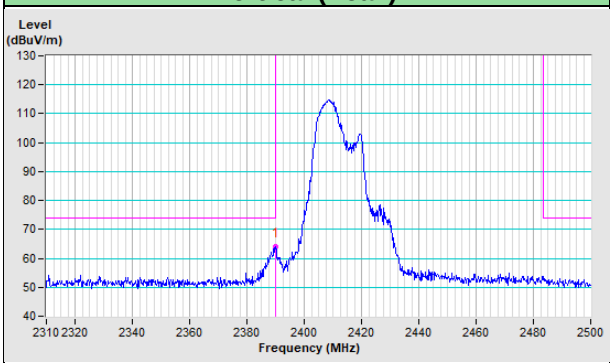

Vertical (Average)

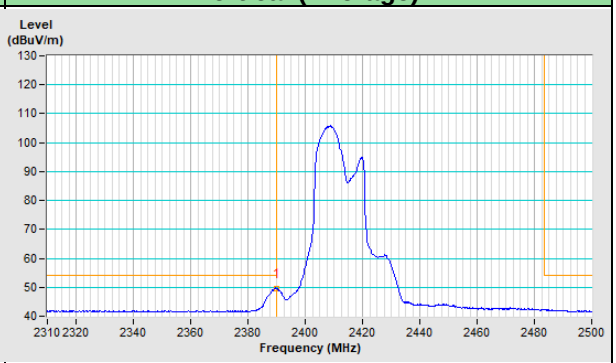

802.11g Channel 11

Horizontal (Peak)

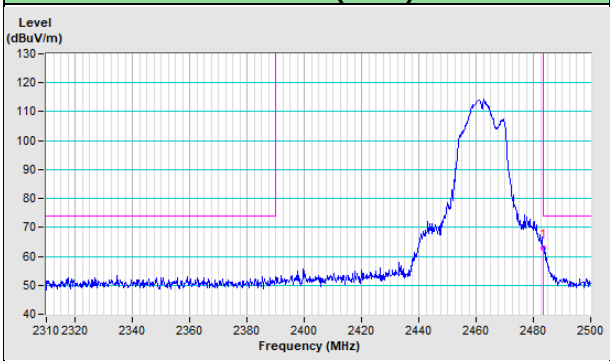

Horizontal (Average)

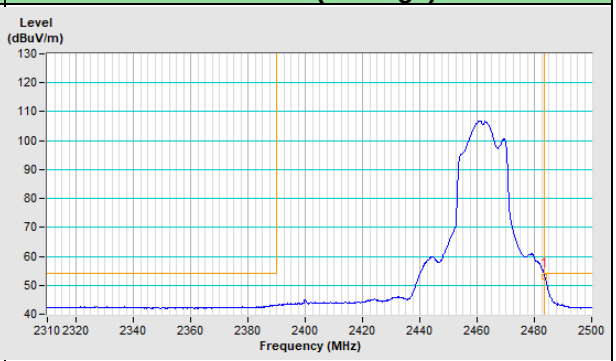

Vertical (Peak)

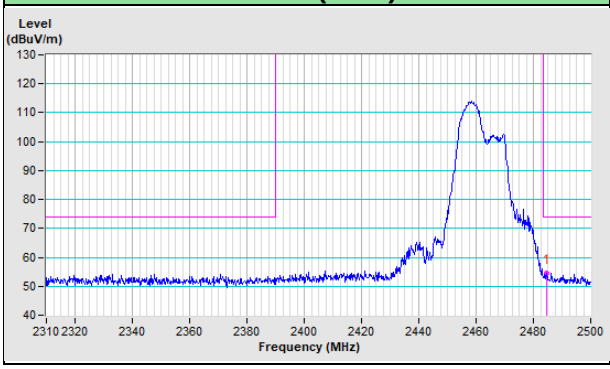

Vertical (Average)

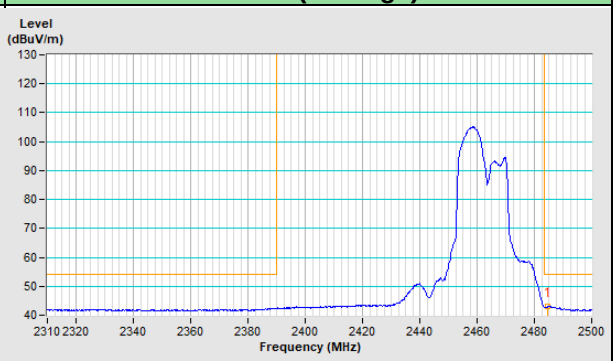

802.11ax (HE20) Channel 1

Horizontal (Peak)

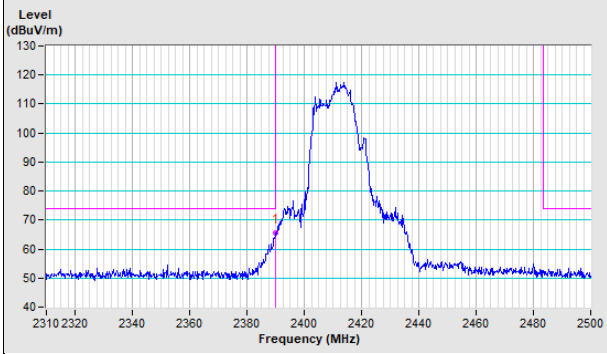

Horizontal (Average)

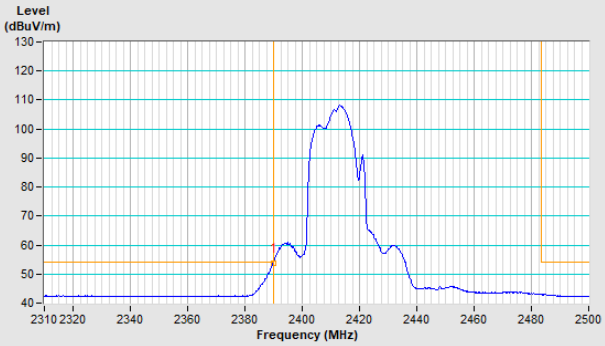

Vertical (Peak)

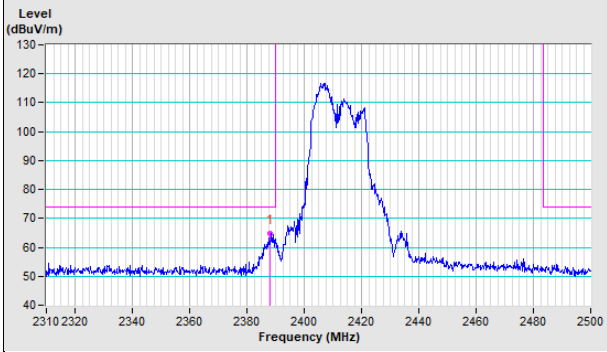

Vertical (Average)

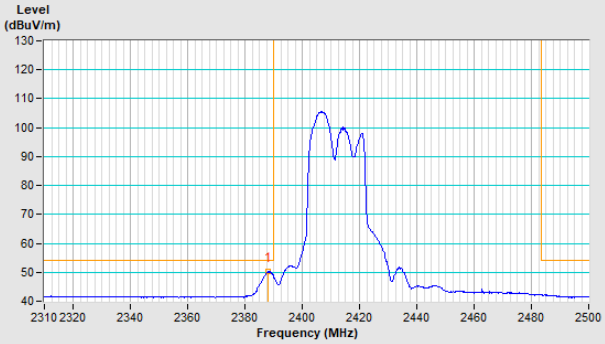

802.11ax (HE20) Channel 11

Horizontal (Peak)

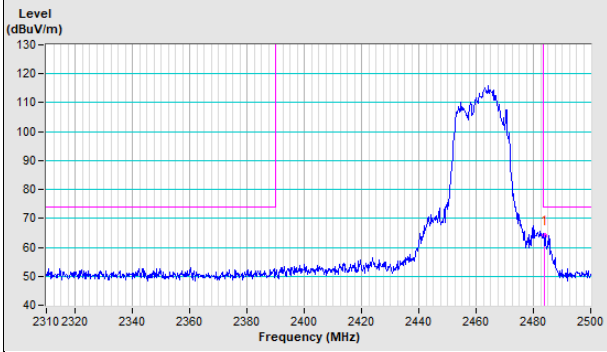

Horizontal (Average)

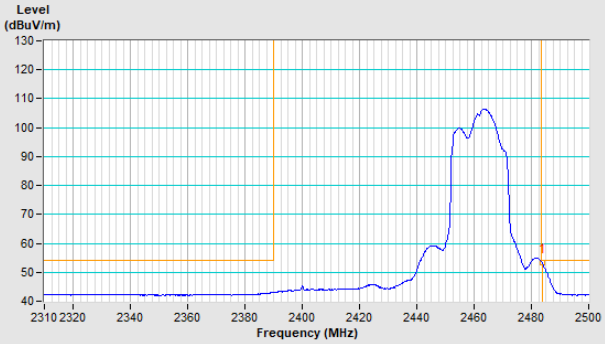

Vertical (Peak)

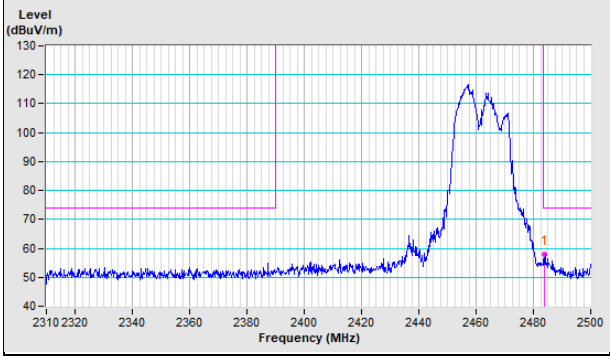

Vertical (Average)

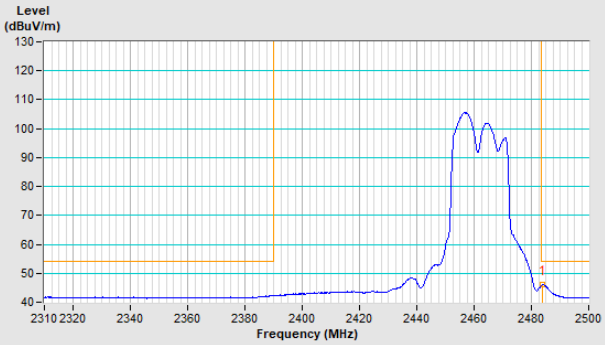

802.11ax (HE40) Channel 3

Horizontal (Peak)

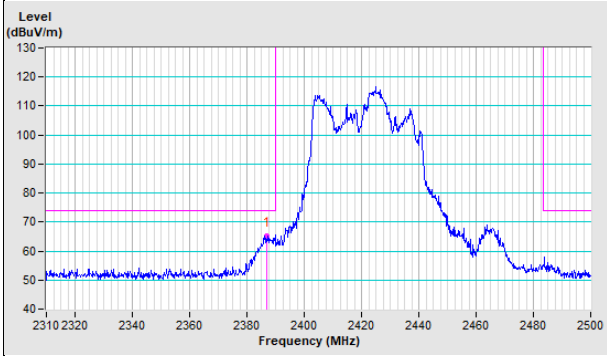

Horizontal (Average)

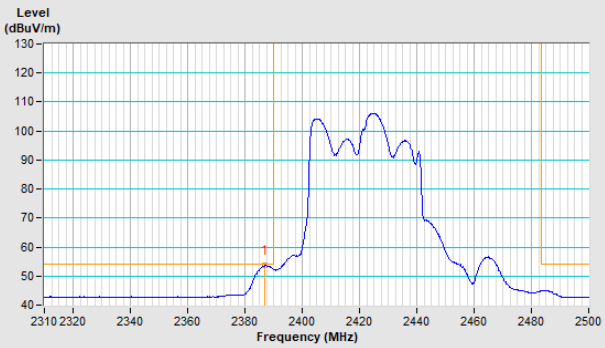

Vertical (Peak)

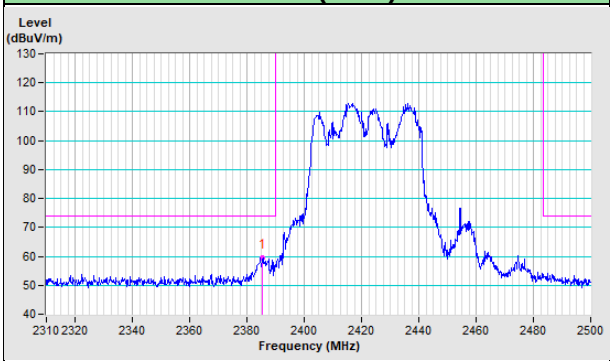

Vertical (Average)

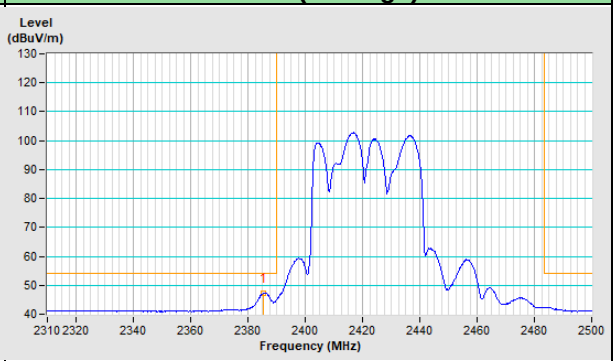

802.11ax (HE40) Channel 9

Horizontal (Peak)

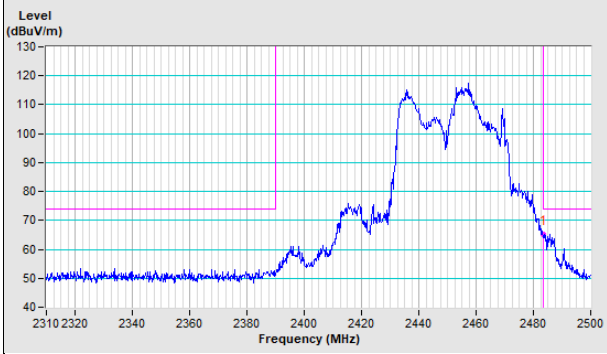

Horizontal (Average)

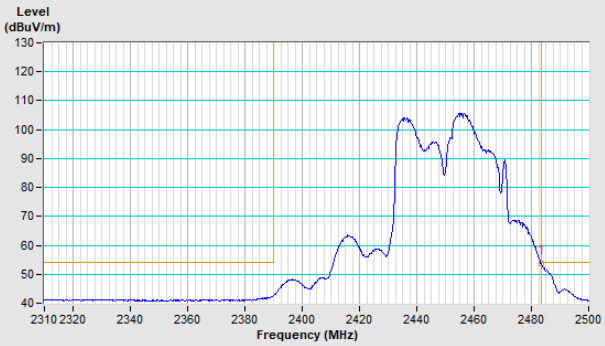

Vertical (Peak)

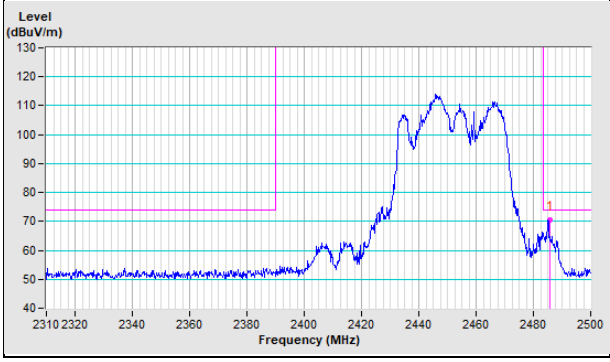

Vertical (Average)

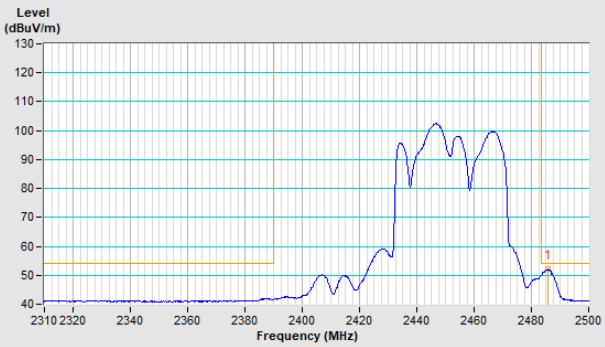

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab
Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab
Tel: 886-3-6668565
Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab
Tel: 886-3-3183232
Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com
Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---