RF Test Data for Bluetooth LE (Conducted Measurements)

General Description of EUT	
Product Name:	DVR
Test Model:	DVR-BTD8-8-4POE
Sample ID:	20210720-32-02
Environmental Conditions	
Temperature:	23.8℃
Relative Humidity:	48%
Test Voltage:	DC 5V
Test Engineer:	Huang jian ping
Note: For a more detailed features description, please refer to the report TB-FCC182925.	

1. Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1Mbps	2402	Ant1	100	0	0
NVNT	BLE 1Mbps	2442	Ant1	100	0	0
NVNT	BLE 1Mbps	2480	Ant1	100	0	0

Test Graphs

Duty Cycle NVNT BLE 1Mbps 2402MHz Ant1

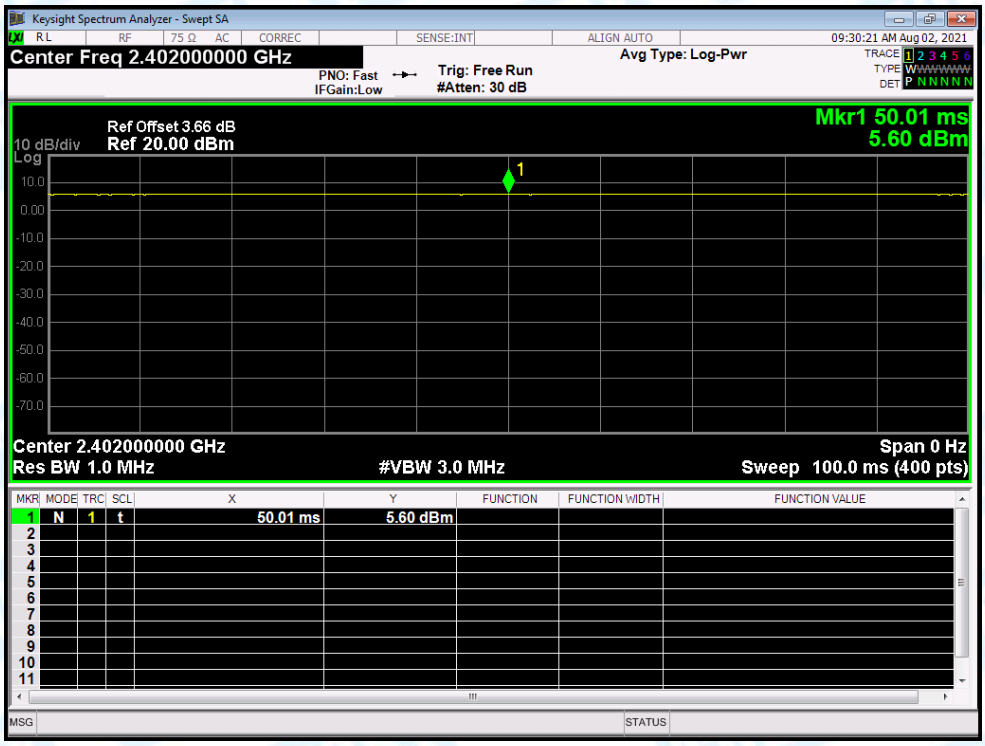

Duty Cycle NVNT BLE 1Mbps 2442MHz Ant1

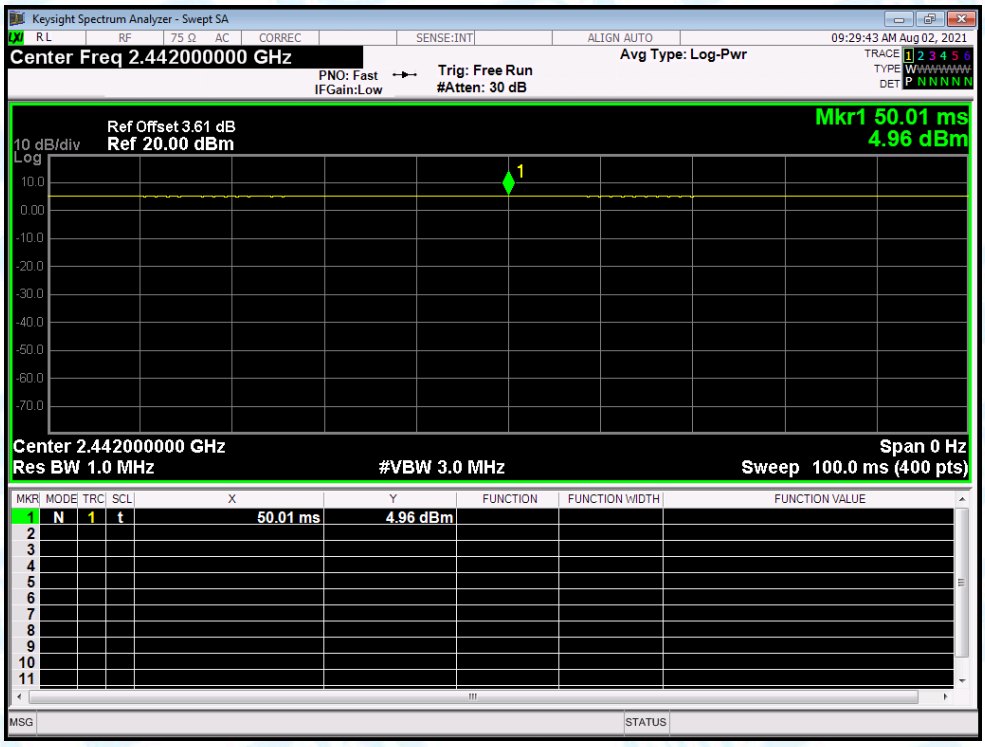

Duty Cycle NVNT BLE 1Mbps 2480MHz Ant1

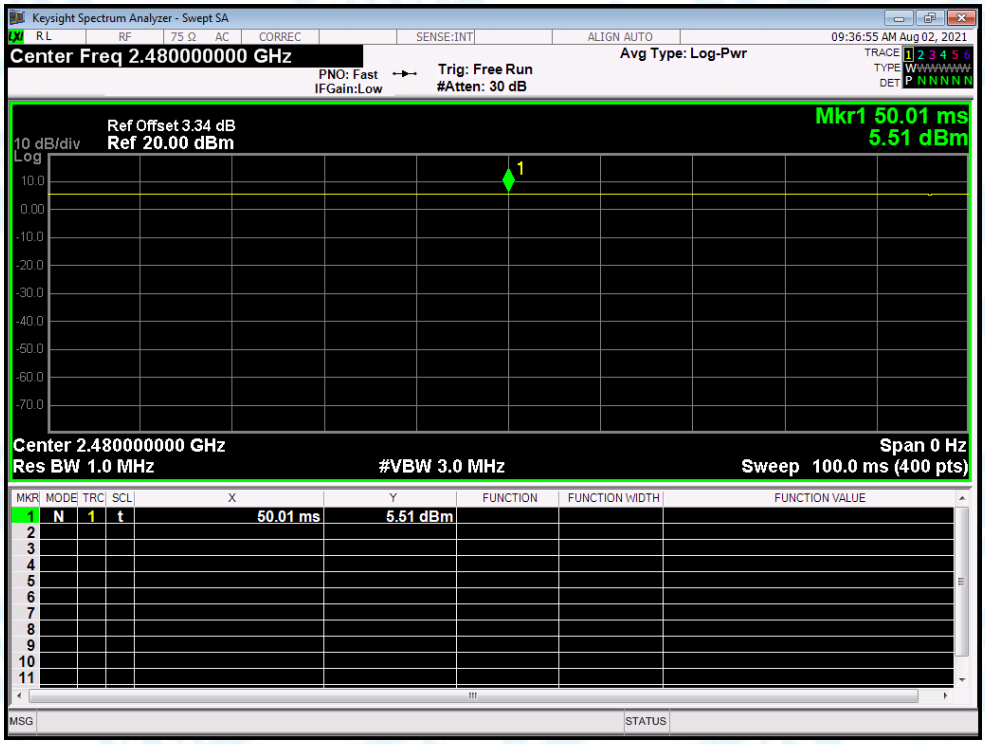

2. Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	5.464	0	5.464	30	Pass
NVNT	BLE 1Mbps	2442	Ant1	4.317	0	4.317	30	Pass
NVNT	BLE 1Mbps	2480	Ant1	5.190	0	5.190	30	Pass

Test Graphs

Power NVNT BLE 1Mbps 2402MHz Ant1

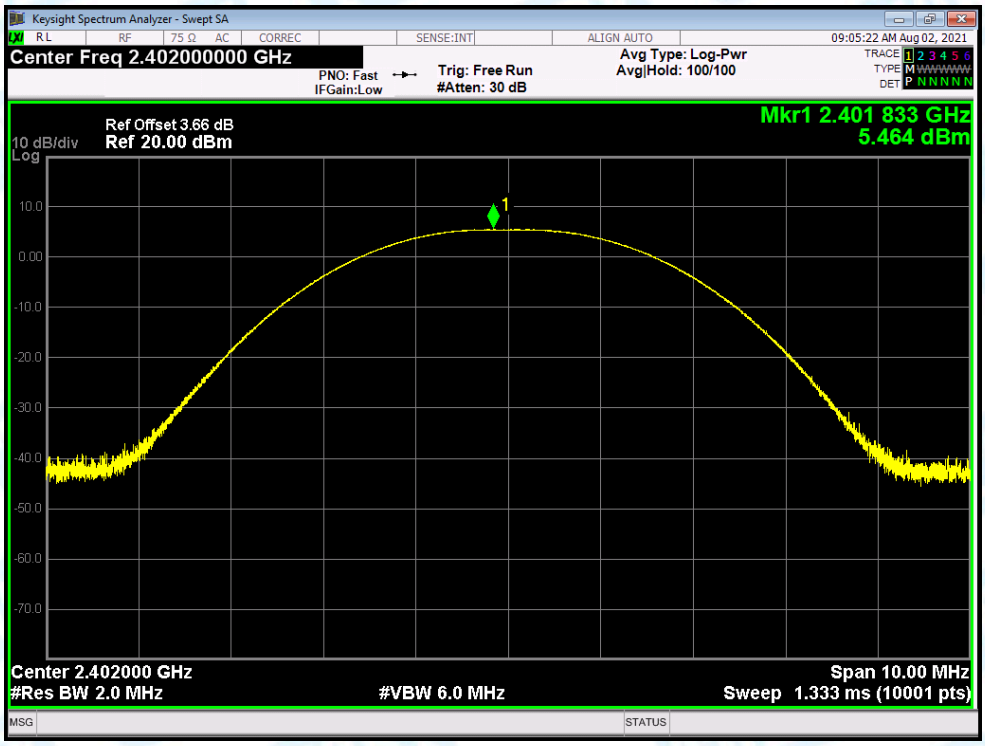

Power NVNT BLE 1Mbps 2442MHz Ant1

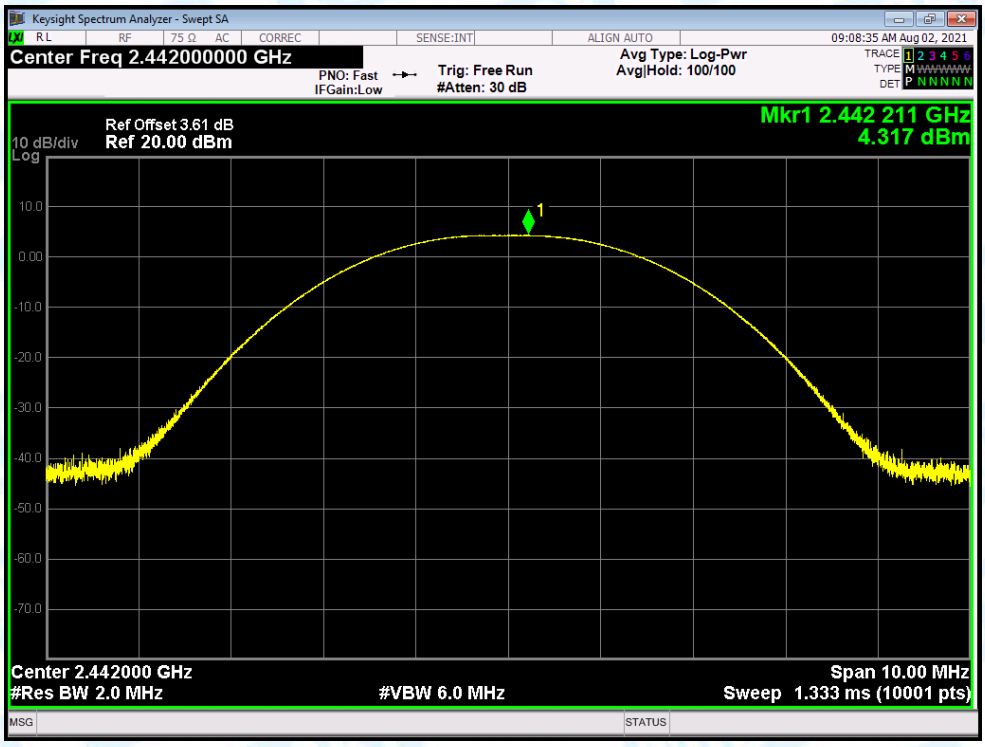

Power NVNT BLE 1Mbps 2480MHz Ant1

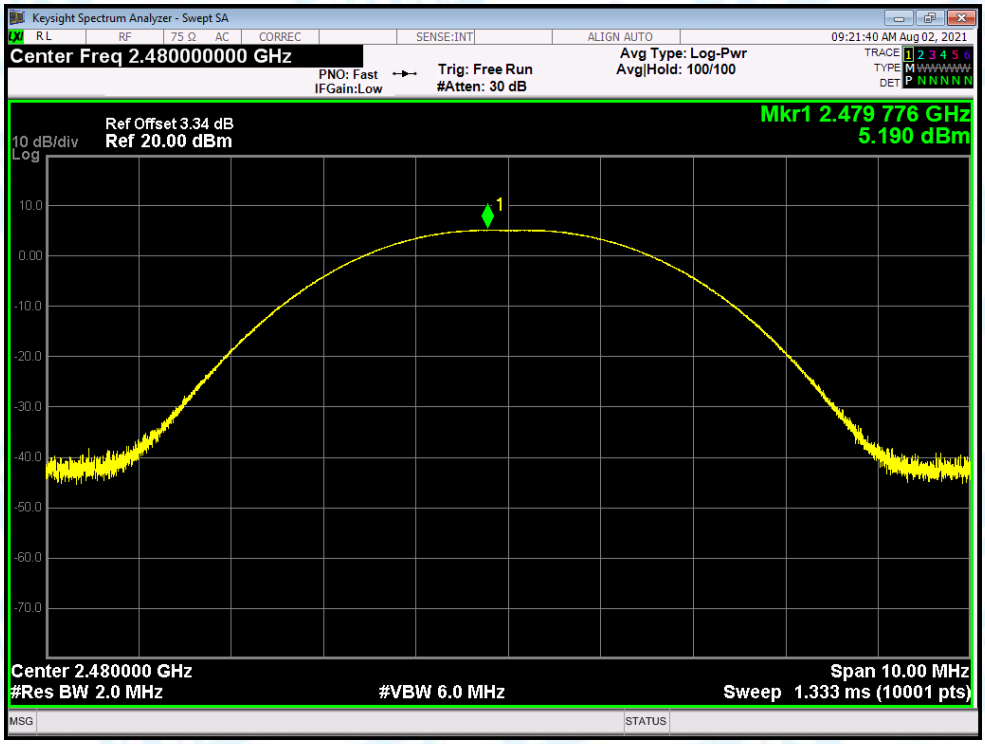

3. -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	0.705	0.5	Pass
NVNT	BLE 1Mbps	2442	Ant1	0.708	0.5	Pass
NVNT	BLE 1Mbps	2480	Ant1	0.723	0.5	Pass

Test Graphs

-6dB Bandwidth NVNT BLE 1Mbps 2402MHz Ant1

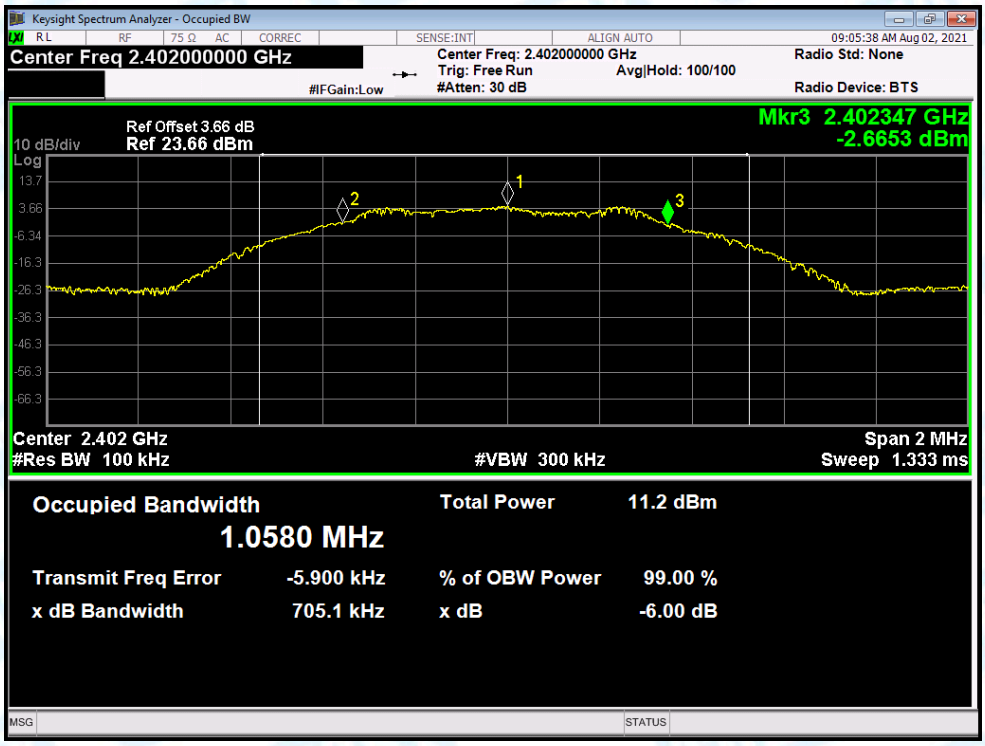

-6dB Bandwidth NVNT BLE 1Mbps 2442MHz Ant1

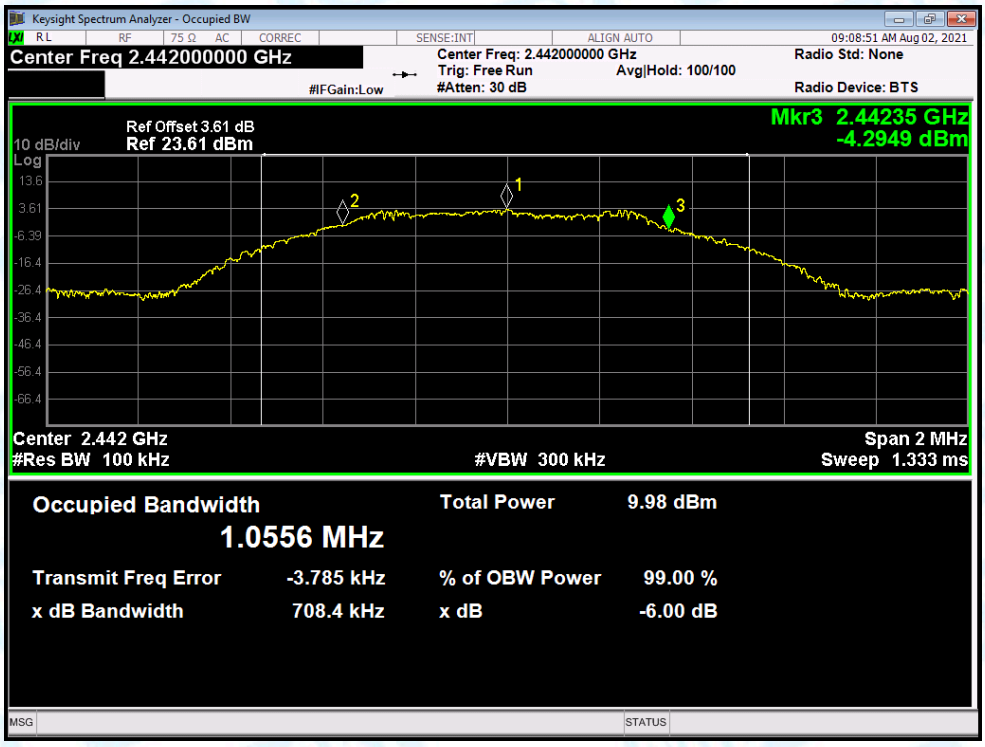

-6dB Bandwidth NVNT BLE 1Mbps 2480MHz Ant1

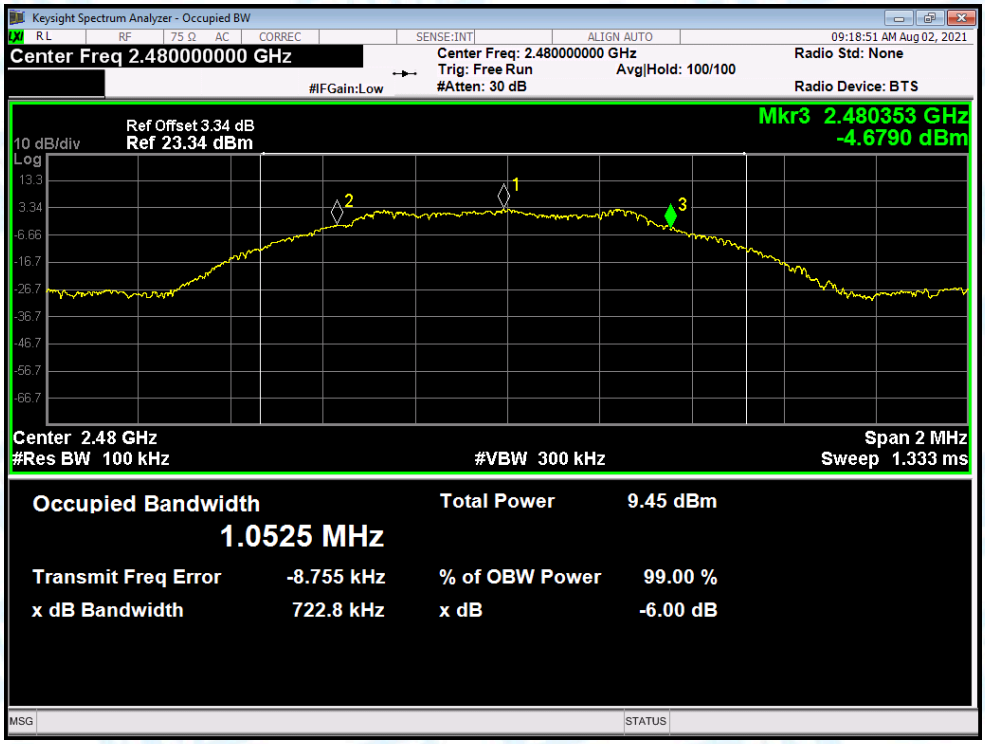

4. Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1Mbps	2402	Ant1	1.045174446
NVNT	BLE 1Mbps	2442	Ant1	1.042801909
NVNT	BLE 1Mbps	2480	Ant1	1.043153523

Test Graphs

OBW NVNT BLE 1Mbps 2402MHz Ant1

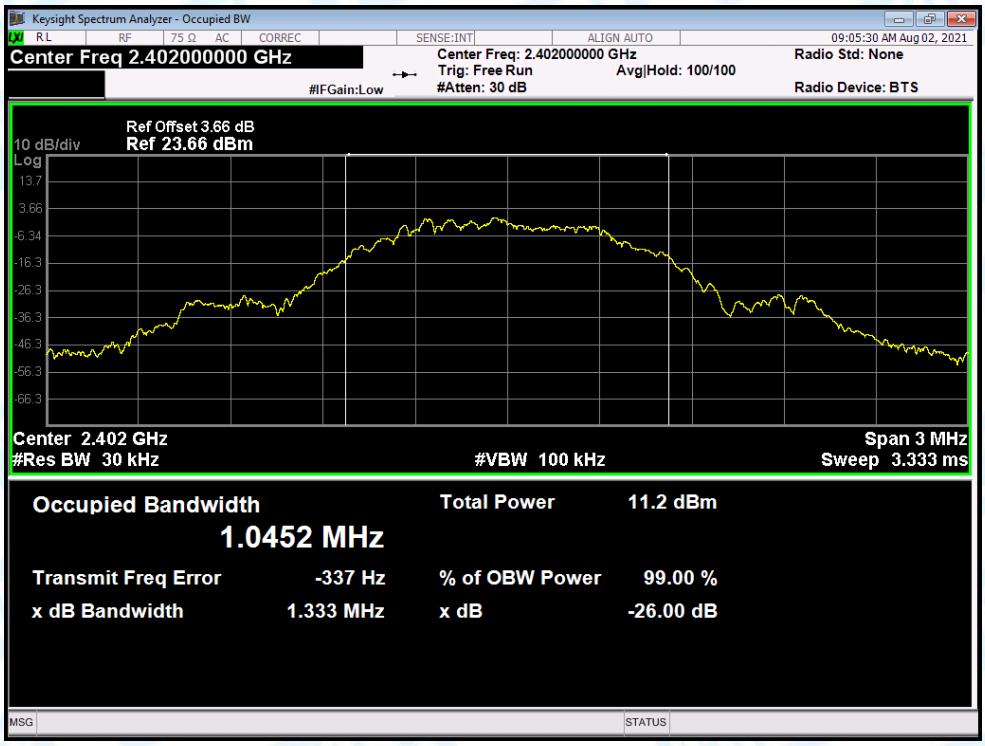

OBW NVNT BLE 1Mbps 2442MHz Ant1

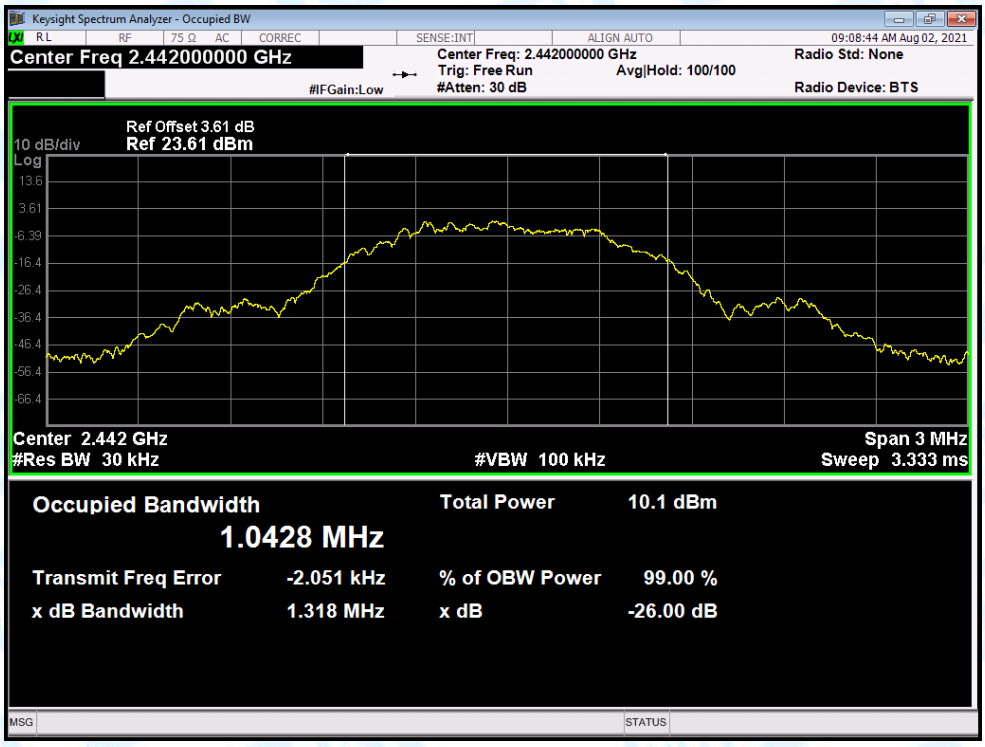

OBW NVNT BLE 1Mbps 2480MHz Ant1

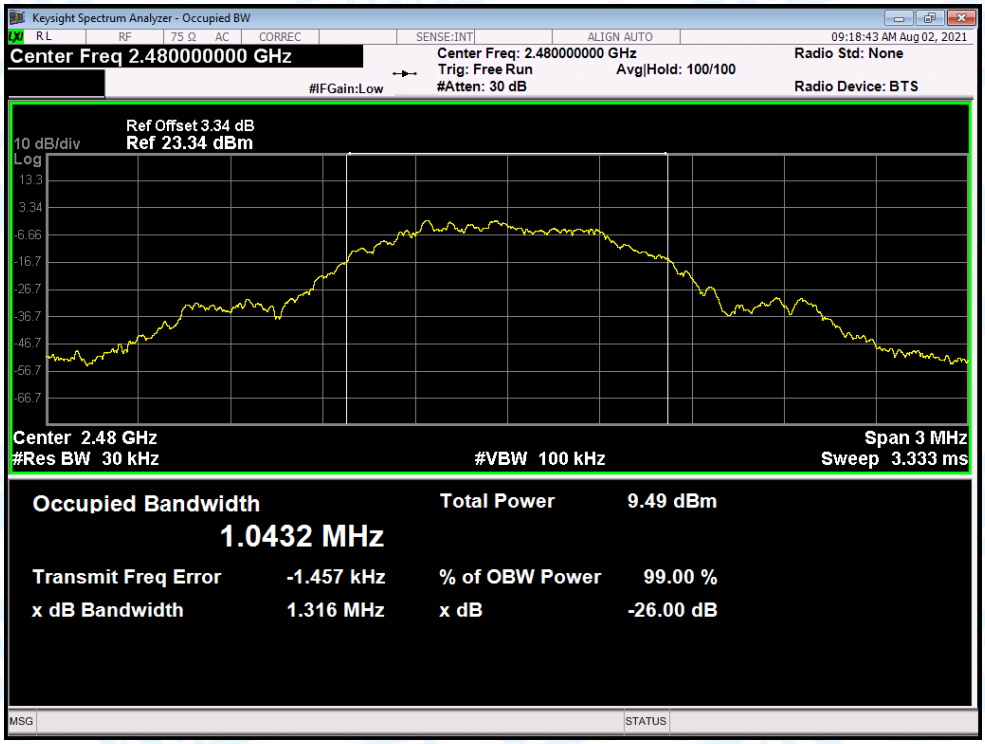

5. Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-10.497	8	Pass
NVNT	BLE 1Mbps	2442	Ant1	-11.603	8	Pass
NVNT	BLE 1Mbps	2480	Ant1	-12.251	8	Pass

Test Graphs

PSD NVNT BLE 1Mbps 2402MHz Ant1

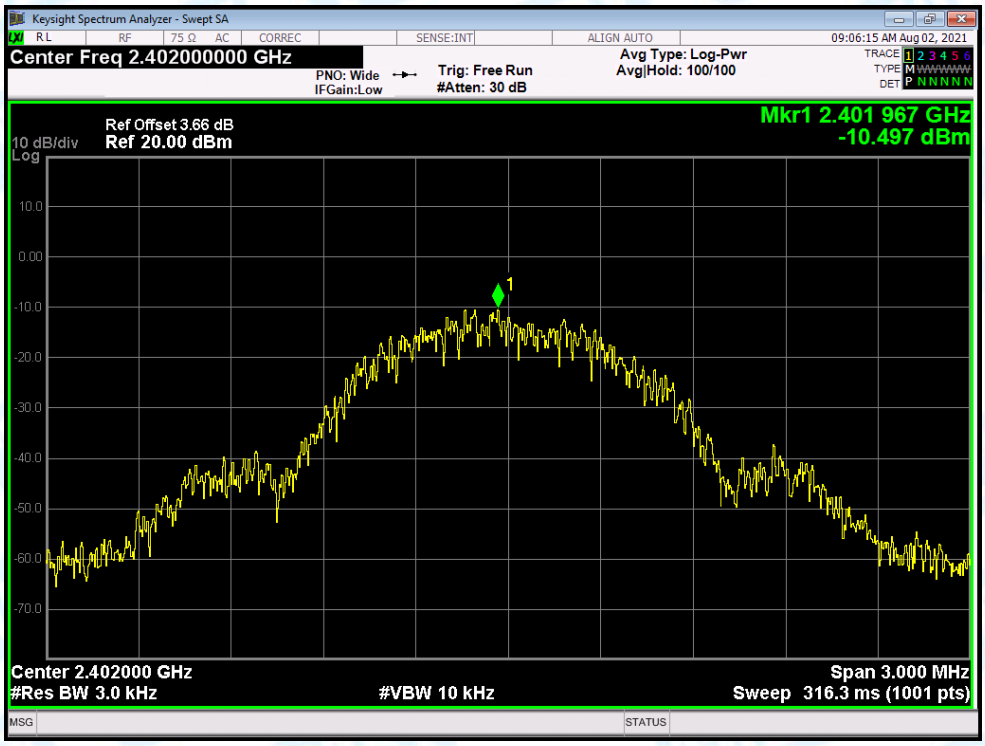

PSD NVNT BLE 1Mbps 2442MHz Ant1

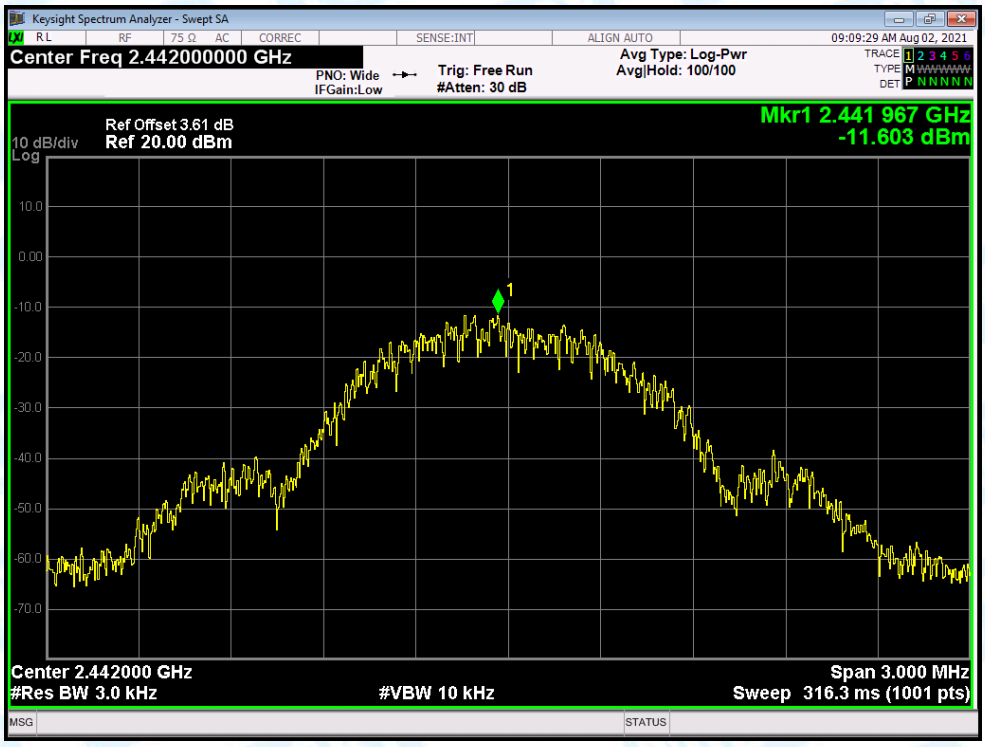

PSD NVNT BLE 1Mbps 2480MHz Ant1

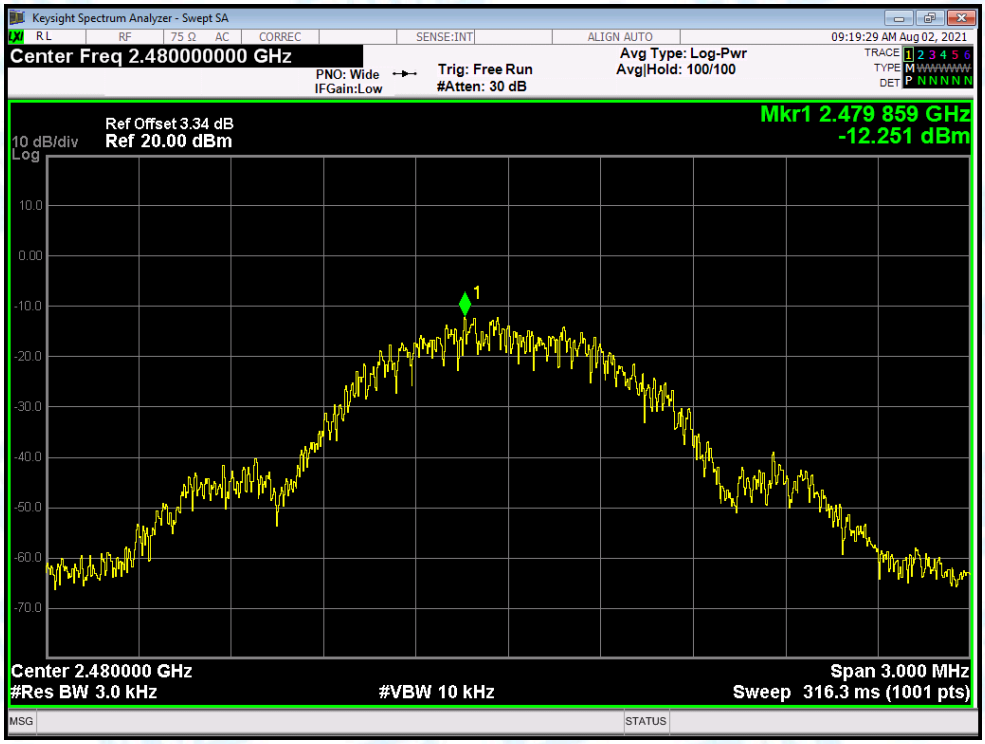

6. Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-58.01	-20	Pass
NVNT	BLE 1Mbps	2480	Ant1	-55.64	-20	Pass

Test Graphs

Band Edge NVNT BLE 1Mbps 2402MHz Ant1 Ref

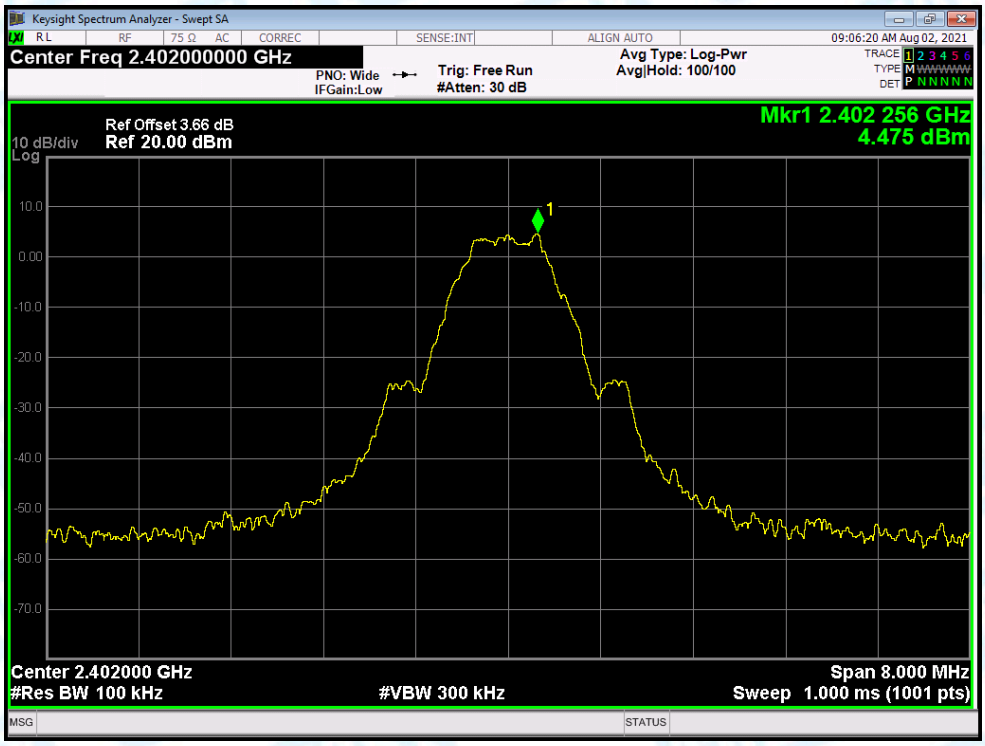

Band Edge NVNT BLE 1Mbps 2402MHz Ant1 Emission

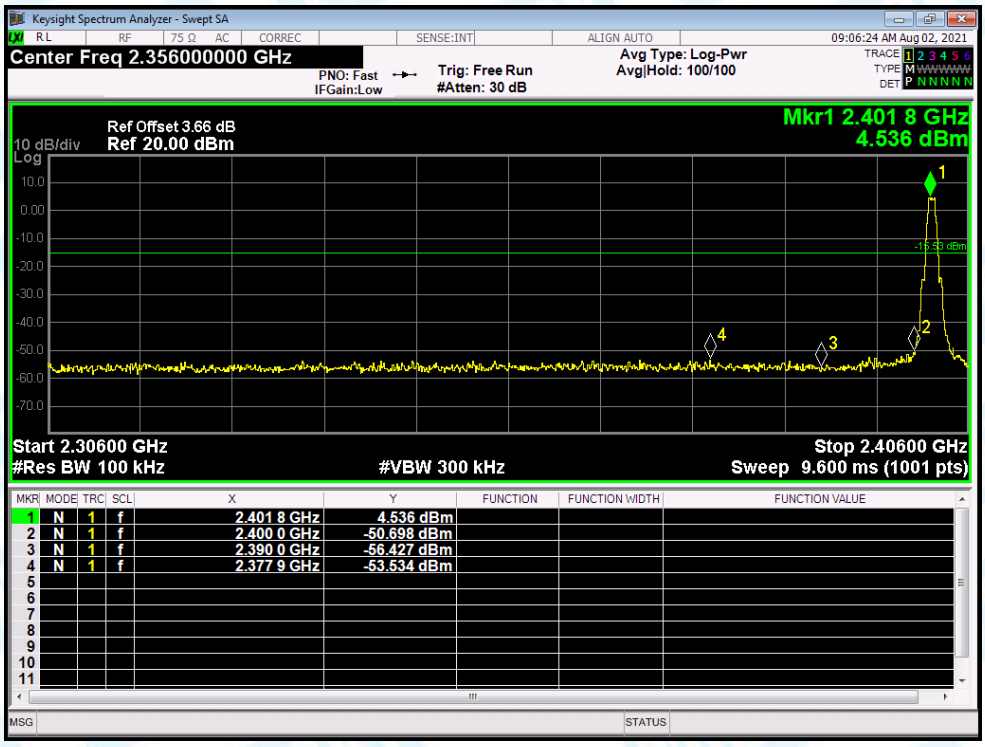

Band Edge NVNT BLE 1Mbps 2480MHz Ant1 Ref

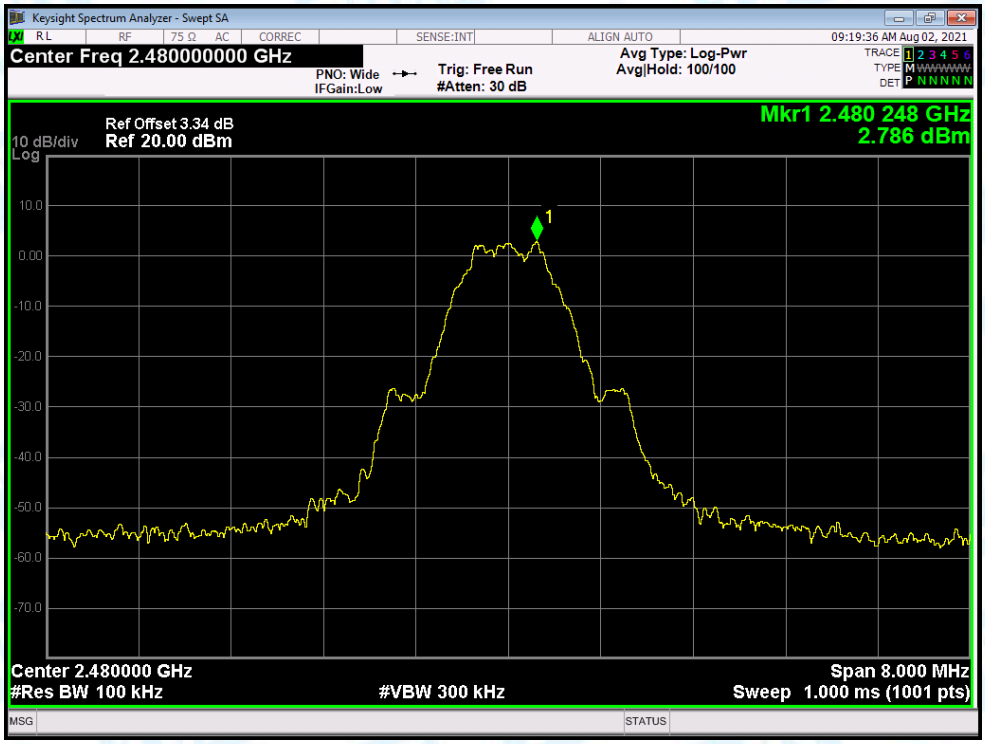

Band Edge NVNT BLE 1Mbps 2480MHz Ant1 Emission

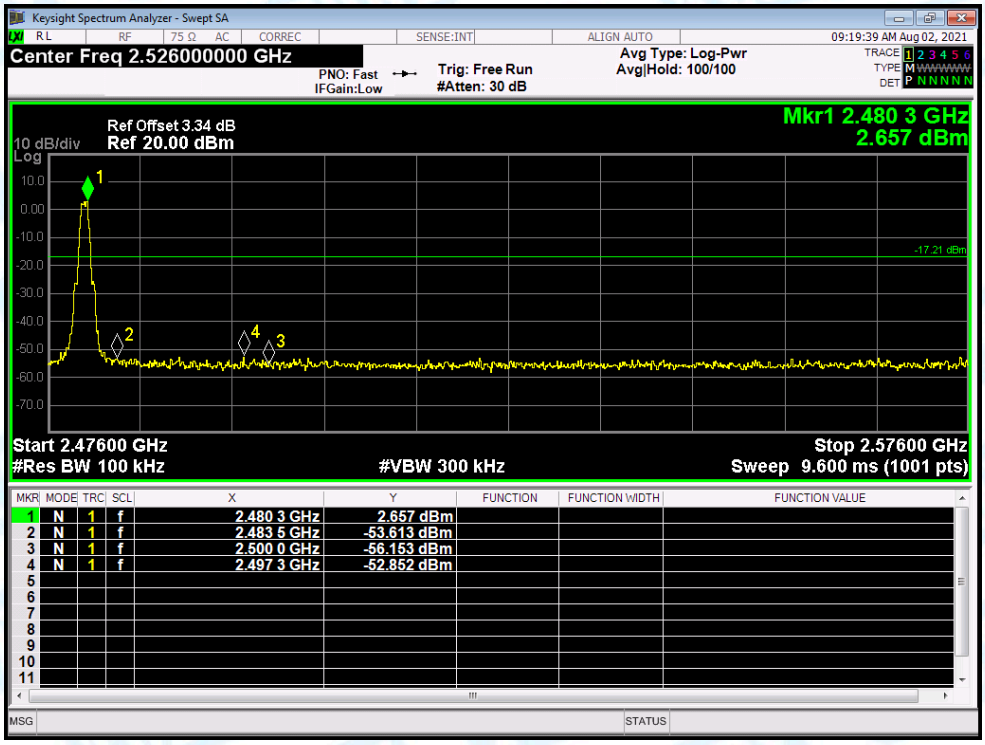

7. Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-43.57	-20	Pass
NVNT	BLE 1Mbps	2442	Ant1	-41.8	-20	Pass
NVNT	BLE 1Mbps	2480	Ant1	-41.13	-20	Pass

Test Graphs

Tx. Spurious NVNT BLE 1Mbps 2402MHz Ant1 Ref

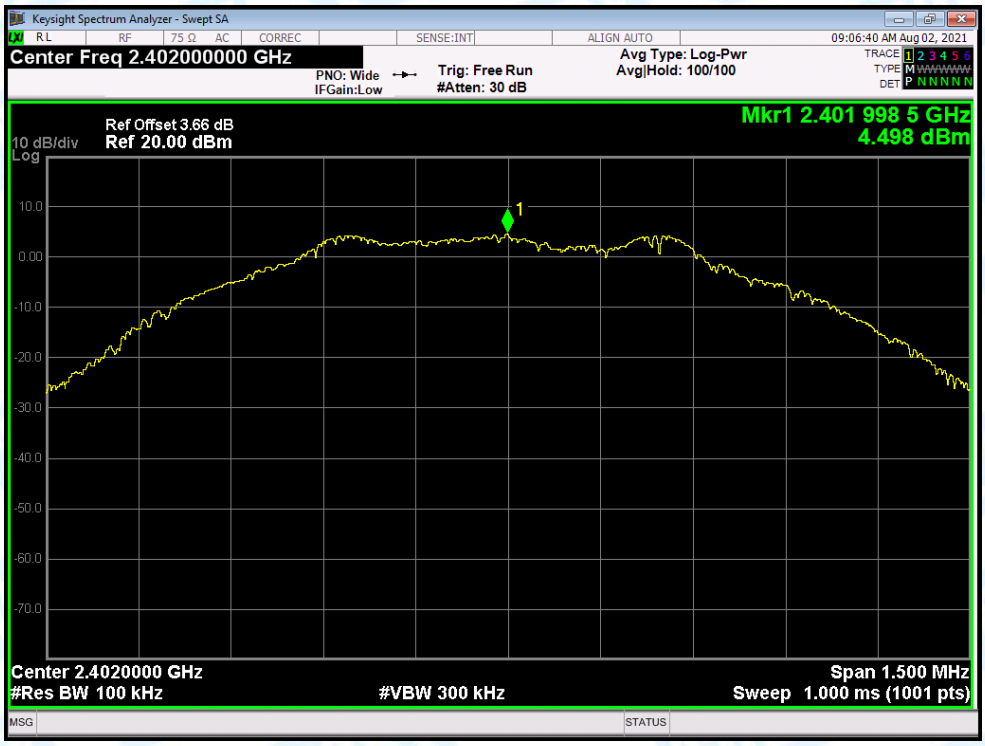

Tx. Spurious NVNT BLE 1Mbps 2402MHz Ant1 Emission

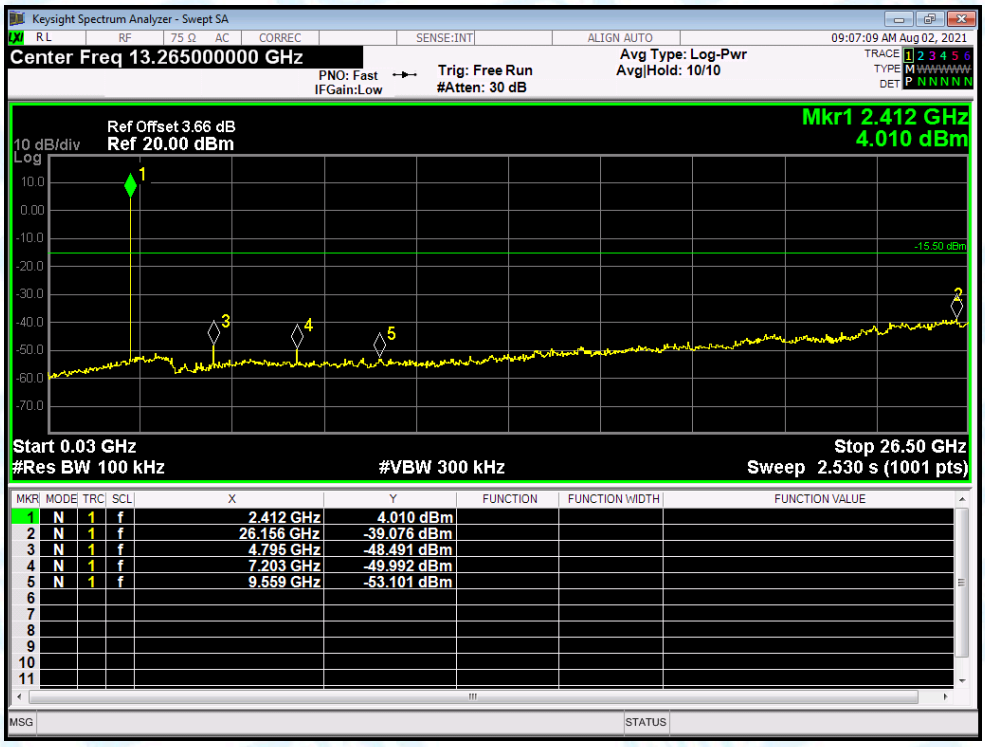

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.412 GHz	4.010 dBm			
2	N	1	f	26.156 GHz	-39.076 dBm			
3	N	1	f	4.795 GHz	-48.491 dBm			
4	N	1	f	7.203 GHz	-49.992 dBm			
5	N	1	f	9.559 GHz	-53.101 dBm			
6								
7								
8								
9								
10								
11								

Tx. Spurious NVNT BLE 1Mbps 2442MHz Ant1 Ref

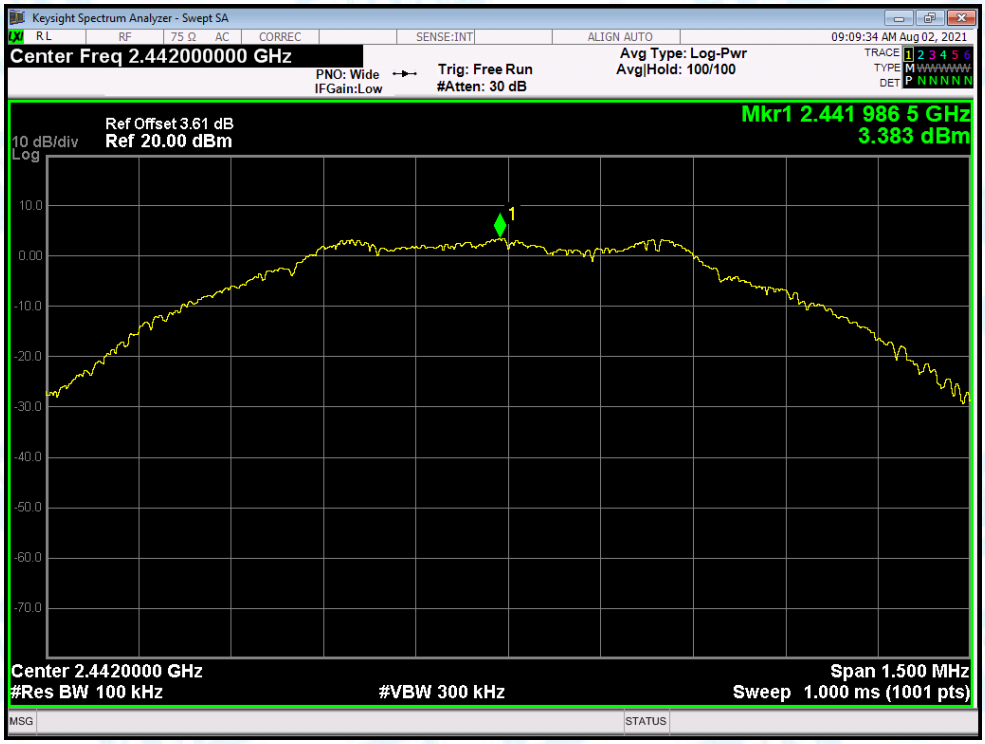

Tx. Spurious NVNT BLE 1Mbps 2442MHz Ant1 Emission

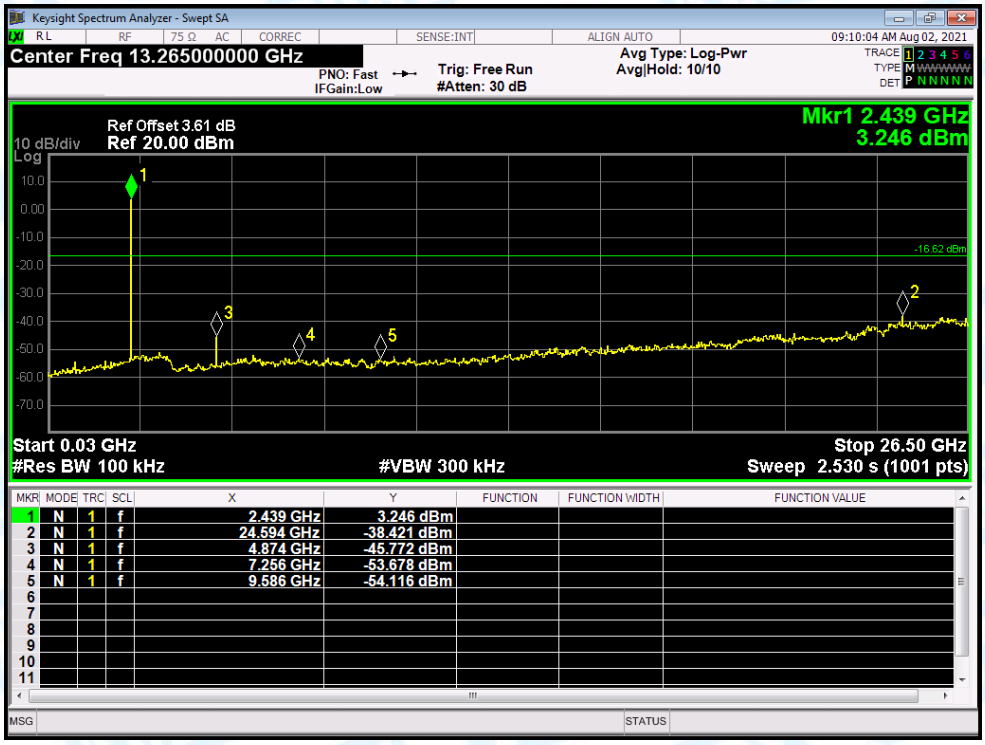

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.439 GHz	3.246 dBm			
2	N	1	f	24.594 GHz	-38.421 dBm			
3	N	1	f	4.874 GHz	-45.772 dBm			
4	N	1	f	7.256 GHz	-53.678 dBm			
5	N	1	f	9.586 GHz	-54.116 dBm			
6								
7								
8								
9								
10								
11								

Tx. Spurious NVNT BLE 1Mbps 2480MHz Ant1 Ref

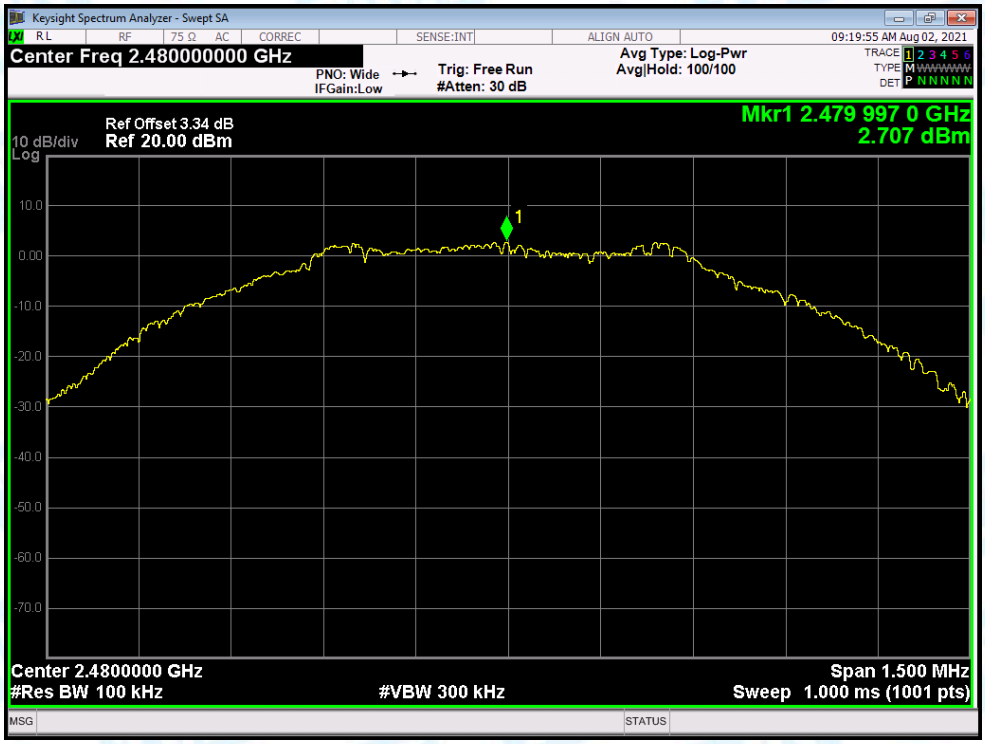

Tx. Spurious NVNT BLE 1Mbps 2480MHz Ant1 Emission

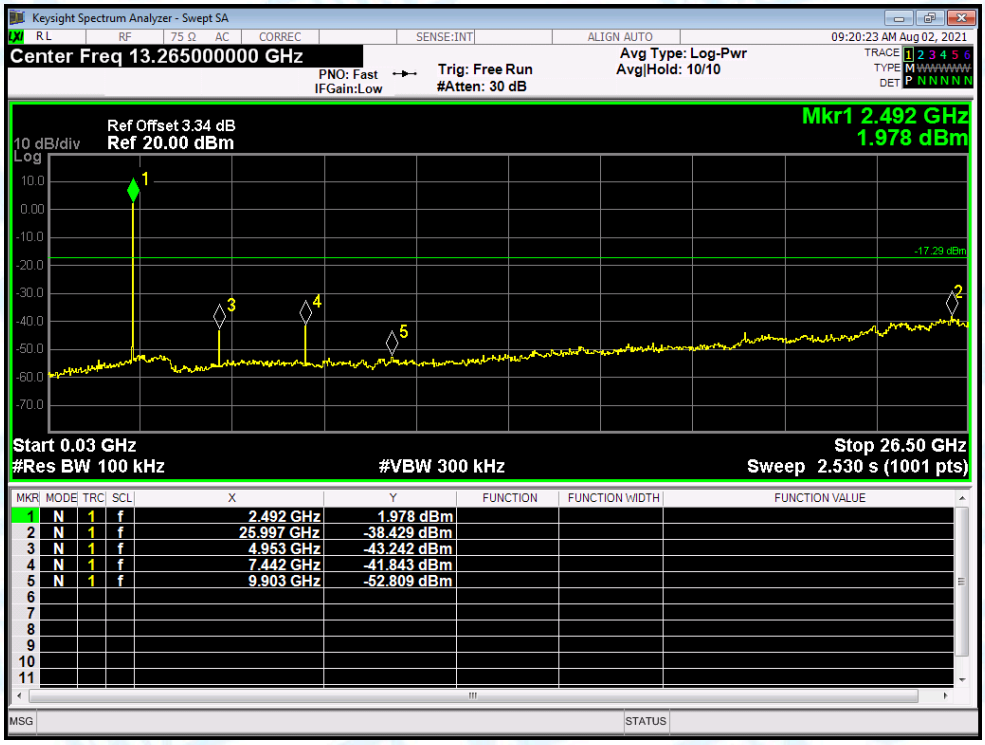

8. Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	2310	-44.93	2	52.33	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2310	-55.02	2	42.24	Average	54	Pass
NVNT	BLE 1Mbps	2402	Ant1	2381.232	-42.06	2	55.2	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2372.4	-53.61	2	43.65	Average	54	Pass
NVNT	BLE 1Mbps	2402	Ant1	2390	-44.64	2	52.62	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2390	-54.11	2	43.15	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.5	-43.36	2	53.9	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.5	-52.54	2	44.72	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.944	-41.94	2	55.32	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.728	-52.51	2	44.75	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2500	-44.94	2	52.32	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2500	-54.23	2	43.03	Average	54	Pass

Test Graphs

Restrict Band NVNT BLE 1Mbps 2402MHz Ant1 Peak

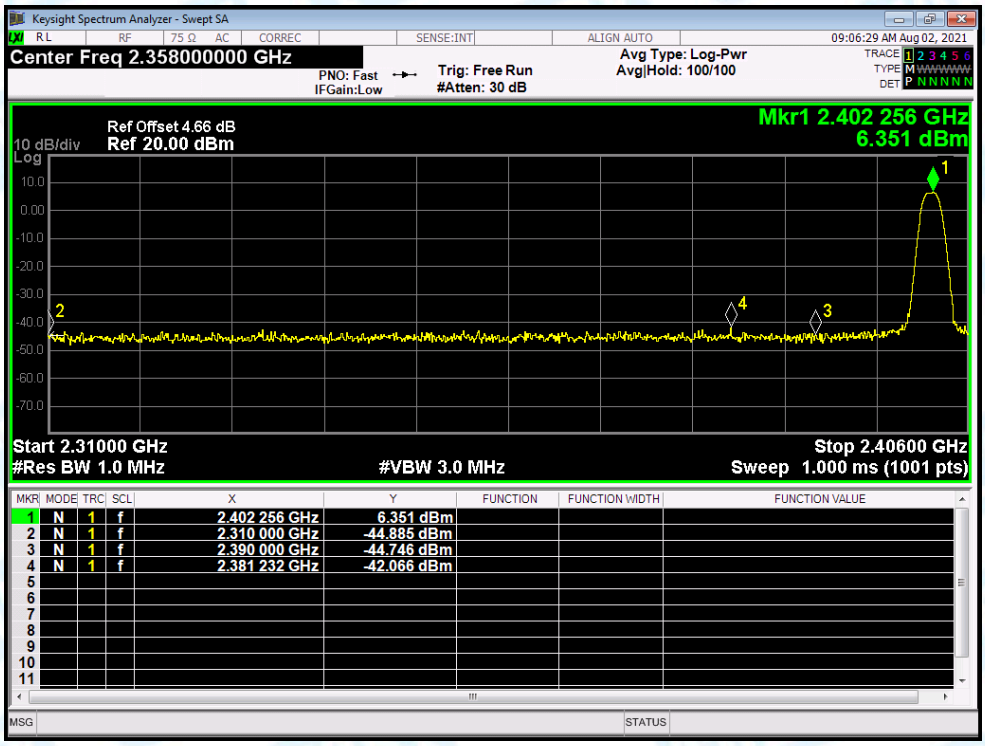

Restrict Band NVNT BLE 1Mbps 2402MHz Ant1 Average

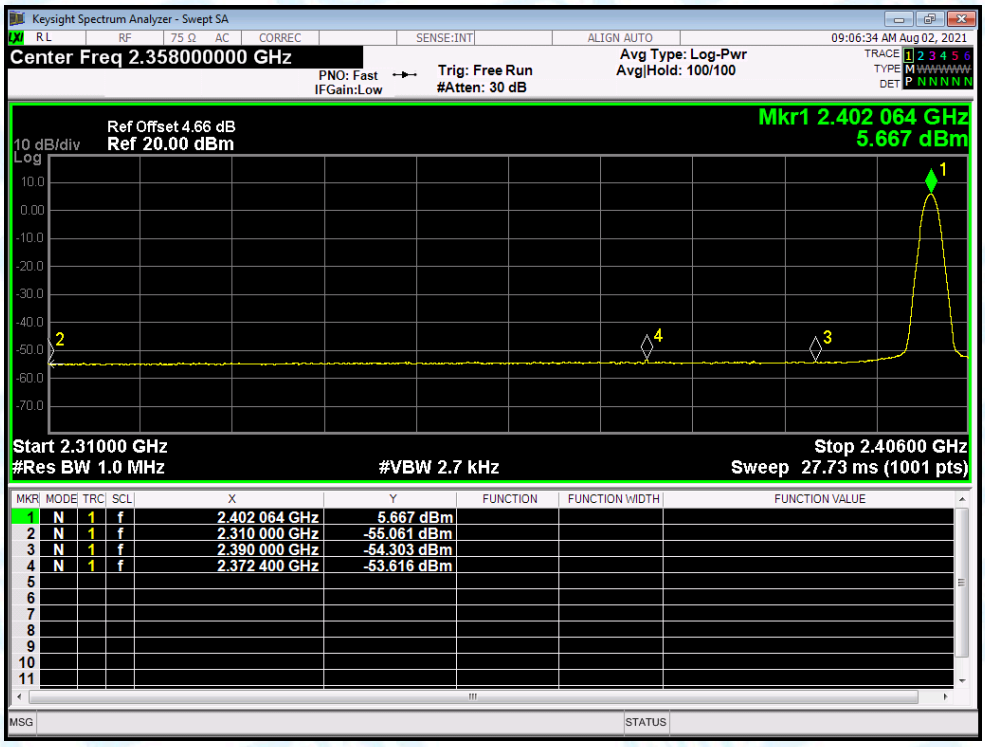

Restrict Band NVNT BLE 1Mbps 2480MHz Ant1 Peak

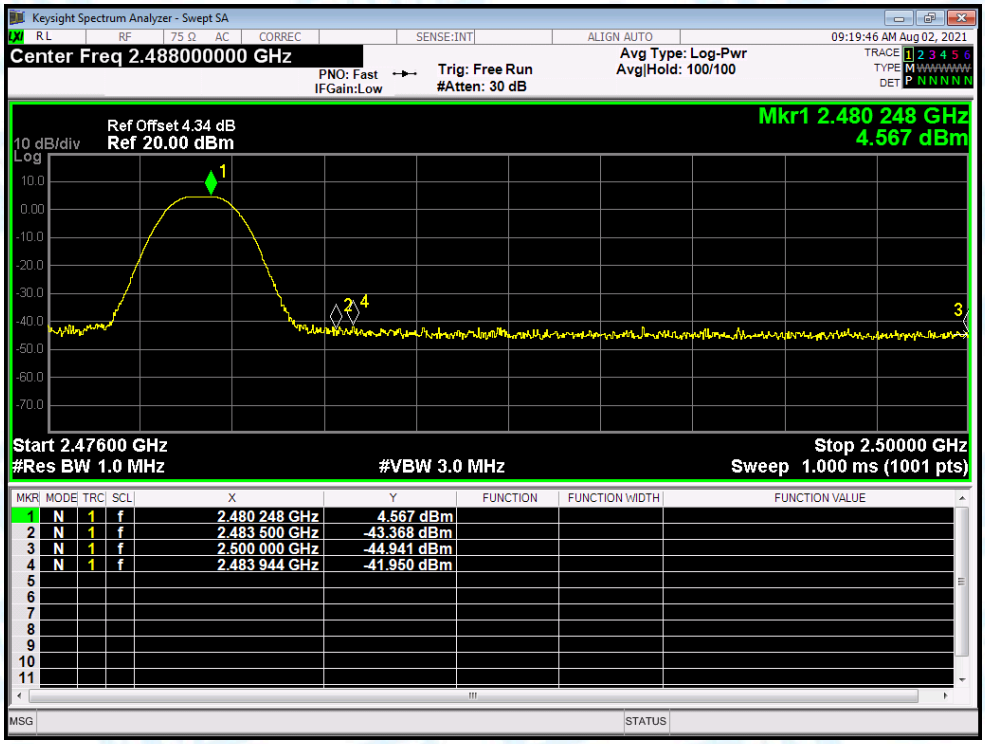

Restrict Band NVNT BLE 1Mbps 2480MHz Ant1 Average

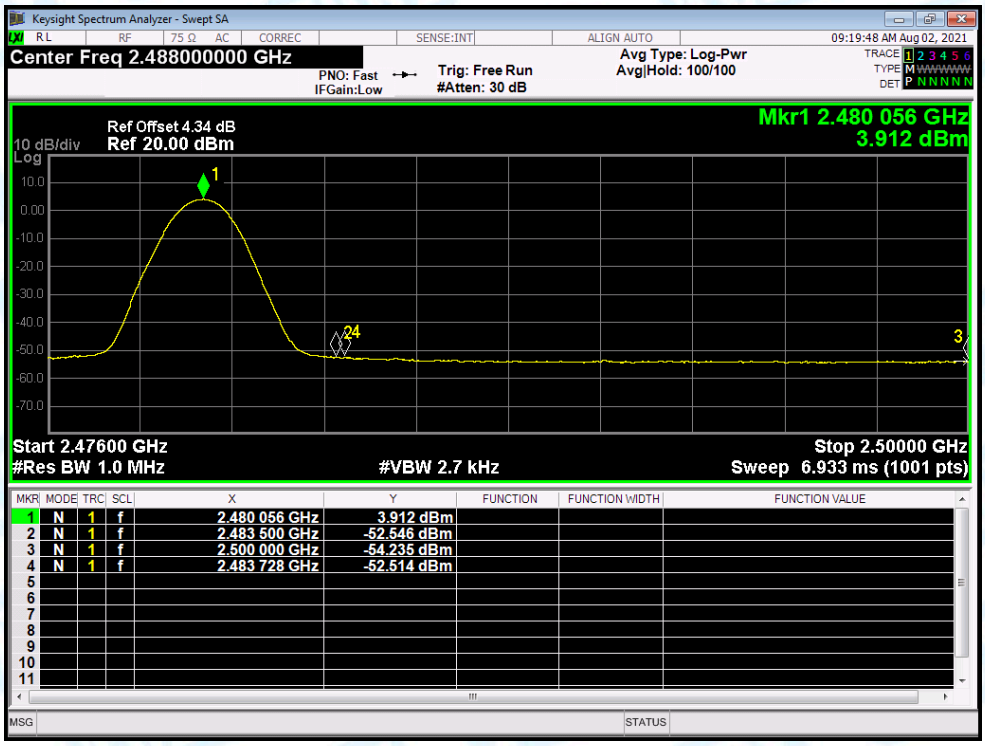

-----END OF REPORT------